

TEST REPORT

FCC LTE B41 Test for TFGMEIBBCD4
Class II Permissive Change

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2406-FC013

DATE OF ISSUE
September 26, 2024

Tested by
Jung Ki Lim



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2406-FC013

DATE OF ISSUE

September 26, 2024

Additional Model

TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8,
TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC

Applicant

LG Electronics Inc.

10, MagokJungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea

Product Name

GM Onstar Gen12 ROW

Model Name

TFGMEIBBCD4

Date of Test

May 07, 2024 ~ June 19, 2024

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC ID

BEJTFGMEIBBCD4

FCC Classification

PCS Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part(s) : § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	September 26, 2024	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION.....	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION.....	7
2.1. DESCRIPTION OF EUT.....	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY.....	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 CONDUCTED OUTPUT POWER.....	9
3.3 RADIATED TEST	10
3.3.1 RADIATED POWER.....	11
3.3.2 RADIATED SPURIOUS EMISSIONS	12
3.4 PEAK- TO- AVERAGE RATIO	14
3.5 OCCUPIED BANDWIDTH.....	16
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	17
3.7 CHANNEL EDGE	18
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	20
3.9 WORST CASE(RADIATED TEST)	21
3.10 WORST CASE(CONDUCTED TEST)	22
4. LIST OF TEST EQUIPMENT	23
5. MEASUREMENT UNCERTAINTY	24
6. SUMMARY OF TEST RESULTS	25
7. Emission Designator	26
8. TEST DATA.....	27
8.1 Conducted Output Power.....	27
8.2 EQUIVALENT ISOTROPIC RADIATED POWER	31
8.2.1 External Antenna.....	31
8.2.2 Internal Antenna	33
8.3 RADIATED SPURIOUS EMISSIONS	35
8.3.1 External Antenna.....	35
8.3.2 Internal Antenna	39
8.4 PEAK-TO-AVERAGE RATIO	43
8.5 OCCUPIED BANDWIDTH.....	44
8.6 CONDUCTED SPURIOUS EMISSIONS.....	45
8.7 CHANNEL EDGE	46
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	47
9. TEST PLOTS.....	59
10. ANNEX A_ TEST SETUP PHOTO.....	145

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	LG Electronics Inc..
Address:	10, Magok Jungang-ro, Gangseo-gu, Seoul 07796, Republic of Korea
FCC ID:	BEJTFGMEIBBCD4
Application Type:	Class II Permissive Change
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 27
EUT Type:	GM Onstar Gen12 ROW
Model(s):	TFGMEIBBCD4
Additional Model(s)	TFGMEIBBCD5, TFGMEIBBCD6, TFGMEIBBCD7, TFGMEIBBCD8, TFGMEIBBCD9, TFGMEIBBCDA, TFGMEIBBCDB, TFGMEIBBCDC
Tx Frequency:	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
Date(s) of Tests:	May 07, 2024 ~ June 19, 2024
Serial number:	Radiated : EBR36018942K_#30 Conducted : EBR36018942K_#30
External Antenna Information	ANT5 : 86531607 ANT4 : 86575530 DUT4 : 85608774

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP External Antenna		EIRP Internal Antenna	
				Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)
LTE – Band 41/38(5)	2498.5 – 2687.5	4M50G7D	QPSK	0.406	26.08	0.966	29.85
		4M50W7D	16 QAM	0.338	25.29	0.780	28.92
		4M51W7D	64 QAM	0.267	24.26	0.627	27.97
		4M49W7D	256 QAM	0.133	21.23	0.309	24.90
LTE – Band 41/38(10)	2501.0 – 2685.0	8M97G7D	QPSK	0.385	25.85	1.021	30.09
		9M02W7D	16 QAM	0.321	25.06	0.836	29.22
		8M97W7D	64 QAM	0.254	24.05	0.658	28.18
		8M95W7D	256 QAM	0.126	21.02	0.328	25.16
LTE – Band 41/38(15)	2503.5 – 2682.5	13M5G7D	QPSK	0.389	25.90	0.982	29.92
		13M5W7D	16 QAM	0.325	25.12	0.817	29.12
		13M5W7D	64 QAM	0.261	24.17	0.661	28.20
		13M5W7D	256 QAM	0.130	21.13	0.323	25.09
LTE – Band 41/38(20)	2506.0 – 2680.0	17M9G7D	QPSK	0.384	25.84	0.993	29.97
		17M9W7D	16 QAM	0.318	25.03	0.824	29.16
		17M9W7D	64 QAM	0.252	24.02	0.662	28.21
		17M9W7D	256 QAM	0.128	21.06	0.329	25.17

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a GM Onstar Gen12 ROW with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY


The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 – Section 5.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 CONDUCTED OUTPUT POWER

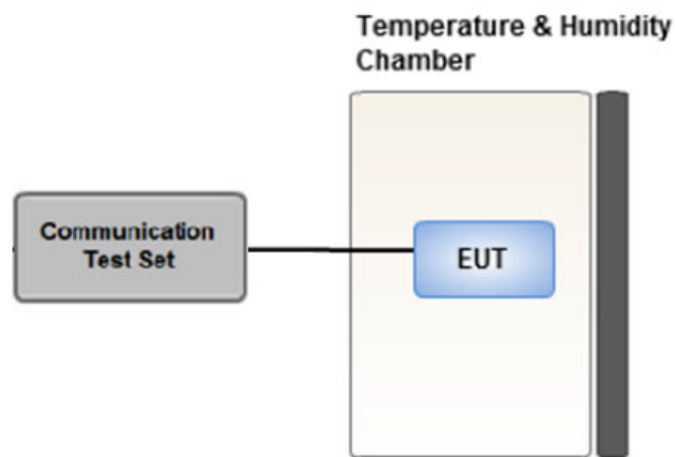

Test setup

Test Overview

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurements be performed only over durations of active transmissions at maximum output power level applies.

Conducted Output Power was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v03r01, Section 5.2.


3.3 RADIATED TEST

Test Overview


Radiated tests are performed in the semi-anechoic chamber. The equipment under test is placed on a non-conductive table on semi-anechoic chamber.

Test Configuration


Below 30 MHz

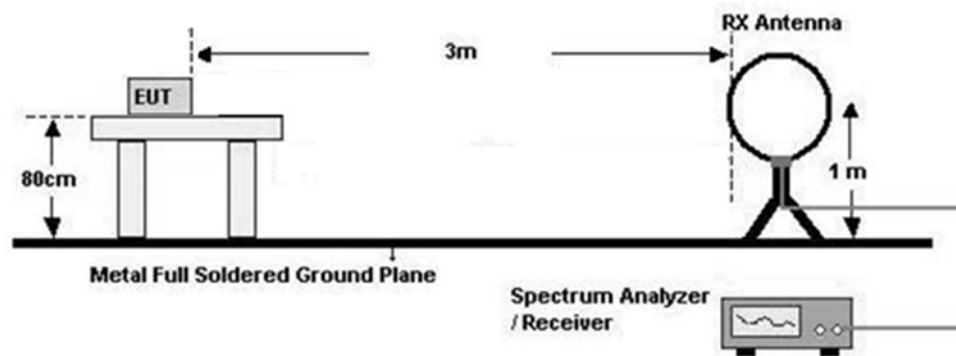

30 MHz - 1 GHz

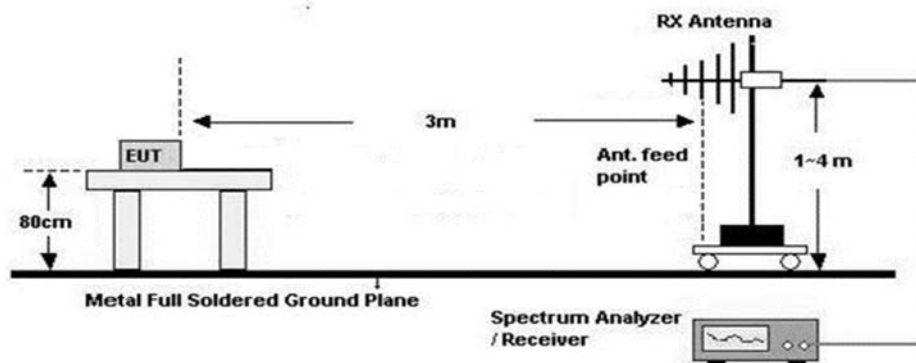

Above 1 GHz

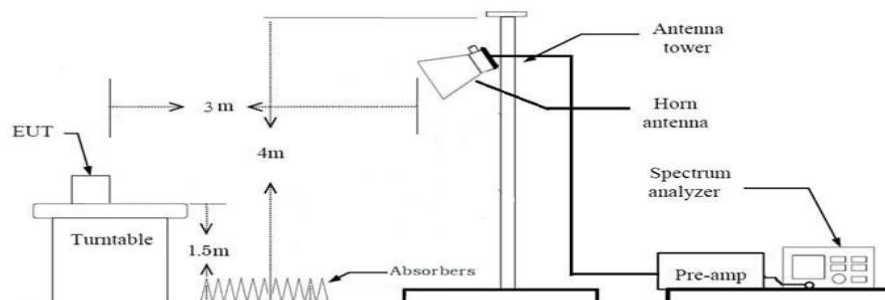

3.3.1 RADIATED POWER

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The EUT is placed on a turntable, which is 0.8 m above ground plane. (Below 1 GHz)
2. The EUT is placed on a turntable, which is 1.5 m above ground plane. (Above 1 GHz)
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.
7. $\text{Total(dB}\mu\text{V/m)} = \text{Measured Value(dB}\mu\text{V)} + \text{Cable Loss(dB)} + \text{Antenna Factor(dB/m)} + \text{Distance Factor(D.F)}$
8. EIRP (dBm)
 $= \text{Total (dB}\mu\text{V/m)} + 20 \log D - 104.8$ (where D is the measurement distance in meters. D=3)
 $= \text{Total (dB}\mu\text{V/m)} - 95.2(\text{dB})$
9. $\text{ERP(dBm)} = \text{EIRP(dBm)} - 2.15(\text{dB})$

3.3.2 RADIATED SPURIOUS EMISSIONS

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
2. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Below 30 MHz

1. The loop antenna was placed at a location 3 m from the EUT
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance : 3 m
6. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance : 3 m
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
8. EIRP (dBm)
= Total (dB μ V/m) + $20 \log D - 104.8$ (where D is the measurement distance in meters. D=3)
= Total (dB μ V/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


Below 1 GHz

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F)
8. EIRP (dBm)
= Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
= Total (dBμV/m) - 95.2(dB)
9. ERP(dBm) = EIRP(dBm) - 2.15(dB)

Above 1 GHz

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Total(dBμV/m) = Measured Value(dBμV) + Cable Loss(dB) + Antenna Factor(dB/m) + Distance Factor(D.F) + H.P.F(dB) - Amp Gain(dB)
8. EIRP (dBm)
= Total (dBμV/m) + 20 log D – 104.8 (where D is the measurement distance in meters. D=3)
= Total (dBμV/m) - 95.2(dB)

3.4 PEAK- TO- AVERAGE RATIO

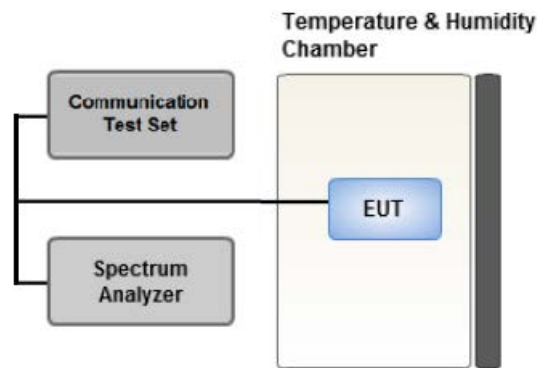

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R._{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

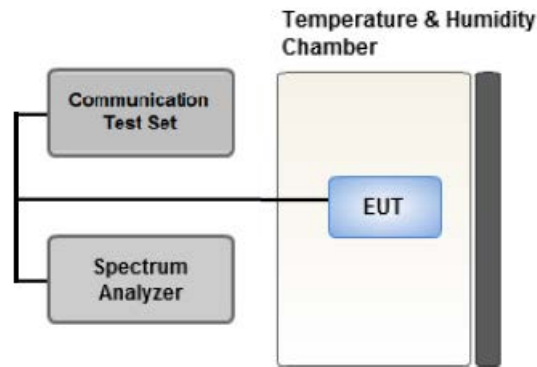

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

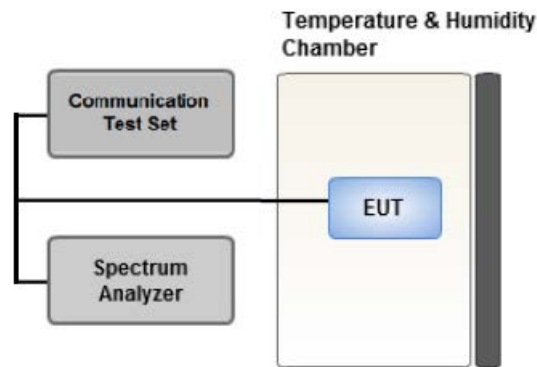

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 CHANNEL EDGE

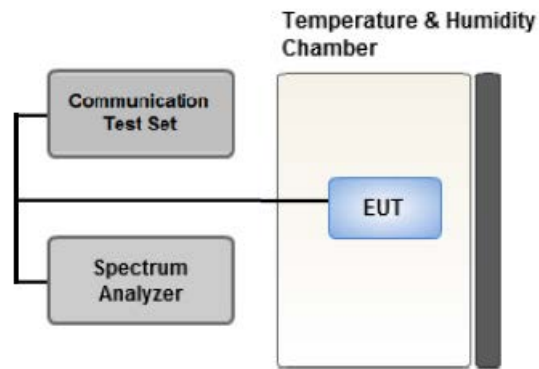

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. $VBW > 3 \times RBW$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

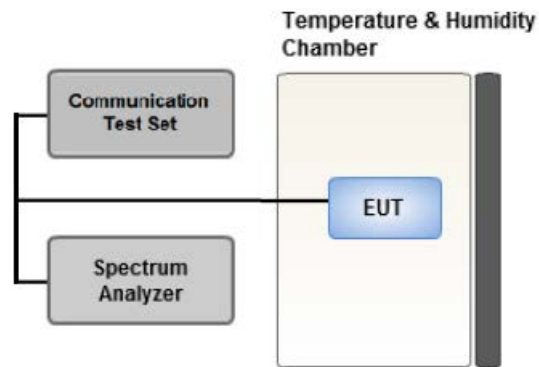

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Internal Antenna, External Antenna (ANT 5, ANT 4, DUT 4)
Worst case : Internal Antenna, External Antenna (ANT 5)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported.
(External Antenna Worst case : 5 MHz)
(Internal Antenna Worst case : 10 MHz)
- LTE Band 41 power class 3(5 M/10 M/15 M/20 M) overlaps the entire frequency range of LTE Band 38(5 M/10 M/15 M/20 M) and they have the same Tune-up power.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.
(Worst case : TFGMEIBBCD4)

[External Antenna Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16 QAM, 64 QAM 256 QAM,	See Section 8.2.1		Only X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.3.1		Only X

[Internal Antenna Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16 QAM, 64 QAM, 256 QAM	See Section 8.2.2		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.3.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- TFGMEIBBCD4 & additional models were tested and the worst case results are reported.
(Worst case : TFGMEIBBCD4)
- LTE Band 41 power class 3(5M/10M/15M/20M) overlaps the entire frequency range of LTE Band 38(5M/10M/15M/20M) and they have the same Tune-up power.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16 QAM, 64 QAM, 256 QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16 QAM, 64 QAM, 256 QAM	5, 10, 15, 20	Mid	Full RB	0
Channel Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	Full RB	0
			Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Antenna Position Tower	MA4640/800-XP-ET	Innco systems	N/A	N/A	N/A
Turn Table	DS2000-S	Innco systems	N/A	N/A	N/A
Turn Table	Turn Table	Ets	N/A	N/A	N/A
Controller (Antenna mast & Turn Table)	CO3000	Innco systems	CO3000/1542/ 57580623/G	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM20090001	N/A	N/A
RF Switch System	TMX0132C	TNM System	TM21100002	N/A	N/A
RF Switch System	FBSR-04C HPF1	TNM System	S5L1	03/12/2025	Annual
RF Switch System	FBSR-04C LNA1	TNM System	S5L4	03/12/2025	Annual
RF Switch System	FBSR-04C HPF2	TNM System	S5L5	03/12/2025	Annual
HIGHPASS FILTER	WHKX10-900-1000- 15000-40SS	WAINWRIGHT INSTRUMENTS	16	07/24/2025	Annual
HIGHPASS FILTER	WHNX6.0/26.5G-6SS	WAINWRIGHT INSTRUMENTS	1	12/11/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Loop Antenna (9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Horn Antenna(1 ~ 18 GHz)	HF907	ROHDE & SCHWARZ	103224	05/07/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
Trilog Broadband Antenna	VULB 9168	Schwarzbeck	1135	08/19/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	02/19/2025	Annual
DC Power Supply	E3632A	Hewlett Packard	KR01009150	04/18/2025	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/10/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101510	03/28/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/16/2025	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/14/2025	Annual
Signal Analyzer (10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
Signal Analyzer (5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(m)(4)	■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz	PASS
Conducted Output Power	§ 2.1046	N/A	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 Conducted Output Power

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				39675	40620	41565
				2498.5 MHz	2593 MHz	2687.5 MHz
5 MHz	QPSK	1	0	23.42	23.31	23.38
		1	12	23.41	23.37	23.36
		1	24	23.43	23.34	23.33
		12	0	22.50	22.46	22.47
		12	6	22.55	22.50	22.53
		12	11	22.55	22.51	22.45
		25	0	22.52	22.51	22.51
	16 QAM	1	0	22.75	22.68	22.75
		1	12	22.69	22.80	22.80
		1	24	22.71	22.71	22.67
		12	0	21.58	21.45	21.50
		12	6	21.60	21.52	21.50
		12	11	21.60	21.51	21.50
		25	0	21.57	21.55	21.58
	64 QAM	1	0	21.61	21.36	21.43
		1	12	21.55	21.42	21.42
		1	24	21.56	21.41	21.38
		12	0	20.66	20.49	20.51
		12	6	20.66	20.53	20.53
		12	11	20.62	20.51	20.50
		25	0	20.62	20.50	20.54
	256 QAM	1	0	18.58	18.42	18.49
		1	12	18.55	18.47	18.48
		1	24	18.56	18.43	18.45
		12	0	18.69	18.54	18.65
		12	6	18.69	18.62	18.66
		12	11	18.68	18.62	18.63
		25	0	18.59	18.55	18.55

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				39700	40620	41540
				2501 MHz	2593 MHz	2685 MHz
10 MHz	QPSK	1	0	23.38	23.37	23.04
		1	24	23.41	23.26	23.21
		1	49	23.49	23.28	23.00
		25	0	22.49	22.41	22.29
		25	12	22.52	22.54	22.37
		25	24	22.51	22.46	22.33
		50	0	22.50	22.50	22.27
	16 QAM	1	0	22.81	22.74	22.49
		1	24	22.74	22.73	22.71
		1	49	22.79	22.71	22.39
		25	0	21.53	21.46	21.34
		25	12	21.53	21.57	21.42
		25	24	21.56	21.49	21.42
		50	0	21.48	21.55	21.34
	64 QAM	1	0	21.56	21.45	21.12
		1	24	21.49	21.34	21.44
		1	49	21.44	21.43	21.09
		25	0	20.54	20.44	20.33
		25	12	20.56	20.57	20.46
		25	24	20.51	20.55	20.39
		50	0	20.56	20.64	20.40
	256 QAM	1	0	18.44	18.53	18.24
		1	24	18.45	18.52	18.45
		1	49	18.49	18.50	18.14
		25	0	18.57	18.59	18.42
		25	12	18.56	18.62	18.48
		25	24	18.55	18.61	18.49
		50	0	18.54	18.66	18.43

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				39725	40620	41515
				2503.5 MHz	2593 MHz	2682.5 MHz
15 MHz	QPSK	1	0	23.44	23.19	23.12
		1	36	23.42	23.11	23.37
		1	74	23.45	23.17	23.32
		36	0	22.60	22.32	22.31
		36	18	22.63	22.36	22.41
		36	39	22.54	22.31	22.47
		75	0	22.61	22.36	22.34
	16 QAM	1	0	22.75	22.56	22.34
		1	36	22.66	22.40	22.53
		1	74	22.77	22.52	22.55
		36	0	21.58	21.29	21.26
		36	18	21.62	21.31	21.34
		36	39	21.56	21.32	21.41
		75	0	21.61	21.39	21.31
	64 QAM	1	0	21.41	21.31	21.05
		1	36	21.46	21.22	21.31
		1	74	21.48	21.30	21.29
		36	0	20.66	20.38	20.32
		36	18	20.62	20.41	20.39
		36	39	20.60	20.37	20.42
		75	0	20.61	20.44	20.33
	256 QAM	1	0	18.45	18.32	18.09
		1	36	18.50	18.27	18.37
		1	74	18.56	18.36	18.31
		36	0	18.64	18.40	18.25
		36	18	18.62	18.45	18.32
		36	39	18.61	18.37	18.39
		75	0	18.58	18.42	18.27

Bandwidth	Modulation	RB Size	RB Offset	Max.Average Power (dBm)		
				39750	40620	41490
				2506 MHz	2593 MHz	2680 MHz
20 MHz	QPSK	1	0	23.45	23.47	22.89
		1	49	23.44	23.24	23.18
		1	99	23.35	23.32	23.14
		50	0	22.49	22.42	22.16
		50	25	22.56	22.45	22.32
		50	49	22.50	22.43	22.36
		100	0	22.59	22.46	22.27
	16 QAM	1	0	22.73	22.75	22.20
		1	49	22.63	22.51	22.53
		1	99	22.69	22.56	22.38
		50	0	21.47	21.45	21.25
		50	25	21.58	21.50	21.40
		50	49	21.51	21.41	21.41
		100	0	21.57	21.54	21.31
	64 QAM	1	0	21.37	21.46	20.87
		1	49	21.39	21.29	21.28
		1	99	21.44	21.33	21.11
		50	0	20.58	20.54	20.29
		50	25	20.65	20.56	20.42
		50	49	20.64	20.53	20.46
		100	0	20.62	20.49	20.28
	256 QAM	1	0	18.51	18.47	18.00
		1	49	18.46	18.34	18.41
		1	99	18.55	18.39	18.29
		50	0	18.58	18.48	18.30
		50	25	18.68	18.54	18.42
		50	49	18.64	18.48	18.49
		100	0	18.64	18.53	18.32

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

8.2.1 External Antenna

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2498.5	LTE B41/38 5 MHz	QPSK	82.48	37.37	119.85	V	< 2.00	0.292	24.65	1	24
		16-QAM	81.68	37.37	119.05	V		0.243	23.85		
		64-QAM	80.68	37.37	118.05	V		0.193	22.85		
		256-QAM	77.66	37.37	115.03	V		0.096	19.83		
2593.0		QPSK	82.78	37.94	120.72	V		0.356	25.52	1	0
		16-QAM	81.99	37.94	119.93	V		0.297	24.73		
		64-QAM	80.98	37.94	118.92	V		0.236	23.72		
		256-QAM	78.04	37.94	115.98	V		0.120	20.78		
2687.5		QPSK	83.11	38.17	121.28	V		0.406	26.08	1	24
		16-QAM	82.32	38.17	120.49	V		0.338	25.29		
		64-QAM	81.29	38.17	119.46	V		0.267	24.26		
		256-QAM	78.26	38.17	116.43	V		0.133	21.23		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2501.0	LTE B41/38 10 MHz	QPSK	82.63	37.37	120.00	V	< 2.00	0.302	24.80	1	0
		16-QAM	81.92	37.37	119.29	V		0.256	24.09		
		64-QAM	80.97	37.37	118.34	V		0.206	23.14		
		256-QAM	77.92	37.37	115.29	V		0.102	20.09		
2593.0		QPSK	82.93	37.94	120.87	V		0.369	25.67	1	0
		16-QAM	82.14	37.94	120.08	V		0.308	24.88		
		64-QAM	81.13	37.94	119.07	V		0.244	23.87		
		256-QAM	78.08	37.94	116.02	V		0.121	20.82		
2685.0		QPSK	82.92	38.14	121.05	V		0.385	25.85	1	49
		16-QAM	82.13	38.14	120.26	V		0.321	25.06		
		64-QAM	81.12	38.14	119.25	V		0.254	24.05		
		256-QAM	78.09	38.14	116.22	V		0.126	21.02		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2503.5	LTE B41/38 15 MHz	QPSK	82.64	37.39	120.03	V	< 2.00	0.304	24.83	1	0
		16-QAM	81.85	37.39	119.24	V		0.254	24.04		
		64-QAM	80.78	37.39	118.17	V		0.198	22.97		
		256-QAM	77.83	37.39	115.22	V		0.100	20.02		
2593.0		QPSK	83.09	37.94	121.03	V		0.383	25.83	1	0
		16-QAM	82.23	37.94	120.17	V		0.314	24.97		
		64-QAM	81.18	37.94	119.12	V		0.247	23.92		
		256-QAM	78.13	37.94	116.07	V		0.122	20.87		
2682.5		QPSK	83.00	38.10	121.10	V		0.389	25.90	1	74
		16-QAM	82.22	38.10	120.32	V		0.325	25.12		
		64-QAM	81.27	38.10	119.37	V		0.261	24.17		
		256-QAM	78.23	38.10	116.33	V		0.130	21.13		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2506.0	LTE B41/38 20 MHz	QPSK	82.56	37.39	119.95	V	< 2.00	0.299	24.75	1	0
		16-QAM	81.85	37.39	119.24	V		0.254	24.04		
		64-QAM	80.77	37.39	118.16	V		0.198	22.96		
		256-QAM	77.88	37.39	115.27	V		0.102	20.07		
2593.0		QPSK	83.10	37.94	121.04	V		0.384	25.84	1	0
		16-QAM	82.29	37.94	120.23	V		0.318	25.03		
		64-QAM	81.28	37.94	119.22	V		0.252	24.02		
		256-QAM	78.32	37.94	116.26	V		0.128	21.06		
2680.0		QPSK	82.89	38.10	120.99	V		0.379	25.79	1	99
		16-QAM	82.09	38.10	120.19	V		0.315	24.99		
		64-QAM	81.06	38.10	119.16	V		0.249	23.96		
		256-QAM	78.13	38.10	116.23	V		0.127	21.03		

8.2.2 Internal Antenna

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2498.5	LTE B41/38 5 MHz	QPSK	87.41	37.37	124.78	V	< 2.00	0.907	29.58	1	24
		16-QAM	86.64	37.37	124.01	V		0.760	28.81		
		64-QAM	85.67	37.37	123.04	V		0.608	27.84		
		256-QAM	82.61	37.37	119.98	V		0.300	24.78		
2593.0		QPSK	87.11	37.94	125.05	V		0.966	29.85	1	24
		16-QAM	86.18	37.94	124.12	V		0.780	28.92		
		64-QAM	85.23	37.94	123.17	V		0.627	27.97		
		256-QAM	82.16	37.94	120.10	V		0.309	24.90		
2687.5		QPSK	85.64	38.17	123.81	V		0.726	28.61	1	24
		16-QAM	84.83	38.17	123.00	V		0.602	27.80		
		64-QAM	83.61	38.17	121.78	V		0.455	26.58		
		256-QAM	80.78	38.17	118.95	V		0.237	23.75		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2501.0	LTE B41/38 10 MHz	QPSK	87.58	37.37	124.95	V	< 2.00	0.944	29.75	1	49
		16-QAM	86.80	37.37	124.17	V		0.788	28.97		
		64-QAM	85.77	37.37	123.14	V		0.622	27.94		
		256-QAM	82.73	37.37	120.10	V		0.309	24.90		
2593.0		QPSK	87.35	37.94	125.29	V		1.021	30.09	1	49
		16-QAM	86.48	37.94	124.42	V		0.836	29.22		
		64-QAM	85.44	37.94	123.38	V		0.658	28.18		
		256-QAM	82.42	37.94	120.36	V		0.328	25.16		
2685.0		QPSK	85.51	38.14	123.64	V		0.699	28.44	1	49
		16-QAM	84.70	38.14	122.83	V		0.580	27.63		
		64-QAM	83.58	38.14	121.71	V		0.448	26.51		
		256-QAM	80.67	38.14	118.80	V		0.229	23.60		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2503.5	LTE B41/38 15 MHz	QPSK	87.30	37.39	124.69	V	< 2.00	0.889	29.49	1	74
		16-QAM	86.55	37.39	123.94	V		0.748	28.74		
		64-QAM	85.57	37.39	122.96	V		0.597	27.76		
		256-QAM	82.65	37.39	120.04	V		0.305	24.84		
2593.0		QPSK	87.18	37.94	125.12	V		0.982	29.92	1	74
		16-QAM	86.38	37.94	124.32	V		0.817	29.12		
		64-QAM	85.46	37.94	123.40	V		0.661	28.20		
		256-QAM	82.35	37.94	120.29	V		0.323	25.09		
2682.5		QPSK	85.53	38.10	123.63	V		0.696	28.43	1	74
		16-QAM	84.78	38.10	122.88	V		0.586	27.68		
		64-QAM	83.75	38.10	121.85	V		0.462	26.65		
		256-QAM	80.78	38.10	118.88	V		0.233	23.68		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBμV)	A.F+C.L+D.F (dB/m)	Total (dBμV/m)	Pol	Limit	EIRP		RB	
							W	W	dBm	Size	Offset
2506.0	LTE B41/38 20 MHz	QPSK	87.29	37.39	124.68	V	< 2.00	0.887	29.48	1	99
		16-QAM	86.50	37.39	123.89	V		0.739	28.69		
		64-QAM	85.52	37.39	122.91	V		0.590	27.71		
		256-QAM	82.56	37.39	119.95	V		0.298	24.75		
2593.0		QPSK	87.23	37.94	125.17	V		0.993	29.97	1	99
		16-QAM	86.42	37.94	124.36	V		0.824	29.16		
		64-QAM	85.47	37.94	123.41	V		0.662	28.21		
		256-QAM	82.43	37.94	120.37	V		0.329	25.17		
2680.0		QPSK	85.44	38.10	123.54	V		0.682	28.34	1	99
		16-QAM	84.69	38.10	122.79	V		0.574	27.59		
		64-QAM	83.45	38.10	121.55	V		0.431	26.35		
		256-QAM	80.62	38.10	118.72	V		0.225	23.52		

8.3 RADIATED SPURIOUS EMISSIONS

8.3.1 External Antenna

☐ MODE: LTE B41/38
☐ MODULATION SIGNAL: 5 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39675 (2498.5)	4 997.00	58.89	-2.97	55.92	V	-39.28	-25.00	Peak	1	24
	7 495.50	53.51	0.83	54.34	V	-40.86	-25.00	Peak		
	9 994.00	48.39	4.78	53.17	V	-42.03	-25.00	Peak		
40620 (2593.0)	5 186.00	65.20	-3.33	61.87	V	-33.33	-25.00	Peak	1	0
	7 779.00	52.71	1.35	54.06	V	-41.14	-25.00	Peak		
	10 372.00	48.05	4.84	52.89	V	-42.31	-25.00	Peak		
41565 (2687.5)	5 375.00	68.92	-2.77	66.15	V	-29.05	-25.00	Average	1	24
	8 062.50	48.33	1.77	50.10	V	-45.10	-25.00	Peak		
	10 750.00	46.40	5.11	51.51	V	-43.69	-25.00	Peak		

■ MODE: LTE B41/38
 ■ MODULATION SIGNAL: 10 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39700 (2501.0)	5 002.00	60.17	-2.97	57.20	V	-38.00	-25.00	Peak	1	0
	7 503.00	53.05	0.94	53.99	V	-41.21	-25.00	Peak		
	10 004.00	47.95	4.91	52.86	V	-42.34	-25.00	Peak		
40620 (2593.0)	5 186.00	66.42	-3.33	63.09	V	-32.11	-25.00	Peak	1	0
	7 779.00	53.75	1.35	55.10	V	-40.10	-25.00	Peak		
	10 372.00	48.05	4.84	52.89	V	-42.31	-25.00	Peak		
41540 (2685.0)	5 370.00	68.48	-2.78	65.70	V	-29.50	-25.00	Average	1	49
	8 055.00	48.40	1.74	50.14	V	-45.06	-25.00	Peak		
	10 740.00	47.16	5.06	52.22	V	-42.98	-25.00	Peak		

■ MODE: LTE B41/38
 ■ MODULATION SIGNAL: 15 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39725 (2503.5)	5 007.00	59.80	-2.95	56.85	V	-38.35	-25.00	Peak	1	0
	7 510.50	52.37	0.93	53.30	V	-41.90	-25.00	Peak		
	10 014.00	47.51	4.93	52.44	V	-42.77	-25.00	Peak		
40620 (2593.0)	5 186.00	66.87	-3.33	63.54	V	-31.66	-25.00	Peak	1	0
	7 779.00	53.72	1.35	55.07	V	-40.13	-25.00	Peak		
	10 372.00	47.42	4.84	52.26	V	-42.94	-25.00	Peak		
41515 (2682.5)	5 365.00	69.36	-2.81	66.55	V	-28.65	-25.00	Average	1	74
	8 047.50	48.26	1.71	49.97	V	-45.23	-25.00	Peak		
	10 730.00	46.00	5.12	51.12	V	-44.08	-25.00	Peak		

MODE: LTE B41/38

MODULATION SIGNAL: 20 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39750 (2506.0)	5 012.00	61.02	-2.95	58.07	V	-37.13	-25.00	Peak	1	0
	7 518.00	52.97	0.99	53.96	V	-41.24	-25.00	Peak		
	10 024.00	47.86	4.93	52.79	V	-42.42	-25.00	Peak		
40620 (2593.0)	5 186.00	66.35	-3.33	63.02	V	-32.18	-25.00	Peak	1	0
	7 779.00	53.51	1.35	54.86	V	-40.34	-25.00	Peak		
	10 372.00	47.28	4.84	52.12	V	-43.08	-25.00	Peak		
41490 (2680.0)	5 360.00	68.85	-2.84	66.01	V	-29.19	-25.00	Average	1	99
	8 040.00	48.60	1.73	50.33	V	-44.87	-25.00	Peak		
	10 720.00	46.13	5.12	51.25	V	-43.95	-25.00	Peak		

8.3.2 Internal Antenna

MODE: LTE B41/38
 MODULATION SIGNAL: 5 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39675 (2498.5)	4 997.00	58.07	-2.97	55.10	H	-40.10	-25.00	Peak	1	24
	7 495.50	52.78	0.83	53.61	H	-41.59	-25.00	Peak		
	9 994.00	46.98	4.78	51.76	H	-43.44	-25.00	Peak		
	12 492.50	43.97	6.82	50.79	H	-44.41	-25.00	Peak		
	14 991.00	44.98	11.66	56.64	H	-38.56	-25.00	Peak		
40620 (2593.0)	5 186.00	67.59	-3.33	63.02	V	-30.94	-25.00	Peak	1	24
	7 779.00	52.10	1.35	54.86	V	-41.75	-25.00	Peak		
	10 372.00	48.35	4.84	52.12	V	-42.01	-25.00	Peak		
	12 965.00	43.54	7.37	7.37	V	-44.30	-25.00	Peak		
	15 558.00	43.40	12.16	12.16	V	-39.64	-25.00	Peak		
41565 (2687.5)	5 375.00	68.06	-2.84	66.01	V	-29.91	-25.00	Average	1	24
	8 062.50	47.50	1.73	50.33	V	-45.93	-25.00	Peak		
	10 750.00	45.18	5.12	51.25	V	-44.91	-25.00	Peak		
	13 437.50	43.63	8.28	8.28	V	-43.16	-25.00	Peak		
	16 125.00	44.40	13.25	13.25	V	-37.75	-25.00	Peak		

☐ MODE: LTE B41/38
☐ MODULATION SIGNAL: 10 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39700 (2501.0)	5,002.00	58.29	-2.97	55.32	H	-39.88	-25.00	Peak	1	49
	7,503.00	53.17	0.94	54.11	H	-41.09	-25.00	Peak		
	10,004.00	47.40	4.91	52.31	H	-42.89	-25.00	Peak		
	12,505.00	44.25	6.82	51.07	H	-44.13	-25.00	Peak		
	15,006.00	43.45	11.67	55.12	H	-40.08	-25.00	Peak		
40620 (2593.0)	5 186.00	68.98	-3.33	65.65	H	-29.55	-25.00	Peak	1	49
	7 779.00	51.24	1.35	52.59	H	-42.61	-25.00	Peak		
	10 372.00	45.99	4.84	50.83	H	-44.37	-25.00	Peak		
	12 965.00	43.80	7.37	51.17	H	-44.04	-25.00	Peak		
	15 558.00	43.77	12.16	55.93	H	-39.27	-25.00	Peak		
41490 (2680.0)	5 360.00	68.70	-2.78	65.92	H	-29.28	-25.00	Average	1	49
	8 040.00	47.48	1.74	49.22	H	-45.98	-25.00	Peak		
	10 720.00	45.48	5.06	50.54	H	-44.66	-25.00	Peak		
	13 400.00	43.71	8.31	52.02	H	-43.18	-25.00	Peak		
	16 080.00	43.98	13.08	57.06	H	-38.14	-25.00	Peak		

☒ MODE: LTE B41/38
☒ MODULATION SIGNAL: 15 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39725 (2503.5)	5 007.00	60.63	-2.95	57.68	H	-37.52	-25.00	Peak	1	74
	7 510.50	52.15	0.93	53.08	H	-42.12	-25.00	Peak		
	10 014.00	47.19	4.93	52.12	H	-43.09	-25.00	Peak		
	12 517.50	44.11	6.86	50.97	H	-44.23	-25.00	Peak		
	15 021.00	43.64	11.58	55.22	H	-39.98	-25.00	Peak		
40620 (2593.0)	5 186.00	69.64	-3.33	66.31	H	-28.89	-25.00	Peak	1	74
	7 779.00	51.77	1.35	53.12	H	-42.08	-25.00	Peak		
	10 372.00	49.10	4.84	53.94	H	-41.26	-25.00	Peak		
	12 965.00	43.91	7.37	51.28	H	-43.93	-25.00	Peak		
	15 558.00	43.59	12.16	55.75	H	-39.45	-25.00	Peak		
41515 (2682.5)	5 365.00	69.54	-2.81	66.73	H	-28.47	-25.00	Average	1	74
	8 047.50	48.19	1.71	49.90	H	-45.30	-25.00	Peak		
	10 730.00	45.43	5.12	50.55	H	-44.65	-25.00	Peak		
	13 412.50	44.01	8.22	52.23	H	-42.97	-25.00	Peak		
	16 095.00	43.59	13.30	56.89	H	-38.31	-25.00	Peak		

■ MODE: LTE B41/38
 ■ MODULATION SIGNAL: 20 MHz QPSK

Ch	Freq (MHz)	Measured Level (dBμV)	A.F+C.L+D.F+H.P.F -A.G (dB/m)	Total (dBμV/m)	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
									Size	Offset
39750 (2506.0)	5 012.00	58.73	-2.95	55.78	H	-39.42	-25.00	Peak	1	99
	7 518.00	53.73	0.99	54.72	H	-40.48	-25.00	Peak		
	10 024.00	46.62	4.93	51.55	H	-43.66	-25.00	Peak		
	12 530.00	44.22	6.89	51.11	H	-44.09	-25.00	Peak		
	15 036.00	43.67	11.59	55.26	H	-39.94	-25.00	Peak		
40620 (2593.0)	5 186.00	69.84	-3.33	66.51	H	-28.69	-25.00	Peak	1	99
	7 779.00	51.61	1.35	52.96	H	-42.24	-25.00	Peak		
	10 372.00	48.63	4.84	53.47	H	-41.73	-25.00	Peak		
	12 965.00	43.35	7.37	50.72	H	-44.49	-25.00	Peak		
	15 558.00	43.55	12.16	55.71	H	-39.49	-25.00	Peak		
41490 (2680.0)	5 360.00	68.13	-2.84	65.29	H	-29.91	-25.00	Average	1	99
	8 040.00	48.00	1.73	49.73	H	-45.47	-25.00	Peak		
	10 720.00	46.01	5.12	51.13	H	-44.07	-25.00	Peak		
	13 400.00	43.68	8.28	51.96	H	-43.25	-25.00	Peak		
	16 080.00	43.43	13.25	56.68	H	-38.52	-25.00	Peak		

8.4 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
41/38	5 MHz	2593.0	QPSK	25	0	5.64
			16-QAM			6.47
			64-QAM			7.06
			256-QAM			6.97
	10 MHz		QPSK	50		5.45
			16-QAM			6.27
			64-QAM			7.04
			256-QAM			6.89
	15 MHz		QPSK	75		5.33
			16-QAM			6.08
			64-QAM			6.90
			256-QAM			7.00
	20 MHz		QPSK	100		5.28
			16-QAM			6.04
			64-QAM			6.74
			256-QAM			6.74

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 60 ~ 76.

8.5 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41/38	5 MHz	2593.0	QPSK	25	0	4.5006
			16-QAM			4.5029
			64-QAM			4.5096
			256-QAM			4.4918
	10 MHz		QPSK	50		8.9677
			16-QAM			9.0171
			64-QAM			8.9730
			256-QAM			8.9542
	15 MHz		QPSK	75		13.468
			16-QAM			13.456
			64-QAM			13.467
			256-QAM			13.450
	20 MHz		QPSK	100		17.920
			16-QAM			17.902
			64-QAM			17.894
			256-QAM			17.881

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 77 ~ 91.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41/38	5	2498.5	3.7059	32.955	-67.484	-34.529	-25.00
		2593.0	3.6825	32.955	-67.088	-34.133	
		2687.5	3.6870	32.955	-67.438	-34.483	
	10	2501.0	3.7179	32.955	-67.309	-34.354	
		2593.0	3.7000	32.955	-67.367	-34.412	
		2685.0	3.7154	32.955	-66.942	-33.987	
	15	2503.5	3.6975	32.955	-67.175	-34.220	
		2593.0	3.6925	32.955	-67.047	-34.092	
		2682.5	3.6910	32.955	-66.844	-33.889	
	20	2506.0	3.7059	32.955	-67.415	-34.460	
		2593.0	3.6885	32.955	-67.146	-34.191	
		2680.0	3.6740	32.955	-66.956	-34.001	

Note:

- Plots of the EUT's Conducted Spurious Emissions are shown Page 92 ~ 115.
- Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
- Duty Cycle factor already applied on the factor.
 - Duty Cycle factor(dB) = 3.979
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
Above 20	34.110

8.7 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1 MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-26.56	-26.46	-22.17	-21.25	-29.72	-28.45	-28.64
10 MHz	2501.0	QPSK	50/0	-28.40	-28.06	-23.73	-23.90	-26.03	-24.32	-30.25
15 MHz	2503.5	QPSK	75/0	-28.53	-27.09	-25.23	-24.36	-26.27	-25.42	-30.63
20 MHz	2506.0	QPSK	100/0	-26.75	-25.99	-24.11	-24.39	-26.36	-26.11	-31.66
Limit(dBm)				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-28.11	-28.76	-28.14	-30.88
	2687.5	QPSK	25	0	-28.93	-29.72	-27.76	-29.52
10 MHz	2593.0	QPSK	50	0	-31.22	-32.09	-30.45	-31.57
	2685.0	QPSK	50	0	-30.09	-32.02	-27.12	-29.55
15 MHz	2593.0	QPSK	75	0	-31.84	-32.35	-30.11	-30.39
	2682.5	QPSK	75	0	-31.91	-32.85	-30.21	-31.40
20 MHz	2593.0	QPSK	100	0	-33.09	-32.36	-31.98	-32.59
	2680.0	QPSK	100	0	-33.71	-32.05	-33.02	-31.76
Limit(dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-33.68	-33.70	-33.27	-33.70
	2687.5	QPSK	25	0	-34.29	-34.46	-34.37	-34.54
10 MHz	2593.0	QPSK	50	0	-32.94	-33.95	-33.99	-35.19
	2685.0	QPSK	50	0	-31.94	-31.96	-34.87	-35.03
15 MHz	2593.0	QPSK	75	0	-34.05	-33.51	-34.98	-36.20
	2682.5	QPSK	75	0	-33.36	-32.59	-35.94	-36.22
20 MHz	2593.0	QPSK	100	0	-33.07	-34.99	-35.02	-36.30
	2680.0	QPSK	100	0	-35.21	-33.28	-36.64	-36.58
Limit(dBm)					-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. RB = Resource Block
5. Duty Cycle factor already applied on the factor.
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor
 - Duty Cycle Factor(dB) = 3.979
6. Plots of the EUT's Channel Edge are shown Page 117 ~ 144. (1RB & Full RB)

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	LTE 41/38
OPERATING FREQUENCY:	2498,500,000 Hz
BANDWIDTH:	39675 (5 MHz)
REFERENCE VOLTAGE:	13.500 VDC
DEVIATION LIMIT:	Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2498 499 988	0.0	0.000 000	0.000
100 %		-30	2498 499 972	-16.2	-0.000 001	-0.006
100 %		-20	2498 499 991	3.7	0.000 000	0.001
100 %		-10	2498 499 979	-8.4	0.000 000	-0.003
100 %		0	2498 499 976	-11.4	0.000 000	-0.005
100 %		+10	2498 499 972	-15.6	-0.000 001	-0.006
100 %		+30	2498 499 992	3.8	0.000 000	0.002
100 %		+40	2498 499 982	-6.1	0.000 000	-0.002
100 %		+50	2498 499 980	-7.5	0.000 000	-0.003
85 %	11.475	+20	2498 499 982	-5.5	0.000 000	-0.002
115%	15.525	+20	2498 499 975	-12.3	0.000 000	-0.005

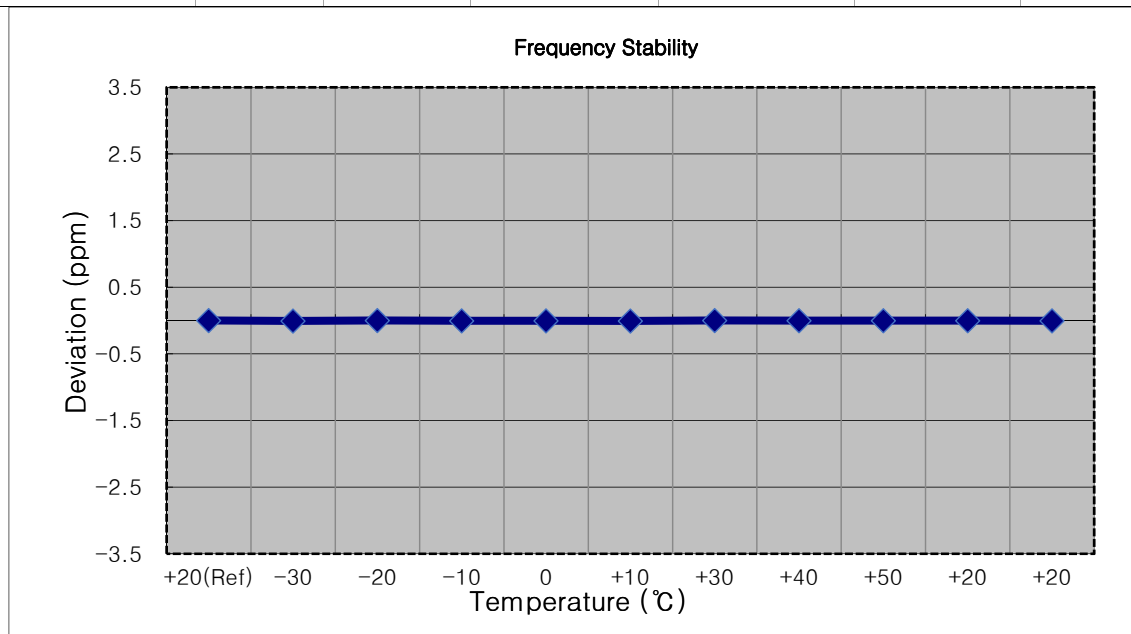


MODE:	<u>LTE 41/38</u>
OPERATING FREQUENCY:	<u>2501,000,000 Hz</u>
BANDWIDTH:	<u>39700 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>13.500 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2500 999 996	0.0	0.000 000	0.000
100 %		-30	2500 999 989	-7.1	0.000 000	-0.003
100 %		-20	2500 999 987	-9.3	0.000 000	-0.004
100 %		-10	2500 999 986	-10.3	0.000 000	-0.004
100 %		0	2500 999 984	-11.8	0.000 000	-0.005
100 %		+10	2500 999 981	-15.0	-0.000 001	-0.006
100 %		+30	2500 999 980	-16.0	-0.000 001	-0.006
100 %		+40	2500 999 979	-16.9	-0.000 001	-0.007
100 %		+50	2501 000 000	4.1	0.000 000	0.002
85 %	11.475	+20	2500 999 998	1.8	0.000 000	0.001
115%	15.525	+20	2500 999 999	2.6	0.000 000	0.001

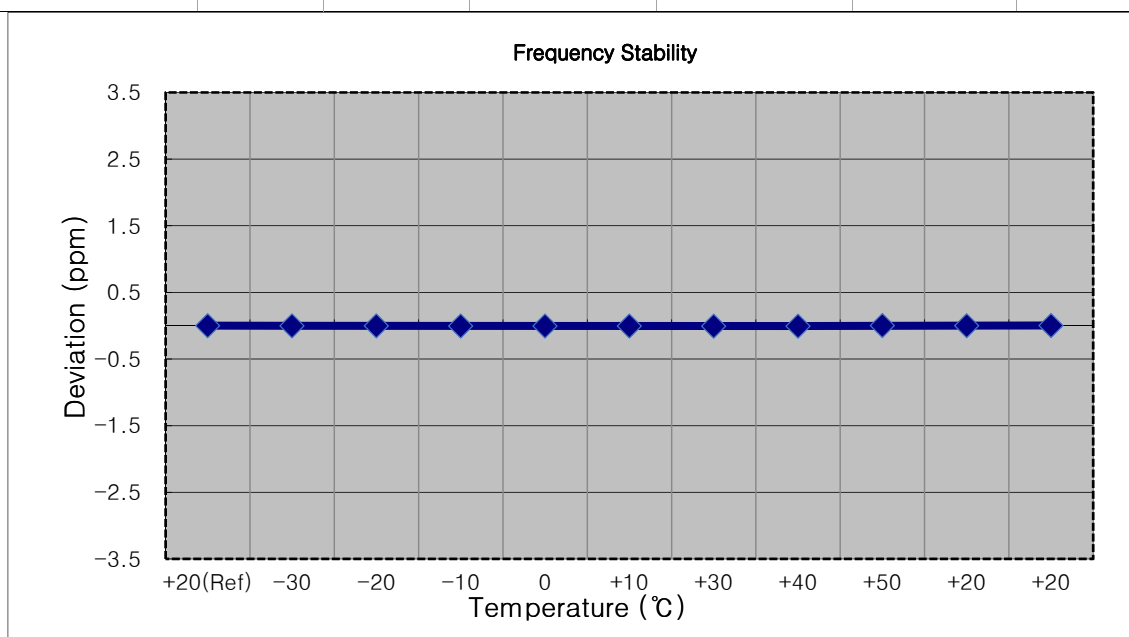


■ MODE: LTE 41/38
 ■ OPERATING FREQUENCY: 2503,500,000 Hz
 ■ BANDWIDTH: 39725 (15 MHz)
 ■ REFERENCE VOLTAGE: 13.500 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2503 499 990	0.0	0.000 000	0.000
100 %		-30	2503 499 979	-10.8	0.000 000	-0.004
100 %		-20	2503 499 975	-14.3	-0.000 001	-0.006
100 %		-10	2503 499 996	6.3	0.000 000	0.003
100 %		0	2503 499 994	4.4	0.000 000	0.002
100 %		+10	2503 499 993	3.8	0.000 000	0.002
100 %		+30	2503 499 987	-2.3	0.000 000	-0.001
100 %		+40	2503 499 986	-3.5	0.000 000	-0.001
100 %		+50	2503 499 984	-5.3	0.000 000	-0.002
85 %	11.475	+20	2503 499 987	-2.8	0.000 000	-0.001
115%	15.525	+20	2503 499 982	-7.3	0.000 000	-0.003

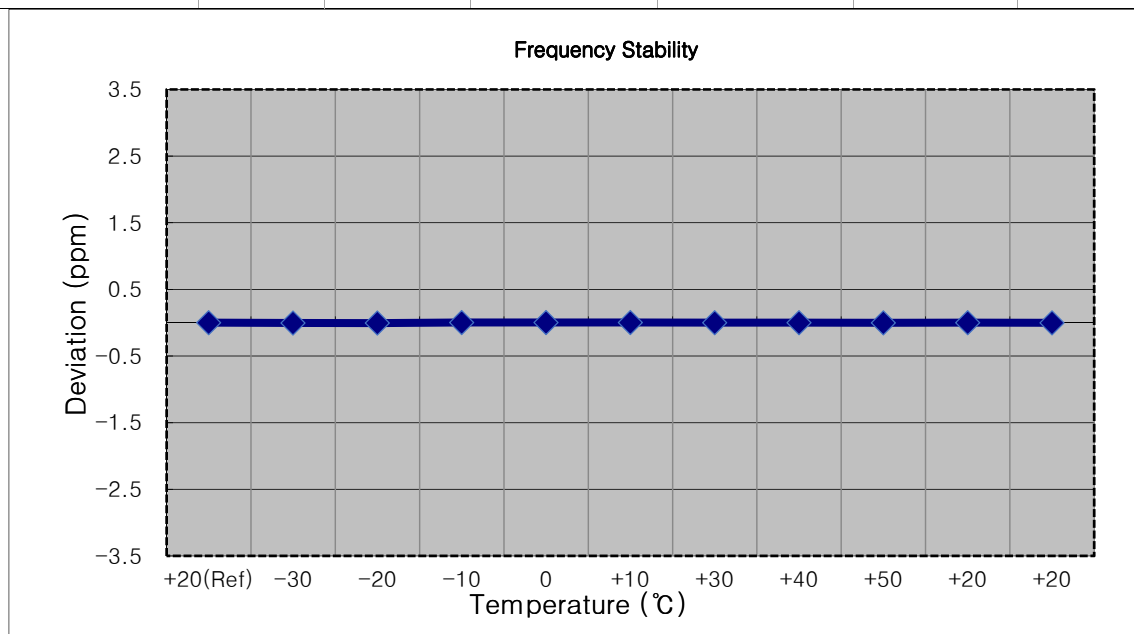


■ MODE: LTE 41/38
 ■ OPERATING FREQUENCY: 2506,000,000 Hz
 ■ BANDWIDTH: 39750 (20 MHz)
 ■ REFERENCE VOLTAGE: 13.500 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2505 999 990	0.0	0.000 000	0.000
100 %		-30	2505 999 980	-10.0	0.000 000	-0.004
100 %		-20	2505 999 979	-11.4	0.000 000	-0.005
100 %		-10	2505 999 978	-11.9	0.000 000	-0.005
100 %		0	2505 999 975	-15.3	-0.000 001	-0.006
100 %		+10	2505 999 997	6.5	0.000 000	0.003
100 %		+30	2505 999 999	8.7	0.000 000	0.003
100 %		+40	2505 999 972	-18.1	-0.000 001	-0.007
100 %		+50	2505 999 999	8.9	0.000 000	0.004
85 %	11.475	+20	2505 999 991	0.8	0.000 000	0.000
115%	15.525	+20	2505 999 986	-4.4	0.000 000	-0.002

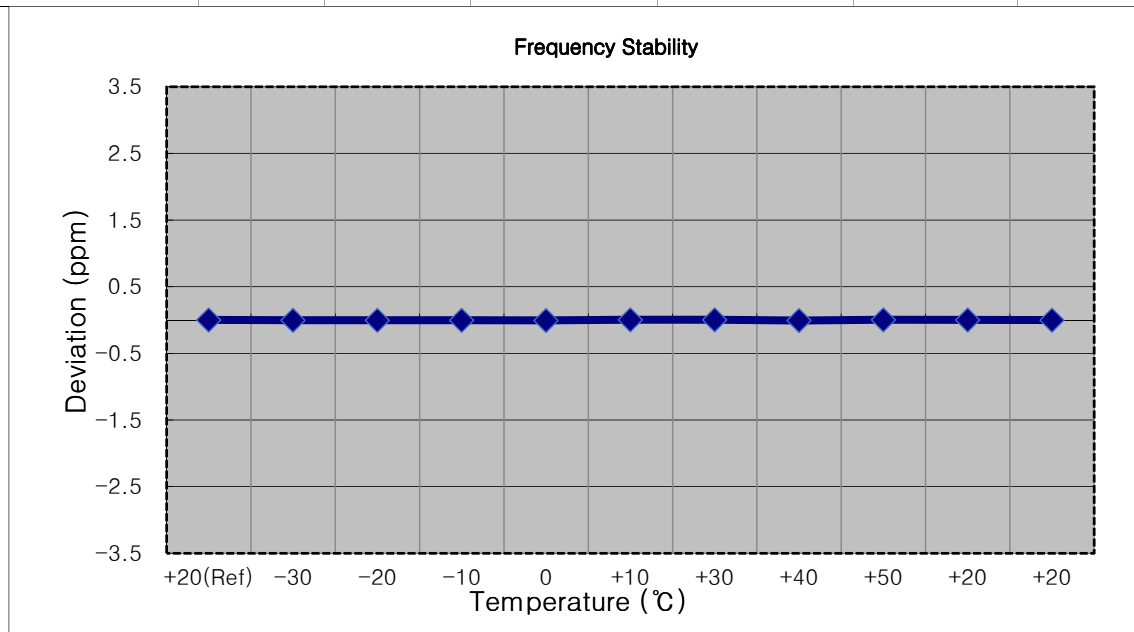


■ MODE: LTE 41/38
 ■ OPERATING FREQUENCY: 2593,000,000 Hz
 ■ BANDWIDTH: 40620 (5 MHz)
 ■ REFERENCE VOLTAGE: 13.500 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2592 999 992	0.0	0.000 000	0.000
100 %		-30	2592 999 984	-8.5	0.000 000	-0.003
100 %		-20	2592 999 982	-10.7	0.000 000	-0.004
100 %		-10	2592 999 982	-10.3	0.000 000	-0.004
100 %		0	2592 999 981	-11.0	0.000 000	-0.004
100 %		+10	2592 999 979	-13.8	-0.000 001	-0.005
100 %		+30	2592 999 979	-13.7	-0.000 001	-0.005
100 %		+40	2592 999 978	-14.2	-0.000 001	-0.005
100 %		+50	2592 999 978	-14.3	-0.000 001	-0.006
85 %	11.475	+20	2592 999 984	-7.9	0.000 000	-0.003
115%	15.525	+20	2592 999 974	-18.0	-0.000 001	-0.007

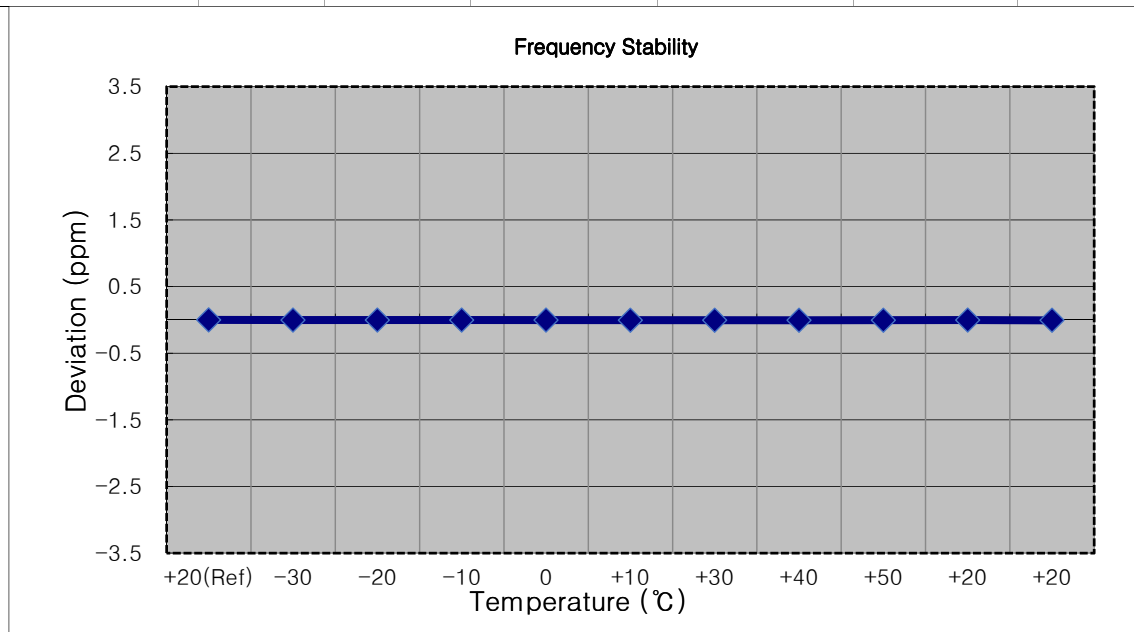


■ MODE:	<u>LTE 41/38</u>
■ OPERATING FREQUENCY:	<u>2593,000,000 Hz</u>
■ BANDWIDTH:	<u>40620 (10 MHz)</u>
■ REFERENCE VOLTAGE:	<u>13.500 VDC</u>
■ DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2593 000 004	0.0	0.000 000	0.000
100 %		-30	2592 999 986	-17.8	-0.000 001	-0.007
100 %		-20	2592 999 985	-18.9	-0.000 001	-0.007
100 %		-10	2592 999 984	-19.5	-0.000 001	-0.008
100 %		0	2592 999 999	-4.9	0.000 000	-0.002
100 %		+10	2592 999 997	-6.6	0.000 000	-0.003
100 %		+30	2592 999 997	-7.3	0.000 000	-0.003
100 %		+40	2592 999 995	-8.5	0.000 000	-0.003
100 %		+50	2592 999 994	-9.5	0.000 000	-0.004
85 %	11.475	+20	2592 999 999	-5.4	0.000 000	-0.002
115%	15.525	+20	2592 999 995	-8.6	0.000 000	-0.003

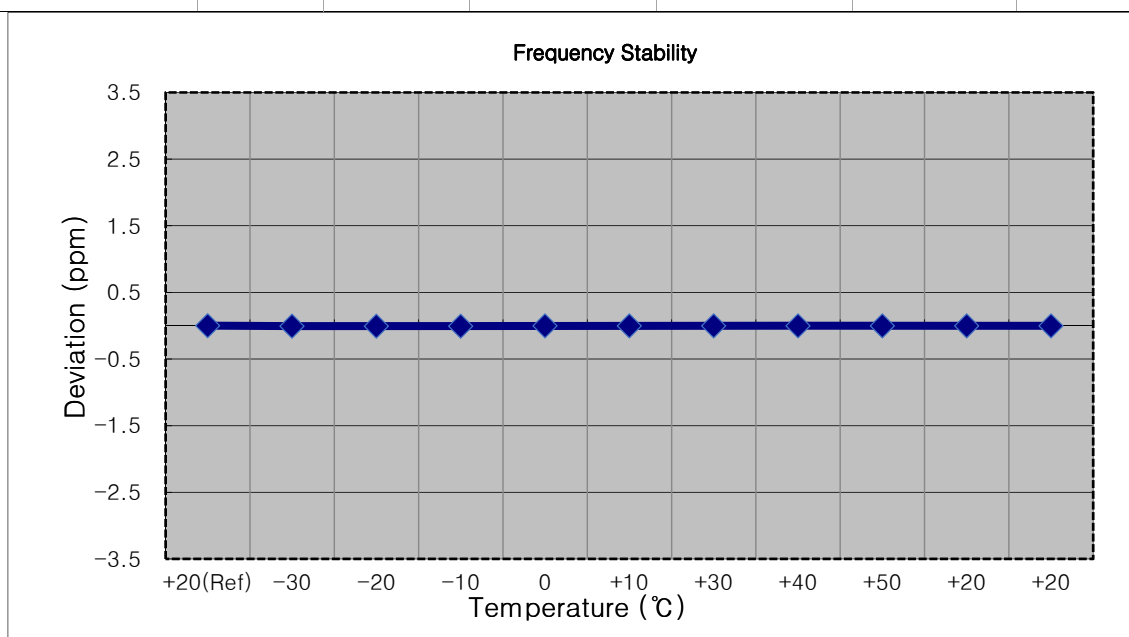


■ MODE:	<u>LTE 41/38</u>
■ OPERATING FREQUENCY:	<u>2593,000,000 Hz</u>
■ BANDWIDTH:	<u>40620 (15 MHz)</u>
■ REFERENCE VOLTAGE:	<u>13.500 VDC</u>
■ DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2592 999 995	0.0	0.000 000	0.000
100 %		-30	2592 999 988	-6.4	0.000 000	-0.002
100 %		-20	2592 999 988	-7.0	0.000 000	-0.003
100 %		-10	2592 999 987	-7.8	0.000 000	-0.003
100 %		0	2592 999 984	-11.0	0.000 000	-0.004
100 %		+10	2592 999 984	-10.5	0.000 000	-0.004
100 %		+30	2592 999 981	-13.4	-0.000 001	-0.005
100 %		+40	2592 999 981	-13.6	-0.000 001	-0.005
100 %		+50	2592 999 979	-15.5	-0.000 001	-0.006
85 %	11.475	+20	2592 999 985	-9.8	0.000 000	-0.004
115%	15.525	+20	2592 999 978	-17.0	-0.000 001	-0.007

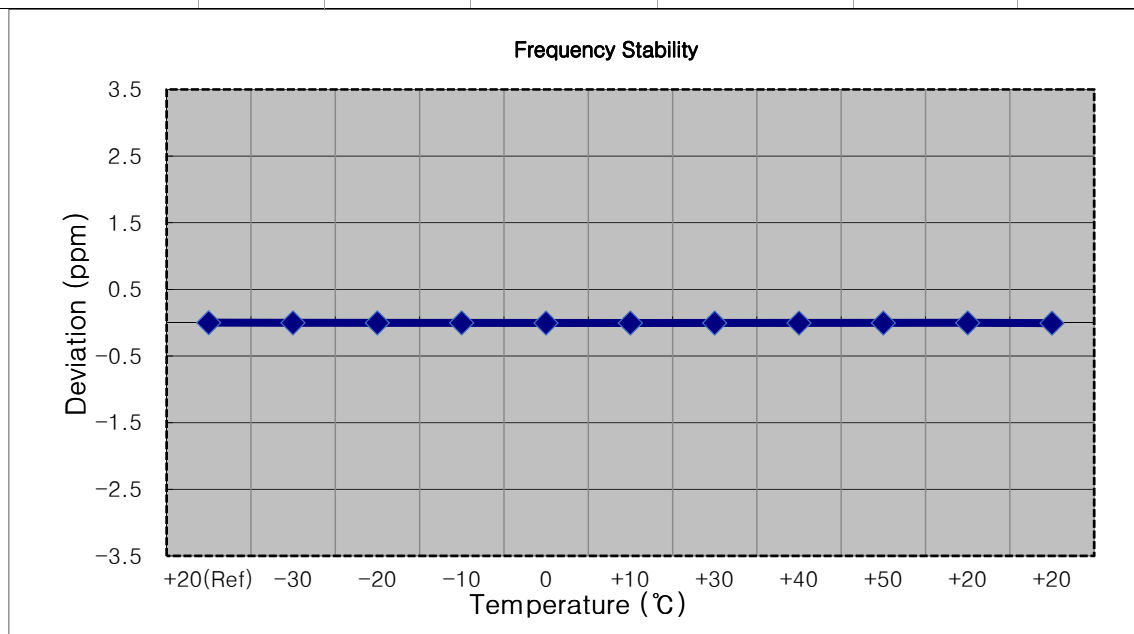


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2592 999 994	0.0	0.000 000	0.000
100 %		-30	2592 999 985	-9.1	0.000 000	-0.004
100 %		-20	2592 999 984	-10.5	0.000 000	-0.004
100 %		-10	2592 999 980	-14.4	-0.000 001	-0.006
100 %		0	2592 999 976	-18.3	-0.000 001	-0.007
100 %		+10	2592 999 991	-2.9	0.000 000	-0.001
100 %		+30	2592 999 989	-5.6	0.000 000	-0.002
100 %		+40	2592 999 985	-9.4	0.000 000	-0.004
100 %		+50	2592 999 981	-13.5	-0.000 001	-0.005
85 %	11.475	+20	2592 999 984	-10.7	0.000 000	-0.004
115%	15.525	+20	2592 999 978	-16.5	-0.000 001	-0.006

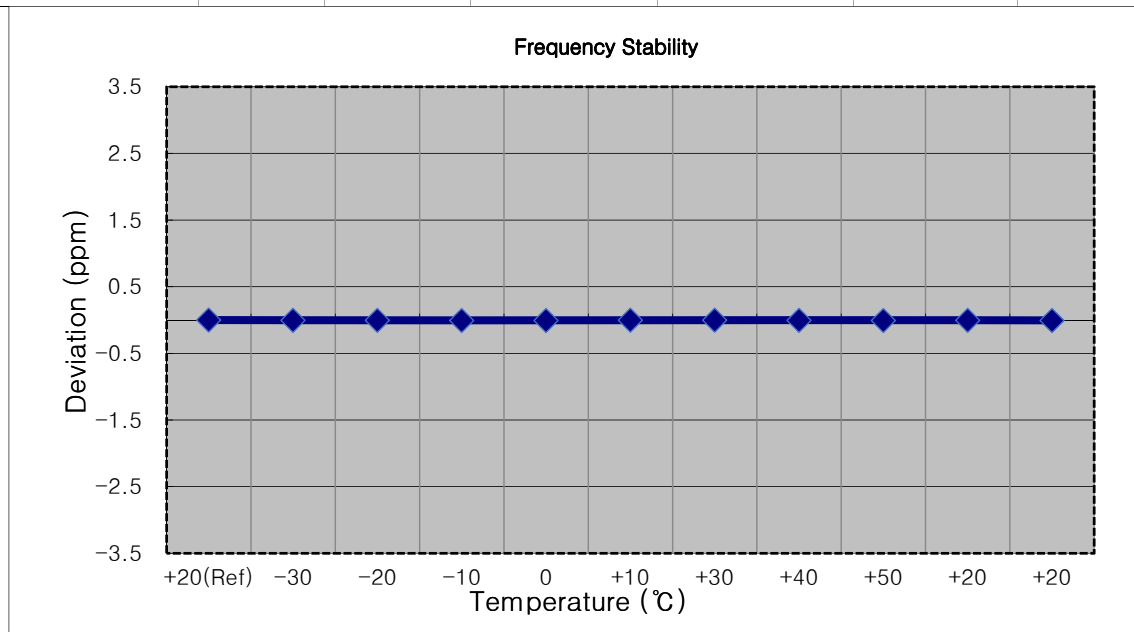


■ MODE: LTE 41/38
 ■ OPERATING FREQUENCY: 2687,500,000 Hz
 ■ BANDWIDTH: 41565 (5 MHz)
 ■ REFERENCE VOLTAGE: 13.500 VDC
 ■ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2687 499 990	0.0	0.000 000	0.000
100 %		-30	2687 499 976	-13.3	0.000 000	-0.005
100 %		-20	2687 499 976	-13.9	-0.000 001	-0.005
100 %		-10	2687 499 976	-14.2	-0.000 001	-0.005
100 %		0	2687 499 974	-15.3	-0.000 001	-0.006
100 %		+10	2687 499 974	-15.9	-0.000 001	-0.006
100 %		+30	2687 499 972	-17.8	-0.000 001	-0.007
100 %		+40	2687 499 971	-18.5	-0.000 001	-0.007
100 %		+50	2687 499 969	-20.4	-0.000 001	-0.008
85 %	11.475	+20	2687 499 974	-15.5	-0.000 001	-0.006
115%	15.525	+20	2687 499 965	-24.8	-0.000 001	-0.009

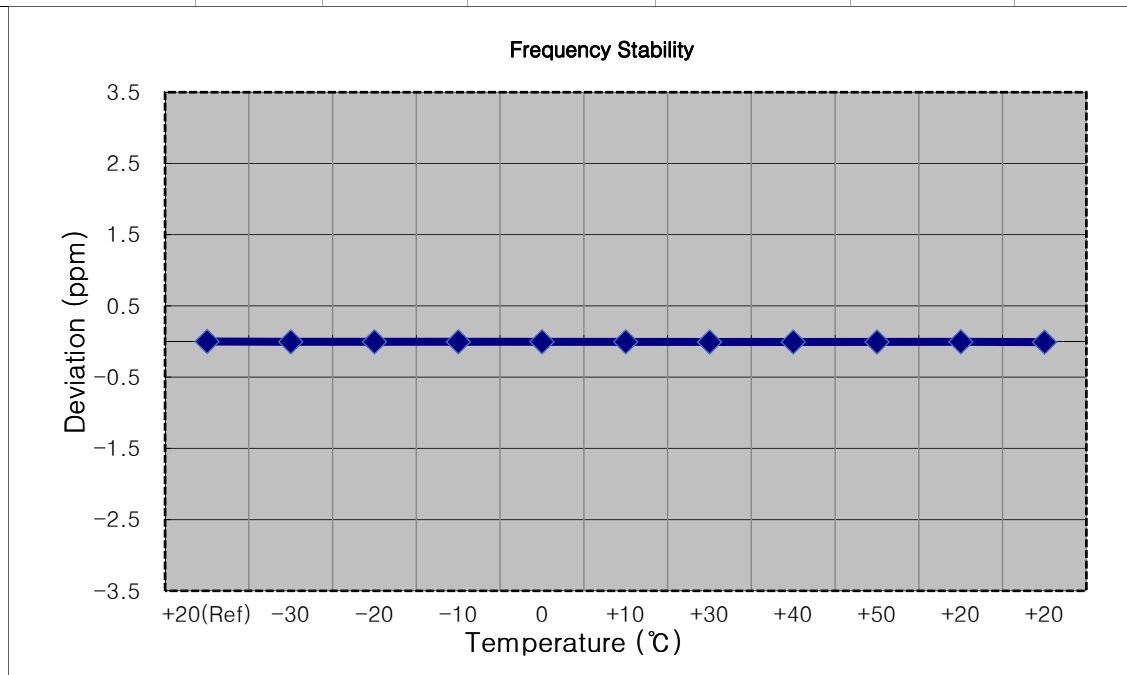


MODE:	<u>LTE 41/38</u>
OPERATING FREQUENCY:	<u>2685,000,000 Hz</u>
BANDWIDTH:	<u>41540 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>13.500 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2684 999 985	0.0	0.000 000	0.000
100 %		-30	2684 999 971	-14.3	-0.000 001	-0.005
100 %		-20	2684 999 970	-15.7	-0.000 001	-0.006
100 %		-10	2684 999 968	-17.1	-0.000 001	-0.006
100 %		0	2684 999 968	-16.9	-0.000 001	-0.006
100 %		+10	2684 999 969	-16.5	-0.000 001	-0.006
100 %		+30	2684 999 968	-17.8	-0.000 001	-0.007
100 %		+40	2684 999 967	-18.6	-0.000 001	-0.007
100 %		+50	2684 999 966	-19.5	-0.000 001	-0.007
85 %	11.475	+20	2684 999 970	-15.7	-0.000 001	-0.006
115%	15.525	+20	2684 999 966	-18.9	-0.000 001	-0.007

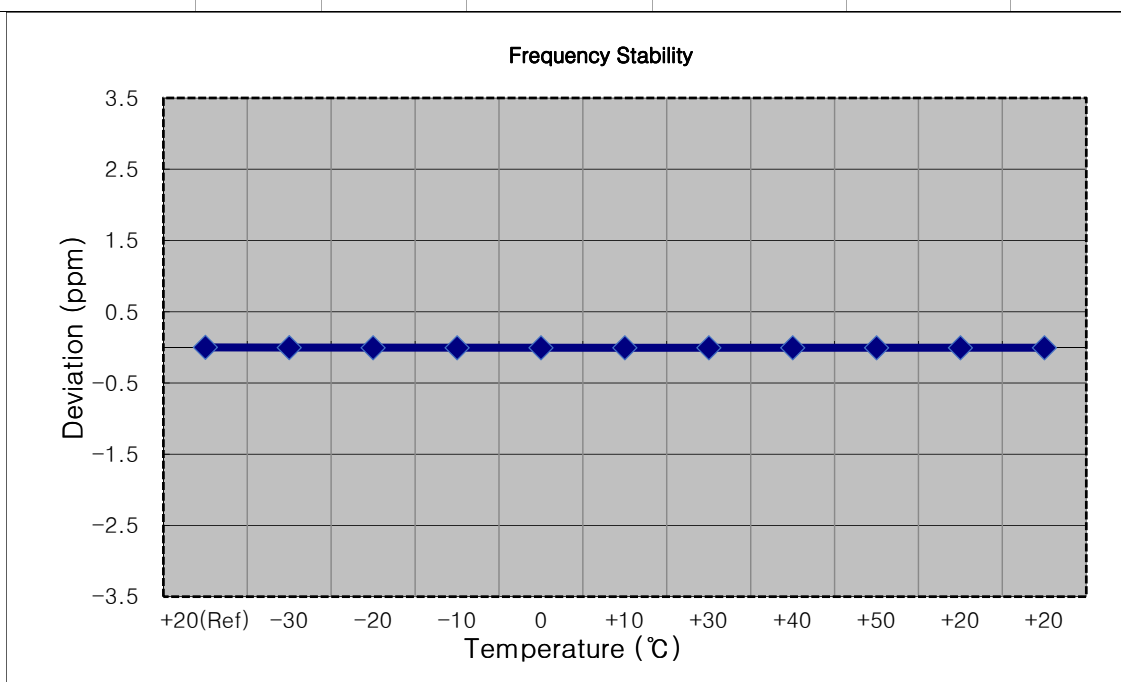


MODE:	<u>LTE 41/38</u>
OPERATING FREQUENCY:	<u>2682,500,000 Hz</u>
BANDWIDTH:	<u>41515 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>13.500 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2682 499 996	0.0	0.000 000	0.000
100 %		-30	2682 499 991	-4.8	0.000 000	-0.002
100 %		-20	2682 499 987	-8.8	0.000 000	-0.003
100 %		-10	2682 499 985	-11.5	0.000 000	-0.004
100 %		0	2682 499 985	-11.5	0.000 000	-0.004
100 %		+10	2682 499 982	-13.9	-0.000 001	-0.005
100 %		+30	2682 499 979	-16.9	-0.000 001	-0.006
100 %		+40	2682 499 979	-17.3	-0.000 001	-0.006
100 %		+50	2682 499 977	-18.9	-0.000 001	-0.007
85 %	11.475	+20	2682 499 991	-5.4	0.000 000	-0.002
115%	15.525	+20	2682 499 994	-2.7	0.000 000	-0.001

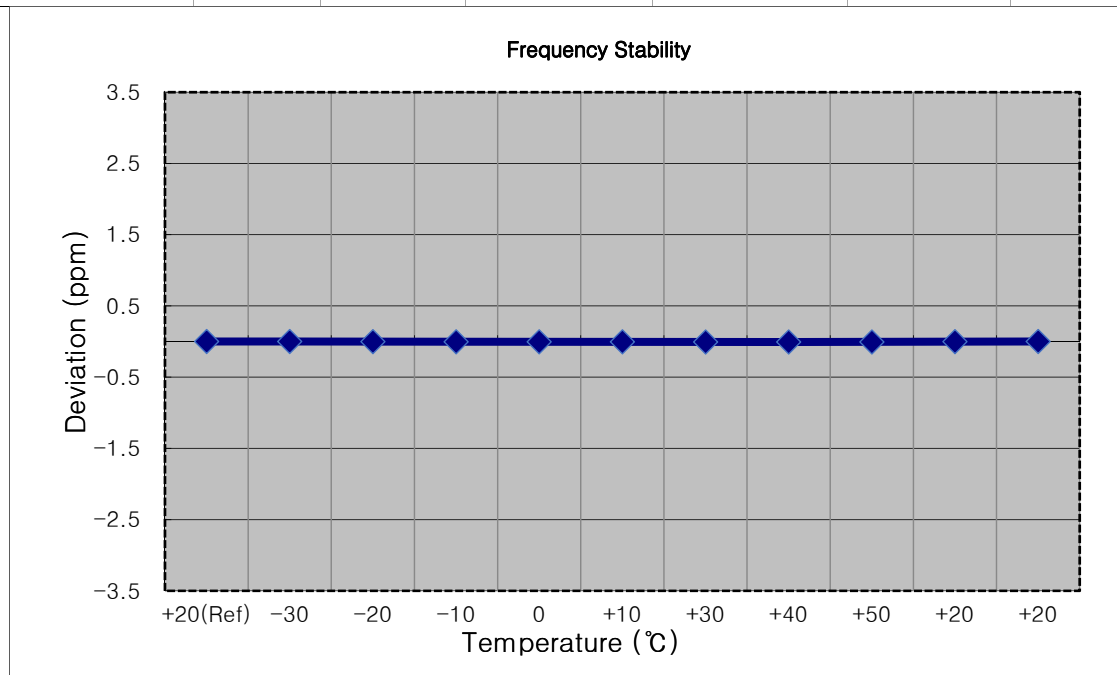


- ▣ MODE: LTE 41/38
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 13.500 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency Error	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	(Hz)	(%)	
100 %	13.500	+20(Ref)	2679 999 994	0.0	0.000 000	0.000
100 %		-30	2679 999 984	-10.4	0.000 000	-0.004
100 %		-20	2679 999 984	-10.9	0.000 000	-0.004
100 %		-10	2679 999 978	-16.5	-0.000 001	-0.006
100 %		0	2679 999 991	-3.2	0.000 000	-0.001
100 %		+10	2679 999 987	-7.5	0.000 000	-0.003
100 %		+30	2679 999 982	-12.1	0.000 000	-0.005
100 %		+40	2679 999 980	-14.8	-0.000 001	-0.006
100 %		+50	2679 999 997	3.0	0.000 000	0.001
85 %	11.475	+20	2679 999 997	2.5	0.000 000	0.001
115%	15.525	+20	2679 999 988	-6.1	0.000 000	-0.002

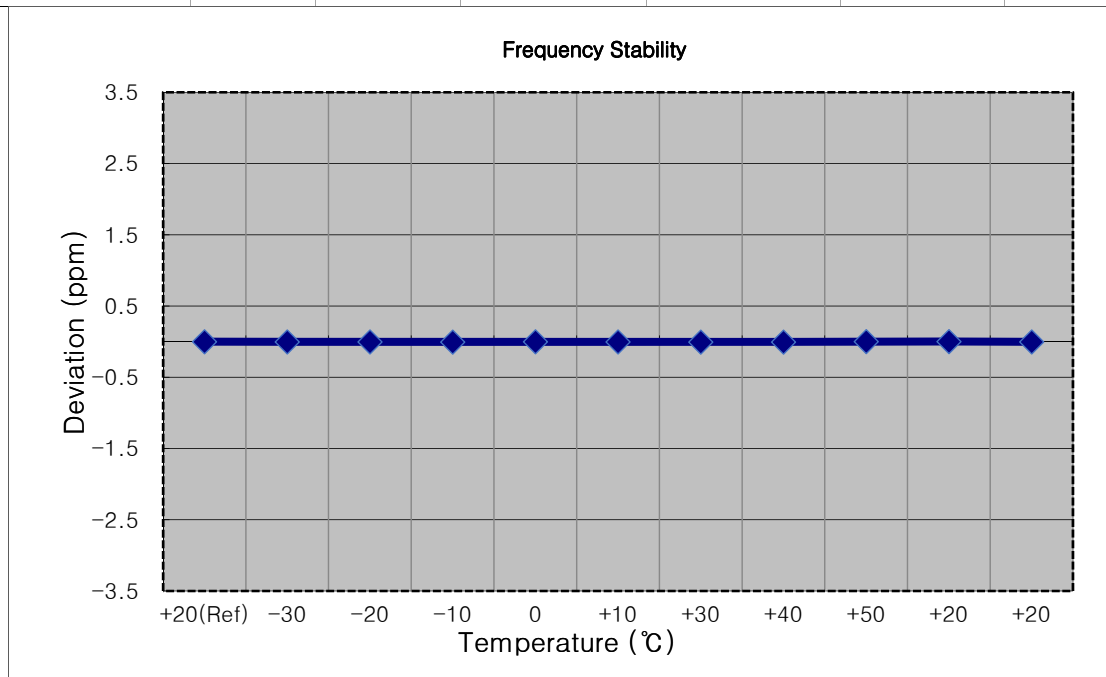


9. TEST PLOTS


LTE B41/38_5 M_PAR_Mid_QPSK_FullRB

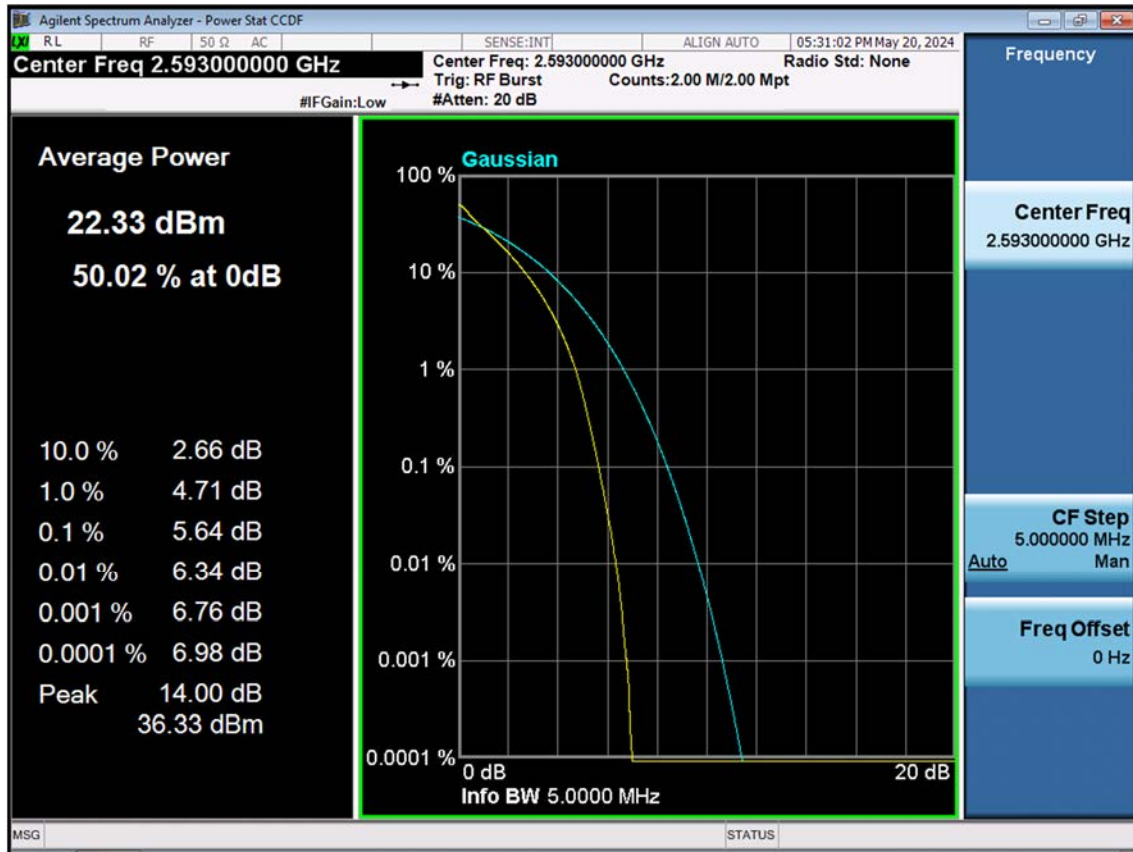


LTE B41/38_5 M_PAR_Mid_16 QAM_FullRB

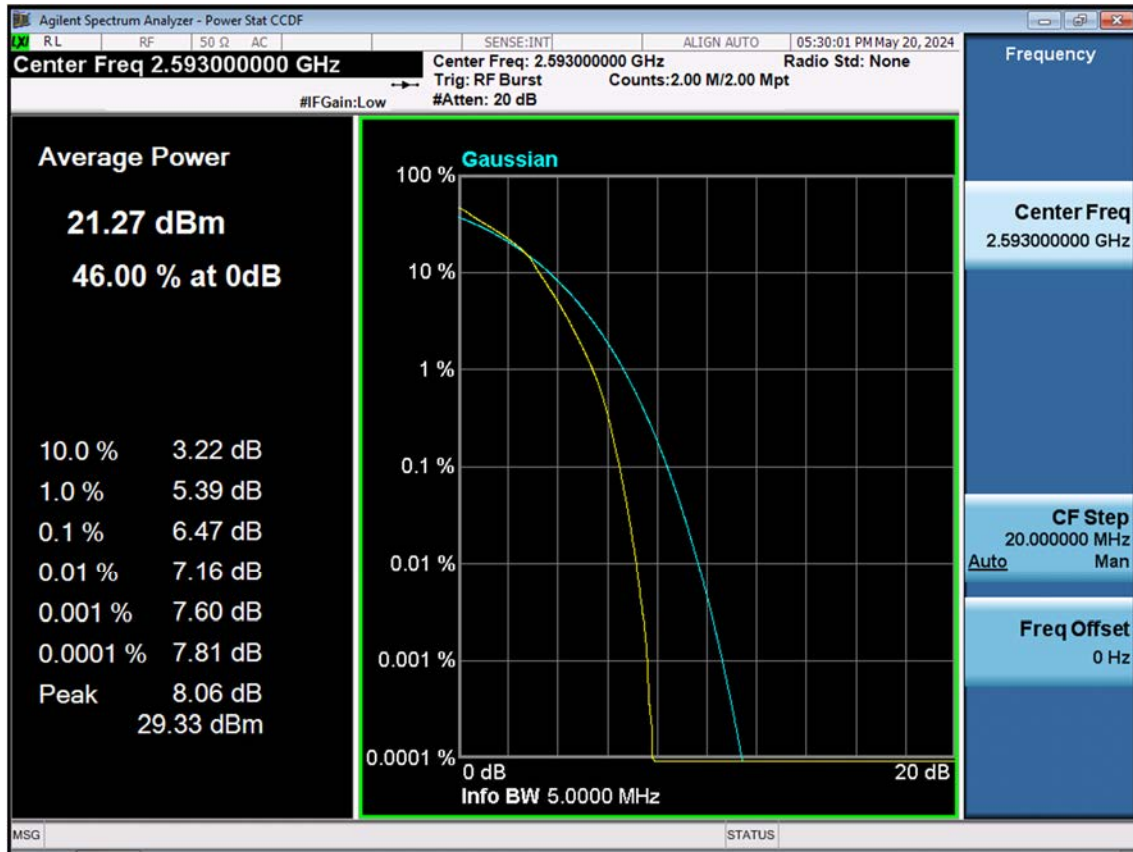


LTE B41/38_5 M_PAR_Mid_64 QAM_FullRB

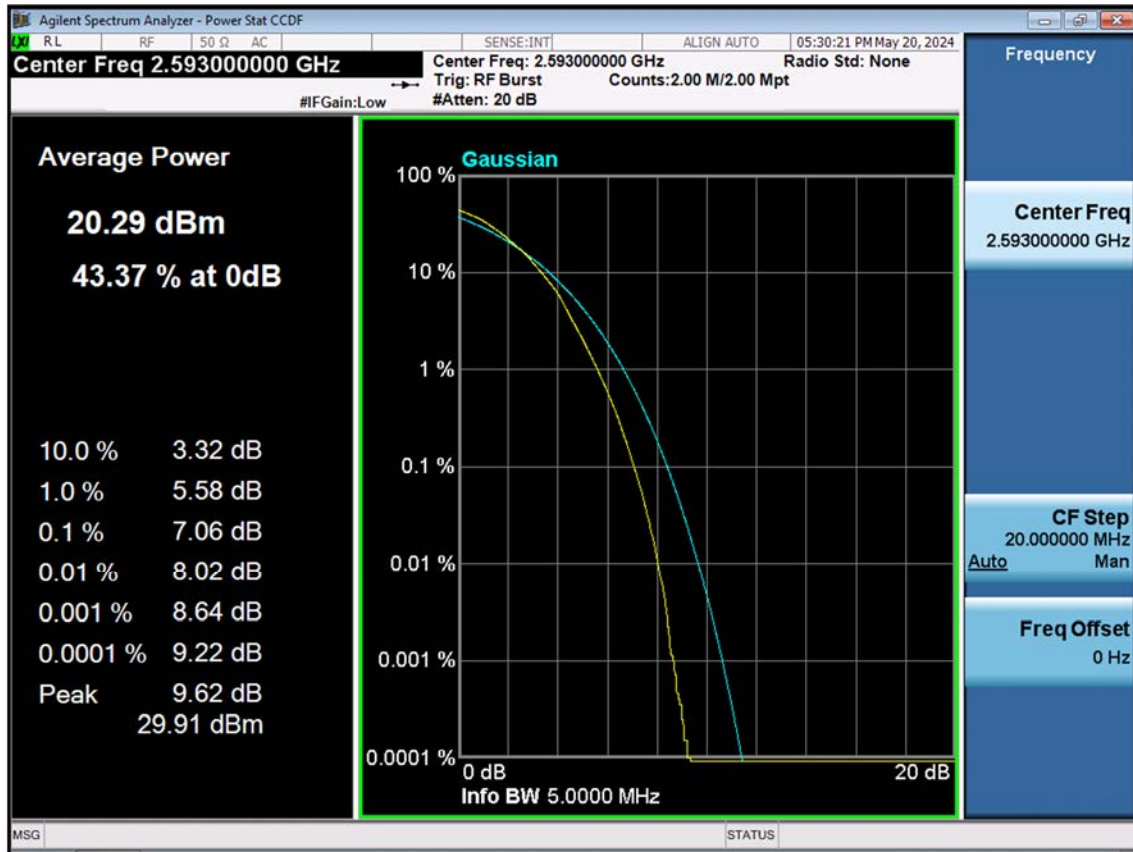


LTE B41/38_5 M_PAR_Mid_256 QAM_FullRB

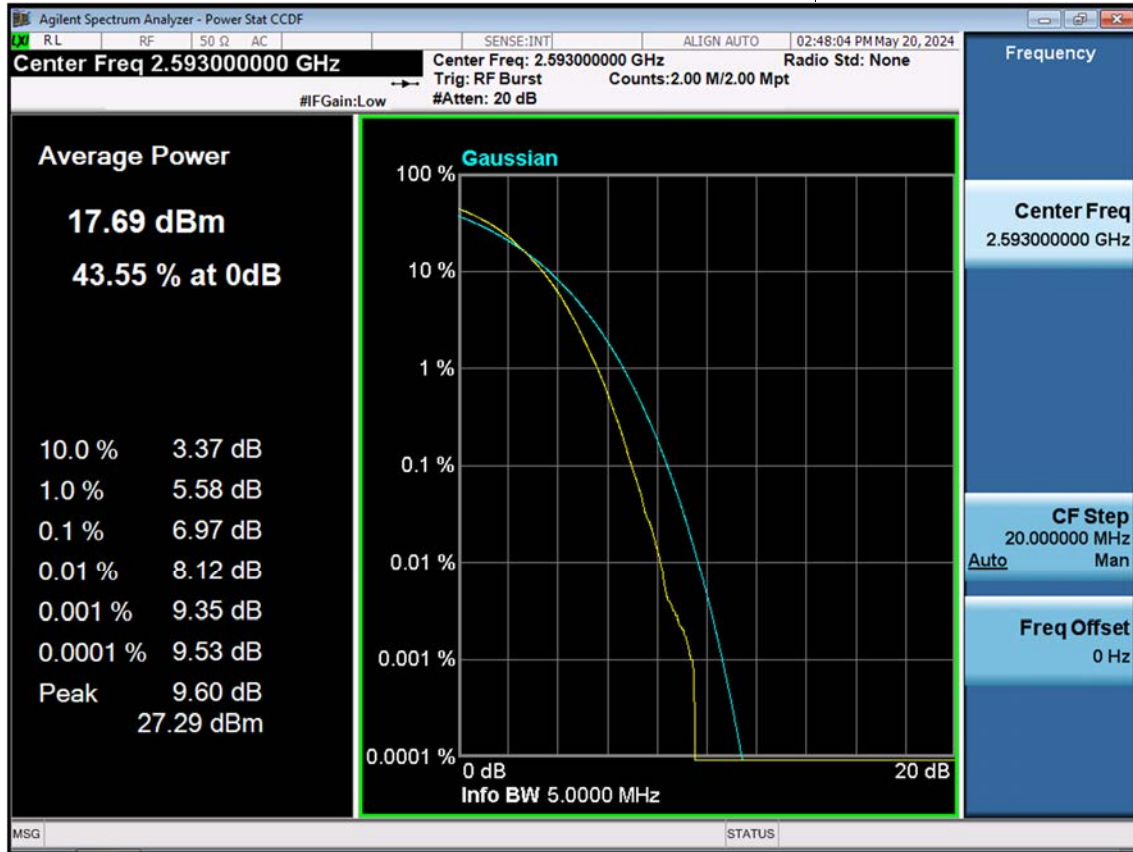


LTE B41/38_10 M_PAR_Mid_QPSK_FullRB

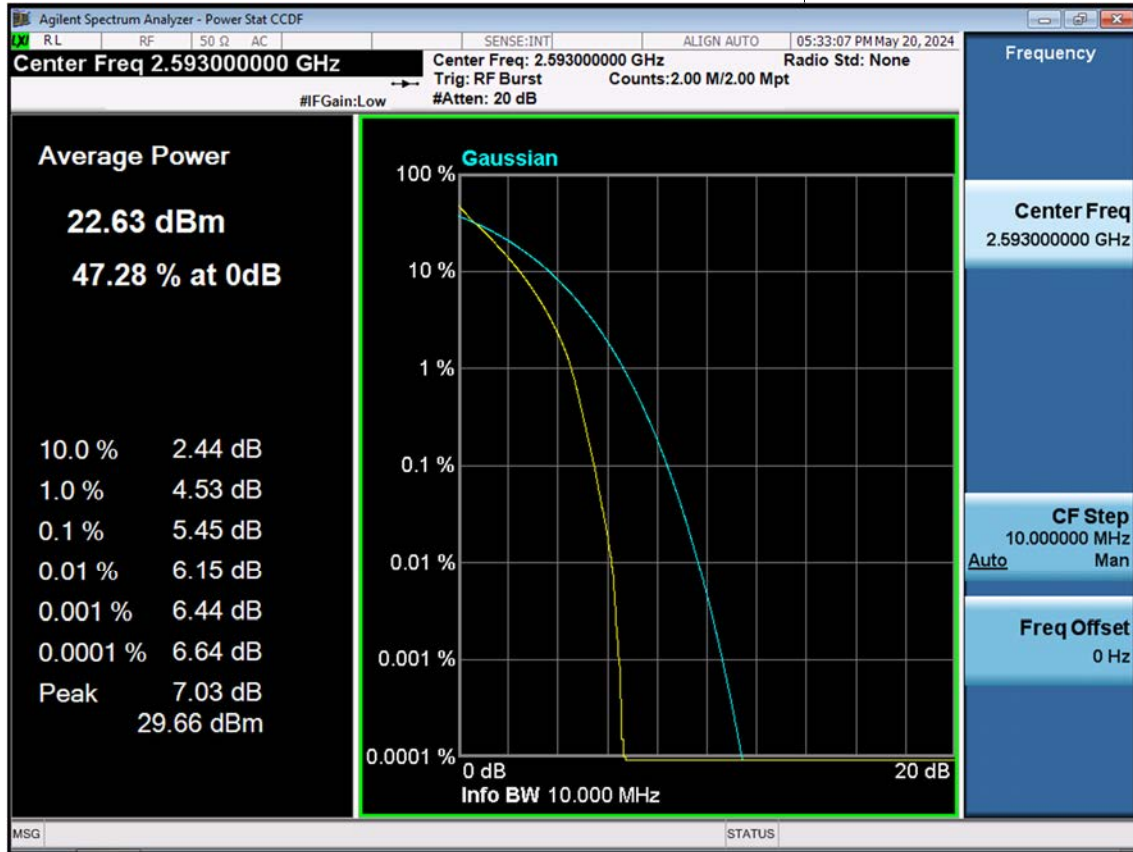


LTE B41/38_10 M_PAR_Mid_16 QAM_FullRB

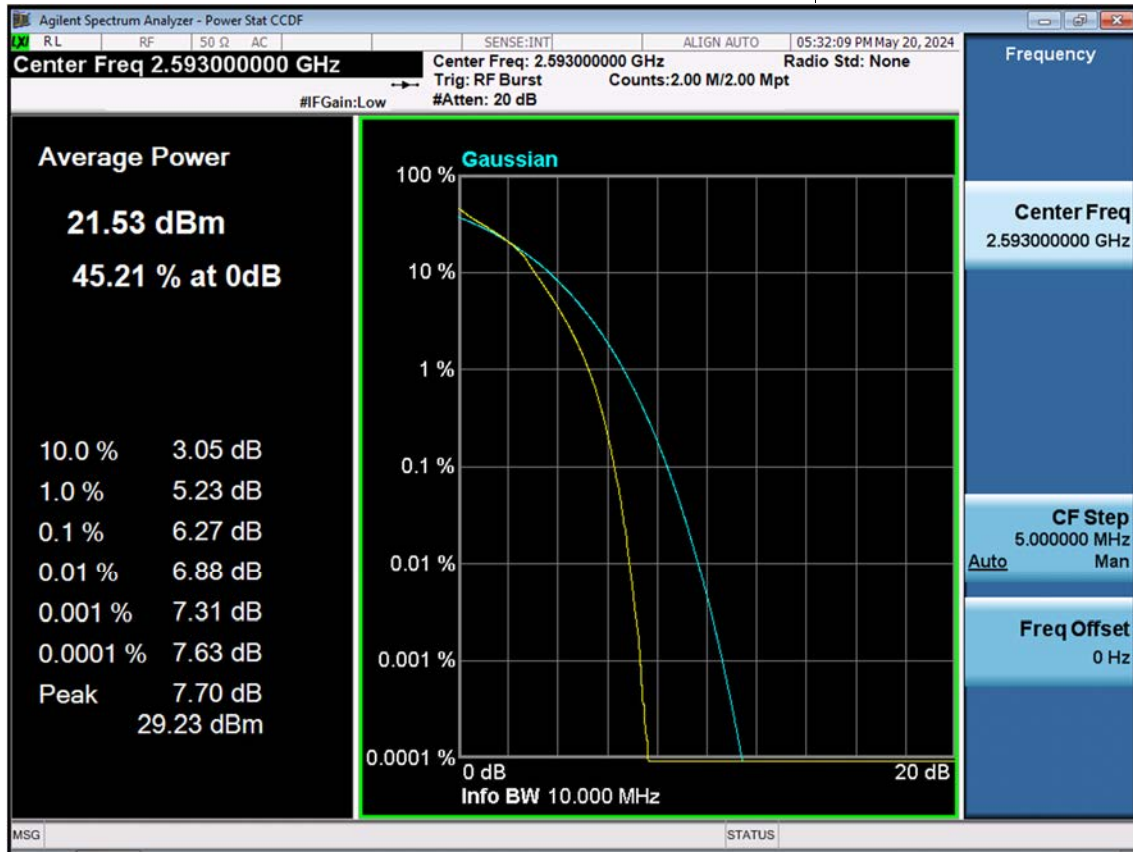


LTE B41/38_10 M_PAR_Mid_64 QAM_FullRB

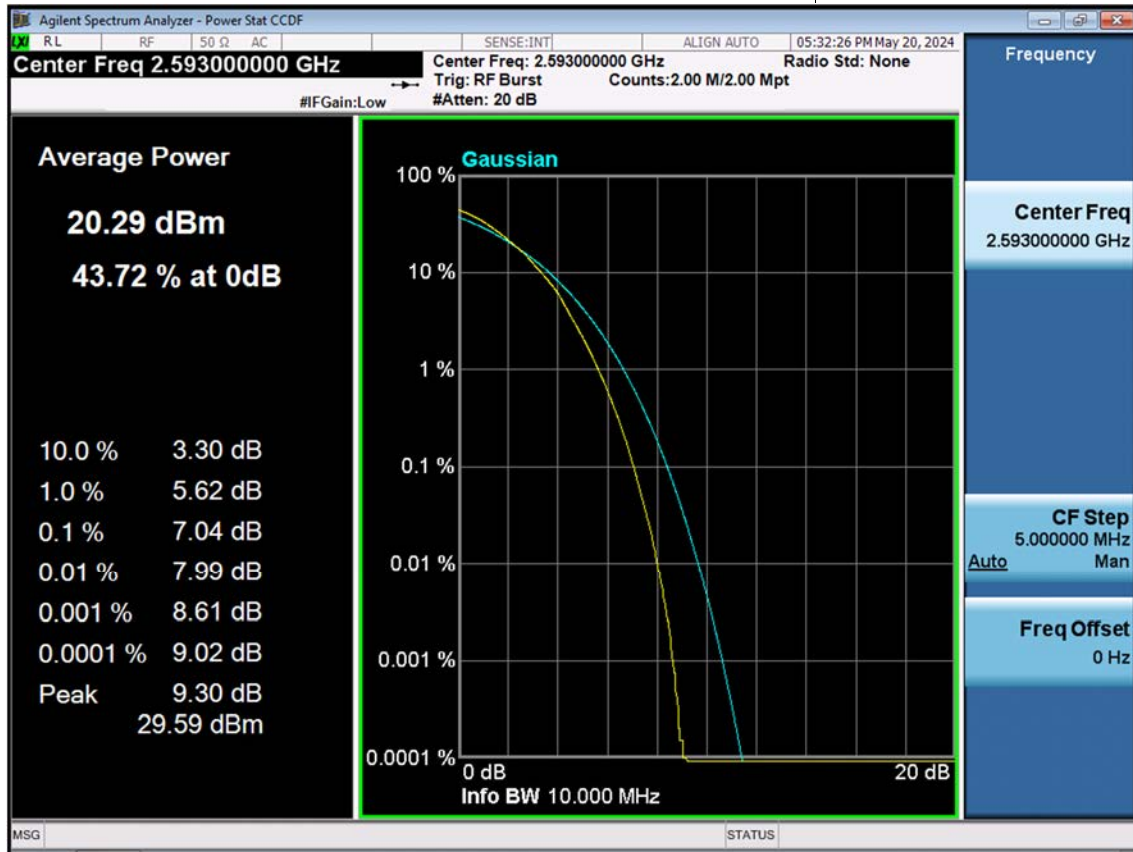


LTE B41/38_10 M_PAR_Mid_256 QAM_FullRB

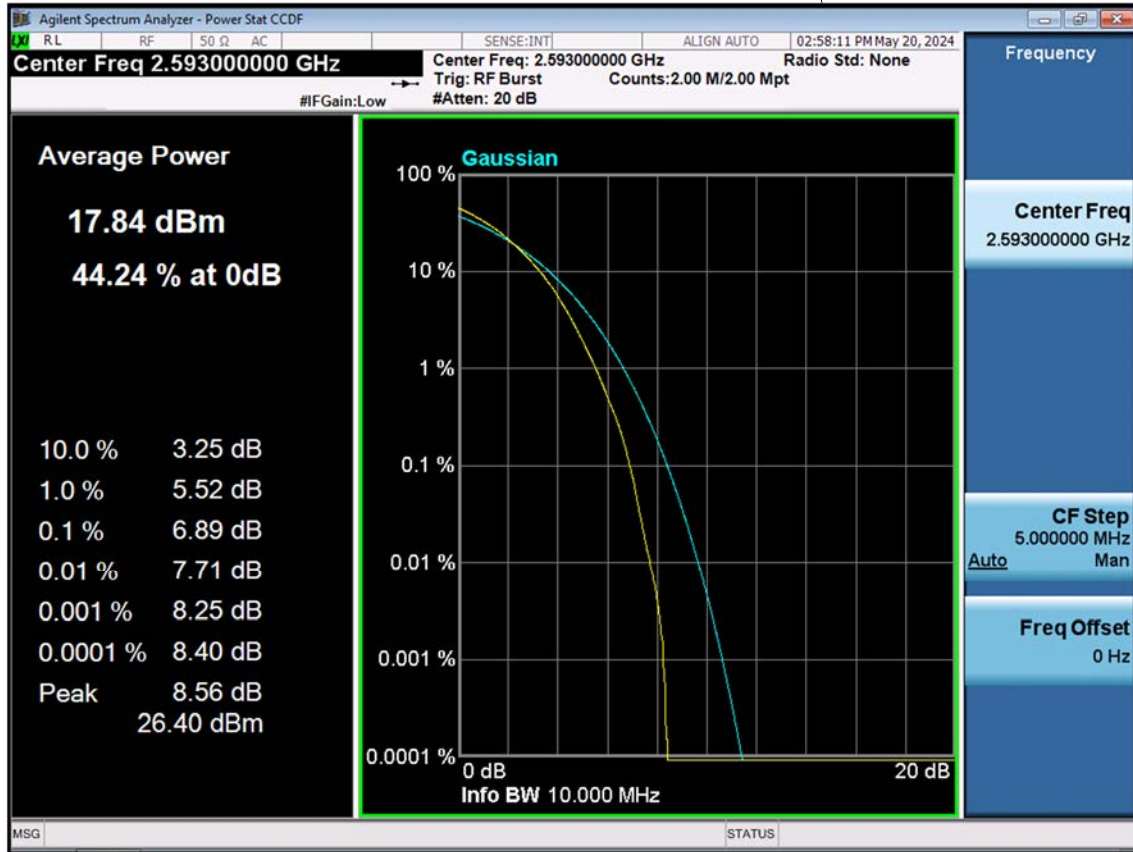


LTE B41/38_15 M_PAR_Mid_QPSK_FullRB

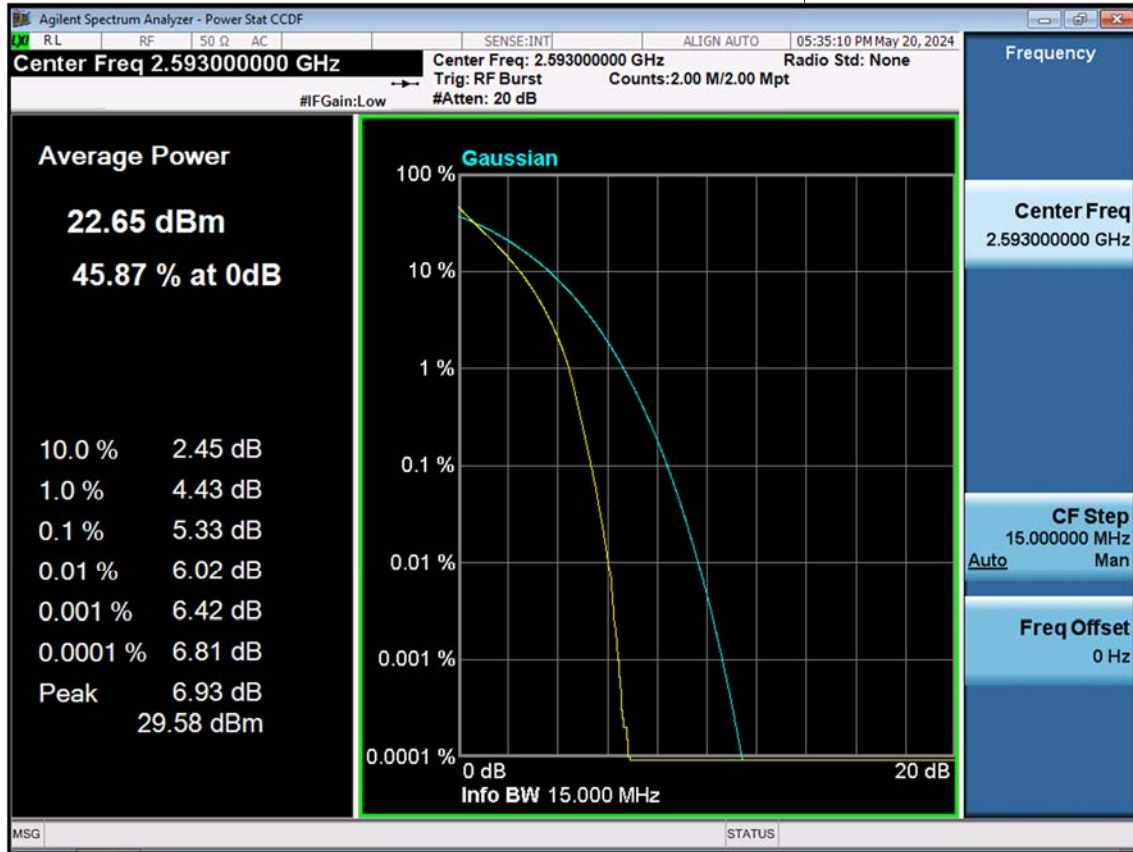


LTE B41/38_15 M_PAR_Mid_16 QAM_FullRB

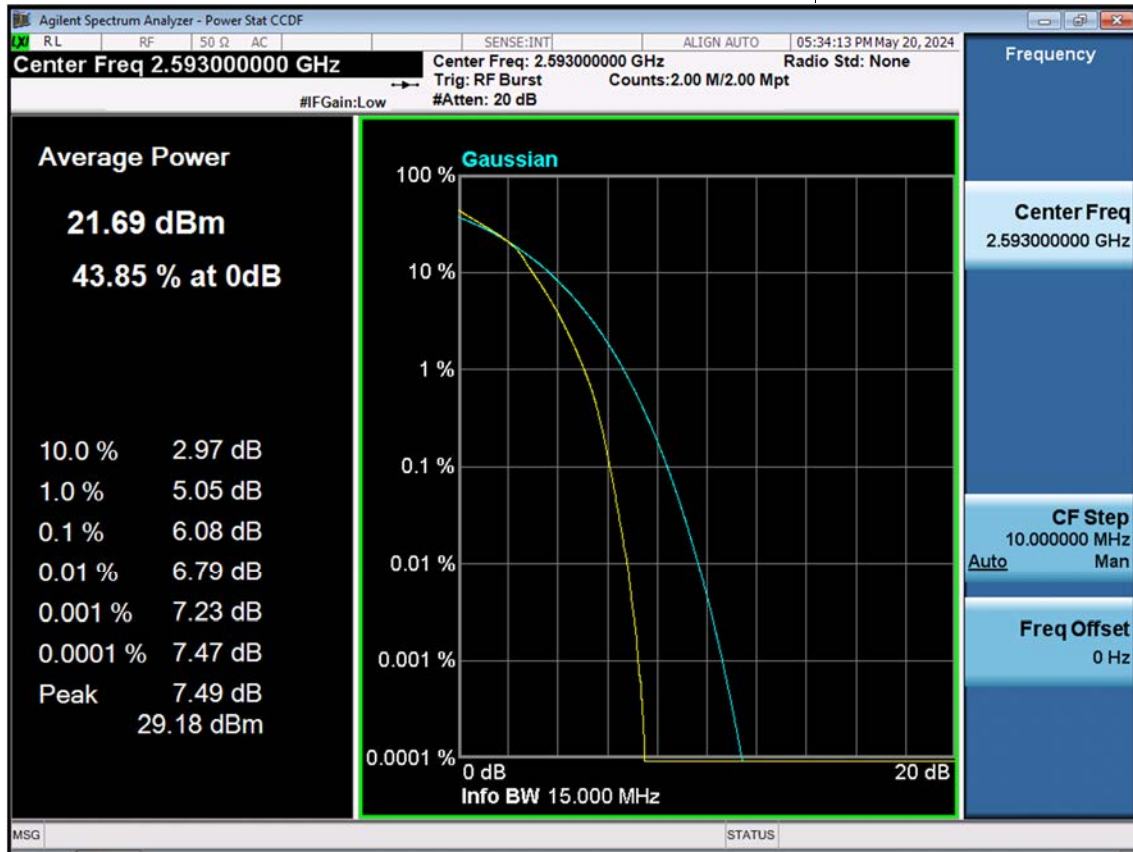


LTE B41/38_15 M_PAR_Mid_64 QAM_FullRB

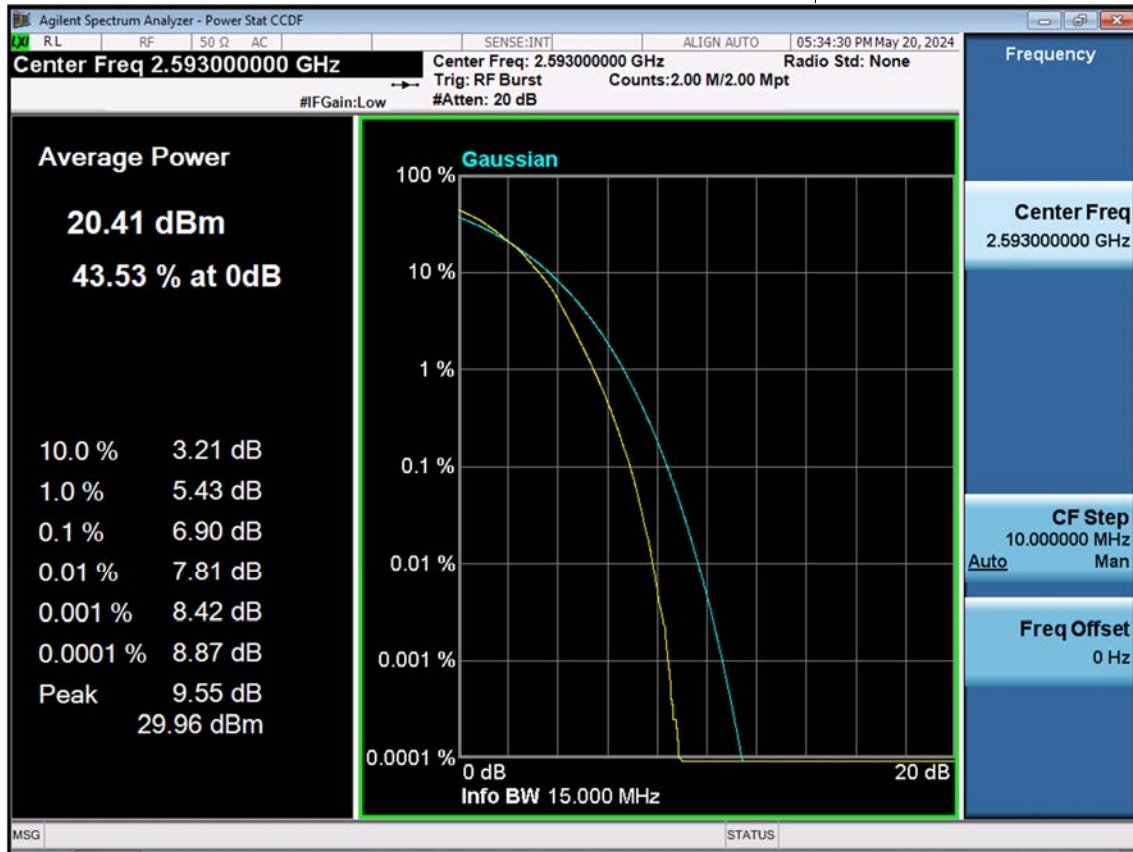


LTE B41/38_15 M_PAR_Mid_256 QAM_FullRB

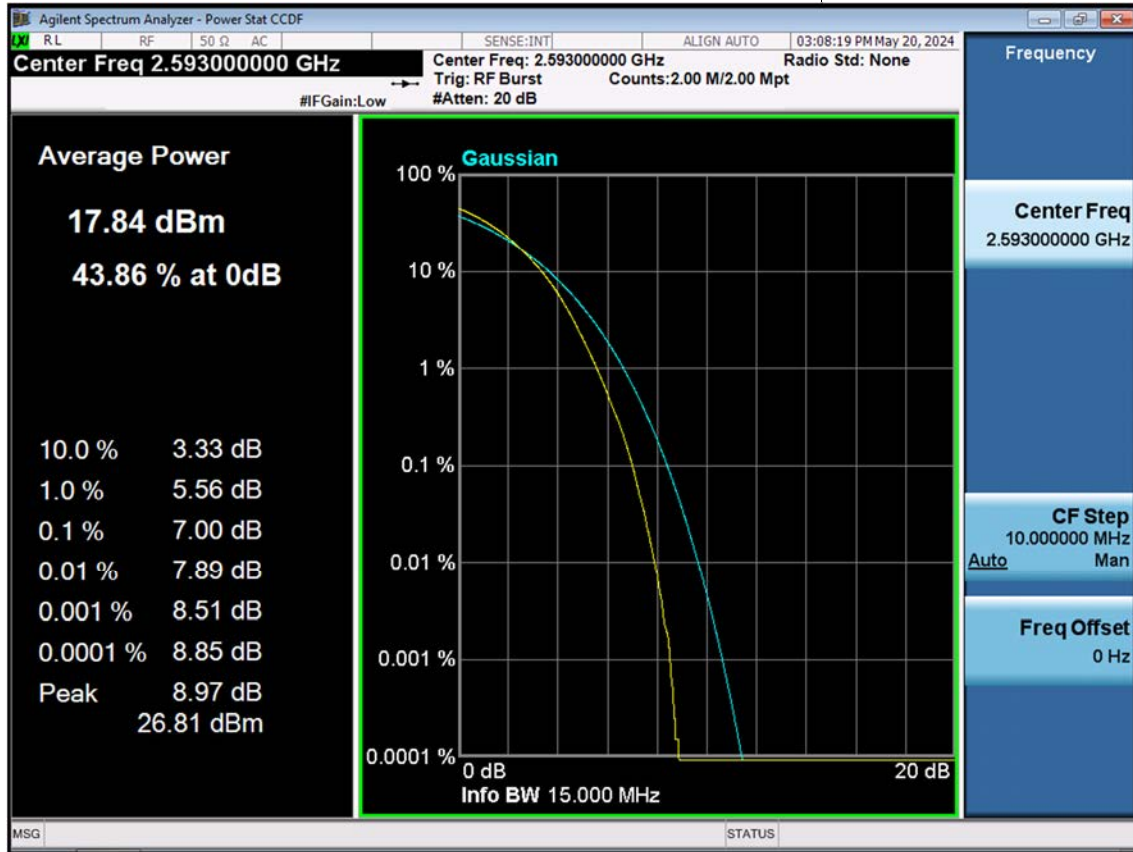


LTE B41/38_20 M_PAR_Mid_QPSK_FullRB

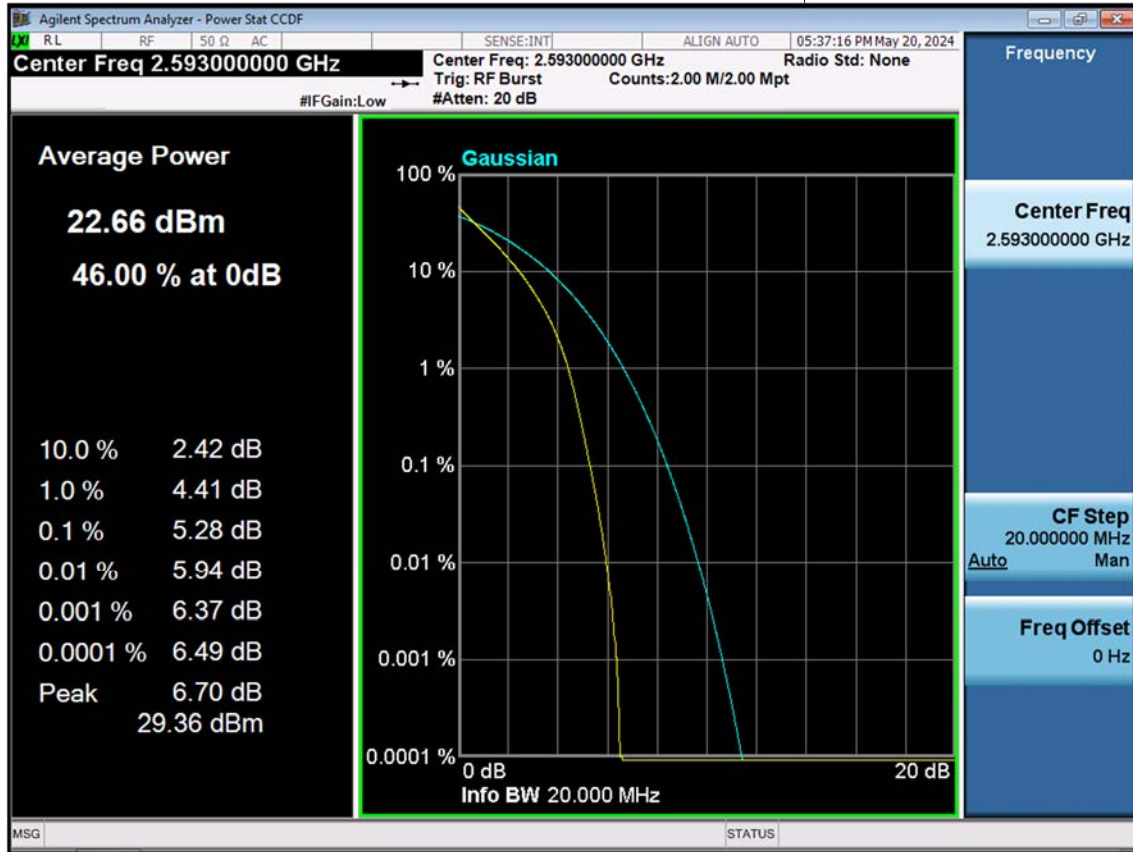


LTE B41/38_20 M_PAR_Mid_16 QAM_FullRB

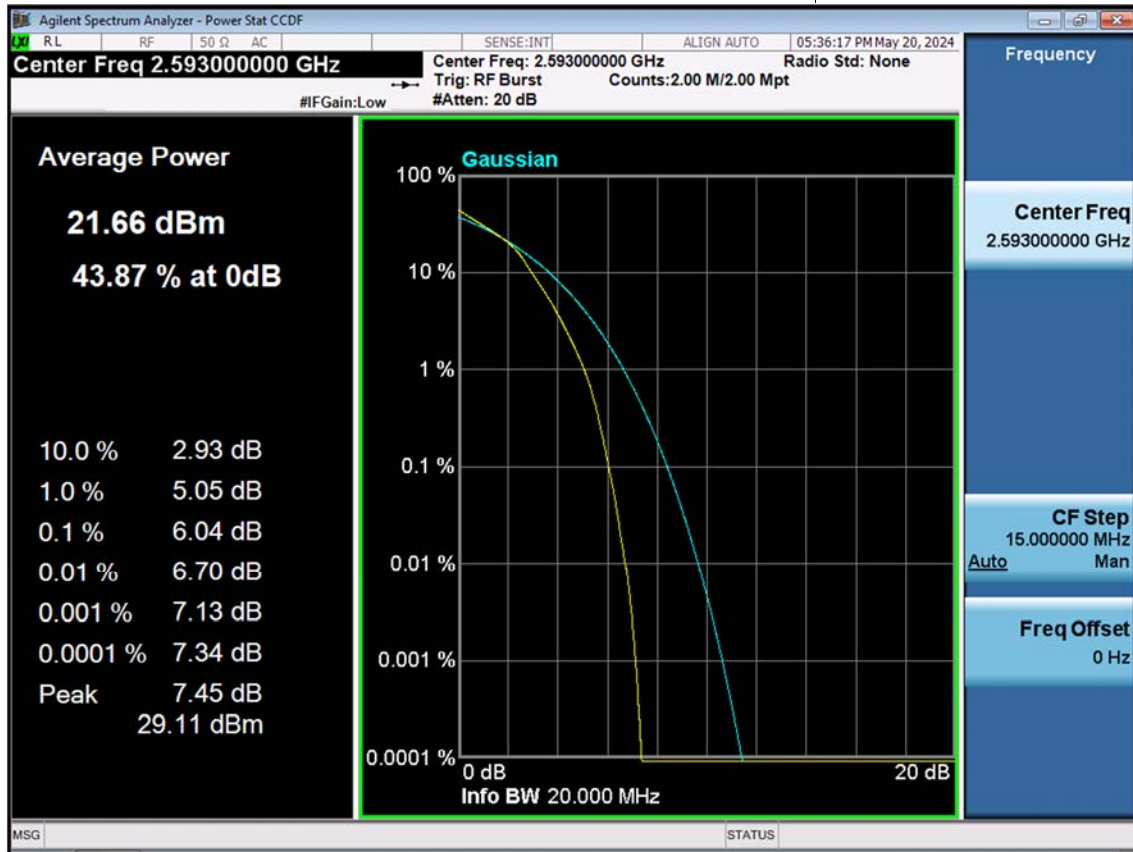


LTE B41/38_20 M_PAR_Mid_64 QAM_FullRB

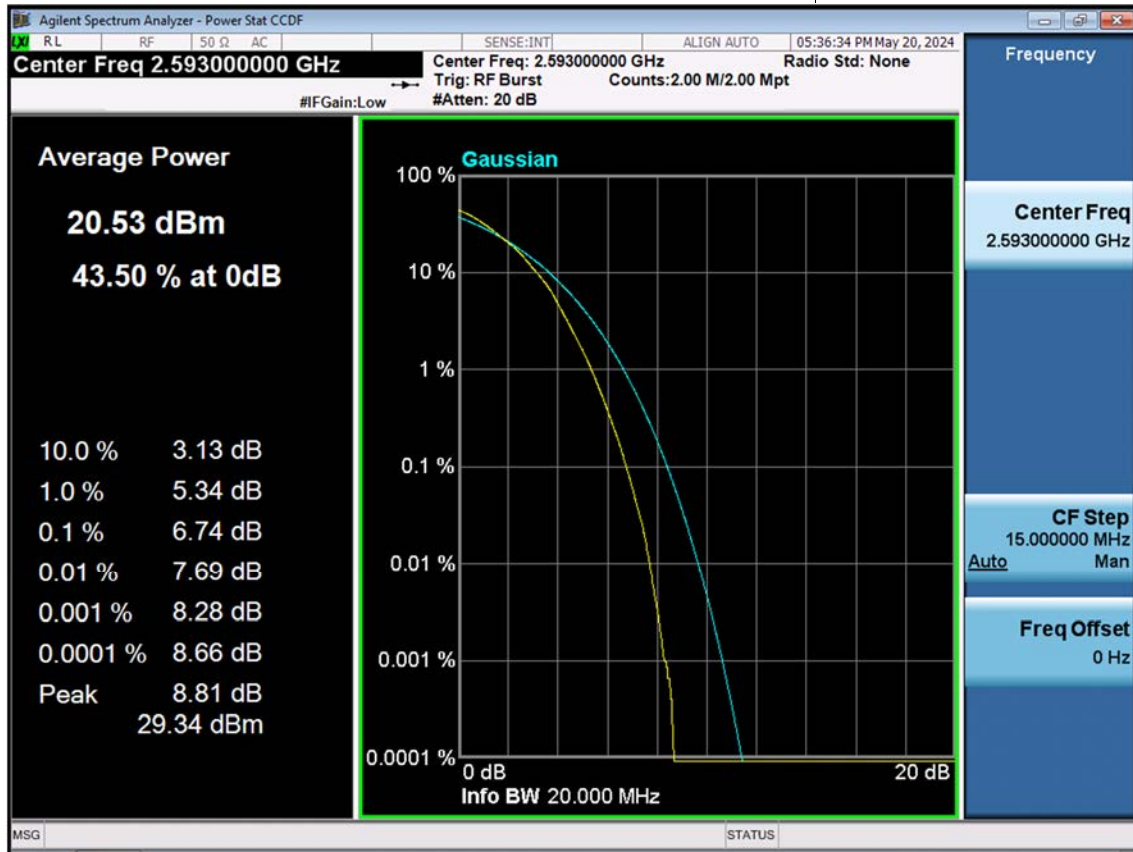


LTE B41/38_20 M_PAR_Mid_256 QAM_FullRB

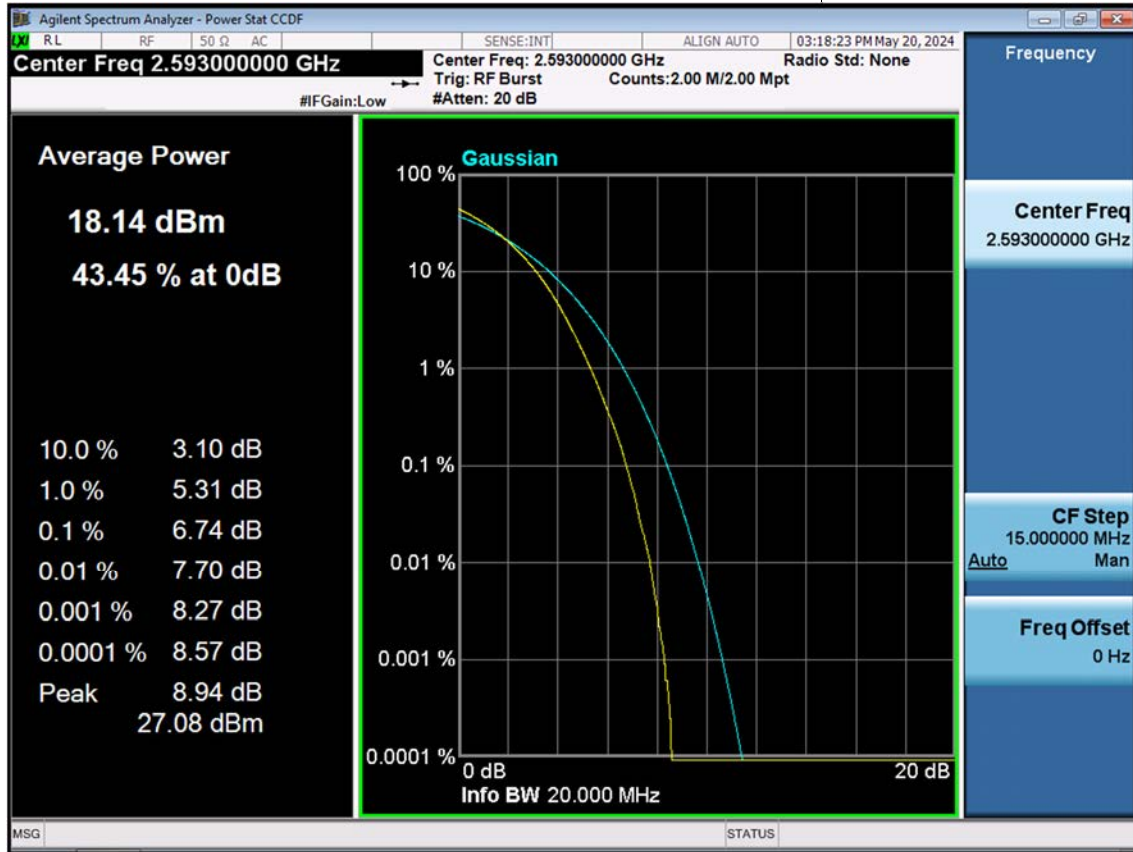


LTE B41/38_5 M_OBW_Mid_QPSK_FullRB

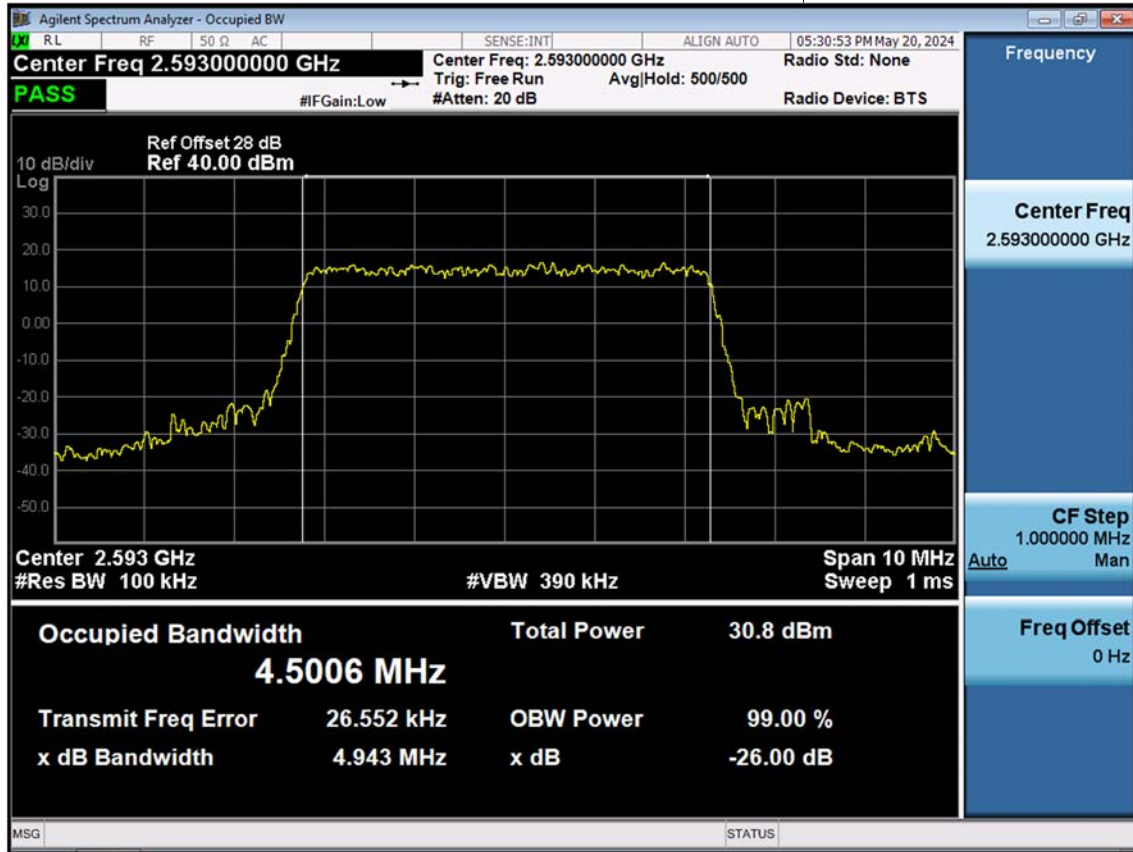


LTE B41/38_5 M_OBW_Mid_16 QAM_FullRB

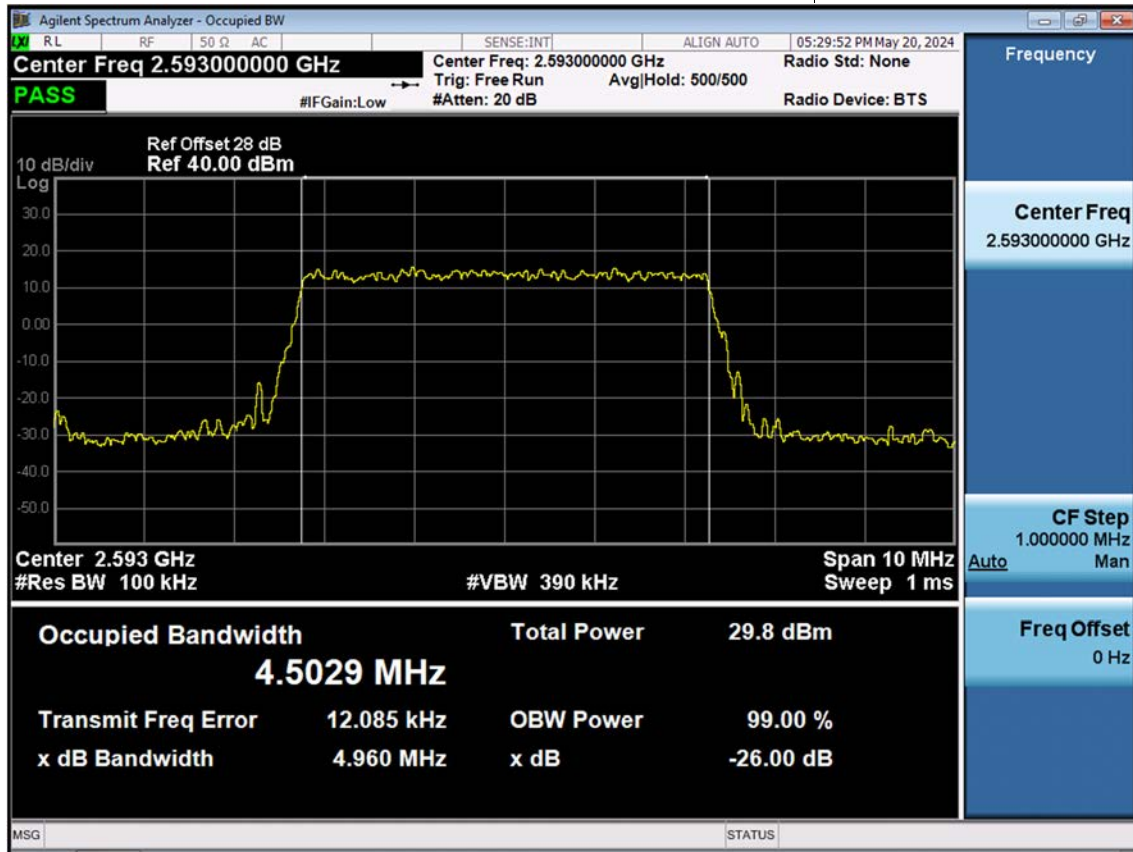


LTE B41/38_5 M_OBW_Mid_64 QAM_FullRB

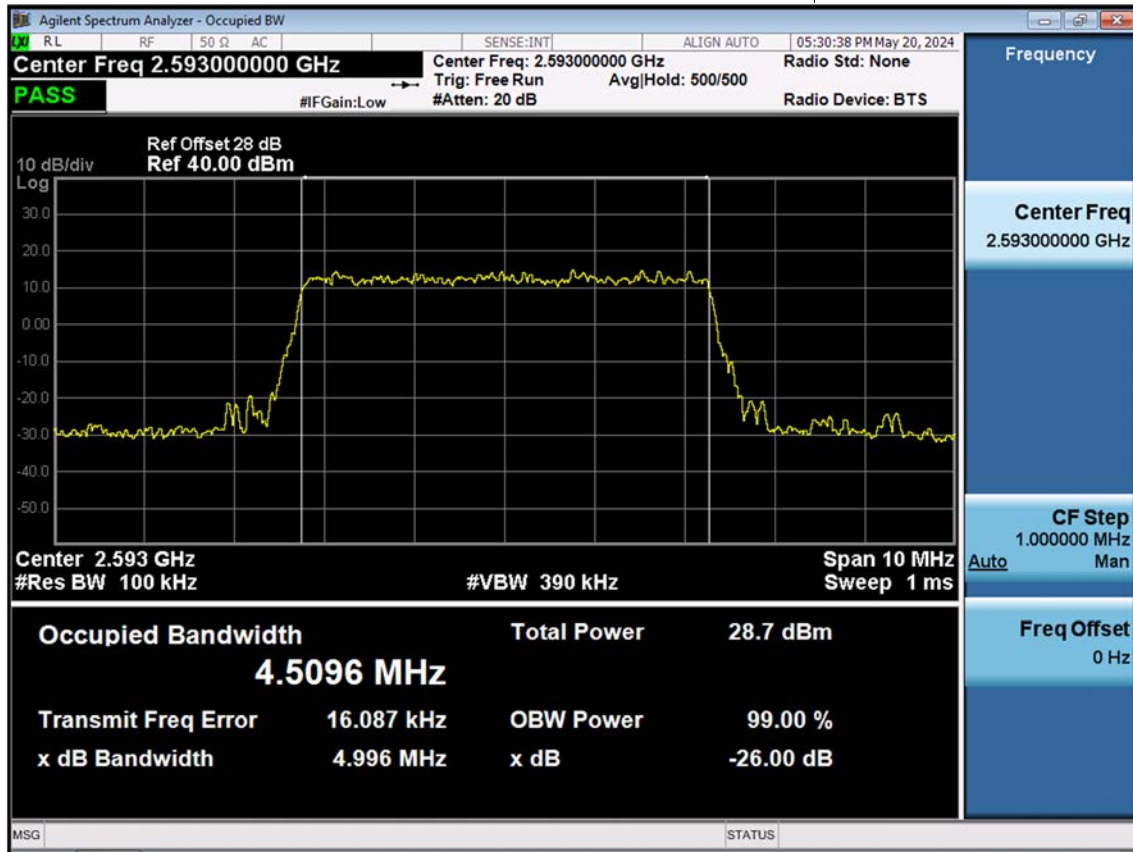


LTE B41/38_5 M_OBW_Mid_256 QAM_FullRB

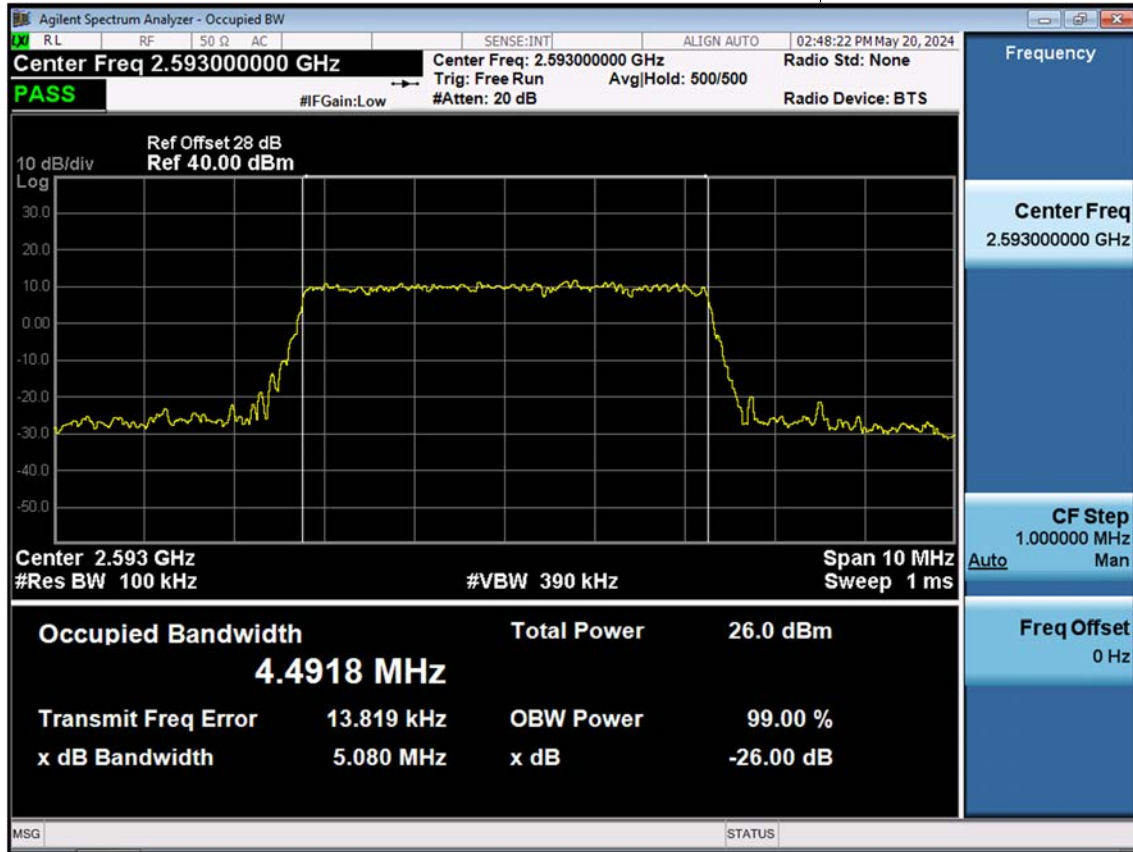


LTE B41/38_10 M_OBW_Mid_QPSK_FullRB

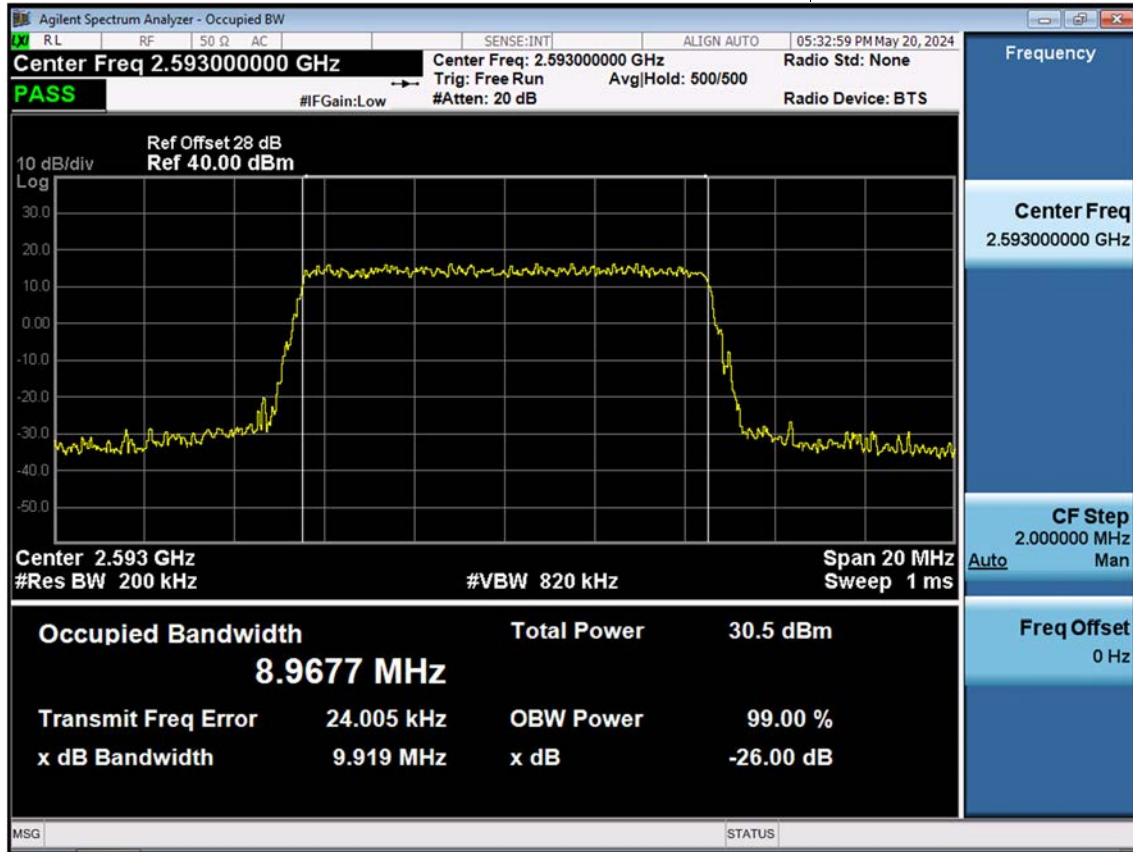


LTE B41/38_10 M_OBW_Mid_16 QAM_FullRB

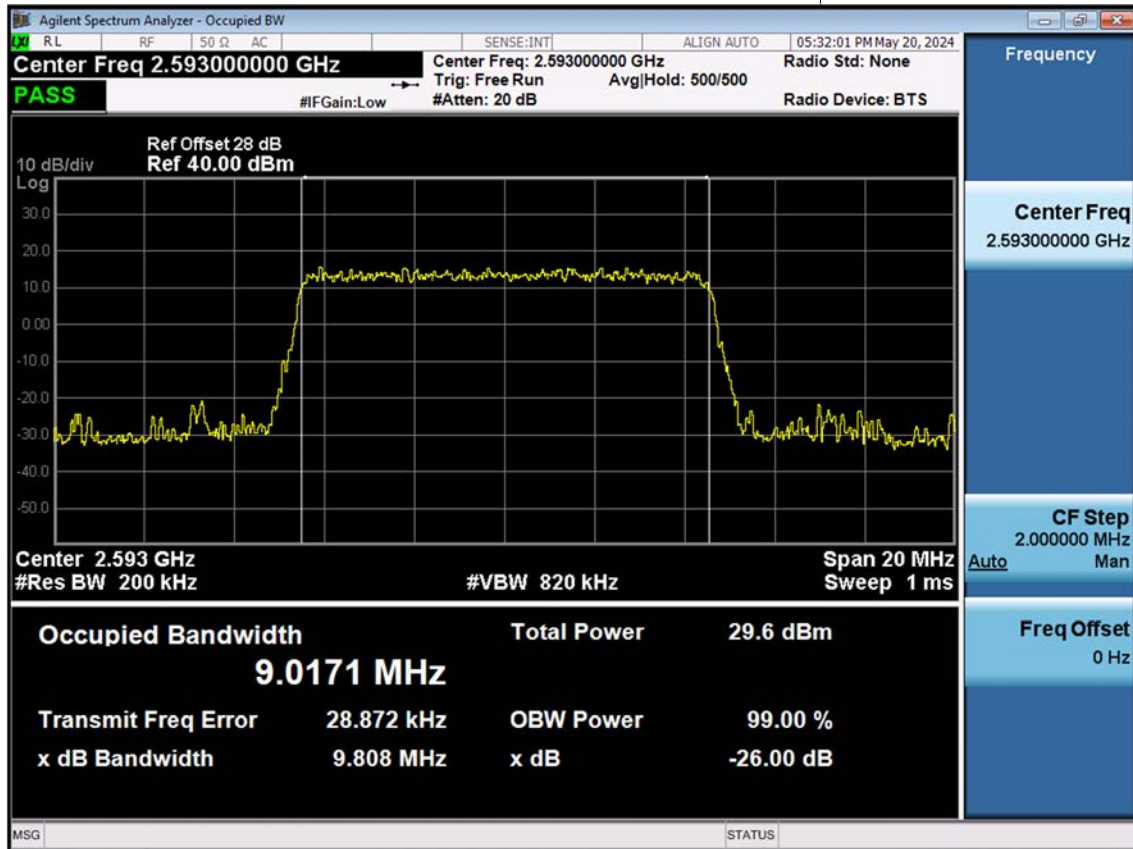


LTE B41/38_10 M_OBW_Mid_64 QAM_FullRB

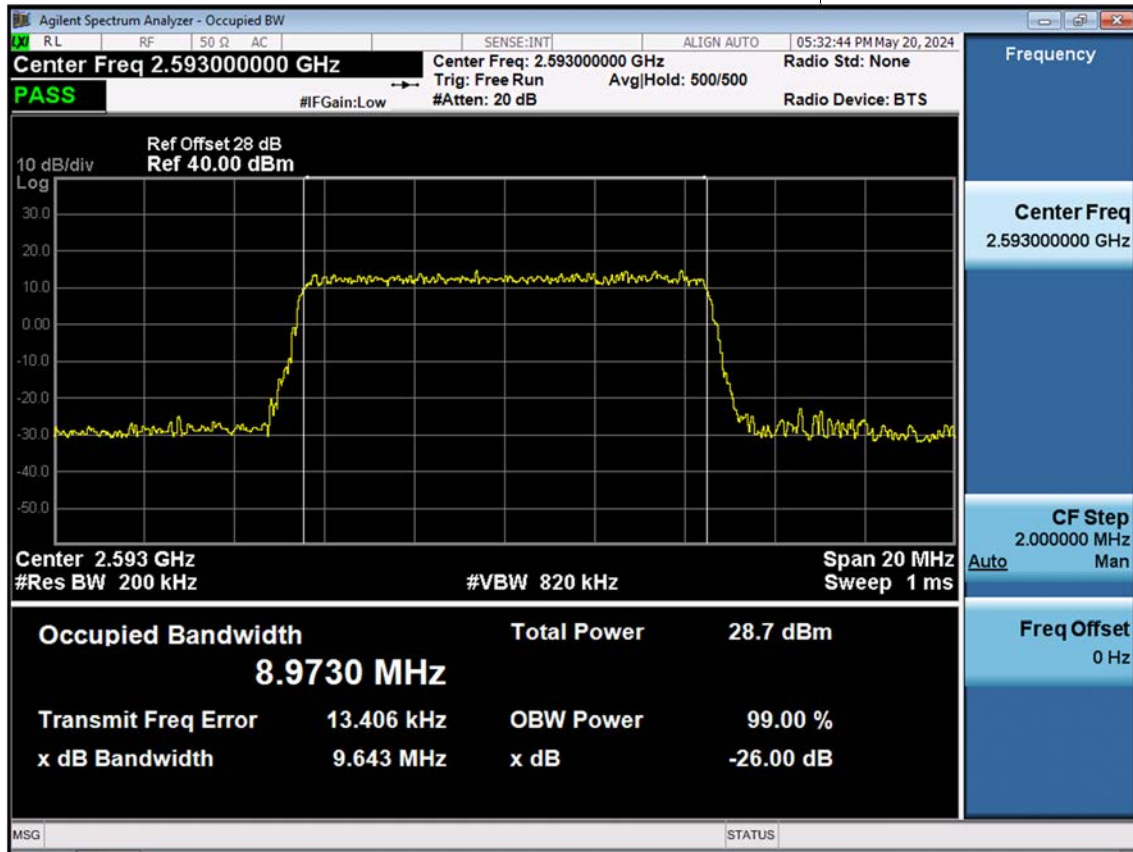


LTE B41/38_10 M_OBW_Mid_256 QAM_FullRB

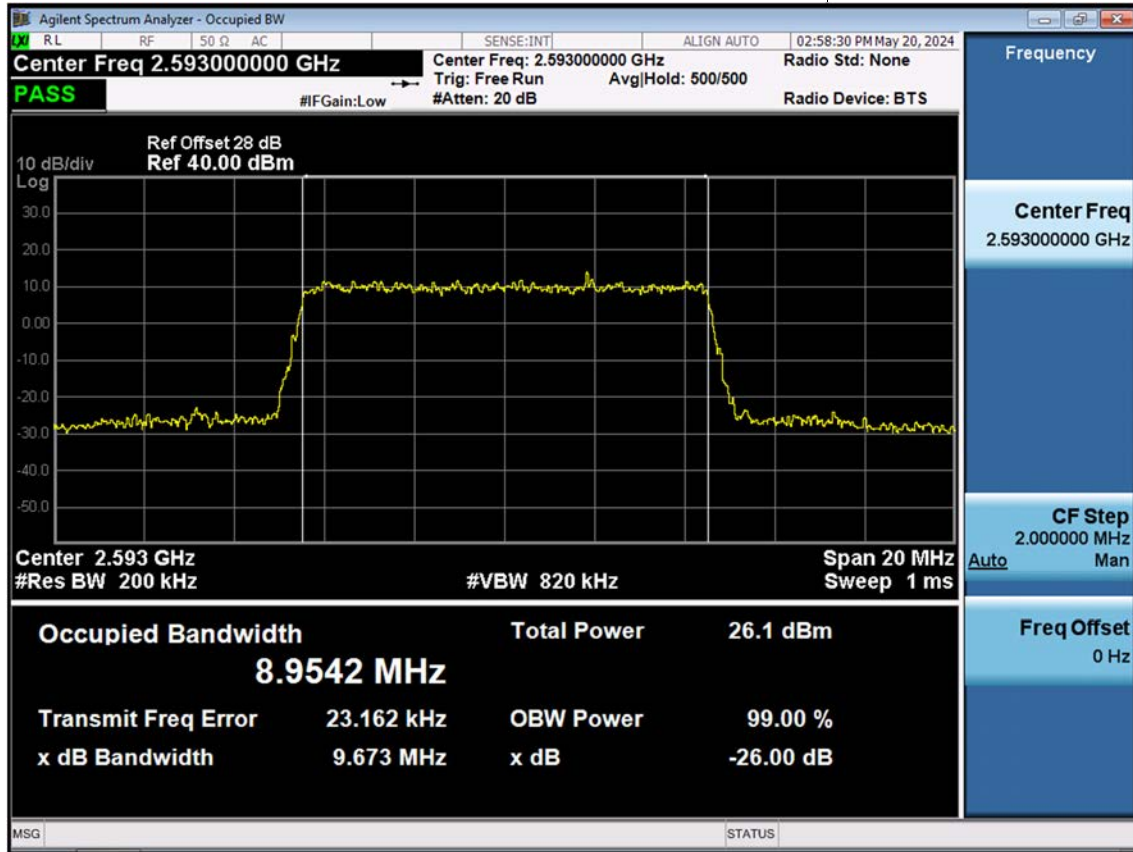


LTE B41/38_15 M_OBW_Mid_QPSK_FullRB

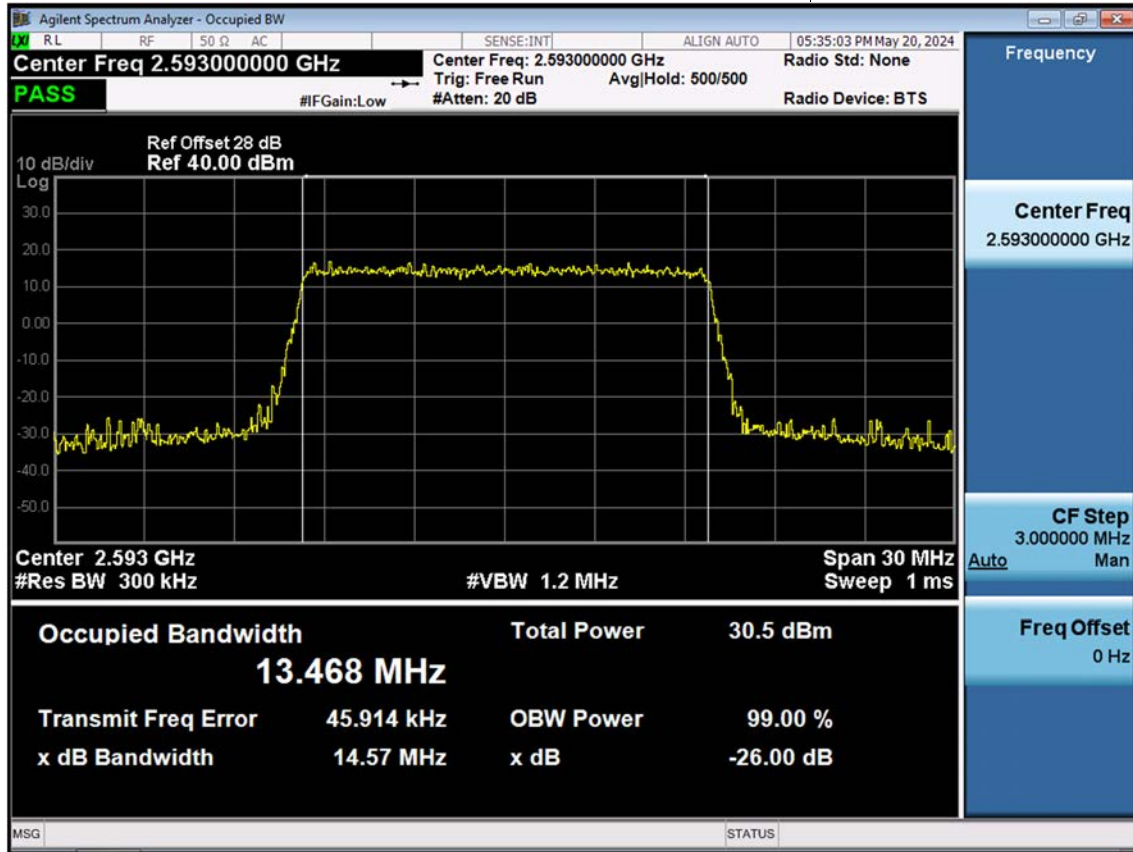


LTE B41/38_15 M_OBW_Mid_16 QAM_FullRB

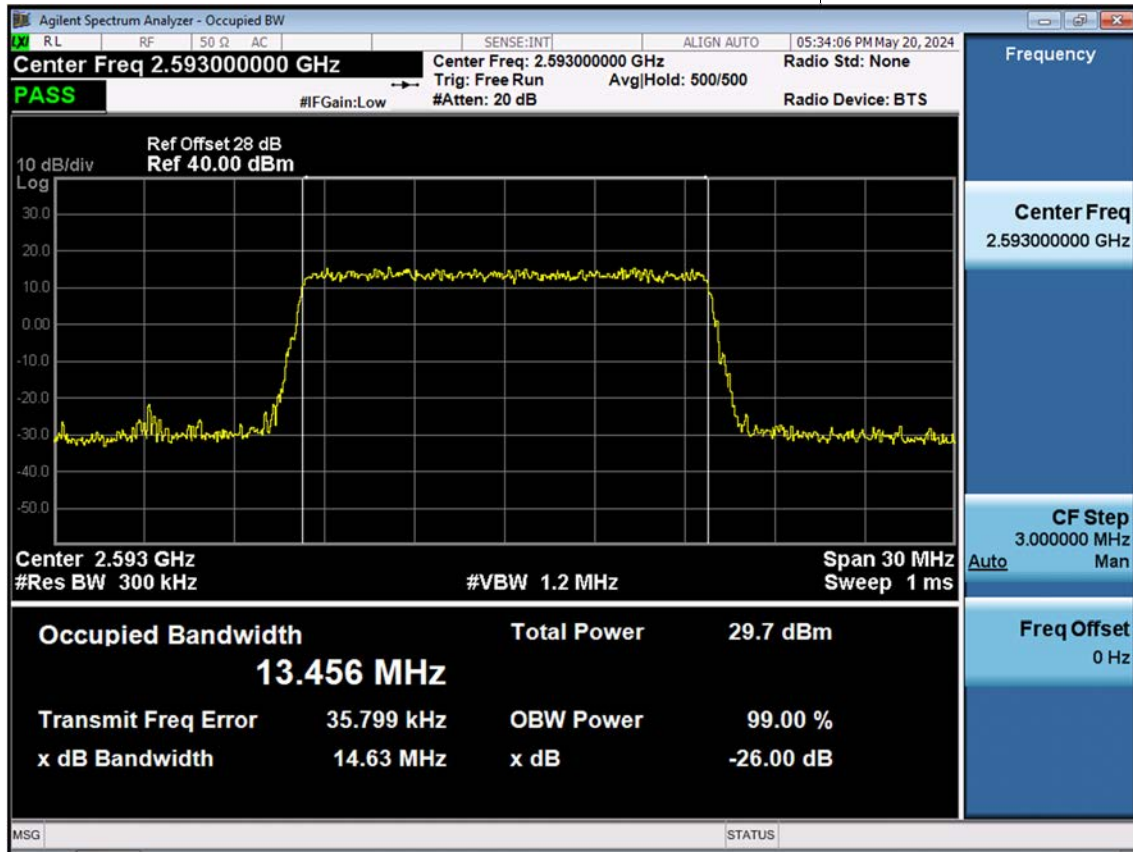


LTE B41/38_15 M_OBW_Mid_64 QAM_FullRB

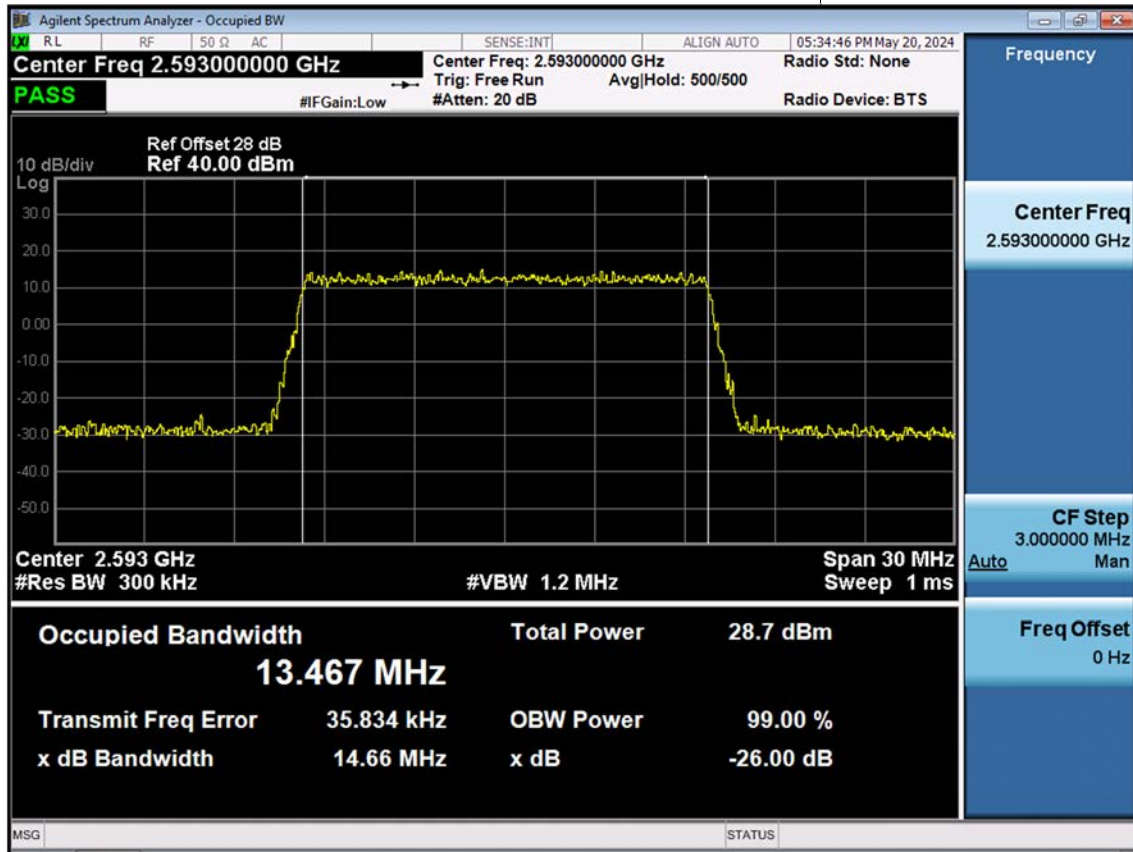


LTE B41/38_15 M_OBW_Mid_256 QAM_FullRB

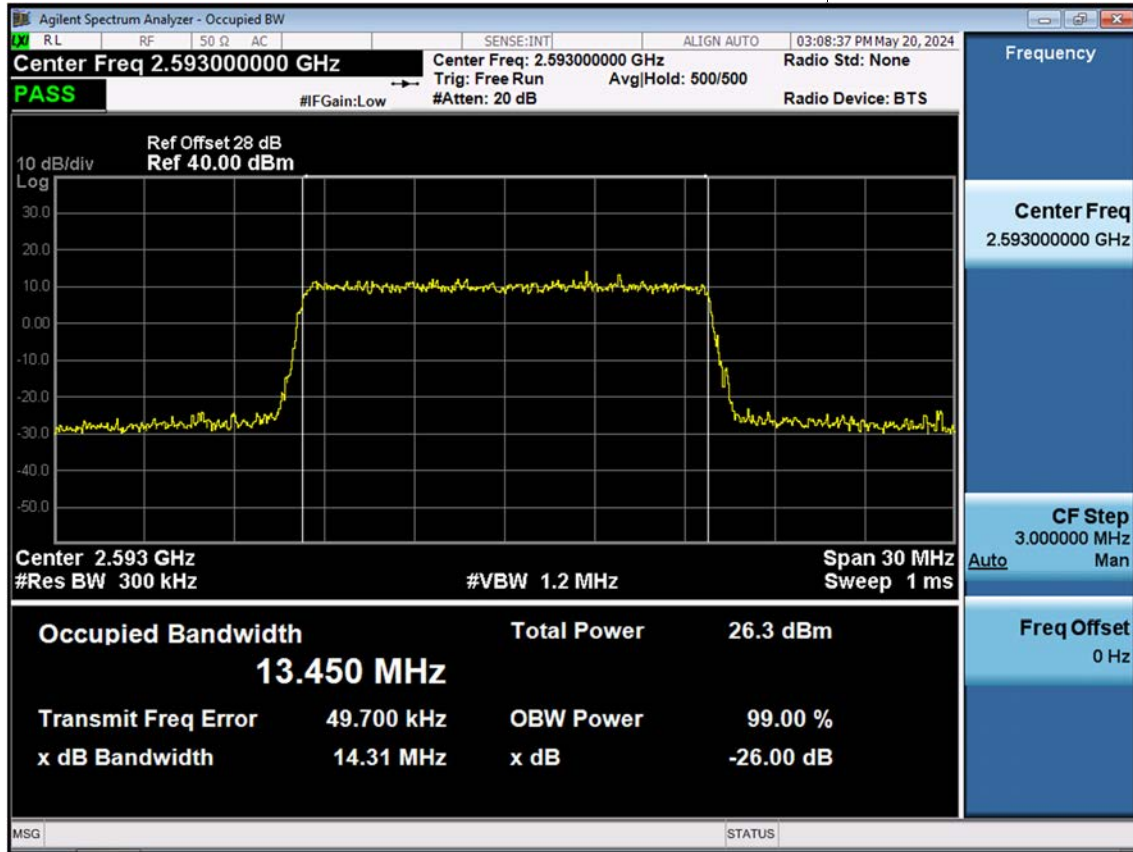


LTE B41/38_20 M_OBW_Mid_QPSK_FullRB

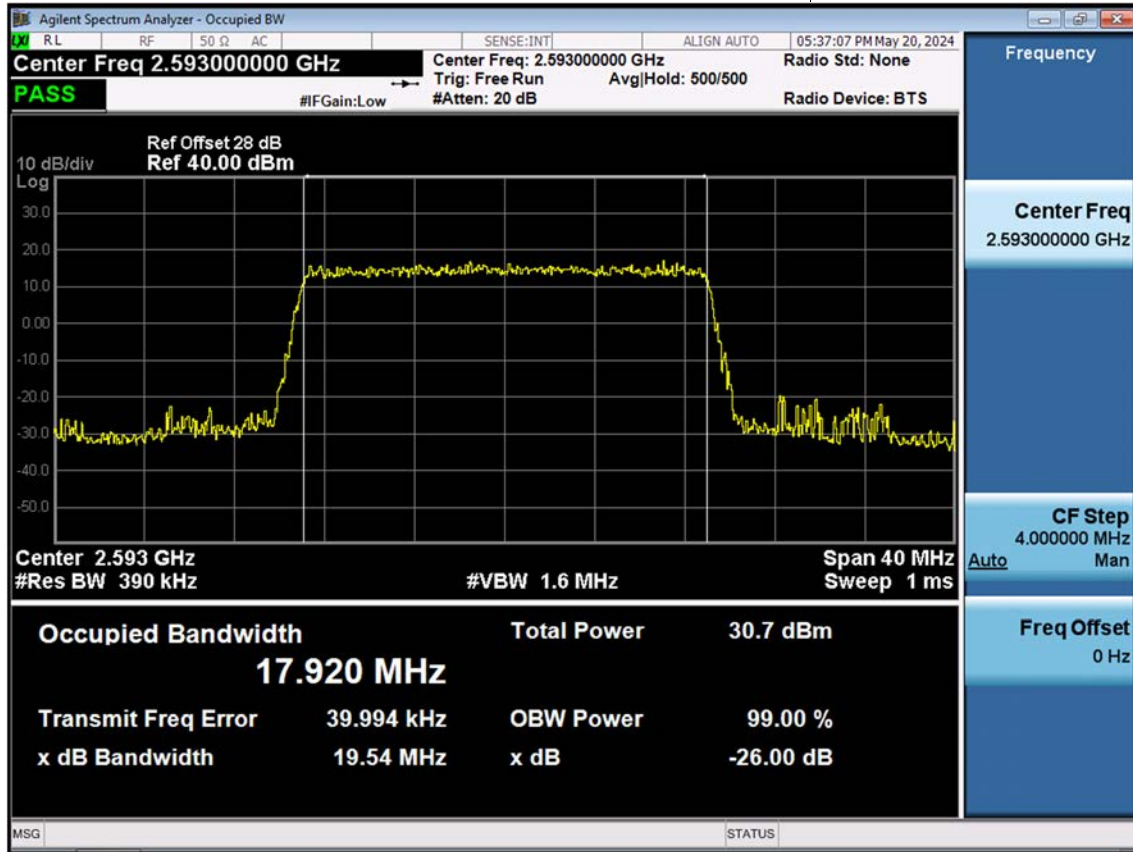


LTE B41/38_20 M_OBW_Mid_16 QAM_FullRB

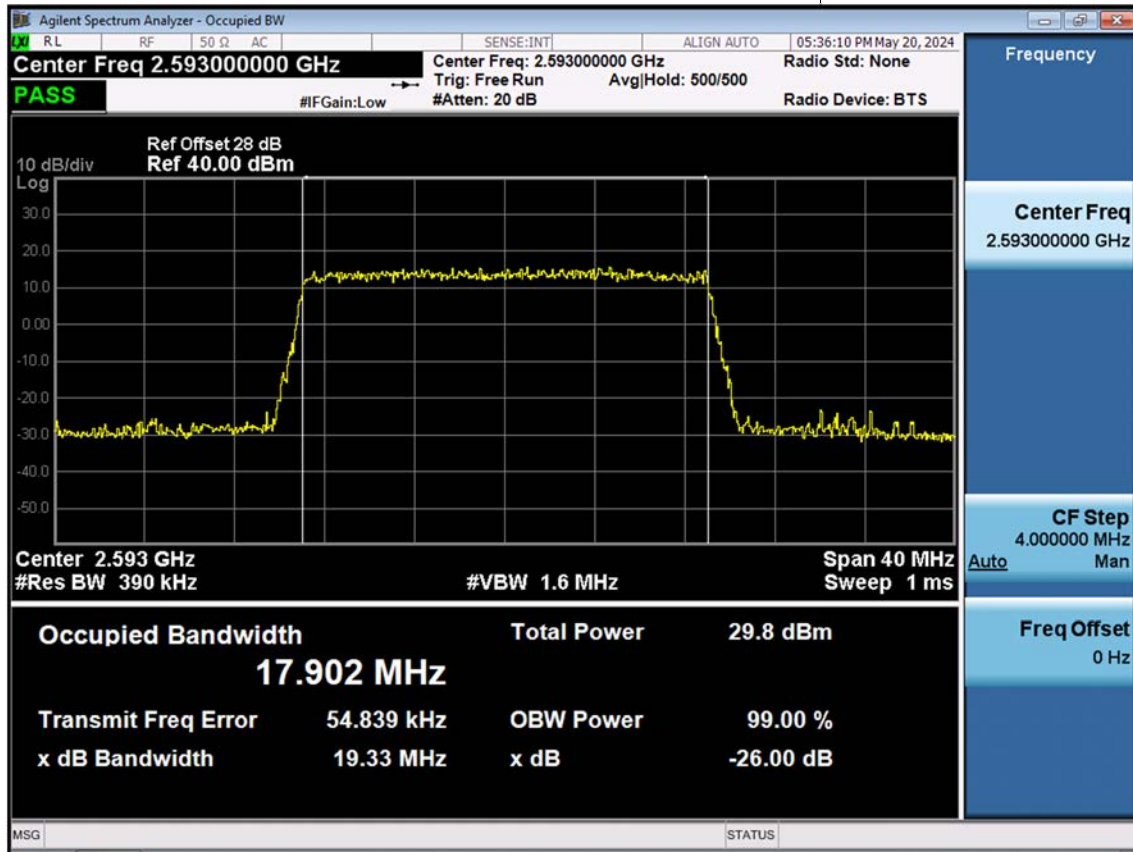


LTE B41/38_20 M_OBW_Mid_64 QAM_FullRB

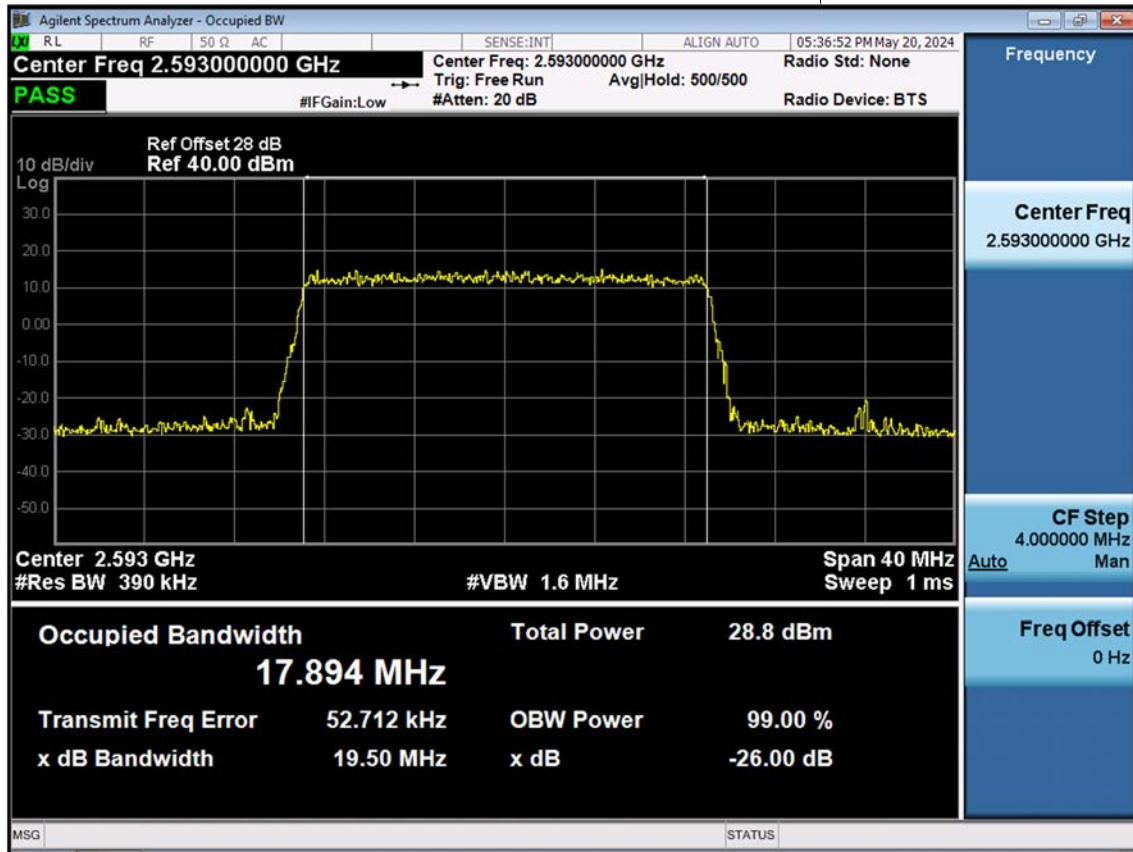


LTE B41/38_20 M_OBW_Mid_256 QAM_FullRB

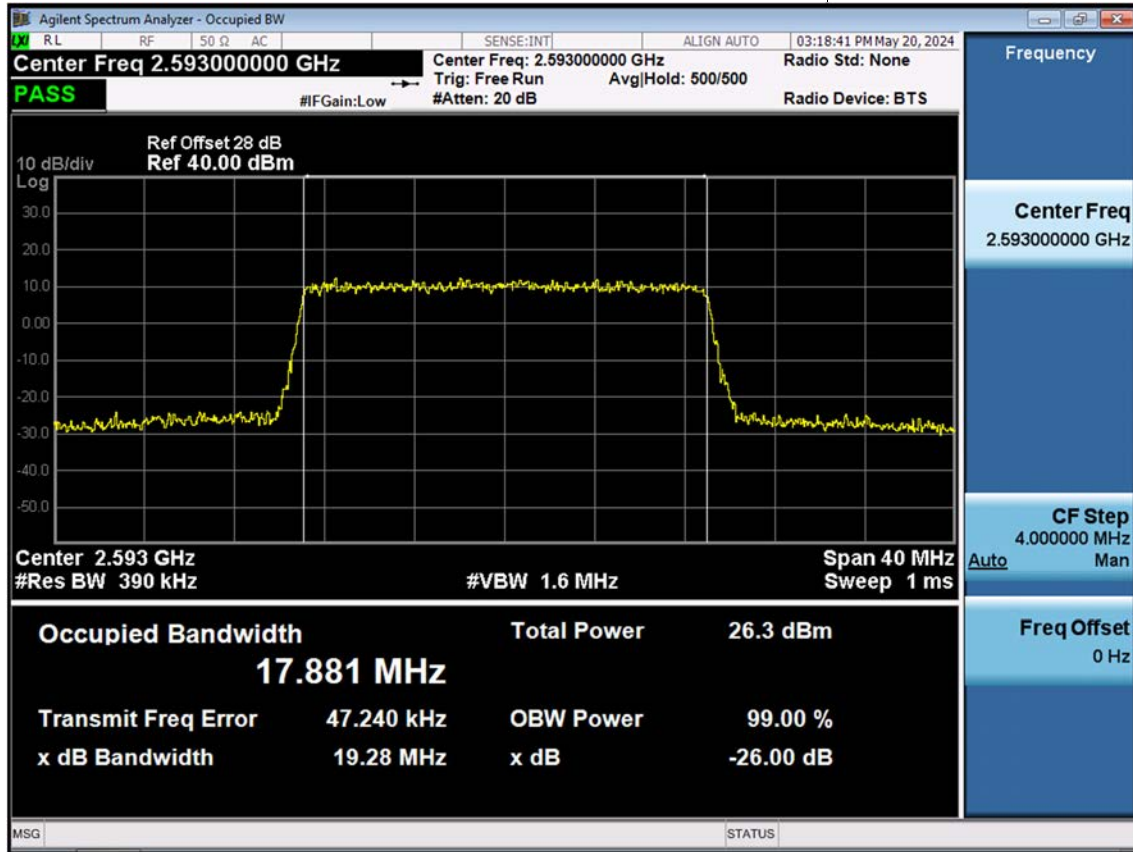


LTE B41/38_5 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

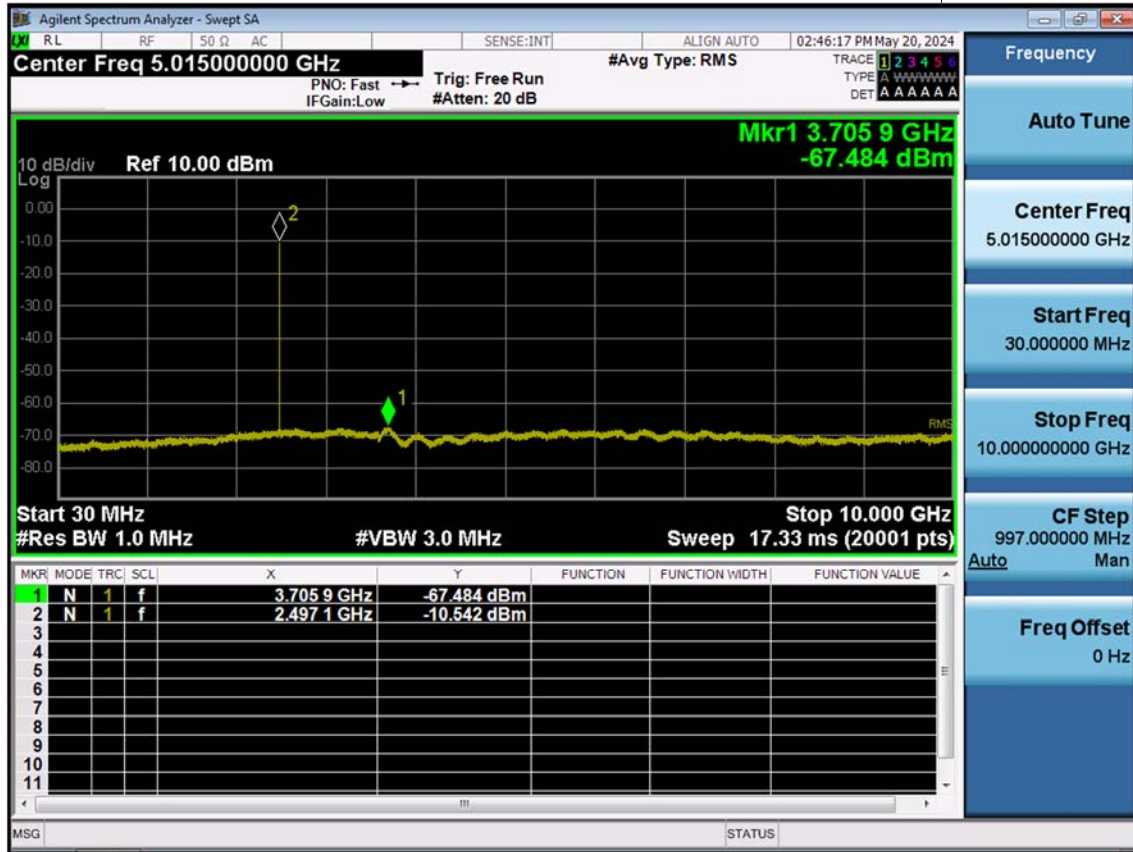


LTE B41/38_5 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

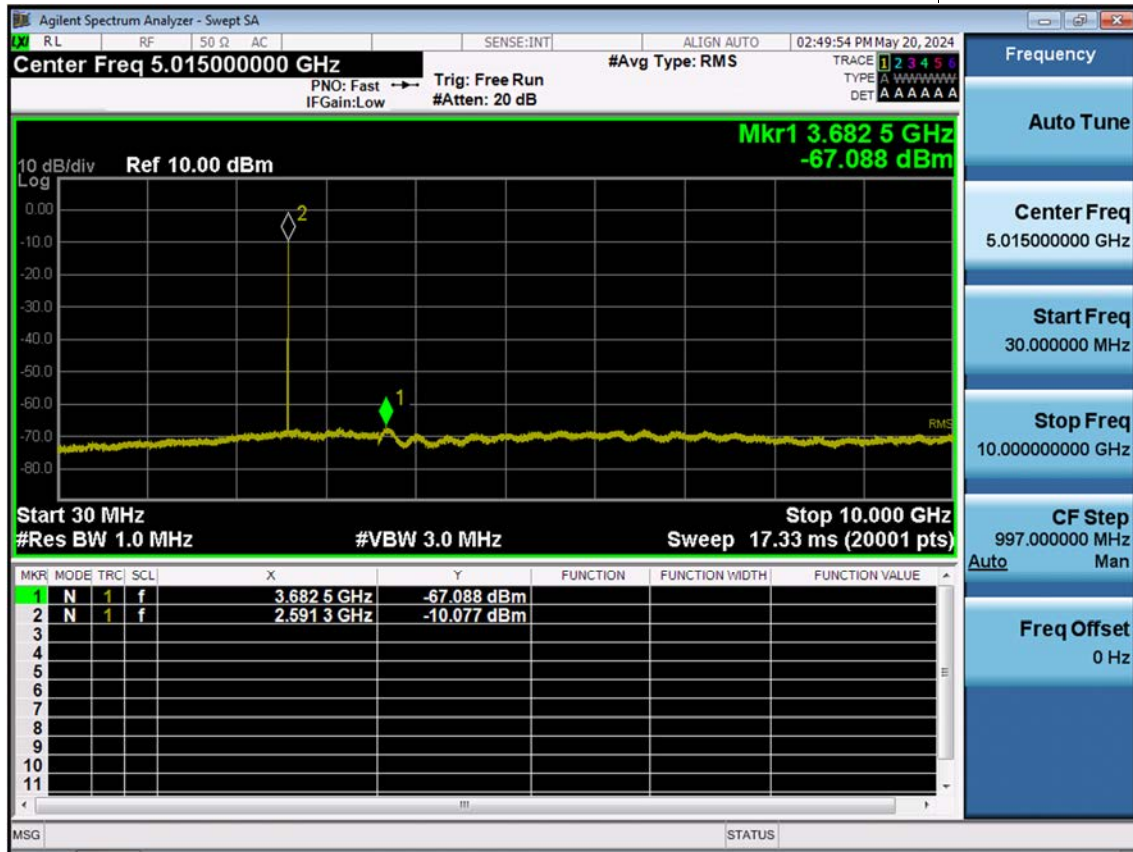


LTE B41/38_5 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

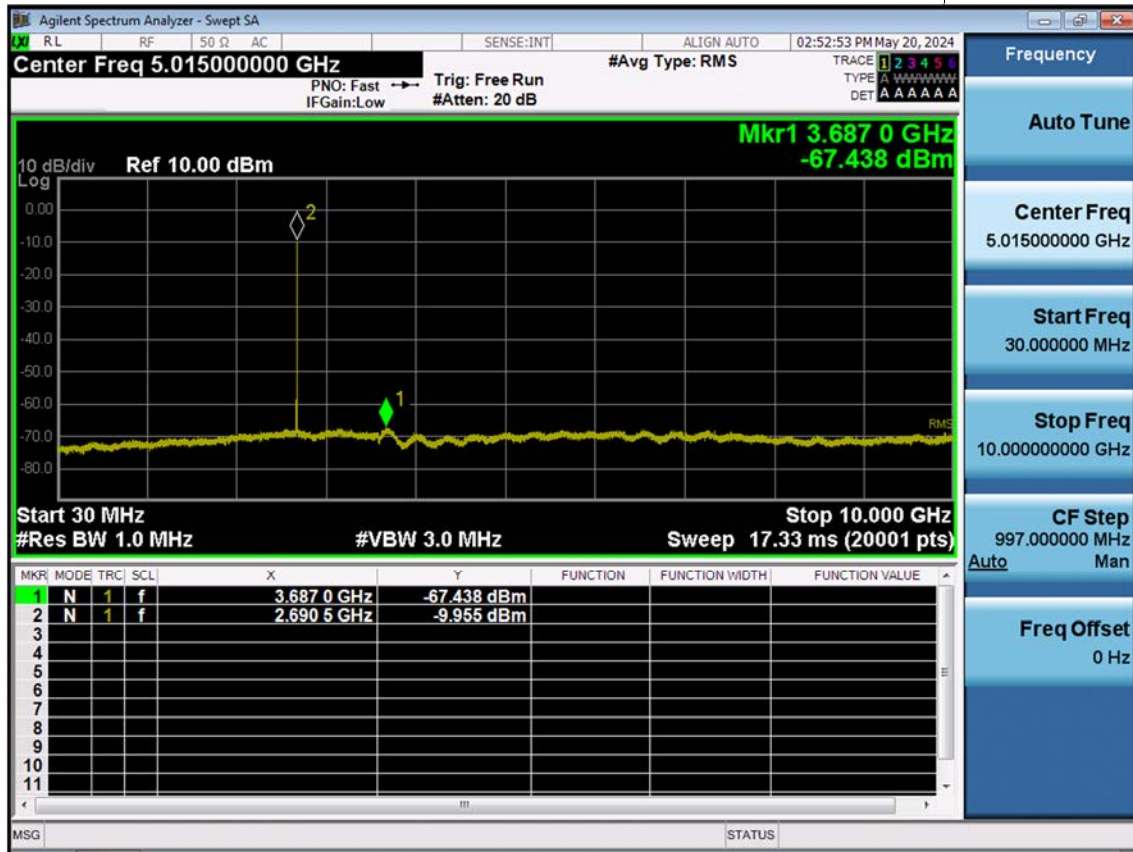


LTE B41/38_10 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

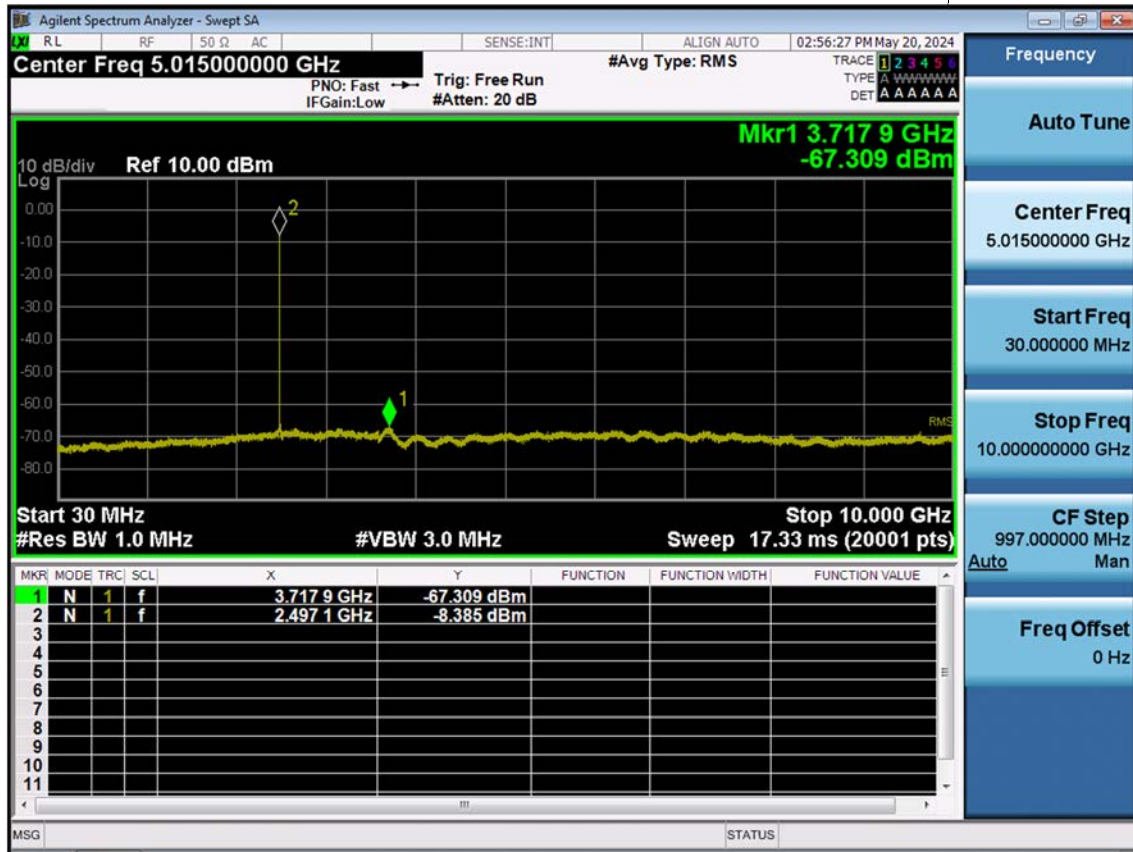


LTE B41/38_10 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

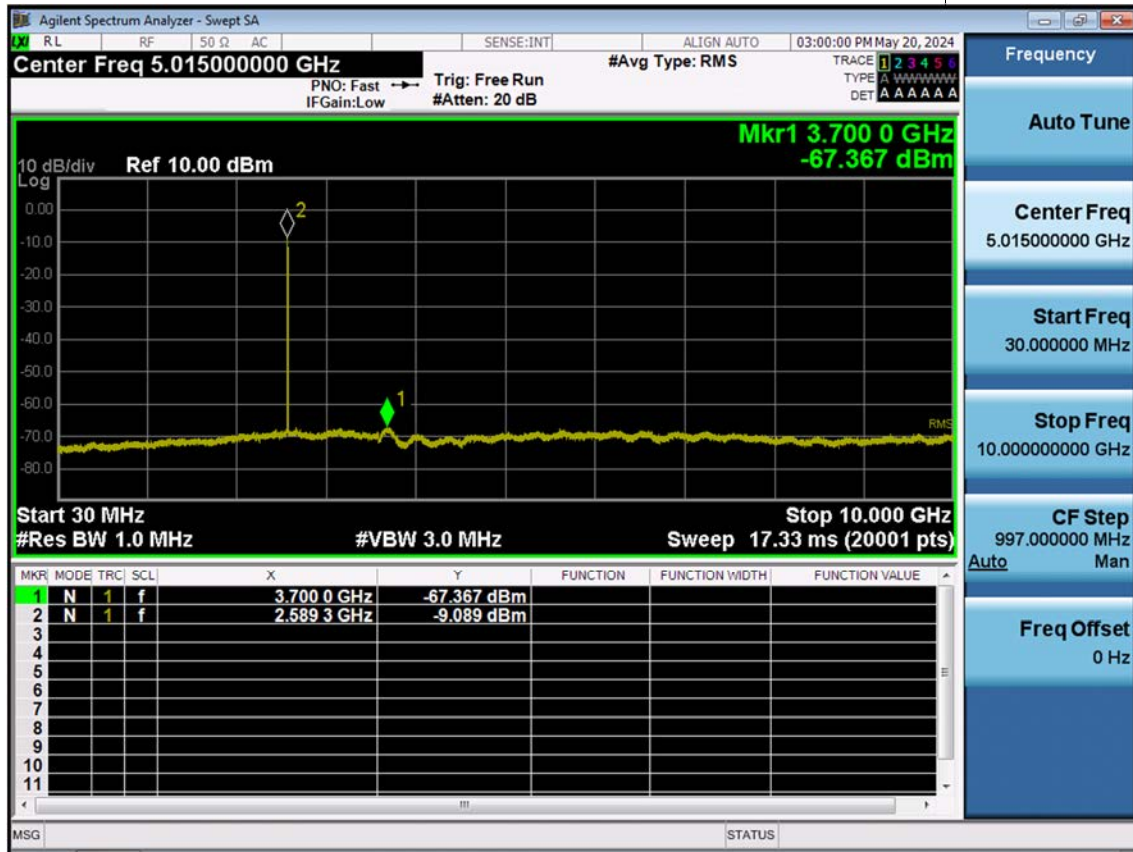


LTE B41/38_10 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

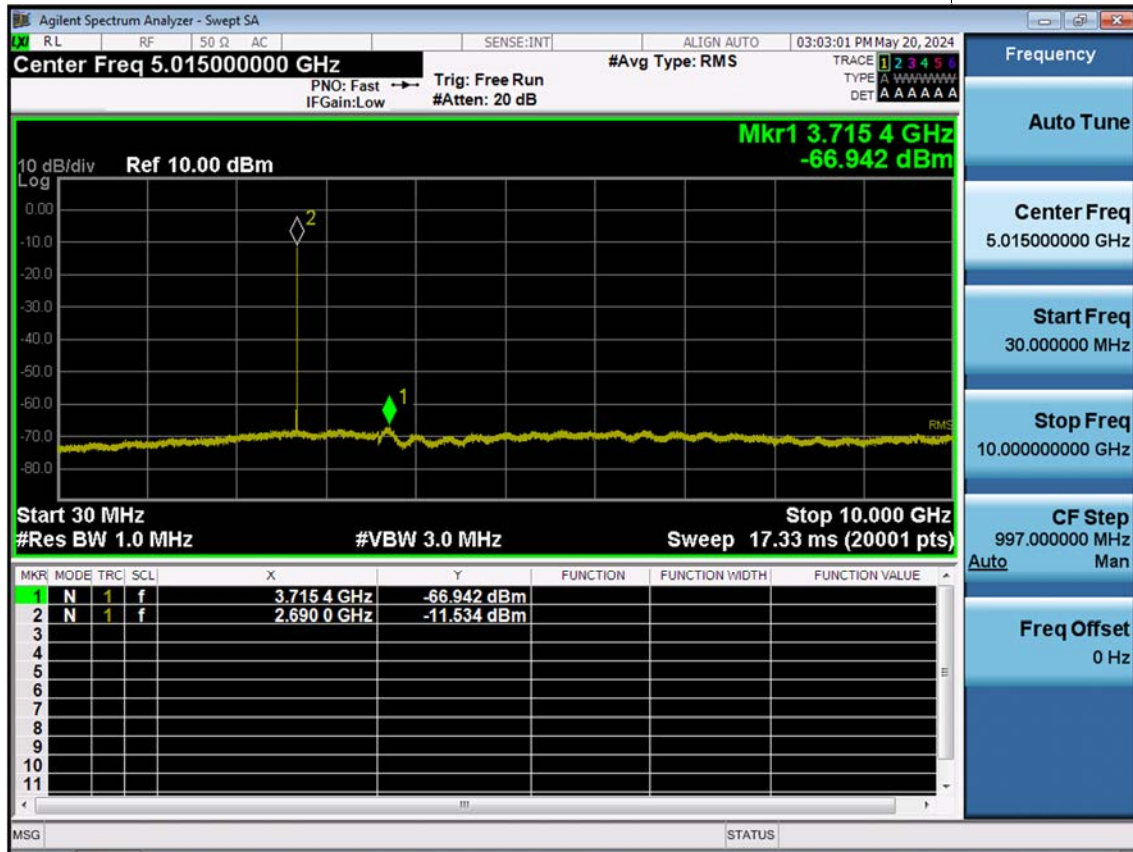


LTE B41/38_15 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

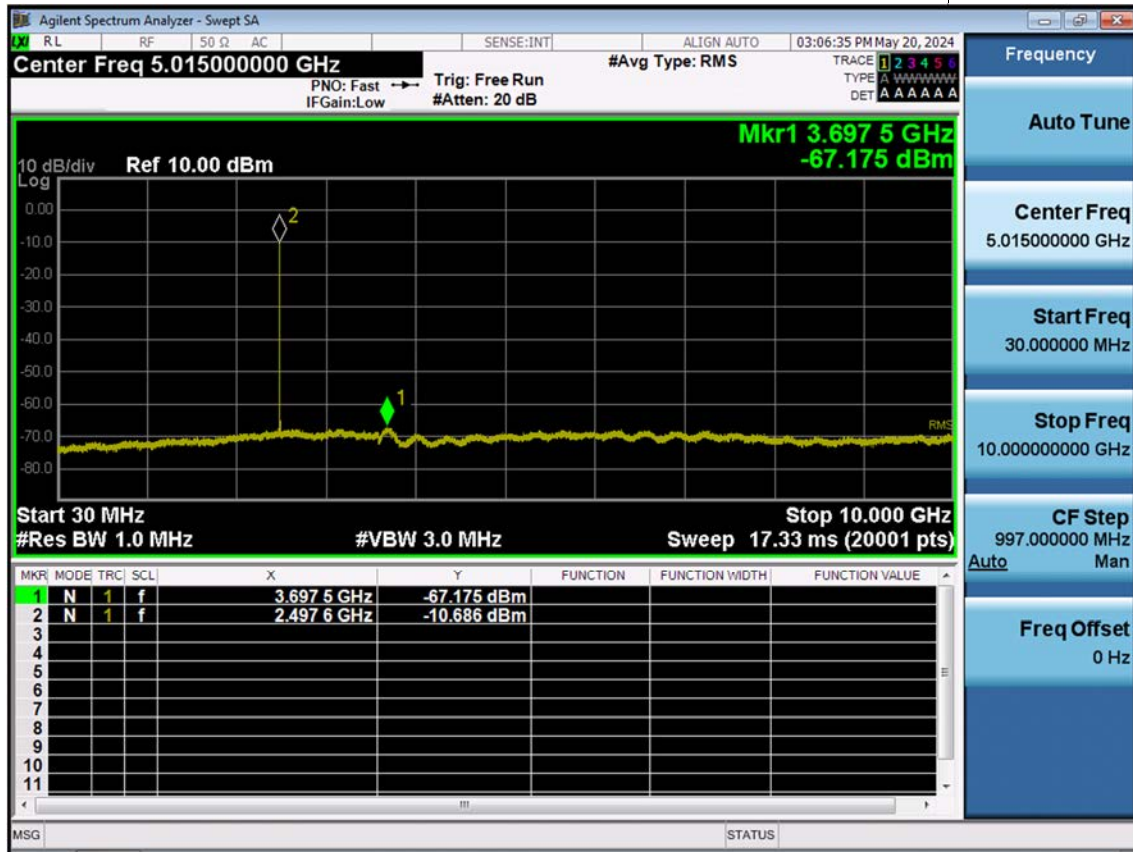


LTE B41/38_15 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

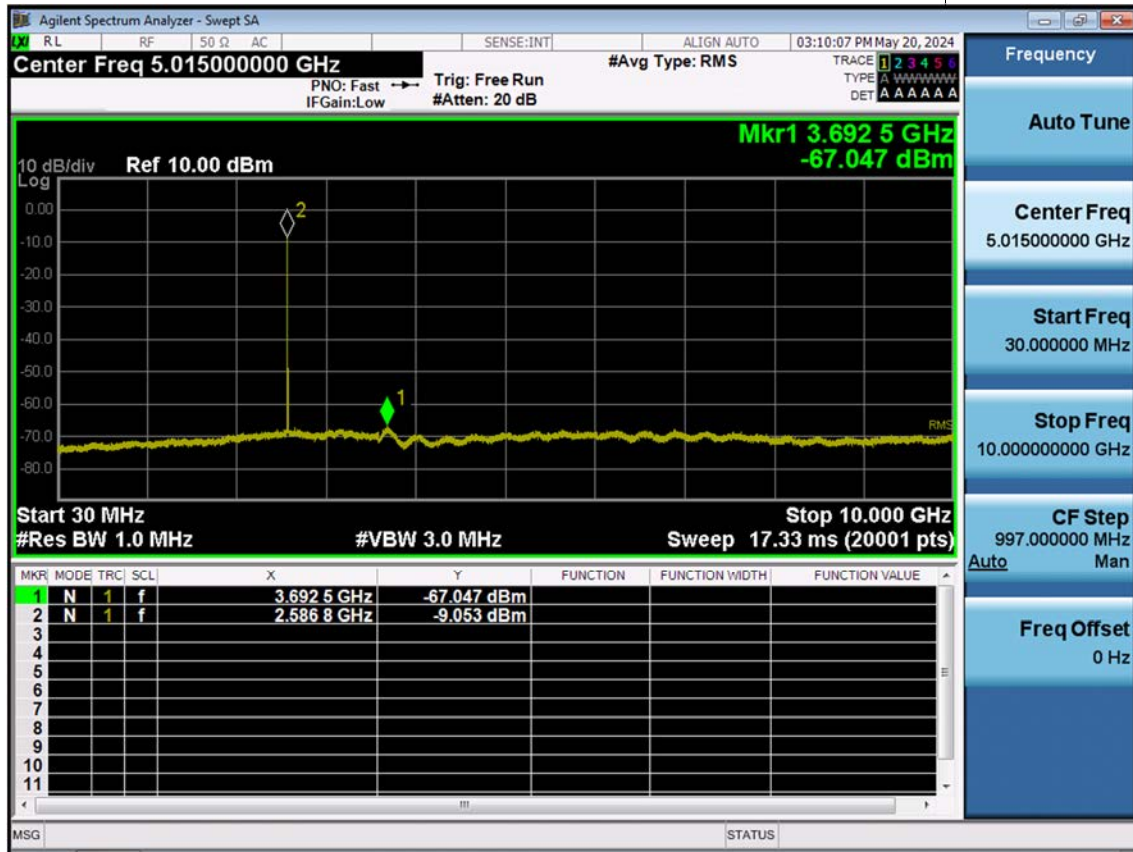


LTE B41/38_15 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

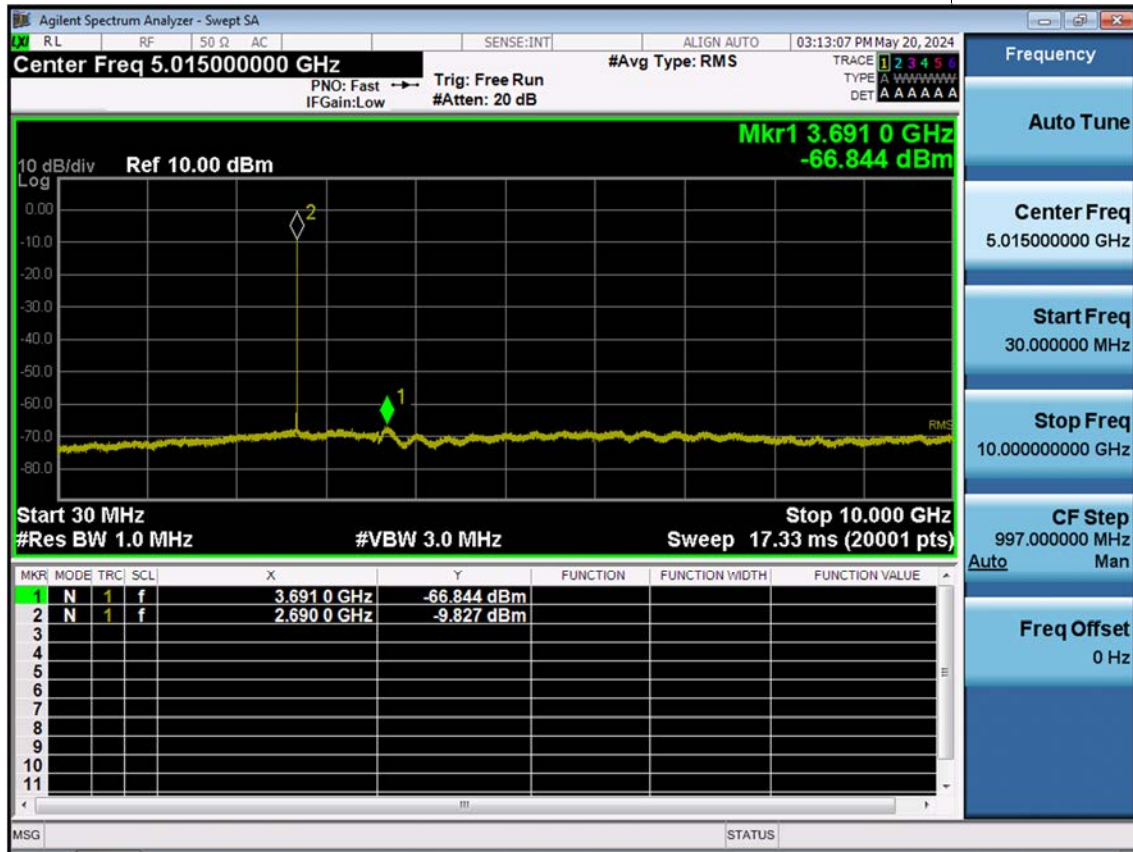


LTE B41/38_20 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

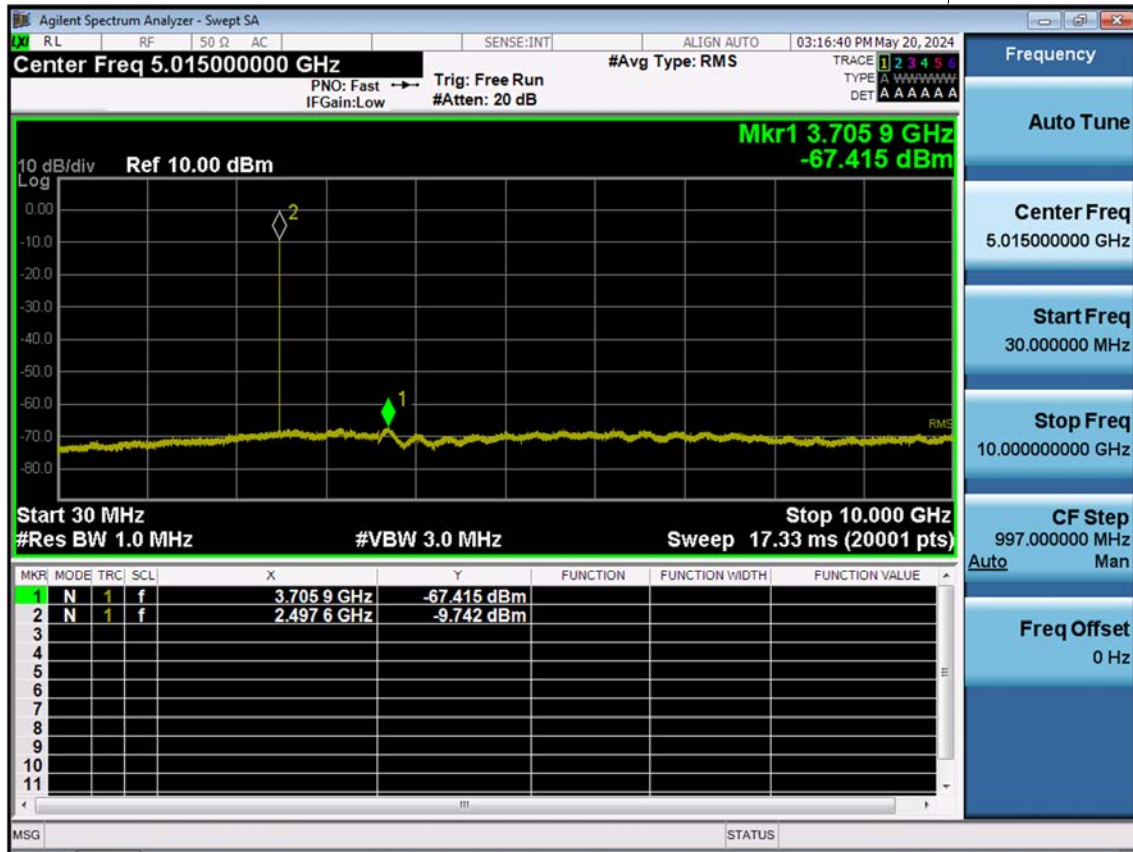

LTE B41/38_20 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

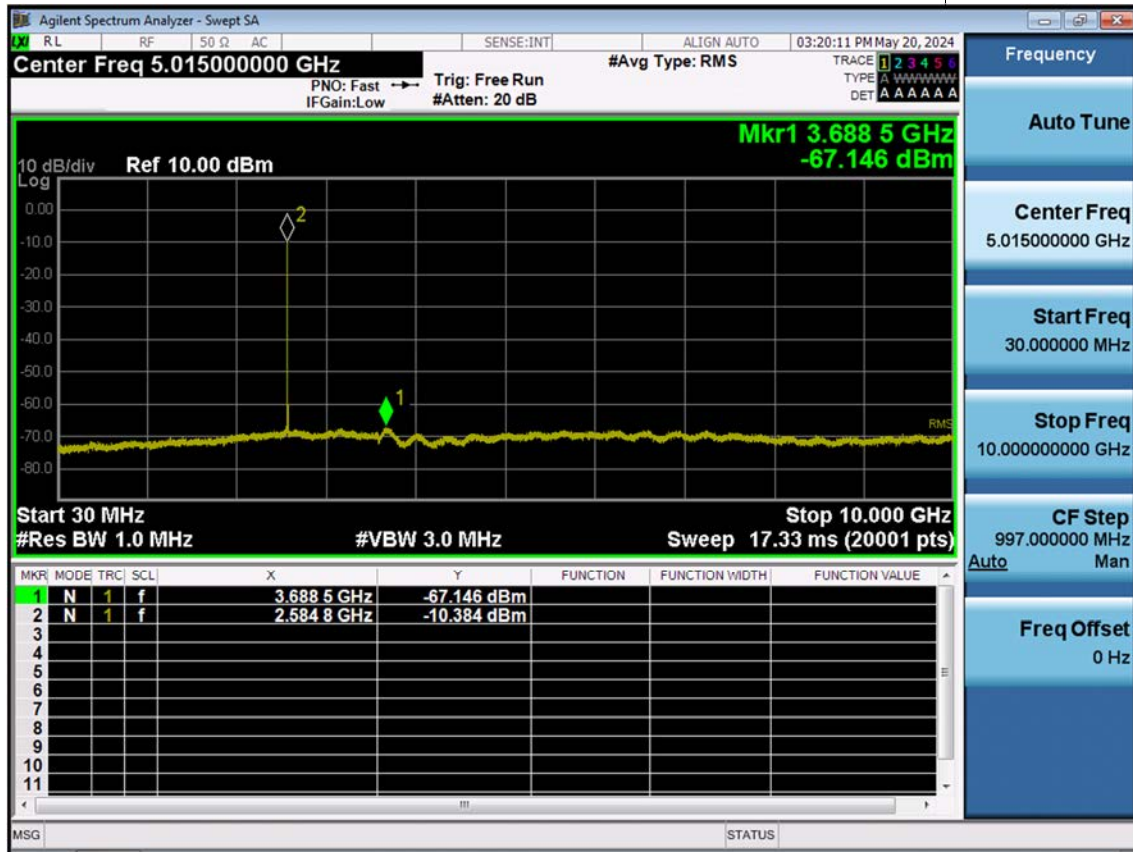

LTE B41/38_20 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

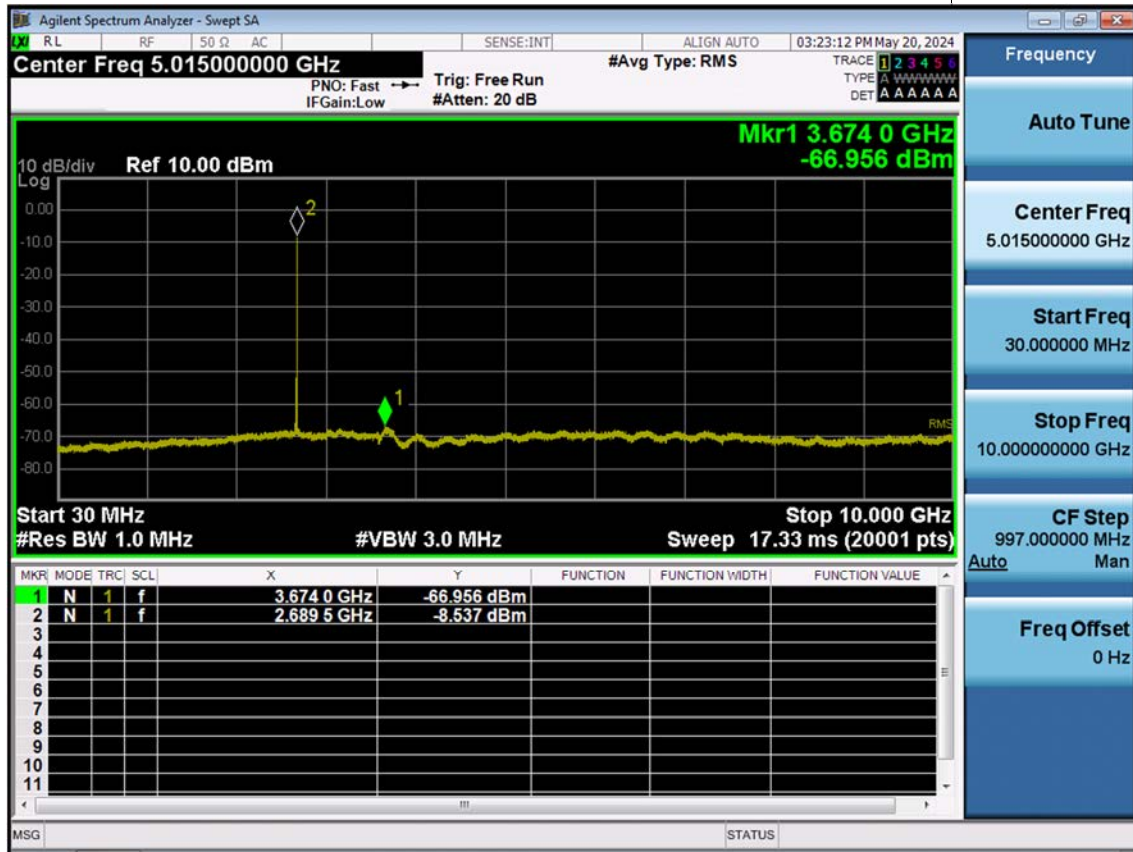

LTE B41/38_5 M_Conducted Spurious(Above10 G)_Low_QPSK_1RB



LTE B41/38_5 M_Conducted Spurious(Above10 G)_Mid_QPSK_1RB



LTE B41/38_5 M_Conducted Spurious(Above10 G)_High_QPSK_1RB



LTE B41/38_10 M_Conducted Spurious(Above10 G)_Low_QPSK_1RB



LTE B41/38_10 M_Conducted Spurious(Above10 G)_Mid_QPSK_1RB



LTE B41/38_10 M_Conducted Spurious(Above10 G)_High_QPSK_1RB

