

FCC TEST REPORT

Product Name: Car Charger

Trade Mark:

dealworthy™

heyday™



Model No.: CAC-33KL-2A

Add. Model No.: N/A

Report Number: 24042311017RFC-2

Test Standards: FCC 47 CFR Part 15 Subpart C

FCC ID: 2AO23-BTFMC01

Test Result: PASS

Date of Issue: June 19, 2024

Prepared for:

Chug, Inc.

7157 Shady Oak Rd, Eden Prairie MN 55344, United States

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:

David Chen

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu
Team Leader

Approved by:

Robben Chen

Robben Chen
Assistant Manager

Date:

June 19, 2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

Version

Version No.	Date	Description
V1.0	June 19, 2024	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	4
1.4 OTHER INFORMATION	4
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	5
1.7 TEST FACILITY	5
1.8 DEVIATION FROM STANDARDS	5
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	9
4.2 TEST CHANNELS	9
4.3 EUT TEST STATUS	9
4.4 TEST SETUP	10
4.4.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.4.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4.3 FOR CONDUCTED RF TEST SETUP	11
4.5 SYSTEM TEST CONFIGURATION	12
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
5.1 REFERENCE DOCUMENTS FOR TESTING	13
5.2 ANTENNA REQUIREMENT	13
5.3 20DB BANDWIDTH	14
5.4 RADIATED SPURIOUS EMISSIONS	17
5.5 CONDUCTED EMISSION	24
APPENDIX 1 PHOTOS OF TEST SETUP	25
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	25




1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Chug, Inc.
Address of Applicant:	7157 Shady Oak Rd, Eden Prairie MN 55344, United States
Manufacturer 1:	PYS VIETNAM TECHNOLOGY COMPANY LIMITED
Manufacturer 2:	PYS High-Tech Co., Ltd.
Address of Manufacturer 1:	CN-06, ThuanThanh II industrial zone, Mao Dien commune, ThuanThanh district, BacNinh, Vietnam
Address of Manufacturer 2:	1F~12F, Block 9, Lianhua Industrial Zone, Longhua, Shenzhen, Guangdong 518109 CHINA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Car Charger
Model No.:	CAC-33KL-2A
Add. Model No.:	N/A
Trade Mark:	  
DUT Stage:	Production Unit
EUT Supports Function: (Provided by the customer)	FM 88 MHz ~108 MHz
Sample Received Date:	April 22, 2024
Sample Tested Date:	May 11, 2024 to June 13, 2024

1.2.2 Description of Accessories

Cable	
Description:	USB Cable
Cable Type:	Unshielded without ferrite
Length:	0.2 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Nominal Operating Frequency:	88.1~107.9 MHz
Type of Modulation:	FM
Number of Channels:	199
Antenna Type:	External Antenna
Gain:	0 dBi
Normal Test Voltage:	DC 12V

1.4 OTHER INFORMATION

None

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Storage Battery	Camel	L2400 6-QW-60	3B22L3K1692A	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.20 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203	N/A	PASS
Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A ^{Note2}
Radiated Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.239	ANSI C63.10-2013	PASS
Occupied Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.239	ANSI C63.10-2013	Pass
Note: 1) N/A: In this whole report not applicable. 2) This EUT is powered by battery.			

3. EQUIPMENT LIST

Radiated Emission Test - 3M Chamber						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m Chamber & Accessory Equipment	ETS-Lindgren	3m	Euroshiedpn-C T001270-1317	11-Nov-2023	10-Nov-2026
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-Lindgren	3142E	00201566	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Pre-amplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Receiver	ROHDE & SCHWARZ	ESIB26	100114	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	1- Apr-2024	31-Mar-2025
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-Lindgren	00118385	00201874	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Multi device Controller	ETS-Lindgren	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	DC 12V	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Occupied Bandwidth	23.1	60.4	100.1	S202404223222-ZJA02/3	Hank Wu
Radiated Emissions	22.5	61.3	100.4	S202404223222-ZJA01/3	Fire Huo

4.2 TEST CHANNELS

Channel	Frequency(MHz)
0	88.1
1	88.2
...	...
99	98.1
100	98.2
...	...
197	107.8
198	107.9

4.3 EUT TEST STATUS

Frequency	Tx Function	Description
88.1 MHz~107.9 MHz	1Tx	1. Keep the EUT in continuously transmitting during the test.

4.4 TEST SETUP

4.4.1 For Radiated Emissions test setup

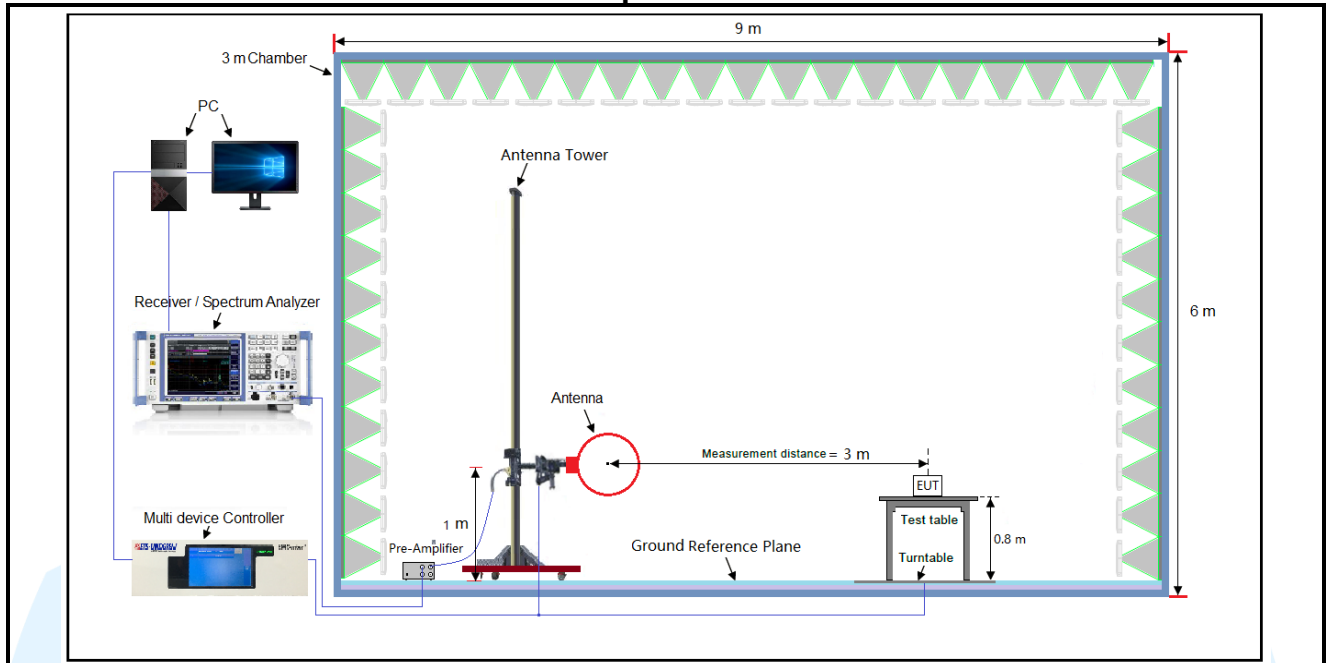


Figure 1. Below 30MHz



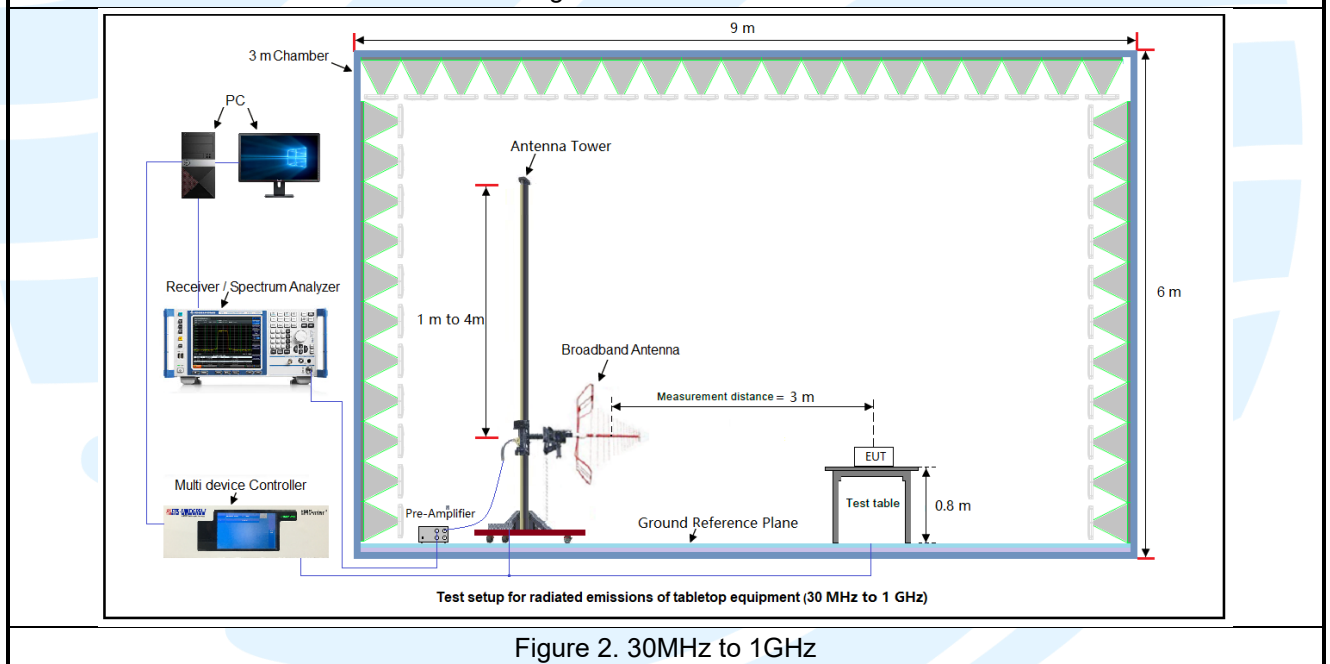


Figure 2. 30MHz to 1GHz

4.4.2 For Conducted Emissions test setup

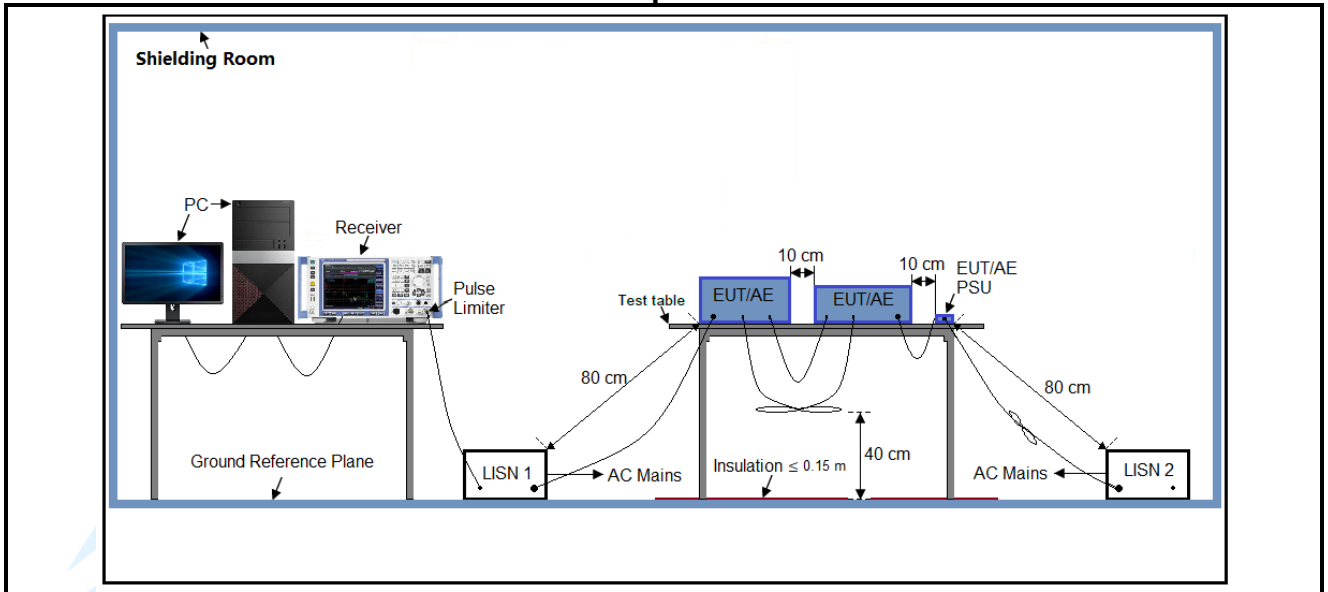

4.4.3 For Conducted RF test setup

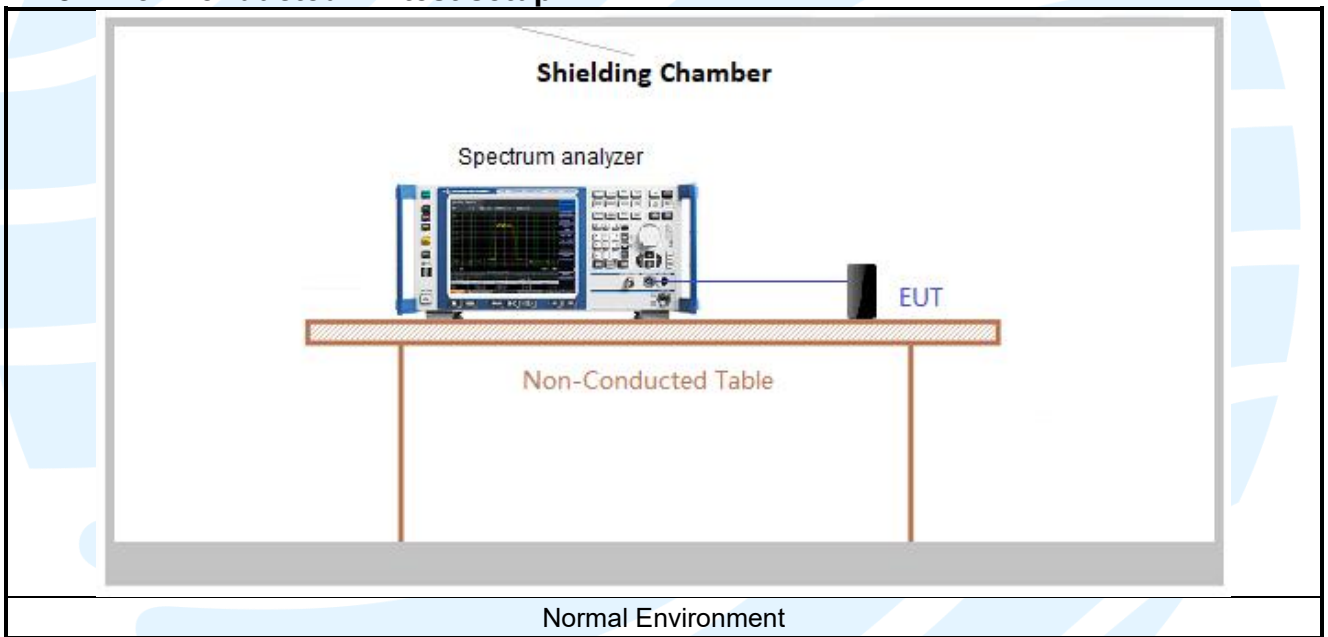

4.5 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a DC 12V battery. Only the worst case data were recorded in this test report.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices


5.2 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

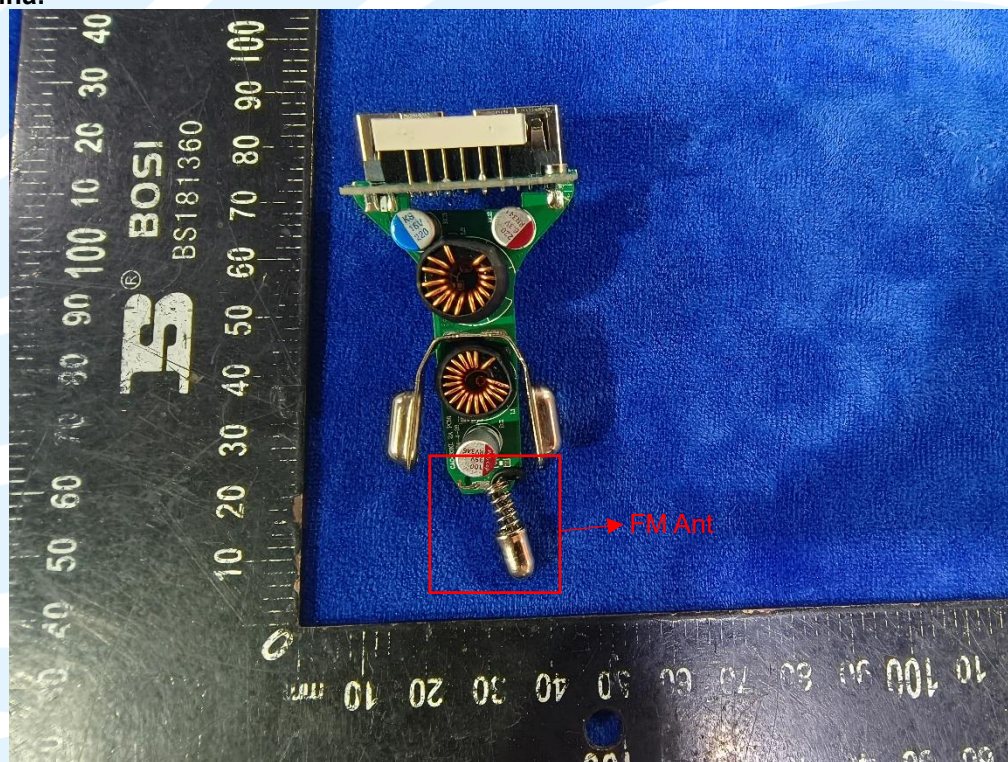

This product has a permanent antenna, fulfill the requirement of this section.

5.3 OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.239

Test Method: ANSI C63.10

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency
- b) Span = approximately 2 to 5 times the OBW
- c) RBW = 1% to 5% of the OBW
- d) VBW $\geq 3 \times$ RBW
- e) Sweep = auto;
- f) Detector function = peak
- g) Trace = max hold
- h) All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.

Instruments Used: Refer to section 3 for details


Test Mode: Transmitter mode

Test Results: Pass

Test Data:

Frequency (MHz)	20dB Bandwidth(KHz)	99% Bandwidth(KHz)	Limit(KHz)	Pass / Fail
88.1	50.82	46.054	200	Pass
98.1	50.99	46.243	200	Pass
107.9	51.33	47.025	200	Pass

The test plot as follows:

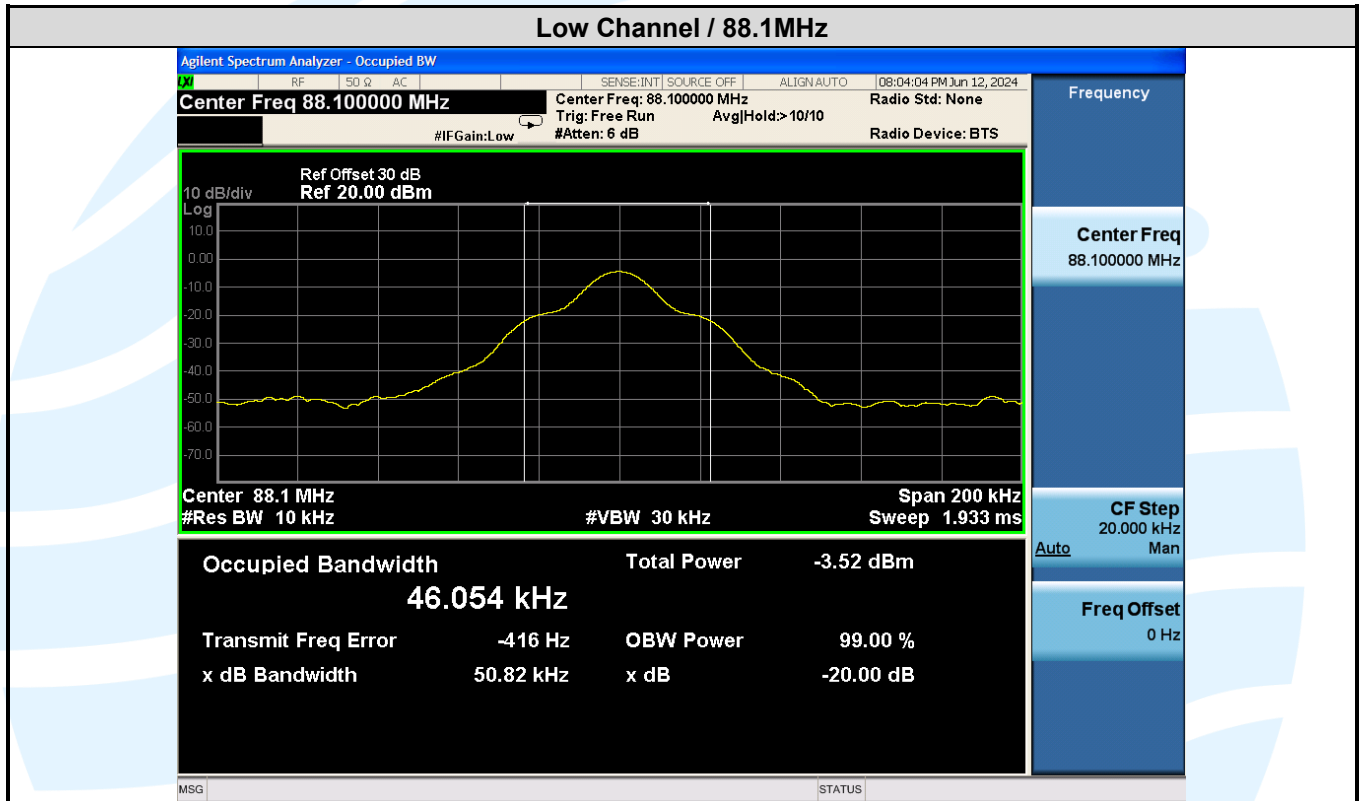

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

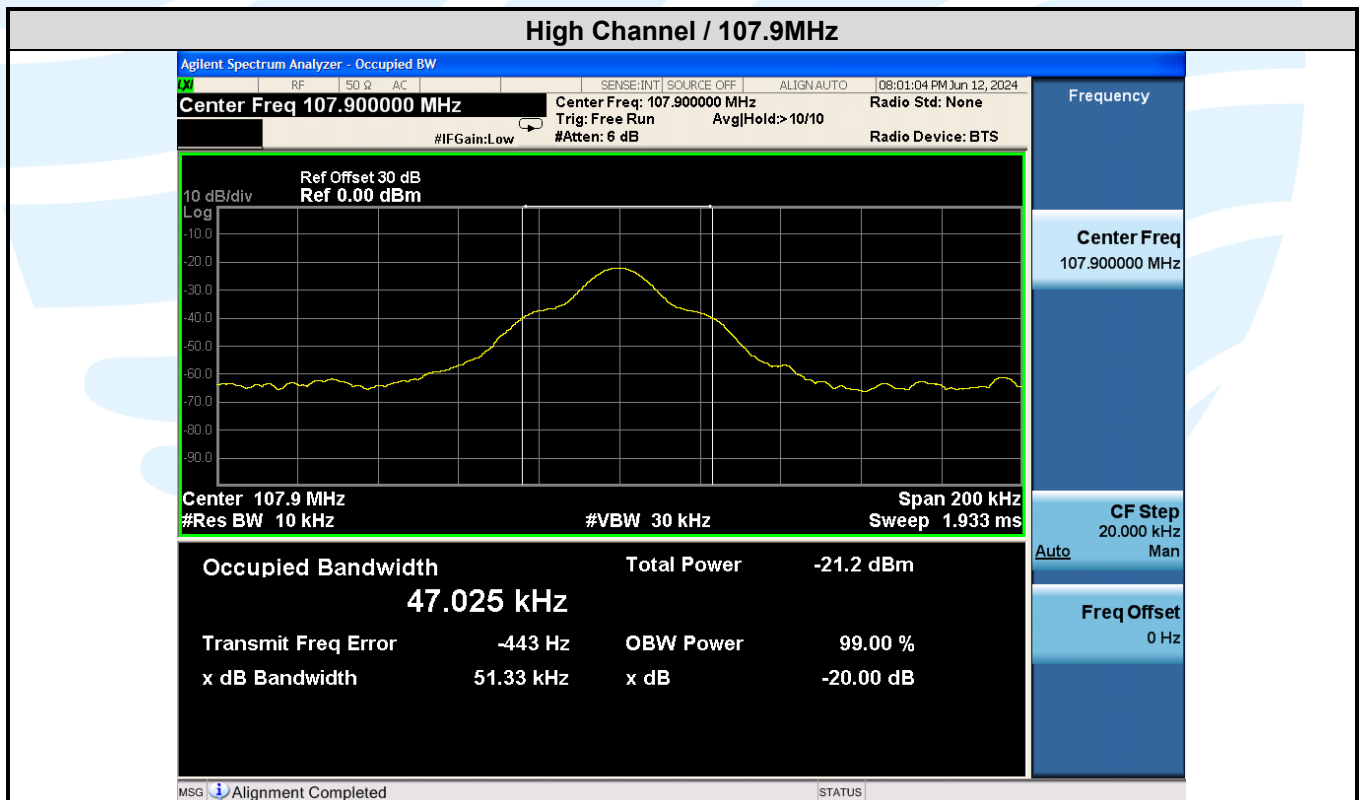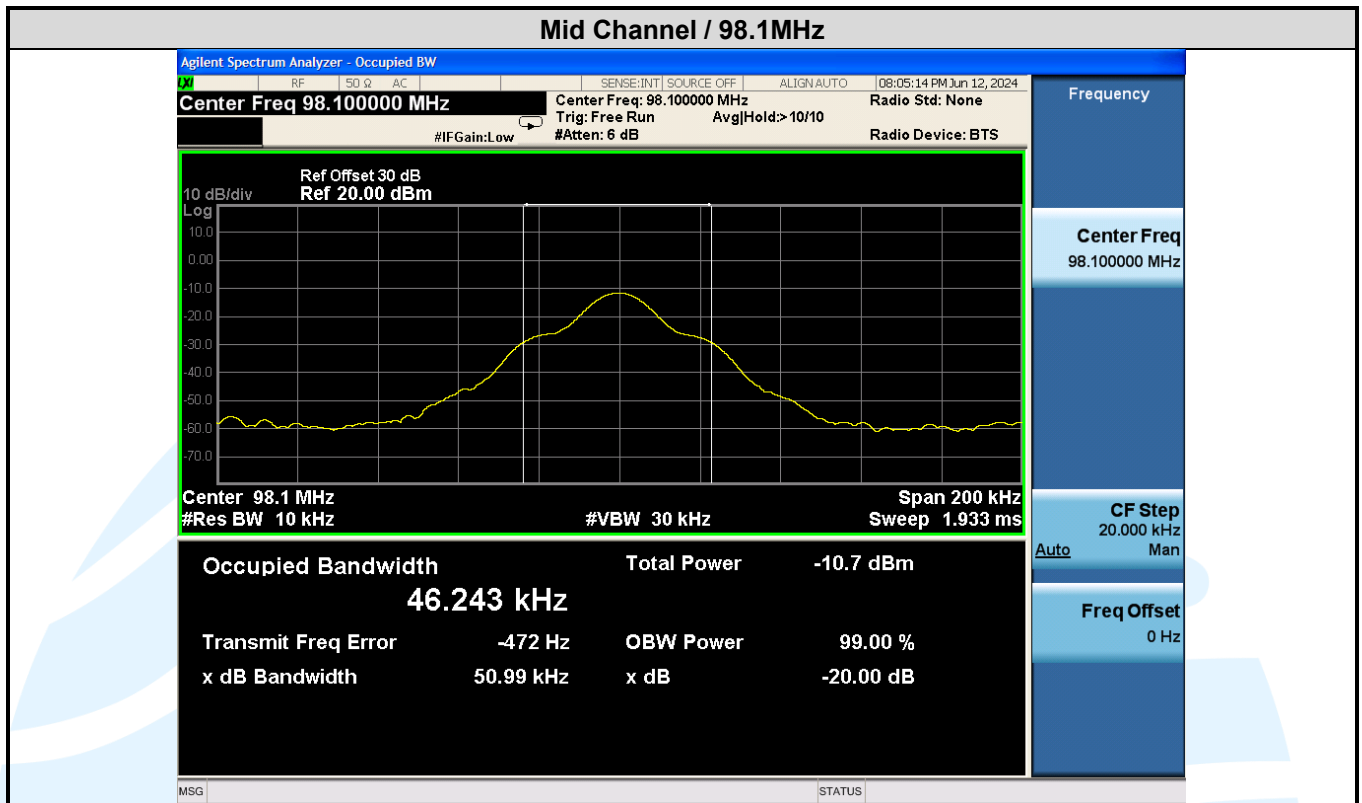

5.4 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.239

Test Method: ANSI C63.10-2013

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.
4. For Below 30MHz, the measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance). the measured field strength was extrapolated to distance 300 meters, using the formula that the limit of field strength varies as the inverse distance square (80dB per decade of distance)

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1


- 7) The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.(for portable and mobile devices)

Equipment Used: Refer to section 3 for details.


Test Result: Pass

Radiated Emission Test Data (30 MHz ~ 1 GHz):

Horizontal(88.1MHz)

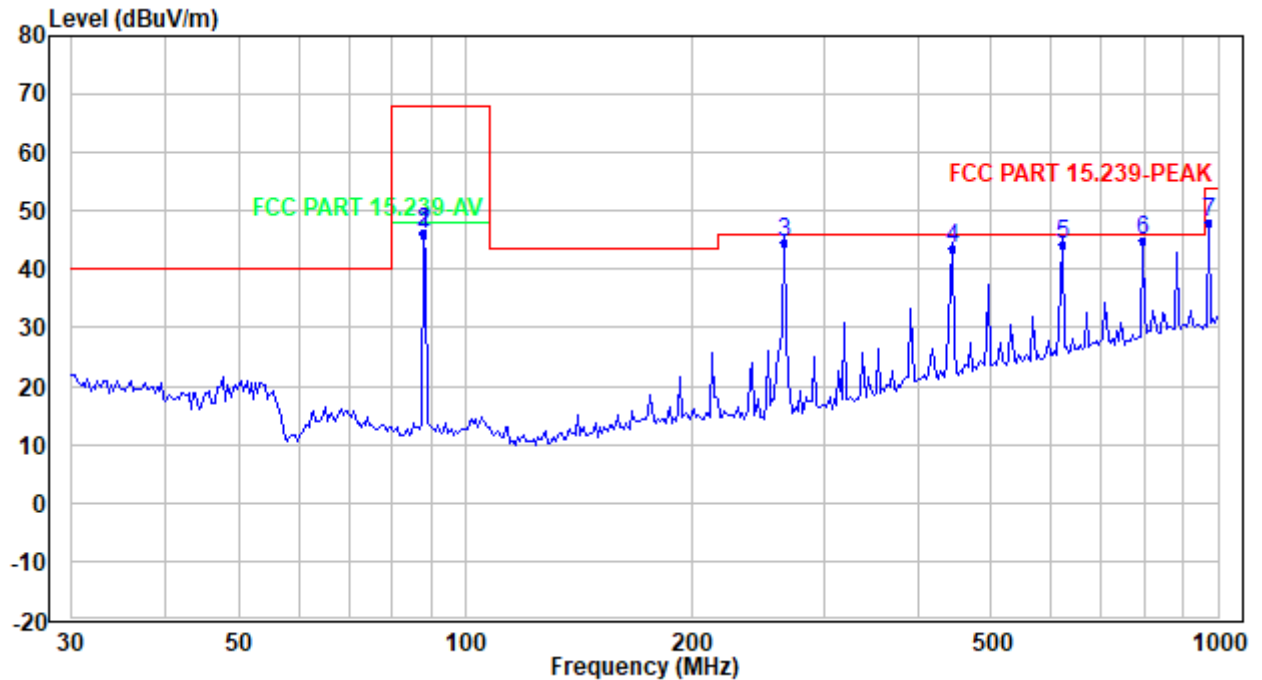

No.	Frequency (MHz)	Reading (dB μ V/m)	Correction factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1*	87.914	62.40	-16.34	46.06	48.00	-1.94	Average
2	87.914	62.59	-16.34	46.25	68.00	-21.75	Peak
3	264.971	54.71	-10.19	44.52	46.00	-1.48	QP
4	442.572	47.70	-3.99	43.71	46.00	-2.29	QP
5	620.117	44.63	-0.28	44.35	46.00	-1.65	QP
6	793.028	42.07	2.85	44.92	46.00	-1.08	QP
7	972.283	42.43	5.45	47.88	54.00	-6.12	QP

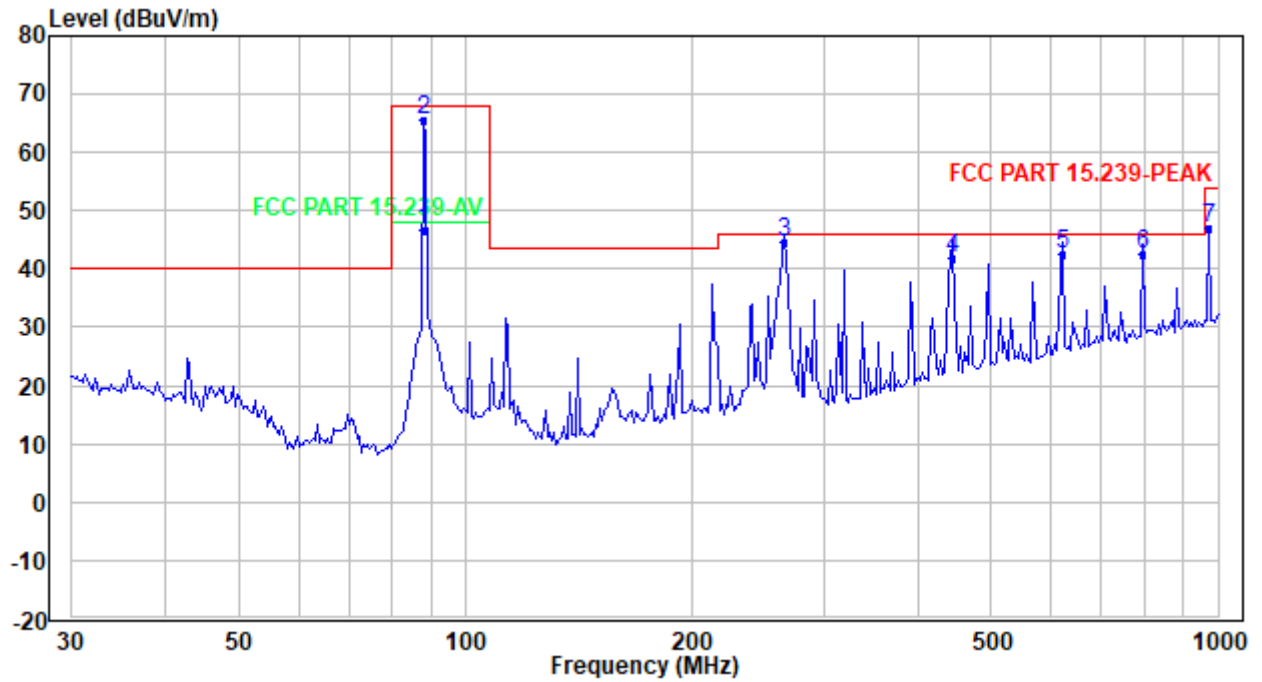Radiated Emission Test Data (30 MHz ~ 1 GHz):
Vertical(88.1MHz)


No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1*	87.914	62.96	-16.34	46.62	48.00	-1.38	Average
2	87.914	81.78	-16.34	65.44	68.00	-2.56	Peak
3	264.971	54.75	-10.19	44.56	46.00	-1.44	QP
4	442.572	46.01	-3.99	42.02	46.00	-3.98	QP
5	620.117	42.92	-0.28	42.64	46.00	-3.36	QP
6	793.028	39.55	2.85	42.40	46.00	-3.60	QP
7	972.283	41.41	5.45	46.86	54.00	-7.14	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

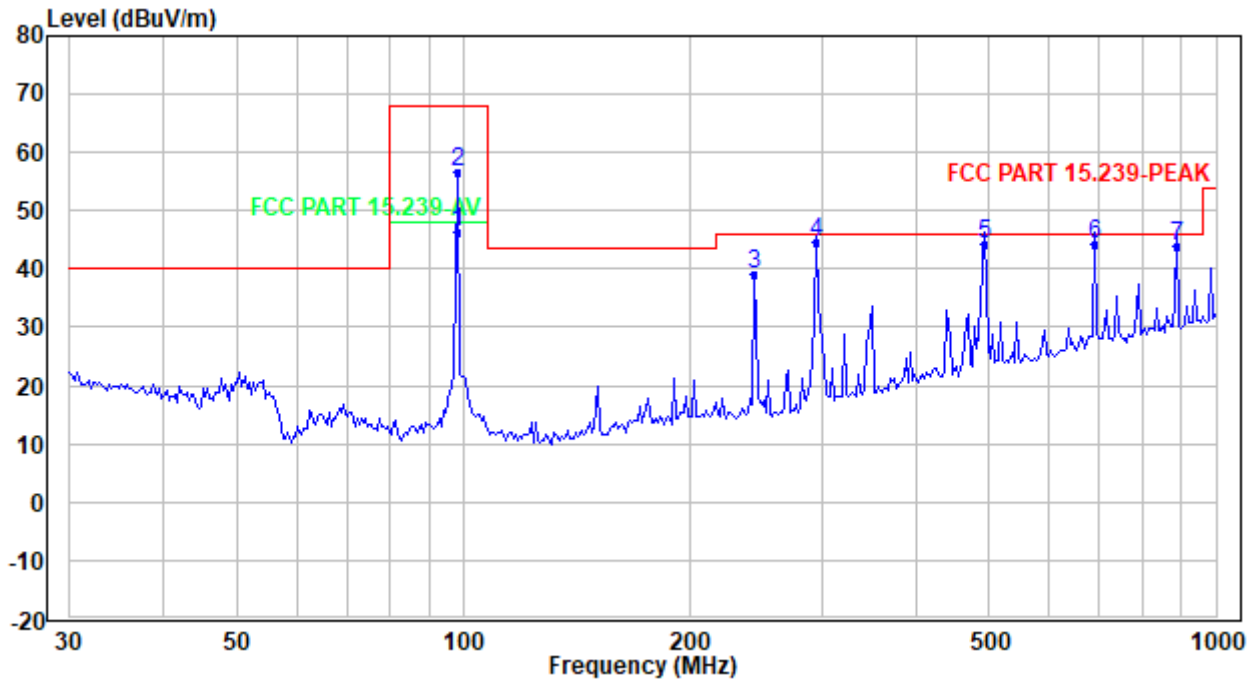Radiated Emission Test Data (30 MHz ~ 1 GHz):
Horizontal(98.1MHz)


No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1*	98.375	62.61	-16.12	46.49	48.00	-1.51	Average
2	98.375	72.61	-16.12	56.49	68.00	-11.51	Peak
3	243.543	49.58	-10.61	38.97	46.00	-7.03	QP
4	294.426	53.75	-9.16	44.59	46.00	-1.41	QP
5	491.770	47.12	-2.88	44.24	46.00	-1.76	QP
6	689.051	42.71	1.45	44.16	46.00	-1.84	QP
7	887.398	39.29	4.58	43.87	46.00	-2.13	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

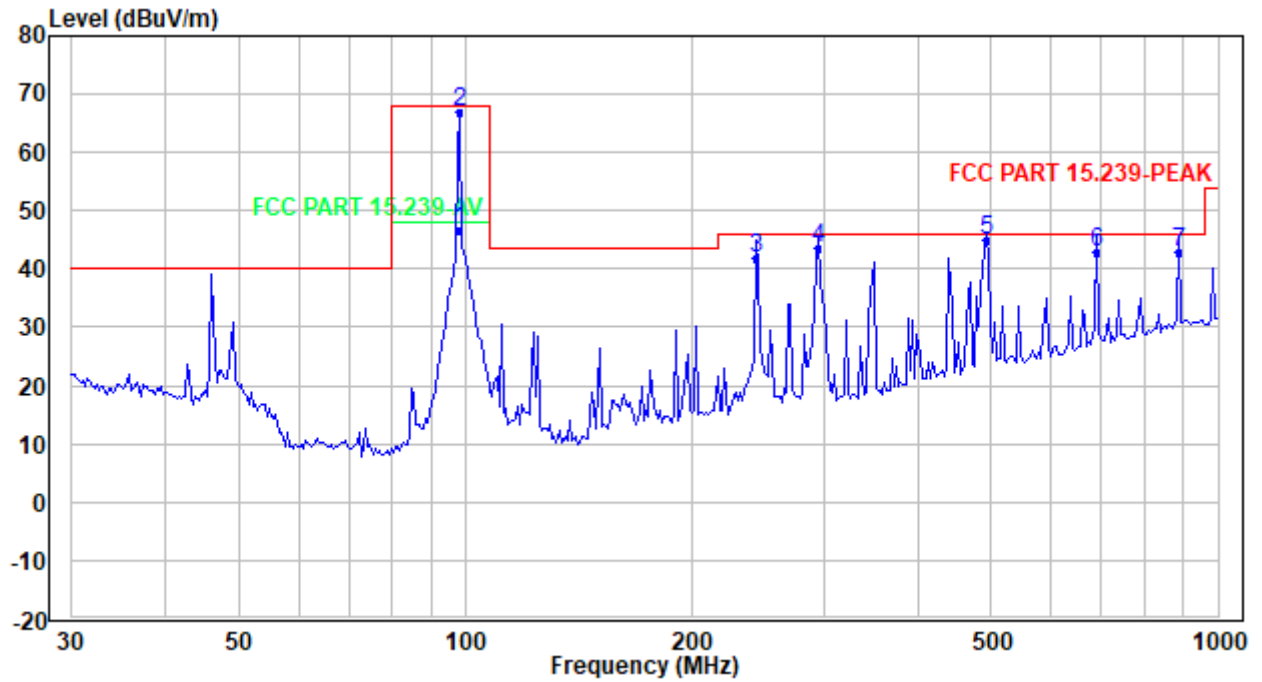Radiated Emission Test Data (30 MHz ~ 1 GHz):
Vertical(98.1MHz)


No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1*	98.375	62.89	-16.12	46.77	48.00	-1.23	Average
2	98.375	82.89	-16.12	66.77	68.00	-1.23	Peak
3	243.543	52.49	-10.61	41.88	46.00	-4.12	QP
4	294.426	52.86	-9.16	43.70	46.00	-2.30	QP
5	491.770	47.75	-2.88	44.87	46.00	-1.13	QP
6	689.051	41.50	1.45	42.95	46.00	-3.05	QP
7	887.398	38.19	4.58	42.77	46.00	-3.23	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

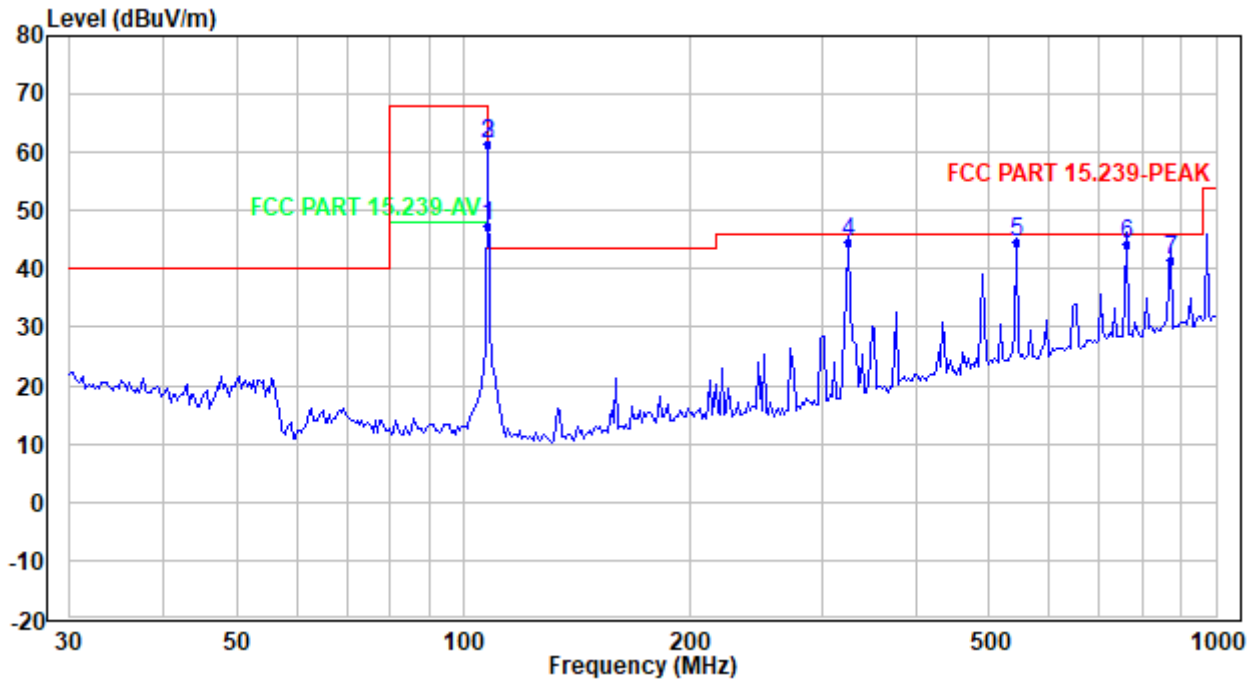Radiated Emission Test Data (30 MHz ~ 1 GHz):**Horizontal(107.9MHz)**

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1*	107.785	62.66	-15.23	47.43	48.00	-0.57	Average
2	107.785	76.66	-15.23	61.43	68.00	-6.57	QP
3	107.785	76.66	-15.23	61.43	68.00	-6.57	QP
4	324.865	52.53	-7.92	44.61	46.00	-1.39	QP
5	542.610	46.12	-1.66	44.46	46.00	-1.54	QP
6	760.287	42.15	2.04	44.19	46.00	-1.81	QP
7	868.886	37.45	4.21	41.66	46.00	-4.34	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.231-V1.1

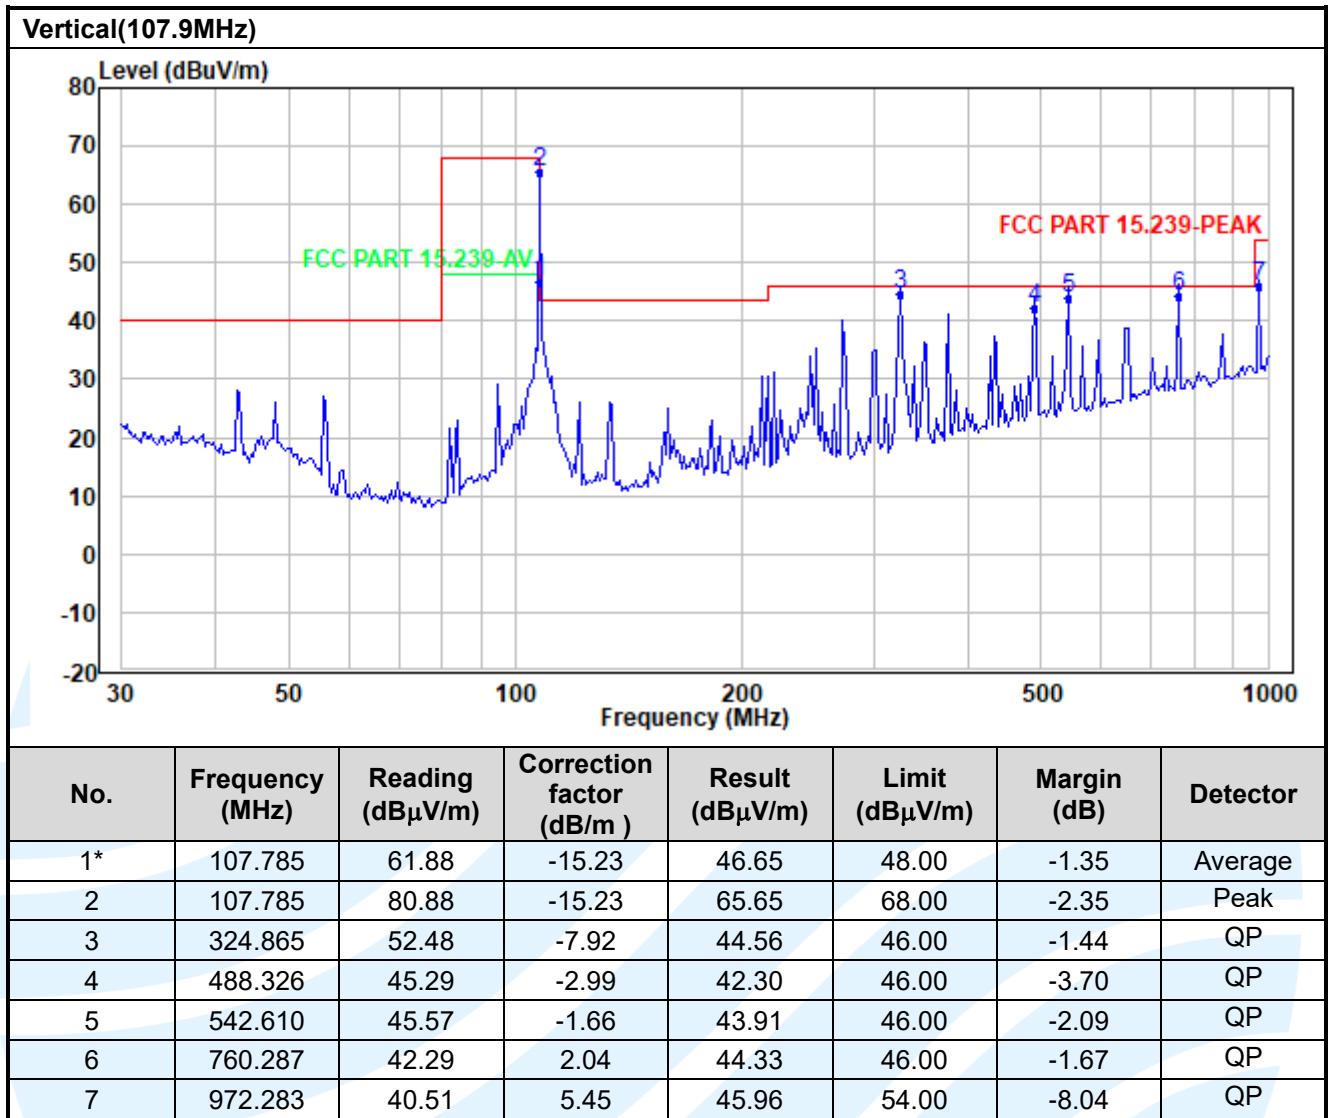

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.5 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.207

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.4.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.

Test Result: N/A

The EUT is powered by battery.

APPENDIX 1 PHOTOS OF TEST SETUP

Refer to Appendix 1 for test setup.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
