

CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

**Kasa Smart Wi-Fi Light Bulb, Multicolor
Tapo Smart Wi-Fi Light Bulb, Multicolor**

MODEL NUMBER: KL125, Tapo L530E

REPORT NUMBER: 4790769271-1-RF-1

ISSUE DATE: March 29, 2023

FCC ID: 2AXJ4KL125V4

Prepared for

TP-Link Corporation Limited

**Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui,
Kowloon, Hong Kong**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	March 29, 2023	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Accuracy Method> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	9
5.3. MAXIMUM EIRP	9
5.4. TEST CHANNEL CONFIGURATION	9
5.5. THE WORSE CASE POWER SETTING PARAMETER	10
5.6. WORST-CASE CONFIGURATIONS	10
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.8. SUPPORT UNITS FOR SYSTEM TEST	11
6. MEASURING EQUIPMENT AND SOFTWARE USED	12
7. ANTENNA PORT TEST RESULTS	15
7.1. CONDUCTED OUTPUT POWER	15
7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	16
7.3. POWER SPECTRAL DENSITY	18
7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	20
7.5. DUTY CYCLE	22
8. RADIATED TEST RESULTS	23
8.1. RESTRICTED BANDEDGE	31
8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)	42
8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)	48
8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	66
8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	69
8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	71
9. ANTENNA REQUIREMENT	73
10. AC POWER LINE CONDUCTED EMISSION	74
11. TEST DATA	77

11.1.	<i>APPENDIX A: DTS BANDWIDTH</i>	77
11.1.1.	Test Result	77
11.1.2.	Test Graphs	78
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH</i>	83
11.2.1.	Test Result	83
11.2.2.	Test Graphs	84
11.3.	<i>APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER</i>	89
11.3.1.	Test Result	89
11.4.	<i>APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY</i>	90
11.4.1.	Test Result	90
11.4.2.	Test Graphs	91
11.5.	<i>APPENDIX E: BAND EDGE MEASUREMENTS</i>	96
11.5.1.	Test Result	96
11.5.2.	Test Graphs	97
11.6.	<i>APPENDIX F: CONDUCTED SPURIOUS EMISSION</i>	101
11.6.1.	Test Result	101
11.6.2.	Test Graphs	102
11.7.	<i>APPENDIX G: DUTY CYCLE</i>	117
11.7.1.	Test Result	117
11.7.2.	Test Graphs	118

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: TP-Link Corporation Limited
Address: Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong

Manufacturer Information


Company Name: TP-Link Corporation Limited
Address: Room 901, 9/F. , New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hong Kong

EUT Information

EUT Name: Kasa Smart Wi-Fi Light Bulb, Multicolor
Tapo Smart Wi-Fi Light Bulb, Multicolor
Model: KL125, Tapo L530E
Brand: tp-link
Sample Received Date: March 14, 2023
Sample Status: Normal
Sample ID: 5882865
Date of Tested: March 14, 2023 to March 29, 2023


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Kebo Zhang
Senior Project Engineer

Checked By:



Denny Huang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C , KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Kasa Smart Wi-Fi Light Bulb, Multicolor Tapo Smart Wi-Fi Light Bulb, Multicolor
Model	KL125
Series Model	Tapo L530E (Tapo Smart Wi-Fi Light Bulb, Multicolor)
Model Difference	They are all the same. Expect the product name and model number. We choose Model KL125(Kasa Smart Wi-Fi Light Bulb, Multicolor) to test.

Frequency Range:	2412 MHz to 2462 MHz
Radio Technology:	IEEE802.11b/g/n HT20
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK)
Normal Test Voltage:	AC 120 V, 60 Hz

5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

5.3. MAXIMUM EIRP

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)	Maximum AVG EIRP (dBm)
b	2412 ~ 2462	1-11[11]	19.09	15.79
g	2412 ~ 2462	1-11[11]	18.23	14.93
n HT20	2412 ~ 2462	1-11[11]	18.26	14.96

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency(MHz)
802.11b	CH 1, CH2 CH 6,CH10, CH 11	2412, 2417, 2437, 2457, 2462
802.11g	CH 1, CH2 CH 6,CH10, CH 11	2412, 2417, 2437, 2457, 2462
802.11n HT20	CH 1, CH2 CH 6,CH10, CH 11	2412, 2417, 2437, 2457, 2462

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band											
Test Software		UI_mptool									
Modulation Mode	Transmit Antenna Number	Test Software Setting Value									
		NCB: 20MHz					NCB: 40MHz				
		CH1	CH2	CH6	CH10	CH11	CH3	CH4	CH6	CH8	CH9
802.11b	1	95	95	95	95	95	NA				
802.11g	1	105	105	105	105	105					
802.11n HT20	1	105	105	105	105	105					

5.6. WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2462	Monopole Antenna	-3.3

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	<input checked="" type="checkbox"/> TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	<input checked="" type="checkbox"/> TX, 1RX	ANT 1 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	PC	Lenovo	E42-80	/
2	UART	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

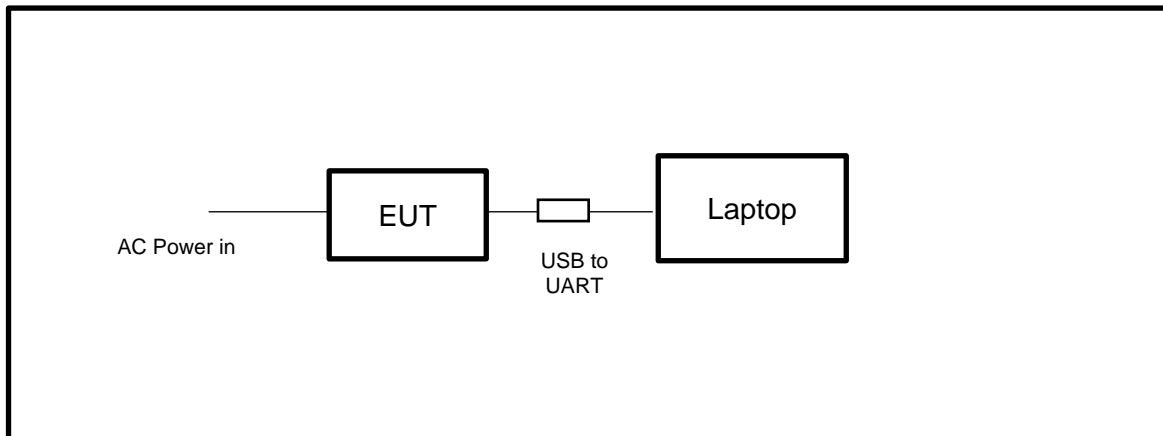

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Apr.02,2022	Apr.01,2023
Vector Signal Generator	R&S	SMBV100A	261637	Oct.17, 2022	Oct.16, 2023
Signal Generator	R&S	SMB100A	178553	Oct.17, 2022	Oct.16, 2023
Signal Analyzer	R&S	FSV40	101118	Oct.17, 2022	Oct.16, 2023
Software					
Description	Manufacturer		Name		Version
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.17, 2022	Oct.16, 2023
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.28, 2022	Sep.27, 2023
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.17, 2022	Oct.16, 2023
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.17, 2022	Oct.16, 2023
DC power supply	Keysight	E3642A	MY55159130	Oct.17, 2022	Oct.16, 2023
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.17, 2022	Oct.16, 2023
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		2.6.77.0518	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.17, 2022	Oct.16, 2023
Two-Line V-Network	R&S	ENV216	101983	Oct.17, 2022	Oct.16, 2023
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.17, 2022	Oct.16, 2023
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.17, 2022	Oct.16, 2023
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.17, 2022	Oct.16, 2023
EMI Measurement Receiver	R&S	ESR26	101377	Oct.17, 2022	Oct.16, 2023
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.17, 2022	Oct.16, 2023
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.17, 2022	Oct.16, 2023
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.17, 2022	Oct.16, 2023
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.17, 2022	Oct.16, 2023
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01202035	Oct.17, 2022	Oct.16, 2023
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	/	/
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	/	/
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	/	/
Band Reject Filter	Wainwright	WRCJV20-5120-5150-	2	/	/

		5350-5380-60SS			
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	/	/
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	/	/
Band Reject Filter	Wainwright	WRCD5-1879-1879.85-1880.15-1881-40SS	1	/	/
Notch Filter	Wainwright	WHJ10-882-980-7000-40SS	1	/	/
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.22, 2022	Oct.21, 2023
Barometer	Yiyi	Baro	N/A	Oct.24, 2022	Oct.23, 2023
Attenuator	Agilent	8495B	2814a12853	Oct.18, 2022	Oct.17, 2023

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	March 29, 2023	Test By	Johnson Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

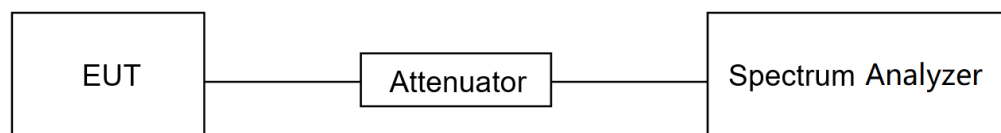

TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	March 29, 2023	Test By	Johnson Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{OBW bandwidth}$
Trace	Average
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

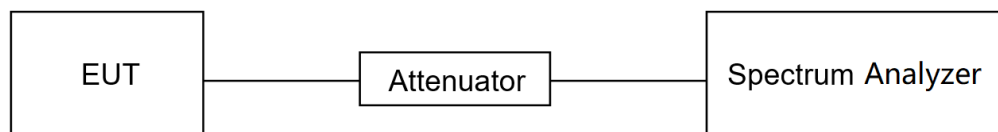

TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	March 29, 2023	Test By	Johnson Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

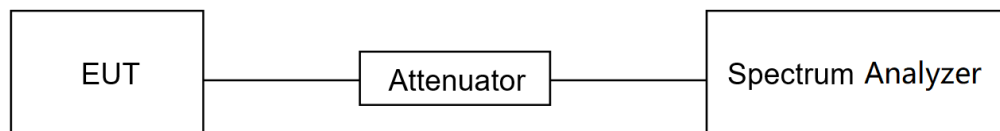TEST SETUP**TEST ENVIRONMENT**

Temperature	25.3°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	March 29, 2023	Test By	Johnson Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E&F

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

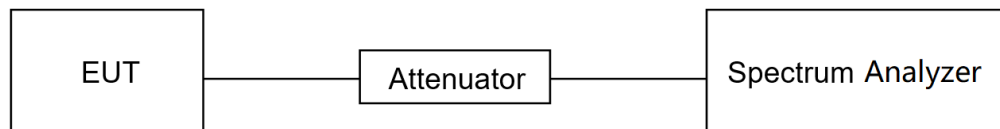

TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	March 29, 2023	Test By	Johnson Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made

to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1G


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

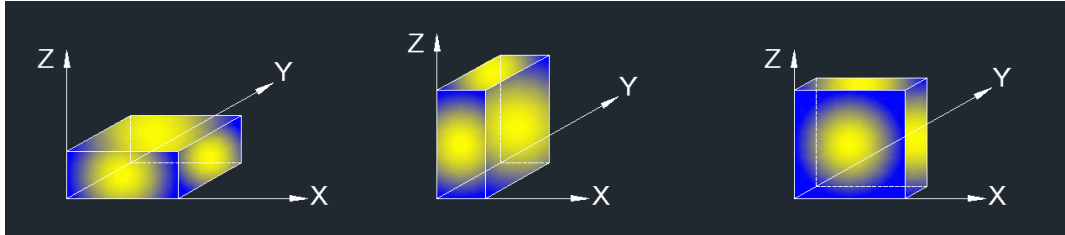

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Band edge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Horizontal and Vertical have been tested, only the worst data was recorded in the report.
8. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 1GHz-3GHz:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the Peak values are less than the Average limit of 54 dBuV/m, the Average result is deemed to comply with Average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 3GHz-18GHz:

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the Peak values are less than the Average limit of 54 dBuV/m, the Average result is deemed to comply with Average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 9kHz-30MHz:

Note:

1. Measurement = Reading Level + Correct Factor.
(dBuA/m = dBuV/m - $20\log_{10}[120\pi]$ = dBuV/m - 51.5).
2. If the Peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 18GHz-26GHz:

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the Peak values are less than the Average limit of 54 dBuV/m, the Average result is deemed to comply with Average limit.
3. Peak: Peak detector.
4. All modes and channels have been tested, only the worst data was recorded in the report.

For Radiate Spurious emission 30MHz-1GHz:


Note:

1. Result Level = Read Level + Correct Factor.
2. If the Peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
4. All modes and channels have been tested, only the worst data was recorded in the report.


TEST SETUP

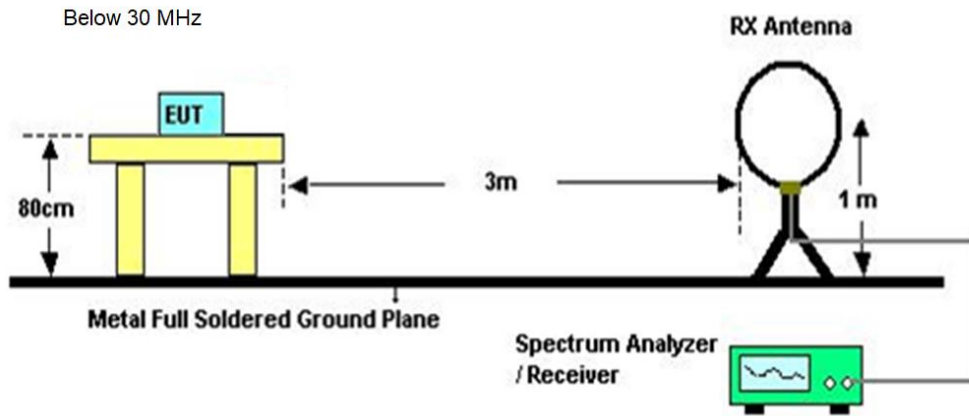

Below 1 GHz and above 30 MHz

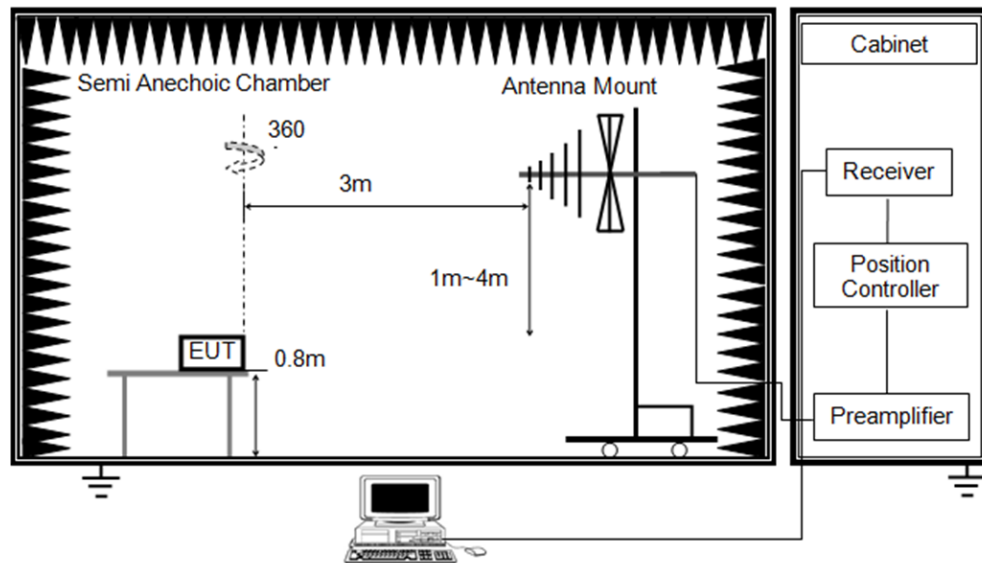

Above 1 GHz

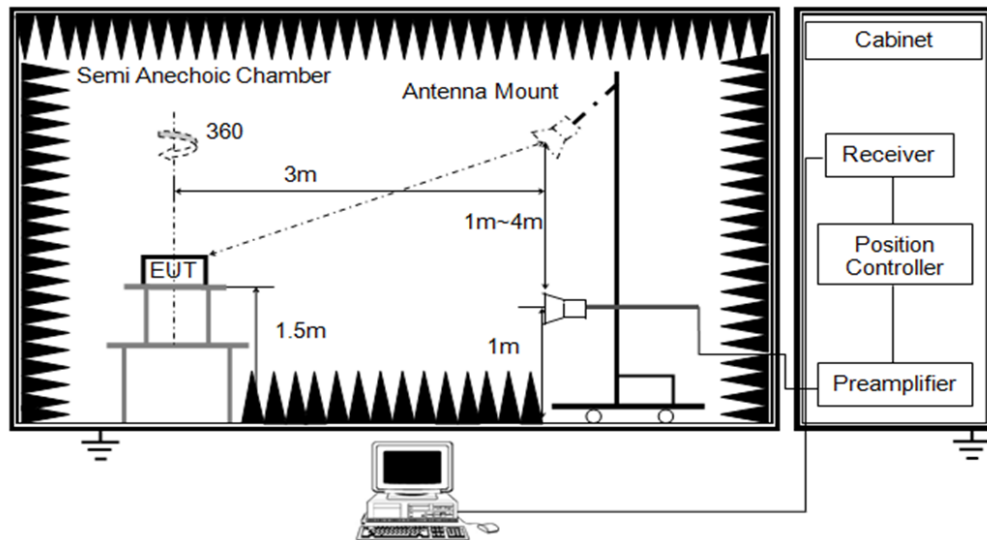

TEST ENVIRONMENT

Temperature	25.3°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz


TEST DATE / ENGINEER

Test Date	March 28, 2023	Test By	Rex Huang
-----------	----------------	---------	-----------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

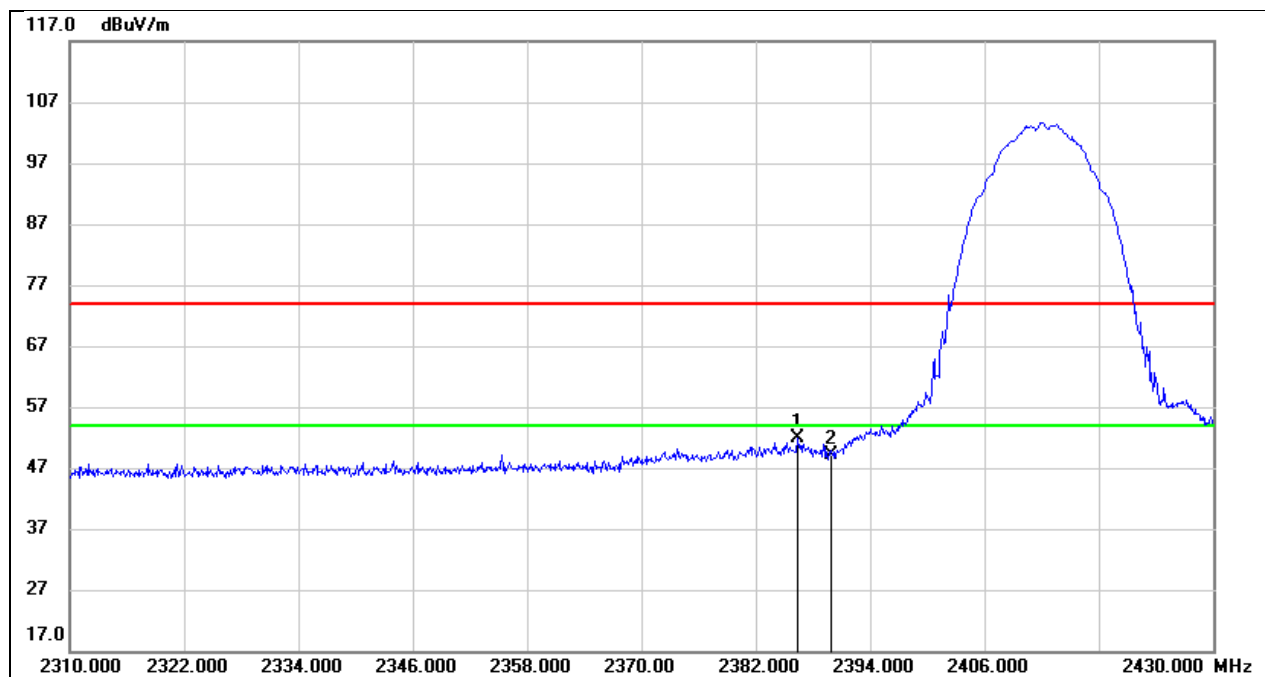


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.320	19.77	32.14	51.91	74.00	-22.09	peak
2	2390.000	16.92	32.16	49.08	74.00	-24.92	peak

Test Mode:	802.11b PK	Channel:	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

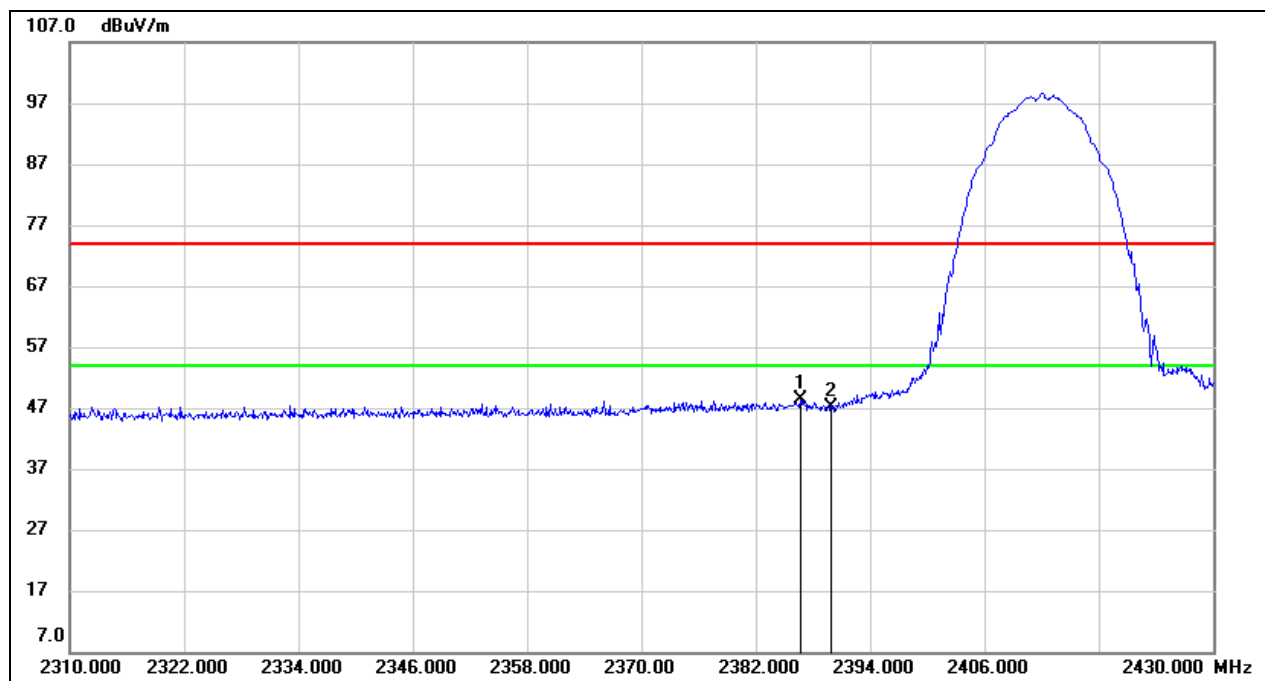


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.680	16.27	32.15	48.42	74.00	-25.58	peak
2	2390.000	15.05	32.16	47.21	74.00	-26.79	peak

Test Mode:	802.11b PK	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

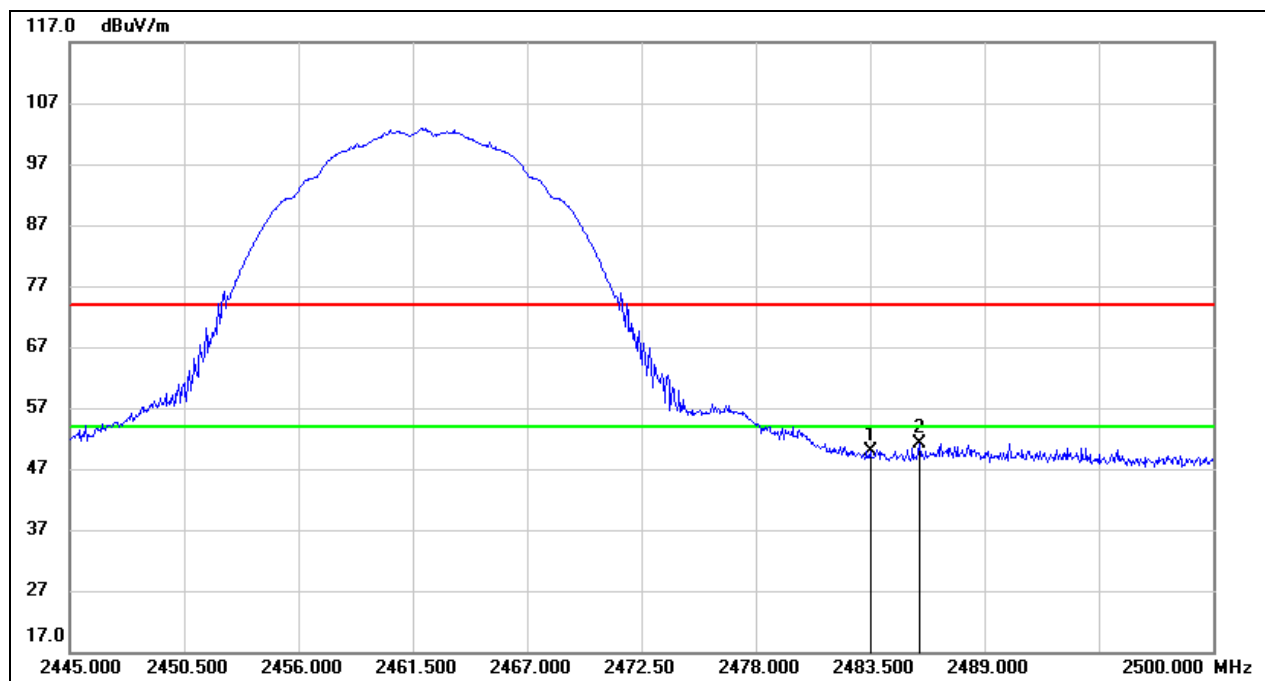


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.50	32.44	49.94	74.00	-24.06	peak
2	2485.865	18.79	32.44	51.23	74.00	-22.77	peak

Test Mode:	802.11g PK	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

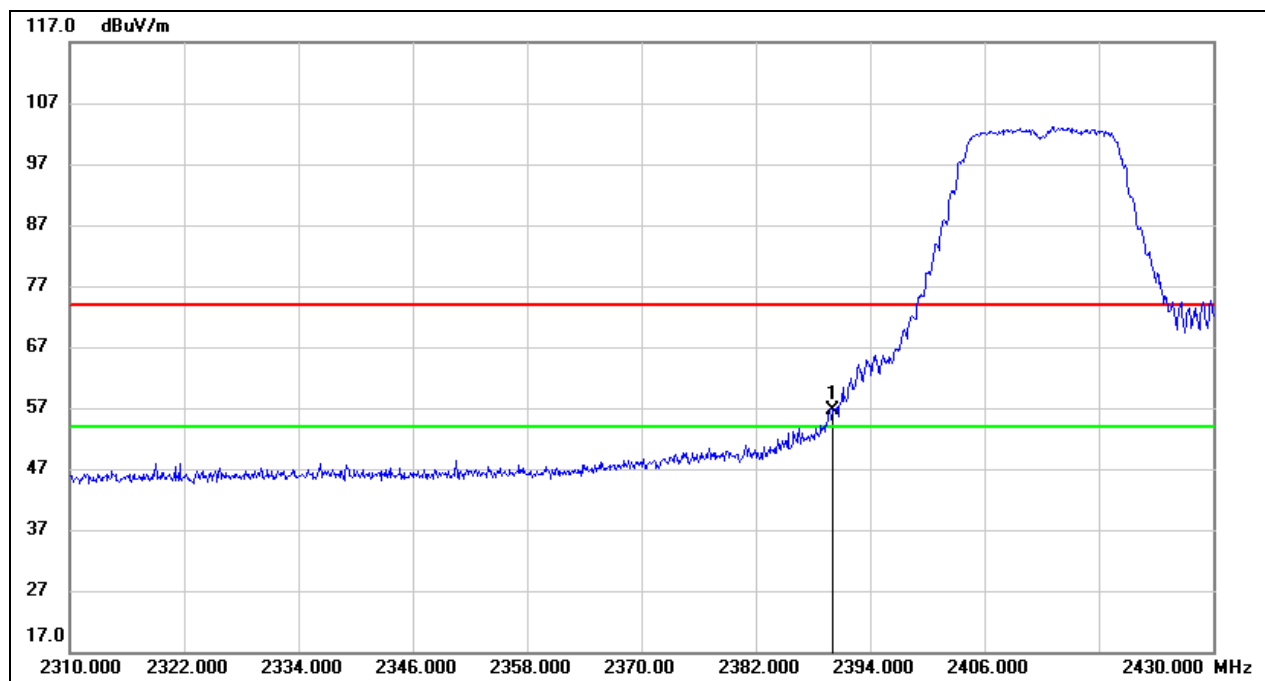


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	24.41	32.16	56.57	74.00	-17.43	peak

Test Mode:	802.11g AV	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

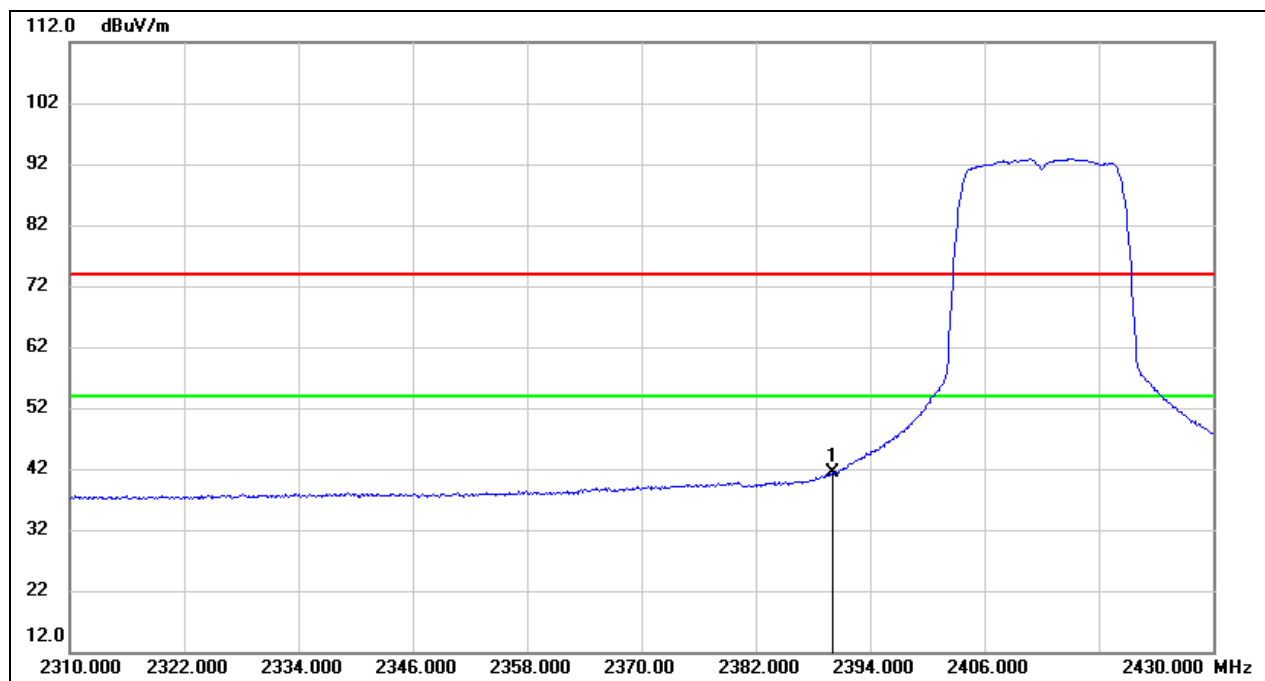


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	9.19	32.16	41.35	54.00	-12.65	AVG

Test Mode:	802.11g PK	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

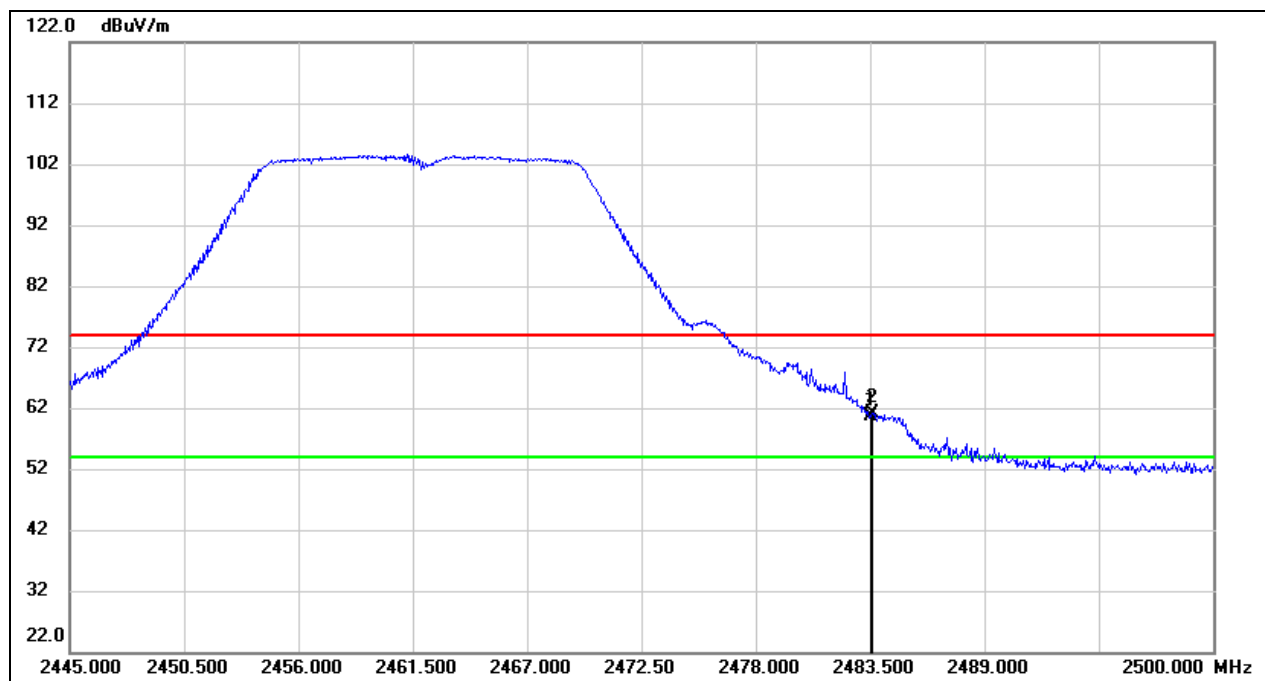


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	28.28	32.44	60.72	74.00	-13.28	peak
2	2483.610	28.77	32.44	61.21	74.00	-12.79	peak

Test Mode:	802.11g AV	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

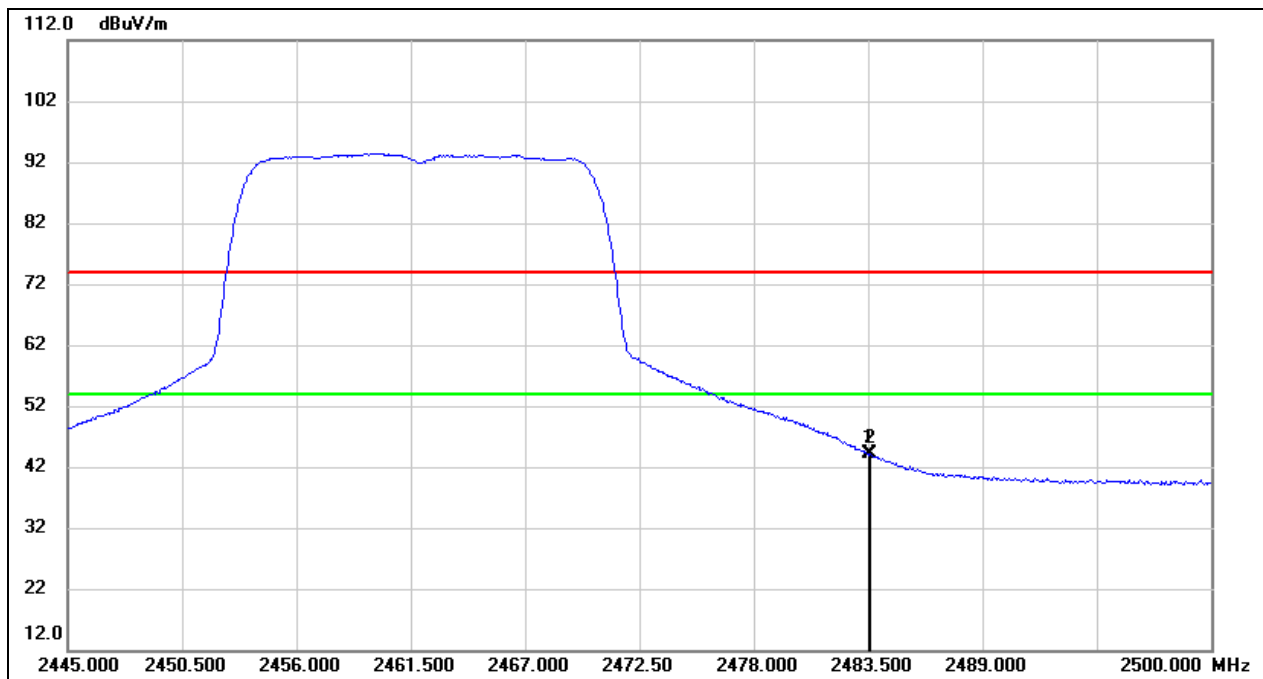


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	11.69	32.44	44.13	54.00	-9.87	AVG
2	2483.610	11.60	32.44	44.04	54.00	-9.96	AVG

Test Mode:	802.11n HT20 PK	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

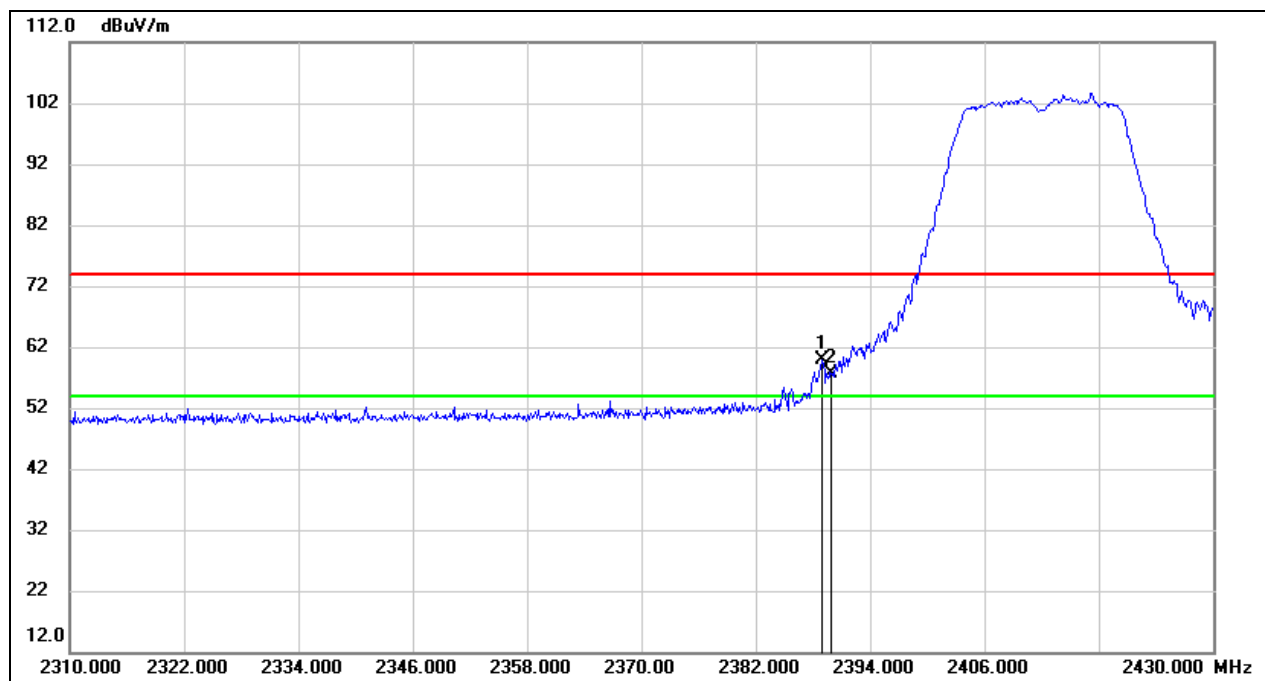


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.960	27.70	32.16	59.86	74.00	-14.14	peak
2	2390.000	25.36	32.16	57.52	74.00	-16.48	peak

Test Mode:	802.11n HT20 AV	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

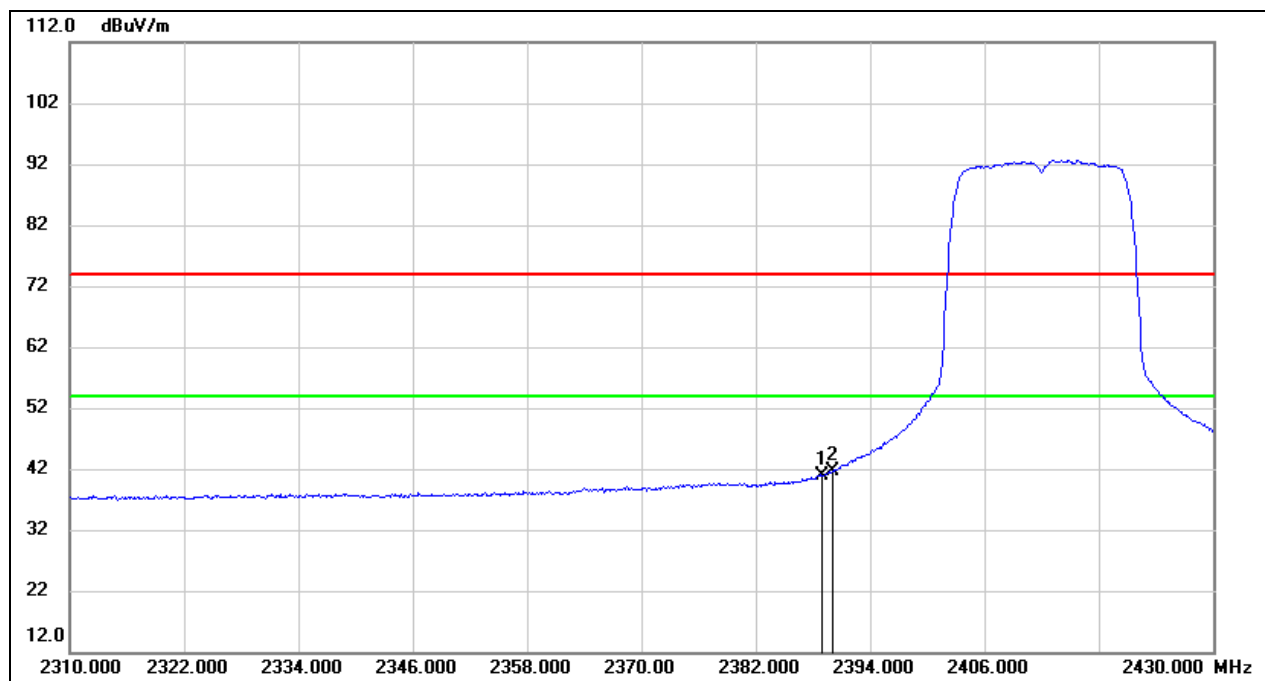


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.960	8.75	32.16	40.91	54.00	-13.09	AVG
2	2390.000	9.49	32.16	41.65	54.00	-12.35	AVG

Test Mode:	802.11n HT20 PK	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

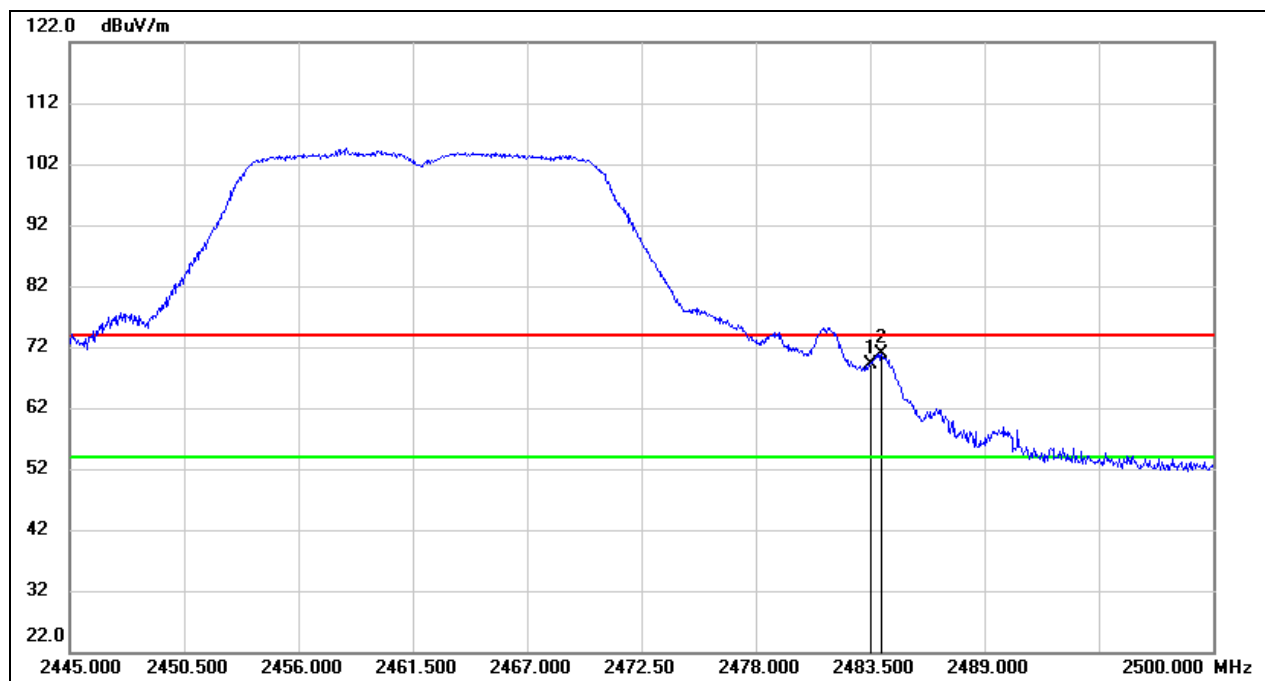

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.81	32.44	69.25	74.00	-4.75	peak
2	2484.050	38.53	32.44	70.97	74.00	-3.03	peak


Test Mode:	802.11n HT20 AV	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

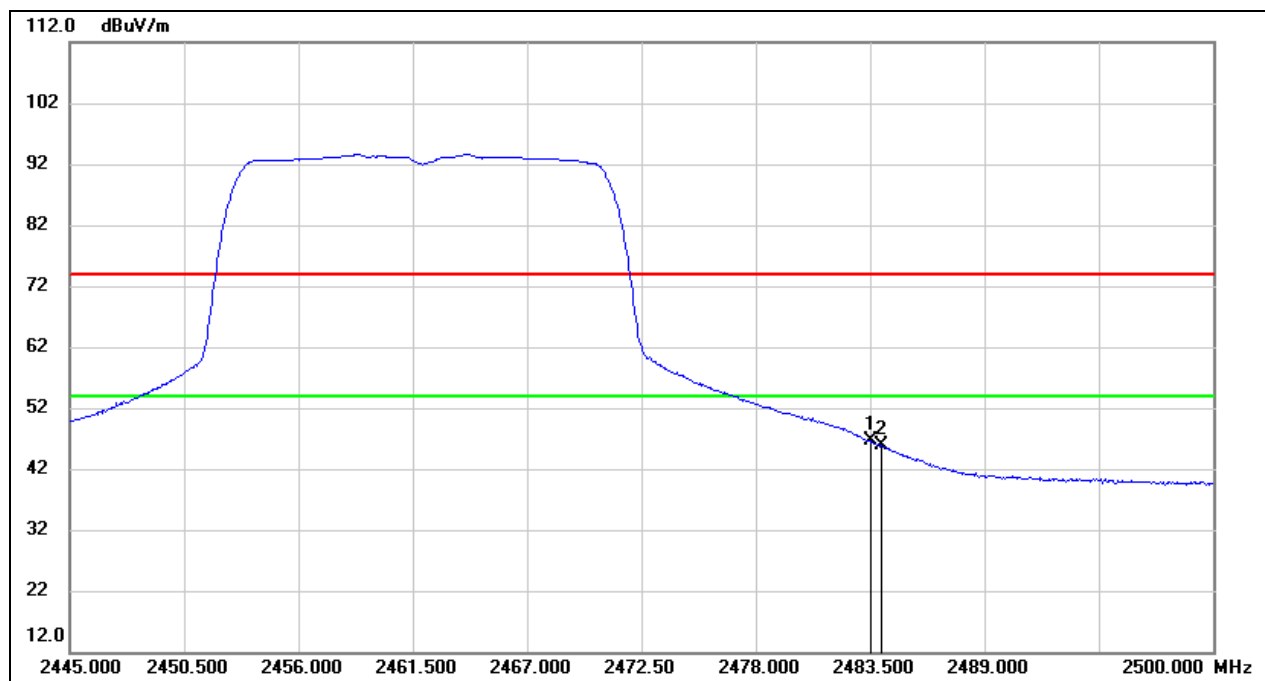

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.15	32.44	46.59	54.00	-7.41	AVG
2	2484.050	13.32	32.44	45.76	54.00	-8.24	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

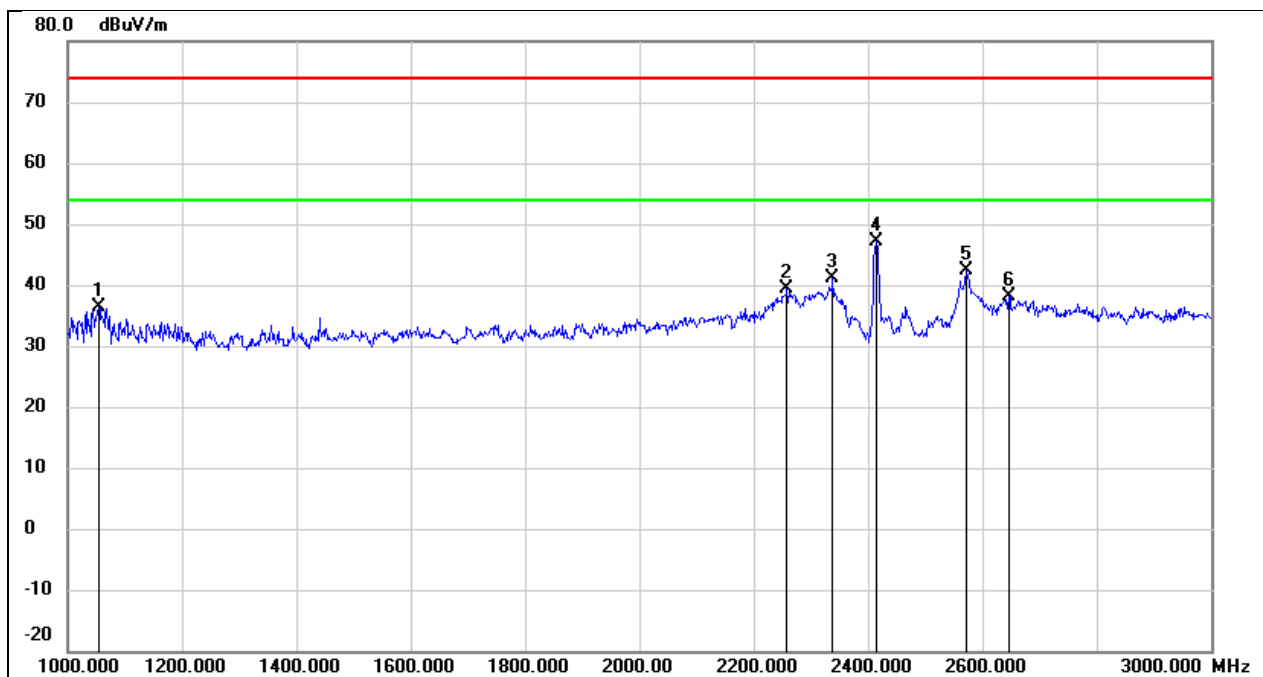


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1054.000	51.18	-14.78	36.40	74.00	-37.60	peak
2	2258.000	49.09	-9.74	39.35	74.00	-34.65	peak
3	2338.000	50.56	-9.32	41.24	74.00	-32.76	peak
4	2412.000	56.17	-8.93	47.24	/	/	fundamental
5	2572.000	50.63	-8.27	42.36	74.00	-31.64	peak
6	2646.000	46.21	-8.05	38.16	74.00	-35.84	peak

Test Mode:	802.11b	Channel:	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

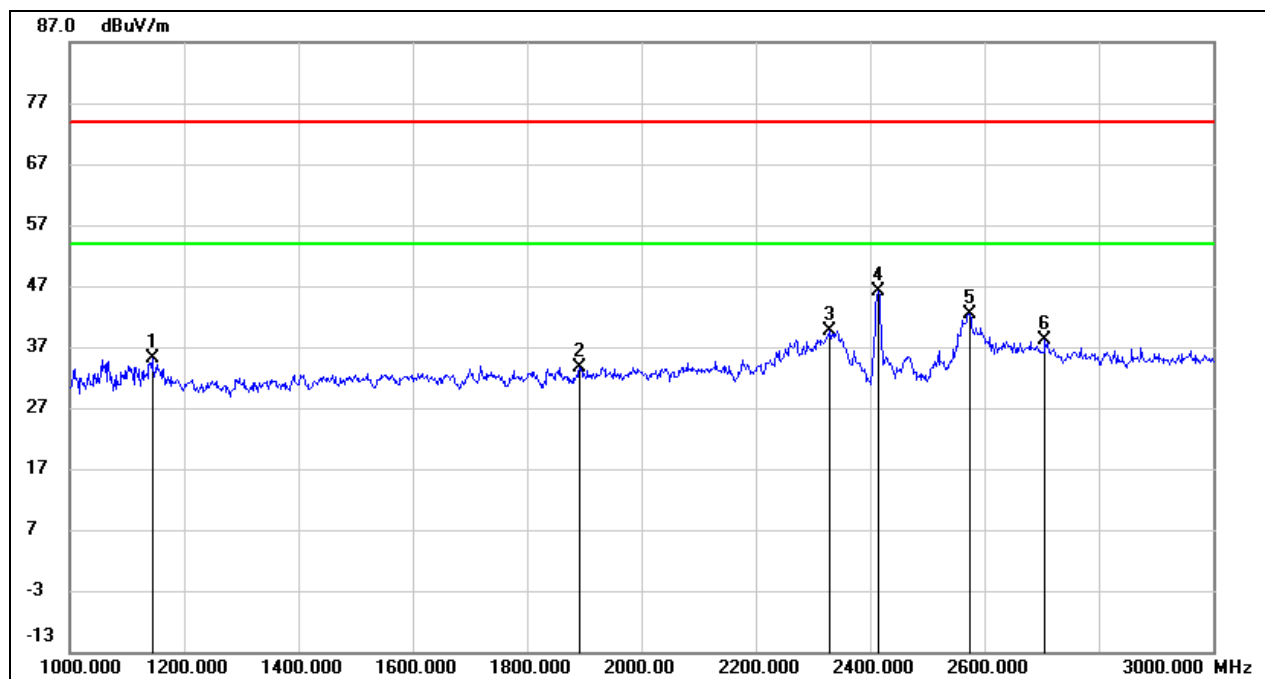


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1144.000	49.38	-14.36	35.02	74.00	-38.98	peak
2	1892.000	45.11	-11.42	33.69	74.00	-40.31	peak
3	2330.000	48.97	-9.36	39.61	74.00	-34.39	peak
4	2412.000	55.13	-8.93	46.20	/	/	fundamental
5	2574.000	50.72	-8.27	42.45	74.00	-31.55	peak
6	2706.000	46.05	-7.87	38.18	74.00	-35.82	peak

Test Mode:	802.11b	Channel:	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

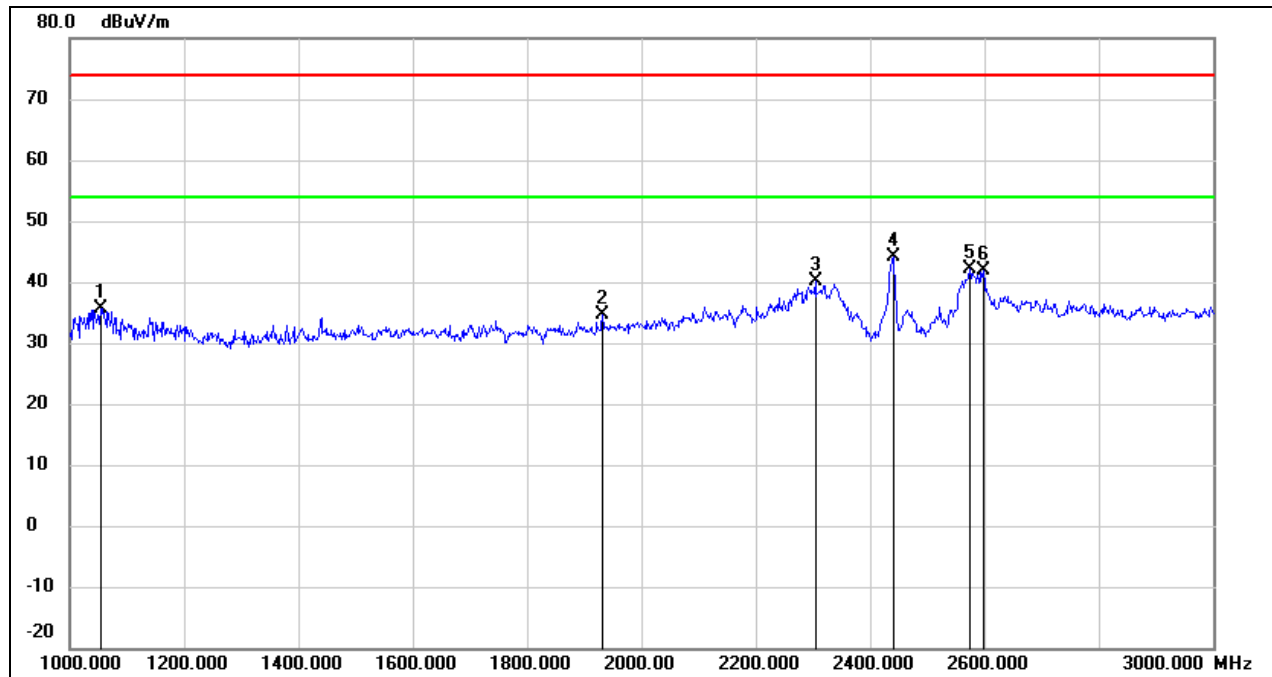


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1054.000	50.39	-14.78	35.61	74.00	-38.39	peak
2	1932.000	45.87	-11.28	34.59	74.00	-39.41	peak
3	2304.000	49.71	-9.50	40.21	74.00	-33.79	peak
4	2437.000	52.98	-8.80	44.18	/	/	fundamental
5	2574.000	50.29	-8.27	42.02	74.00	-31.98	peak
6	2598.000	50.07	-8.19	41.88	74.00	-32.12	peak

Test Mode:	802.11b	Channel:	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

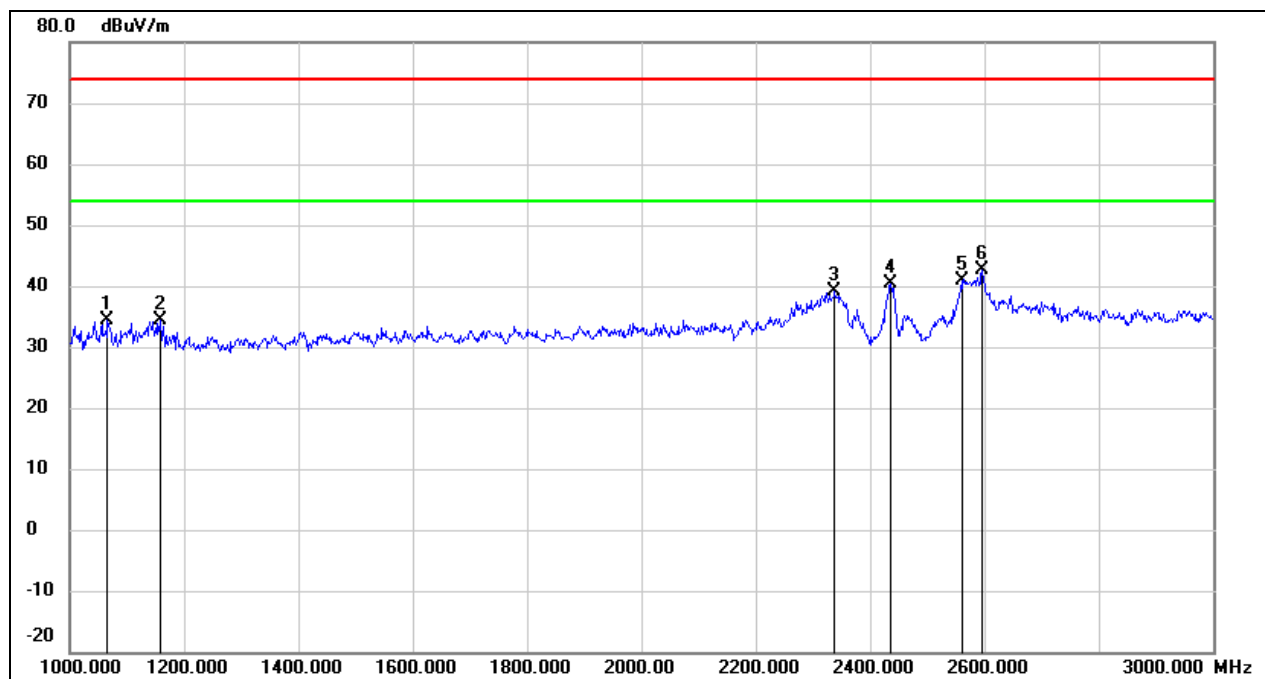


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1066.000	49.04	-14.73	34.31	74.00	-39.69	peak
2	1158.000	48.59	-14.29	34.30	74.00	-39.70	peak
3	2338.000	48.49	-9.32	39.17	74.00	-34.83	peak
4	2437.000	49.24	-8.82	40.42	/	/	fundamental
5	2560.000	49.25	-8.31	40.94	74.00	-33.06	peak
6	2596.000	50.84	-8.20	42.64	74.00	-31.36	peak

Test Mode:	802.11b	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

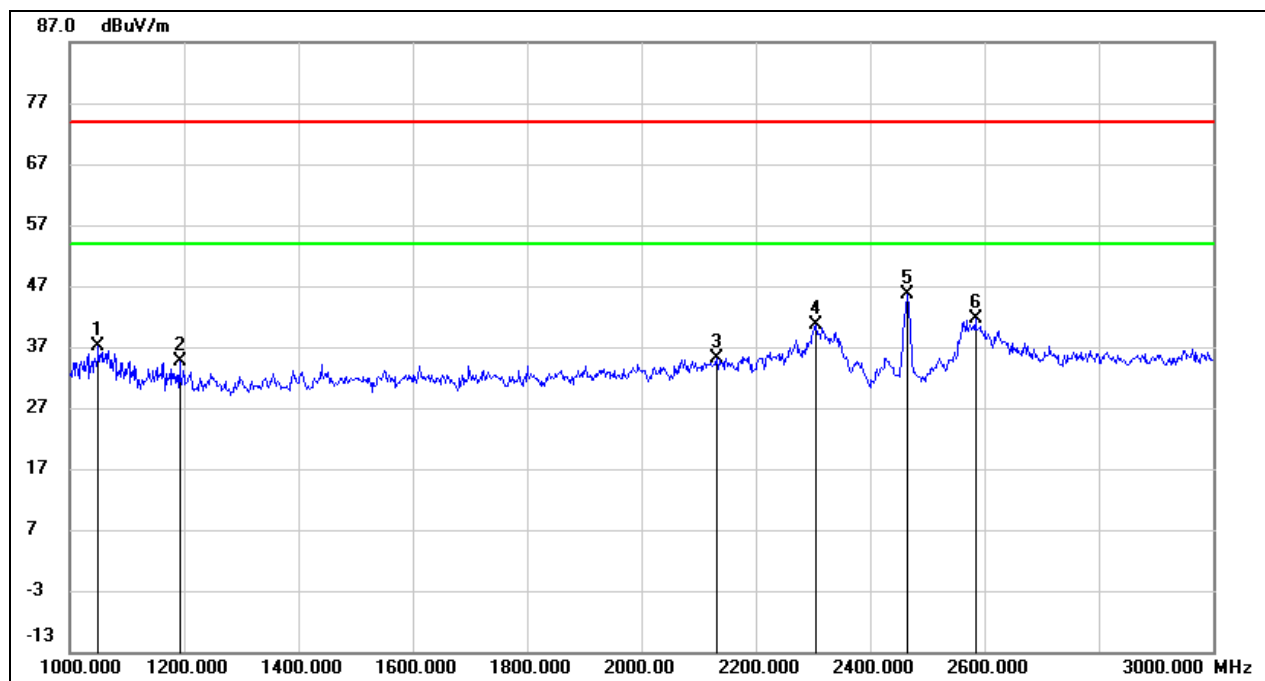

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1050.000	51.95	-14.80	37.15	74.00	-36.85	peak
2	1192.000	48.81	-14.14	34.67	74.00	-39.33	peak
3	2132.000	45.56	-10.39	35.17	74.00	-38.83	peak
4	2306.000	50.09	-9.49	40.60	74.00	-33.40	peak
5	2462.000	54.20	-8.68	45.52	/	/	fundamental
6	2584.000	49.86	-8.24	41.62	74.00	-32.38	peak


Test Mode:	802.11b	Channel:	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

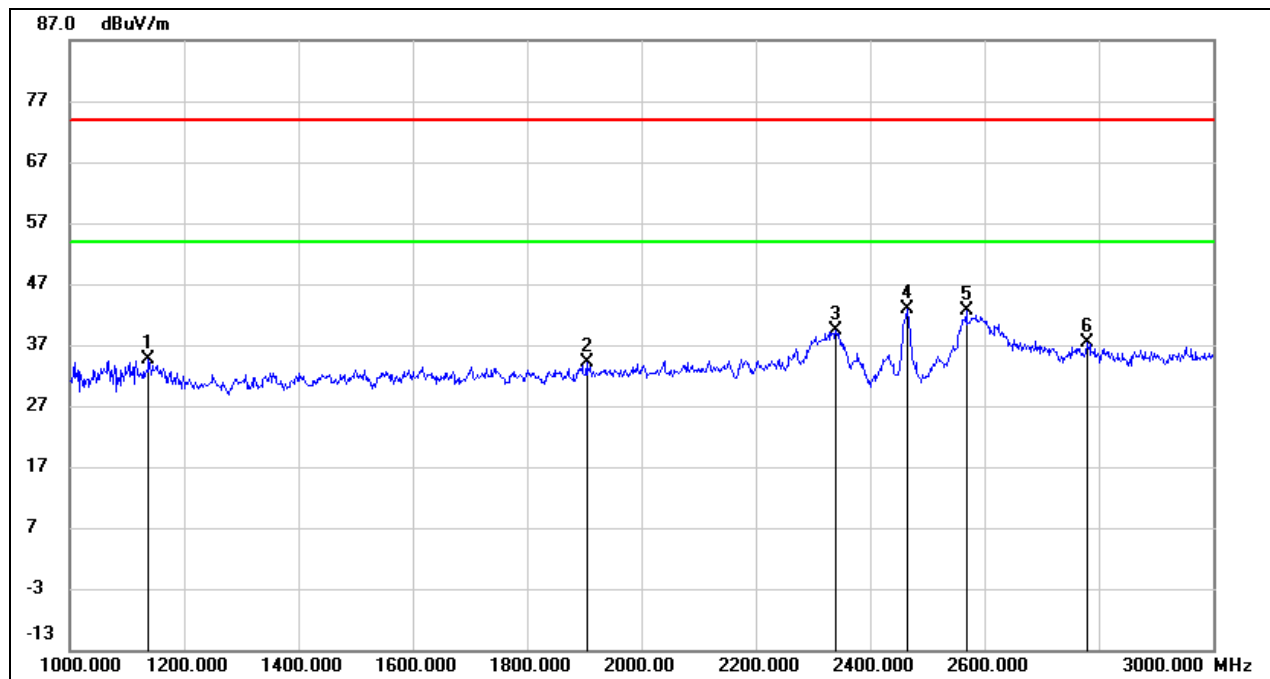

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1138.000	49.13	-14.39	34.74	74.00	-39.26	peak
2	1904.000	45.39	-11.38	34.01	74.00	-39.99	peak
3	2340.000	48.66	-9.31	39.35	74.00	-34.65	peak
4	2462.000	51.62	-8.66	42.96	/	/	fundamental
5	2568.000	50.87	-8.28	42.59	74.00	-31.41	peak
6	2780.000	44.90	-7.64	37.26	74.00	-36.74	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

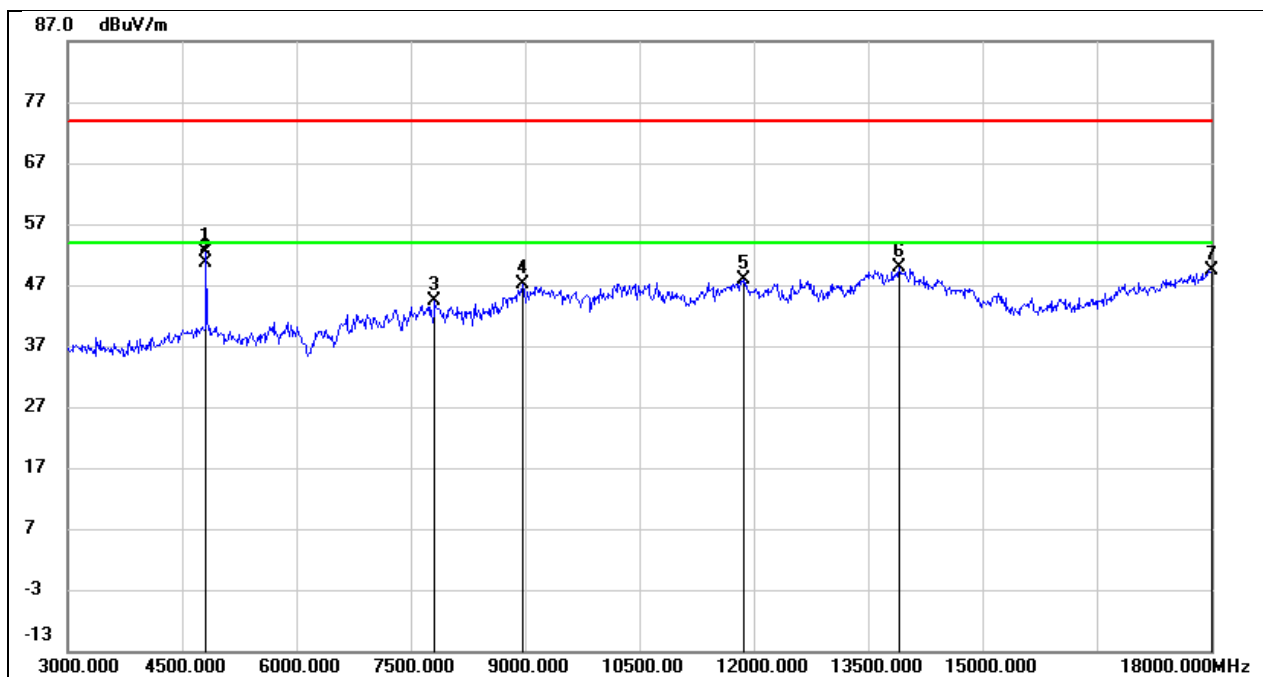


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	52.64	-0.26	52.38	74.00	-21.62	peak
2	4815.000	50.89	-0.26	50.63	54.00	-3.37	AVG
3	7815.000	38.14	6.32	44.46	74.00	-29.54	peak
4	8970.000	36.82	10.26	47.08	74.00	-26.92	peak
5	11865.000	30.32	17.59	47.91	74.00	-26.09	peak
6	13905.000	28.19	21.76	49.95	74.00	-24.05	peak
7	18000.000	23.81	25.69	49.50	74.00	-24.50	peak

Test Mode:	802.11b	Channel:	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

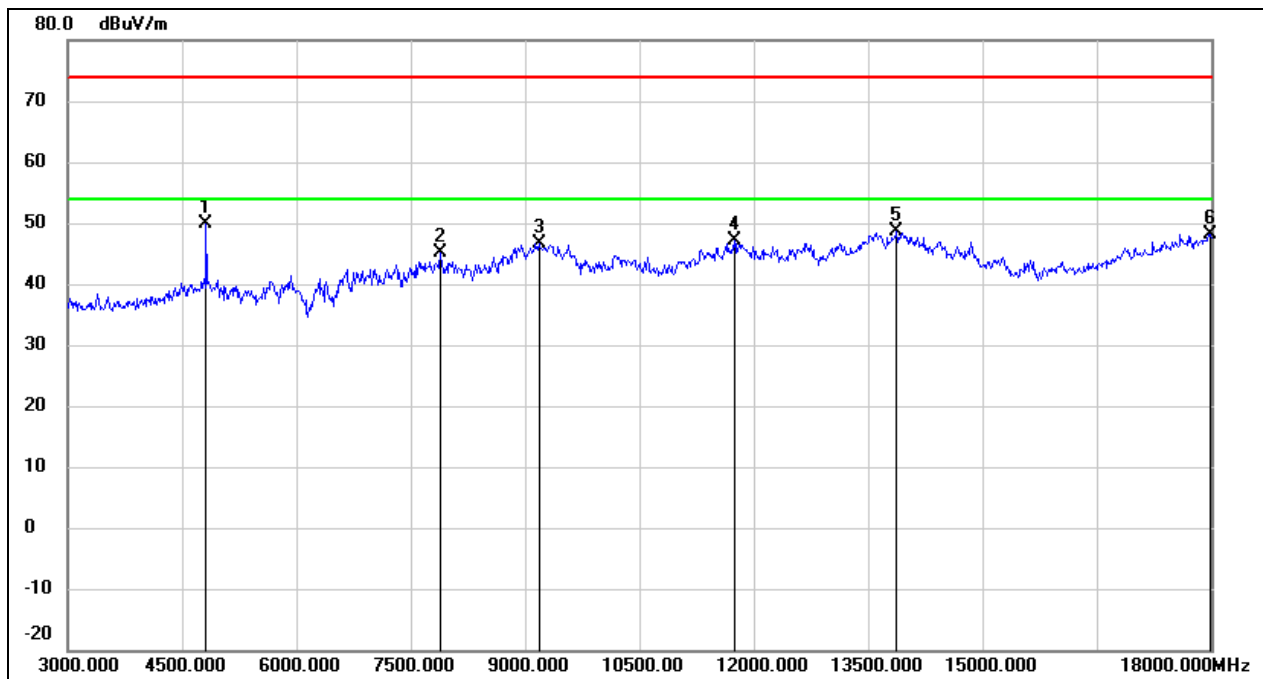


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	50.17	-0.26	49.91	74.00	-24.09	peak
2	7890.000	38.94	6.31	45.25	74.00	-28.75	peak
3	9180.000	36.01	10.56	46.57	74.00	-27.43	peak
4	11745.000	29.93	17.27	47.20	74.00	-26.80	peak
5	13875.000	26.85	21.70	48.55	74.00	-25.45	peak
6	17985.000	22.61	25.60	48.21	74.00	-25.79	peak

Test Mode:	802.11b	Channel:	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

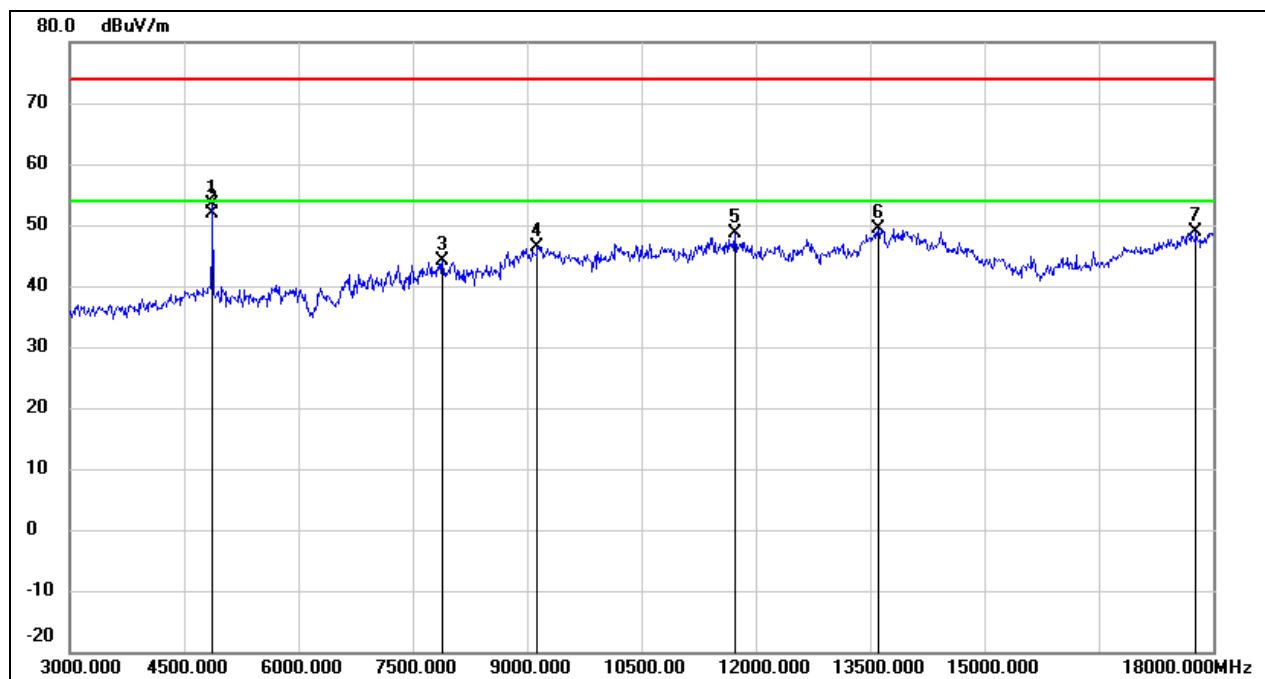


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	53.48	-0.03	53.45	74.00	-20.55	peak
2	4875.000	51.95	-0.03	51.92	54.00	-2.08	AVG
3	7890.000	37.90	6.31	44.21	74.00	-29.79	peak
4	9135.000	35.89	10.55	46.44	74.00	-27.56	peak
5	11730.000	31.36	17.22	48.58	74.00	-25.42	peak
6	13605.000	28.35	21.12	49.47	74.00	-24.53	peak
7	17775.000	24.55	24.36	48.91	74.00	-25.09	peak

Test Mode:	802.11b	Channel:	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

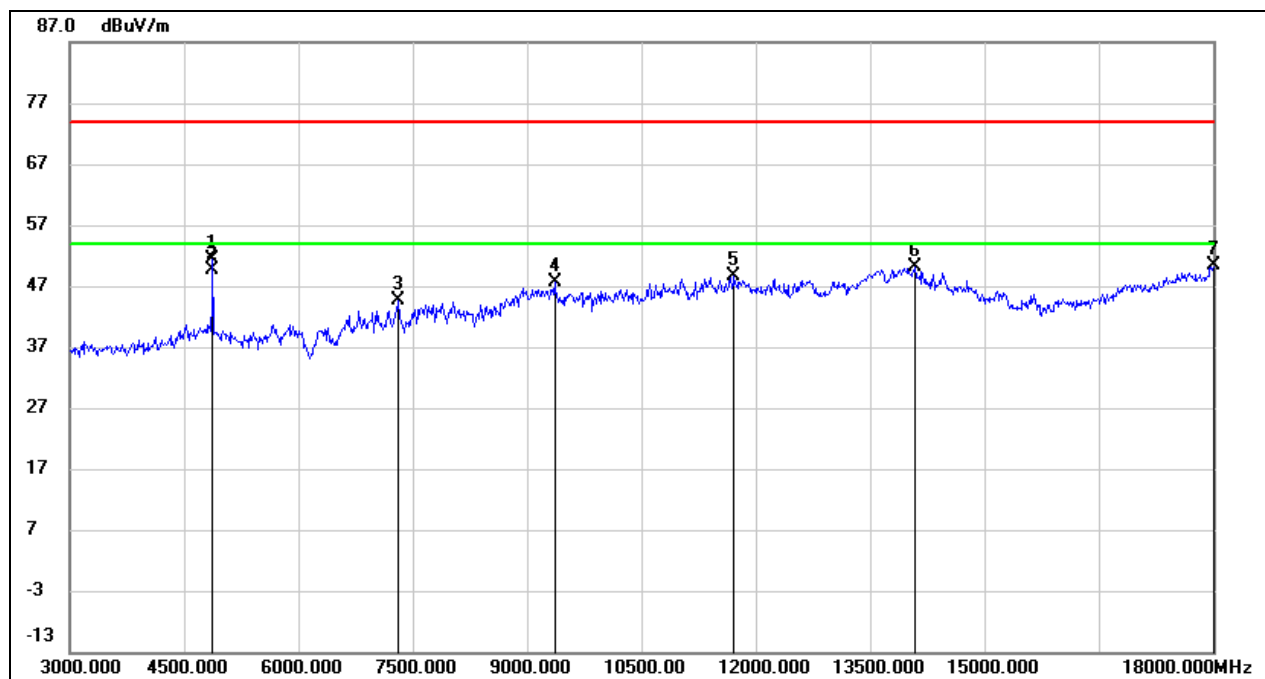


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	51.43	-0.03	51.40	74.00	-22.60	peak
2	4875.000	49.75	-0.03	49.72	54.00	-4.28	AVG
3	7305.000	38.11	6.47	44.58	74.00	-29.42	peak
4	9360.000	36.91	10.64	47.55	74.00	-26.45	peak
5	11715.000	31.53	17.19	48.72	74.00	-25.28	peak
6	14085.000	28.56	21.61	50.17	74.00	-23.83	peak
7	18000.000	24.72	25.69	50.41	74.00	-23.59	peak

Test Mode:	802.11b	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

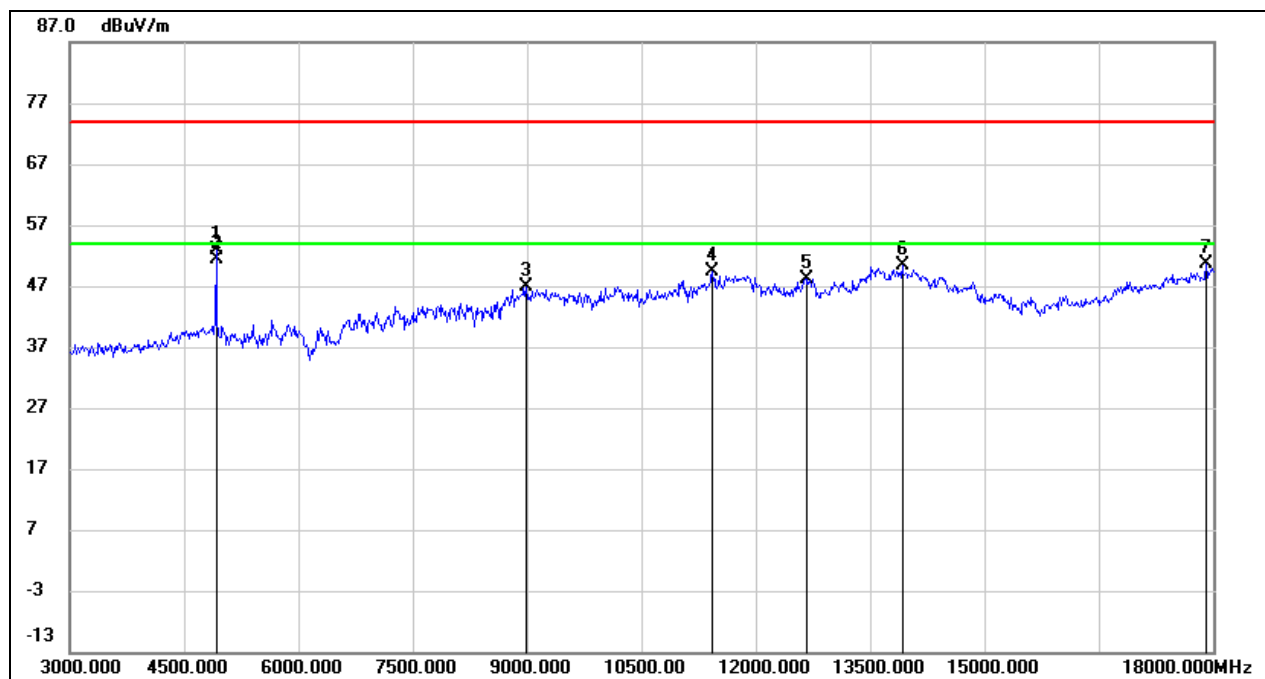


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	52.85	0.14	52.99	74.00	-21.01	peak
2	4920.000	51.28	0.14	51.42	54.00	-2.58	AVG
3	8985.000	36.60	10.37	46.97	74.00	-27.03	peak
4	11430.000	33.06	16.34	49.40	74.00	-24.60	peak
5	12660.000	30.18	17.95	48.13	74.00	-25.87	peak
6	13920.000	28.63	21.79	50.42	74.00	-23.58	peak
7	17910.000	25.48	25.16	50.64	74.00	-23.36	peak

Test Mode:	802.11b	Channel:	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

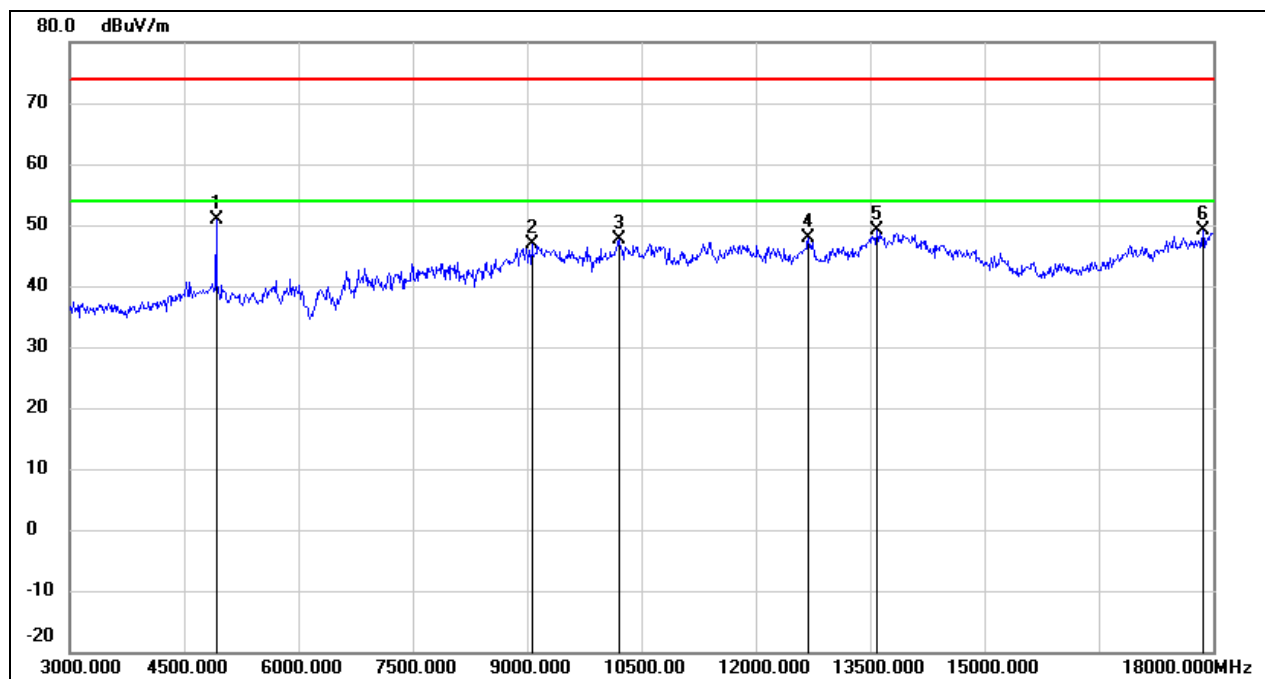


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	50.77	0.14	50.91	74.00	-23.09	peak
2	9060.000	36.30	10.51	46.81	74.00	-27.19	peak
3	10200.000	35.19	12.40	47.59	74.00	-26.41	peak
4	12690.000	29.79	18.02	47.81	74.00	-26.19	peak
5	13590.000	28.09	21.09	49.18	74.00	-24.82	peak
6	17865.000	24.34	24.89	49.23	74.00	-24.77	peak

Test Mode:	802.11g	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

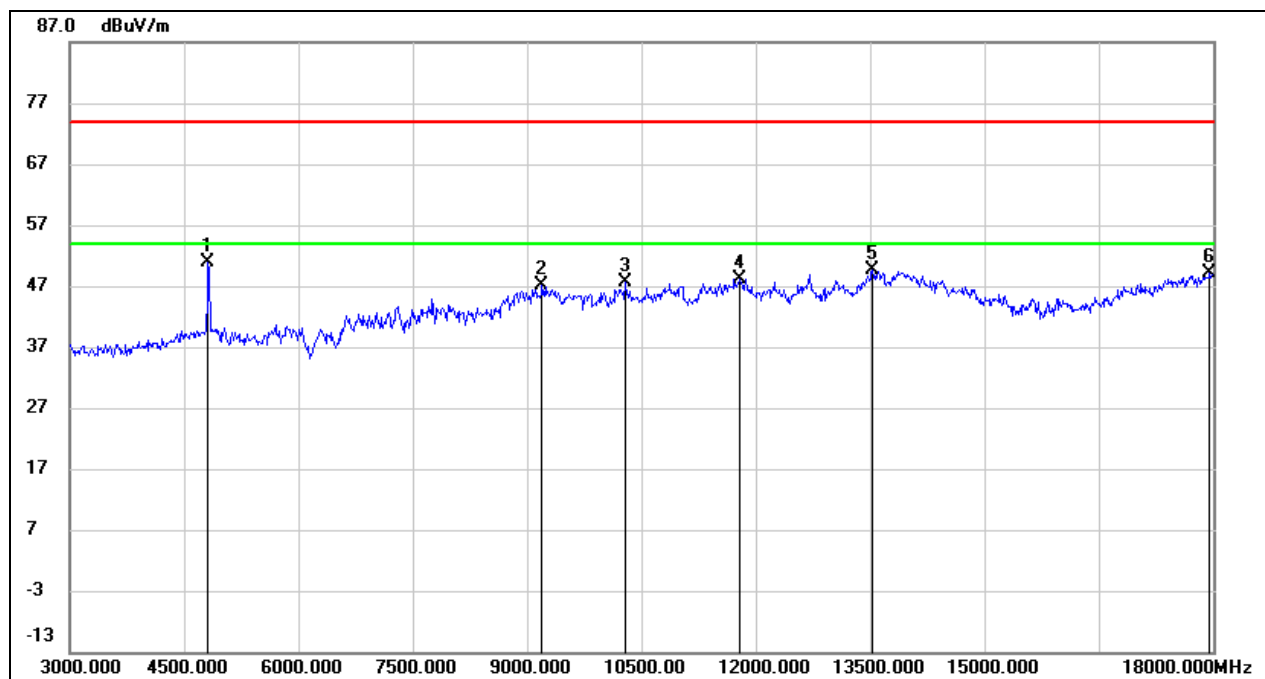


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	51.02	-0.26	50.76	74.00	-23.24	peak
2	9195.000	36.53	10.56	47.09	74.00	-26.91	peak
3	10290.000	34.93	12.59	47.52	74.00	-26.48	peak
4	11790.000	30.82	17.38	48.20	74.00	-25.80	peak
5	13530.000	28.59	20.96	49.55	74.00	-24.45	peak
6	17955.000	23.74	25.42	49.16	74.00	-24.84	peak

Test Mode:	802.11g	Channel:	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

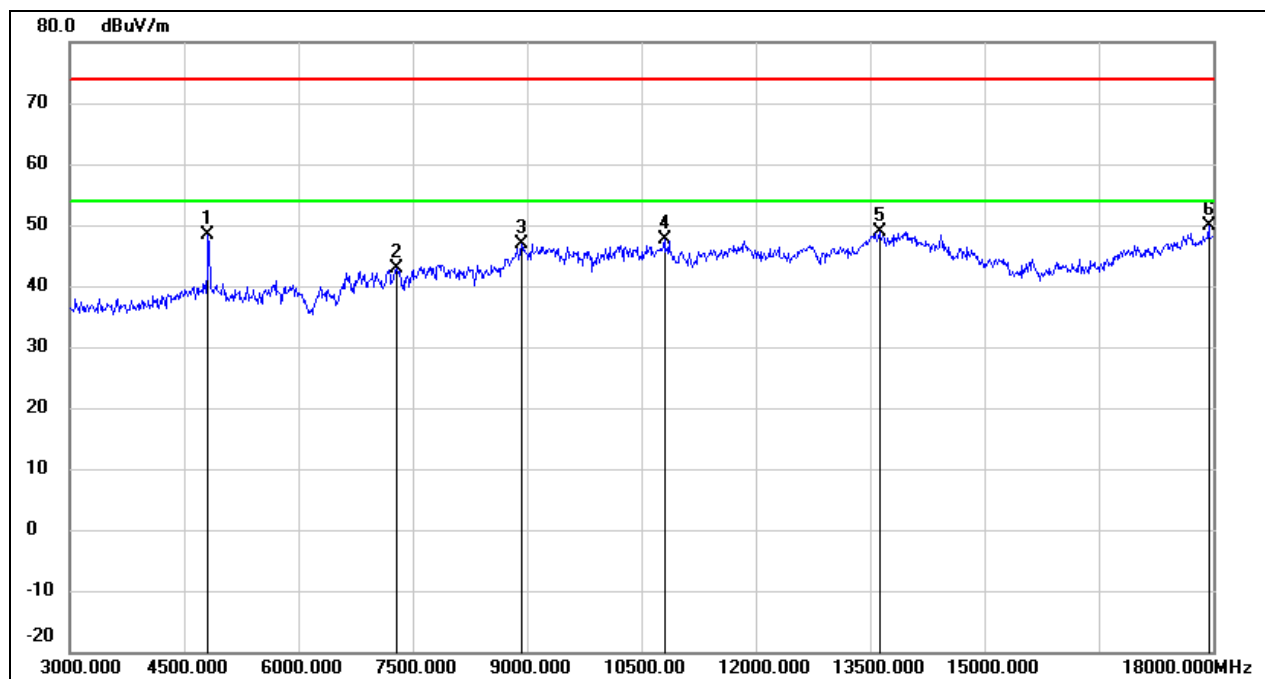


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	48.64	-0.26	48.38	74.00	-25.62	peak
2	7290.000	36.29	6.48	42.77	74.00	-31.23	peak
3	8925.000	36.83	9.94	46.77	74.00	-27.23	peak
4	10800.000	33.55	14.06	47.61	74.00	-26.39	peak
5	13620.000	27.84	21.15	48.99	74.00	-25.01	peak
6	17940.000	24.50	25.34	49.84	74.00	-24.16	peak

Test Mode:	802.11g	Channel:	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

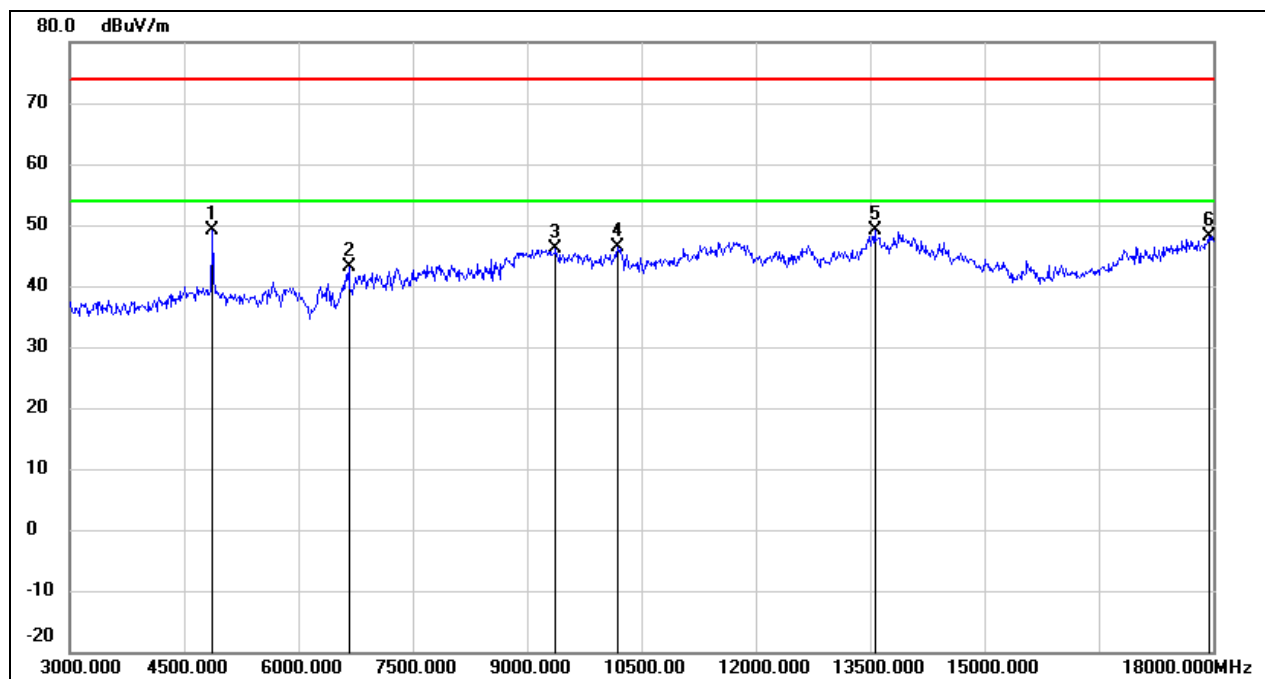


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	49.08	-0.03	49.05	74.00	-24.95	peak
2	6660.000	38.08	5.02	43.10	74.00	-30.90	peak
3	9375.000	35.46	10.64	46.10	74.00	-27.90	peak
4	10185.000	33.92	12.38	46.30	74.00	-27.70	peak
5	13560.000	27.97	21.04	49.01	74.00	-24.99	peak
6	17940.000	22.85	25.34	48.19	74.00	-25.81	peak

Test Mode:	802.11g	Channel:	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

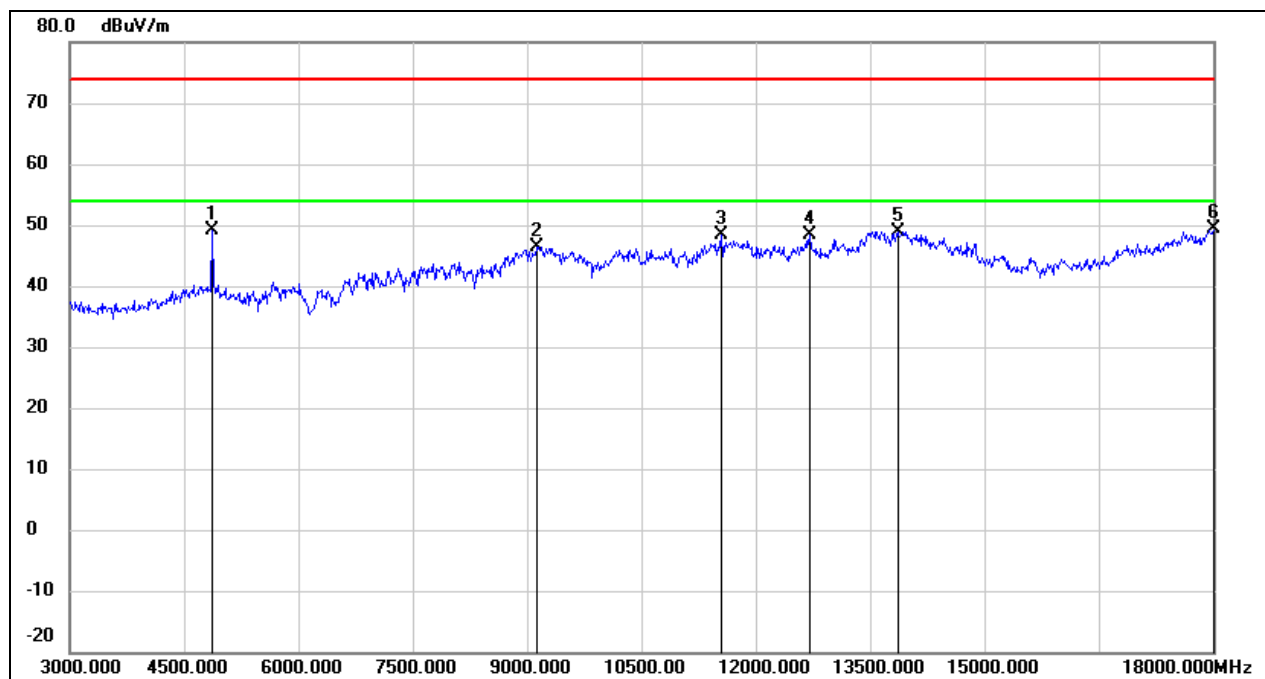


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	49.19	-0.09	49.10	74.00	-24.90	peak
2	9135.000	35.76	10.55	46.31	74.00	-27.69	peak
3	11550.000	31.67	16.74	48.41	74.00	-25.59	peak
4	12705.000	30.29	18.06	48.35	74.00	-25.65	peak
5	13860.000	27.24	21.67	48.91	74.00	-25.09	peak
6	18000.000	23.61	25.69	49.30	74.00	-24.70	peak

Test Mode:	802.11g	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

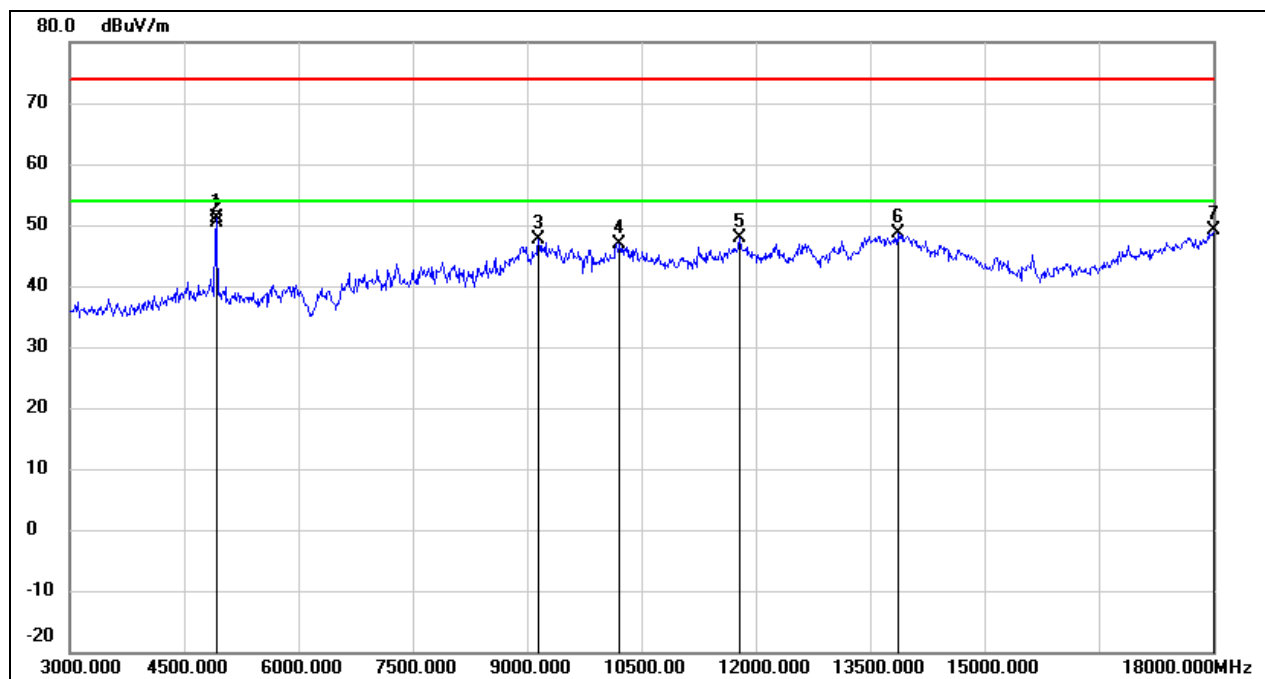


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	51.11	0.14	51.25	74.00	-22.75	peak
2	4920.000	50.29	0.14	50.43	54.00	-3.57	AVG
3	9150.000	37.02	10.54	47.56	74.00	-26.44	peak
4	10215.000	34.56	12.43	46.99	74.00	-27.01	peak
5	11790.000	30.42	17.38	47.80	74.00	-26.20	peak
6	13860.000	27.06	21.67	48.73	74.00	-25.27	peak
7	18000.000	23.42	25.69	49.11	74.00	-24.89	peak

Test Mode:	802.11g	Channel:	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

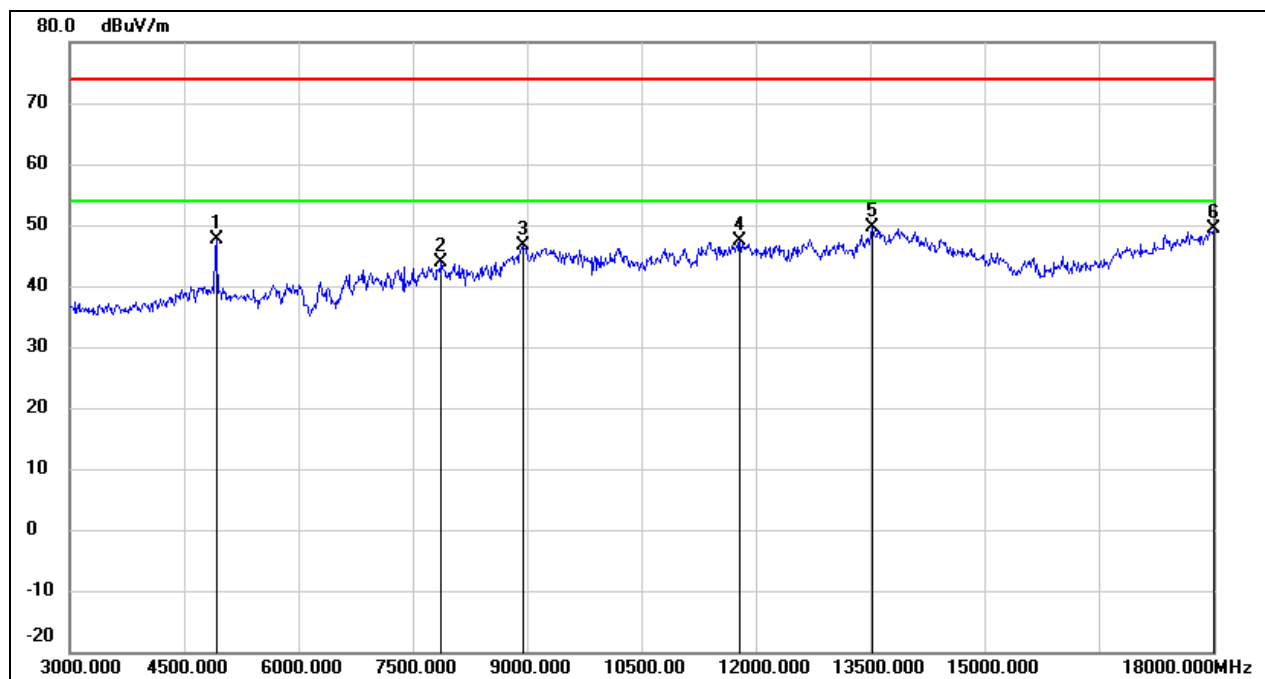


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	47.57	0.14	47.71	74.00	-26.29	peak
2	7875.000	37.61	6.31	43.92	74.00	-30.08	peak
3	8955.000	36.52	10.16	46.68	74.00	-27.32	peak
4	11790.000	29.92	17.38	47.30	74.00	-26.70	peak
5	13530.000	28.55	20.96	49.51	74.00	-24.49	peak
6	18000.000	23.73	25.69	49.42	74.00	-24.58	peak

Test Mode:	802.11n HT20	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

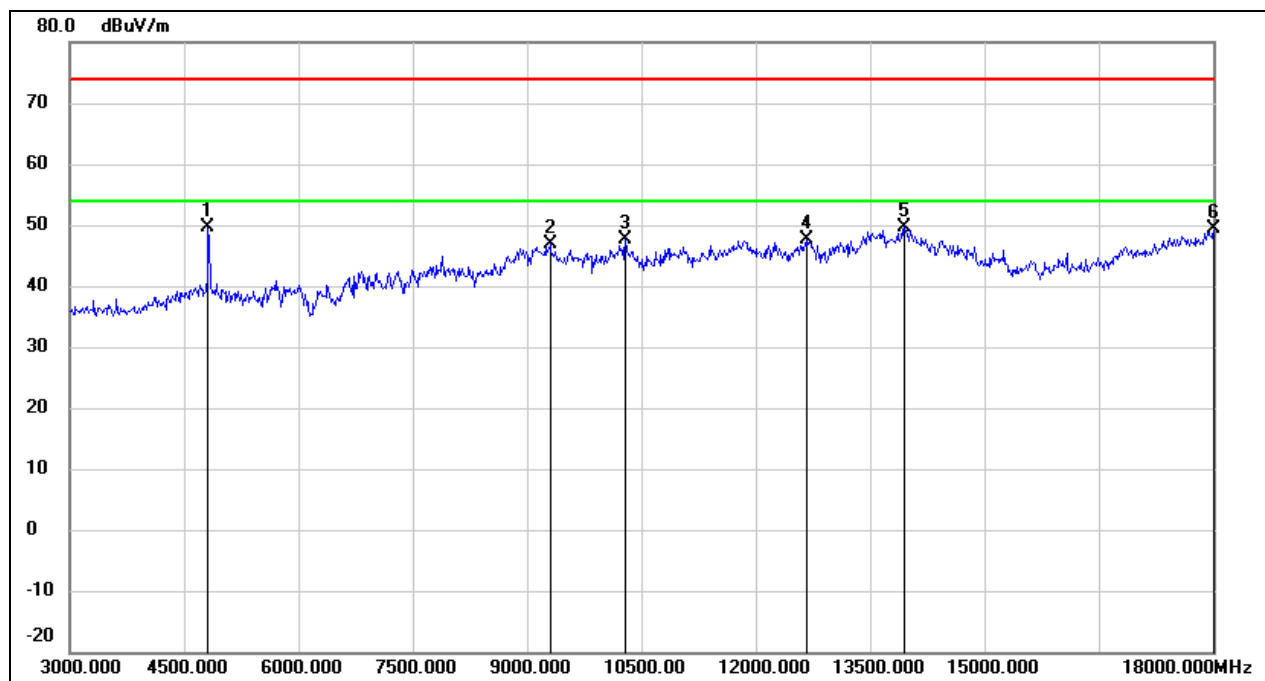


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	49.93	-0.26	49.67	74.00	-24.33	peak
2	9300.000	36.21	10.61	46.82	74.00	-27.18	peak
3	10290.000	35.08	12.59	47.67	74.00	-26.33	peak
4	12675.000	29.71	17.99	47.70	74.00	-26.30	peak
5	13950.000	27.87	21.86	49.73	74.00	-24.27	peak
6	18000.000	23.62	25.69	49.31	74.00	-24.69	peak

Test Mode:	802.11n HT20	Channel:	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

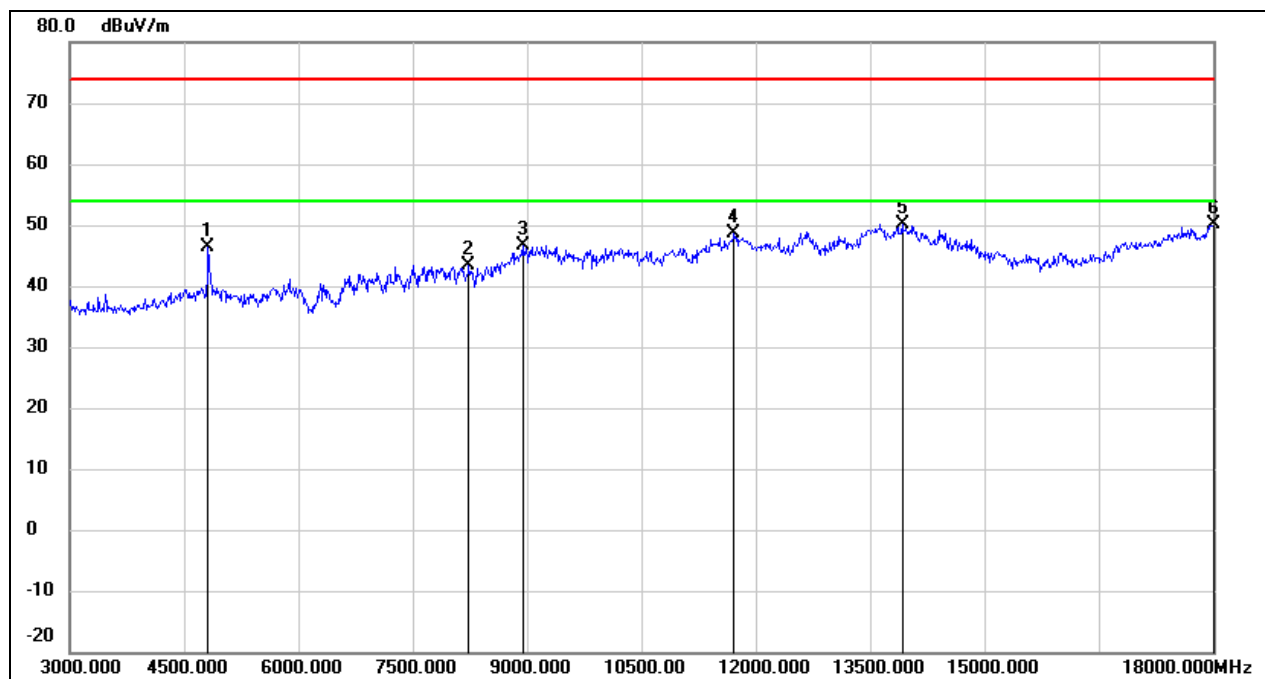


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	46.64	-0.26	46.38	74.00	-27.62	peak
2	8235.000	36.88	6.56	43.44	74.00	-30.56	peak
3	8940.000	36.60	10.04	46.64	74.00	-27.36	peak
4	11715.000	31.38	17.19	48.57	74.00	-25.43	peak
5	13920.000	28.28	21.79	50.07	74.00	-23.93	peak
6	18000.000	24.38	25.69	50.07	74.00	-23.93	peak

Test Mode:	802.11n HT20	Channel:	2437
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

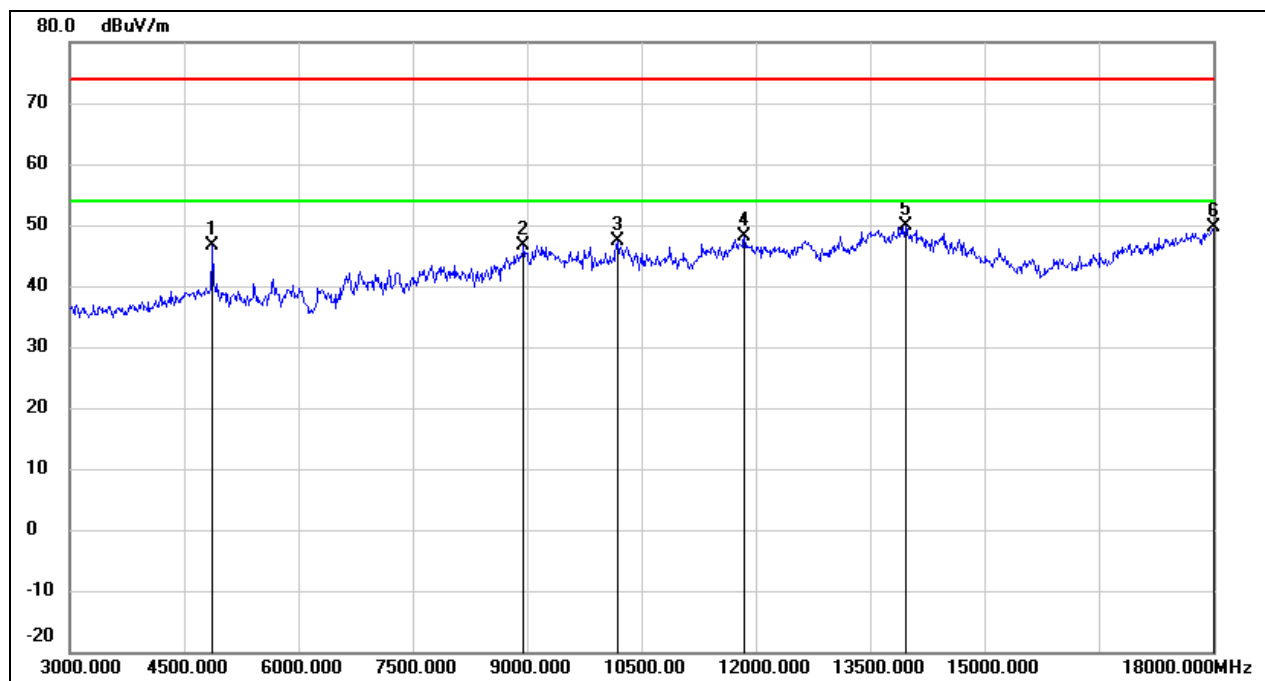


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	46.70	-0.03	46.67	74.00	-27.33	peak
2	8955.000	36.42	10.16	46.58	74.00	-27.42	peak
3	10185.000	35.09	12.38	47.47	74.00	-26.53	peak
4	11850.000	30.48	17.56	48.04	74.00	-25.96	peak
5	13965.000	27.87	21.89	49.76	74.00	-24.24	peak
6	18000.000	23.98	25.69	49.67	74.00	-24.33	peak

Test Mode:	802.11n HT20	Channel:	2437
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

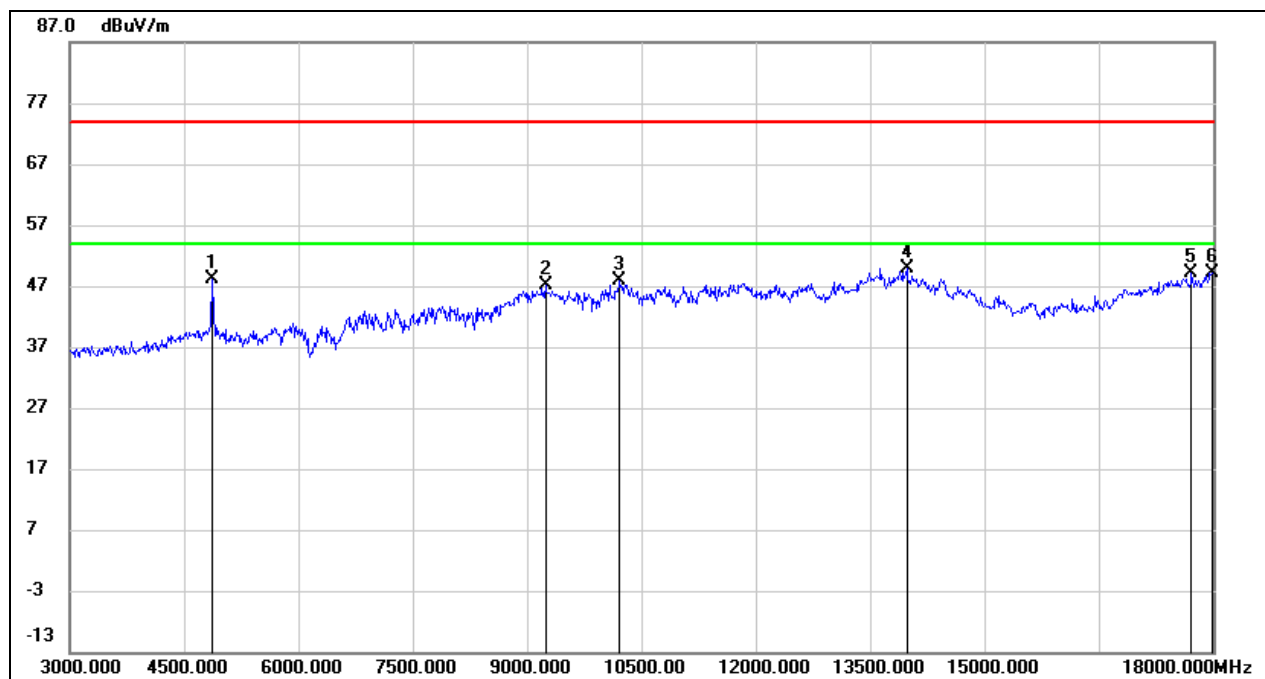


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	48.27	-0.03	48.24	74.00	-25.76	peak
2	9240.000	36.64	10.58	47.22	74.00	-26.78	peak
3	10215.000	35.42	12.43	47.85	74.00	-26.15	peak
4	13980.000	28.08	21.92	50.00	74.00	-24.00	peak
5	17715.000	25.19	24.00	49.19	74.00	-24.81	peak
6	17985.000	23.45	25.60	49.05	74.00	-24.95	peak

Test Mode:	802.11n HT20	Channel:	2462
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

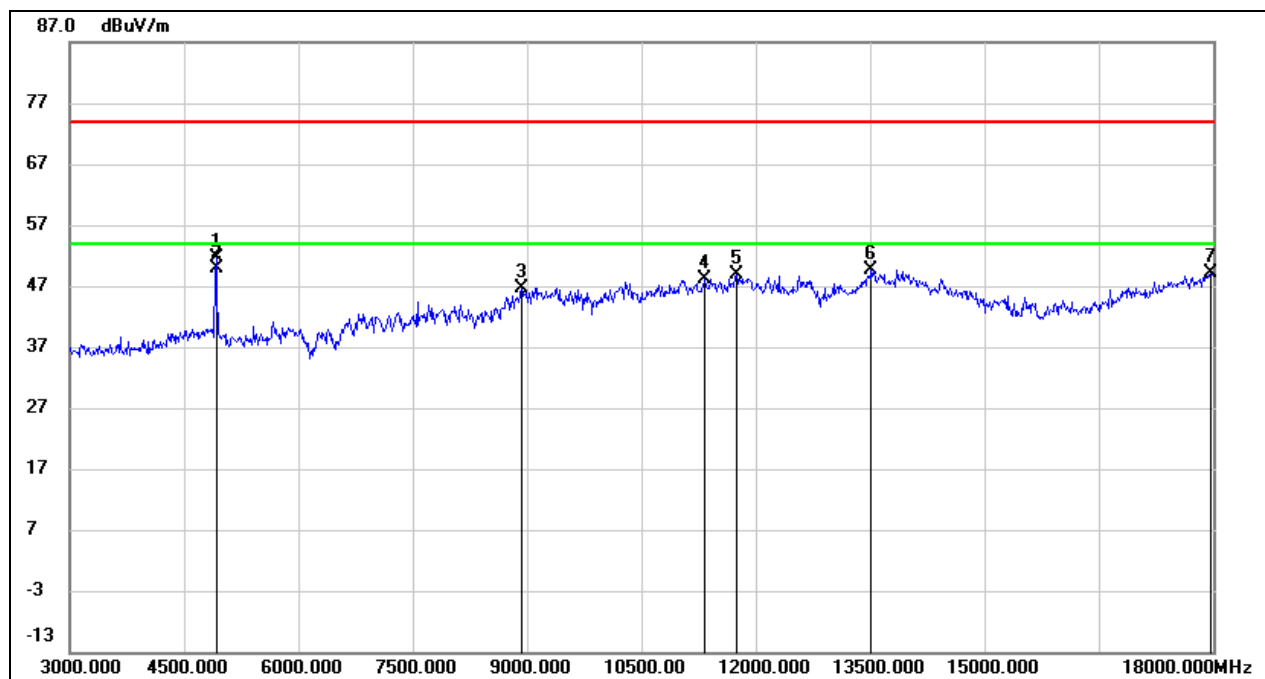

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	51.39	0.14	51.53	74.00	-22.47	peak
2	4920.000	49.64	0.14	49.78	54.00	-4.22	AVG
3	8925.000	36.74	9.94	46.68	74.00	-27.32	peak
4	11325.000	32.12	15.95	48.07	74.00	-25.93	peak
5	11745.000	31.63	17.27	48.90	74.00	-25.10	peak
6	13515.000	28.66	20.93	49.59	74.00	-24.41	peak
7	17970.000	23.51	25.51	49.02	74.00	-24.98	peak


Test Mode:	802.11n HT20	Channel:	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

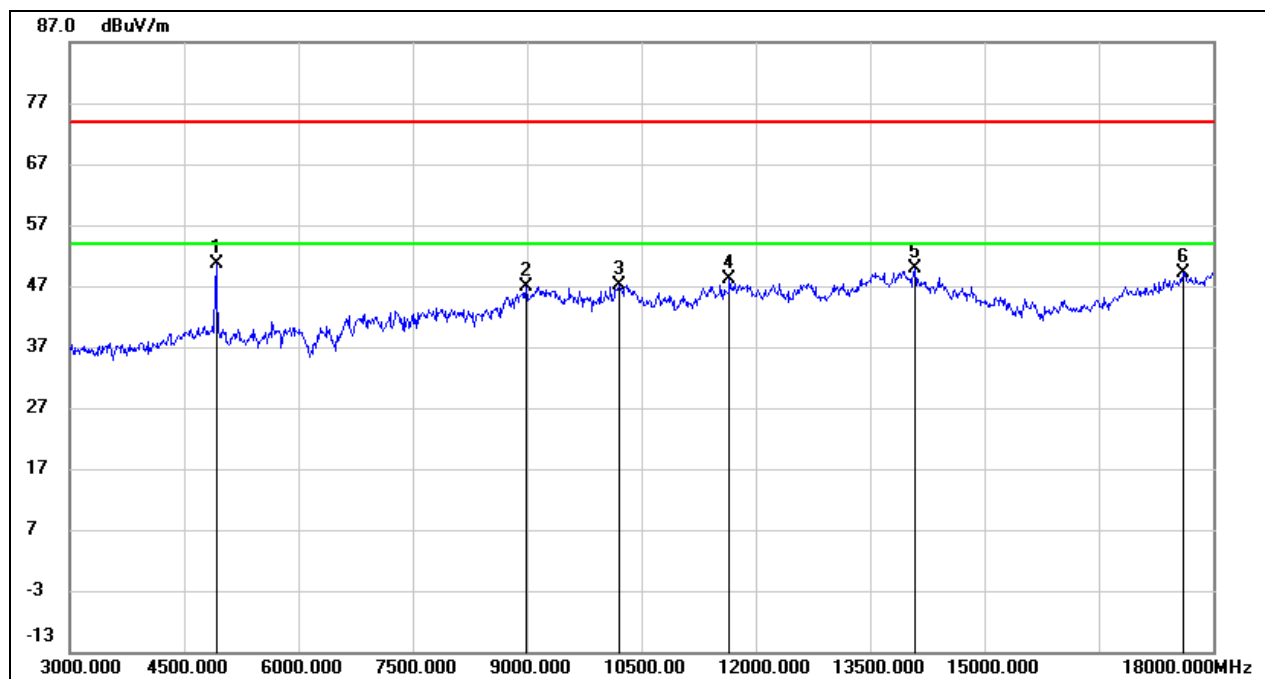

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	50.43	0.14	50.57	74.00	-23.43	peak
2	8985.000	36.46	10.37	46.83	74.00	-27.17	peak
3	10215.000	34.65	12.43	47.08	74.00	-26.92	peak
4	11655.000	31.23	17.01	48.24	74.00	-25.76	peak
5	14085.000	28.27	21.61	49.88	74.00	-24.12	peak
6	17610.000	25.83	23.38	49.21	74.00	-24.79	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Channel:	2412
Polarity:	FACE ON	Test Voltage:	AC 120V_60Hz

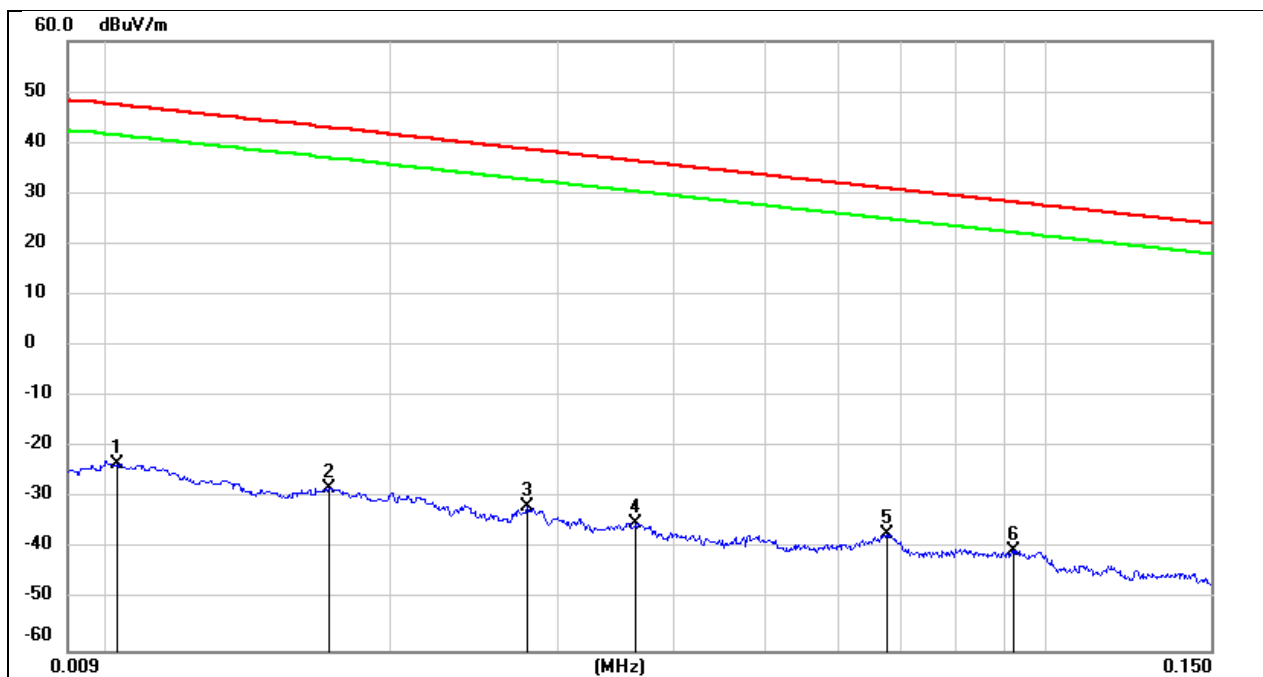


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0102	78.05	-101.40	-23.35	47.43	-70.78	peak
2	0.0171	73.38	-101.36	-27.98	42.94	-70.92	peak
3	0.0279	69.67	-101.38	-31.71	38.69	-70.40	peak
4	0.0364	66.38	-101.42	-35.04	36.38	-71.42	peak
5	0.0675	64.64	-101.56	-36.92	31.02	-67.94	peak
6	0.0922	61.51	-101.74	-40.23	28.31	-68.54	peak

Test Mode:	802.11b	Channel:	2412
Polarity:	FACE ON	Test Voltage:	AC 120V_60Hz

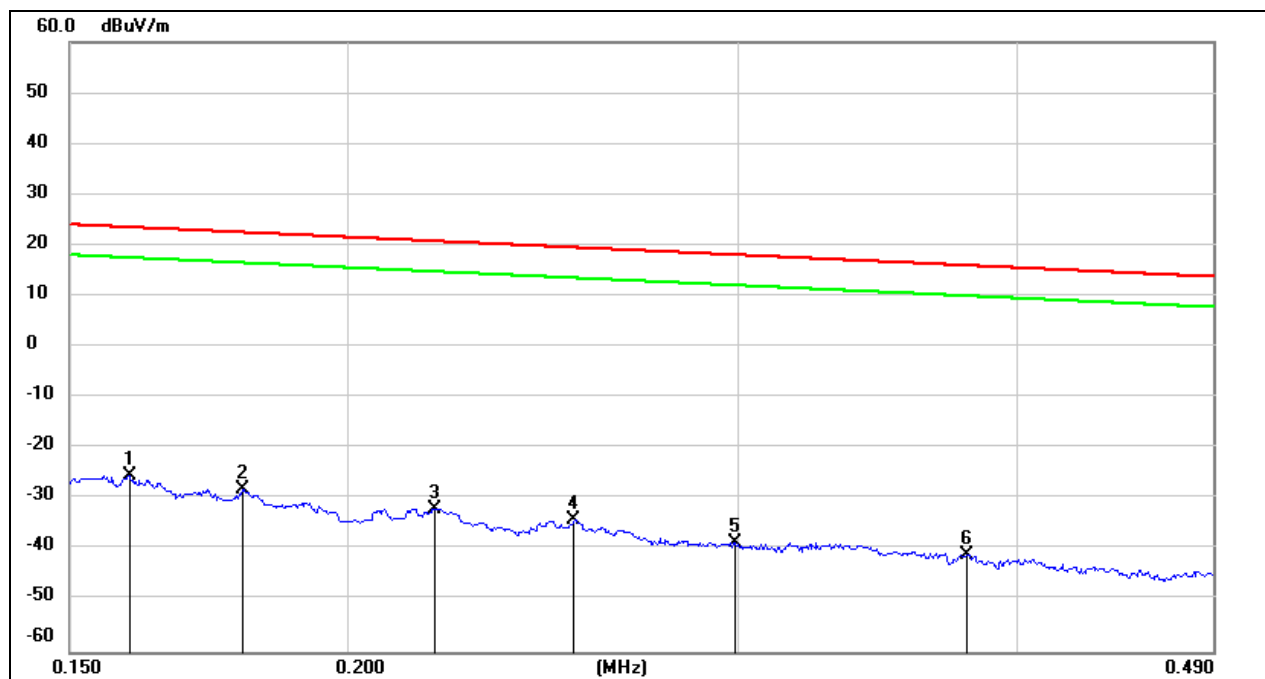

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	76.36	-101.65	-25.29	23.55	-48.84	peak
2	0.1794	73.77	-101.68	-27.91	22.53	-50.44	peak
3	0.2190	69.77	-101.75	-31.98	20.79	-52.77	peak
4	0.2530	67.64	-101.80	-34.16	19.54	-53.70	peak
5	0.2988	63.27	-101.85	-38.58	18.09	-56.67	peak
6	0.3800	61.02	-101.94	-40.92	16.01	-56.93	peak


Test Mode:	802.11b	Channel:	2412
Polarity:	FACE ON	Test Voltage:	AC 120V_60Hz

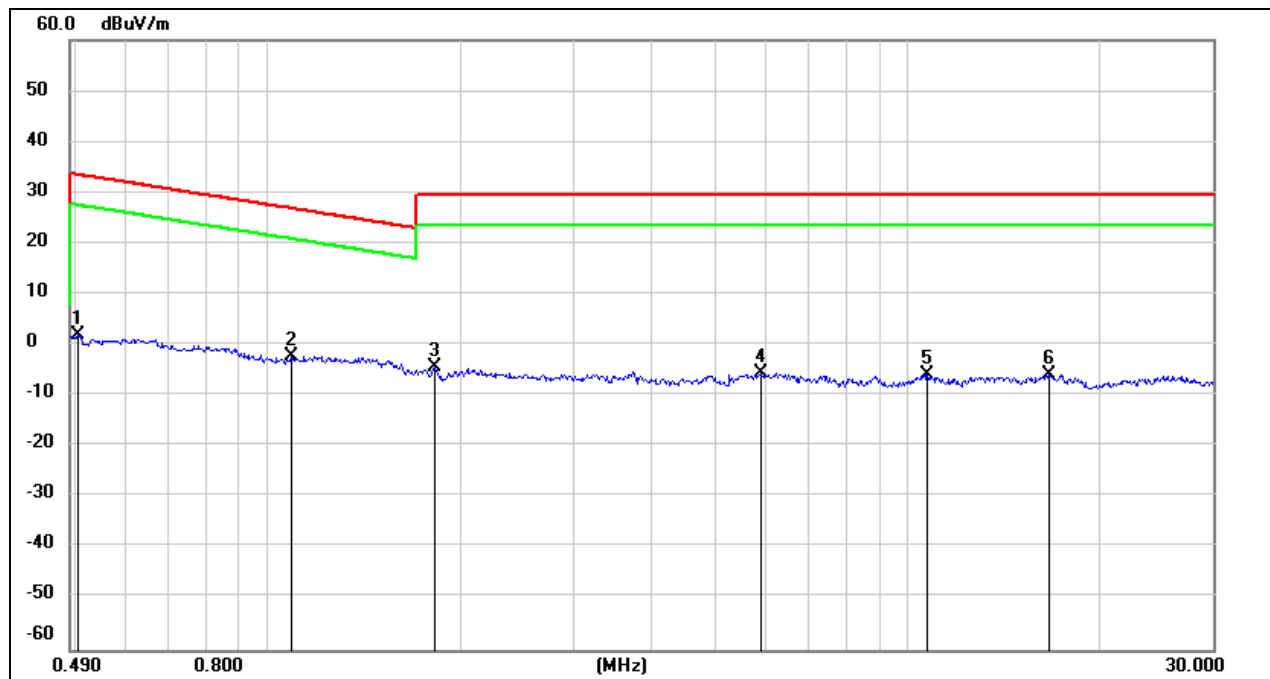

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	63.93	-62.07	1.86	33.56	-31.70	peak
2	1.0886	59.91	-62.22	-2.31	26.87	-29.18	peak
3	1.8205	57.45	-61.90	-4.45	29.54	-33.99	peak
4	5.9198	55.93	-61.36	-5.43	29.54	-34.97	peak
5	10.7299	54.98	-60.83	-5.85	29.54	-35.39	peak
6	16.6021	55.02	-60.96	-5.94	29.54	-35.48	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

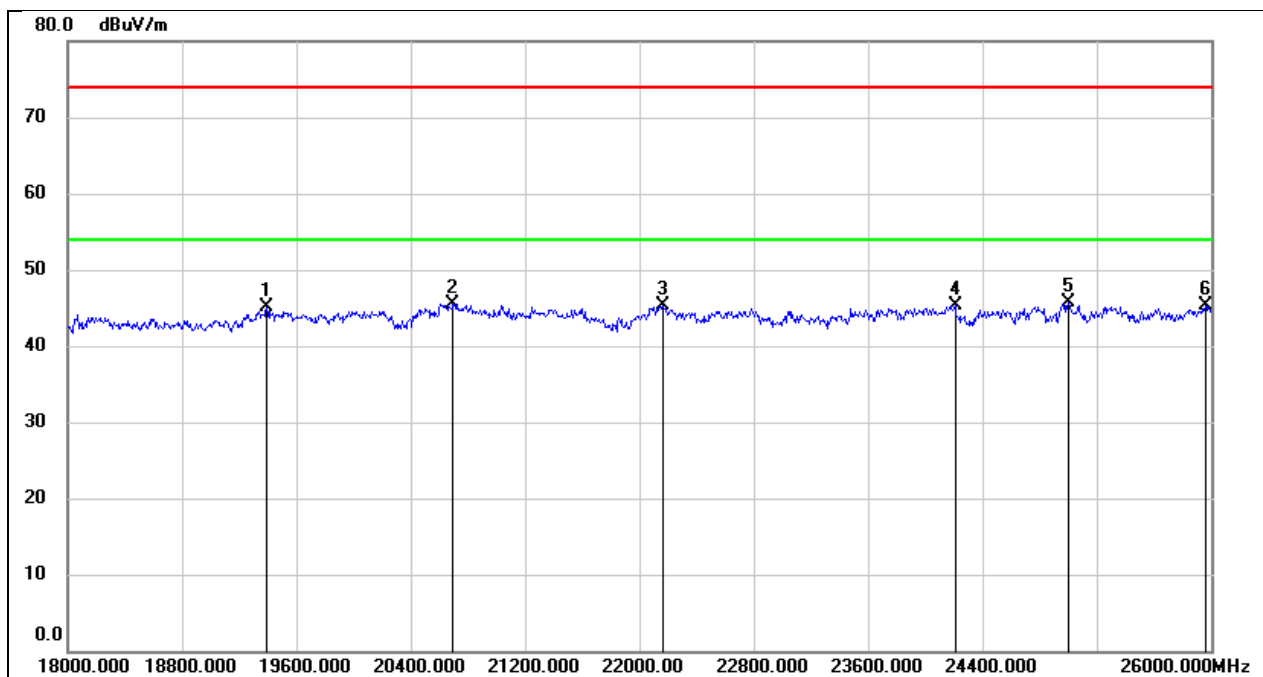

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19392.000	50.62	-5.57	45.05	74.00	-28.95	peak
2	20696.000	50.71	-5.16	45.55	74.00	-28.45	peak
3	22160.000	49.58	-4.31	45.27	74.00	-28.73	peak
4	24208.000	48.21	-2.81	45.40	74.00	-28.60	peak
5	25000.000	47.86	-2.10	45.76	74.00	-28.24	peak
6	25960.000	46.36	-0.99	45.37	74.00	-28.63	peak


Test Mode:	802.11b	Channel:	2412
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

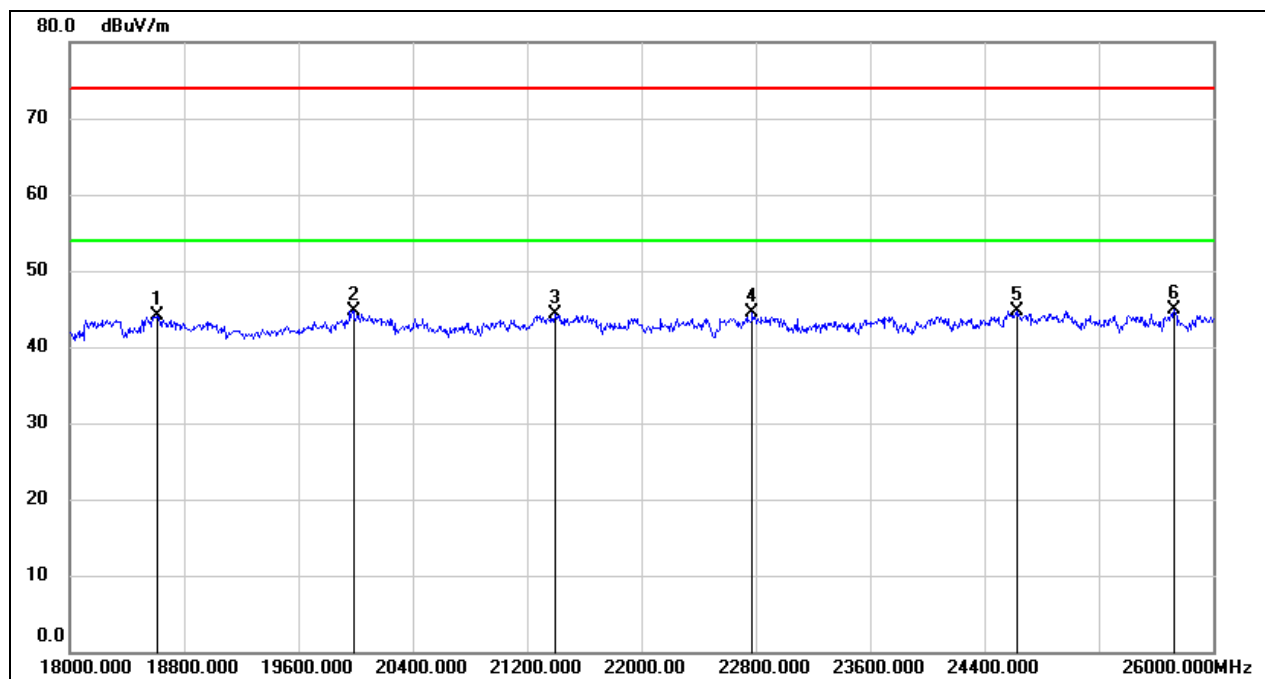

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	49.39	-5.34	44.05	74.00	-29.95	peak
2	19984.000	50.21	-5.44	44.77	74.00	-29.23	peak
3	21400.000	49.04	-4.72	44.32	74.00	-29.68	peak
4	22776.000	48.11	-3.66	44.45	74.00	-29.55	peak
5	24624.000	46.99	-2.33	44.66	74.00	-29.34	peak
6	25728.000	45.61	-0.72	44.89	74.00	-29.11	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Channel:	2412
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

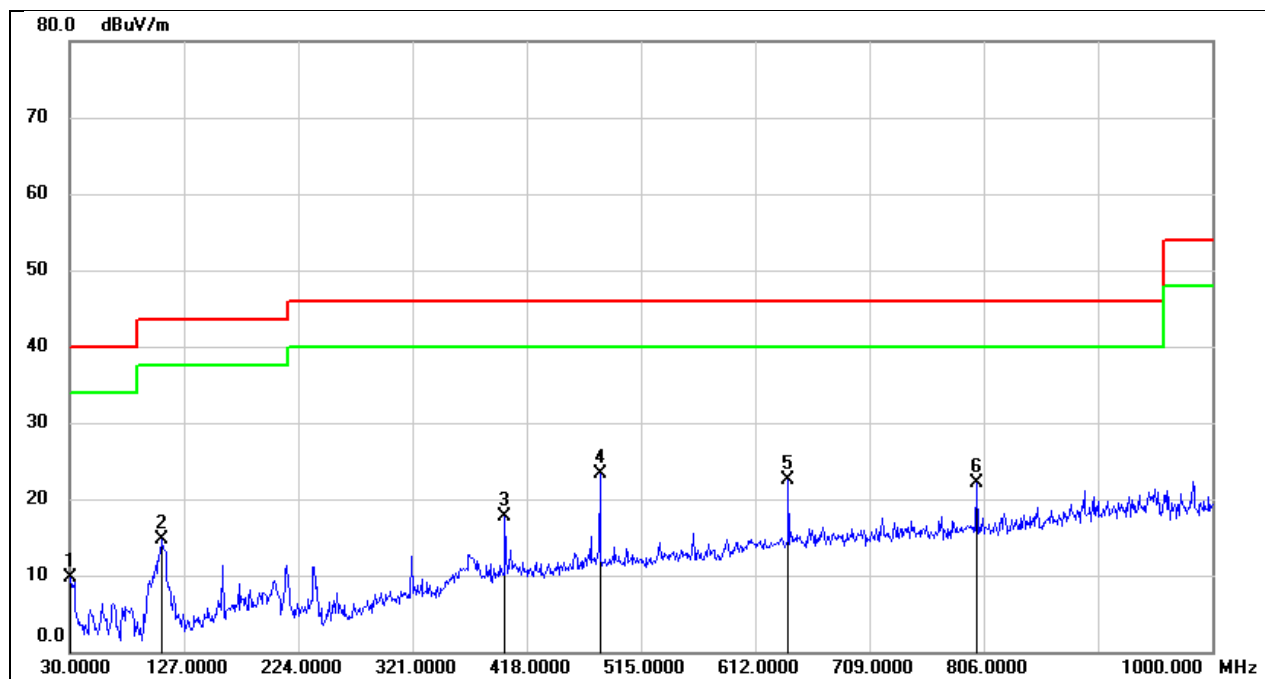

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	28.65	-19.04	9.61	40.00	-30.39	QP
2	108.5700	35.27	-20.53	14.74	43.50	-28.76	QP
3	399.5700	30.98	-13.37	17.61	46.00	-28.39	QP
4	480.0800	35.06	-11.79	23.27	46.00	-22.73	QP
5	640.1300	31.48	-9.03	22.45	46.00	-23.55	QP
6	800.1800	29.43	-7.33	22.10	46.00	-23.90	QP

Test Mode:	802.11b	Channel:	2462
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

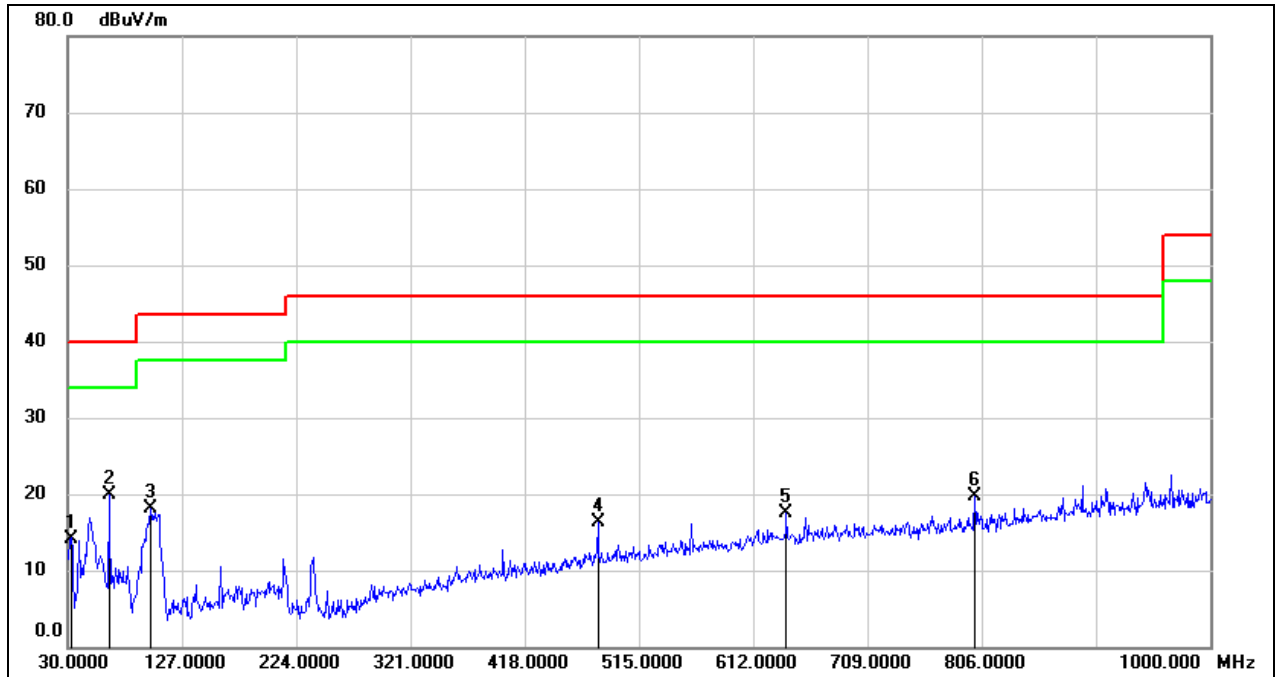

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	33.42	-19.22	14.20	40.00	-25.80	QP
2	64.9200	40.41	-20.54	19.87	40.00	-20.13	QP
3	99.8399	39.21	-21.15	18.06	43.50	-25.44	QP
4	480.0800	28.10	-11.79	16.31	46.00	-29.69	QP
5	640.1300	26.51	-9.03	17.48	46.00	-28.52	QP
6	800.1800	26.94	-7.33	19.61	46.00	-26.39	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

The antenna is an integral antenna, which is laid out on the PCBA and cannot be changed by the user.

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

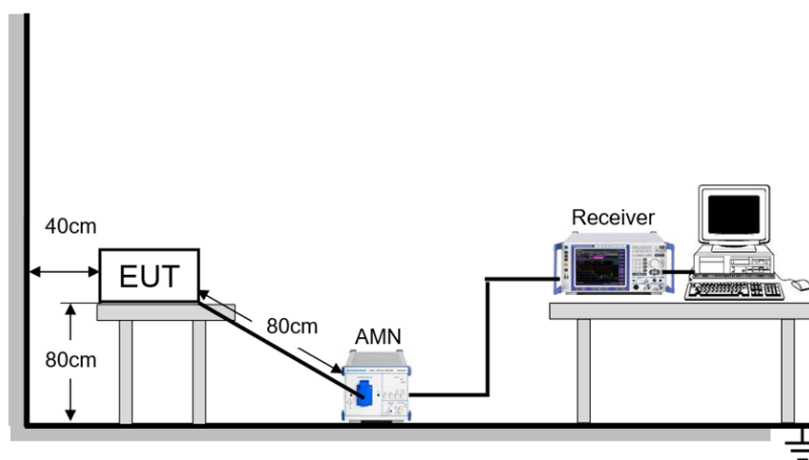

TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	59.3%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V_60Hz

TEST DATE / ENGINEER

Test Date	March 29, 2023	Test By	Wite Chen
-----------	----------------	---------	-----------

TEST RESULTS

Test Mode:	802.11b	Channel:	2412
Line:	Line	Test Voltage:	AC 120V_60Hz

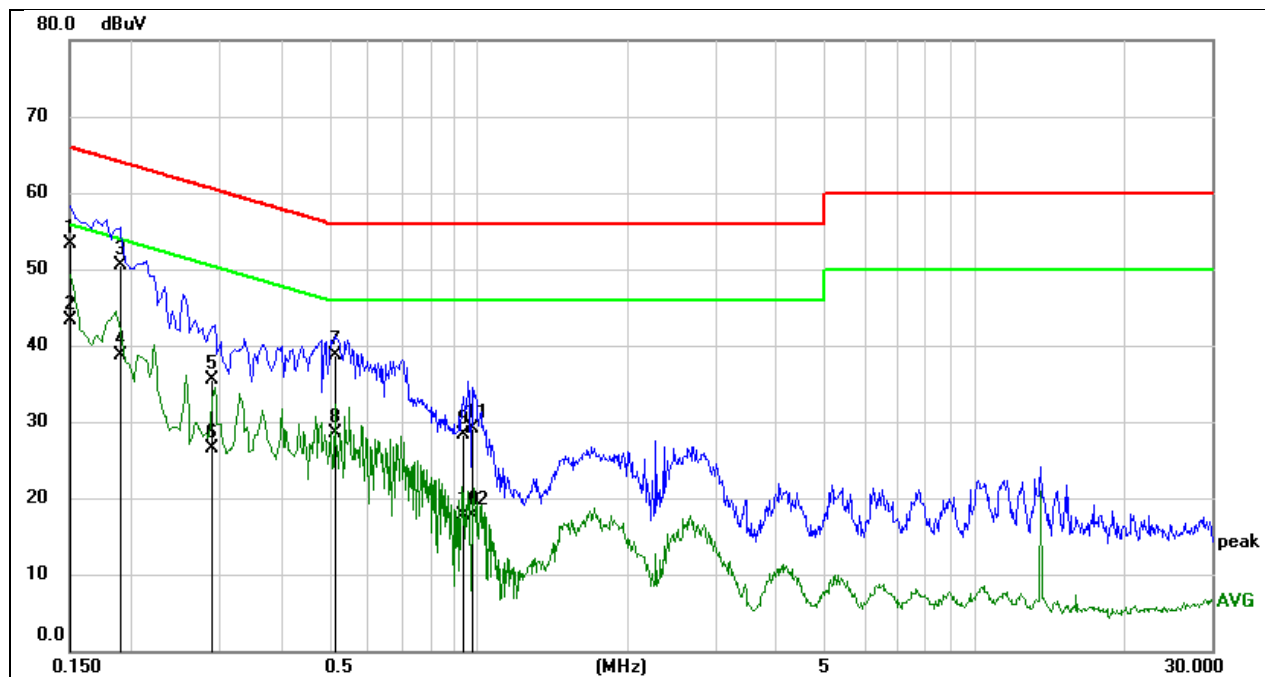


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1507	43.82	9.49	53.31	65.96	-12.65	QP
2	0.1507	33.84	9.49	43.33	55.96	-12.63	AVG
3	0.1901	41.01	9.57	50.58	64.03	-13.45	QP
4	0.1901	29.10	9.57	38.67	54.03	-15.36	AVG
5	0.2906	25.98	9.56	35.54	60.51	-24.97	QP
6	0.2906	16.96	9.56	26.52	50.51	-23.99	AVG
7	0.5164	29.26	9.50	38.76	56.00	-17.24	QP
8	0.5164	19.01	9.50	28.51	46.00	-17.49	AVG
9	0.9418	18.77	9.51	28.28	56.00	-27.72	QP
10	0.9418	8.14	9.51	17.65	46.00	-28.35	AVG
11	0.9696	19.66	9.51	29.17	56.00	-26.83	QP
12	0.9696	8.21	9.51	17.72	46.00	-28.28	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Channel:	2412
Line:	Neutral	Test Voltage:	AC 120V_60Hz

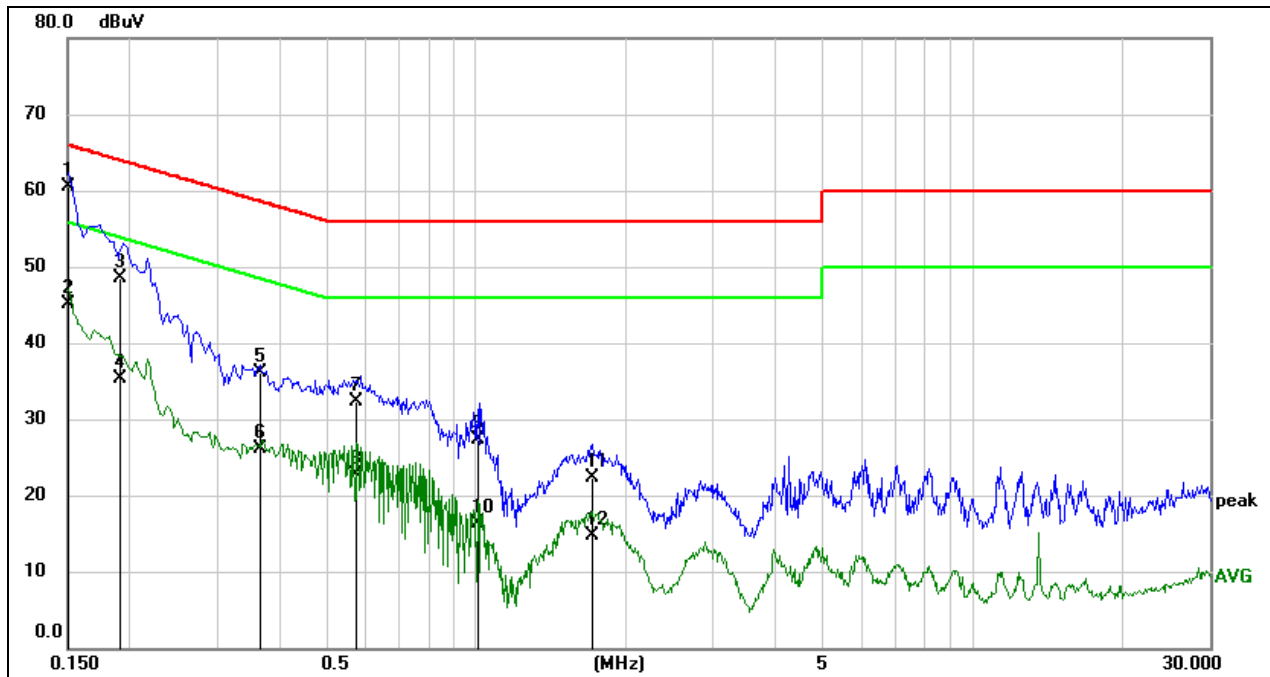

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	51.01	9.49	60.50	66.00	-5.50	QP
2	0.1500	35.52	9.49	45.01	56.00	-10.99	AVG
3	0.1905	38.94	9.57	48.51	64.01	-15.50	QP
4	0.1905	25.75	9.57	35.32	54.01	-18.69	AVG
5	0.3654	26.61	9.53	36.14	58.60	-22.46	QP
6	0.3654	16.60	9.53	26.13	48.60	-22.47	AVG
7	0.5757	22.85	9.50	32.35	56.00	-23.65	QP
8	0.5757	13.23	9.50	22.73	46.00	-23.27	AVG
9	1.0043	17.77	9.51	27.28	56.00	-28.72	QP
10	1.0043	6.73	9.51	16.24	46.00	-29.76	AVG
11	1.7146	12.69	9.59	22.28	56.00	-33.72	QP
12	1.7146	5.03	9.59	14.62	46.00	-31.38	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


11. TEST DATA

11.1. APPENDIX A: DTS BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.56	2407.92	2416.48	0.5	PASS
		2417	9.04	2412.44	2421.48	0.5	PASS
		2437	9.04	2432.44	2441.48	0.5	PASS
		2457	9.04	2452.44	2461.48	0.5	PASS
		2462	9.04	2457.44	2466.48	0.5	PASS
11G	Ant1	2412	16.32	2403.80	2420.12	0.5	PASS
		2417	16.32	2408.80	2425.12	0.5	PASS
		2437	16.32	2428.80	2445.12	0.5	PASS
		2457	16.32	2448.80	2465.12	0.5	PASS
		2462	16.32	2453.80	2470.12	0.5	PASS
11N20SISO	Ant1	2412	17.60	2403.16	2420.76	0.5	PASS
		2417	17.56	2408.20	2425.76	0.5	PASS
		2437	17.56	2428.20	2445.76	0.5	PASS
		2457	17.56	2448.20	2465.76	0.5	PASS
		2462	17.56	2453.20	2470.76	0.5	PASS

11.1.2. Test Graphs

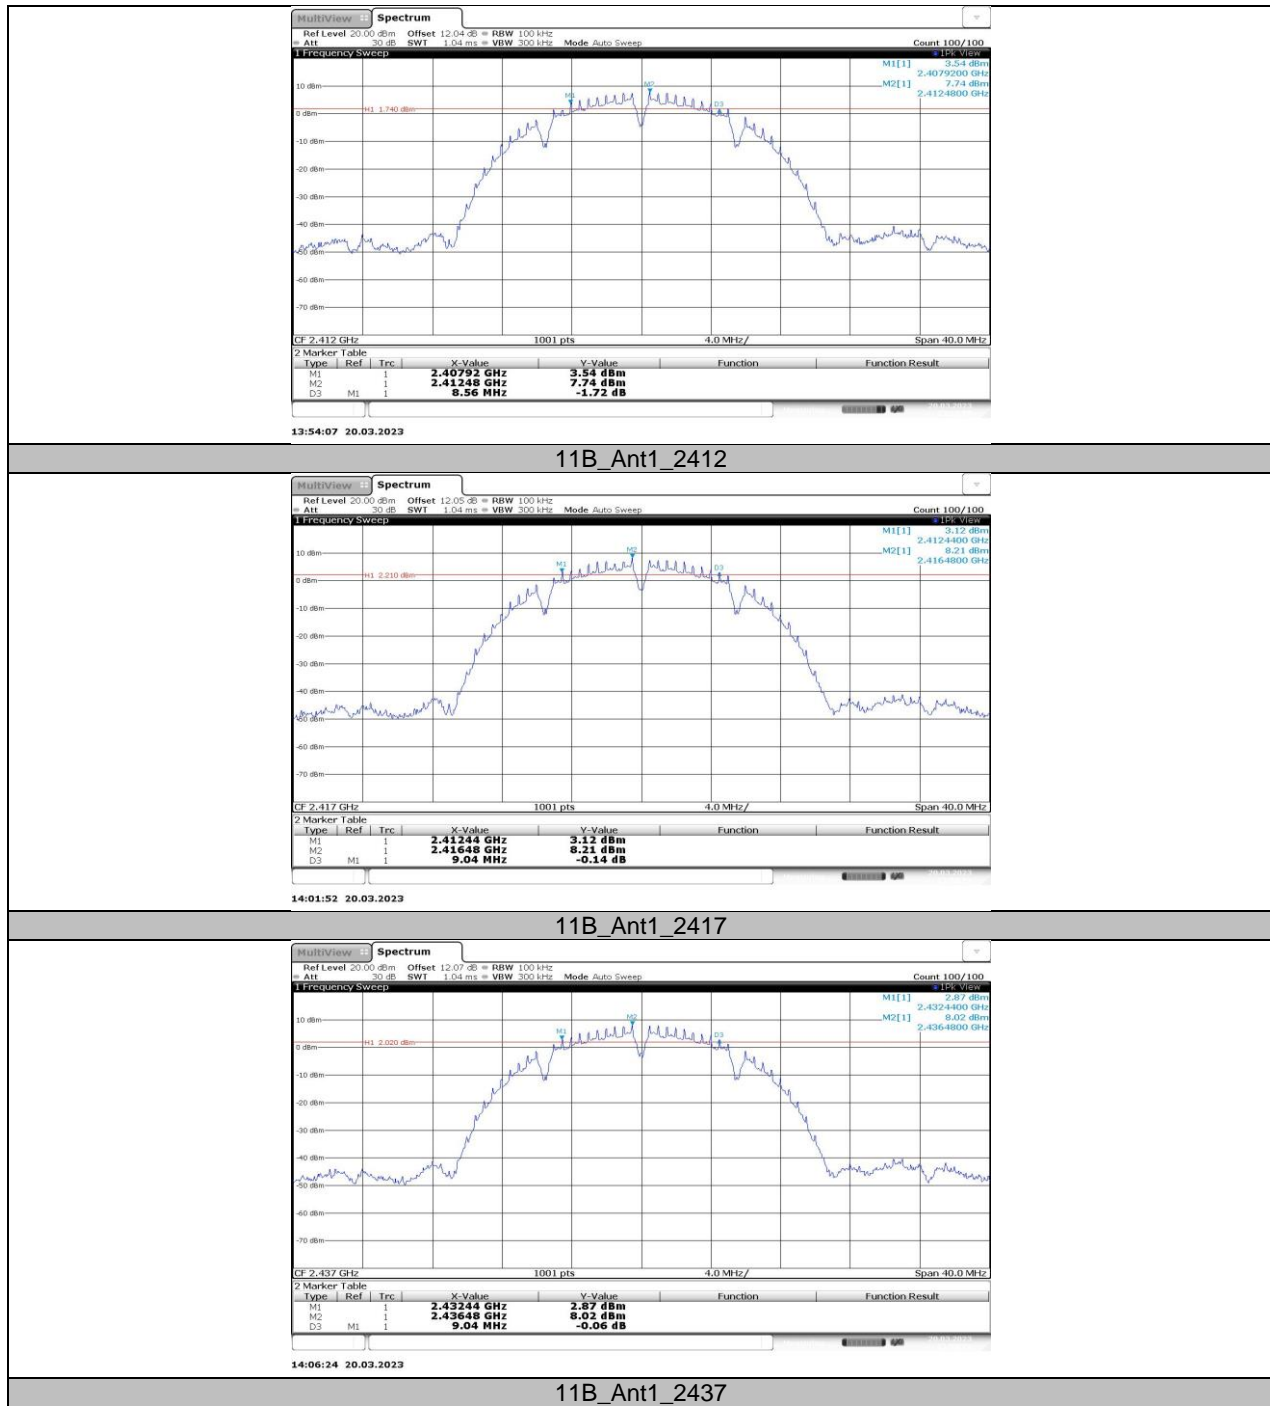





11B_Ant1_2457




11B_Ant1_2462

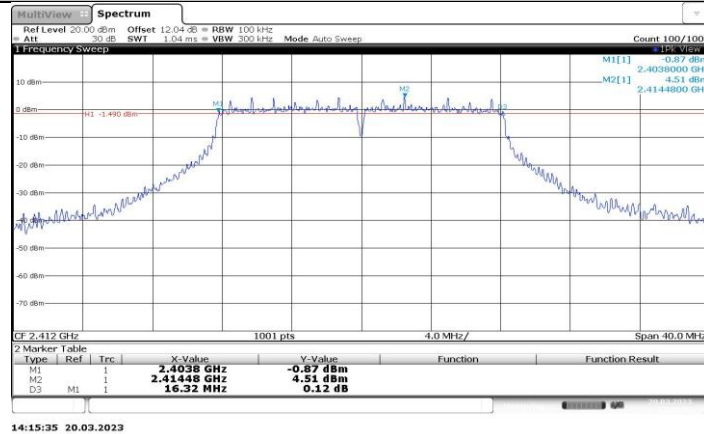


11G_Ant1_2412

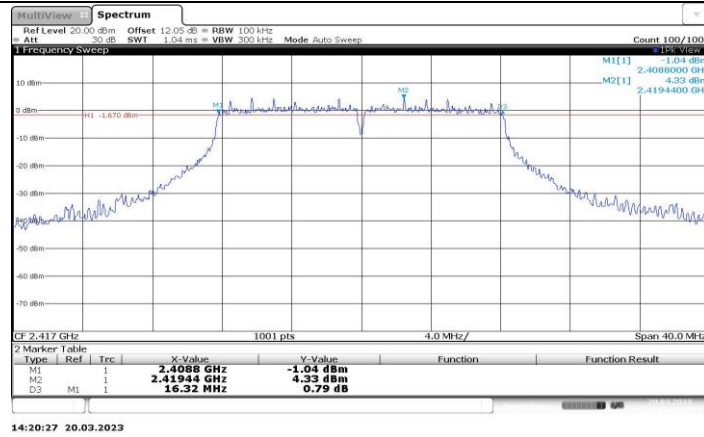


11G_Ant1_2417

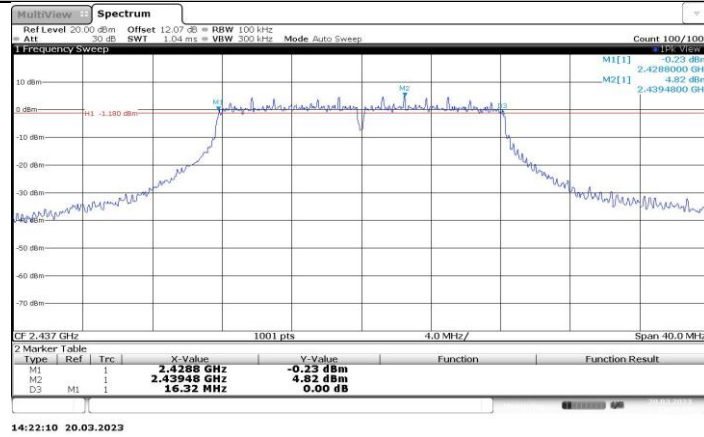


11G_Ant1_2437

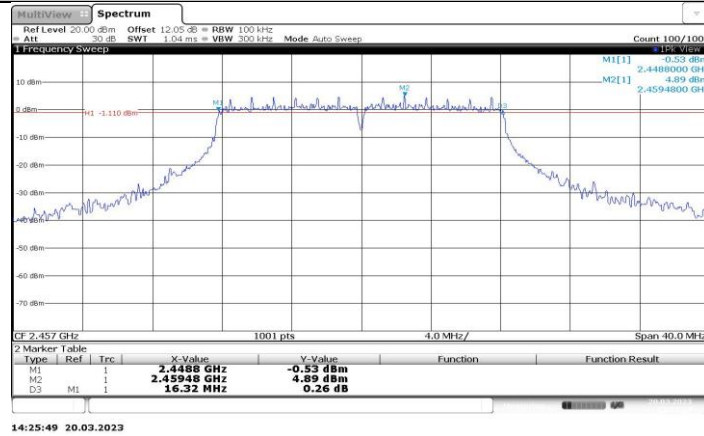


11G_Ant1_2457

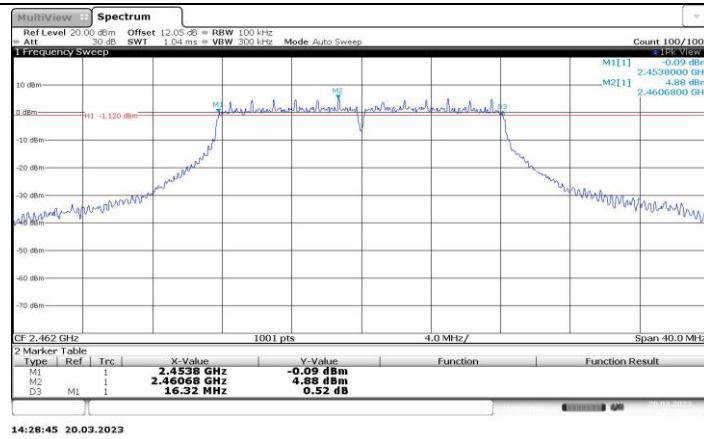


11G_Ant1_2462

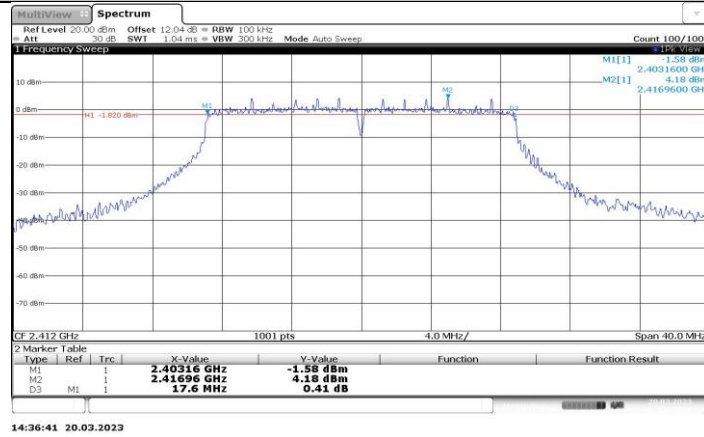


11N20SISO_Ant1_2412

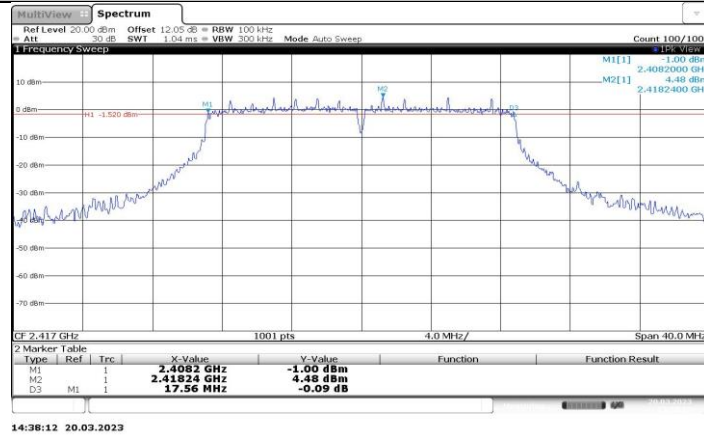


11N20SISO_Ant1_2417

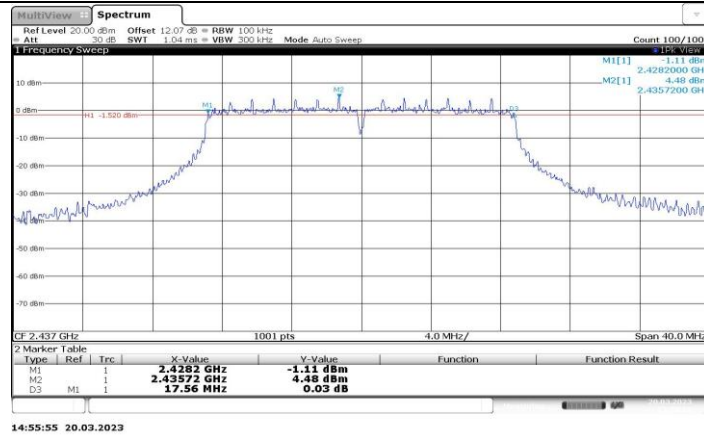

11N20SISO_Ant1_2437

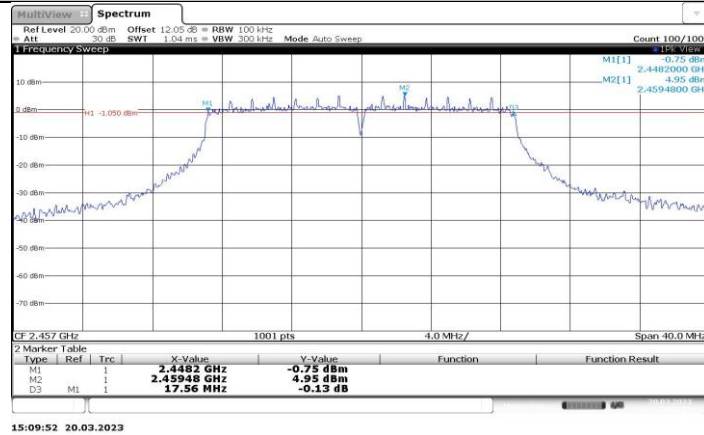

11N20SISO_Ant1_2457

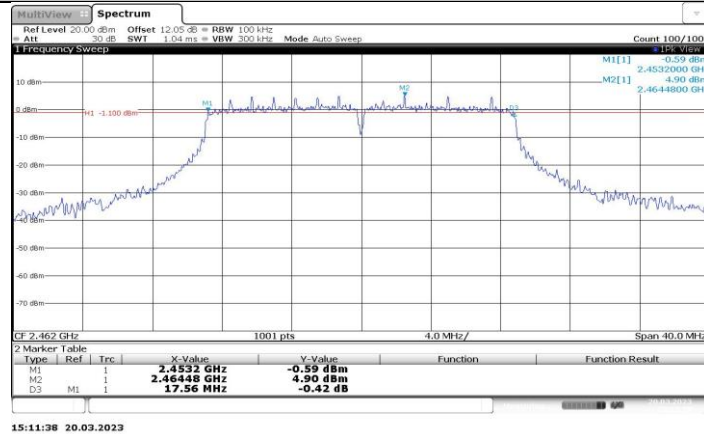


11N20SISO_Ant1_2462


11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

11.2.1. Test Result


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	14.002	2404.9426	2418.9448	PASS
		2417	14.016	2409.9311	2423.9473	PASS
		2437	14.021	2429.9379	2443.9593	PASS
		2457	14.003	2449.9600	2463.9629	PASS
		2462	13.997	2454.9641	2468.9613	PASS
11G	Ant1	2412	17.694	2403.1302	2420.8239	PASS
		2417	17.59	2408.1626	2425.7526	PASS
		2437	17.65	2428.0878	2445.7375	PASS
		2457	17.65	2448.2340	2465.8843	PASS
		2462	17.63	2453.1789	2470.8086	PASS
11N20SISO	Ant1	2412	18.672	2402.6614	2421.3331	PASS
		2417	18.515	2407.6745	2426.1891	PASS
		2437	18.505	2427.7317	2446.2369	PASS
		2457	18.707	2447.6647	2466.3716	PASS
		2462	18.562	2452.7263	2471.2887	PASS

11.2.2. Test Graphs

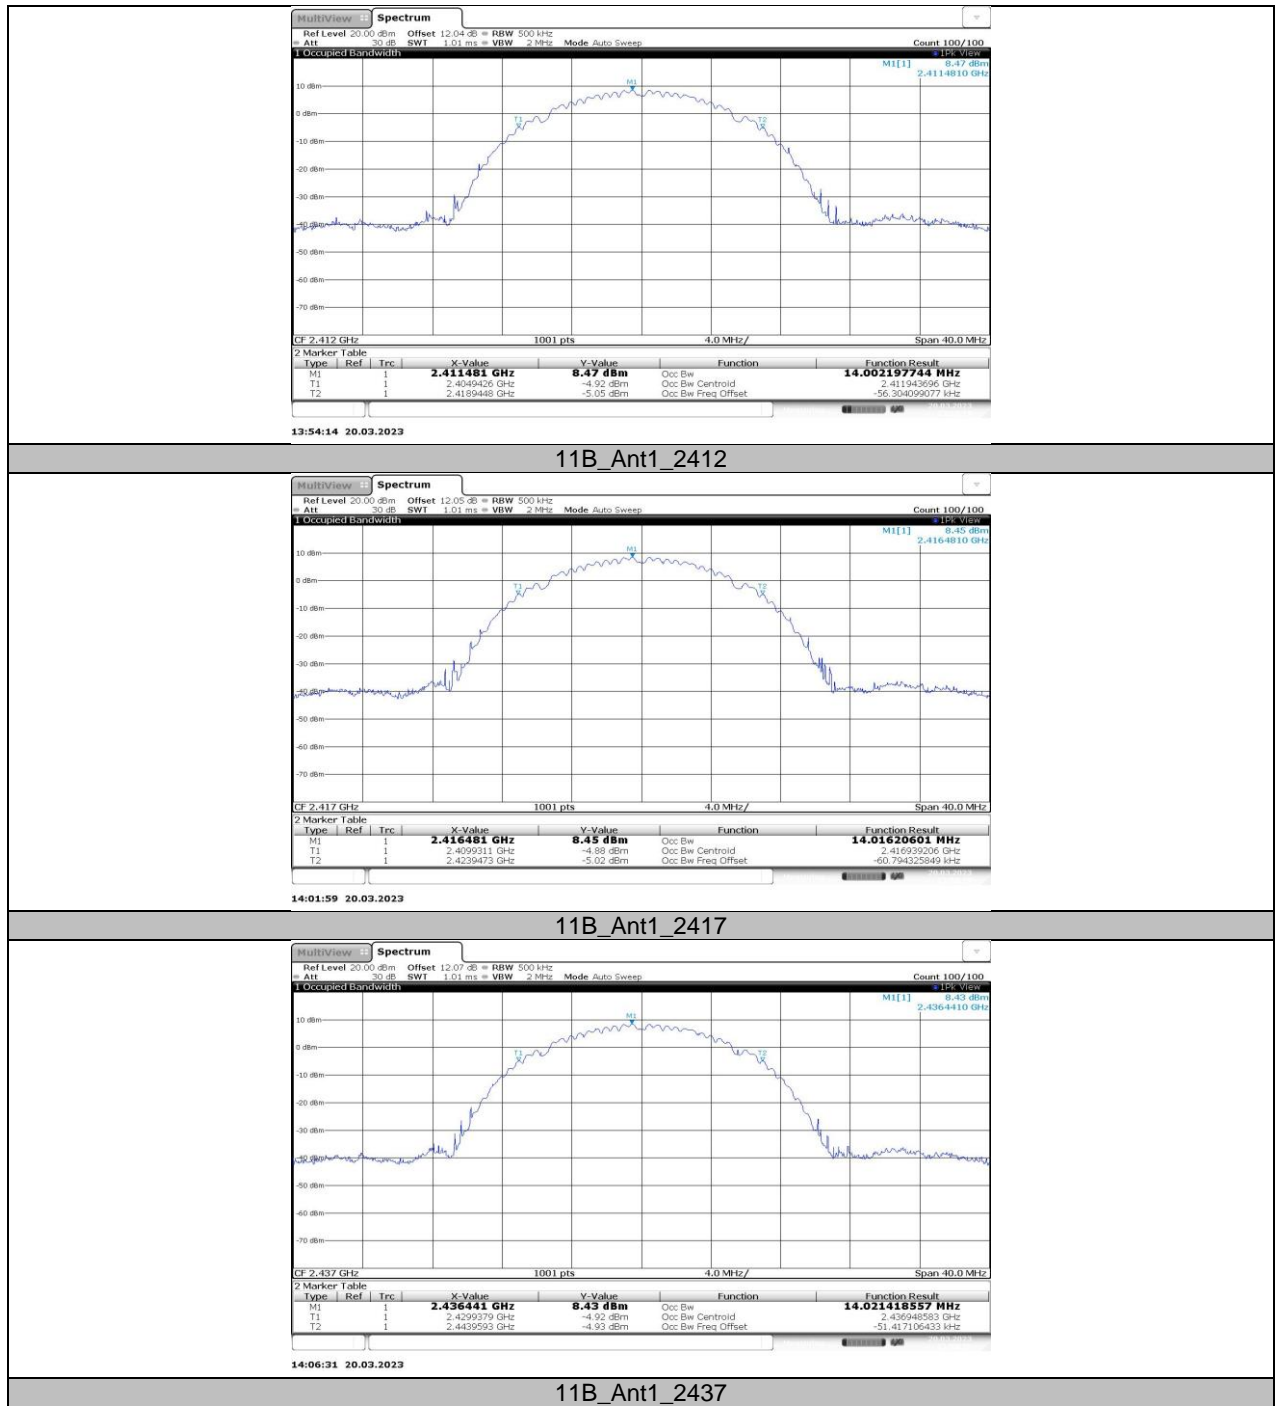


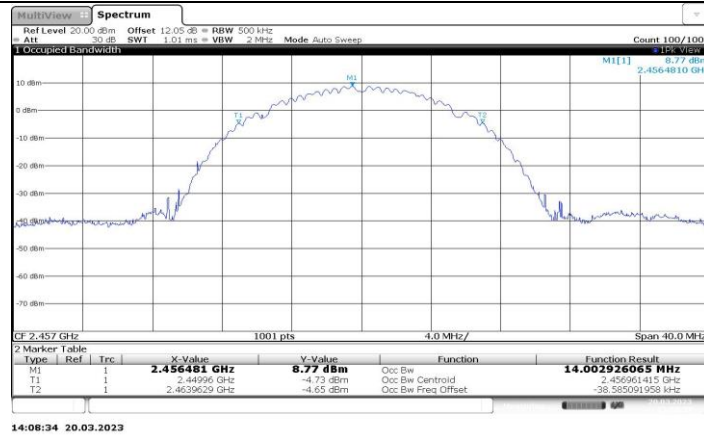


11B_Ant1_2457

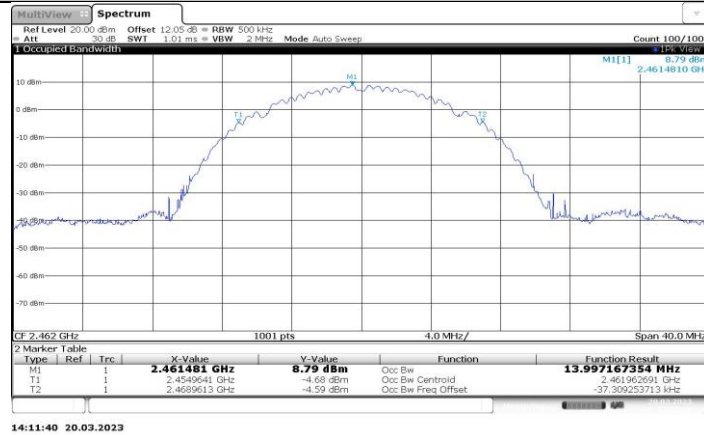


11B_Ant1_2462

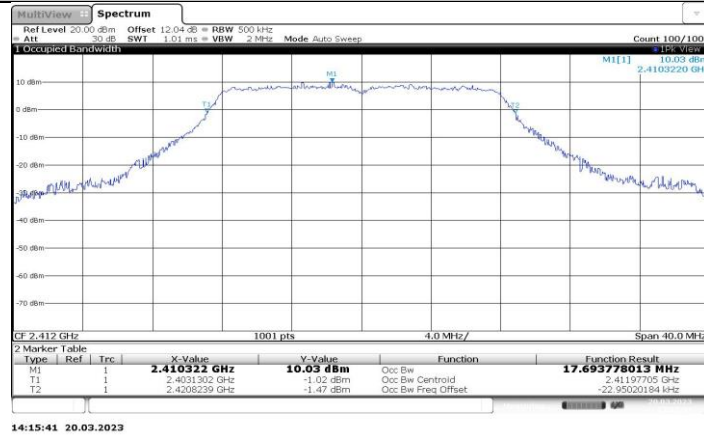


11G_Ant1_2412

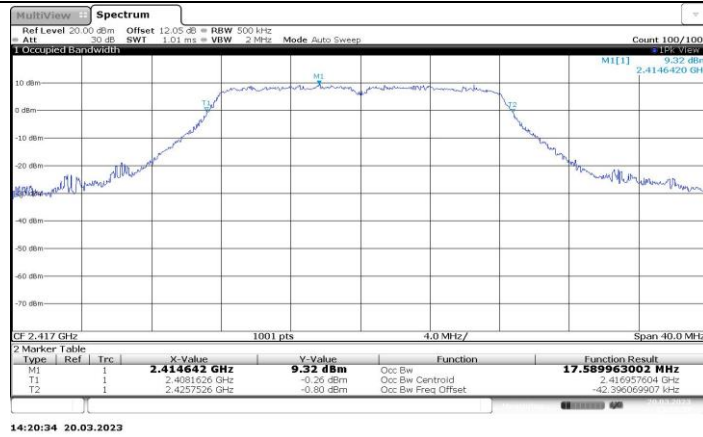




11G_Ant1_2417

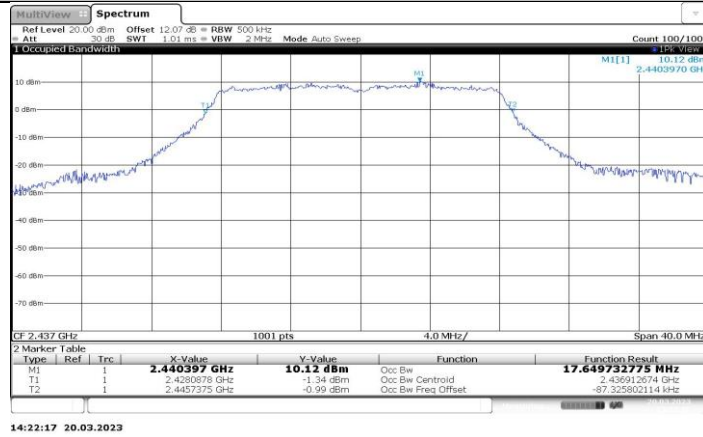


11G_Ant1_2437

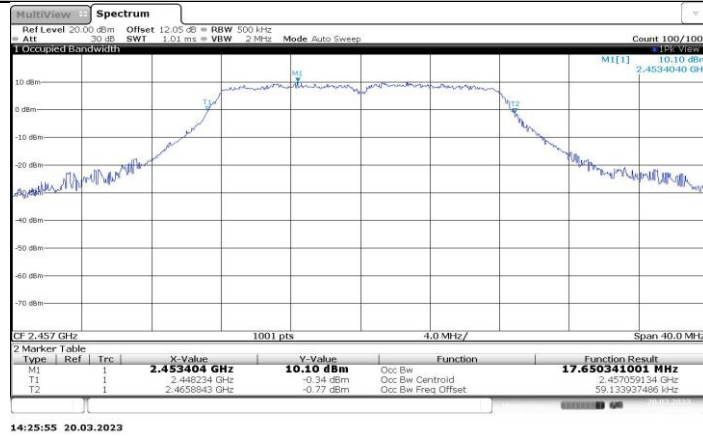


11G_Ant1_2457

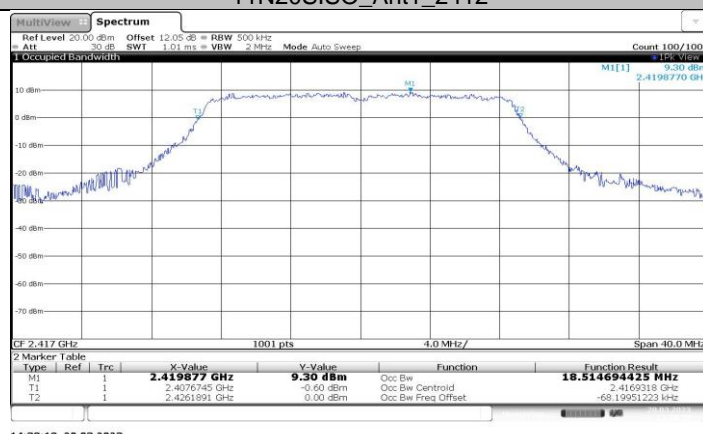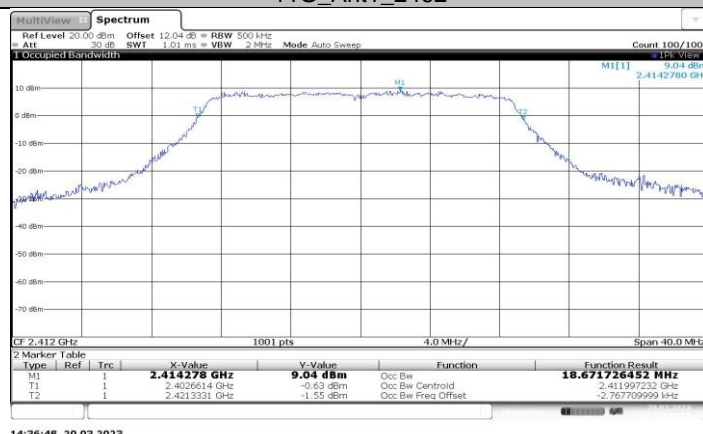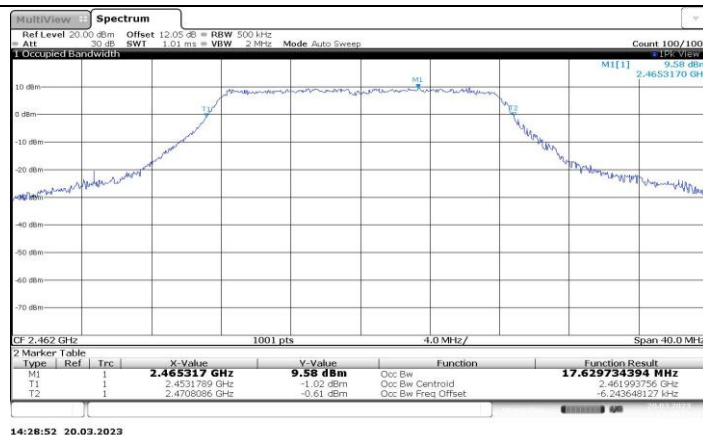


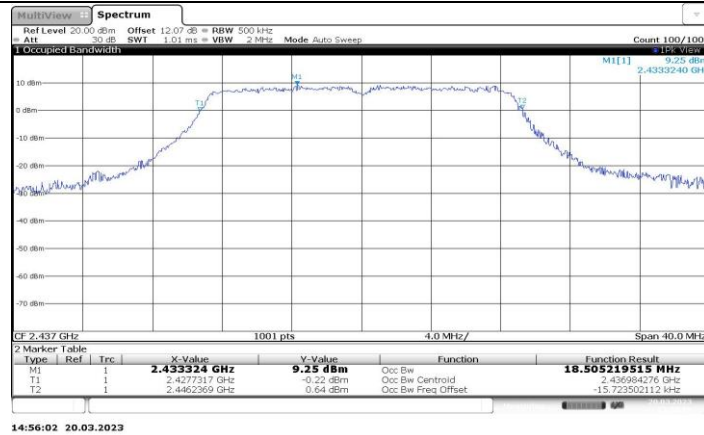

11N20SISO_Ant1_2437

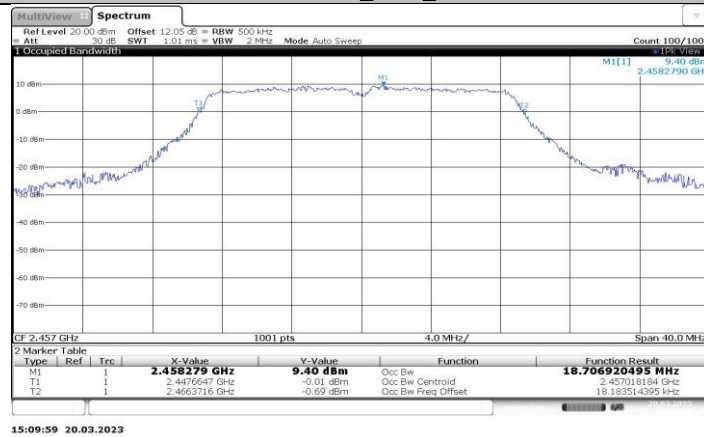

11N20SISO_Ant1_2457

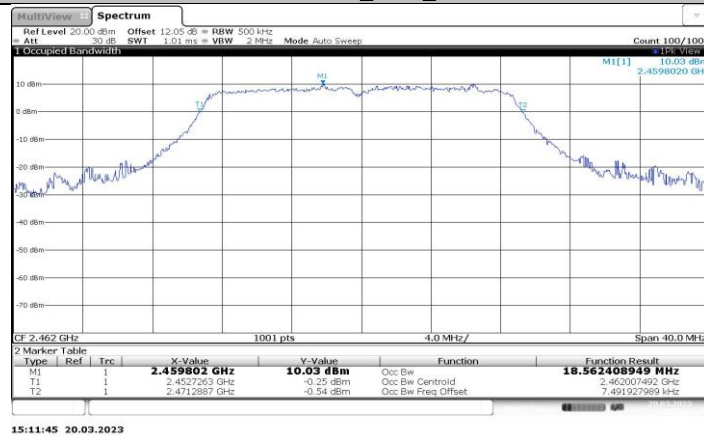

11N20SISO_Ant1_2462

11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

11.3.1. Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	18.55	≤30.00	PASS
		2417	18.57	≤30.00	PASS
		2437	18.16	≤30.00	PASS
		2457	19.09	≤30.00	PASS
		2462	18.59	≤30.00	PASS
11G	Ant1	2412	17.68	≤30.00	PASS
		2417	17.79	≤30.00	PASS
		2437	18.16	≤30.00	PASS
		2457	18.23	≤30.00	PASS
		2462	18.23	≤30.00	PASS
11N20SISO	Ant1	2412	17.73	≤30.00	PASS
		2417	17.35	≤30.00	PASS
		2437	17.99	≤30.00	PASS
		2457	18.26	≤30.00	PASS
		2462	18.14	≤30.00	PASS

Note: 1. Conducted Power=Meas. Level+ Correction Factor

2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.


11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY


11.4.1. Test Result


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-14.68	≤8.00	PASS
		2417	-14.99	≤8.00	PASS
		2437	-14.91	≤8.00	PASS
		2457	-14.66	≤8.00	PASS
		2462	-14.68	≤8.00	PASS
11G	Ant1	2412	-15.33	≤8.00	PASS
		2417	-15.62	≤8.00	PASS
		2437	-16.22	≤8.00	PASS
		2457	-15.43	≤8.00	PASS
		2462	-15.99	≤8.00	PASS
11N20SISO	Ant1	2412	-16.22	≤8.00	PASS
		2417	-15.97	≤8.00	PASS
		2437	-15.49	≤8.00	PASS
		2457	-16.29	≤8.00	PASS
		2462	-16.09	≤8.00	PASS

Note: 1. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test graph.


11.4.2. Test Graphs

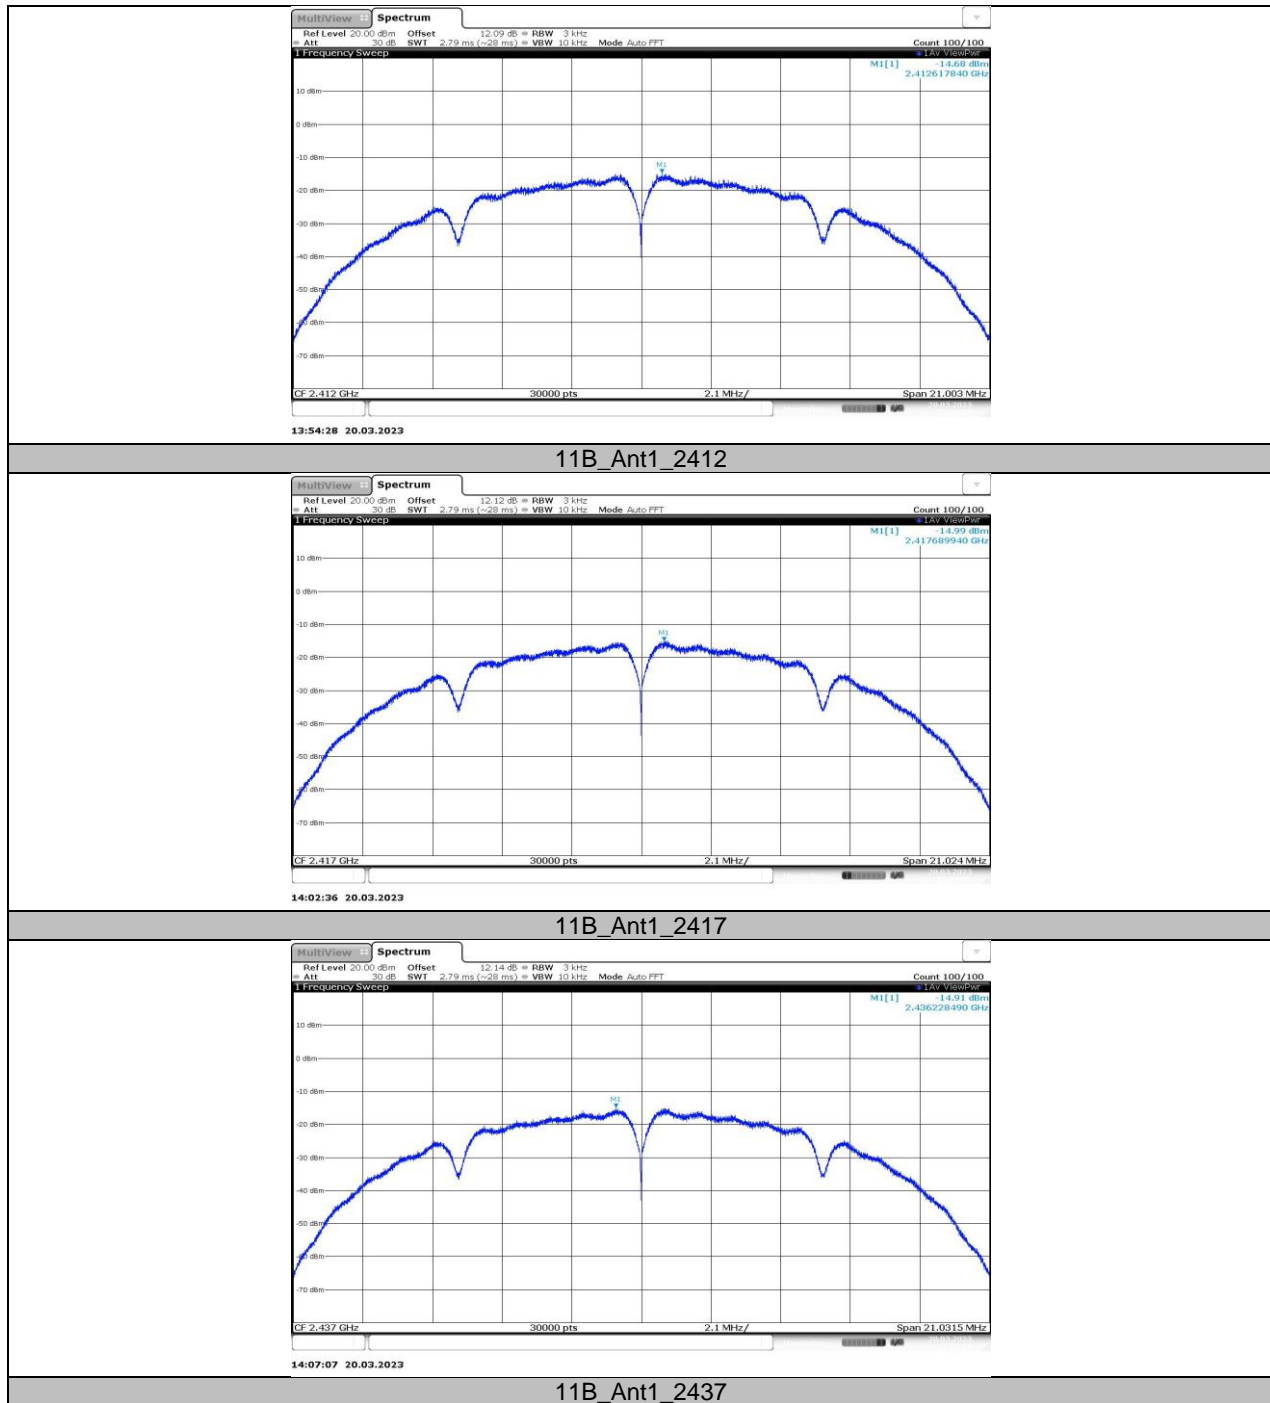

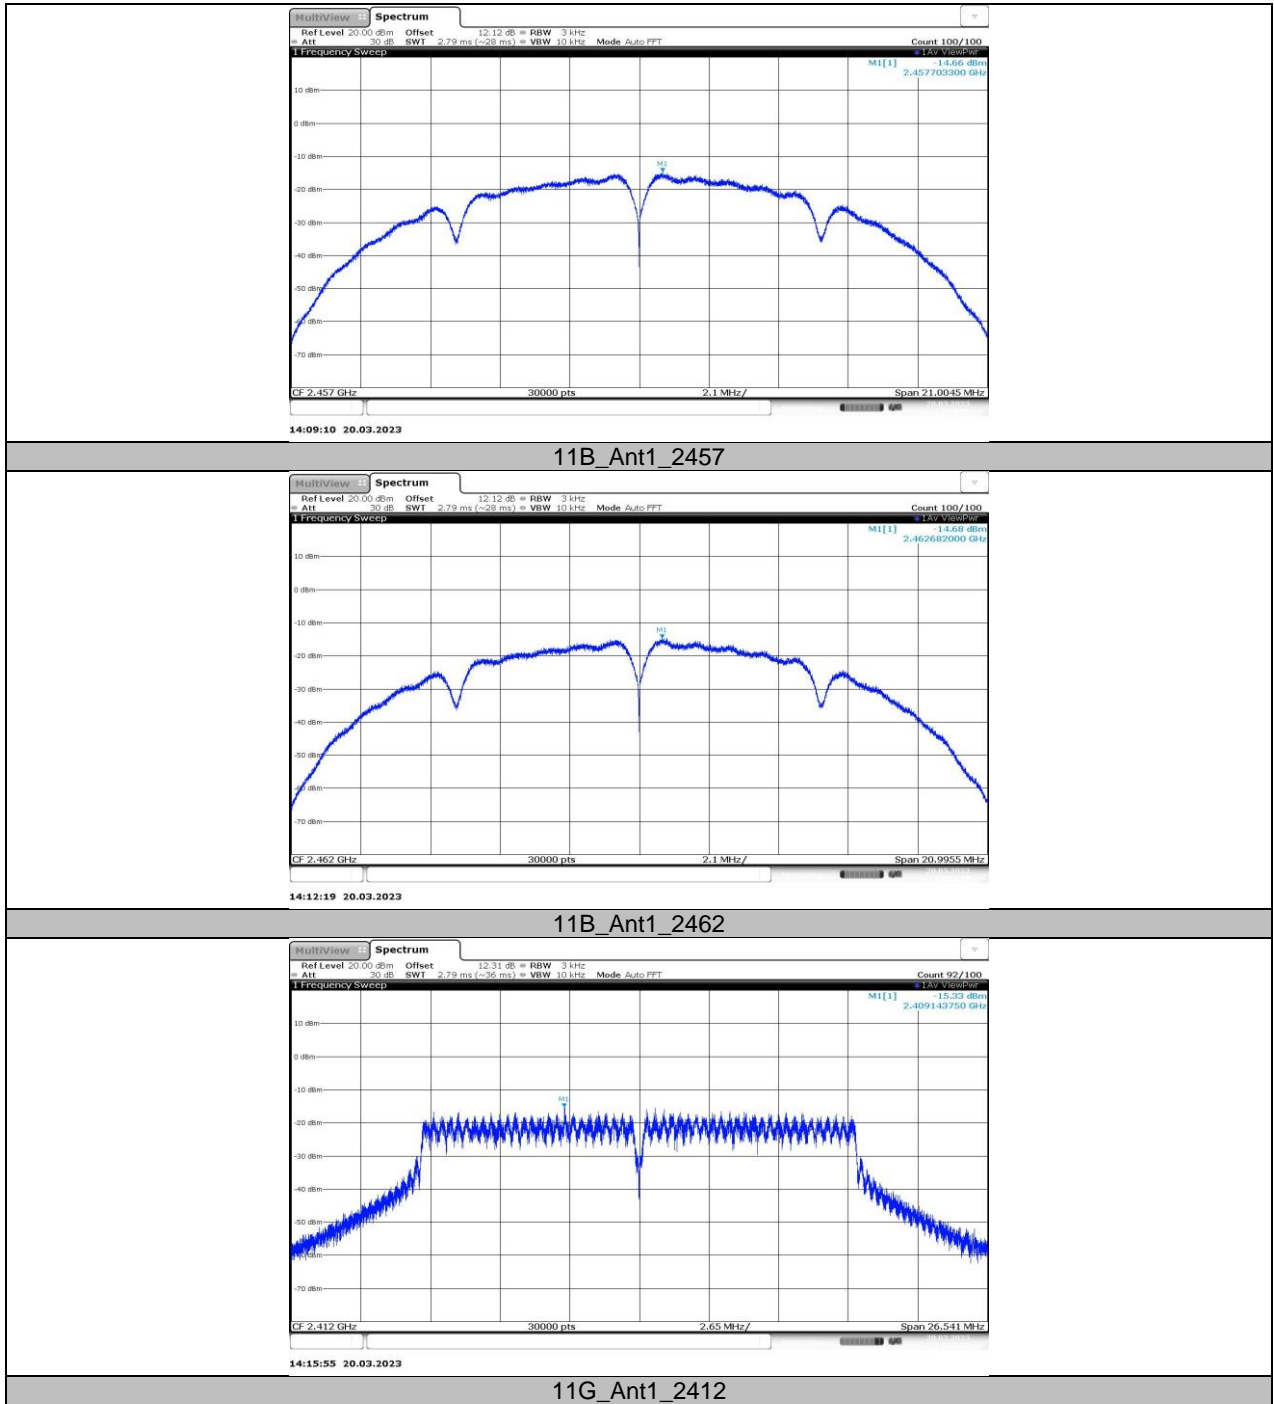


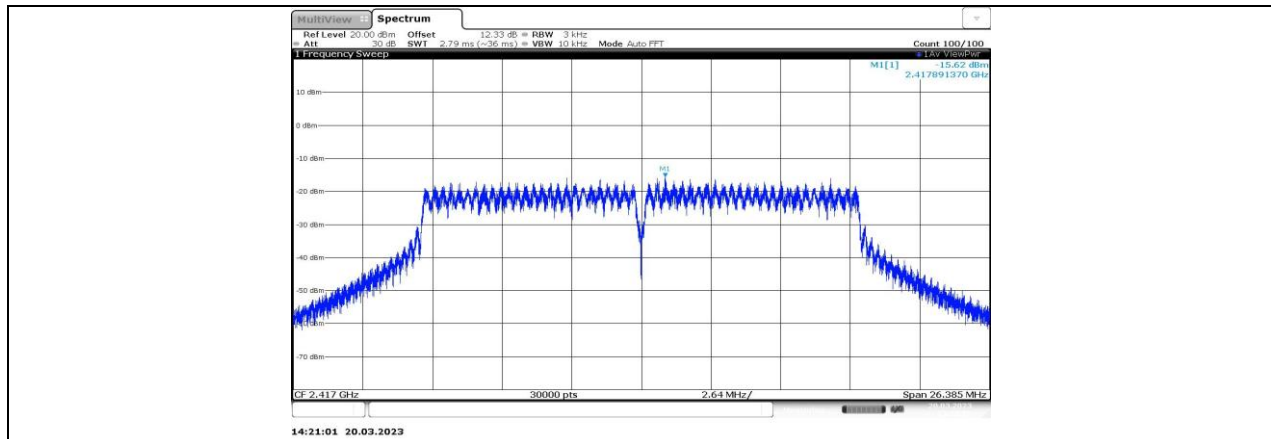


11G_Ant1_2417

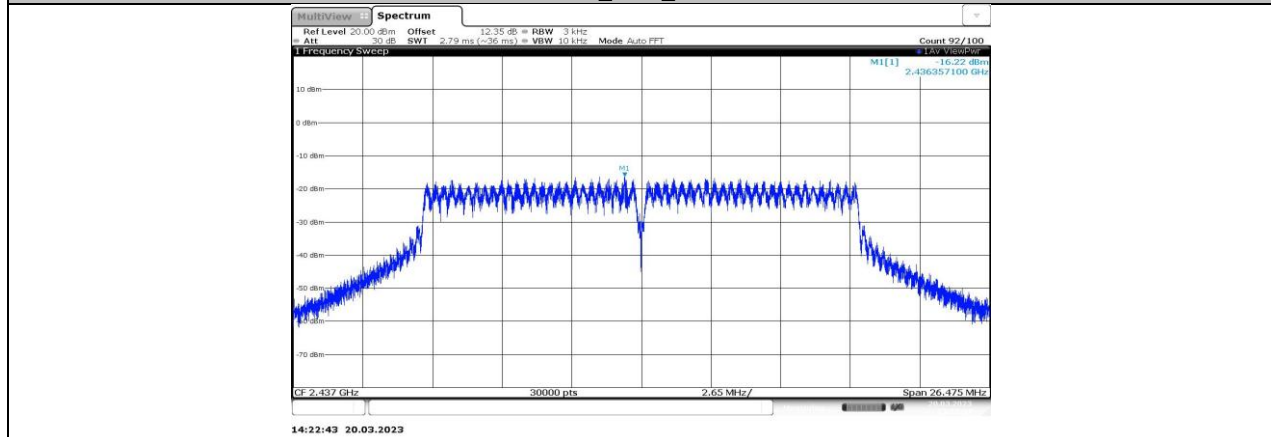


11G_Ant1_2437

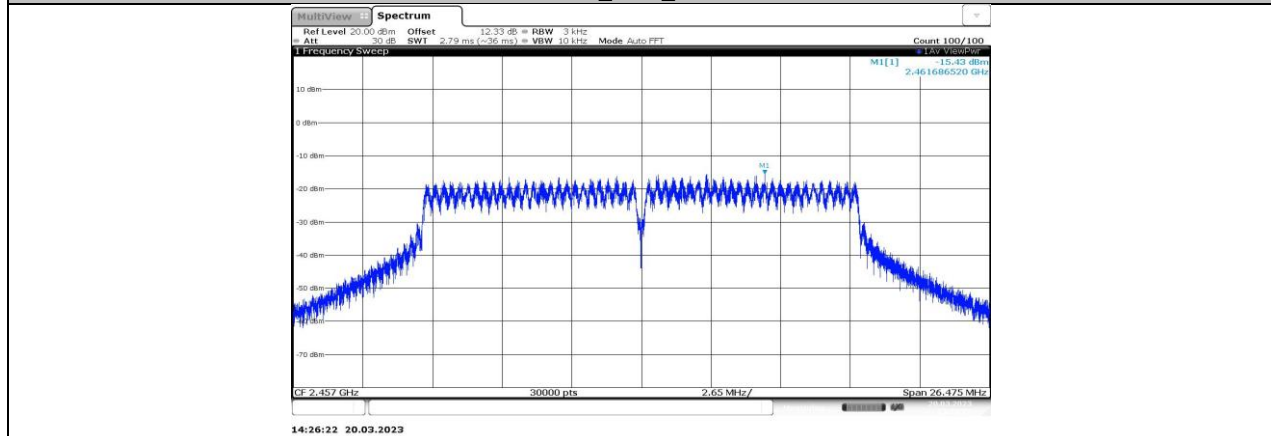


11G_Ant1_2457

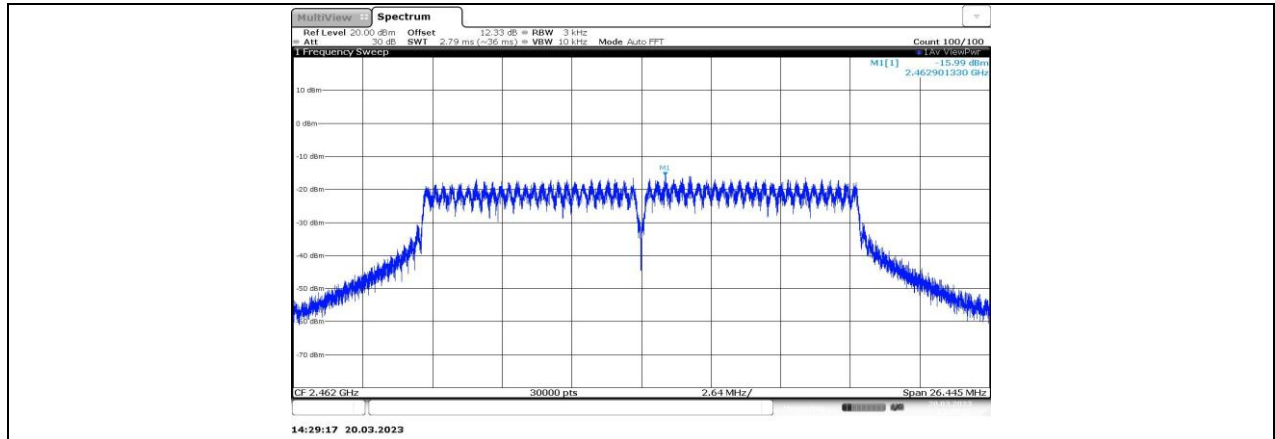


11G_Ant1_2462

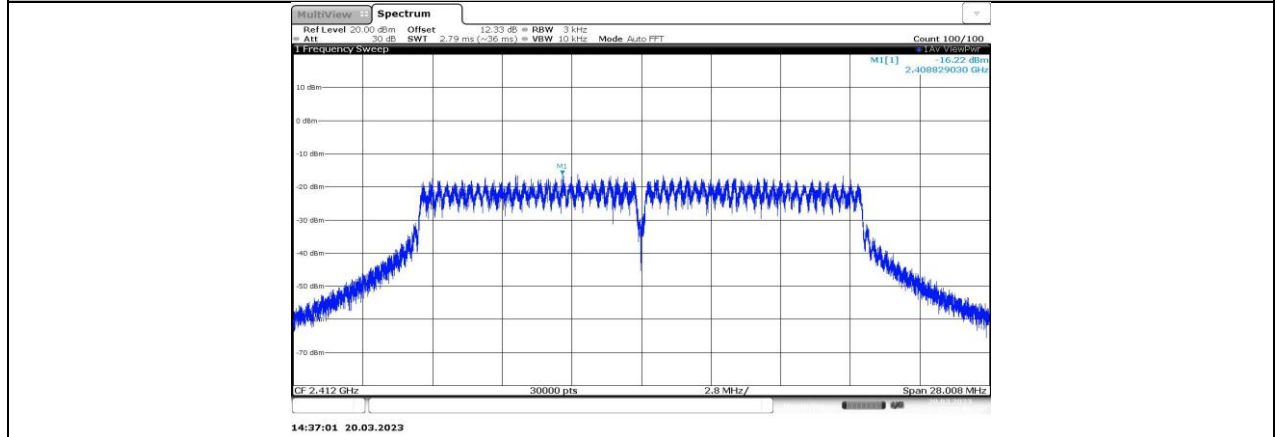

11N20SISO_Ant1_2412

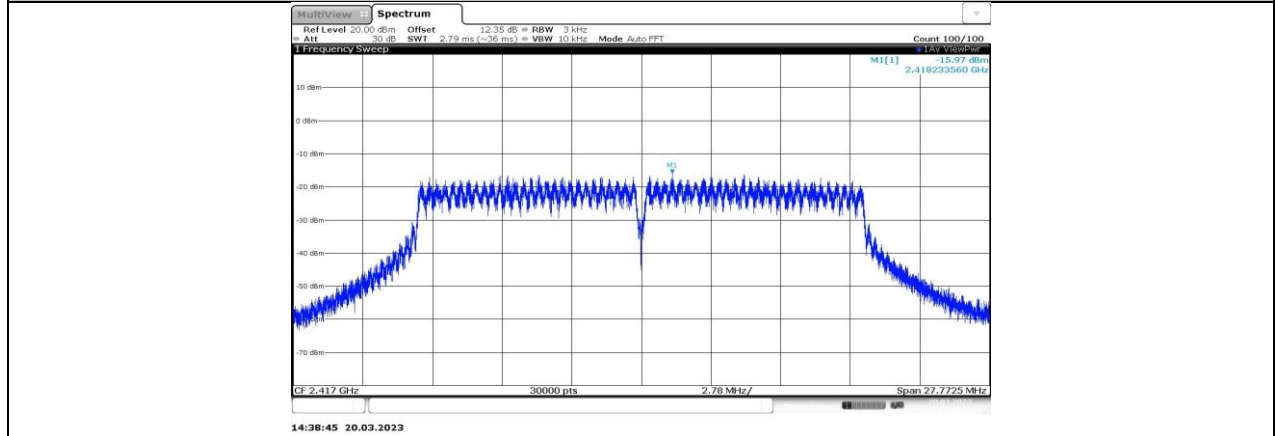

11N20SISO_Ant1_2417

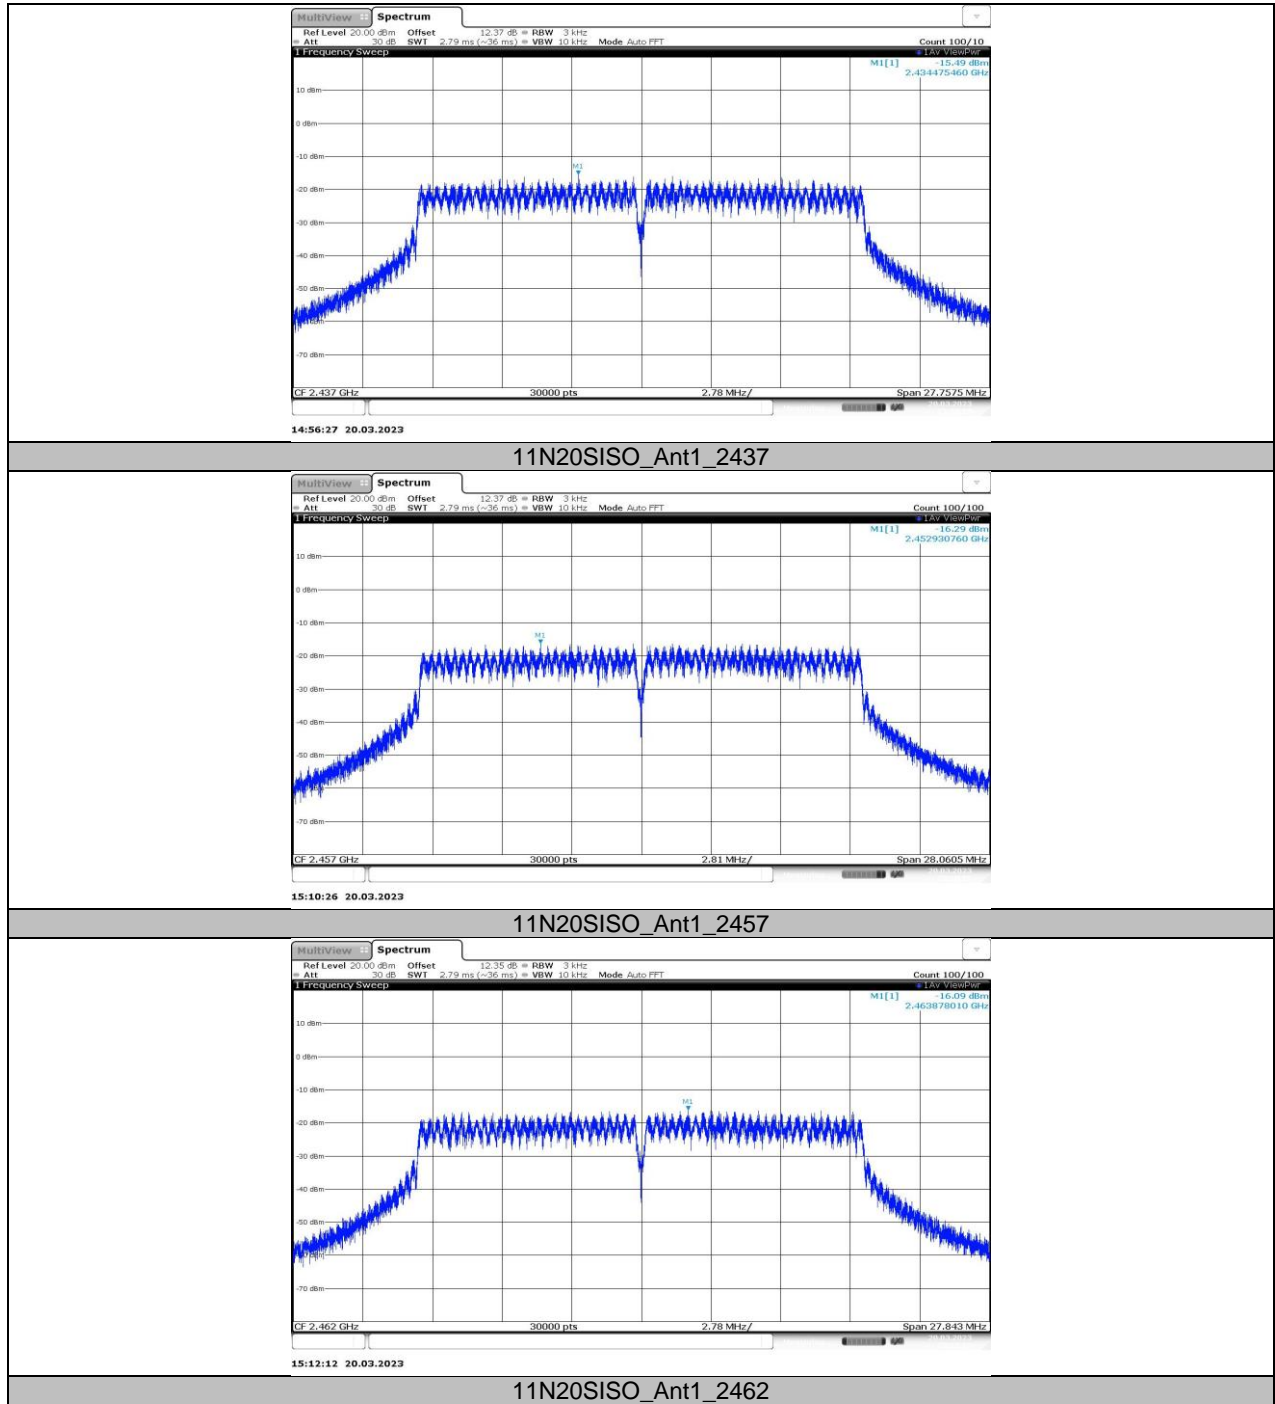



11.5. APPENDIX E: BAND EDGE MEASUREMENTS

11.5.1. Test Result


Test Mode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	7.43	-42.6	≤-22.57	PASS
			2417	7.41	-44.99	≤-22.59	PASS
		High	2457	7.95	-47.29	≤-22.05	PASS
			2462	8.03	-47.04	≤-21.97	PASS
11G	Ant1	Low	2412	3.97	-28.15	≤-26.03	PASS
			2417	4.00	-35.57	≤-26	PASS
		High	2457	4.53	-44.79	≤-25.47	PASS
			2462	4.70	-39.58	≤-25.3	PASS
11N20SISO	Ant1	Low	2412	3.86	-29.88	≤-26.14	PASS
			2417	4.07	-34.8	≤-25.93	PASS
		High	2457	4.66	-44.14	≤-25.34	PASS
			2462	4.65	-38.41	≤-25.35	PASS

11.5.2. Test Graphs

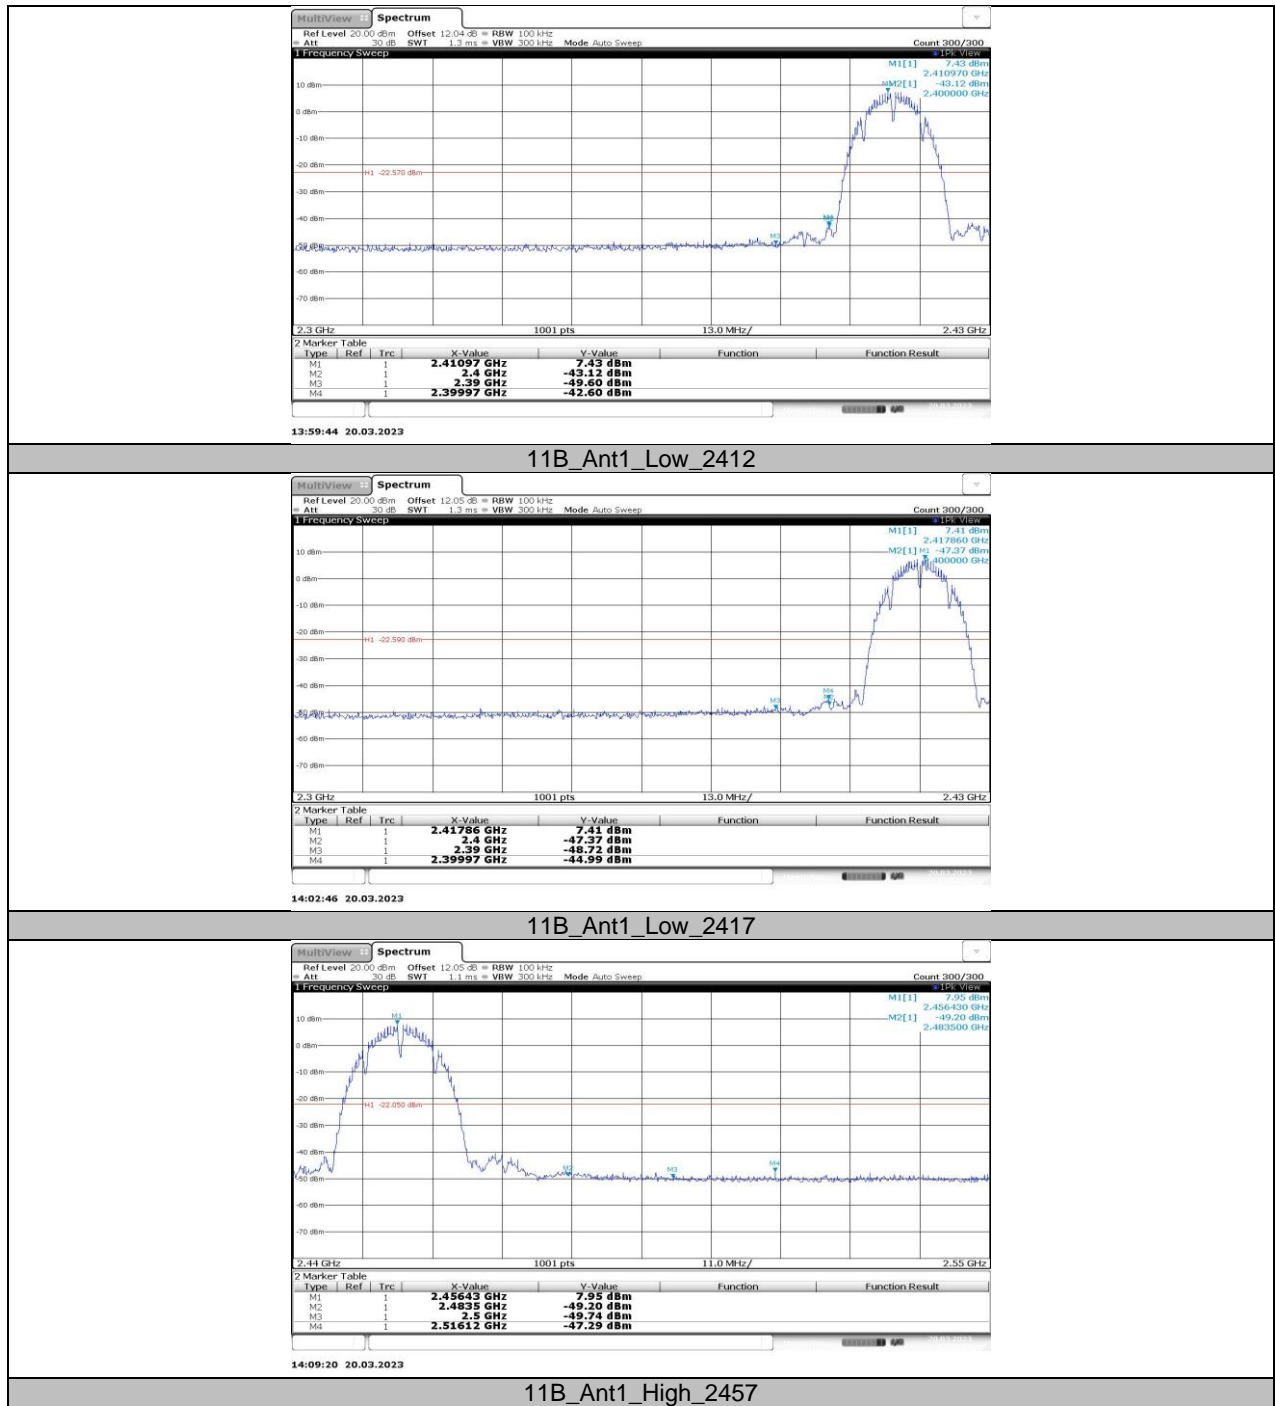

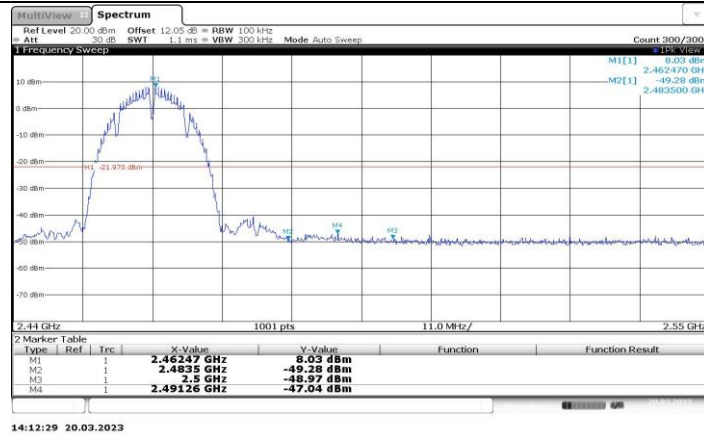


11B_Ant1_High_2462

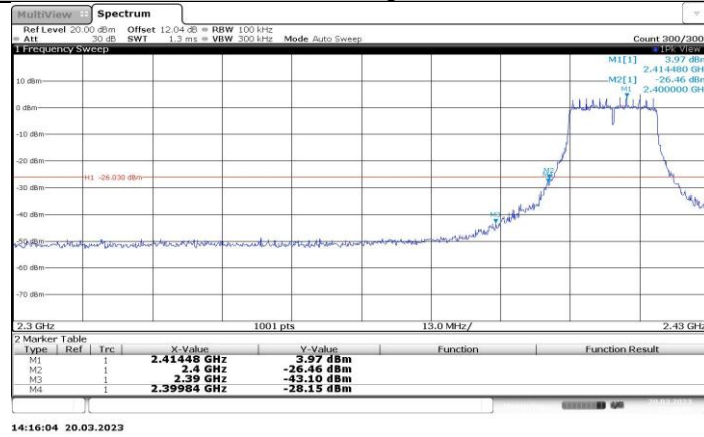


11G_Ant1_Low_2412




11G_Ant1_Low_2417

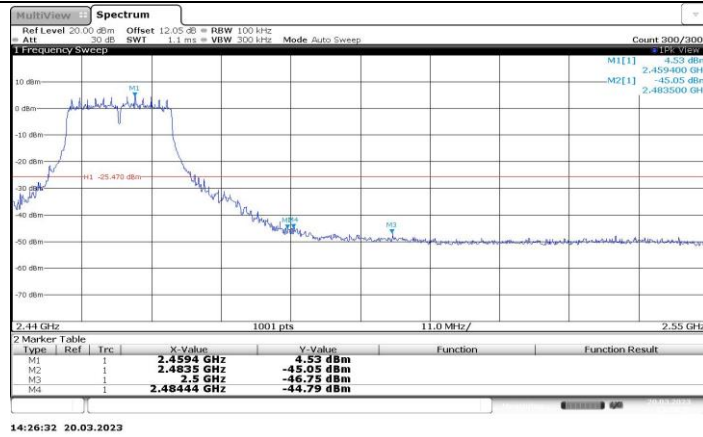

11G_Ant1_High_2457

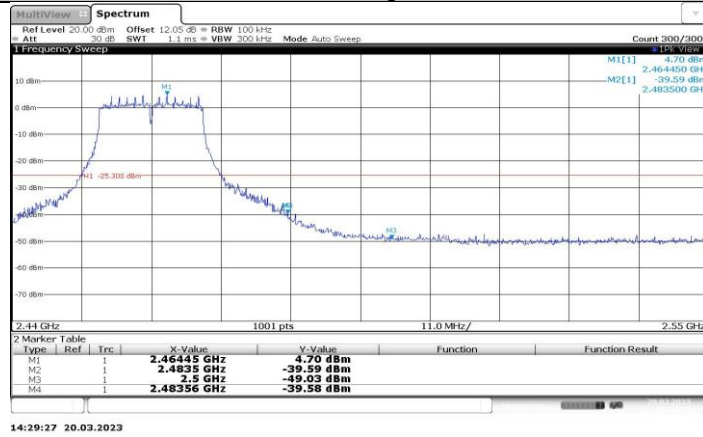

11G_Ant1_High_2462

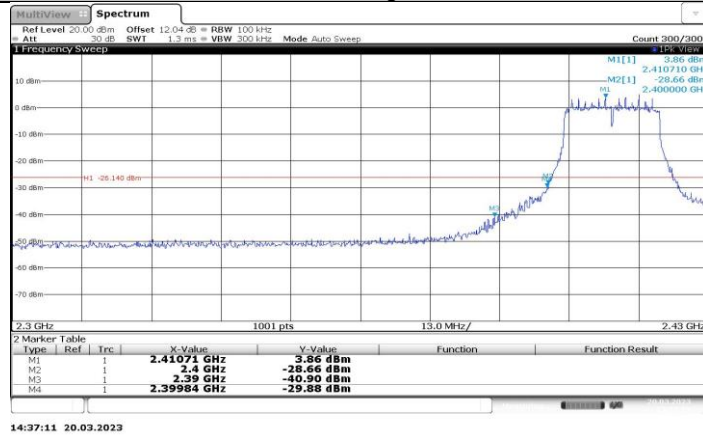

11N20SISO_Ant1_Low_2412