

|--|

EUT Name		Wireless IP Camera		Mod	Model Name		C519M	
Temperature		25°C		Rela	Relative Humidity		55.4%	
Pressure		960hPa	960hPa		Test Voltage		Normal Voltage	
Test Mode		Mode 12		Ante	Antenna Polarity		ntal	
	Frequency	Meter Reading	Factor	Emission Leve	Limits	Margin	Value Type	
	(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
	4904.000	51.66	0.22	51.88	74.00	-22.12	peak	
	4904.000	41.74	0.22	41.96	54.00	-12.04	AVG	
	7356.000	48.25	2.64	50.89	74.00	-23.11	peak	
	7356.000	38.97	2.64	41.61	54.00	-12.39	AVG	
	Remark: Factor = Anten	na Factor + Cable	e Loss – Pre-	amplifier.				
	actor = Anten	ma Factor + Cable Wireless IP Ca			el Name	C519M		
F	Factor = Anten			Mod	el Name tive Humidity	C519M 55.4%		
EUT Na	actor = Anten ame rature	Wireless IP Ca		Mod Rela		55.4%	Voltage	
EUT Na Temper	actor = Anten ame rature ire	Wireless IP Ca 25°C		Mod Rela Test	tive Humidity	55.4%	Voltage	
EUT Na Temper Pressu	actor = Anten ame rature ire ode	Wireless IP Ca 25°C 960hPa Mode 12	amera	Mod Rela Test Ante	tive Humidity Voltage nna Polarity	55.4% Normal Vertica	Voltage	
EUT Na Temper Pressu	actor = Anten ame rature re ode	Wireless IP Ca 25°C 960hPa Mode 12	amera Factor	Mod Rela Test Ante	tive Humidity Voltage Inna Polarity	55.4% Normal Vertica	Voltage	
EUT Na Temper Pressu	actor = Anten ame rature ire ode Frequency (MHz)	Wireless IP Ca 25°C 960hPa Mode 12 Meter Reading (dBµV)	amera Factor (dB)	Mod Rela Test Ante Emission Leve (dBµV/m)	tive Humidity Voltage Inna Polarity Limits (dBµV/m)	55.4% Normal Vertica Margin (dB)	Voltage	
EUT Na Temper Pressu	actor = Anten ame rature re ode Frequency (MHz) 4904.000	Wireless IP Ca 25°C 960hPa Mode 12 Meter Reading (dBµV) 51.96	Factor (dB) 0.22	Mod Rela Test Ante (dBµV/m) 52.18	tive Humidity Voltage mna Polarity Limits (dBµV/m) 74.00	Margin (dB) -21.82	Voltage	
EUT Na Temper Pressu	actor = Anten ame rature re ode Frequency (MHz) 4904.000 4904.000	Wireless IP Ca 25°C 960hPa Mode 12 Meter Reading (dBµV) 51.96 40.63	Factor (dB) 0.22 0.22	Mod Rela Test Ante Emission Leve (dBµV/m) 52.18 40.85	tive Humidity Voltage mna Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertica Margin (dB) -21.82 -13.15	Voltage Value Type peak AVG	
EUT Na Temper Pressu	actor = Anten ame rature re ode Frequency (MHz) 4904.000 4904.000 7356.000	Wireless IP Ca 25°C 960hPa Mode 12 Meter Reading (dBµV) 51.96 40.63 48.00	Factor (dB) 0.22 0.22 2.64	Mod Relation Test Ante Emission Leve (dBµV/m) 52.18 40.85 50.64	tive Humidity Voltage Inna Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertica Margin (dB) -21.82 -13.15 -23.36	Voltage Value Type peak AVG peak	
EUT Na Temper Pressu	actor = Anten ame rature re ode Frequency (MHz) 4904.000 4904.000	Wireless IP Ca 25°C 960hPa Mode 12 Meter Reading (dBµV) 51.96 40.63	Factor (dB) 0.22 0.22	Mod Rela Test Ante Emission Leve (dBµV/m) 52.18 40.85	tive Humidity Voltage mna Polarity Limits (dBµV/m) 74.00 54.00	55.4% Normal Vertica Margin (dB) -21.82 -13.15	Voltage Value Type peak AVG	
EUT Na Temper Pressu Test Mo	actor = Anten ame rature ode Frequency (MHz) 4904.000 4904.000 7356.000	Wireless IP Ca 25°C 960hPa Mode 12 Meter Reading (dBµV) 51.96 40.63 48.00	Factor (dB) 0.22 0.22 2.64	Mod Relation Test Ante Emission Leve (dBµV/m) 52.18 40.85 50.64	tive Humidity Voltage Inna Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertica Margin (dB) -21.82 -13.15 -23.36	Voltage Value Type peak AVG peak	
EUT Na Temper Pressu Test Mo	actor = Anten ame rature re ode Frequency (MHz) 4904.000 4904.000 7356.000 7356.000	Wireless IP Ca 25°C 960hPa Mode 12 Meter Reading (dBµV) 51.96 40.63 48.00	Factor (dB) 0.22 0.22 2.64 2.64	Mod Relation Test Ante Emission Leve (dBµV/m) 52.18 40.85 50.64 41.69	tive Humidity Voltage Inna Polarity Limits (dBµV/m) 74.00 54.00 74.00	55.4% Normal Vertica Margin (dB) -21.82 -13.15 -23.36	Voltage Value Type peak AVG peak	


RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

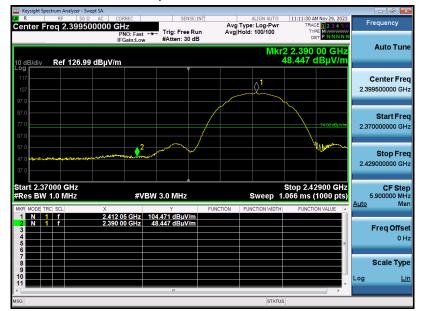

Test Graph for Average Measurement

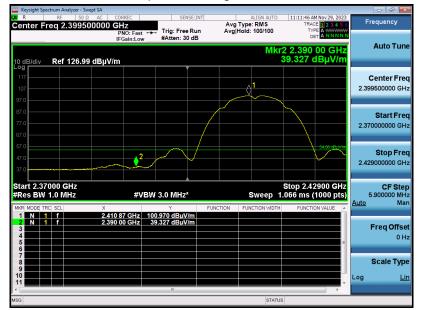


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical



Test Graph for Average Measurement

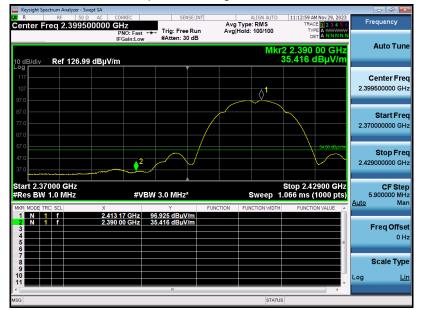

RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal




Test Graph for Average Measurement




RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

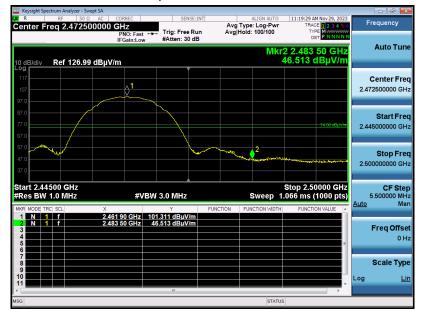

Test Graph for Average Measurement

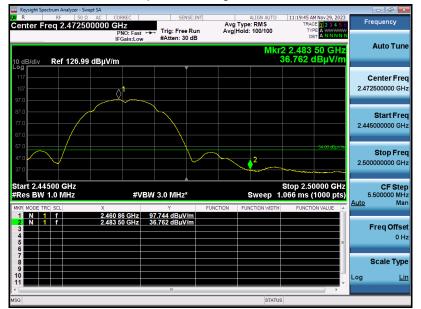


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal



Test Graph for Average Measurement

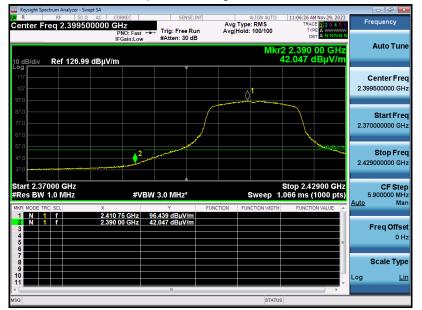


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical



Test Graph for Average Measurement

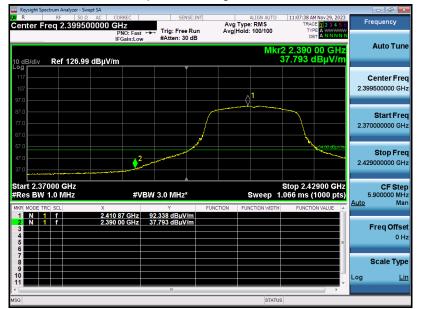


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal



Test Graph for Average Measurement

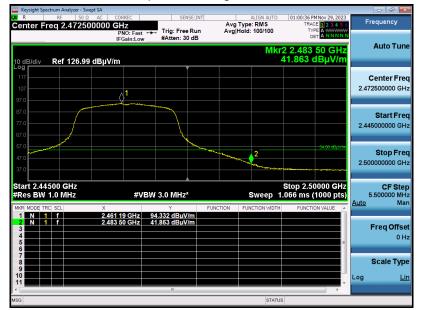

RESULT: Pass




Band Edge Emission Test Results for Restricted E	3ands
--	-------

EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical



Test Graph for Average Measurement

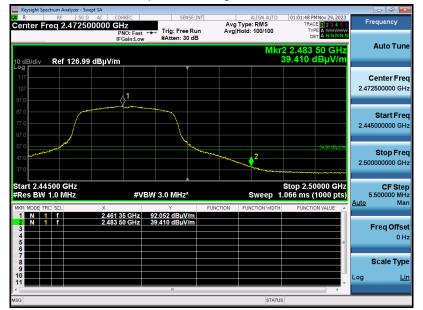


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal



Test Graph for Average Measurement

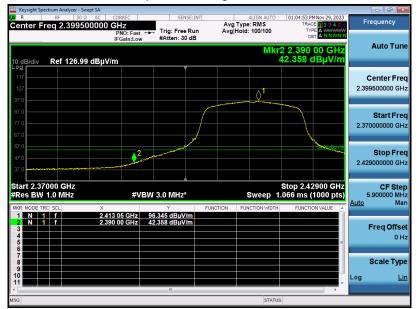


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical



Test Graph for Average Measurement

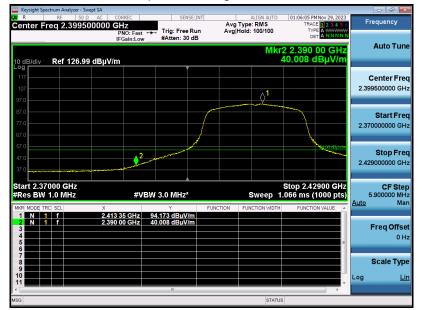

RESULT: Pass




Danu Luue Liiission lesi Nesuiis ioi Nesincieu Danus	Band Edge	Emission	Test Results	for Restricted Bands
--	-----------	----------	---------------------	----------------------

EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal



Test Graph for Average Measurement

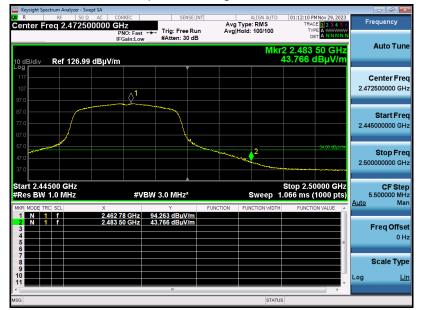

RESULT: Pass




Band Edge Emission Test Results for Rest	ricted Bands
--	--------------

EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical



Test Graph for Average Measurement

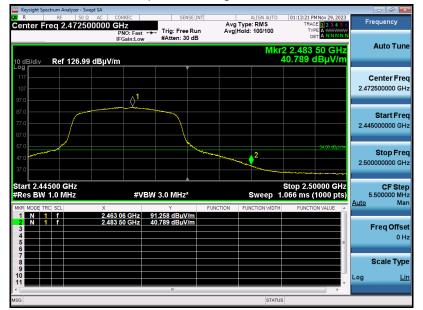


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Horizontal



Test Graph for Average Measurement

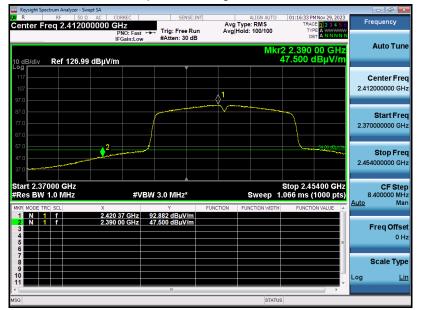

RESULT: Pass




Danu Luue Liiission lesi Nesuiis ioi Nesincieu Danus	Band Edge	Emission	Test Results	for Restricted Bands
--	-----------	----------	---------------------	----------------------

EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna Polarity	Vertical



Test Graph for Average Measurement

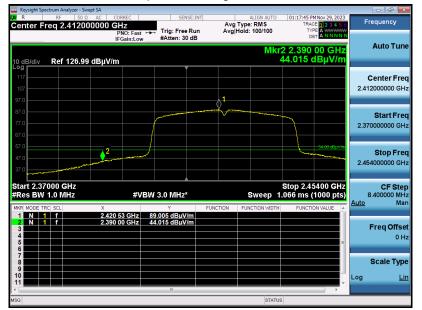


RESULT: Pass



EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Horizontal



Test Graph for Average Measurement

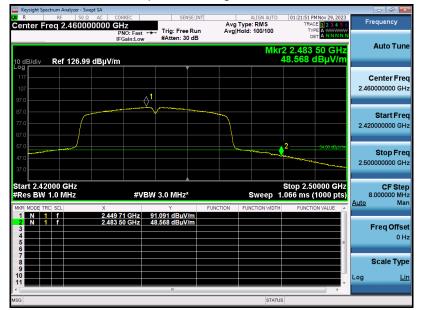


RESULT: Pass




Band	Edae	Emission	Test	Results	for	Restricted Bands
_						

EUT Name	Wireless IP Camera	Model Name	C519M
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 12	Antenna Polarity	Vertical

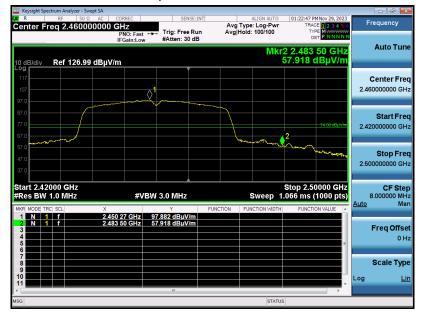

Test Graph for Average Measurement

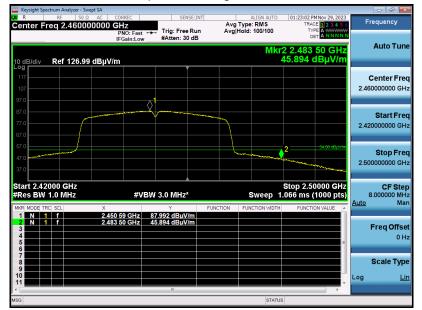

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission

12.1 Measurement Limits


Frequency	Maximum RF Line Voltage			
Frequency	Q.P (dBµV)	Average (dBµV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 Block Diagram of Line Conducted Emission Test

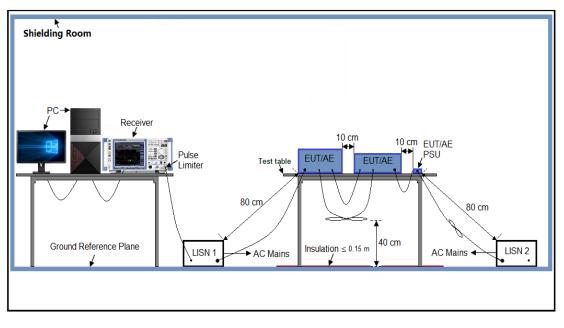



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data (mode 1) of the worst case was reported on the Summary Data page.


12.5 Test Result of Line Conducted Emission Test



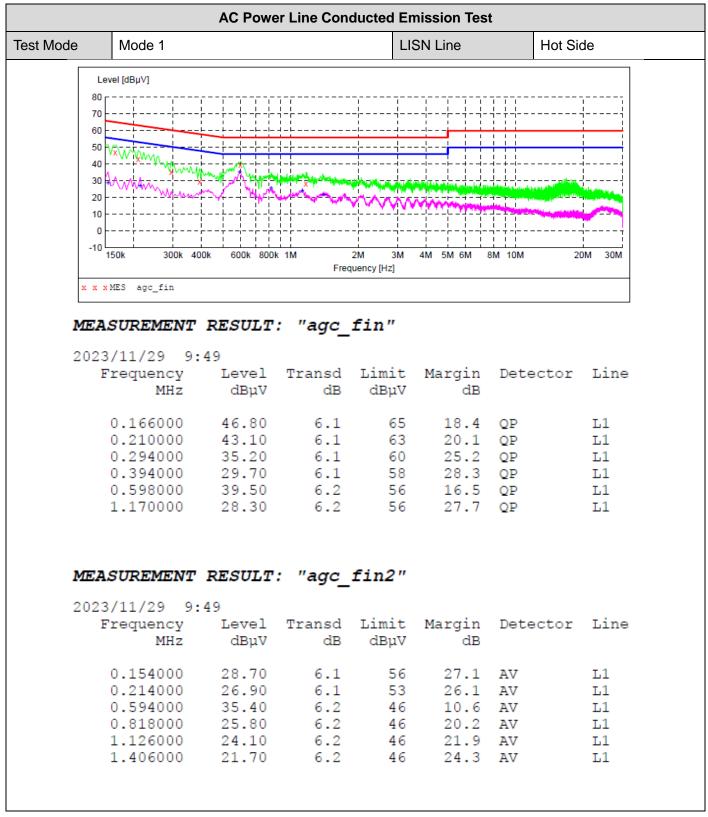

RESULT: Pass



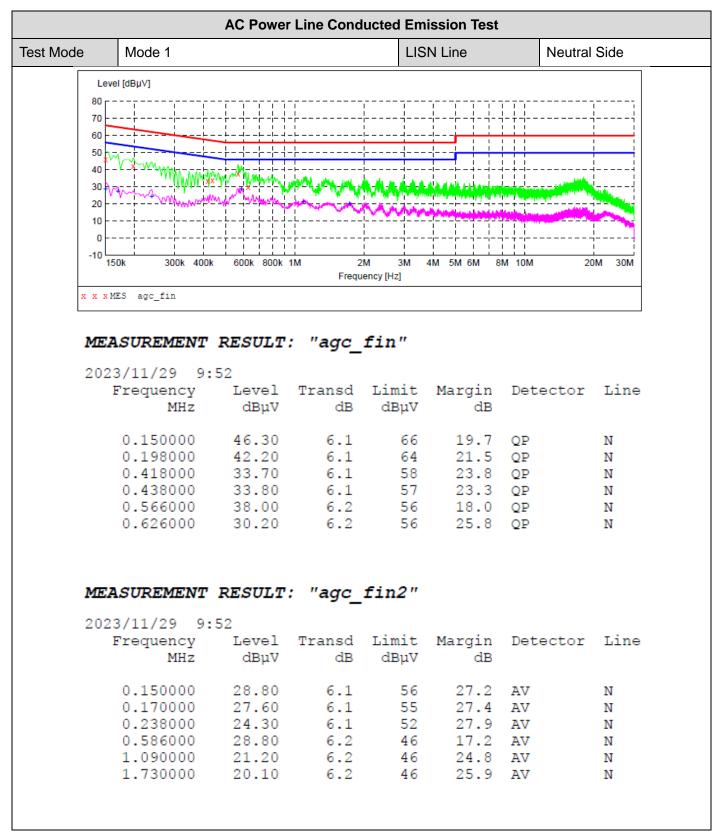

RESULT: Pass Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC06662231104AP02

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC06662231104AP03

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.