

A.5. FREQUENCY STABILITY

Test Date	2024/11/01	Temp./Hum.	24°C/60%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Kuper Hsu



A.5.1. Frequency stability Result


Temperature (°C)	Voltage (Vac)	Centre Frequency (MHz)	Measurement Value (MHz)	Frequency Stability (ppm)
25	120	5955	5955.018	3.065
-30	102		5955.013	2.246
	138		5955.011	1.873
-20	102		5955.017	2.879
	138		5955.001	0.234
-10	102		5955.001	0.167
	138		5955.011	1.810
0	102		5955.014	2.351
	138		5955.001	0.125
10	102		5955.017	2.832
	138		5955.009	1.566
20	102		5955.012	1.975
	138		5955.010	1.745
30	102		5955.017	2.791
	138		5955.006	0.932
40	102		5955.016	2.702
	138		5955.009	1.445
50	102		5955.012	2.054
	138		5955.007	1.167



A.6.BAND EDGE

Test Date	2024/10/04~29	Temp./Hum.	22~24°C/52~63%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Harry Huang

With INPAQ Antenna

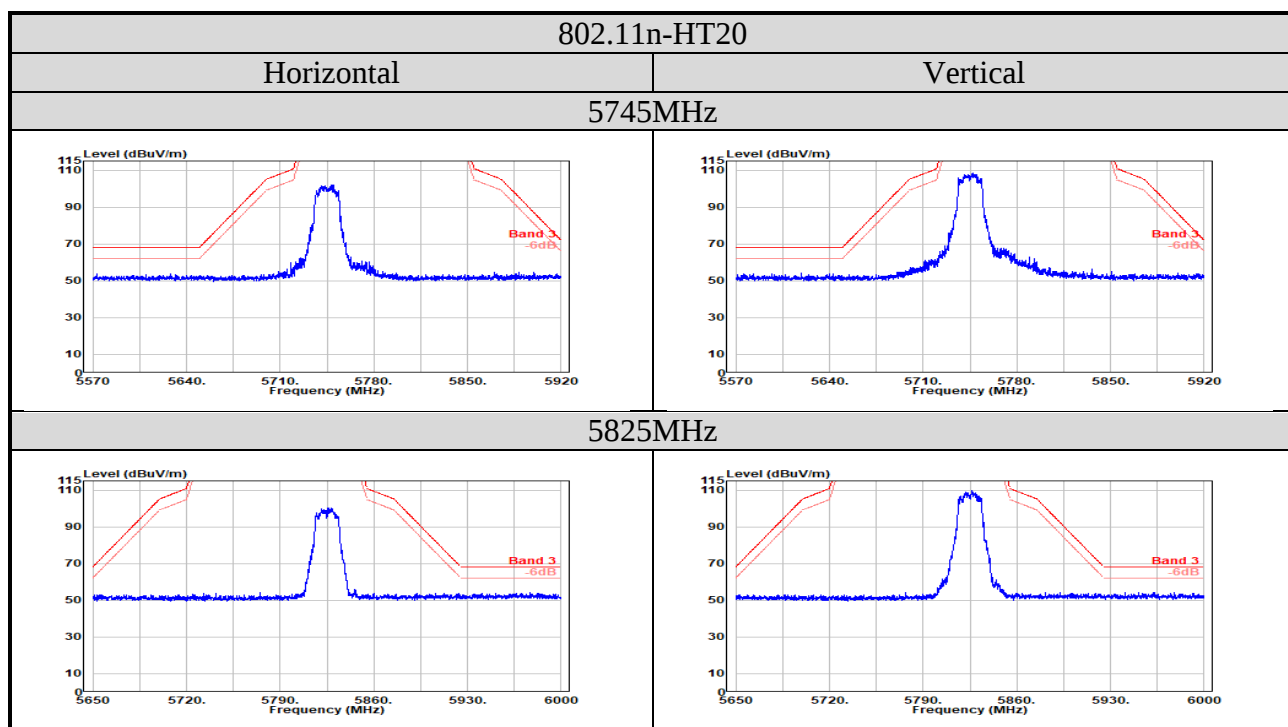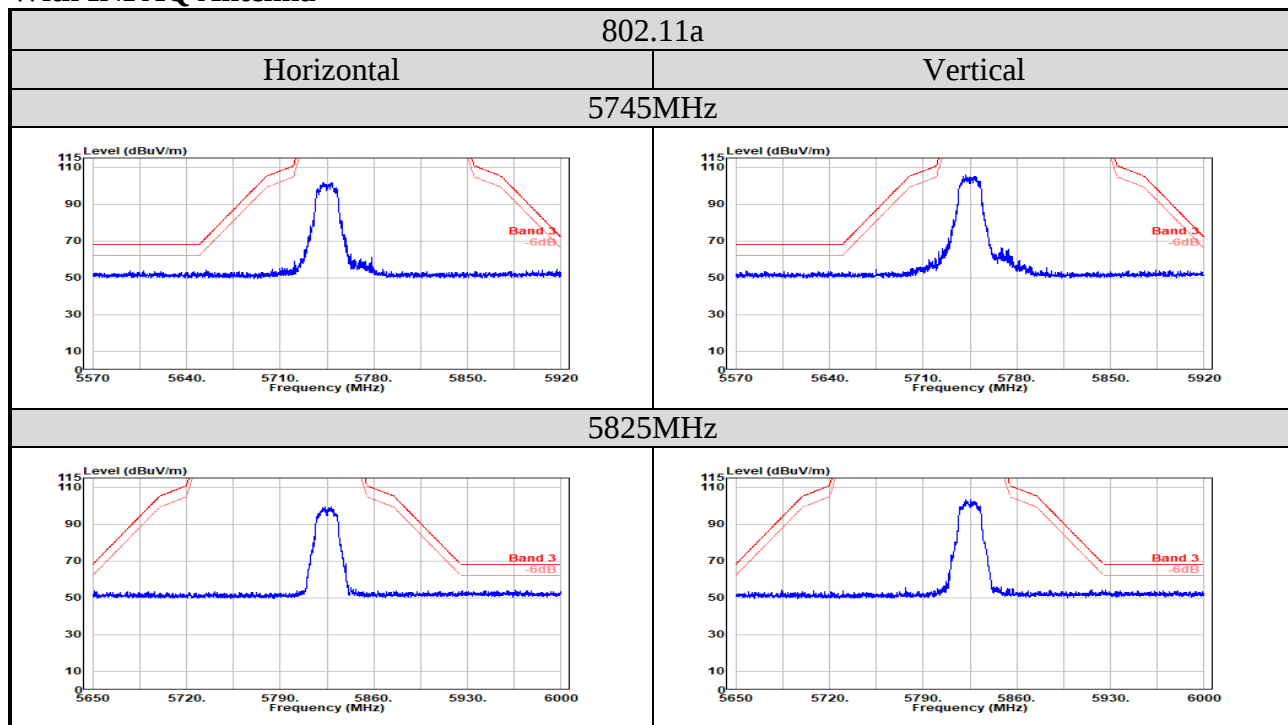

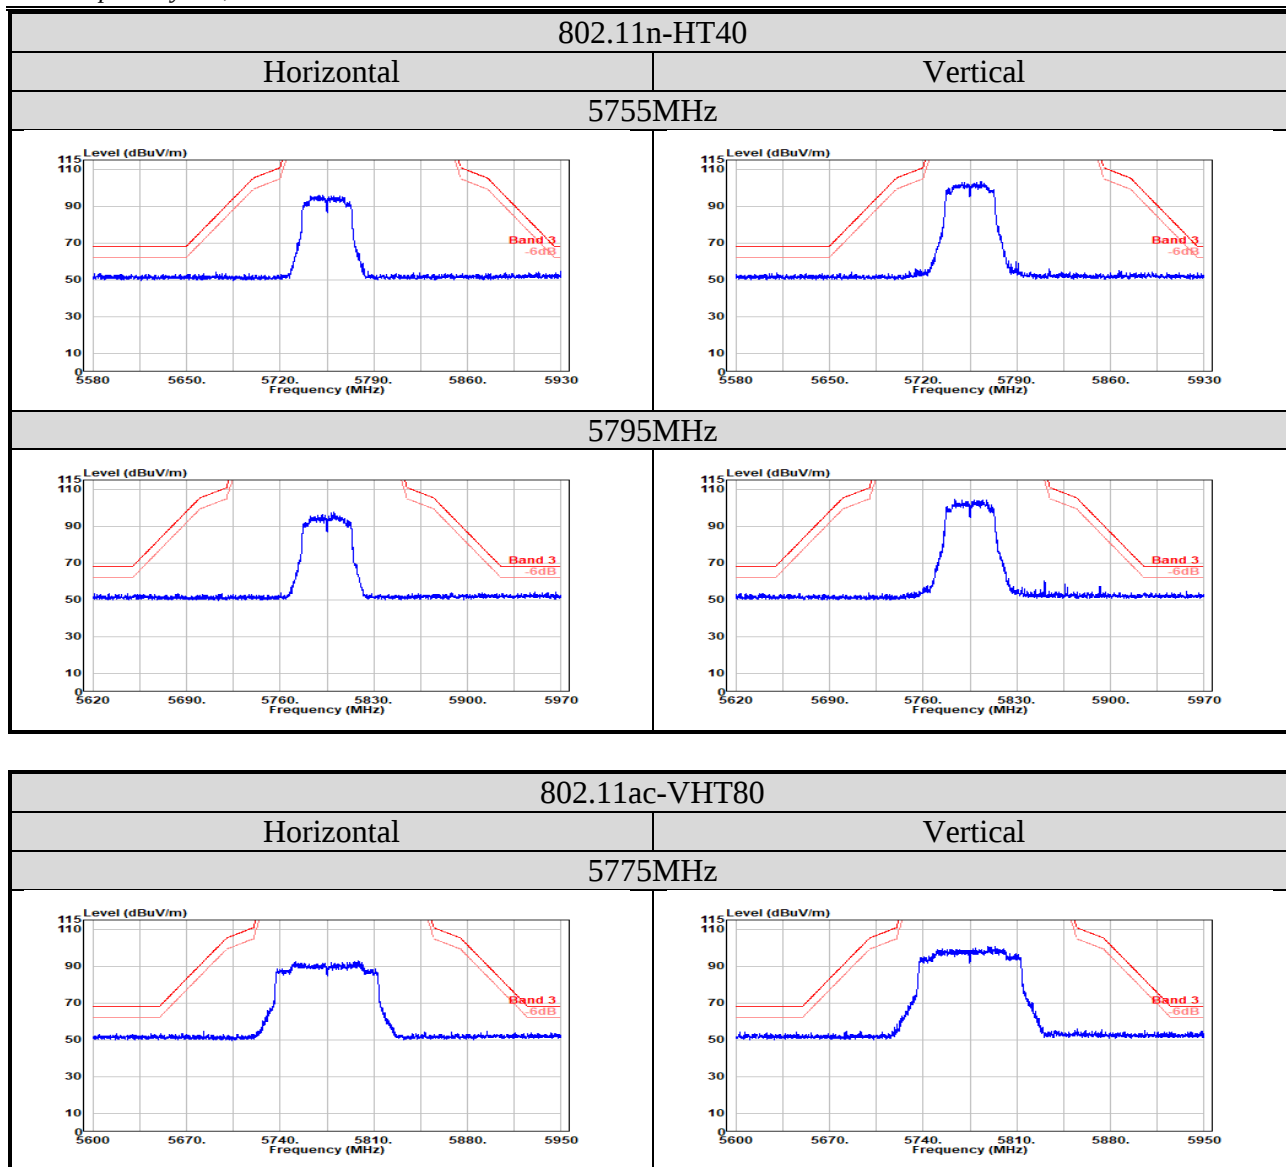

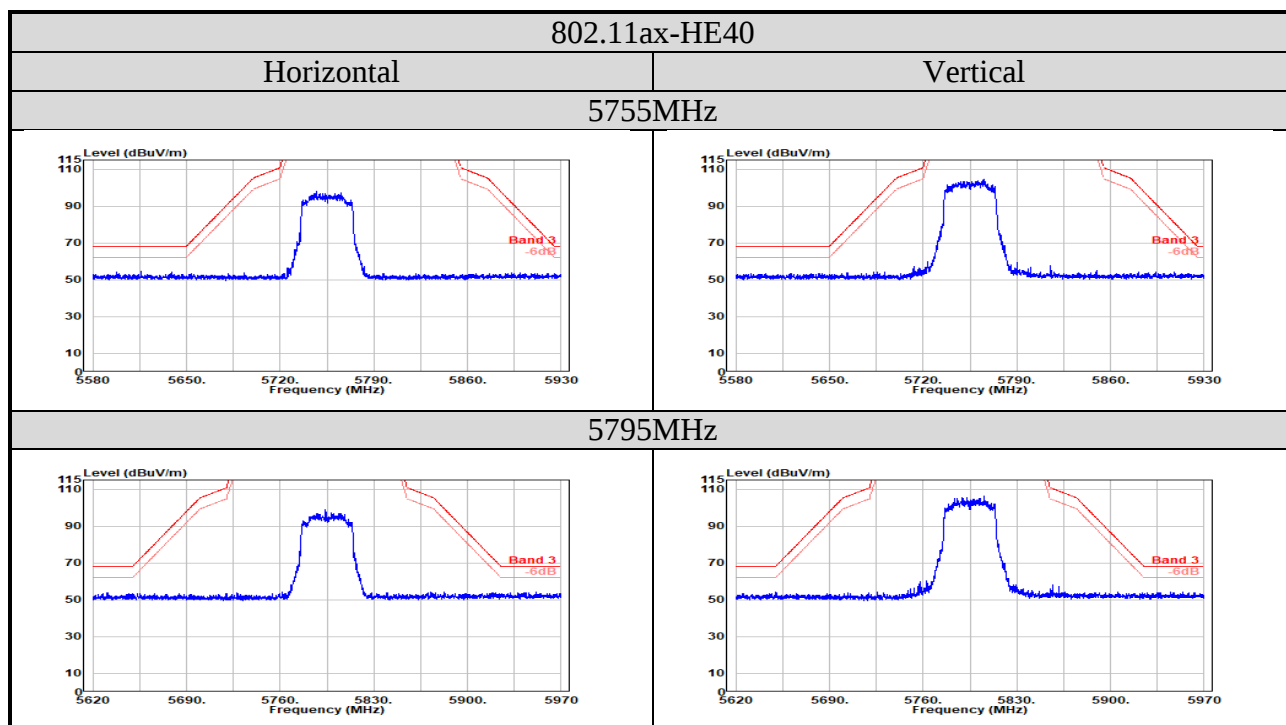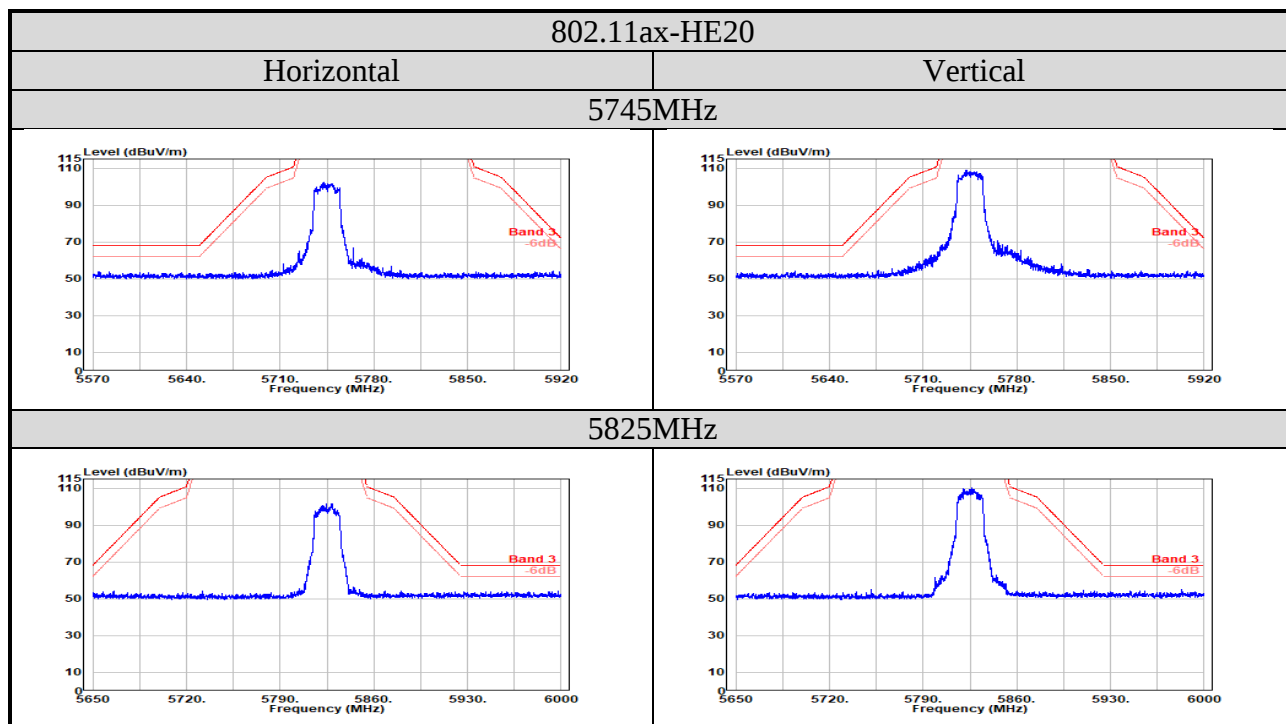


Audix Technology Corp.



No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301

Fax: +886 2 26099303

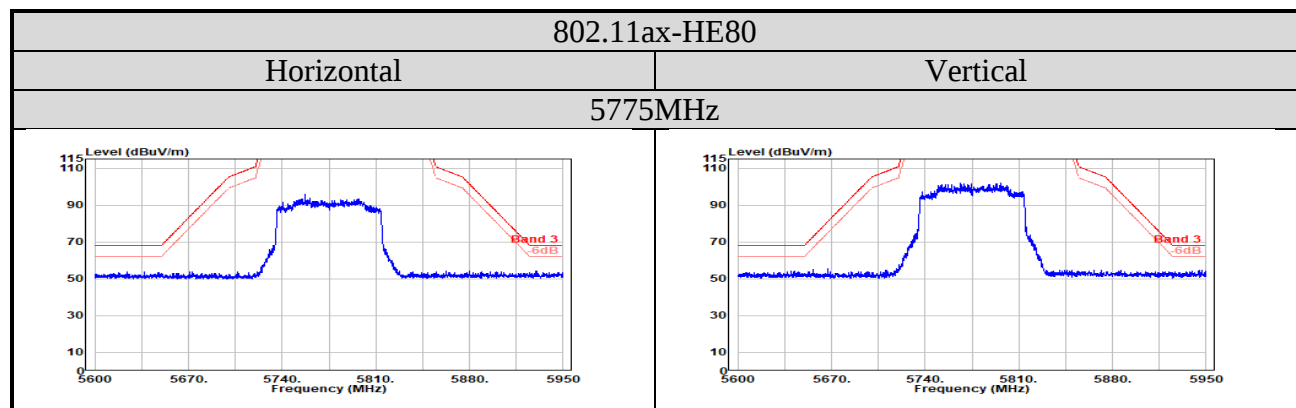

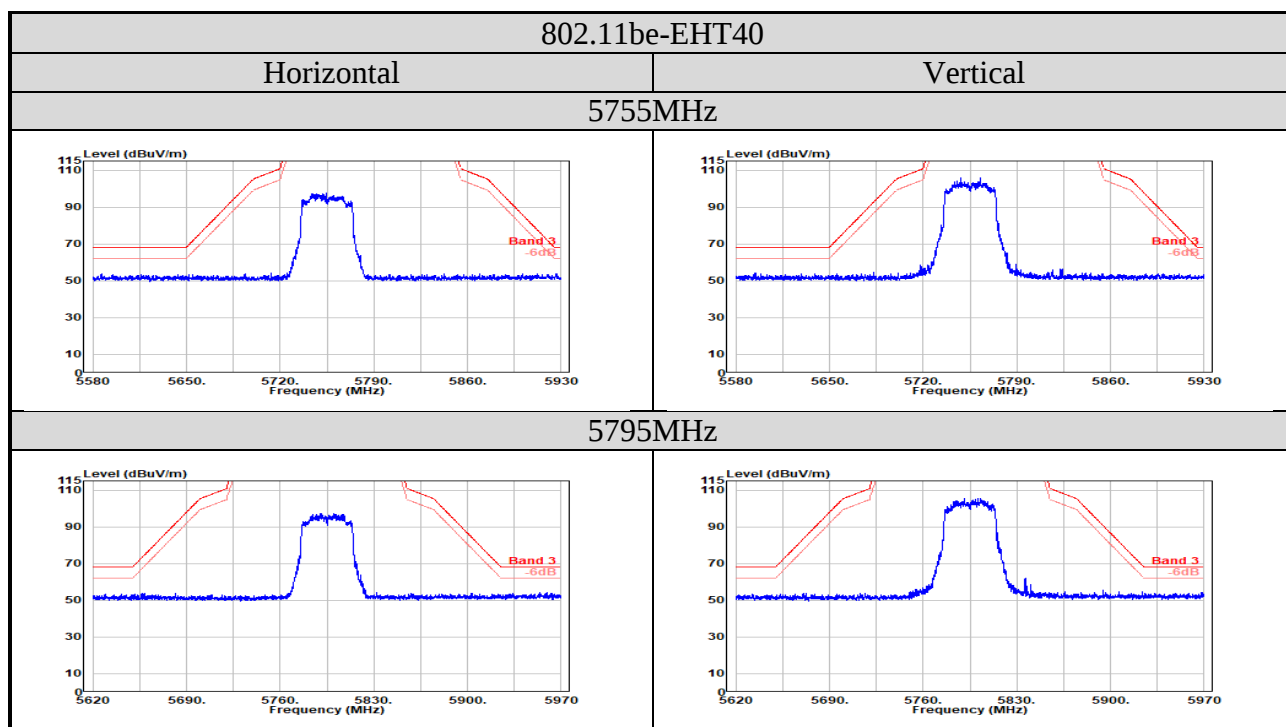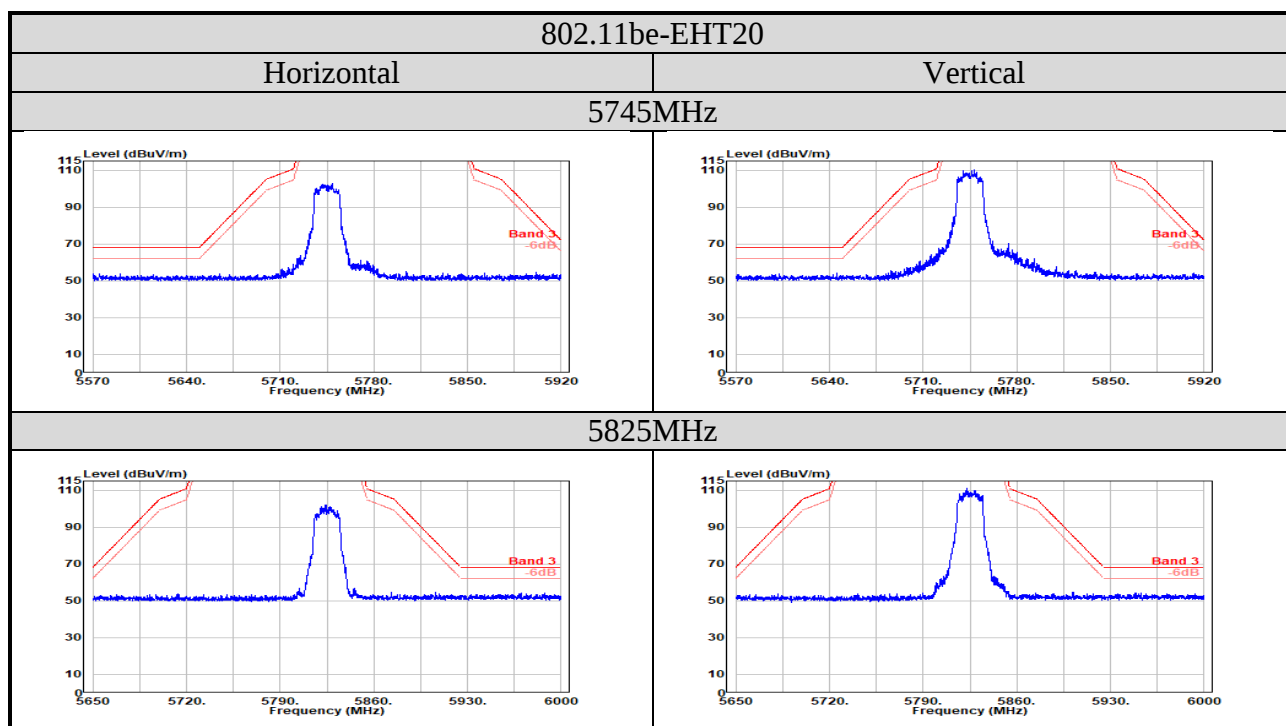


Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,


New Taipei City 244, Taiwan


Tel: +886 2 26099301


Fax: +886 2 26099303

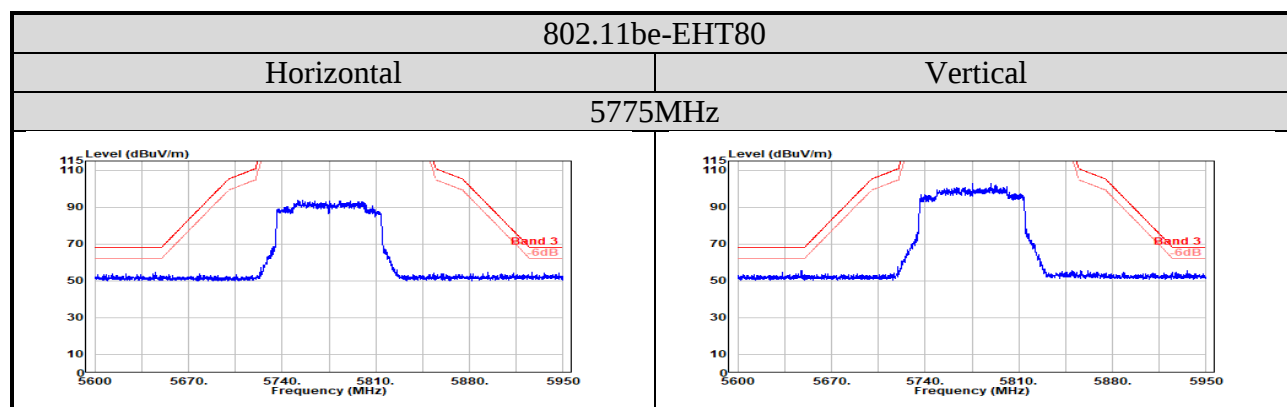


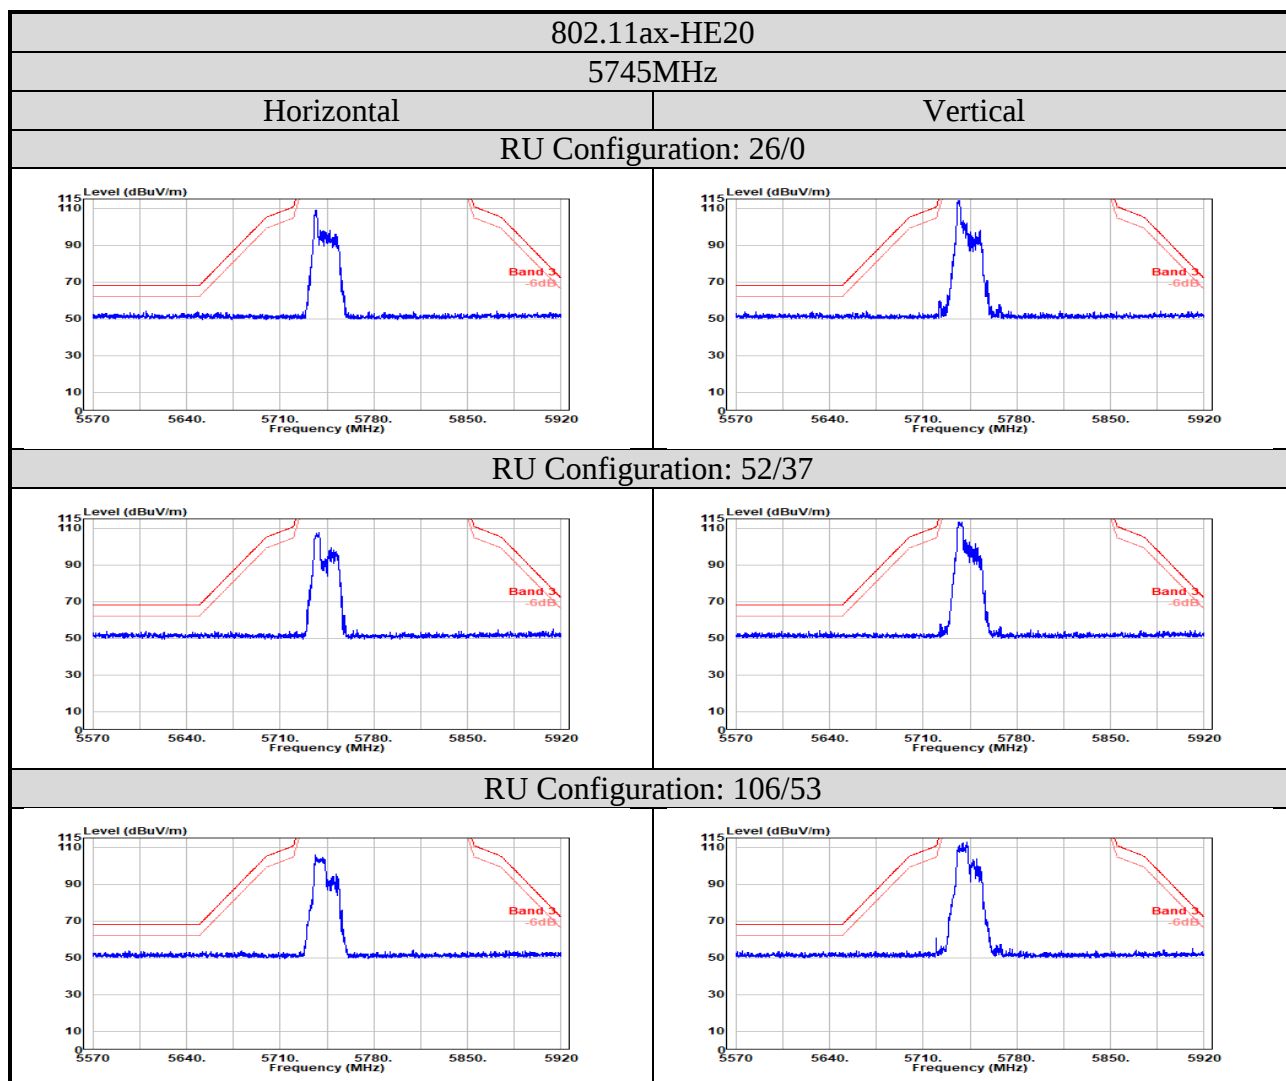


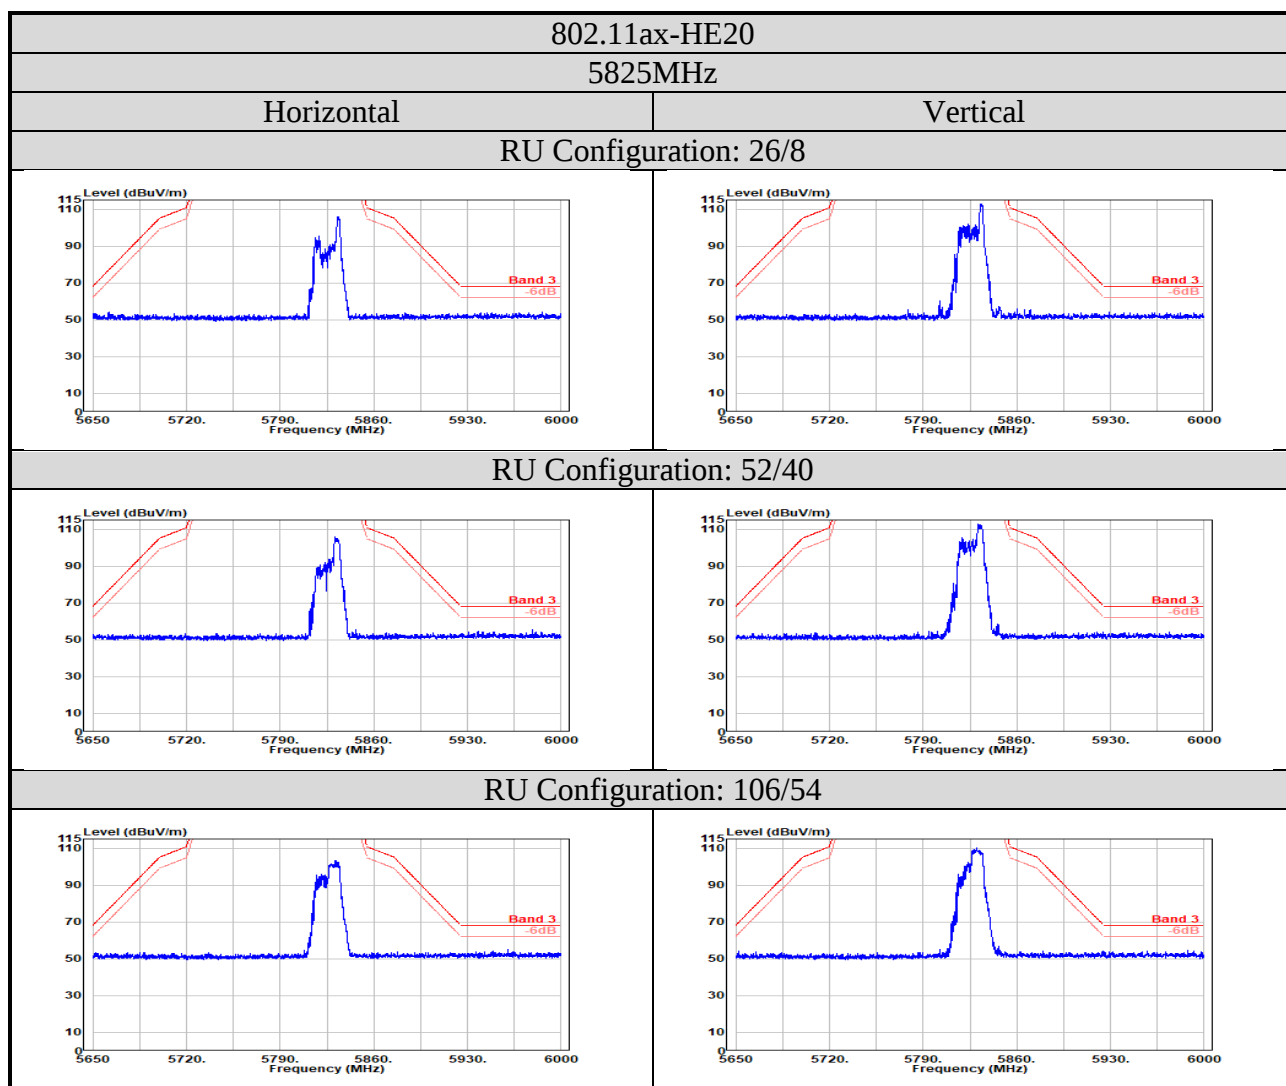


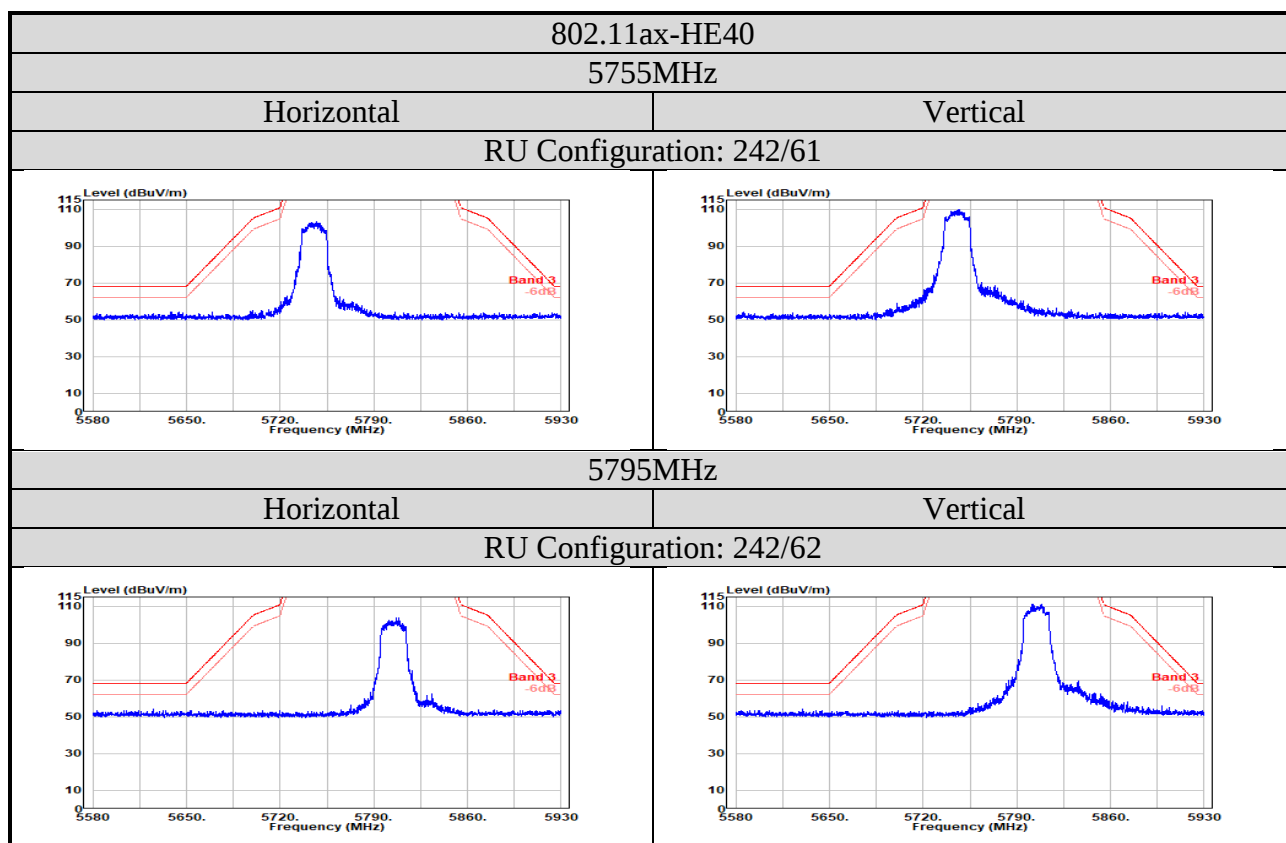


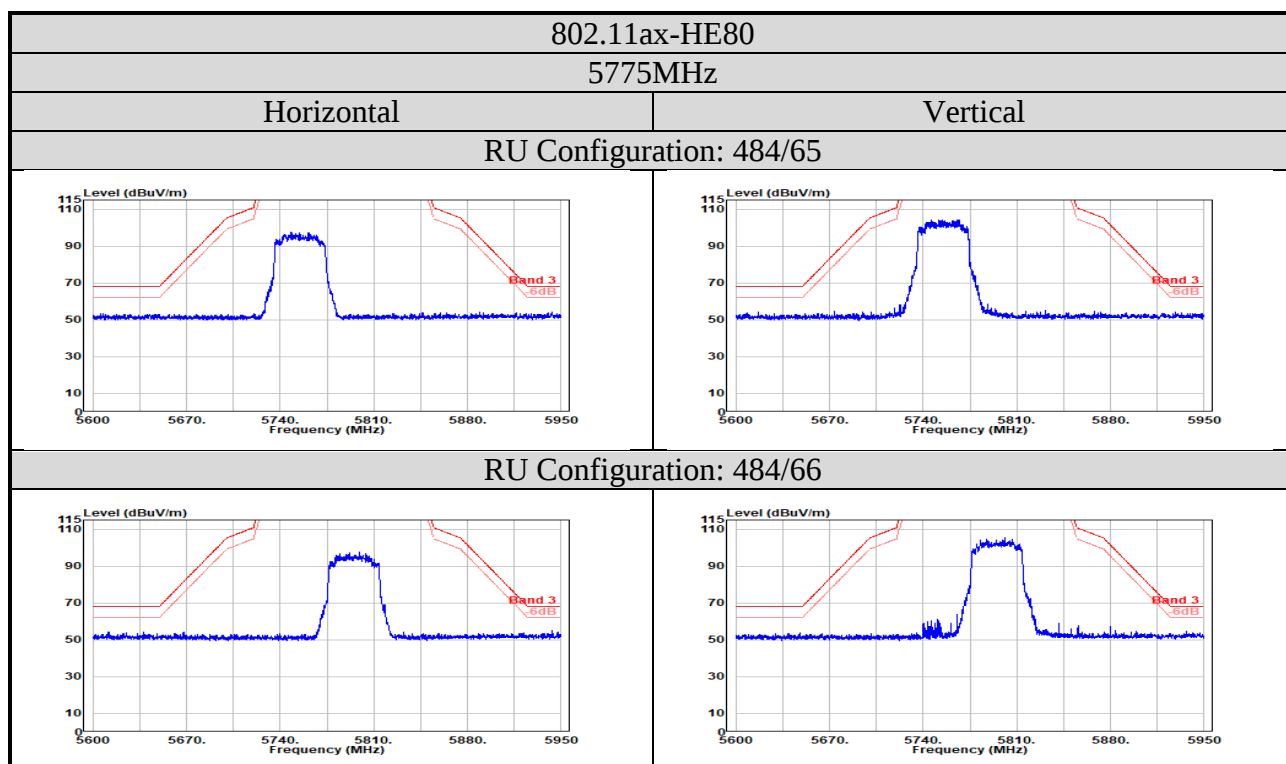

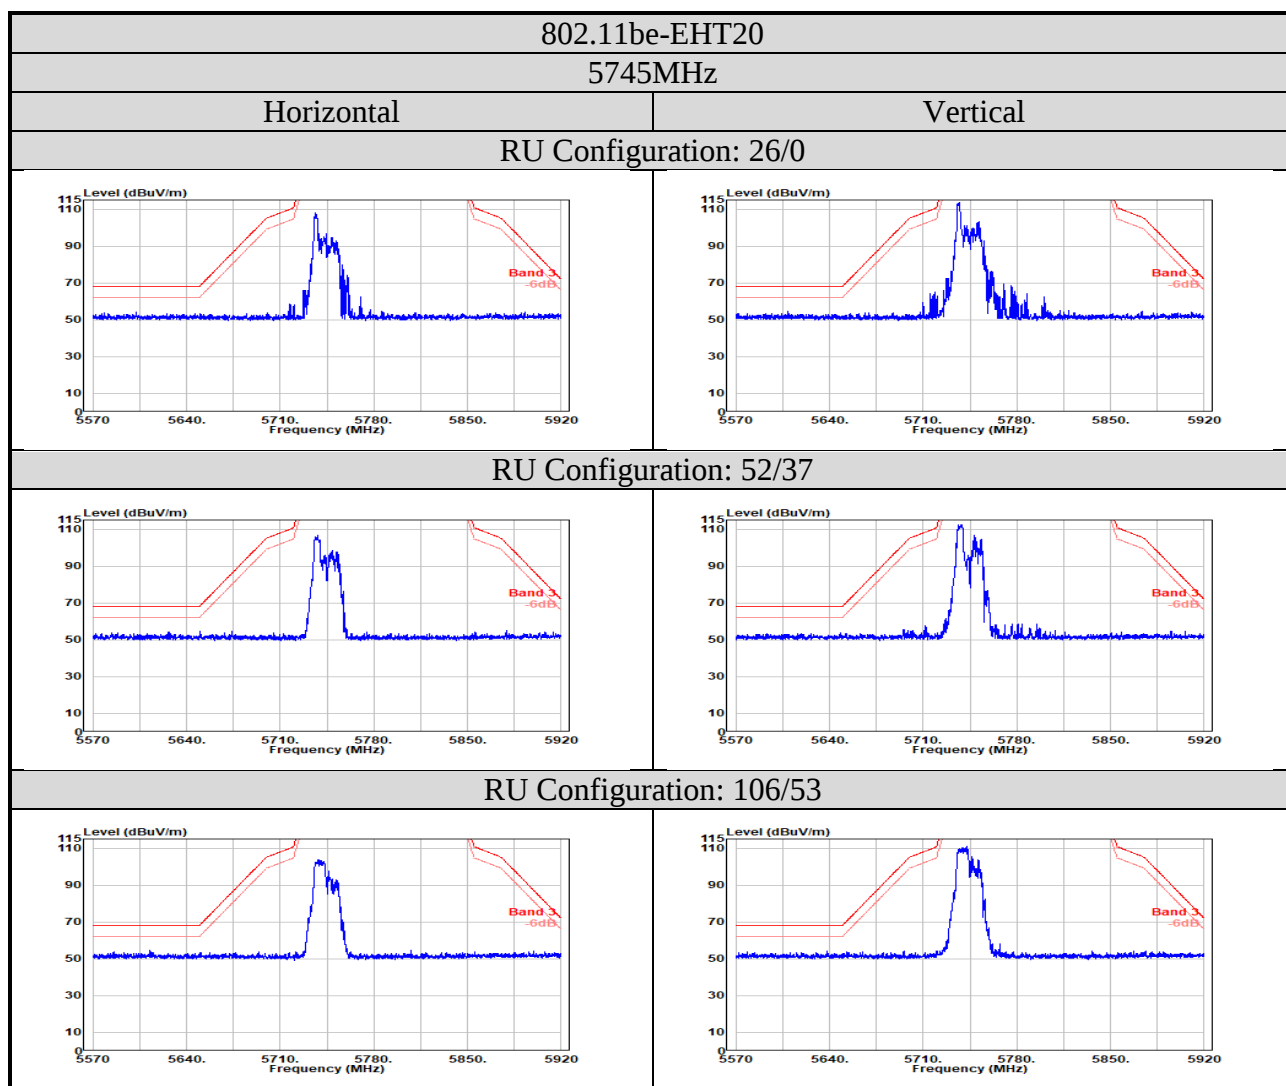

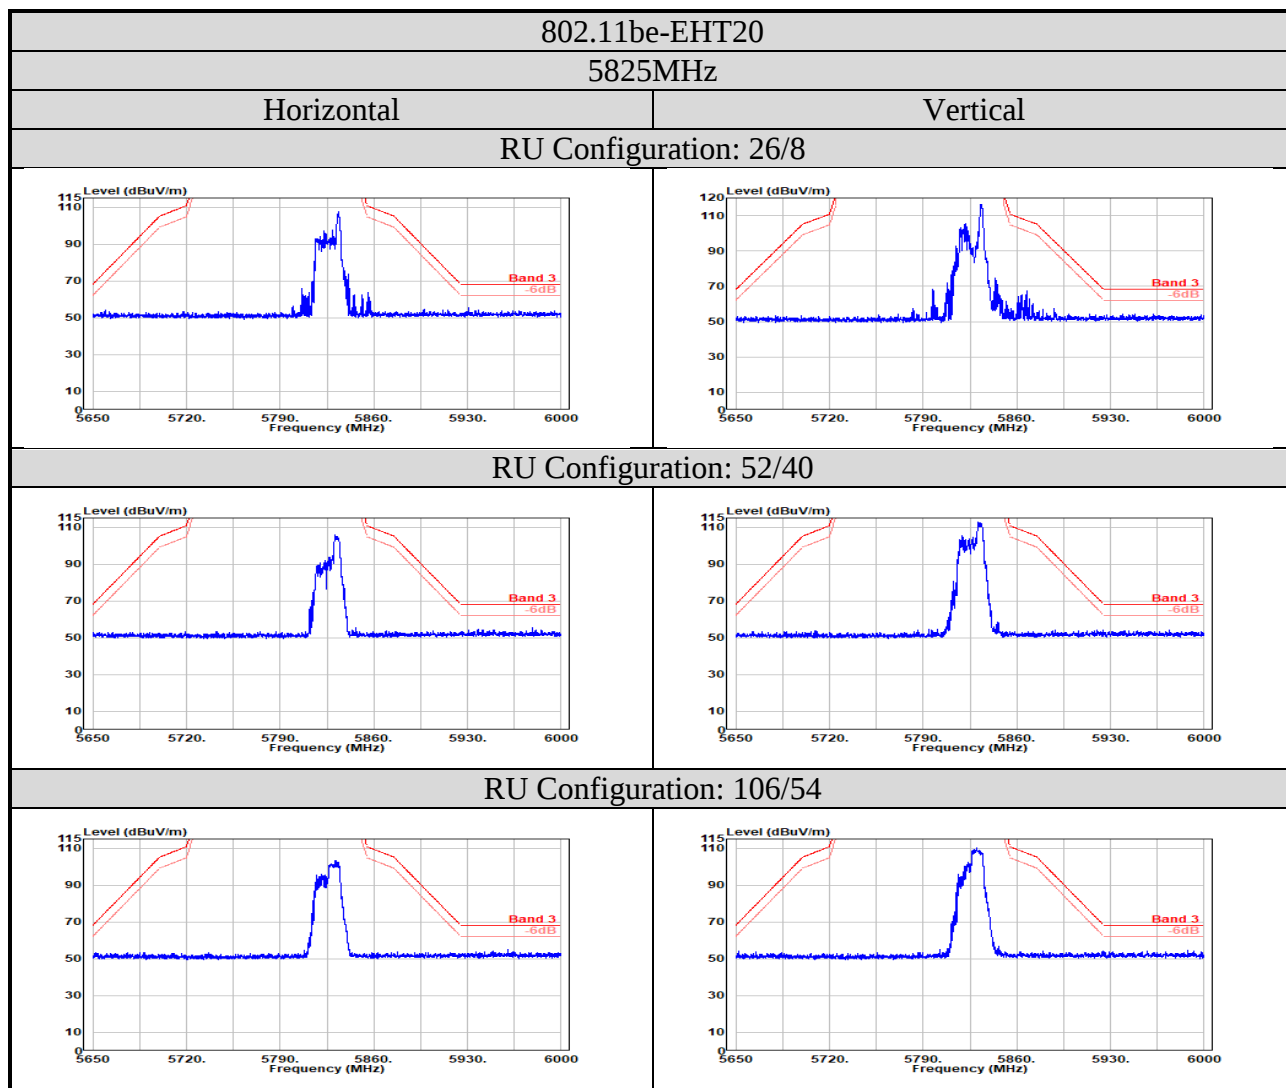

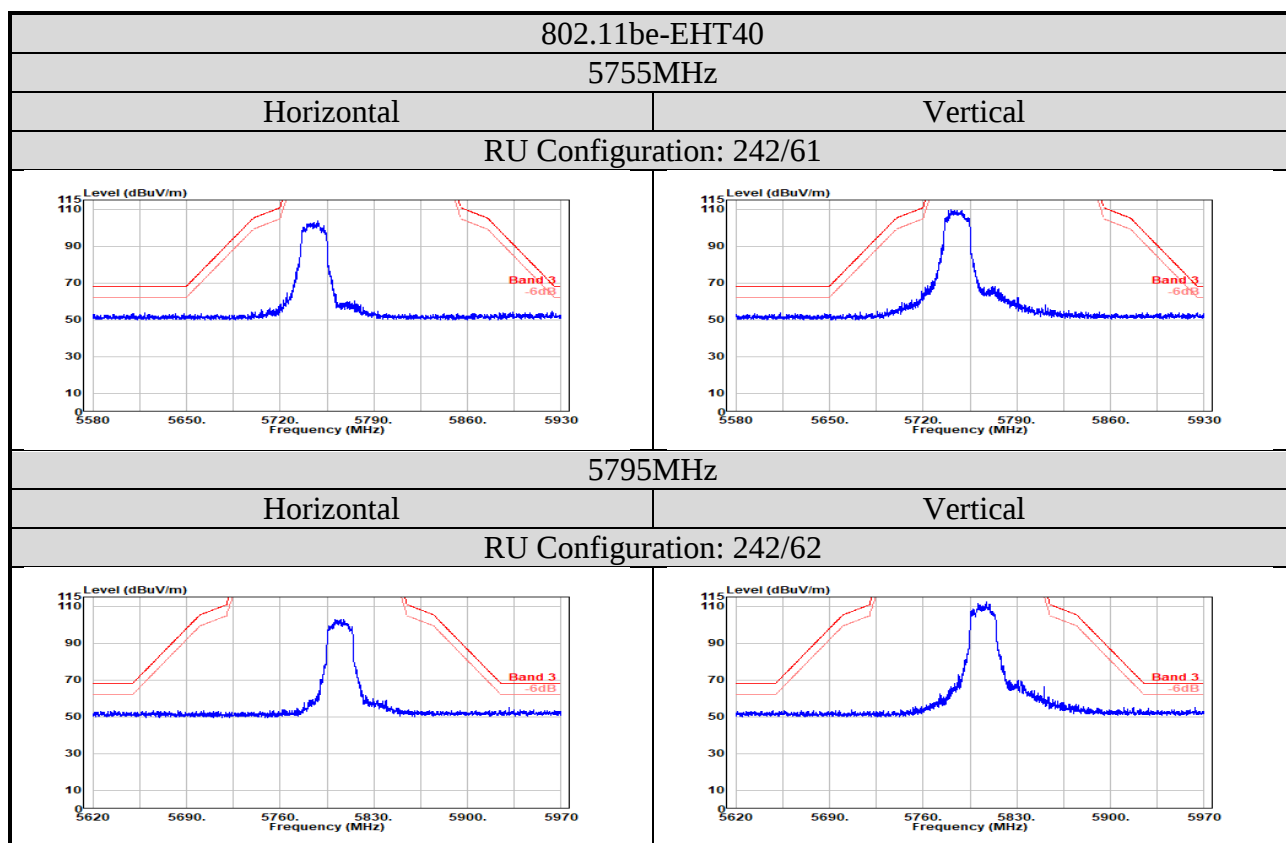

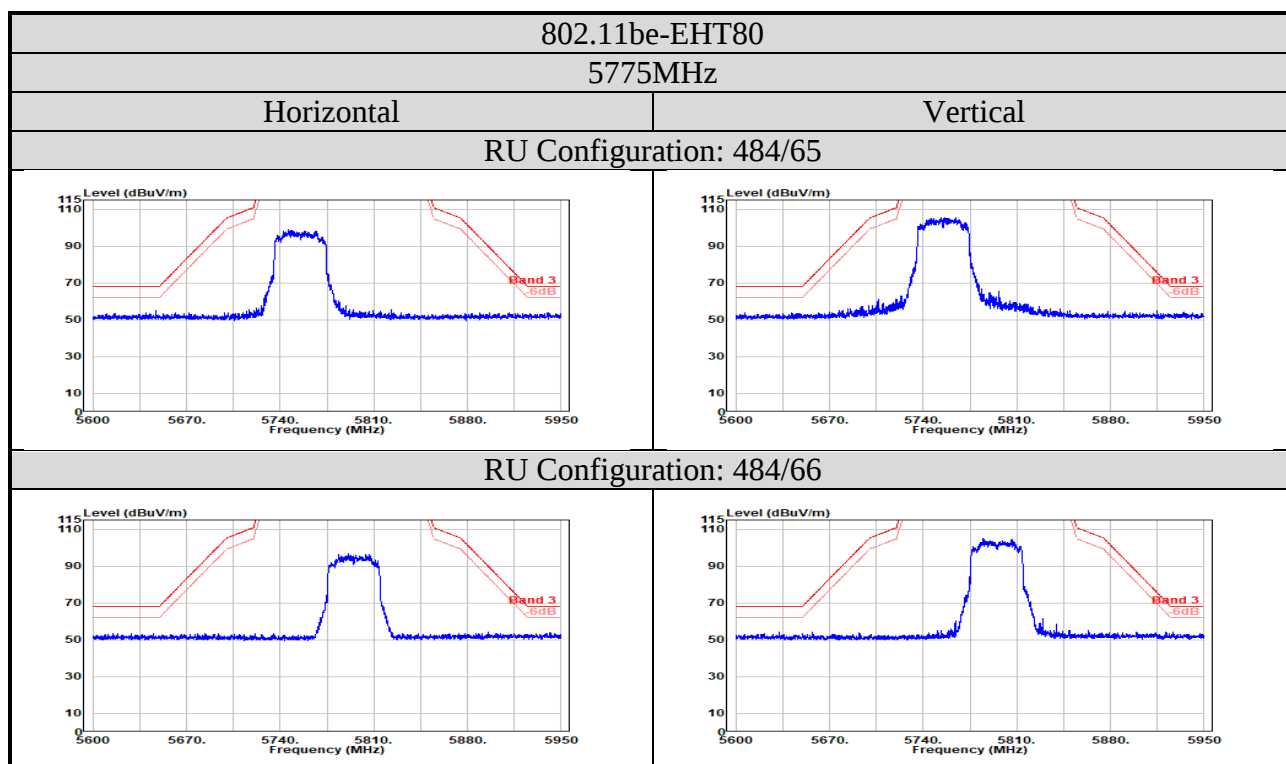

With LUXSHARE-ICT Antenna

