

Measurements performed at Inovonics Wireless Corp. lab

Equipment used:

HP 8594E Spectrum Analyzer—calibration due 5/6/2003

The antenna was removed from the EUT and a direct connection made to the transmitter output.

1. Plot 1 is a spectrum plot showing the carrier frequency separation. Compliance with section 15.247(a)(1) is demonstrated with a test sample configured with firmware allowing two adjacent channels to be captured.
2. Plot 2 demonstrates compliance with 15.247(a)(1)(i) — Number of hopping channels. This is a stored display of many sequential transmissions to show the overall band occupied by the transmitter.
3. Plot 3 shows the 20 dB bandwidth of a single channel to demonstrate compliance with 15.247(a)(1)(i).
4. The duty cycle is calculated over a 100 mSec averaging window as specified in the rules. The longest message contains a total of 213 pulses each 20 uSec in duration, for a total transmitter on time of 4.26 mSec with represents a worst-case duty cycle of 4.26%. The duty cycle correction used is the maximum of 10%.
5. Calculation for compliance with MPE requirements (Section 2.1091) using a worst case of 0.02 Watt, unity antenna gain, and the $f/300$ (mW/cm^2) limit for general applications. This device is used in fixed locations and is not carried or worn by the end user. The key factor is duty cycle. Under normal conditions, a 12-packet message is sent a maximum of once every 15 minutes. Worst case, a 12-packet message is sent once per minute or 72 packets in a 6 minute period.

Total On time per packet = 4.26 mSec (for maximum packet length)

Duty Cycle = $(4.26 \times 72) \text{ mSec} / (6 \times 60 \times 1000) \text{ mSec} = 0.0852\%$

EIRP = $(0.02\text{W})(0.000852) = 17.04 \text{ microwatt}$. Using a distance of 20 cm:
 $17.04 \text{ microwatt} / (4 \pi 20^2) = 3.39 \text{ nW}/\text{cm}^2$

6. The Dwell Time is the length of one packet. The worst case dwell time for an extended length packet is 40.1 mSec. The standard packet is about 30 mSec duration. A worst case transmission rate, corresponding to a repeated change of state transmissions would result in a maximum of 12 packets in any 10 second period with each packet on a different frequency. The maximum dwell time is thus the dwell time of an extended packet or 40.1 ms.


11. Test Report

The test report containing intentional/unintentional emissions data is attached as "BC400278g-1_FA206C.pdf. International Approvals Laboratories generated this report.

Additional data demonstrating compliance with 47CFR15.247 follows. For the following plots, the antenna was replaced by a coaxial connection to an HP8594E spectrum analyzer.

Plot 1 is a spectrum plot showing the carrier frequency separation. Compliance with section 15.247(a)(1) is demonstrated with a test sample configured with firmware allowing two adjacent channels to be captured.

Plot 1

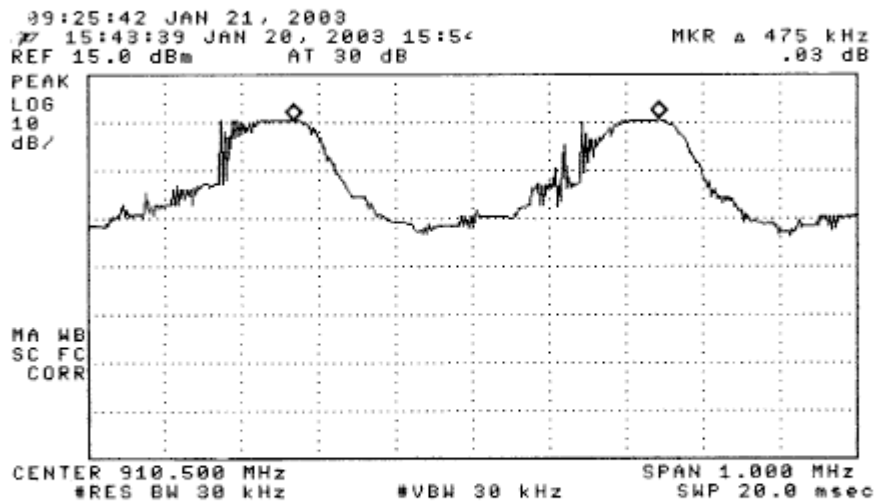


Section 15.247 (a)

FA Transmitter Sample

Carrier frequency separation measured at Inovonics Wireless Corporation Lab

Plot 2 demonstrates compliance with 15.247(a)(1)(i) — Number of hopping channels. This is a stored display of many sequential transmissions to show the overall band occupied by the transmitter.

Plot 2


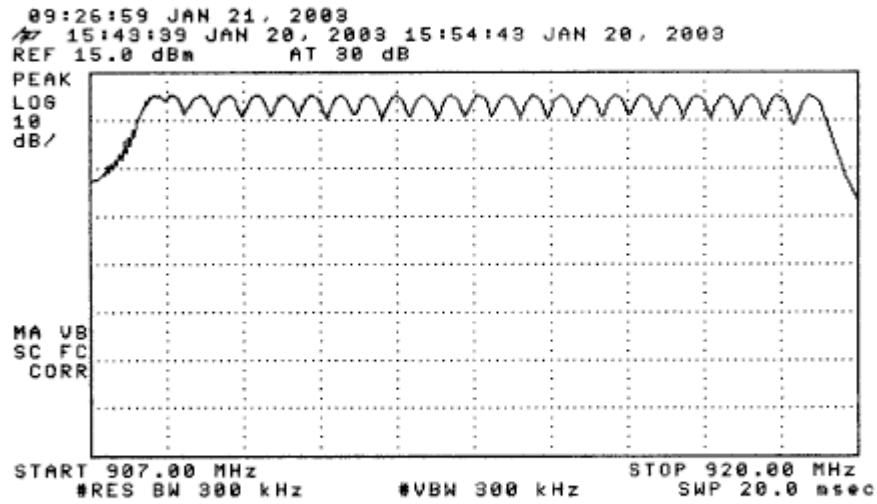


Section 15.247 (a)

FA Transmitter Sample, Number of Hopping Frequencies
Measured at Inovonics Wireless Corporation Lab

Plot 3 shows the 20 dB bandwidth of a single channel to demonstrate compliance with 15.247(a)(1)(i).

Plot 3

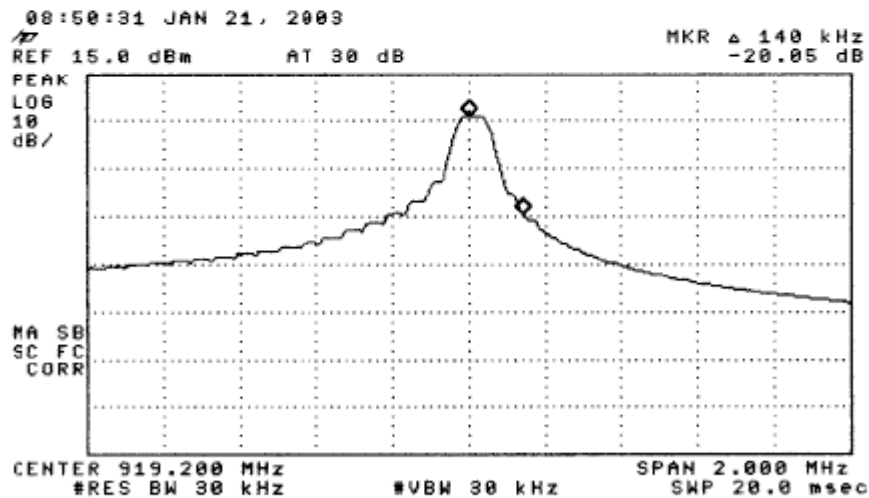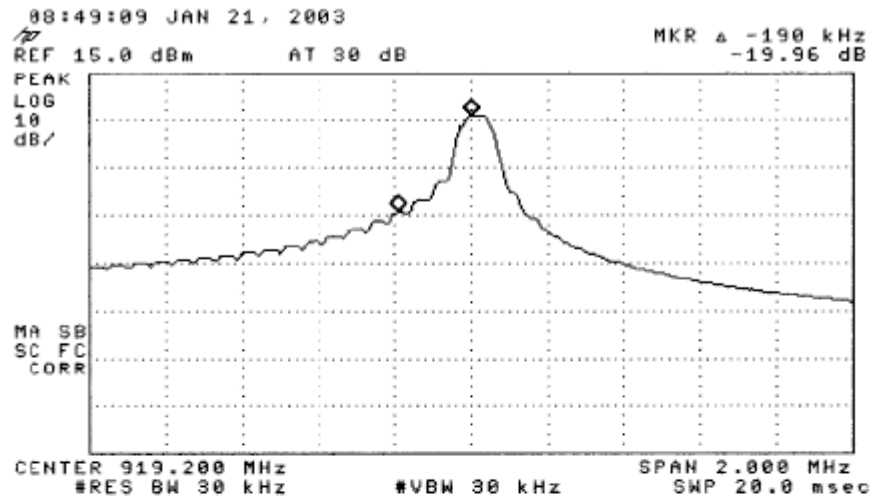

Section 15.247 (a)

FA Transmitter sample, -20 dB Bandwidth
Measured at Inovonics Wireless Corporation