

Report No.: CTC2024240510



Report No.: CTC2024240510

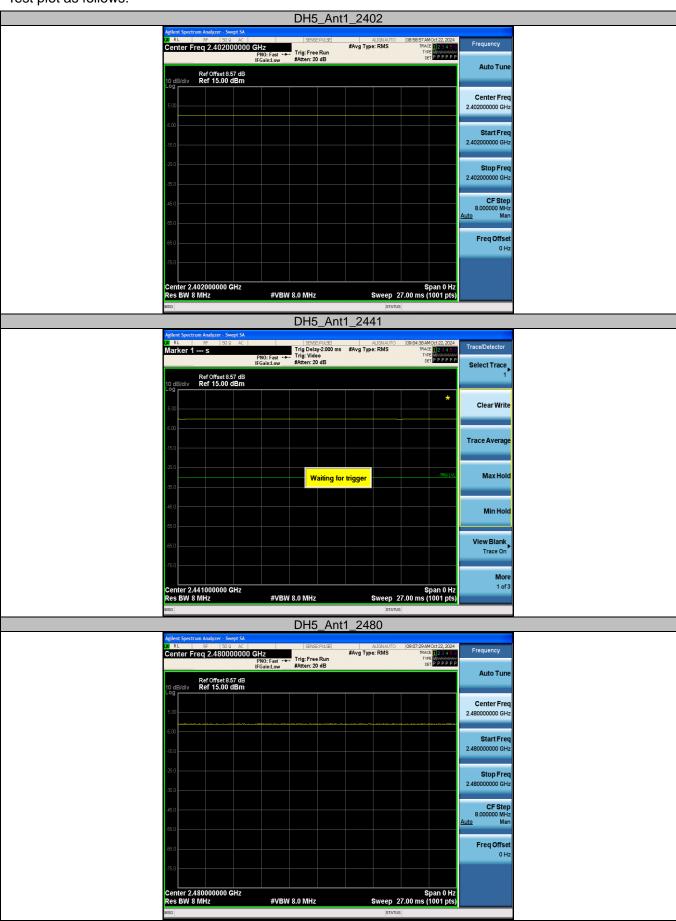

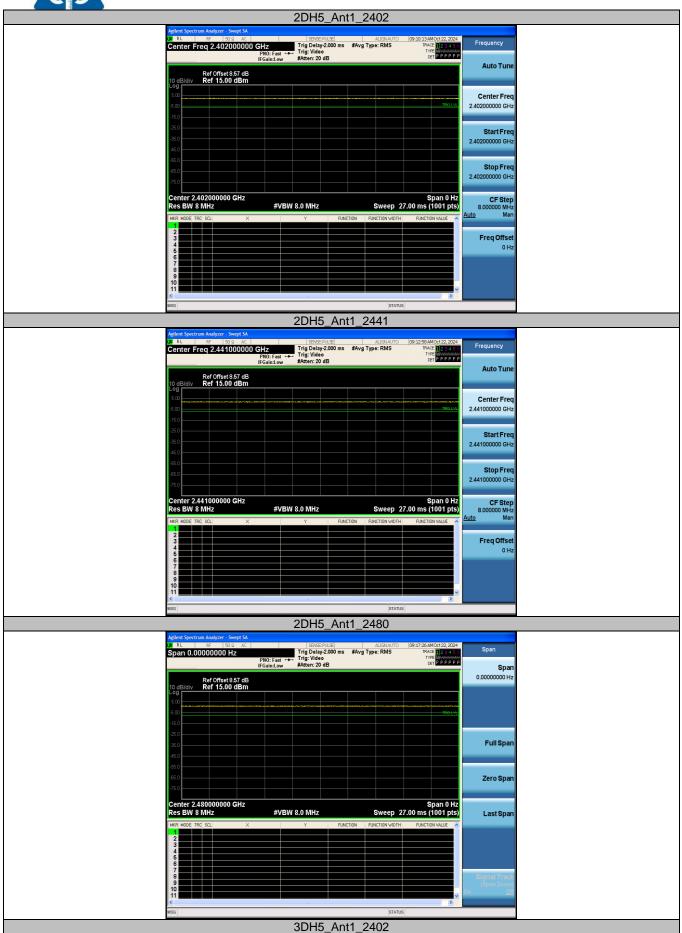

Report No.: CTC2024240510





Page 91 of 91

3.11. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Report No.: CTC2024240510

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional	gain of the ar	ntenna is less tha	an 6dBi, please	e refer to the EUT	internal photograph	ns antenna
ohoto.						

CTC Laboratories, Inc.

TRF No: CTC-TR-059_A1 For anti-fake verification, please visit the official website of China Inspection And Testing Society: yz.cnca.cn