

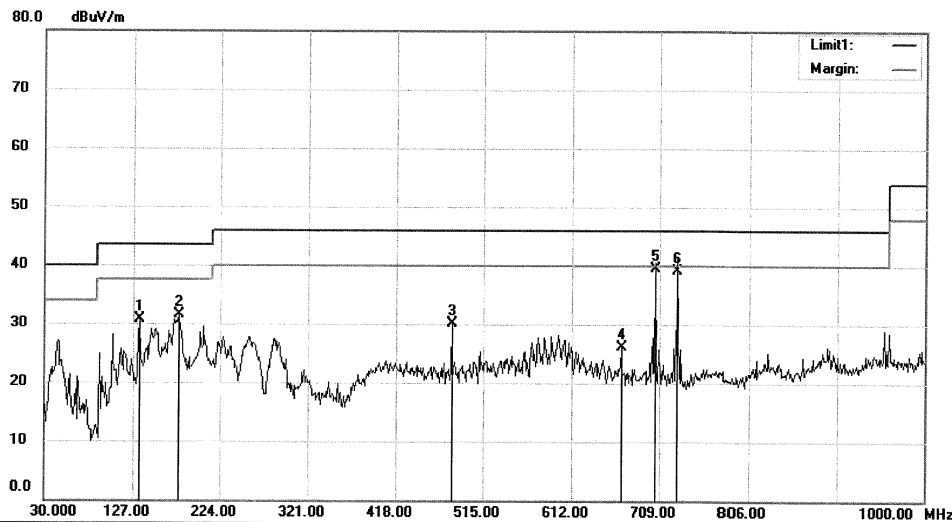
Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#784

Date: 2016/06/03



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: Connect to pc

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		133.7900	49.45	-18.72	30.73	43.50	-12.77	QP		
2		178.4100	48.65	-17.17	31.48	43.50	-12.02	QP		
3		480.0800	37.98	-7.79	30.19	46.00	-15.81	QP		
4		666.3200	30.88	-4.78	26.10	46.00	-19.90	QP		
5	*	704.1500	43.68	-4.18	39.50	46.00	-6.50	QP		
6		729.3700	42.92	-3.82	39.10	46.00	-6.90	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#784

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

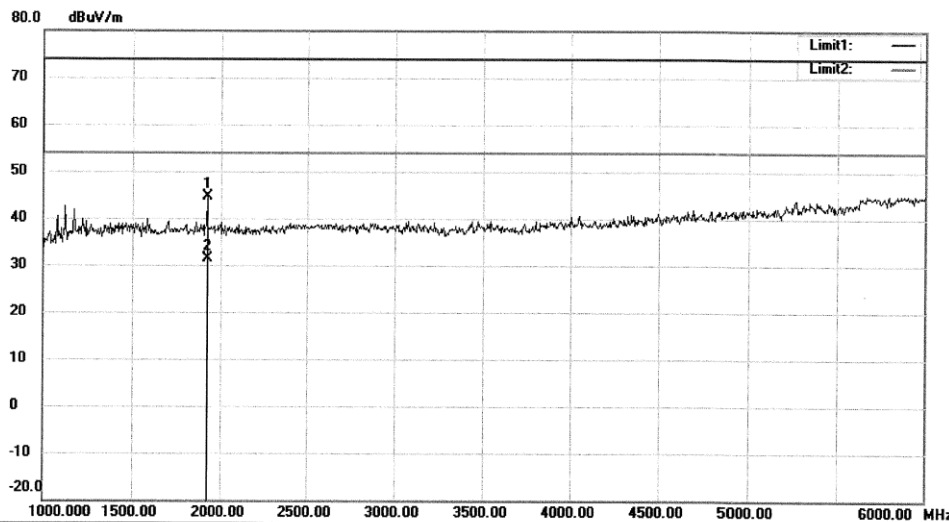

Radiated Emission Measurement

File :TUV

Data :#803

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: camera recoding front

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1920.000	67.91	-23.34	44.57	74.00	-29.43	peak		
2	*	1920.000	54.84	-23.34	31.50	54.00	-22.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#803

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

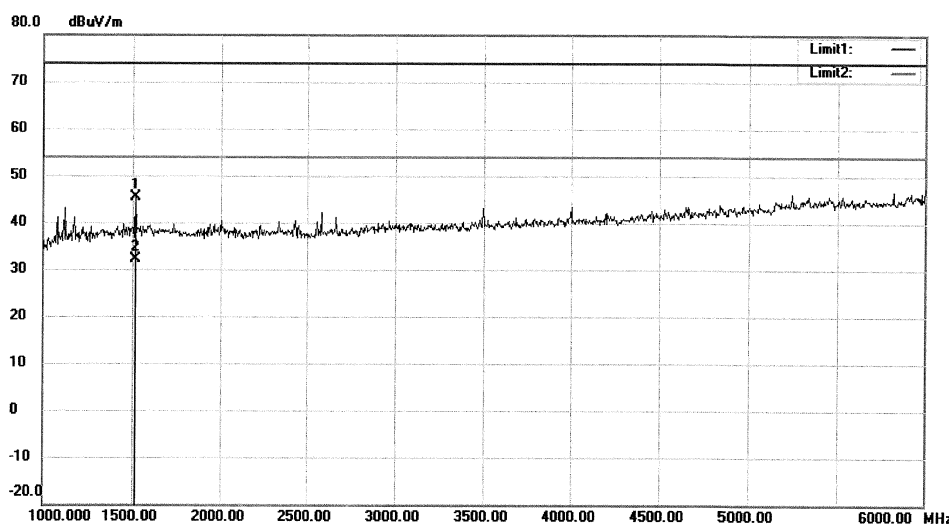

Radiated Emission Measurement

File :TUV

Data :#802

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:camera recoding front

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1515.000	68.74	-23.45	45.29	74.00	-28.71	peak		
2	*	1515.000	55.55	-23.45	32.10	54.00	-21.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#802

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

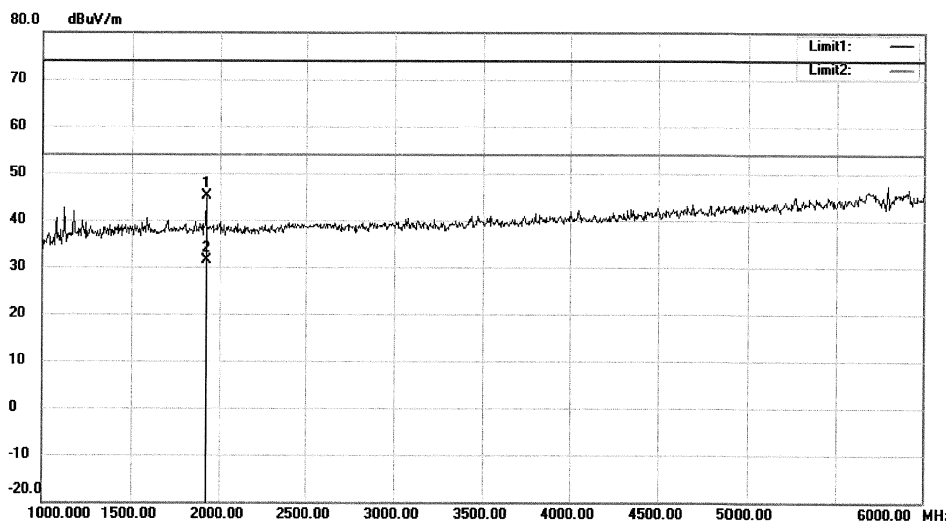

Radiated Emission Measurement

File :TUV

Data :#800

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: camera recoding rear

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1920.000	68.41	-23.34	45.07	74.00	-28.93	peak		
2	*	1920.000	54.74	-23.34	31.40	54.00	-22.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#800

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

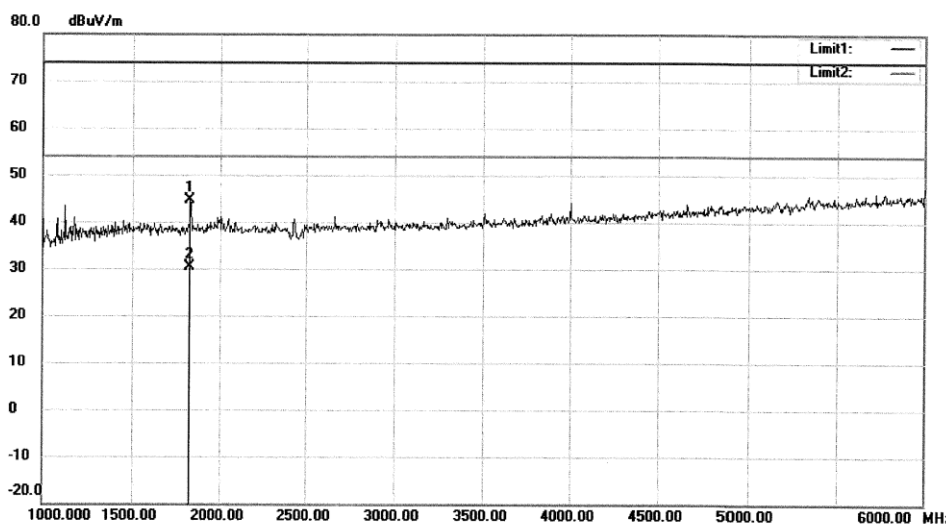

Radiated Emission Measurement

File :TUV

Data :#801

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: camera recoding rear

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1825.000	68.21	-23.65	44.56	74.00	-29.44	peak		
2	*	1825.000	54.15	-23.65	30.50	54.00	-23.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#801

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

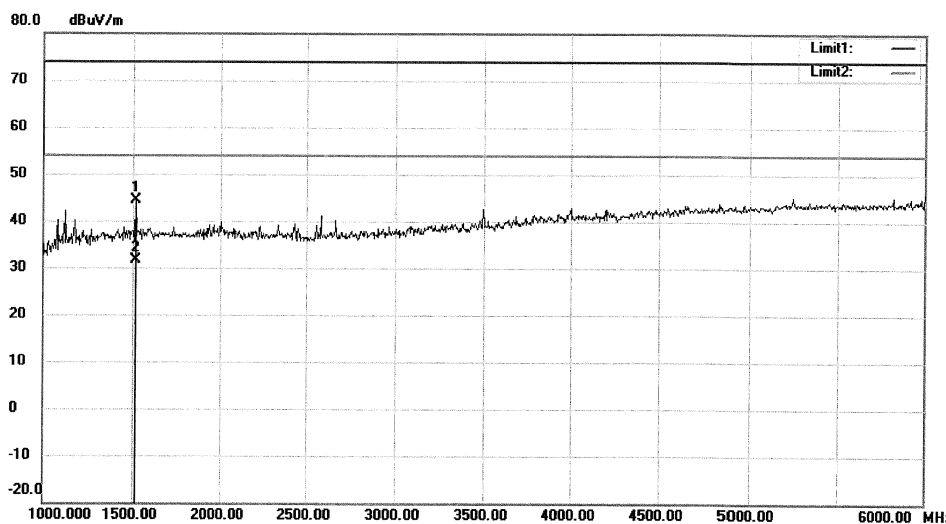

Radiated Emission Measurement

File :TUV

Data :#804

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: Video play(mem)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1515.000	67.74	-23.45	44.29	74.00	-29.71	peak		
2	*	1515.000	55.05	-23.45	31.60	54.00	-22.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#804

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

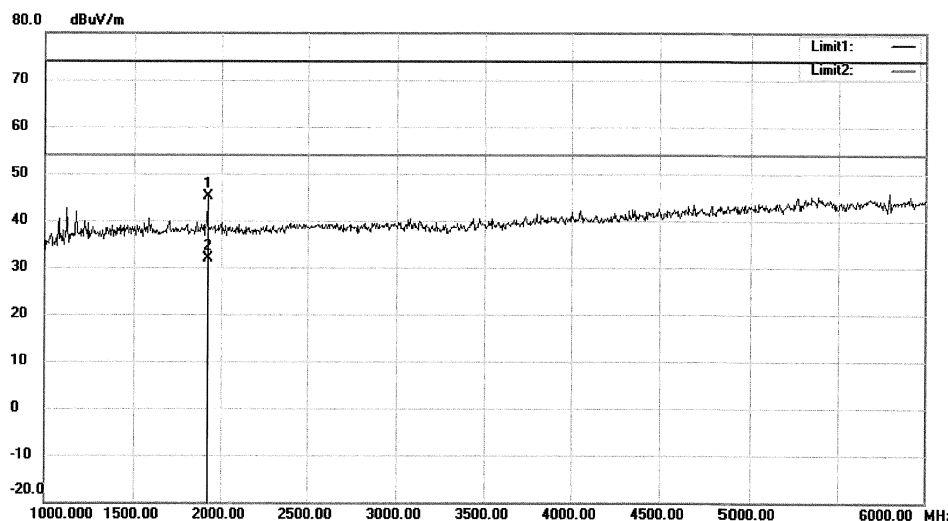

Radiated Emission Measurement

File :TUV

Data :#805

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:Video play(mem)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1920.000	68.41	-23.34	45.07	74.00	-28.93	peak		
2	*	1920.000	55.14	-23.34	31.80	54.00	-22.20	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#805

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

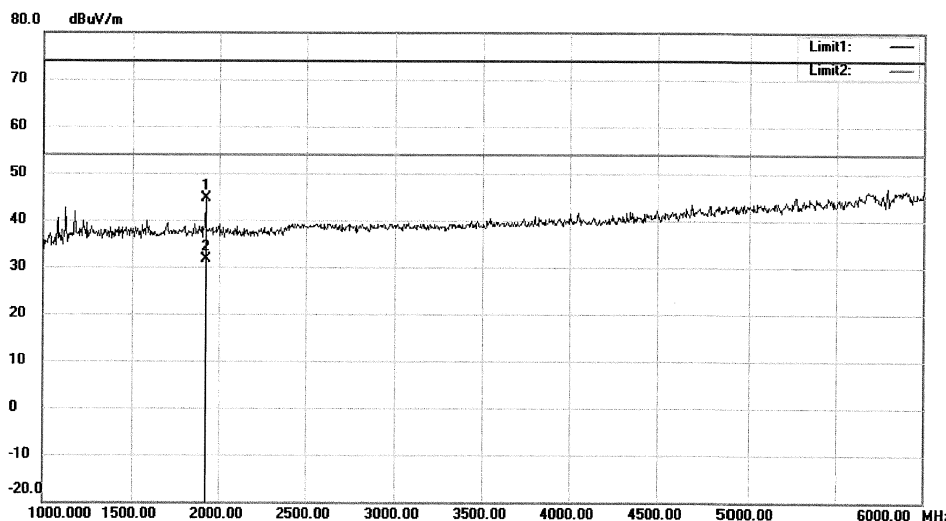

Radiated Emission Measurement

File :TUV

Data :#807

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: Video play(USB)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1920.000	67.91	-23.34	44.57	74.00	-29.43	peak		
2	*	1920.000	55.04	-23.34	31.70	54.00	-22.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#807

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

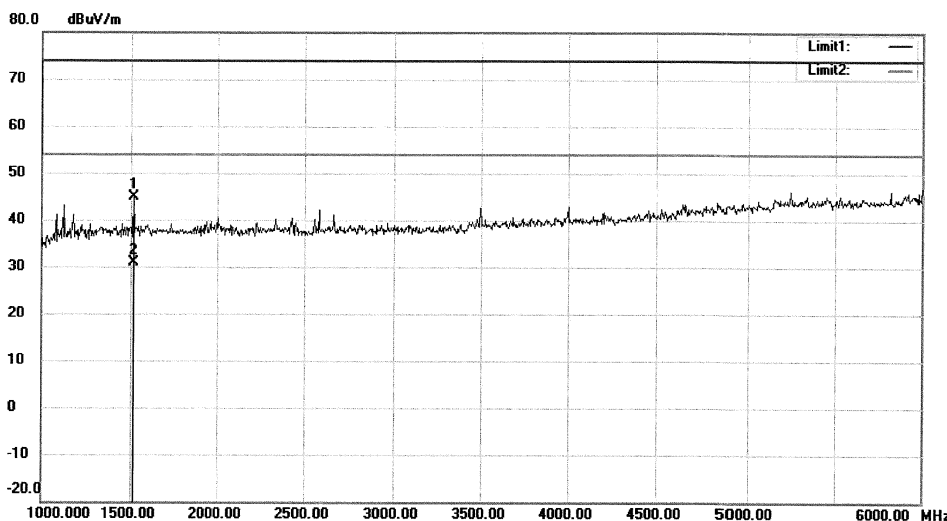

Radiated Emission Measurement

File :TUV

Data :#806

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:Video play(USB)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1515.000	68.24	-23.45	44.79	74.00	-29.21	peak		
2	*	1515.000	54.45	-23.45	31.00	54.00	-23.00	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#806

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

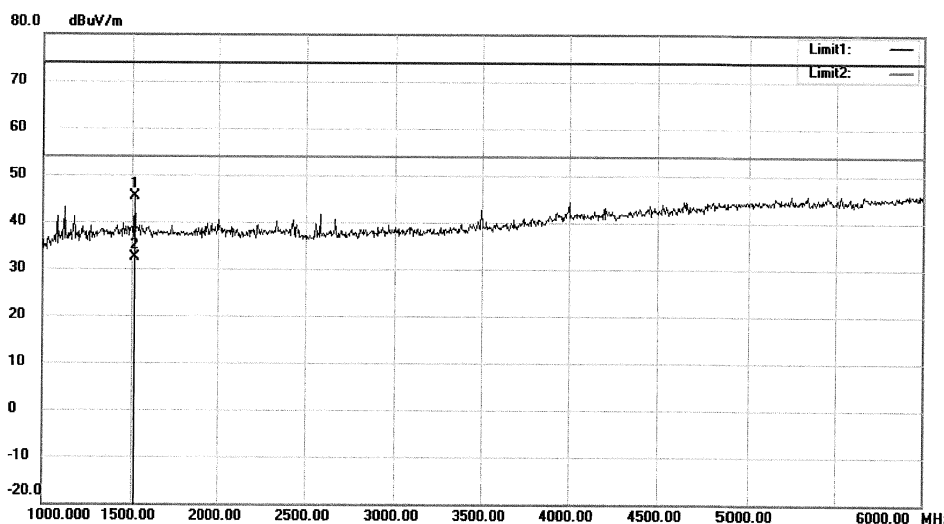

Radiated Emission Measurement

File :TUV

Data :#808

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: Video play(SD card)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1515.000	68.74	-23.45	45.29	74.00	-28.71	peak		
2	*	1515.000	55.85	-23.45	32.40	54.00	-21.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#808

Page: 1

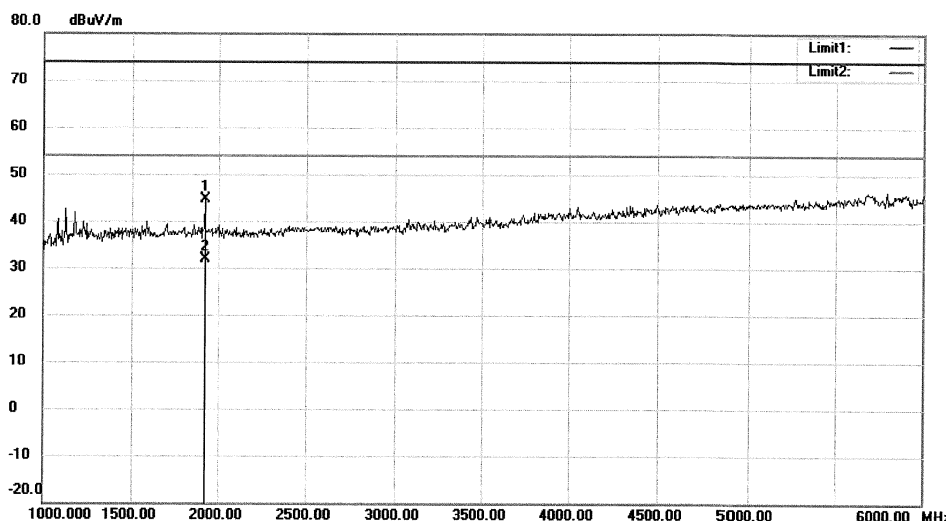
Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#809

Date: 2016/06/03



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode: Video play(SD card)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		1920.000	67.91	-23.34	44.57	74.00	-29.43	peak		
2	*	1920.000	55.14	-23.34	31.80	54.00	-22.20	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#809

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

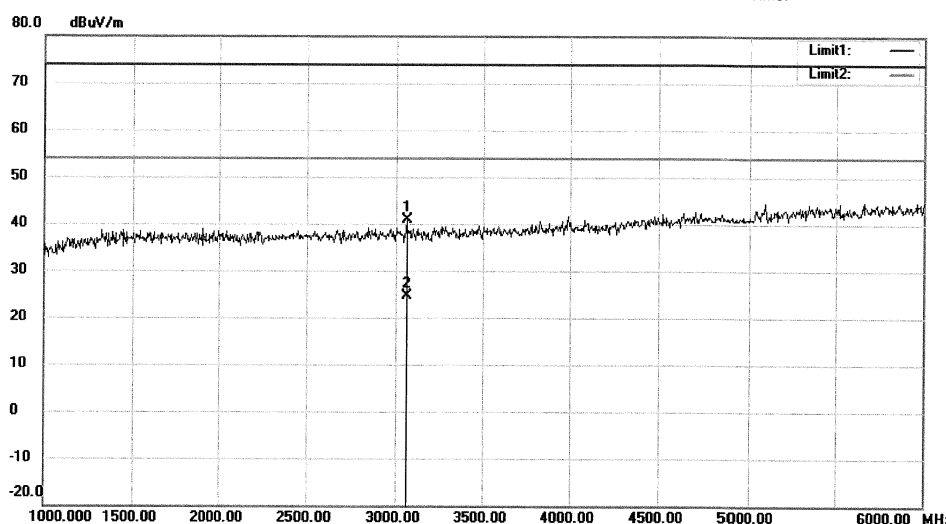

Radiated Emission Measurement

File :TUV

Data :#799

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:Connect to pc

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		3060.000	62.34	-21.49	40.85	74.00	-33.15	peak		
2	*	3060.000	46.19	-21.49	24.70	54.00	-29.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#799

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

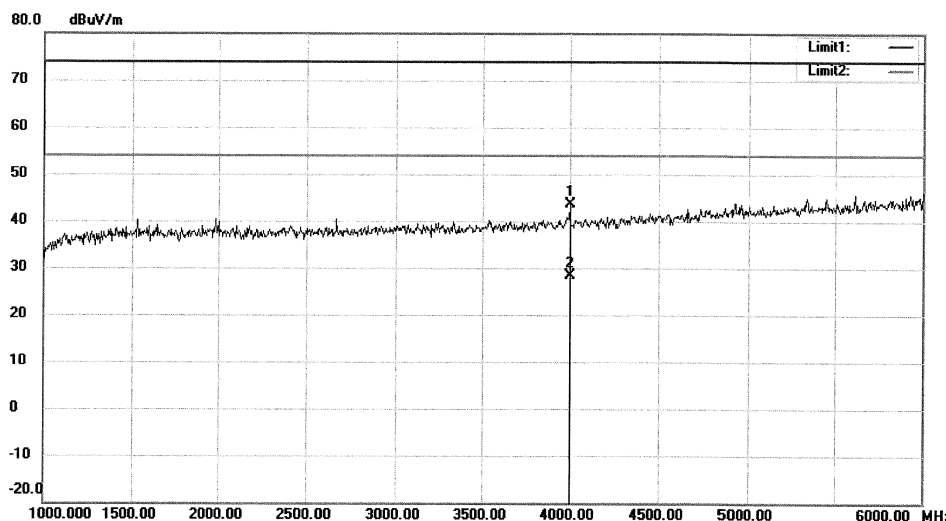

Radiated Emission Measurement

File :TUV

Data :#798

Date: 2016/06/03

Time:



Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: MID

M/N: NS-P16AT08

Mode:Connect to pc

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		4000.000	62.13	-18.57	43.56	74.00	-30.44	peak		
2	*	4000.000	46.97	-18.57	28.40	54.00	-25.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#798

Page: 1

7. List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT	8

8. List of Photographs

Photograph 1: Set-up for Conducted Emission	49
Photograph 2: Set-up for Radiated Emission of below 1GHz	49
Photograph 3: Set-up for Radiated Emission of above 1GHz.....	50