

APPLICATION CERTIFICATION FCC Part 15C  
On Behalf of  
Beijing Kangshuo Information Technology Co.,Ltd

Color Screen Heart Rate Band  
Model No.: WD06

FCC ID: 2ALYI-WD06

Prepared for : Beijing Kangshuo Information Technology Co.,Ltd  
Address : C244, Building 1, Shangdi 3rd Road, Haidian, Beijing, China

Prepared by : Shenzhen Accurate Technology Co., Ltd.  
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry  
Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report No. : ATE20181354  
Date of Test : July 28-August 2, 2018  
Date of Report : August 2, 2018

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels .....	5
1.3. Special Accessory and Auxiliary Equipment .....	6
1.4. Description of Test Facility .....	6
1.5. Measurement Uncertainty .....	6
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>7</b>
<b>3. OPERATION OF EUT DURING TESTING .....</b>	<b>8</b>
3.1. Operating Mode .....	8
3.2. Configuration and peripherals .....	8
<b>4. TEST PROCEDURES AND RESULTS .....</b>	<b>9</b>
<b>5. POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>10</b>
5.1. Block Diagram of Test Setup.....	10
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement .....	11
5.4. Operating Condition of EUT .....	11
5.5. Test Procedure .....	11
5.6. Data Sample.....	12
5.7. Power Line Conducted Emission Measurement Results .....	12
<b>6. 6DB BANDWIDTH MEASUREMENT .....</b>	<b>17</b>
6.1. Block Diagram of Test Setup.....	17
6.2. The Requirement For Section 15.247(a)(2).....	17
6.3. EUT Configuration on Measurement .....	17
6.4. Operating Condition of EUT .....	17
6.5. Test Procedure .....	17
6.6. Test Result .....	18
<b>7. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>20</b>
7.1. Block Diagram of Test Setup.....	20
7.2. The Requirement For Section 15.247(b)(3).....	20
7.3. EUT Configuration on Measurement .....	20
7.4. Operating Condition of EUT .....	20
7.5. Test Procedure .....	20
7.6. Test Result .....	21
<b>8. POWER SPECTRAL DENSITY MEASUREMENT .....</b>	<b>23</b>
8.1. Block Diagram of Test Setup.....	23
8.2. The Requirement For Section 15.247(e).....	23
8.3. EUT Configuration on Measurement .....	23
8.4. Operating Condition of EUT .....	23
8.5. Test Procedure .....	24
8.6. Test Result .....	24
<b>9. BAND EDGE COMPLIANCE TEST .....</b>	<b>27</b>
9.1. Block Diagram of Test Setup.....	27
9.2. The Requirement For Section 15.247(d) .....	27
9.3. EUT Configuration on Measurement .....	27

9.4.	Operating Condition of EUT .....	27
9.5.	Test Procedure .....	28
9.6.	Test Result .....	28
<b>10.</b>	<b>RADIATED SPURIOUS EMISSION TEST .....</b>	<b>34</b>
10.1.	Block Diagram of Test Setup.....	34
10.2.	The Limit For Section 15.247(d) .....	35
10.3.	Restricted bands of operation .....	36
10.4.	Configuration of EUT on Measurement .....	36
10.5.	Operating Condition of EUT .....	37
10.6.	Test Procedure .....	37
10.7.	Data Sample.....	38
10.8.	The Field Strength of Radiation Emission Measurement Results .....	38
<b>11.</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>51</b>
11.1.	The Requirement .....	51
11.2.	Antenna Construction .....	51

## Test Report Certification

Applicant : Beijing Kangshuo Information Technology Co.,Ltd  
Manufacturer : Beijing Kangshuo Information Technology Co.,Ltd  
EUT Description : Color Screen Heart Rate Band  
Model No. : WD06  
Trade Name : lenovo

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**ANSI C63.10: 2013**

The EUT was tested according to DTS test procedure of Apr 05, 2017 KDB558074 D01 DTS Meas Guidance v04 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements. This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test : July 28-August 2, 2018

Date of Report : August 2, 2018

Test Engineer :



(Star Yang, Engineer)

Prepared by :



(Star Yang, Engineer)

Approved & Authorized Signer :



(Sean Liu, Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	Color Screen Heart Rate Band
Model Number	:	WD06
Bluetooth version	:	V4.2 BLE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	1.72 dBi
Antenna type	:	Ceramic antenna
Modulation mode	:	GFSK
Power Supply	:	DC 3.7V (Powered by Lithium battery) or DC 5.0V (Powered by USB port)
Hardware version	:	V1.3
Software version	:	V1.0.0.15
Applicant	:	Beijing Kangshuo Information Technology Co.,Ltd
Address	:	C244, Building 1, Shangdi 3rd Road, Haidian, Beijing, China
Manufacturer	:	Beijing Kangshuo Information Technology Co.,Ltd
Address	:	C244, Building 1, Shangdi 3rd Road, Haidian, Beijing, China

### 1.2. Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

### 1.3.Special Accessory and Auxiliary Equipment

AC/DC Power Adapter (provided by laboratory)	:	Model:TEKA006-0501000UKU
		Input: 100-240V~50/60Hz 0.3A
		Output: DC 5V/1A

### 1.4.Description of Test Facility

EMC Lab	:	Recognition of accreditation by Federal Communications Commission (FCC) The Designation Number is CN1189 The Registration Number is 708358  Listed by Innovation, Science and Economic Development Canada (ISED) The Registration Number is 5077A-2  Accredited by China National Accreditation Service for Conformity Assessment (CNAS) The Registration Number is CNAS L3193  Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01
Name of Firm	:	Shenzhen Accurate Technology Co., Ltd.
Site Location	:	1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

### 1.5.Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	=	4.06dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 06, 2018	1 Year
EMI Test Receiver	Rohde& Schwarz	ESR	101817	Jan. 06, 2018	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	Jan. 06, 2018	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU1183540-01	3791	Jan. 06, 2018	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 06, 2018	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 06, 2018	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 06, 2018	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18G-10S	N/A	Jan. 06, 2018	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2485-2375/2510-60/11SS	N/A	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-5m(Frequency range:9KHz-26.5GHz)	NO.3	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-5m(Frequency range:9KHz-26.5GHz)	NO.4	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-1m(Frequency range:9KHz-26.5GHz)	NO.5	Jan. 06, 2018	1 Year
RF COAXIAL CABLE	SUHNER	N-1m(Frequency range:9KHz-26.5GHz)	NO.6	Jan. 06, 2018	1 Year
Temporary antenna connector	NTGS	14AE	N/A	July 30, 2018	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 3. OPERATION OF EUT DURING TESTING

#### 3.1.Operating Mode

The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

Note: The equipment under test (EUT) was tested under fully-charged battery.

The Bluetooth has been tested under continuous transmission mode.

Its duty cycle setting is greater than 98%.

EUT is connected to a computer through the usb-serial controller tool and Use test software to set the test mode.

Test software is (nRFgo Studio)

#### 3.2.Configuration and peripherals

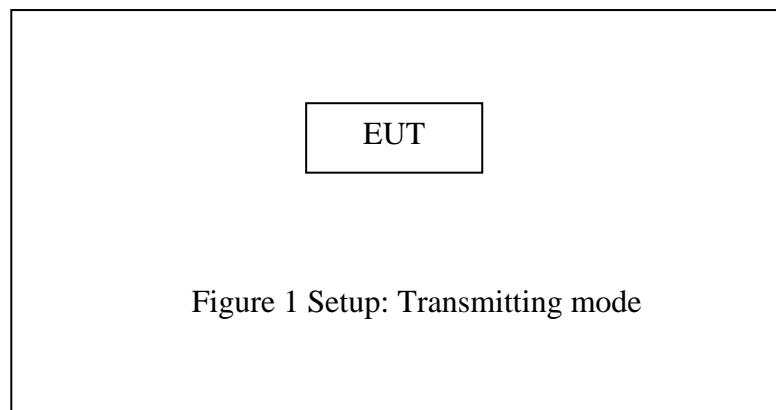


Figure 1 Setup: Transmitting mode




## 4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant


## 5. POWER LINE CONDUCTED MEASUREMENT

### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators

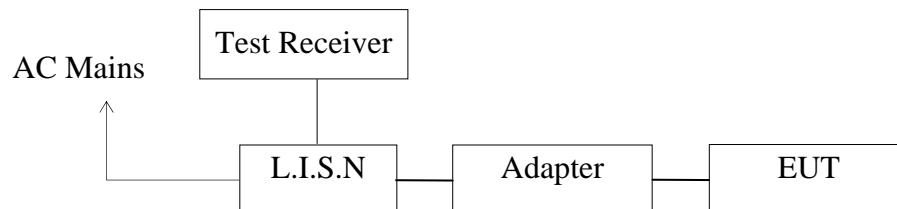

#### 5.1.2. Test System Setup

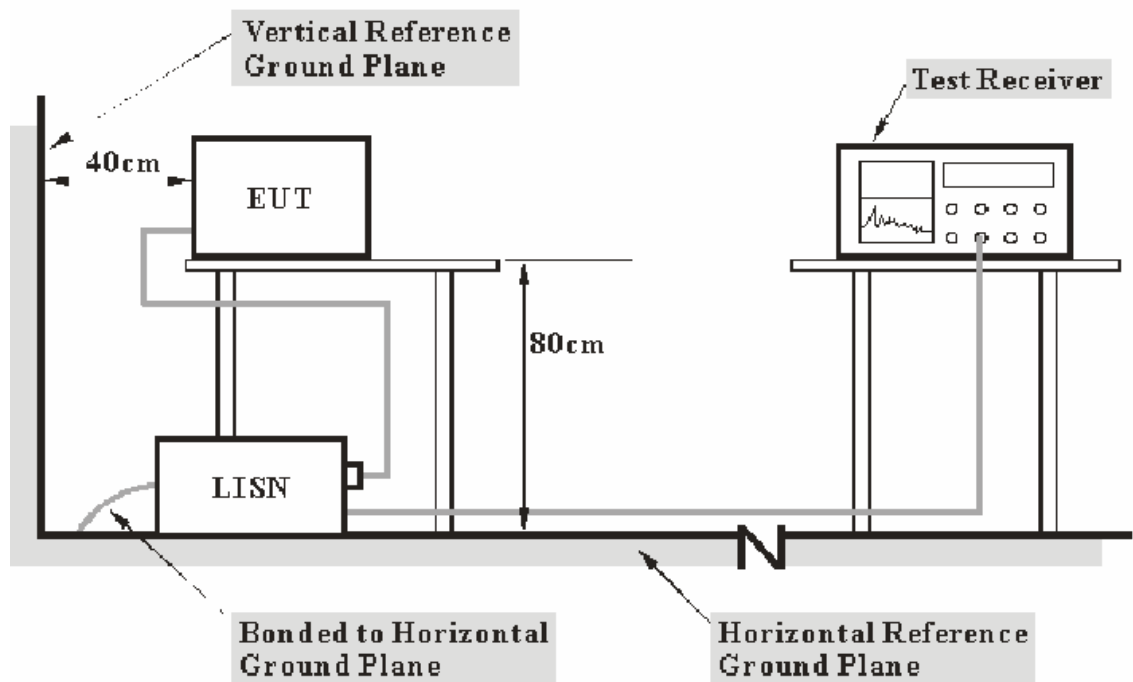

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

## 5.2.Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0
NOTE1: The lower limit shall apply at the transition frequencies.		
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.		

## 5.3.Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

## 5.4.Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

## 5.5.Test Procedure

The EUT is put on the plane 0.8 m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

## 5.6.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dBμV)	Average Level (dBμV)	QuasiPeak Limit (dBμV)	Average Limit (dBμV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	11.1	41.8	32.0	56.0	46.0	14.2	14.0	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dBμV) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dBμV) = Limit stated in standard

Margin = Limit (dBμV) - Level (dBμV)

Calculation Formula:

Margin = Limit (dBμV) - Level (dBμV)

## 5.7.Power Line Conducted Emission Measurement Results

**Pass.**

Test Lab: Shielding room

Test Engineer: Frank

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT. Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


## ACCURATE TECHNOLOGY CO., LTD

### CONDUCTED EMISSION STANDARD FCC PART 15C

EUT: Color Screen Heart Rate Band M/N:WD06  
 Manufacturer: Beijing Kangshuo Information Technology Co.,Ltd  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Frank  
 Test Specification: N 120V/60Hz  
 Comment: Report NO.:ATE20171354  
 Start of Test: 2018-7-28 / 13:44:21

#### SCAN TABLE: "V 150K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

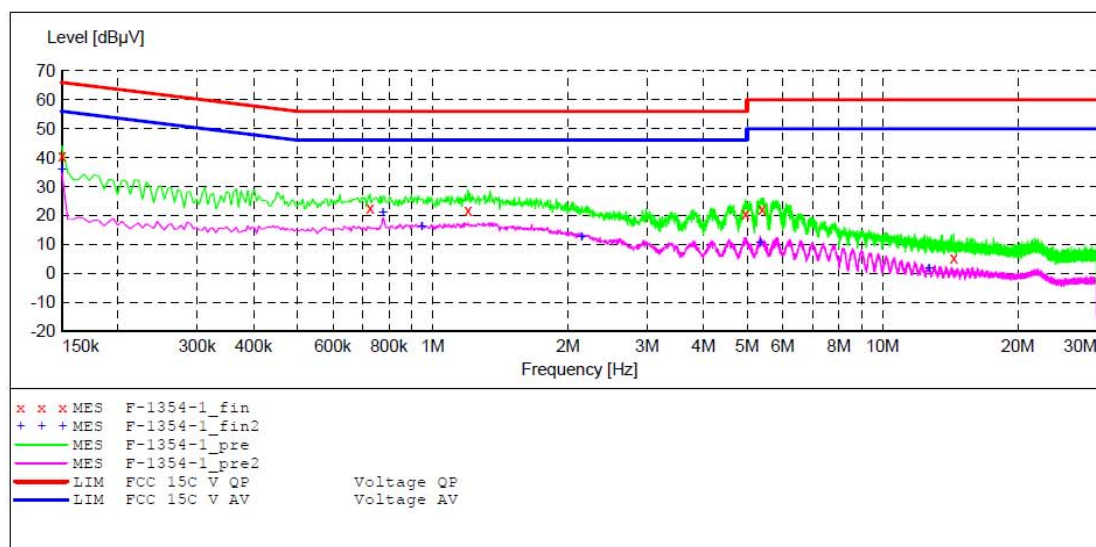

#### MEASUREMENT RESULT: "F-1354-1\_fin"

2018-7-28 13:47

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	40.80	10.8	66	25.2	QP	N	GND
0.726000	22.60	11.1	56	33.4	QP	N	GND
1.198500	21.90	11.2	56	34.1	QP	N	GND
4.951500	20.60	11.4	56	35.4	QP	N	GND
5.392500	22.20	11.5	60	37.8	QP	N	GND
14.410500	5.30	11.6	60	54.7	QP	N	GND

#### MEASUREMENT RESULT: "F-1354-1\_fin2"

2018-7-28 13:47

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	35.80	10.8	56	20.2	AV	N	GND
0.775500	21.00	11.1	46	25.0	AV	N	GND
0.946500	16.10	11.1	46	29.9	AV	N	GND
2.143500	12.60	11.3	46	33.4	AV	N	GND
5.343000	10.70	11.5	50	39.3	AV	N	GND
12.682500	1.90	11.6	50	48.1	AV	N	GND


## ACCURATE TECHNOLOGY CO., LTD

### CONDUCTED EMISSION STANDARD FCC PART 15C

EUT: Color Screen Heart Rate Band M/N:WD06  
 Manufacturer: Beijing Kangshuo Information Technology Co.,Ltd  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Frank  
 Test Specification: L 120V/60Hz  
 Comment: Report NO.:ATE20171354  
 Start of Test: 2018-7-28 / 13:48:10

### SCAN TABLE: "V 150K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

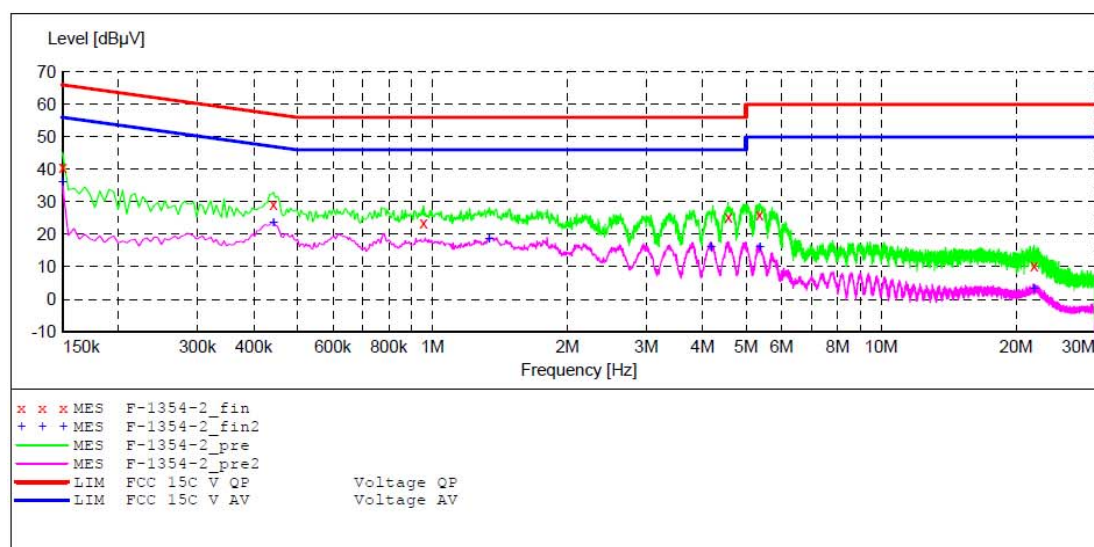

### MEASUREMENT RESULT: "F-1354-2\_fin"

2018-7-28 13:52

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	40.80	10.8	66	25.2	QP	L1	GND
0.442500	29.20	11.0	57	27.8	QP	L1	GND
0.955500	23.50	11.1	56	32.5	QP	L1	GND
4.564500	25.40	11.4	56	30.6	QP	L1	GND
5.361000	26.00	11.5	60	34.0	QP	L1	GND
21.930000	10.40	11.7	60	49.6	QP	L1	GND

### MEASUREMENT RESULT: "F-1354-2\_fin2"

2018-7-28 13:52

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	35.90	10.8	56	20.1	AV	L1	GND
0.442500	23.70	11.0	47	23.3	AV	L1	GND
1.338000	18.60	11.2	46	27.4	AV	L1	GND
4.177500	16.10	11.4	46	29.9	AV	L1	GND
5.370000	16.00	11.5	50	34.0	AV	L1	GND
21.907500	3.20	11.7	50	46.8	AV	L1	GND




## ACCURATE TECHNOLOGY CO., LTD

### CONDUCTED EMISSION STANDARD FCC PART 15C

EUT: Color Screen Heart Rate Band M/N:WD06  
 Manufacturer: Beijing Kangshuo Information Technology Co.,Ltd  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Frank  
 Test Specification: L 240V/50Hz  
 Comment: Report NO.:ATE20171354  
 Start of Test: 2018-7-28 / 13:53:18

#### SCAN TABLE: "V 150K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

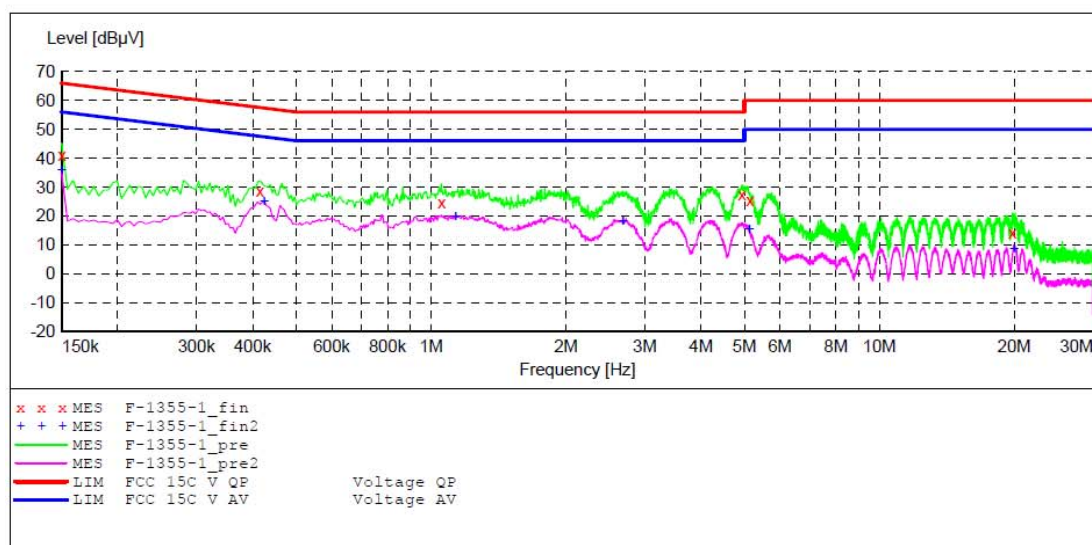

#### MEASUREMENT RESULT: "F-1355-1\_fin"

2018-7-28 13:56

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	41.00	10.8	66	25.0	QP	L1	GND
0.415500	28.70	11.0	58	28.8	QP	L1	GND
1.054500	24.60	11.1	56	31.4	QP	L1	GND
4.938000	27.40	11.4	56	28.6	QP	L1	GND
5.145000	25.20	11.4	60	34.8	QP	L1	GND
19.806000	14.00	11.7	60	46.0	QP	L1	GND

#### MEASUREMENT RESULT: "F-1355-1\_fin2"

2018-7-28 13:56

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	35.90	10.8	56	20.1	AV	L1	GND
0.424500	24.90	11.0	47	22.5	AV	L1	GND
1.135500	19.90	11.2	46	26.1	AV	L1	GND
2.679000	18.20	11.3	46	27.8	AV	L1	GND
5.131500	15.30	11.4	50	34.7	AV	L1	GND
19.977000	8.70	11.7	50	41.3	AV	L1	GND


## ACCURATE TECHNOLOGY CO.,LTD

### CONDUCTED EMISSION STANDARD FCC PART 15C

EUT: Color Screen Heart Rate Band M/N:WD06  
 Manufacturer: Beijing Kangshuo Information Technology Co.,Ltd  
 Operating Condition: BT Communication  
 Test Site: 2#Shielding Room  
 Operator: Frank  
 Test Specification: N 240V/50Hz  
 Comment: Report NO.:ATE20171354  
 Start of Test: 2018-7-28 / 13:57:01

#### SCAN TABLE: "V 150K-30MHz fin"

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

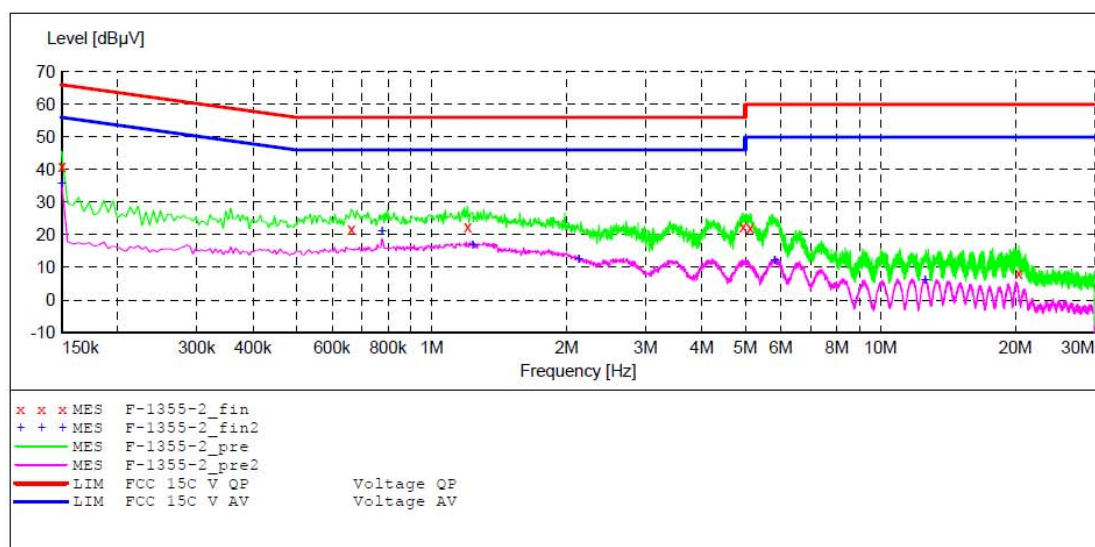

#### MEASUREMENT RESULT: "F-1355-2\_fin"

2018-7-28 13:59

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	41.00	10.8	66	25.0	QP	N	GND
0.663000	21.80	11.1	56	34.2	QP	N	GND
1.203000	22.40	11.2	56	33.6	QP	N	GND
4.942500	22.50	11.4	56	33.5	QP	N	GND
5.131500	22.20	11.4	60	37.8	QP	N	GND
20.341500	8.40	11.7	60	51.6	QP	N	GND

#### MEASUREMENT RESULT: "F-1355-2\_fin2"

2018-7-28 13:59

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	35.70	10.8	56	20.3	AV	N	GND
0.775500	21.10	11.1	46	24.9	AV	N	GND
1.234500	16.90	11.2	46	29.1	AV	N	GND
2.130000	12.70	11.3	46	33.3	AV	N	GND
5.815500	12.10	11.5	50	37.9	AV	N	GND
12.588000	6.10	11.6	50	43.9	AV	N	GND



## 6. 6DB BANDWIDTH MEASUREMENT

### 6.1. Block Diagram of Test Setup



### 6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

6.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.


## 6.6. Test Result

Test Lab: Shielding room


Test Engineer: Frank

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit(MHz)	Pass/Fail
0	2402	0.686	0.5	Pass
19	2440	0.677	0.5	Pass
39	2480	0.690	0.5	Pass

The spectrum analyzer plots are attached as below.

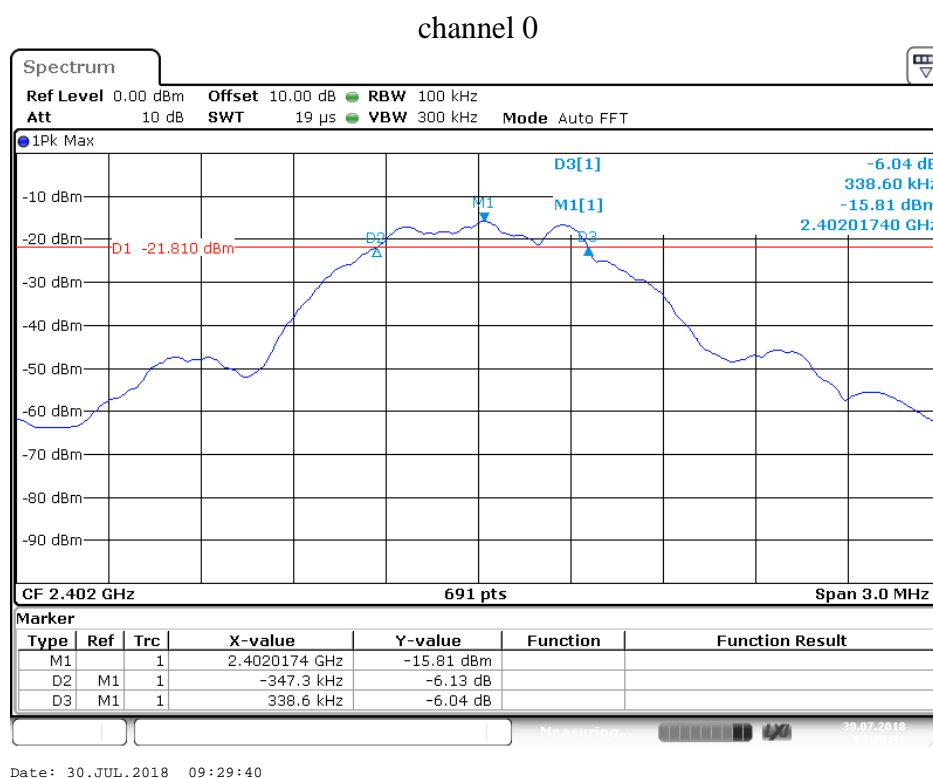


## channel 19

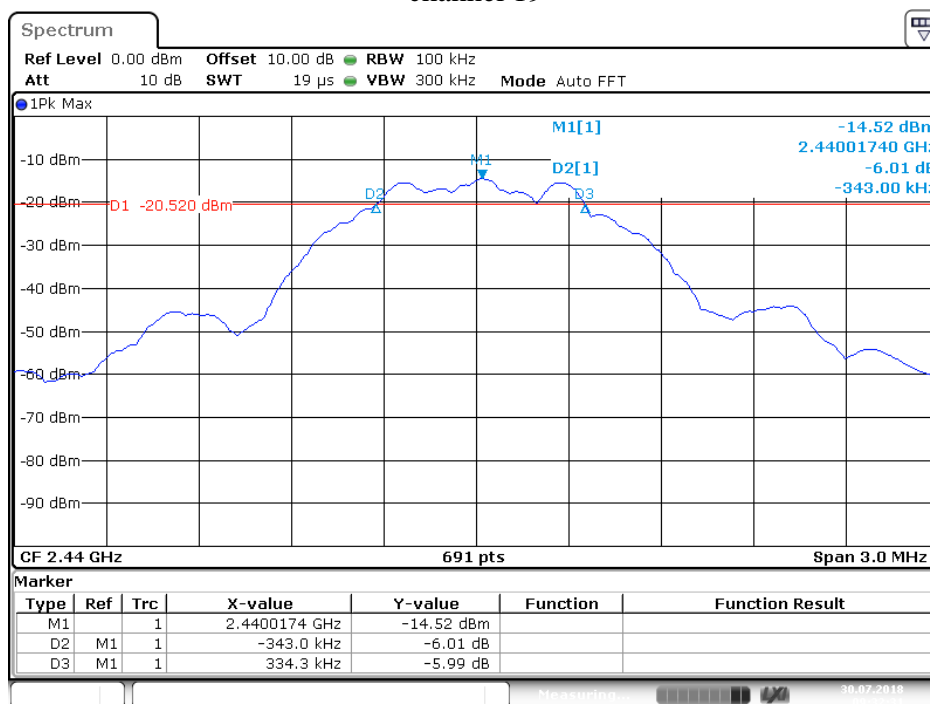

Date: 30.JUL.2018 09:32:31


## channel 39

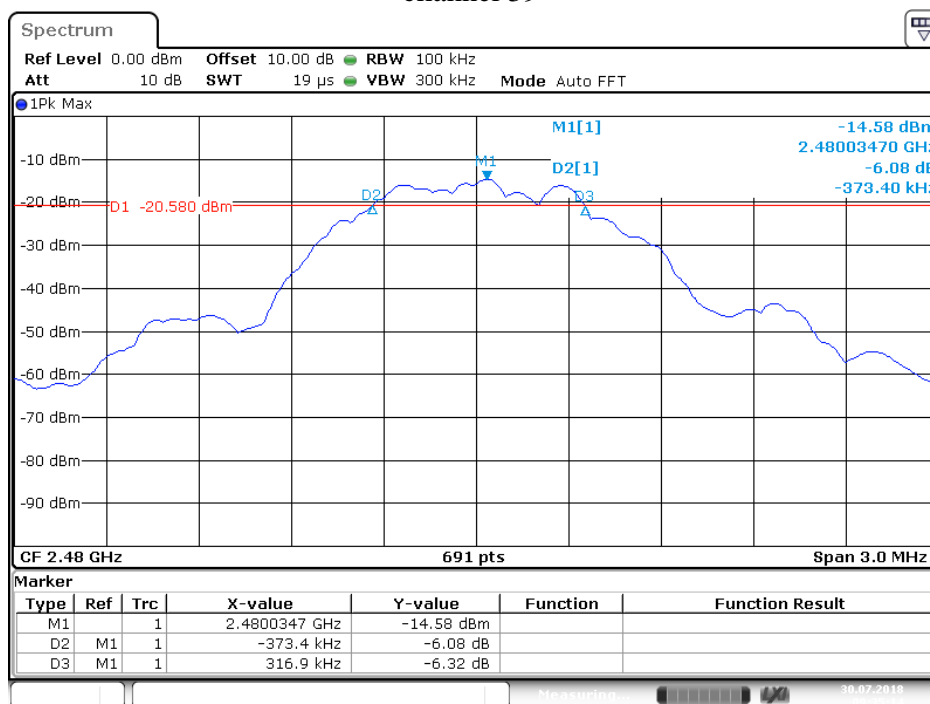

Date: 30.JUL.2018 09:35:14

## 7. MAXIMUM PEAK OUTPUT POWER

### 7.1. Block Diagram of Test Setup

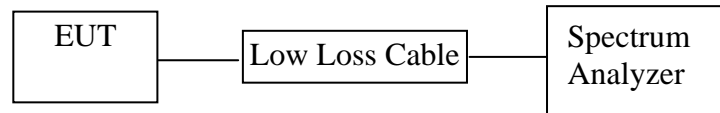

### 7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

### 7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

### 7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 1 MHz and VBW to 3MHz.

7.5.3. Measurement the maximum peak output power.

## 7.6. Test Result


Test Lab: Shielding room

Test Engineer: Frank

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-13.94	30	Pass
19	2440	-13.50	30	Pass
39	2480	-13.51	30	Pass


The spectrum analyzer plots are attached as below.

channel 0

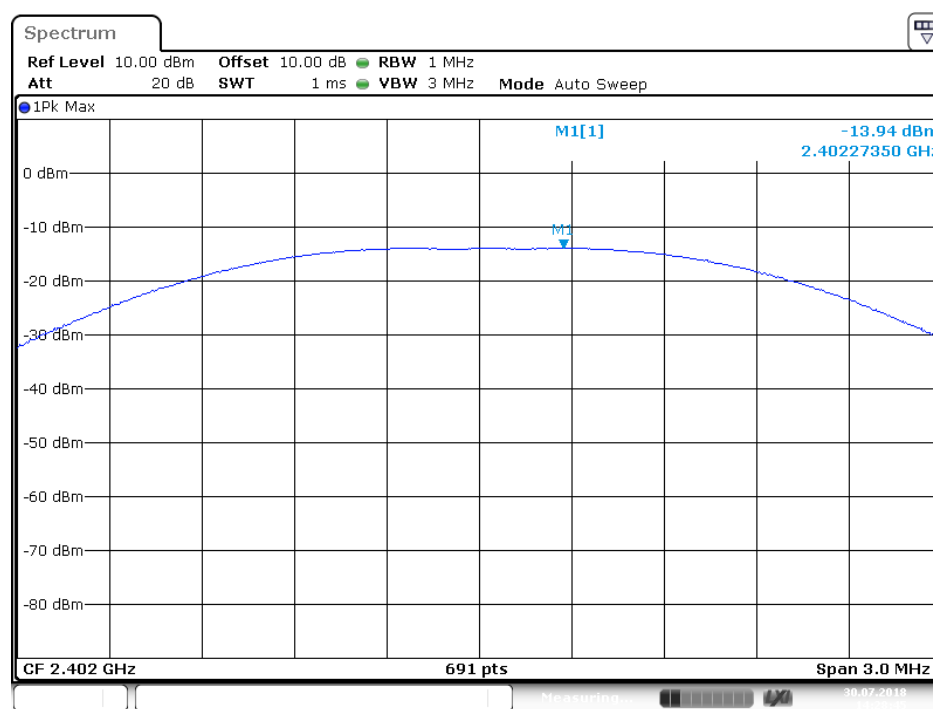


Date: 30.JUL.2018 14:28:45

## channel 19

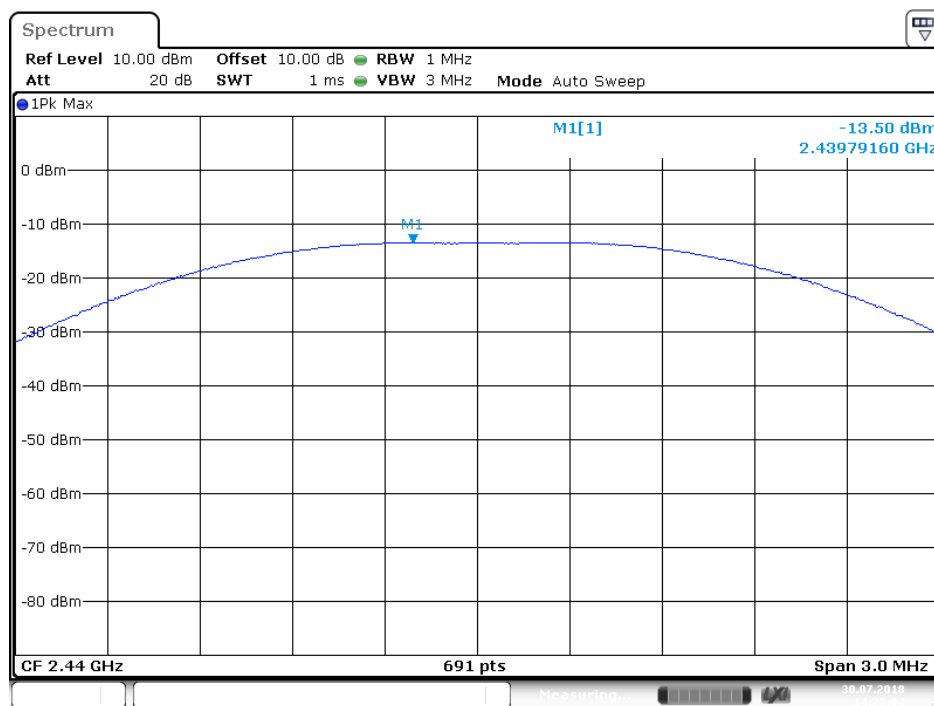

Date: 30.JUL.2018 14:28:05


## channel 39

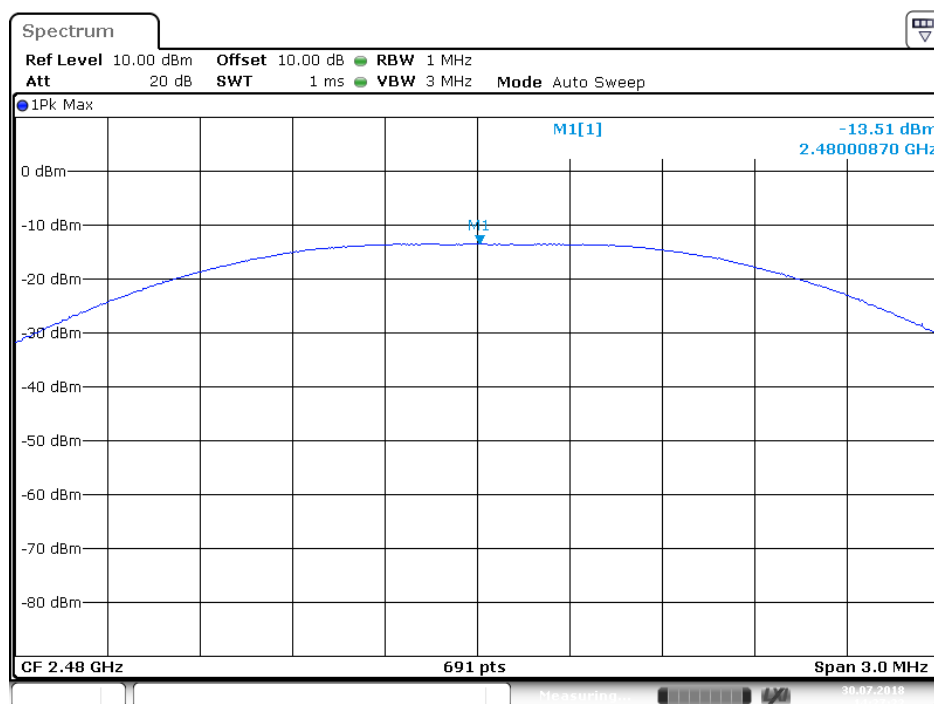

Date: 30.JUL.2018 14:27:22

## 8. POWER SPECTRAL DENSITY MEASUREMENT

### 8.1. Block Diagram of Test Setup

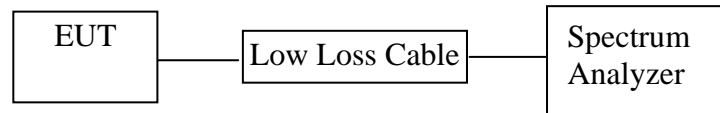

### 8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 8.5.Test Procedure

8.5.1.The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2.Measurement Procedure PKPSD:

8.5.3.This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

8.5.4.Measurement the maximum power spectral density.

## 8.6.Test Result

Test Lab: Shielding room


Test Engineer: Frank

Channel	Frequency (MHz )	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
0	2402	-35.03	8	Pass
19	2440	-36.29	8	Pass
39	2480	-34.27	8	Pass

The spectrum analyzer plots are attached as below.




channel 0

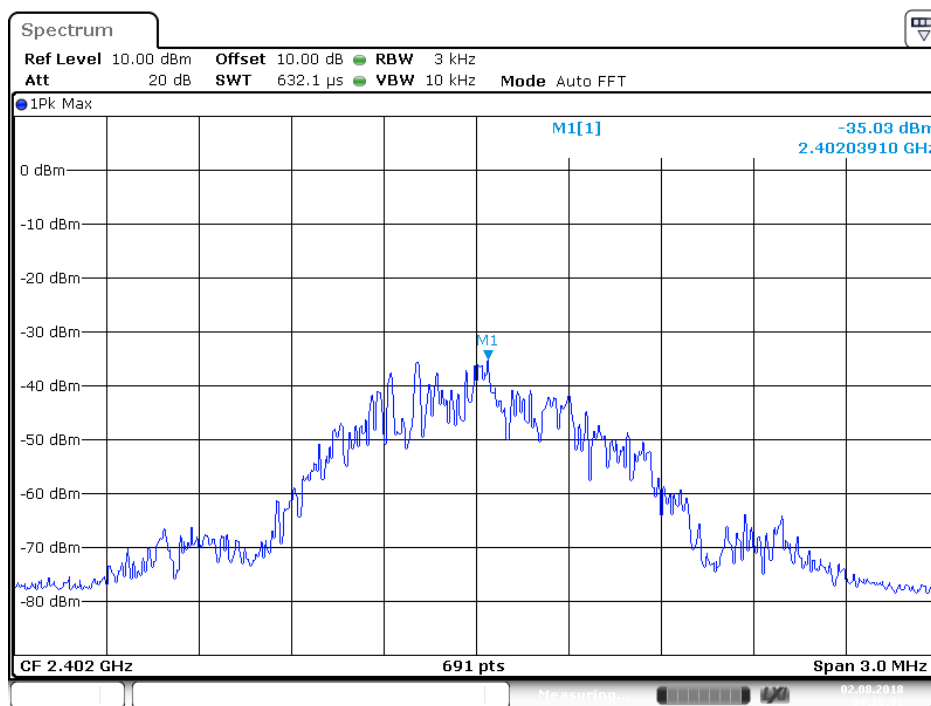


Date: 2.AUG.2018 09:26:31

channel 19

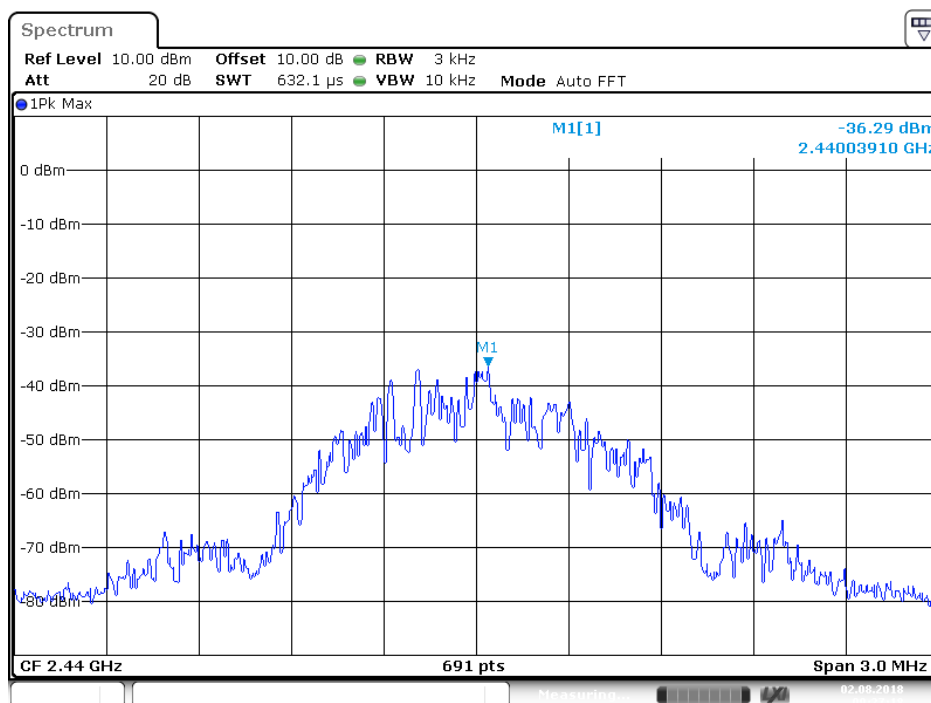

Date: 2.AUG.2018 09:27:18


## channel 39

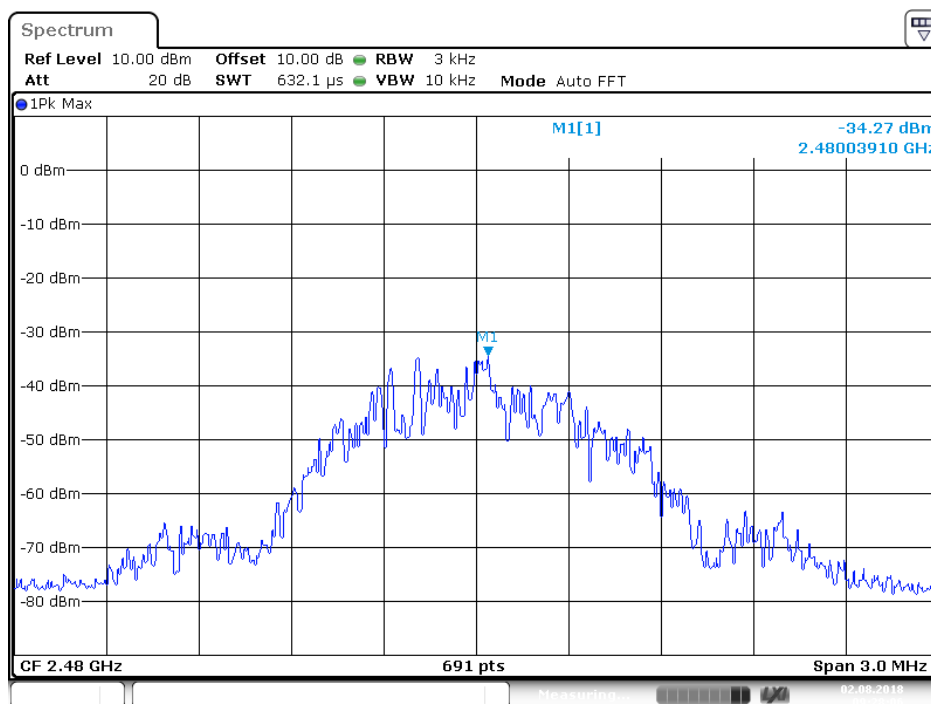

Date: 2.AUG.2018 09:28:06

## 9. BAND EDGE COMPLIANCE TEST

### 9.1. Block Diagram of Test Setup



### 9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

## 9.5. Test Procedure

### Conducted Band Edge:

9.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

### Radiate Band Edge:

9.5.3. The EUT is placed on a turntable, which is 1.5m above the ground plane and worked at highest radiated power.

9.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

9.5.7. RBW=1MHz, VBW=1MHz

9.5.8. The band edges was measured and recorded.

## 9.6. Test Result

**Pass.**

Test Lab: Shielding room


Test Engineer: Frank

### Conducted Band Edge Result

Channel	Frequency (MHz)	Delta peak to band emission	Limit(dBc)
0	2400.0	55.07	20
39	2483.5	54.76	20


The spectrum analyzer plots are attached as below.

## channel 0

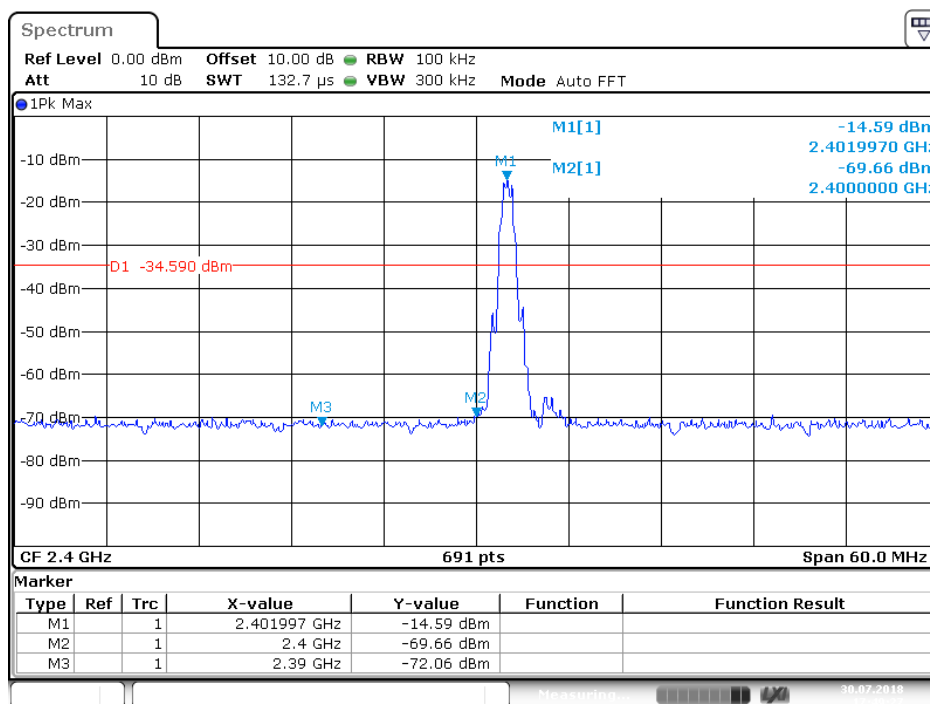

Date: 30.JUL.2018 17:49:27

## channel 39

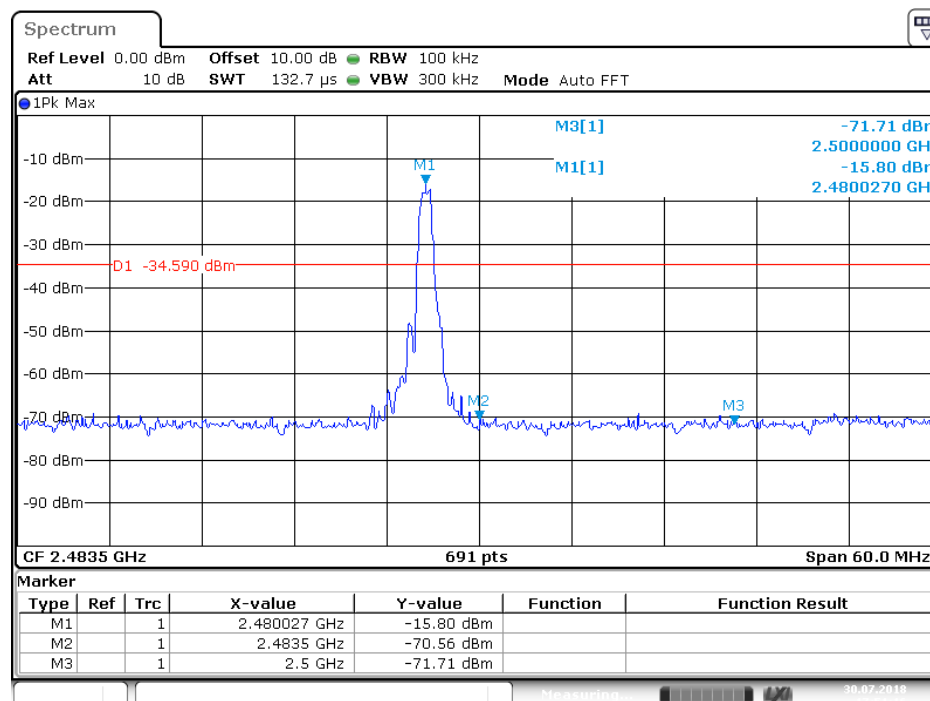

Date: 30.JUL.2018 17:51:16

## Radiated Band Edge Result

### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: FRANK2018 #570

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2402MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/29/34

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

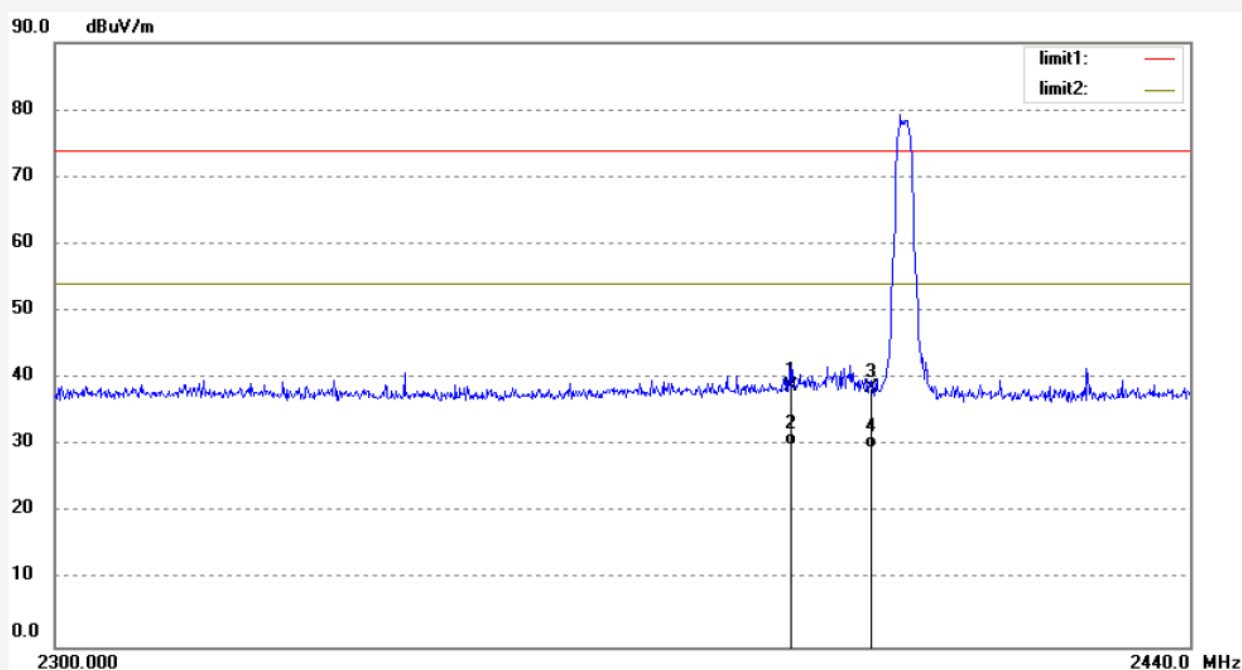

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	38.02	0.79	38.81	74.00	-35.19	peak	250	302	
2	2390.000	29.31	0.79	30.10	54.00	-23.90	AVG	200	156	
3	2400.000	37.75	0.88	38.63	74.00	-35.37	peak	200	61	
4	2400.000	28.65	0.88	29.53	54.00	-24.47	AVG	250	223	

Job No.: FRANK2018 #571

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2402MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/30/02

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

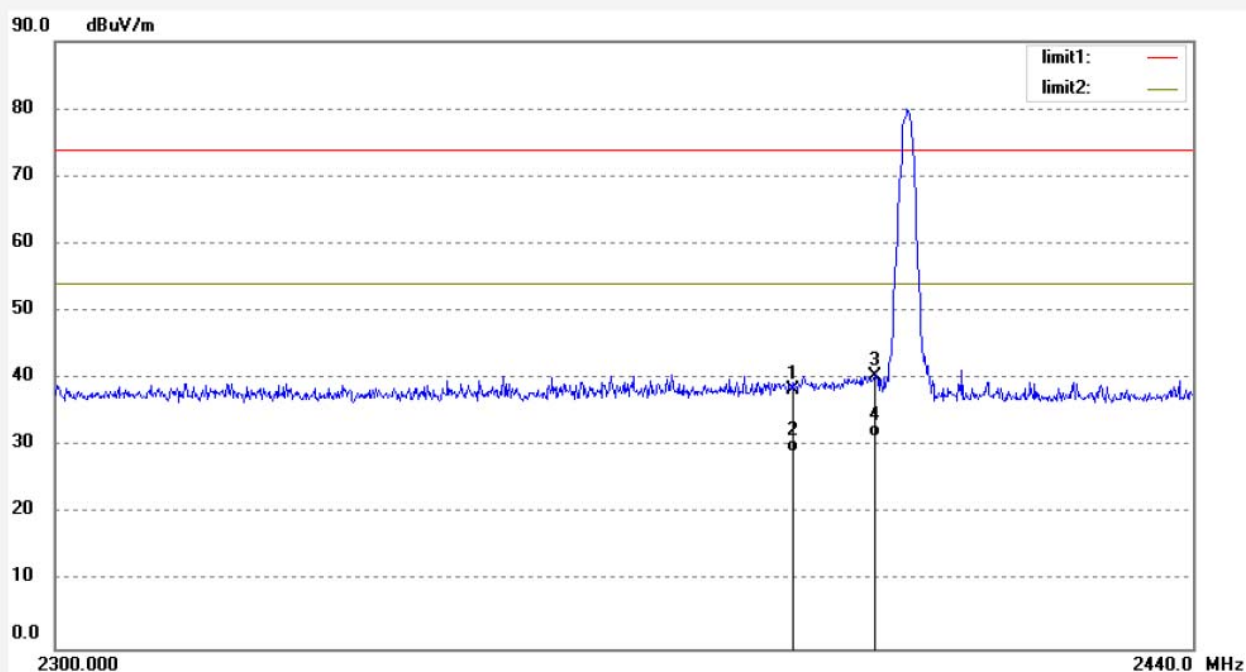

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	37.65	0.79	38.44	74.00	-35.56	peak	250	302	
2	2390.000	28.31	0.79	29.10	54.00	-24.90	AVG	250	113	
3	2400.000	39.47	0.88	40.35	74.00	-33.65	peak	250	25	
4	2400.000	30.61	0.88	31.49	54.00	-22.51	AVG	250	63	

Job No.: FRANK2018 #573

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2480MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/32/15

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

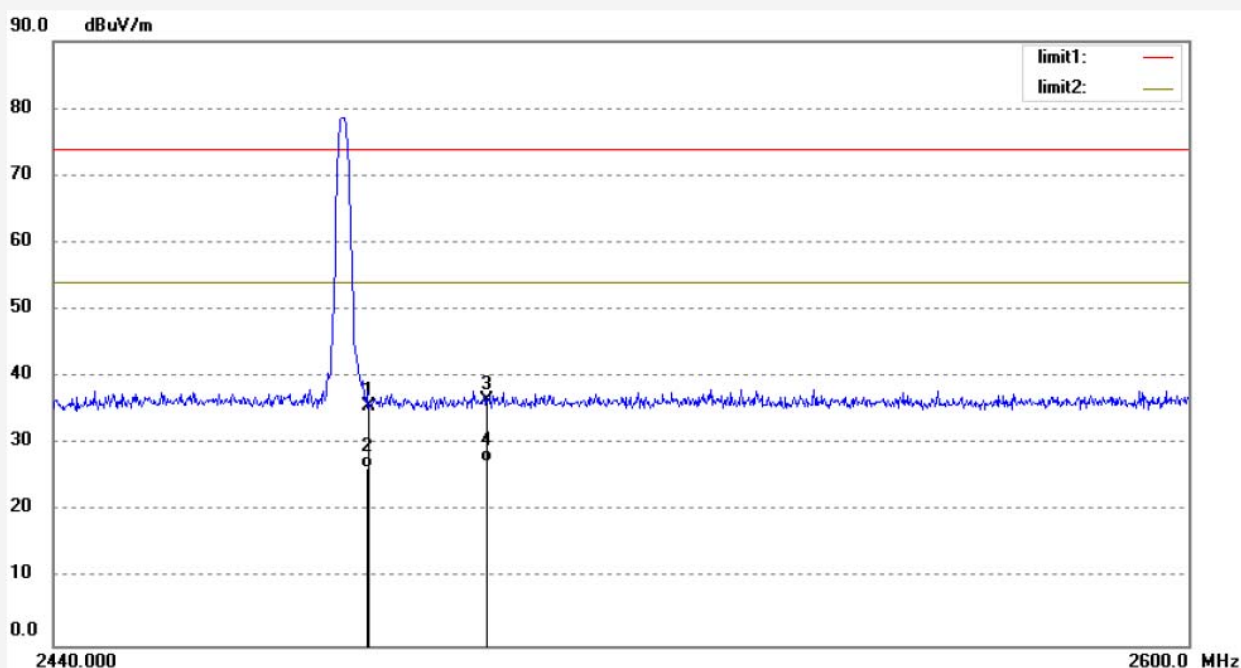

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	34.48	1.10	35.58	74.00	-38.42	peak	250	301	
2	2483.500	25.42	1.10	26.52	54.00	-27.48	AVG	200	213	
3	2500.000	35.51	1.10	36.61	74.00	-37.39	peak	250	139	
4	2500.000	26.35	1.10	27.45	54.00	-26.55	AVG	200	233	



Job No.: FRANK2018 #572

Standard: FCC PK

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2480MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/31/50

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

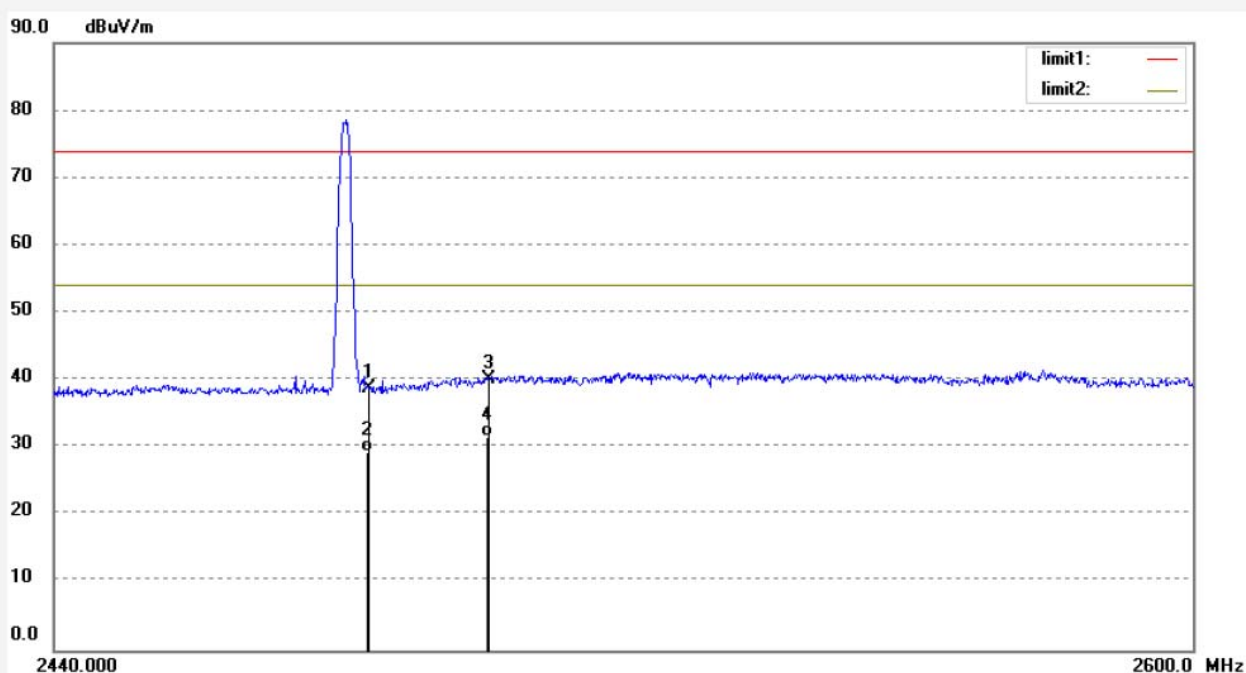

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	37.78	1.10	38.88	74.00	-35.12	peak	150	302	
2	2483.500	28.16	1.10	29.26	54.00	-24.74	AVG	150	51	
3	2500.000	39.07	1.10	40.17	74.00	-33.83	peak	150	62	
4	2500.000	30.61	1.10	31.71	54.00	-22.29	AVG	150	165	

Note:


1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

## 10.RADIATED SPURIOUS EMISSION TEST

### 10.1.Block Diagram of Test Setup


#### 10.1.1.Block diagram of connection between the EUT and peripherals

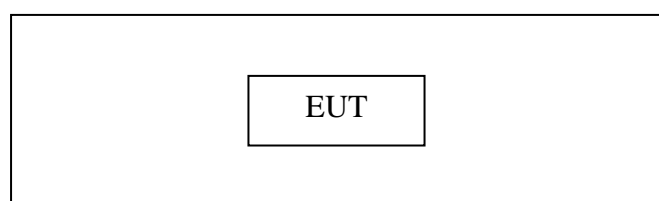


Setup: Transmitting mode

#### 10.1.2.Semi-Anechoic Chamber Test Setup Diagram


(A)Radiated Emission Test Set-Up, Frequency below 30MHz

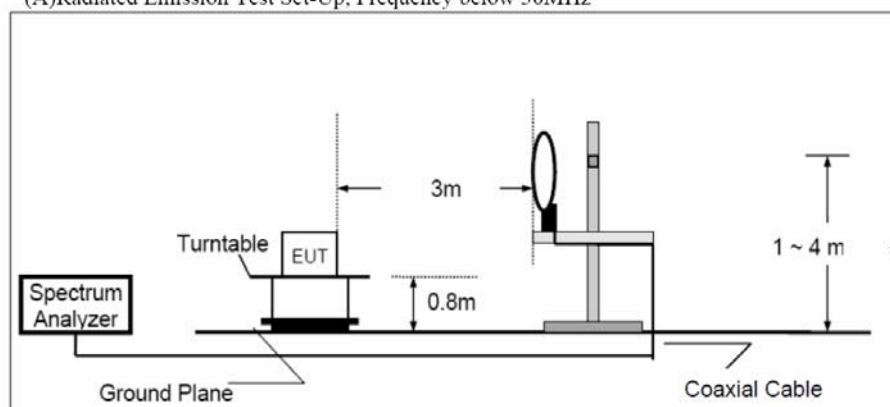

(B)Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

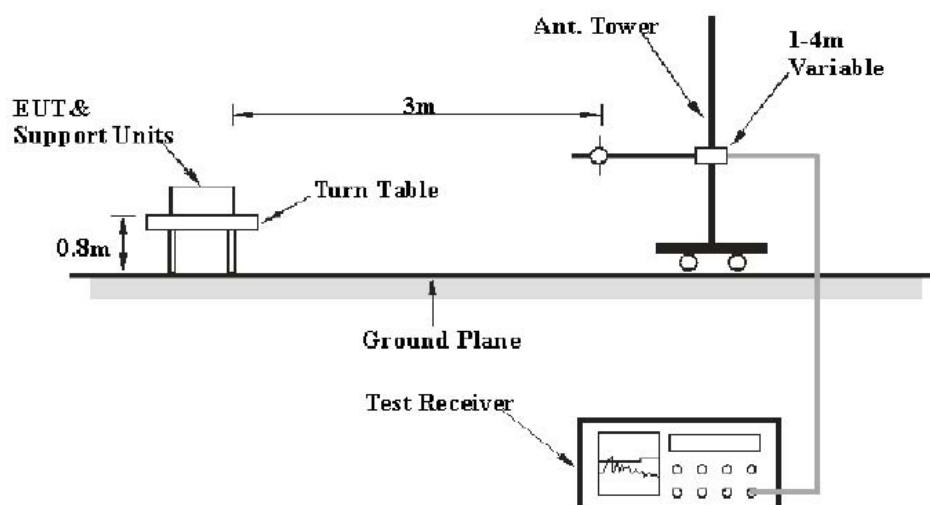

(C) Radiated Emission Test Set-Up, Frequency above 1GHz

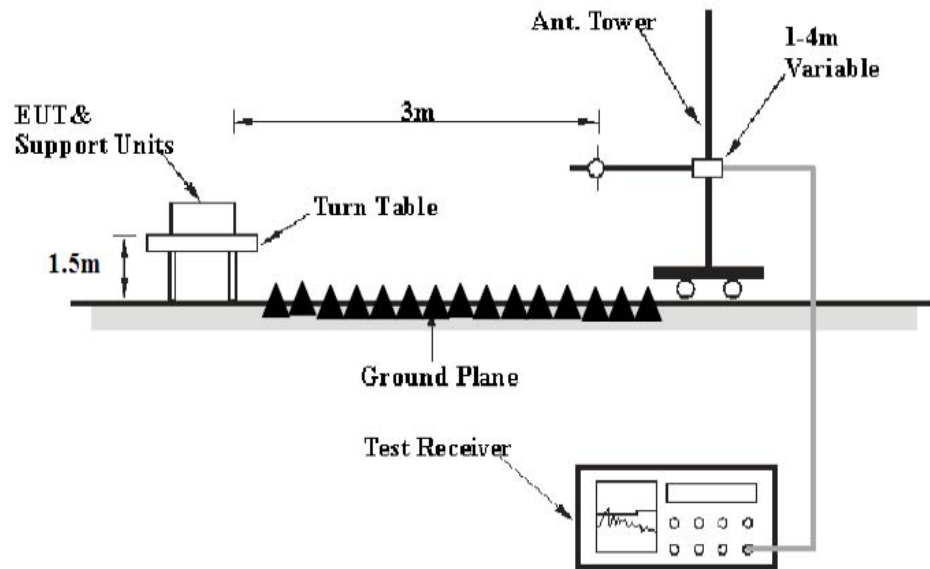

## 10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 10.3. Restricted bands of operation

#### 10.3.1. FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510

<sup>2</sup>Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 10.4. Configuration of EUT on Measurement

The equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

## 10.5. Operating Condition of EUT

10.5.1. Setup the EUT and simulator as shown as Section 10.1.

10.5.2. Turn on the power of all equipment.

10.5.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

## 10.6. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground (Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground (Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 26.5GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading.

### 10.7.Data Sample

Frequency (MHz)	Reading (dB $\mu$ v)	Factor (dB/m)	Result (dB $\mu$ v/m)	Limit (dB $\mu$ v/m)	Margin (dB)	Remark
X.XX	43.85	-22.22	21.63	43.5	-21.87	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB $\mu$ v) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB $\mu$ v/m) = Reading(dB $\mu$ v) + Factor(dB/m)

Limit (dB $\mu$ v/m) = Limit stated in standard

Margin (dB) = Result(dB $\mu$ v/m) - Limit (dB $\mu$ v/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB $\mu$ V/m)–Limit(dB $\mu$ V/m)

Result(dB $\mu$ V/m)= Reading(dB $\mu$ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

### 10.8.The Field Strength of Radiation Emission Measurement Results

**Pass.**

Test Lab: 3m Anechoic chamber

Test Engineer: Frank

The frequency range from 9kHz to 26.5GHz is checked.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. \*: Denotes restricted band of operation.

3. The radiation emissions from 9kHz-30MHz and 18-26.5GHz are not reported, because the test values lower than the limits of 20dB.

The spectrum analyzer plots are attached as below.

## Below 1GHz



### ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: FRANK2018 #534

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2402MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/28/

Time: 14/49/41

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

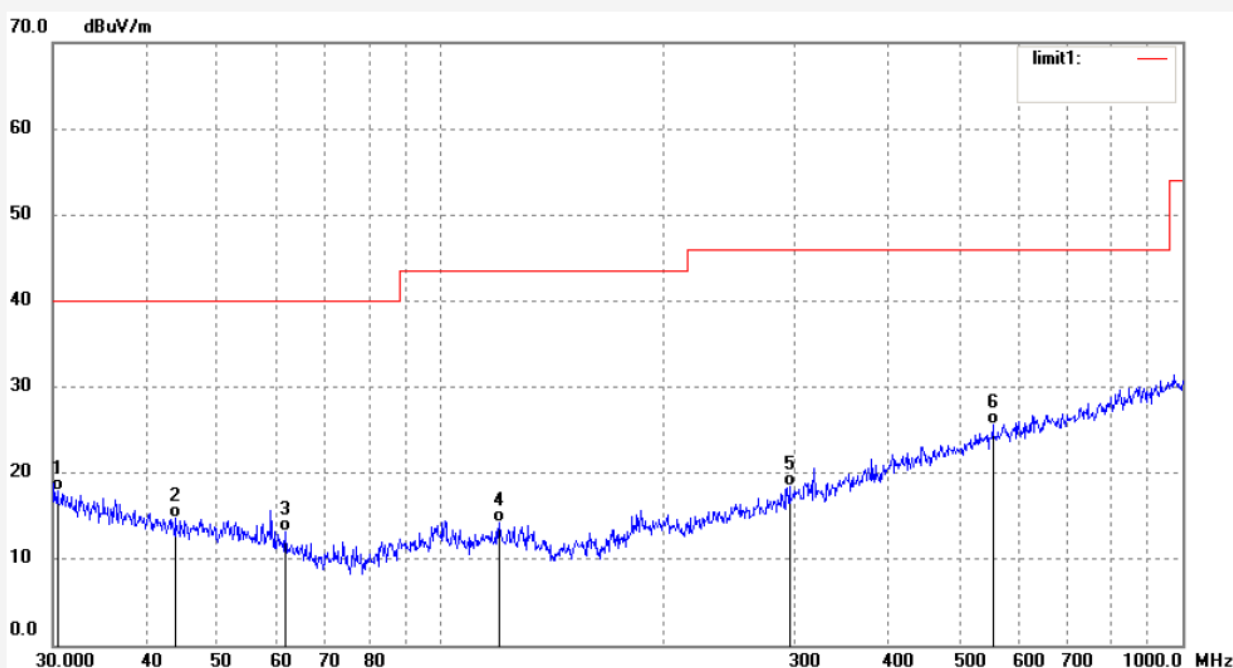

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	30.4237	26.91	-9.04	17.87	40.00	-22.13	QP	200	65	
2	43.9658	27.19	-12.40	14.79	40.00	-25.21	QP	200	216	
3	61.7781	27.69	-14.55	13.14	40.00	-26.86	QP	200	41	
4	119.8555	27.24	-13.06	14.18	43.50	-29.32	QP	200	89	
5	295.1469	27.53	-9.10	18.43	46.00	-27.57	QP	200	135	
6	554.8252	28.59	-2.96	25.63	46.00	-20.37	QP	200	100	



Job No.: FRANK2018 #533

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2402MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/28/

Time: 14/47/26

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

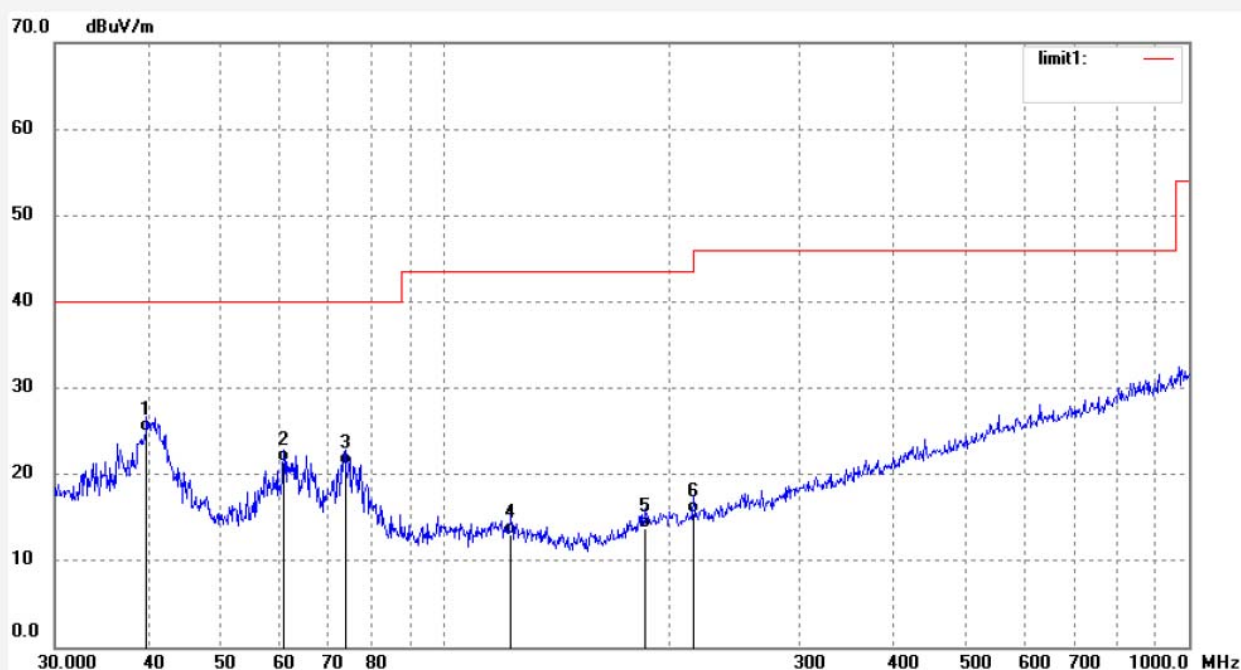

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	39.8541	36.45	-11.49	24.96	40.00	-15.04	QP	100	101	
2	60.9176	35.64	-14.24	21.40	40.00	-18.60	QP	100	79	
3	73.6170	37.66	-16.54	21.12	40.00	-18.88	QP	100	61	
4	122.8340	26.48	-13.37	13.11	43.50	-30.39	QP	100	213	
5	186.4407	26.32	-12.53	13.79	43.50	-29.71	QP	100	154	
6	216.0240	27.22	-11.66	15.56	46.00	-30.44	QP	100	210	



Job No.: FRANK2018 #535

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2440MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/28/

Time: 14/50/27

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

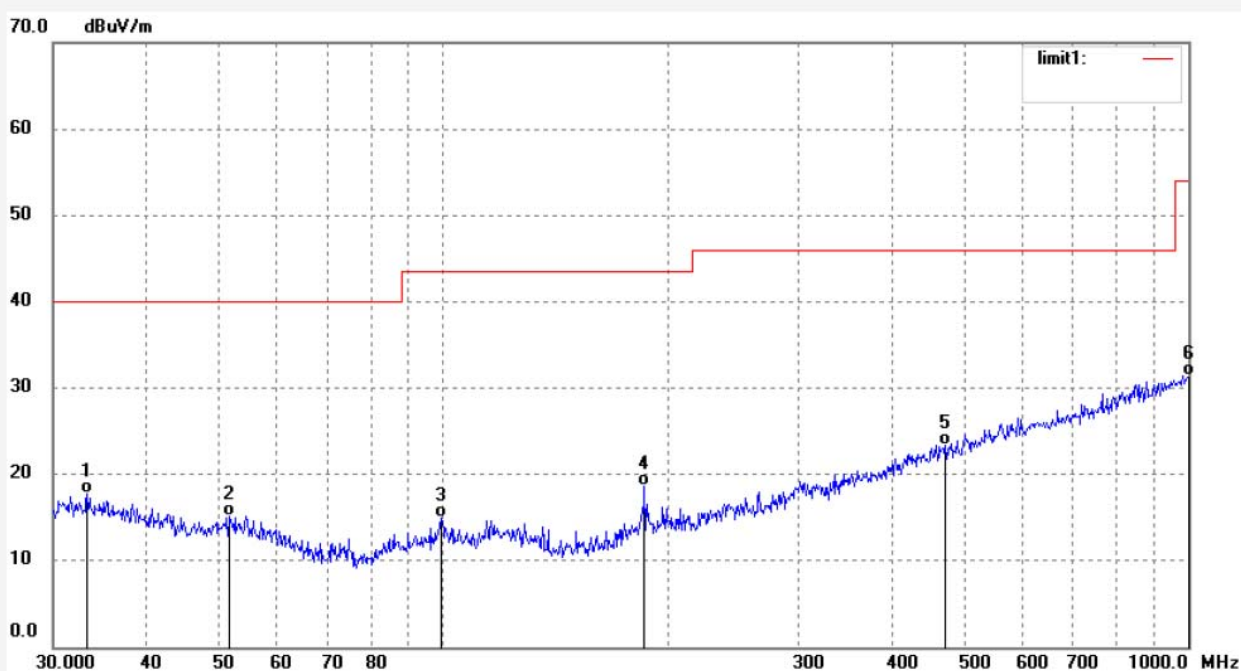

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.3278	28.09	-10.25	17.84	40.00	-22.16	QP	200	235	
2	51.6615	27.89	-12.71	15.18	40.00	-24.82	QP	200	102	
3	99.5279	28.12	-13.21	14.91	43.50	-28.59	QP	200	64	
4	186.4408	31.11	-12.53	18.58	43.50	-24.92	QP	200	102	
5	472.1759	28.32	-5.01	23.31	46.00	-22.69	QP	200	56	
6	1000.0000	27.57	3.84	31.41	54.00	-22.59	QP	200	132	

Job No.: FRANK2018 #536

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2440MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/28/

Time: 14/51/35

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

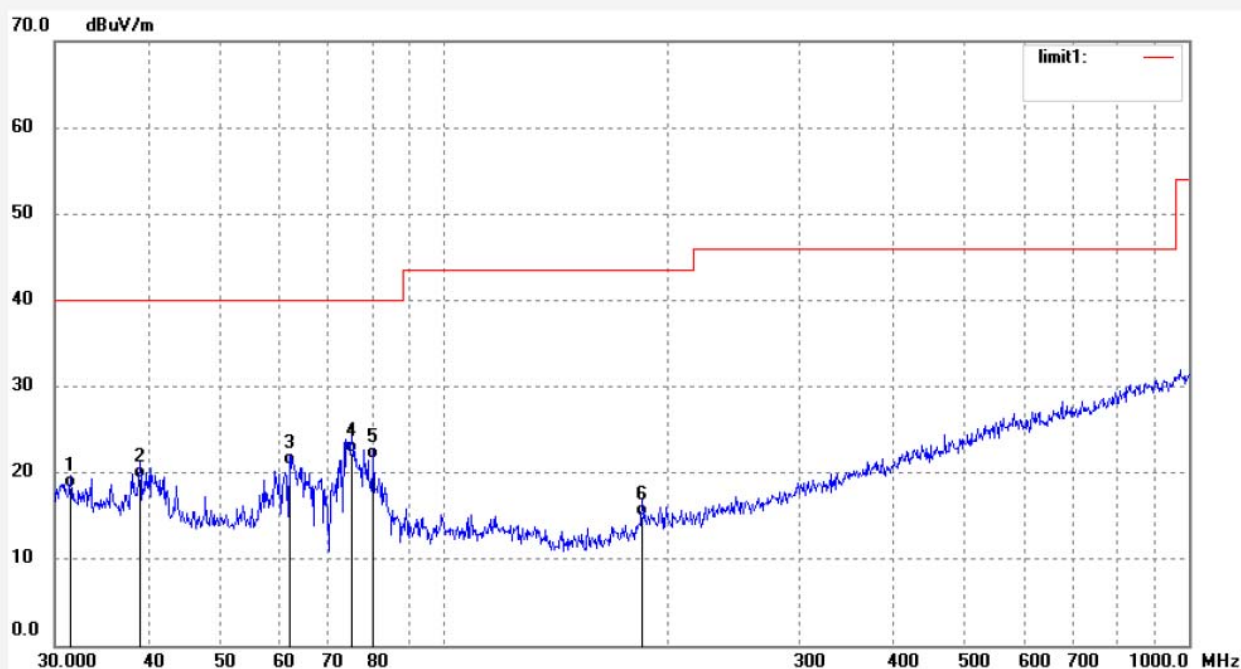

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	31.5094	27.65	-9.38	18.27	40.00	-21.73	QP	100	320	
2	39.0245	30.65	-11.32	19.33	40.00	-20.67	QP	100	165	
3	61.9951	35.46	-14.62	20.84	40.00	-19.16	QP	100	233	
4	75.1822	38.95	-16.70	22.25	40.00	-17.75	QP	100	201	
5	80.3619	37.98	-16.38	21.60	40.00	-18.40	QP	100	65	
6	184.4898	27.65	-12.63	15.02	43.50	-28.48	QP	100	41	

Job No.: FRANK2018 #538

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2480MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/28/

Time: 14/53/35

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

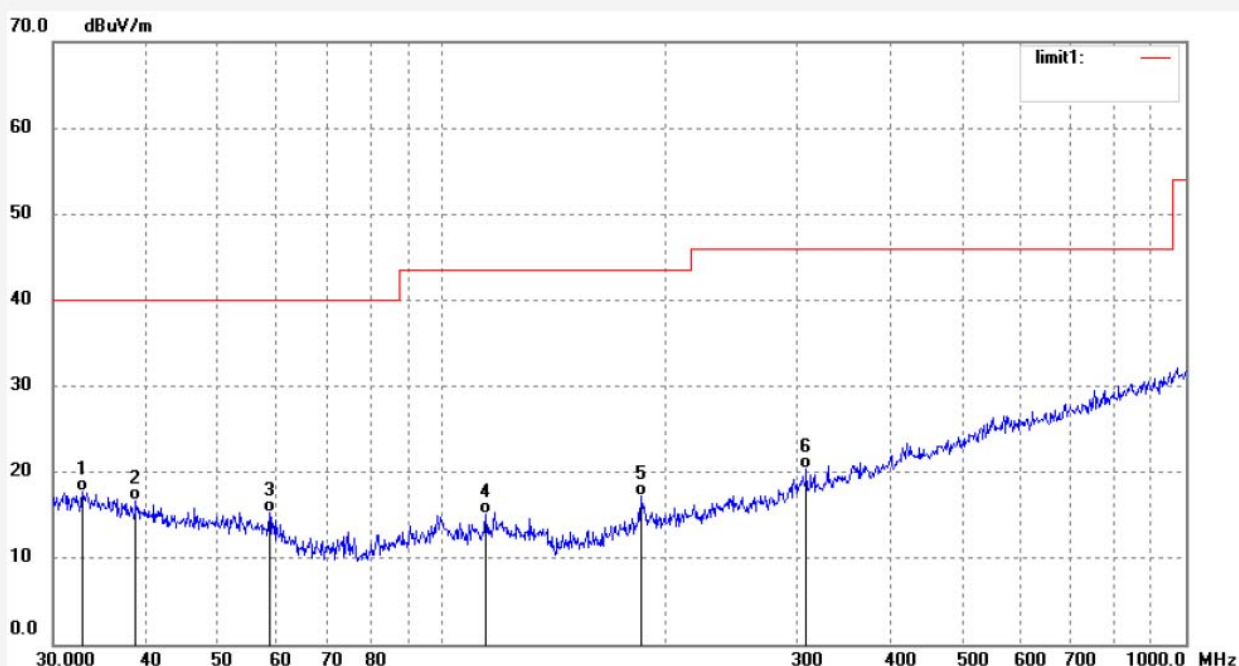

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	32.8637	27.91	-10.21	17.70	40.00	-22.30	QP	200	312	
2	38.7518	27.96	-11.25	16.71	40.00	-23.29	QP	200	51	
3	58.6126	28.87	-13.64	15.23	40.00	-24.77	QP	200	331	
4	114.5146	28.30	-13.14	15.16	43.50	-28.34	QP	200	102	
5	185.1379	29.82	-12.55	17.27	43.50	-26.23	QP	200	32	
6	308.9125	29.23	-8.76	20.47	46.00	-25.53	QP	200	56	



Job No.: FRANK2018 #537

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2480MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/28/

Time: 14/52/25

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

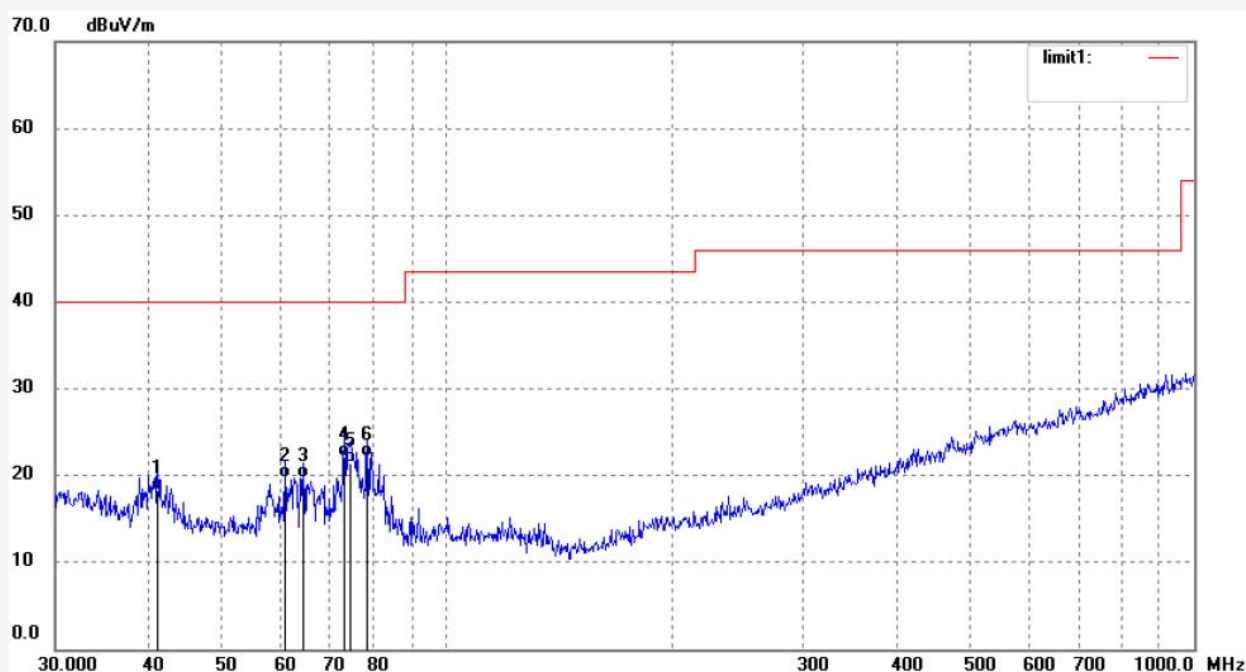

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	41.1319	30.15	-11.78	18.37	40.00	-21.63	QP	100	156	
2	60.9176	33.95	-14.24	19.71	40.00	-20.29	QP	100	32	
3	64.4330	35.13	-15.48	19.65	40.00	-20.35	QP	100	201	
4	73.1025	38.65	-16.48	22.17	40.00	-17.83	QP	100	165	
5	74.3954	38.15	-16.63	21.52	40.00	-18.48	QP	100	216	
6	78.4133	38.65	-16.55	22.10	40.00	-17.90	QP	100	301	

Above 1GHz



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: FRANK2018 #569

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2402MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/28/31

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

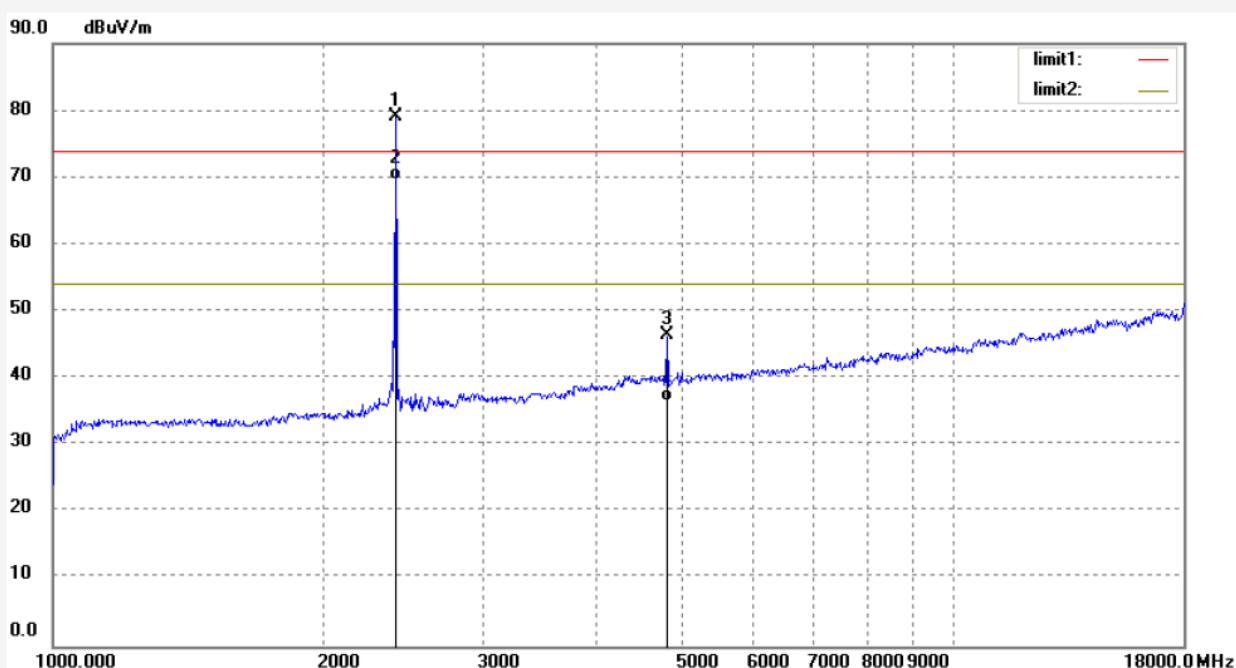

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.053	78.28	0.88	79.16			peak	200	36	
2	2402.053	68.65	0.88	69.53			AVG	300	135	
3	4804.110	38.95	7.40	46.35	74.00	-27.65	peak	250	226	
4	4804.110	29.26	7.40	36.66	54.00	-17.34	AVG	200	165	

Job No.: FRANK2018 #568

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2402MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/28/03

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

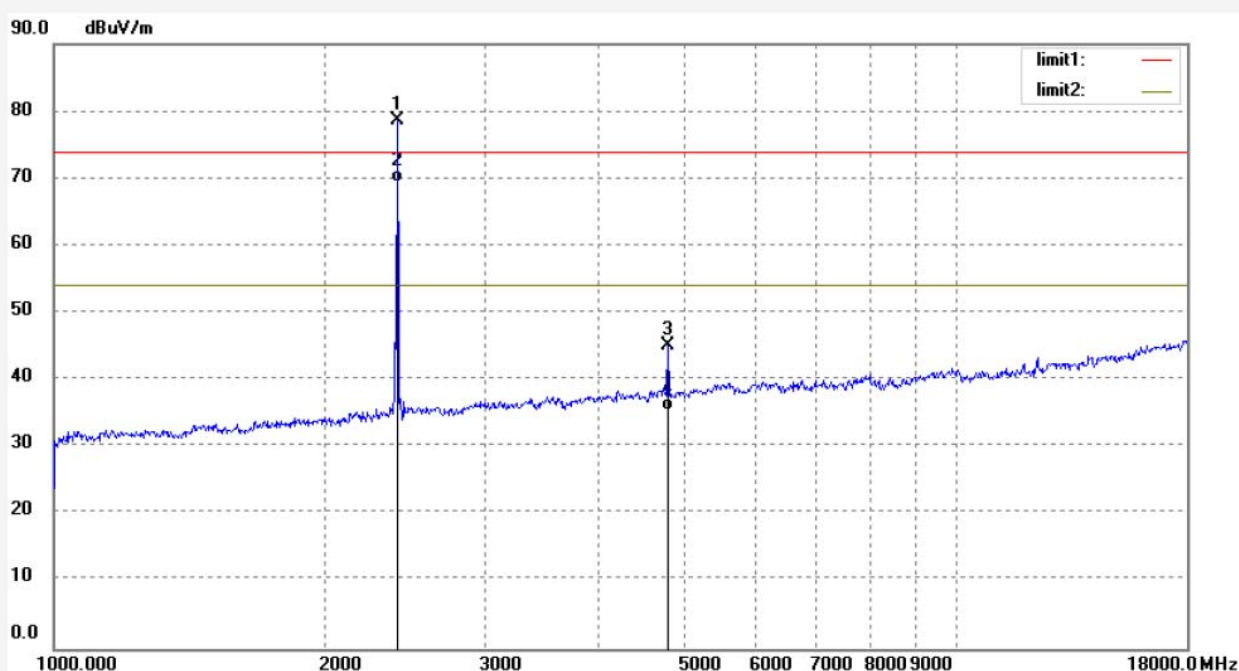

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.053	77.81	0.88	78.69			peak	200	305	
2	2402.053	68.56	0.88	69.44			AVG	200	312	
3	4804.245	37.71	7.30	45.01	74.00	-28.99	peak	200	166	
4	4804.245	28.16	7.30	35.46	54.00	-18.54	AVG	200	26	



Job No.: FRANK2018 #566

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2440MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/26/05

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

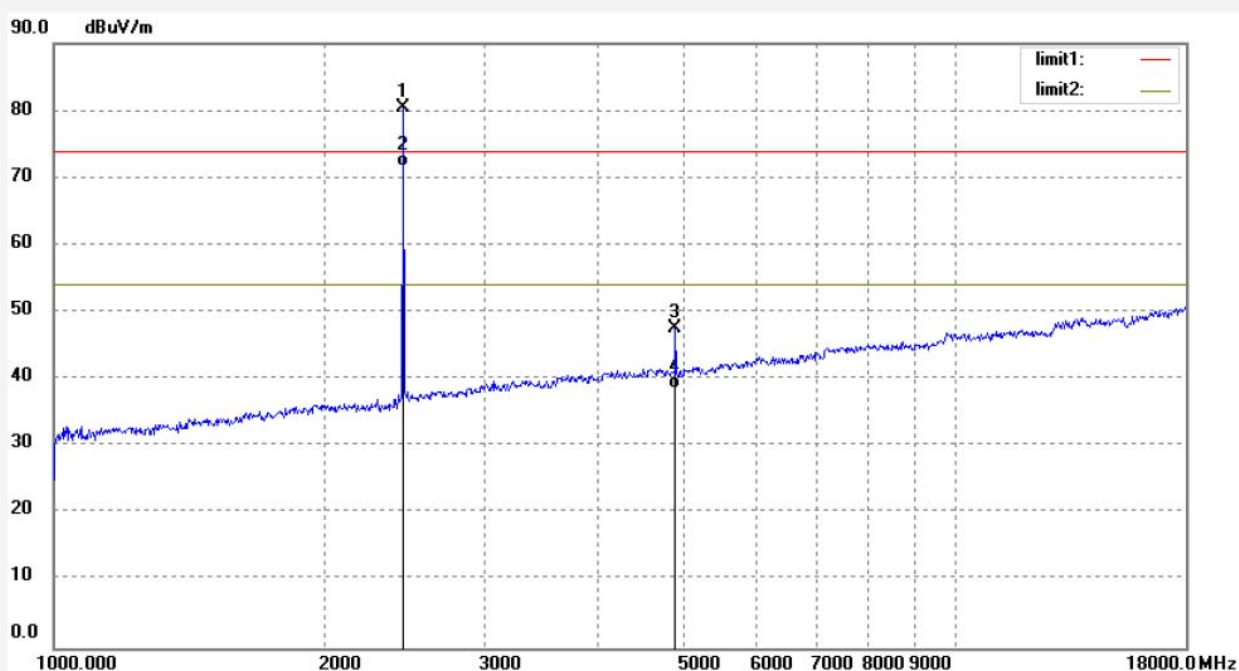

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.051	79.40	1.06	80.46			peak	250	301	
2	2440.051	70.63	1.06	71.69			AVG	200	226	
3	4880.151	39.39	8.17	47.56	74.00	-26.44	peak	200	164	
4	4880.151	30.46	8.17	38.63	54.00	-15.37	AVG	200	255	



## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: FRANK2018 #567

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2440MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/26/59

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

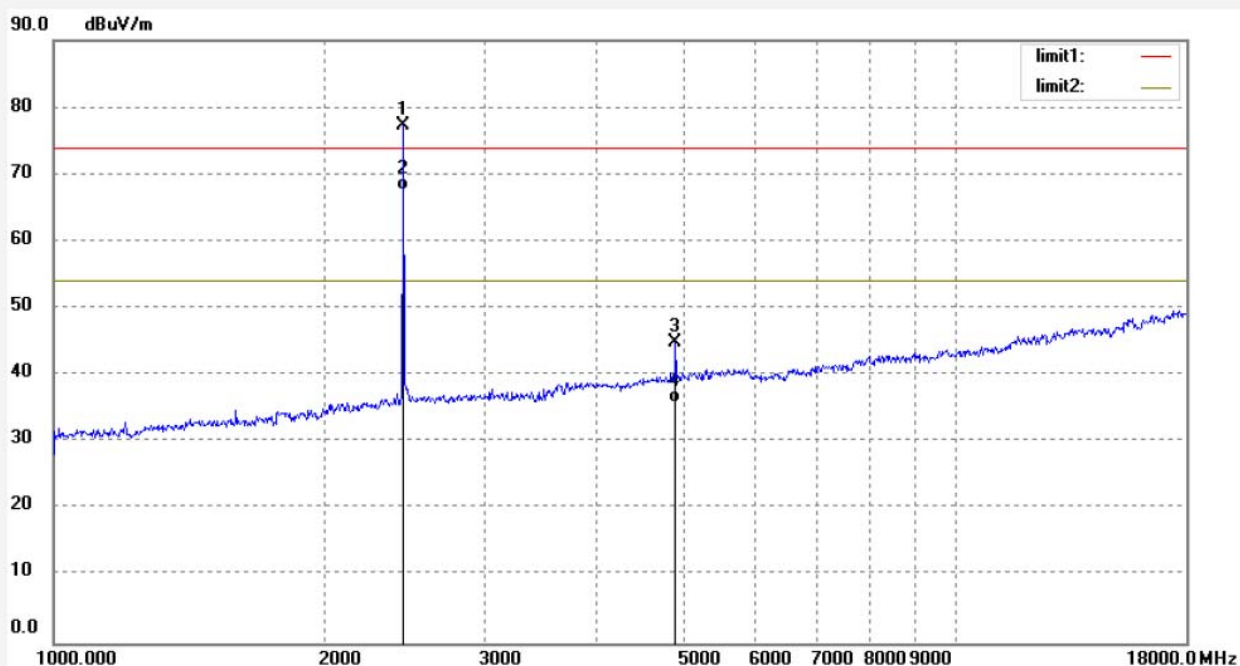

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.051	76.32	1.06	77.38			peak	250	301	
2	2440.051	66.65	1.06	67.71			AVG	250	102	
3	4880.151	36.70	8.17	44.87	74.00	-29.13	peak	250	123	
4	4880.151	27.65	8.17	35.82	54.00	-18.18	AVG	200	64	



Job No.: FRANK2018 #565

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2480MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Horizontal

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/24/37

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

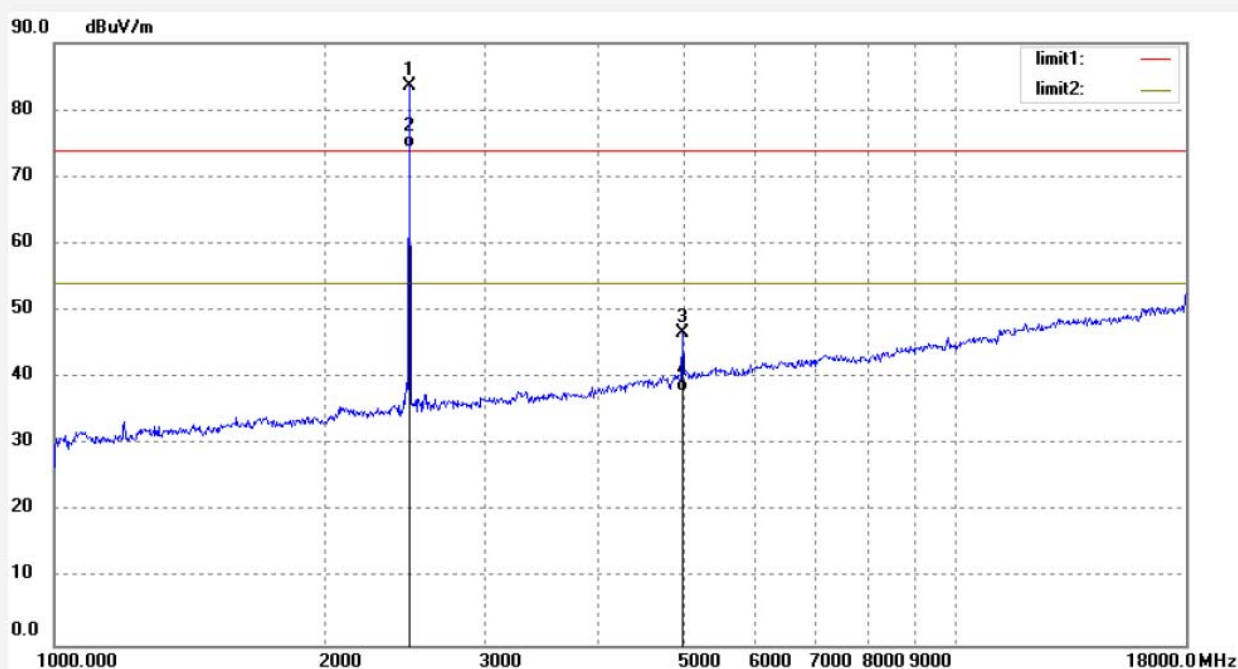

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.310	82.47	1.09	83.56			peak	200	320	
2	2480.310	73.26	1.09	74.35			AVG	250	16	
3	4960.662	38.08	8.66	46.74	74.00	-27.26	peak	250	64	
4	4960.662	29.15	8.66	37.81	54.00	-16.19	AVG	200	133	

Job No.: FRANK2018 #564

Standard: FCC PART 15C 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Color Screen Heart Rate Band

Mode: TX 2480MHz

Model: WD06

Manufacturer: Beijing Kangshuo Information Technology

Polarization: Vertical

Power Source: DC 3.7V


Date: 18/07/30/

Time: 9/22/50

Engineer Signature:

Distance: 3m

Note: Report NO.:ATE20171354

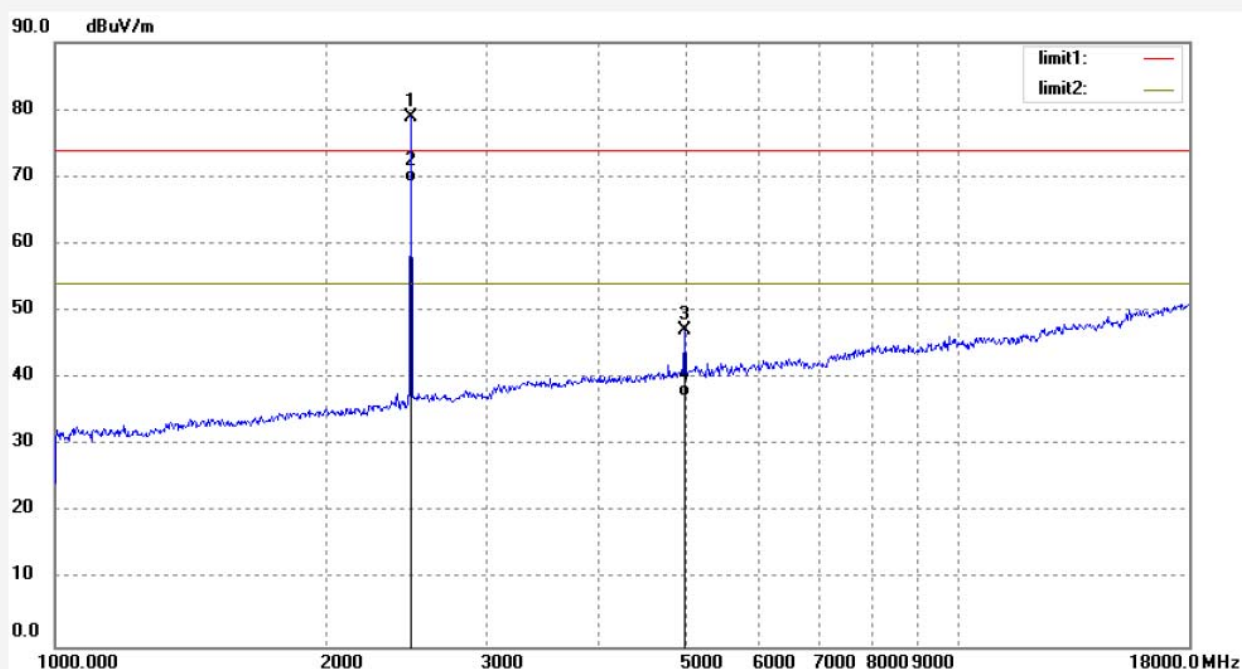

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.310	77.83	1.09	78.92			peak	200	103	
2	2480.310	68.13	1.09	69.22			AVG	150	213	
3	4960.662	38.51	8.66	47.17	74.00	-26.83	peak	200	200	
4	4960.662	28.64	8.66	37.30	54.00	-16.70	AVG	150	103	


## 11.ANTENNA REQUIREMENT

### 11.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 11.2.Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Antenna gain of EUT is 1.72 dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

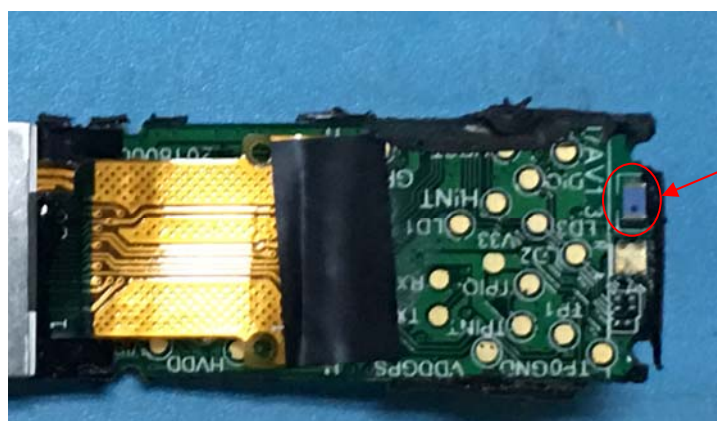

Antenna

\*\*\*\*\* End of Test Report \*\*\*\*\*