
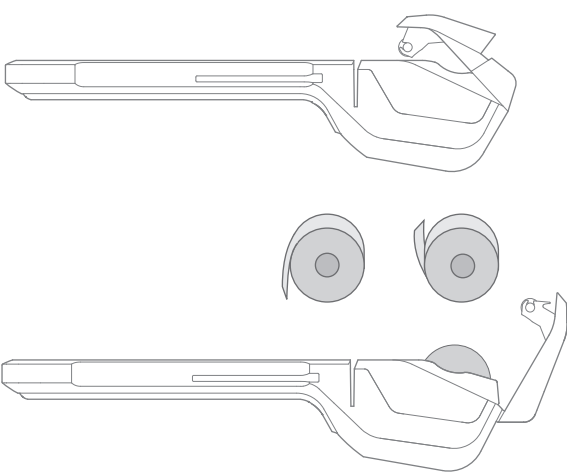


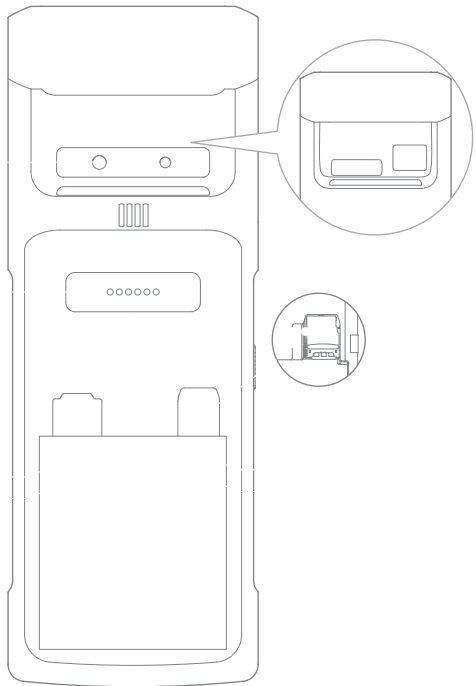

用于感应闪付卡。

用于刷银行卡磁条信息。

支持拍照及1D/2D快速扫码。

可用于给设备充电和开发者调试使用。

快捷进入相应功能。

短按：点亮屏幕，锁定屏幕。
长按：关机状态下，长按 2-3 秒开机；
使用状态下，长按 2-3 秒，可选择关机或重启；
死机状态下，长按 11 秒，自动重启。

用于开机状态下打印单据。

用于提示刷卡业务步骤。

用于插入银行芯片卡。

用于读取商品码和手机支付码。
注意：禁止直视扫描头，避免对眼睛造成损伤。

支持拍照及1D/2D快速扫码。

用于链接底座。

用于插入PSAM卡（SIM卡可选）。

用于插入PSAM卡。

扩展SD卡接口。

打开电池盖，取出电池，按图示方向插入SIM卡。
(SIM卡支持移动:2G/4G、联通:2G/3G/4G、电信:4G)

本机支持 58mm 热敏打印纸，规格为 57±0.5mm×Ø40mm
· 请通过开盖提手开启打印纸仓(图示)，勿强行打开纸仓，防止打印头齿
轮磨损；
· 按照图示方向，将打印纸正确放入纸仓，并拉出部分纸至切刀外(图示)；
· 盖好纸仓盖，打印纸安装完成(图示)。

· 应用市场 · 推送服务 · 用户反馈 · 数据服务 · 启动器 · 硬件管家
· 功能键自定义 · BaseService · 定制服务(壁纸、开机动画)
· 开发者指南(调试小助手) · 使用指南 · 开机指导 · 远程协助 · OTA

以上软件详细信息查询方法：选择“设置->应用”，选择相应软件名称
进行查看信息；软件卸载方法：选择“设置->应用->管理应用->卸载”
卸载应用；或长按图标，拖曳到垃圾桶卸载。

· 请将交流电插头插入与配件电源适配器上标识输入相对应的交流电插
座中；
· 此为A级产品。在生活环境中，该产品可能会造成无线电干扰。
在这种情况下，可能需要用户对于干扰采取切实可行的措施。
· 不能在非安全区域打开设备。
· 请勿在危险场所充电。
· 关于电池的更换：
① 用错误型号电池更换会有爆炸危险！
② 更换后的旧电池应交维修人员处置，切勿把它投入火中！

· 避免在雷电期间安装或使用，否则有被雷电电击的危险；
· 当您发现有异常气味，过热或烟雾情形下，请立刻切断电源；
· 撕纸刀较锋利，请勿触碰！

· 不要在极端冷、热环境中使用，例如靠近火源或点燃的香烟；
· 不要摔、投掷或弯折；
· 尽量在清洁无尘环境中使用，避免细小物品落入终端中；
· 在未获允许的情况下，不要在医疗设备附近使用。

本公司不对以下行为负责
· 不在本指南说明的条件下使用和维护所造成的损坏；
· 对于因选件或耗材(非本公司提供之最初产品或认可产品)造成的损坏
或问题；(未经本公司同意，无权进行产品修改或变动)
· 本产品的操作系统支持官方的系统更新，如果用户刷了第三方的ROM
系统或者采用破解方式修改了系统文件，可能会导致系统不稳定，以
及带来安全风险和安全威胁。

由于产品的更新，此文档的某些细节可能与产品不符，请以实物为准，
此文档的解释权归本公司。保留不预先通知的情况下，修改本说明书的
权利。

警告：仅使用原装电池
警告：可能存在爆炸性气体时请勿更换电池
警告：请勿在危险场所充电

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
电路板组件	×	○	○	○	○	○
结构件	○	○	○	○	○	○
包装件	○	○	○	○	○	○

○：表示该有毒有害物质在该部件所有均质材料中的含量均在
SJ/T11363-2006规定的限量要求以下。

X：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出
SJ/T11363-2006规定的限量要求；但是上表中打“x”的部件，其含
量超出是因为目前业界还没有成熟的可替代的技术。

对达到或超出环保使用年限的产品，应依据《电子信息产品控制管理办
法》规定进行回收再利用，不应随意丢弃。

产品名称：_____
产品型号：_____
产品编号：_____
购买日期：_____
保修期限：自购买之日起，我公司提供____天保修服务。

以下情况恕不提供免费保修：
· 未经允许擅自拆卸修理的产品。
· 产品条码、易碎贴破损及保修卡涂改、残缺的。
· 未按照说明书的要求操作设备所引起的故障。
· 因进水或跌落而造成的故障、划伤或破损的人为损坏。
· 因不可抗拒因素造成的故障或损坏。
· 保修期限外。

联系方式：
· 公司地址：_____
· 联系电话：_____



制造商：上海商米科技集团股份有限公司
地 址：上海市杨浦区淞沪路388号创智天地7号楼505室

WD5054306



Used for sensing Quick Pass Card.

Used for reading the information stored in the magnetic stripe of bank card.

Supports photographing and 1D/2D code quick scanning.

Used for charging equipment and debugging by developers. Do not charge the battery in hazardous location.

Used for customized function.

Short press: wake up the screen, lock the screen.
Long press: long press for 2-3 seconds in power off mode to switch on the device.
Long press for 2-3 seconds in normal operation mode to select power off or reboot.
Long press for 11 seconds when system is frozen for automatic reboot.

For printing sales slips in power on mode.

Used for indicating the steps for swiping card.

Used for inserting the bank chip card.

Used to read commodity code and mobile payment code. Attention: do not look directly into the eyes.

Supports photographing and 1D/2D code quick scanning.

To connect to dock.(Need to buy dock separately)
Do not use dock in hazardous location.

Used for inserting the SIM Card(PSAM optional)
Do not open and insert SIM card when an explosive atmosphere is present.

Used for inserting the PSAM Card.
Do not open and insert PSAM card when an explosive atmosphere is present

Used for inserting extend SD card.

Used for inserting Nano SIM card.

. WARNING - DO NOT CHARGE THE BATTERY IN HAZARDOUS LOCATION, including cable and cradle.
. WARNING - DO NOT OPEN WHEN AN EXPLOSIVE ATMOSPHERE IS PRESENT, including inserting SIM card, changing paper roll.
. This device is anti-explosion product with Ex ic IIA T3 level. Please use it in the according environment.
. Connect the AC plug to the AC socket corresponding to the marked input of the power adapter;
. This is a Class A product. This product may cause radio interference in living environments. In that case, the user may be required to take adequate measures against interference.
. Battery is un-removable. Please don't change the battery by yourself.

Do not install or use the device during lightning storms to avoid the potential risks of lightning shock;
Please turn off the power immediately if you notice abnormal odor, heat or smoke;
The paper cutter is sharp, please do not touch!

Do not use the terminal near water or moisture to prevent liquid from falling into the terminal;
Do not use the terminal in extremely cold or hot environments, such as near flames or lit cigarettes;
Do not drop, throw or bend the device;
Use the terminal in a clean and dust-free environment if possible to prevent small items from falling into the terminal;
Please do not use the terminal near medical equipment without permission.
The power source should meet limited power source or PS2 requirements according to IEC 62368-1 standard.

The Company does not assume responsibilities for the following actions:
Damages caused by use and maintenance without complying with the conditions specified in this guide;
The Company will not assume any responsibilities for the damages or problems caused by optional items or consumables (rather than the initial products or approved products of the Company). The customer is not entitled to change or modify the product without our consent.
The product's operating system supports official system updates, but if you change the operating system into a third party ROM system or alter the system files by system cracking, it may cause system instability and security risks and threats.

As a result of product upgrading, some details in this document may not match the product, and the actual product shall govern. The Company reserves the right of interpretation of this document. The Company also reserves the right to alter this specification without prior notice.

Modo di protezione: II 3G Ex ic IIB T4 Gc

This device has been tested and meets EU, FCC and IC RSS-102 applicable limits for radio frequency (RF) exposure.
When properly worn on the body, the maximum SAR value of 1.254W/kg (1gSAR, test distance :5mmlimit 1.6W/kg) meets the RSS-102 readiness requirements.

Hereby, Shanghai Sunmi Technology Co., Ltd. declares that this device is in compliance with the essential requirements and other relevant provisions of Radio Equipment Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://developer.sunmi.com/docs/read/en-US/maaeghjk480>

The description of accessories and components, including software, which allow the radio equipment to operate as intended, can be obtained in the full text of the EU declaration of conformity at the following internet address:
<https://developer.sunmi.com/docs/read/en-US/maaeghjk480>.

5150-5350MHz only be used by indoor.

This device was tested for typical body-worn operations with the back of the handset kept 0mm away. To maintain compliance with RF exposure requirements, use accessories that maintain a 0mm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with RF exposure requirements, and should be avoided.
If you are using pacemaker, hearing aid, cochlear implant or other device, please use the phone according to the doctor's advice.

Use responsibly. Read all instructions and safety information before use to avoid injury. The limit operating ambient temperature of the equipment declared by the manufacturer is -15~55°C

Charge battery only at ambient temperatures ranging from 40°C.
(1) CAUTION: Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type of battery recommended by the manufacturer. Dispose of used batteries according to battery manufacturer's instructions.
(2) CAUTION: Risk of explosion if battery is replaced by an incorrect type . Dispose of used batteries according to the instructions.
(3) CAUTION: Battery charging temperature upper limit is 40°C.

When charging, please place the device in an environment that has a normal room temperature and good ventilation. It is recommended to charge the device in an environment with a temperature that ranges from 0°C~40°C.
For altitude 2km below use only

Turn Wi-Fi off in areas where Wi-Fi use is prohibited or when it may cause interference or danger, such as in airplanes while flying.

	Operation Frequency	Transmitted
GSM 900	880.0~915.0MHz(TX), 925.0~960.0MHz(RX)	33dBm
GSM 1800	1710.0~1785.0MHz (TX), 1805.0~1880.0 MHz (RX)	30dBm
WCDMA Band I	1920-1980MHz (TX), 2110-2170MHz (RX)	23dBm
WCDMA Band VIII	880-915MHz (TX), 925-960MHz (RX)	24dBm
LTE BAND 1	1920-1980MHz (TX), 2110-2170MHz (RX)	22.5dBm
LTE BAND 3	1710-1785 MHz (TX), 1805-1880MHz (RX)	22.5dBm
LTE BAND 7	2500-2570MHz(TX), 2620-2690MHz(RX)	22.5dBm
LTE BAND 8	880-915MHz(TX) , 925-960MHz(RX)	22.5dBm
LTE BAND 20	832-862MHz(TX),791-821MHz(RX)	22.5dBm
LTE BAND 38	2570-2620MHz (TX/RX)	22.5dBm
LTE BAND 40	2300-2400MHz (TX/RX)	22.5dBm
BT/BLE	2402MHz-2480MHz	6.5dBm
2.4G Wi-Fi	2412MHz-2472MHz	14dBm
5G Wi-Fi	5.15-5.35GHz	12dBm
5G Wi-Fi	5.725-5.850GHz	12dBm
NFC	13.56 MHz	

This device complies with ISED Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.
Le présent appareil est conforme aux CNR d'ISDE Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:(1) L'appareil ne doit pas produire de brouillage, et (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
Les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux.

Shanghai Sunmi Technology Co., Ltd.
Room 505, No.388 ,Song Hu Road, Yang Pu District, Shanghai, China

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

Caution: The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

	Operation Frequency	Transmitted
GSM 850	824-849 MHz	33.5 dBm
GSM 1900	1850-1910 MHz	31.5 dBm
WCDMA BAND II	1850-1910 MHz	24 dBm
WCDMA BAND IV	1710-1755 MHz	23 dBm
WCDMA BAND V	824-849 MHz	24 dBm
LTE BAND 2	1850-1910 MHz	23.5 dBm
LTE BAND 4	1710-1755 MHz	22.5 dBm
LTE BAND 5	824-849 MHz	23.5 dBm
LTE BAND 7	2500-2570 MHz	22.5 dBm
LTE BAND 17	704-716 MHz	23.5dBm
LTE BAND 41	2496-2690 MHz	24dBm
WIFI	2412-2462 MHz	15.5 dBm
BT	2402-2480 MHz	7.5 dBm
BLE	2402-2480 MHz	7 dBm
5G WIFI	5150MHz-5825MHz	13 dBm
NFC		

	AT	BE	BG	CY	CZ	DE	DK	EE	ES	FI	FR
	GR	HU	IE	IT	LT	LU	LV	MT	NL	PL	PT
	RO	SE	SI	SK	UK (NI)						



EU Representative :SUNMI France SAS
186,avenue Thiers,69006 Lyon,France
This symbol means that it is forbidden to dispose the product of with normal household waste. At the end of the product life cycle, waste equipment should be taken to designated collection points, returned to the distributor when purchasing a new product, or contact your local authority representative for detailed information on WEEE recycling.

Se utiliza para detectar tarjetas Quick Pass.

Se utiliza para leer la información almacenada en la banda magnética de tarjetas bancarias.

Para fotografiar y escanear códigos 1D/2D de forma rápida.

Se utiliza para cargar equipos y para la depuración por parte de desarrolladores. No cargue la batería en lugares peligrosos.

Se utiliza para la función personalizada.

Pulsación corta: activa la pantalla, bloquea la pantalla.
Pulsación larga: cuando el dispositivo está apagado, presione durante 2-3 segundos para encenderlo.
En funcionamiento normal, presione durante 2-3 segundos y seleccione apagar o reiniciar.
Mantenga presionado durante 11 segundos cuando el sistema esté bloqueado para realizar un reinicio automático.

Para imprimir comprobantes de venta en modo encendido.

Se utiliza para indicar los pasos para pasar la tarjeta.

Se utiliza para insertar tarjetas bancarias con chip.

Se utiliza para leer códigos de productos y códigos de pagos móviles.
Atención: no lo mire directamente con los ojos.

Para fotografiar y escanear códigos 1D/2D de forma rápida.

Para conectar a la base (es necesario comprar la base por separado)
No utilice la base en lugares peligrosos.

Se utiliza para insertar la tarjeta SIM (PSAM opcional)
No abra ni inserte la tarjeta SIM si hay una atmósfera explosiva.

Se utiliza para insertar tarjetas PSAM.
No abra ni inserte la tarjeta PSAM si hay una atmósfera explosiva.

Se utiliza para insertar la tarjeta SD extensible.

Se utiliza para insertar la tarjeta Nano SIM.

Este dispositivo admite papel térmico de 58 mm con las especificaciones de 57±0.5 mm x Ø40 mm.
Abra el contenedor de papel con el asa de apertura. No fuerce la apertura del contenedor de papel para evitar el desgaste del engranaje del cabezal de impresión.
Cargue el papel correctamente en el contenedor de papel en la dirección indicada y saque un poco de papel fuera del cortador.
Cierre la tapa del contenedor de papel para finalizar la carga del papel de impresión.

. ADVERTENCIA: NO CARGUE LA BATERÍA EN UN LUGAR PELIGROSO, incluidos el cable y el soporte.
. ADVERTENCIA: NO ABRIR SI HAY UNA ATMÓSFERA EXPLOSIVA, incluida la inserción de la tarjeta SIM, el cambio del rollo de papel.
. Este dispositivo es un producto con protección antiexplosión con nivel Ex ic IIA T3. Utilícelo en el entorno correspondiente.
. Conecte el enchufe de CA al conector CA que corresponde a la entrada marcada del adaptador de corriente;
. Este es un producto Clase A. Este producto puede causar interferencias de radio en entornos habitables. En ese caso, es posible que el usuario deba tomar las medidas adecuadas contra las interferencias.
. La batería no es extraíble. No cambie la batería usted mismo.

No instale ni utilice el dispositivo durante tormentas eléctricas para evitar posibles riesgos de descargas eléctricas;
Por favor, desconecte la energía inmediatamente si nota alor, calor o humo anormal;
El cortador de papel está afilado, ¡no lo toque!

No utilice la terminal cerca de agua o humedad para evitar que le caiga líquido adentro;
No utilice la terminal en ambientes extremadamente fríos o calientes, como cerca de llamas o cigarrillos encendidos;
No deje caer, arroje o doble el dispositivo;
Utilice la terminal en un entorno limpio y libre de polvo, si es posible, para evitar que le caigan objetos pequeños adentro;
Por favor, no utilice la terminal cerca de equipos médicos sin tener permiso.

La Compañía no asume responsabilidades por las siguientes acciones:
Daños causados por uso y mantenimiento sin cumplir con las condiciones especificadas en esta guía;
La Compañía no asumirá ninguna responsabilidad por los daños o problemas causados por artículos opcionales o de consumo (en lugar de los productos iniciales o productos aprobados por la Compañía). El cliente no tiene derecho a cambiar o modificar el producto sin nuestro consentimiento.
El sistema operativo del producto es compatible con las actualizaciones oficiales del sistema, pero si se cambia el sistema operativo a un sistema ROM de terceros o se alteran los archivos del sistema mediante acceso forzando el sistema, puede causar inestabilidad en el sistema al igual que riesgos y amenazas de seguridad.
Como resultado de la actualización del producto, es posible que algunos detalles de este documento no coincidan con el producto y el producto real será la guía. La Compañía se reserva el derecho de interpretación de este documento. La Compañía también se reserva el derecho de modificar esta especificación sin previo aviso.

Modo di protezione: II 3G Ex ic IIB T4 Gc

PANTONE 165C

PANTONE Orange 021C

制作工艺说明

成品尺寸：80mm × 220mm

展开尺寸：480mm × 220mm

工艺：黑色印刷+2专，包心折

材质：108g 雅粉纸

- D-20221103-新增10二维扫码头描述（中英西语都有）；Technical specification中battery safty的全大写部分改为首字母大写
- E-20221111-英文部分新增ISED即IC警语；P-SAM 改为PSAM
- F-20221130-更改首页听筒为竖，PASM和SIM都要大写；
- G-20221202-sar值陈述字句修改；