
Appendix for the Report

Dosimetric Assessment of the Alcatel OT-C651 (FCC ID: RAD012)

According to the FCC Requirements

SAR Distribution Plots

March 08, 2005
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
TCL & Alcatel mobile phones
32, avenue Kléber
F 97202 Colombes Cedex

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, PCS 1900 HEAD	3
2	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WORN (GAP = 15 MM)	7
3	SAR DISTRIBUTION PLOTS, PCS 1900 BODY WORN, PTT (GAP = 25 MM)	11
4	SAR Z-AXIS SCANS (VALIDATION)	12
5	SAR Z-AXIS SCANS (MEASUREMENTS).....	13

1 SAR Distribution Plots, PCS 1900 head

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [726bplm_1.da4](#)

DUT: Alcatel ; Type: OT-C651; Serial: 355432000132726

Program Name: Cheek Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 1.4$; mho/m, $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Cheek Left/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.169 mW/g

Cheek Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.23 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.187 mW/g

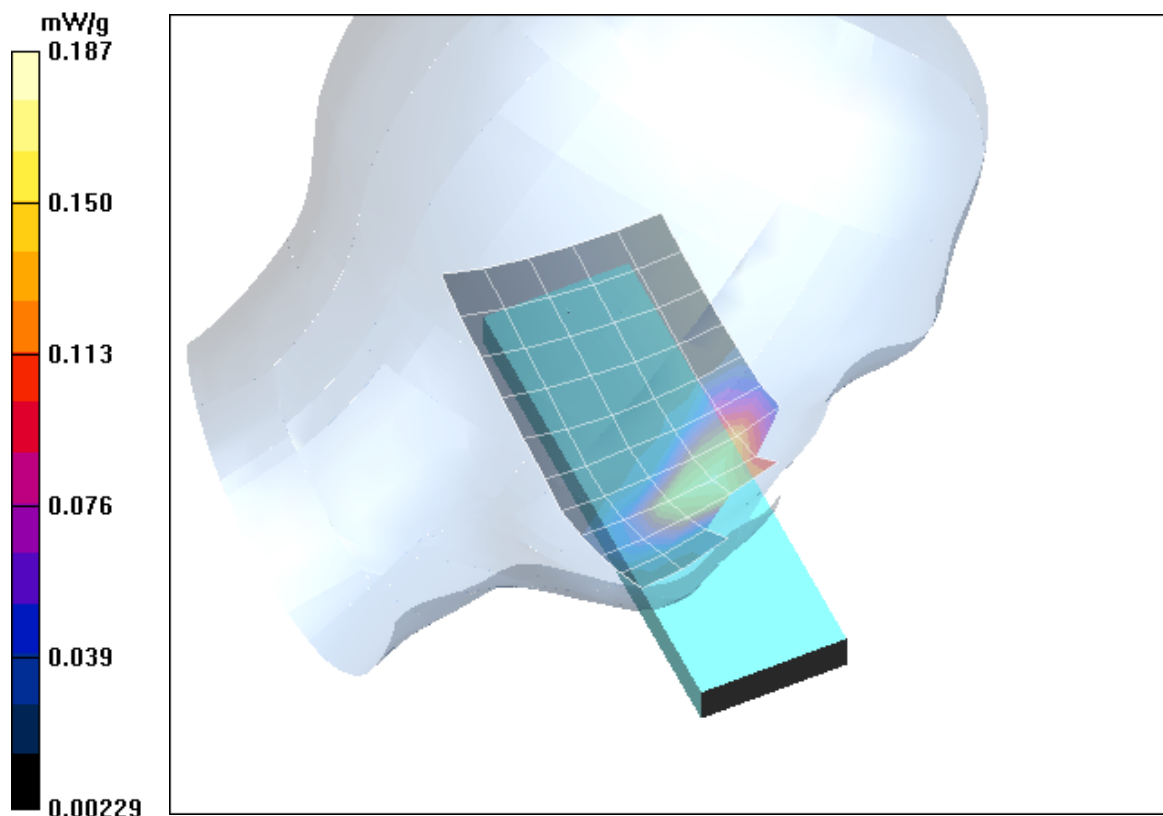


Fig. 1: SAR distribution for PCS 1900, channel 661, cheek position, left side of head (03.04.2005; Ambient Temperature: 21.0° C; Liquid Temperature: 20.1° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [139bplm 2.da4](#)

DUT: Alcatel ; **Type:** OT-C651; **Serial:** 355432000132726

Program Name: Tilted Left

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 1.4$; mho/m, $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilted Left/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.030 mW/g

Tilted Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.45 V/m; Power Drift = 0.118 dB

Peak SAR (extrapolated) = 0.039 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.020 mW/g

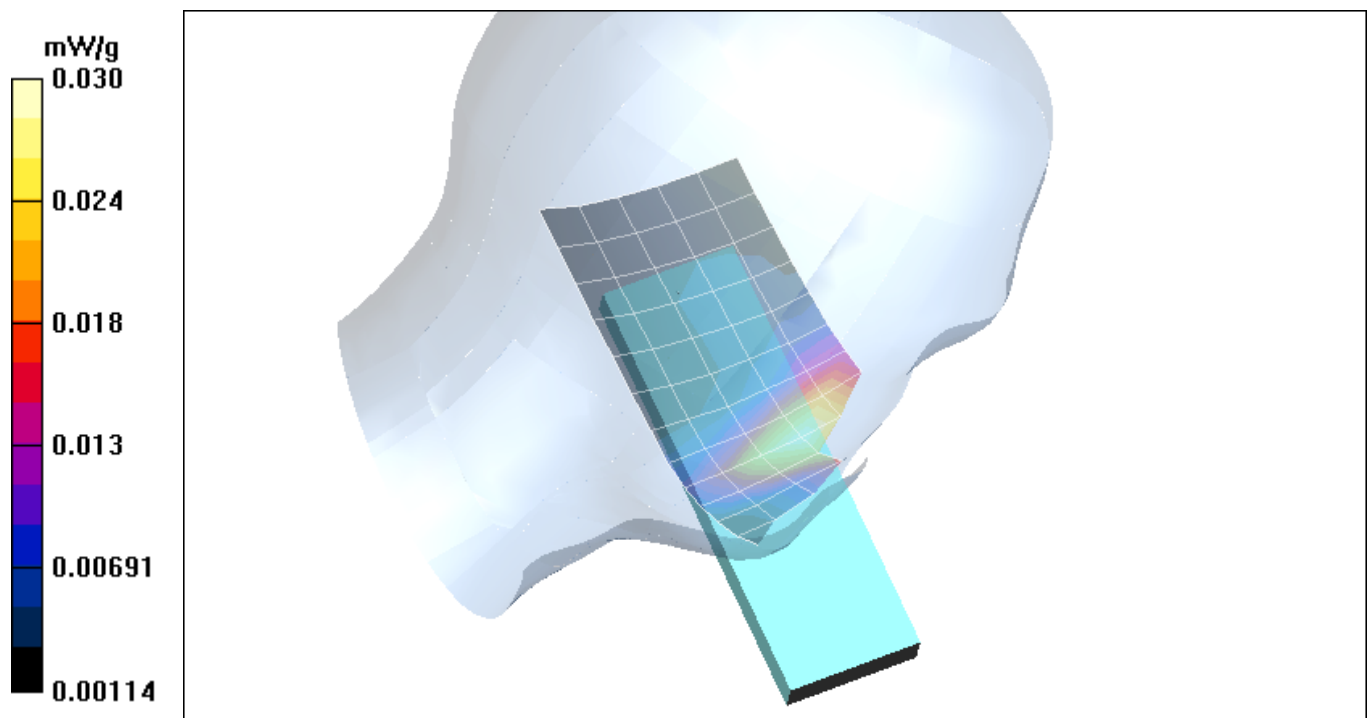


Fig. 2: SAR distribution for PCS 1900, channel 661, tilted position, left side of head (03.04.2005; Ambient Temperature: 21.0° C; Liquid Temperature : 20.2° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [139bprm_1.da4](#)

DUT: Alcatel ; **Type:** OT-C651; **Serial:** 355432000132726

Program Name: Cheek Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 1.4$; mho/m, $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Cheek Right/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.300 mW/g

Cheek Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.79 V/m; Power Drift = 0.2 dB

Peak SAR (extrapolated) = 0.480 W/kg

SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.353 mW/g

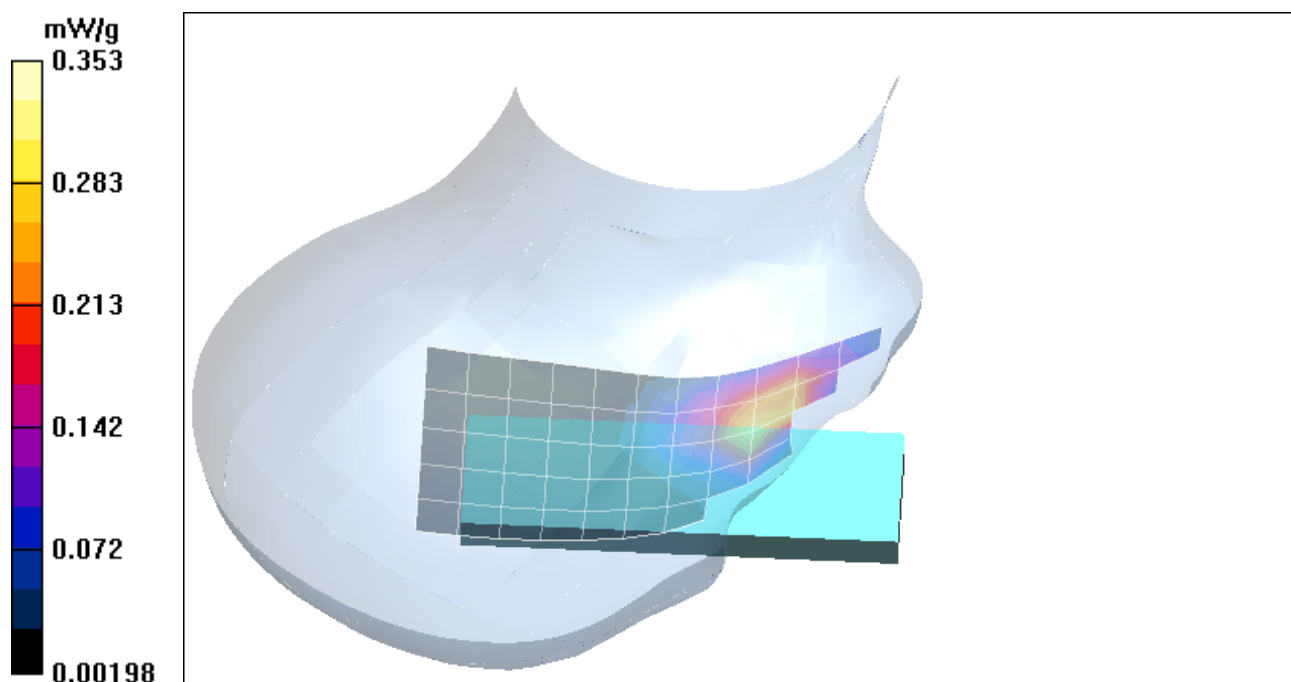


Fig. 3: SAR distribution for PCS 1900, channel 661, cheek position, right side of head (03.04.2005; Ambient Temperature: 21.0° C; Liquid Temperature : 20.2° C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [726bprm_2.da4](#)

DUT: Alcatel ; **Type:** OT-C651; **Serial:** 355432000132726

Program Name: Tilted Right

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 1.4$; mho/m, $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.28, 5.28, 5.28); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.3 Build 16; Postprocessing SW: SEMCAD, V1.8 Build 127

Tilted Right/Area Scan (6x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.040 mW/g

Tilted Right/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.05 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 0.053 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.025 mW/g

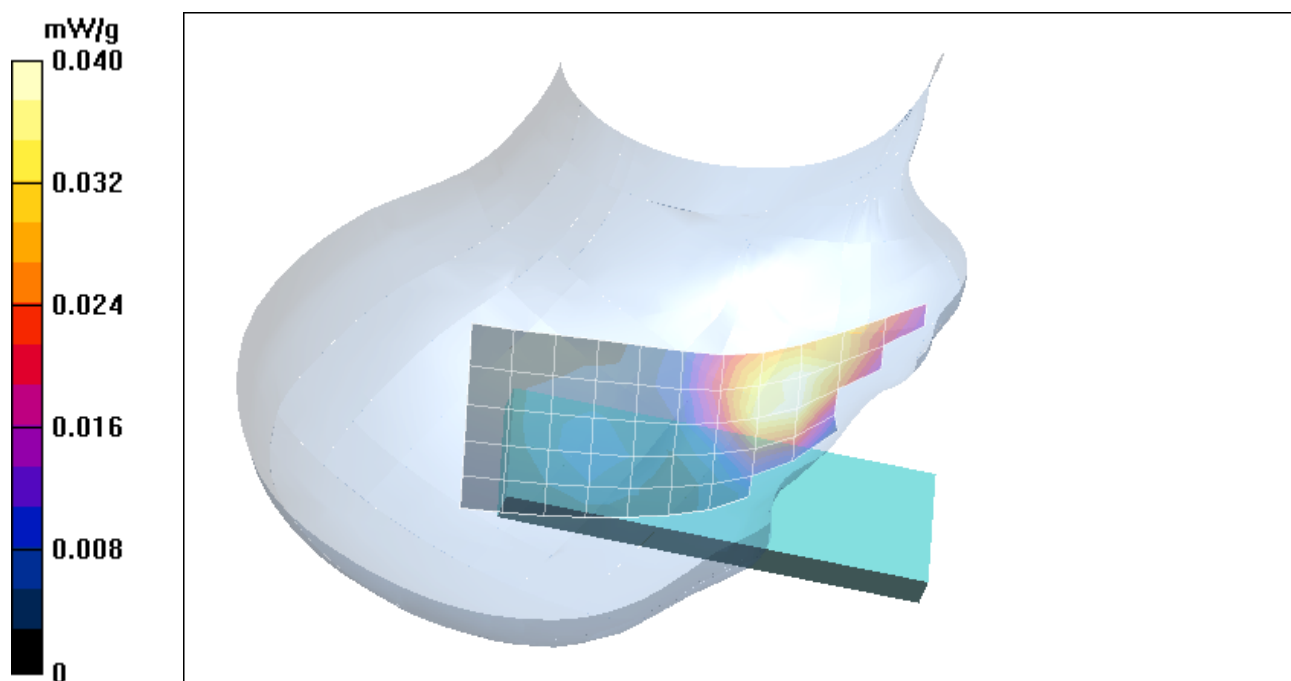


Fig. 4: SAR distribution for PCS 1900, channel 661, tilted position, right side of head (03.04.2005; Ambient Temperature: 21.0° C; Liquid Temperature : 20.1° C).

2 SAR Distribution Plots, PCS 1900 Body worn (gap = 15 mm)

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [726yphm_5.da4](#)

DUT: Alcatel ; Type: OT-C651; Serial: 300100007875139

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 1.54$; mho/m, $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.547 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.2 V/m; Power Drift = 0.2 dB

Peak SAR (extrapolated) = 0.839 W/kg

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.568 mW/g

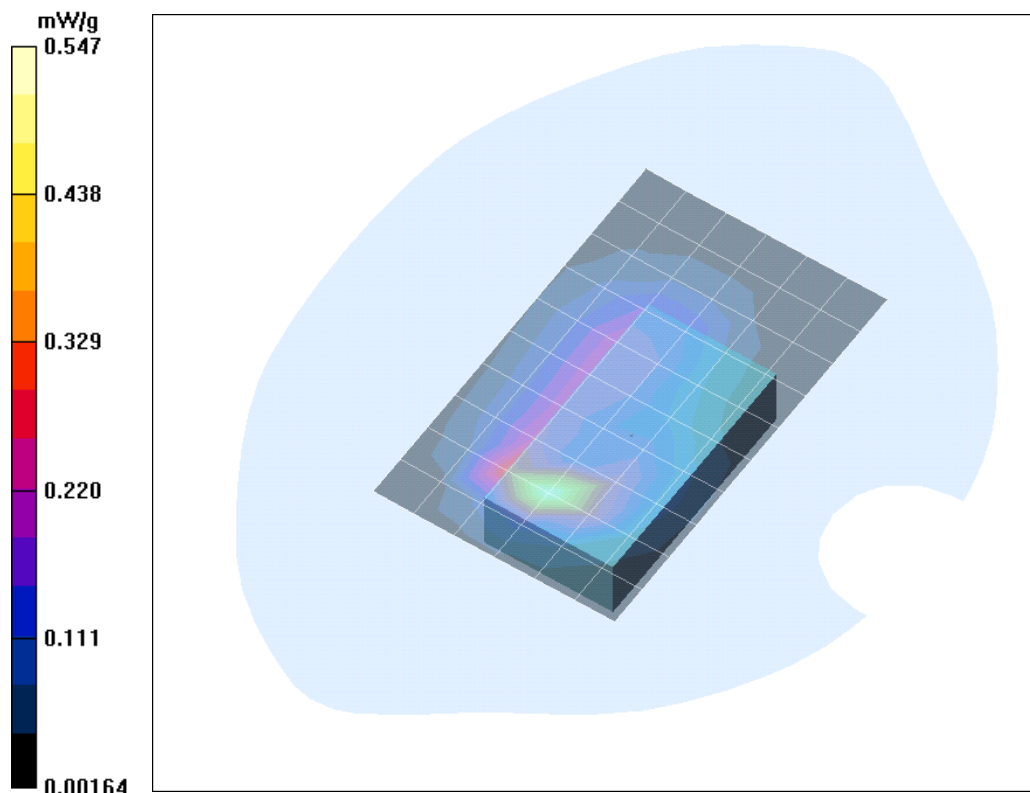


Fig. 5: SAR distribution for PCS 1900, channel 661, antenna towards the phantom, GSM with headset (03.07.2005; Ambient Temperature: 21.0° C; Liquid Temperature : 20.1 C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [726yphm_3.da4](#)

DUT: Alcatel ; **Type:** OT-C651; **Serial:** 300100007875139

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.54$; mho/m, $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.785 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.9 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.506 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

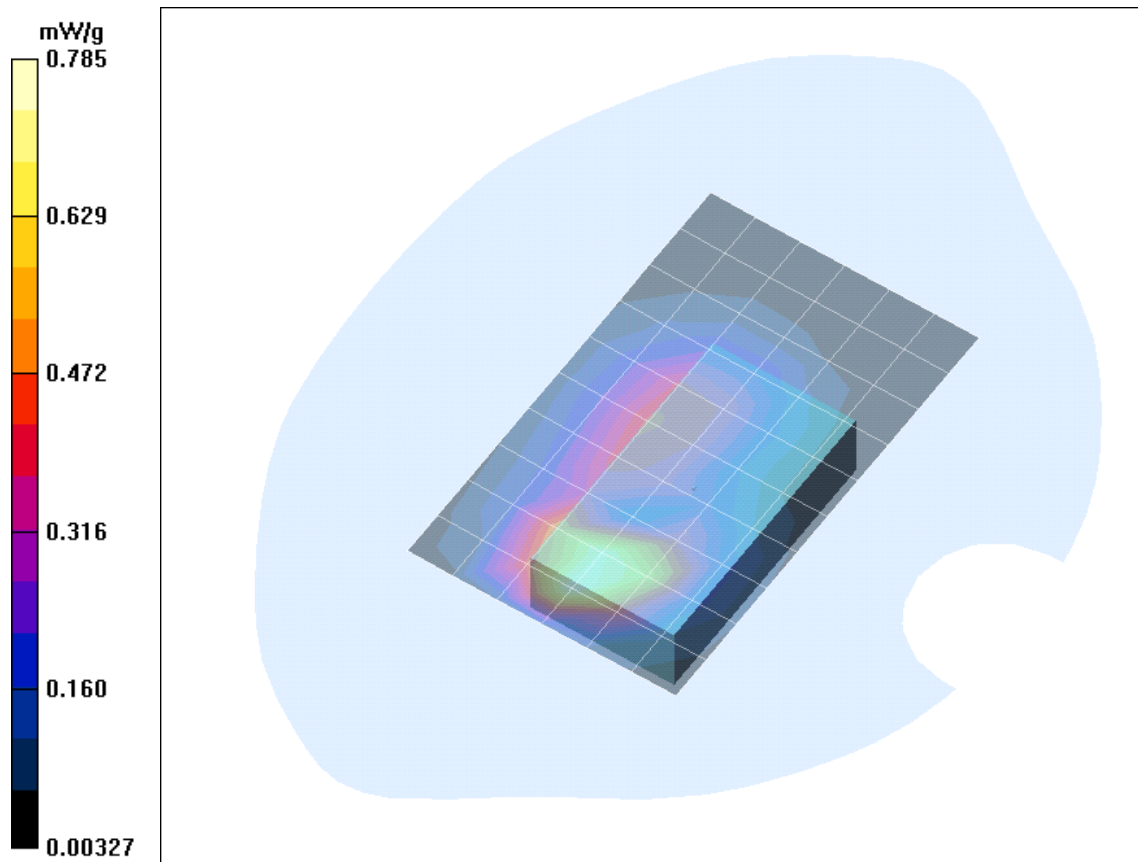


Fig. 6: SAR distribution for PCS 1900, channel 661, antenna towards the phantom, GPRS Class 10, (03.07.2005; Ambient Temperature: 21.1° C; Liquid Temperature : 20.0° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [726yphl_3.da4](#)

DUT: Alcatel ; Type: OT-C651; Serial: 300100007875139

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.54$; mho/m, $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn631; Calibrated: 23.07.2004

- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340

- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.559 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.8 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.641 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.8 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.297 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

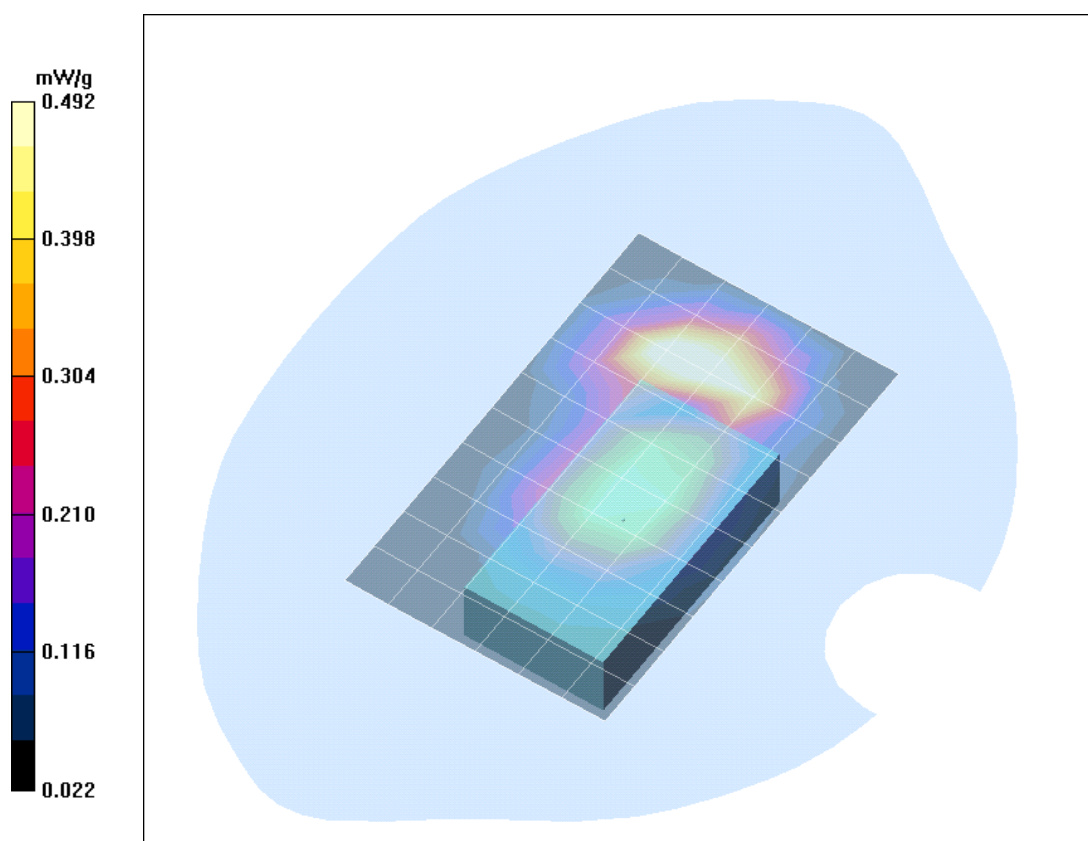


Fig. 7: SAR distribution for PCS 1900, channel 512, antenna towards the phantom, GPRS Class 10, (03.07.2005; Ambient Temperature: 21.0° C; Liquid Temperature : 20.2° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [726yphh_3.da4](#)

DUT: Alcatel ; **Type:** OT-C651; **Serial:** 300100007875139

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $\sigma = 1.54$; mho/m, $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.794 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 36.7 V/m; Power Drift = -0.2 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.750 mW/g; SAR(10 g) = 0.413 mW/g

Maximum value of SAR (measured) = 0.838 mW/g

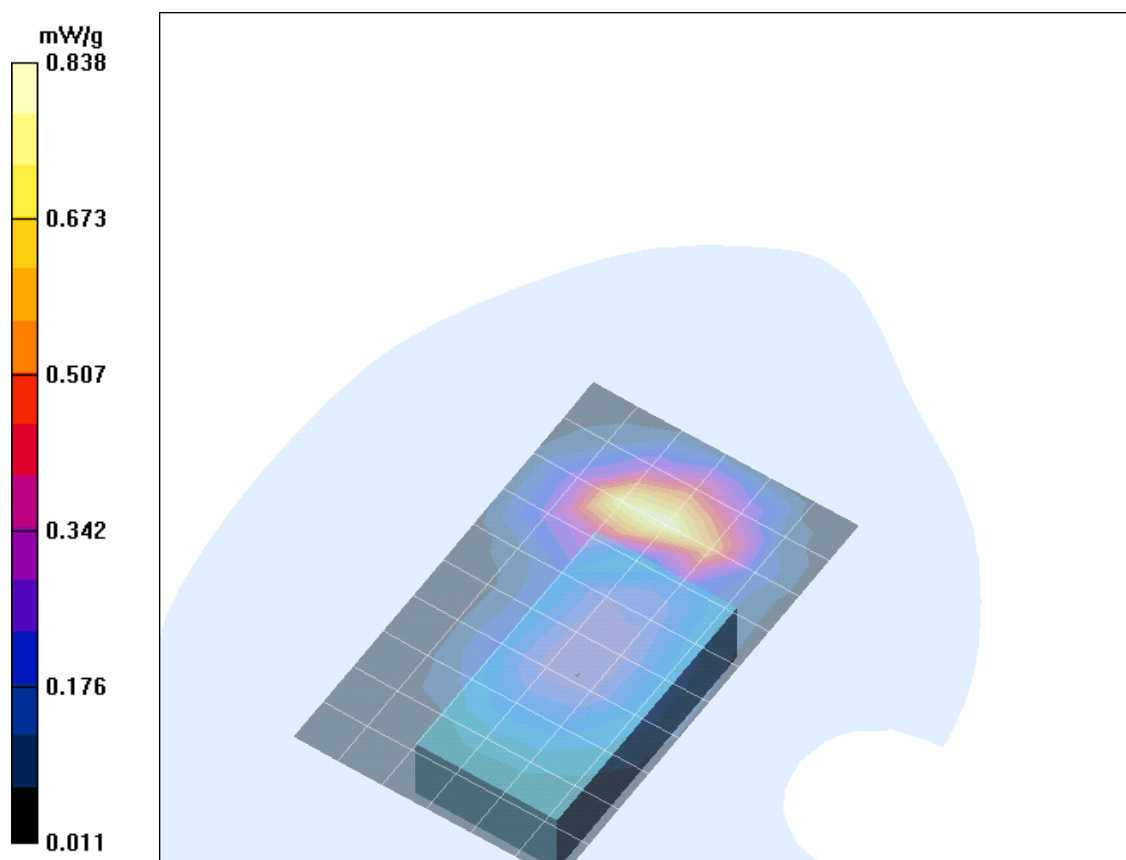


Fig. 8: SAR distribution for PCS 1900, channel 810, antenna towards the phantom, GPRS Class 10, (03.07.2005; Ambient Temperature: 21.0° C; Liquid Temperature : 20.1° C).

3 SAR Distribution Plots, PCS 1900 Body worn, PTT (gap = 25 mm)

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [726yphm_2.da4](#)

DUT: Alcatel ; Type: OT-C651; Serial: 355432000132726

Program Name: Body Worn

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $\sigma = 1.54$; mho/m, $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 23.07.2004
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

Body Worn/Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.094 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.16 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.16 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 0.075 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

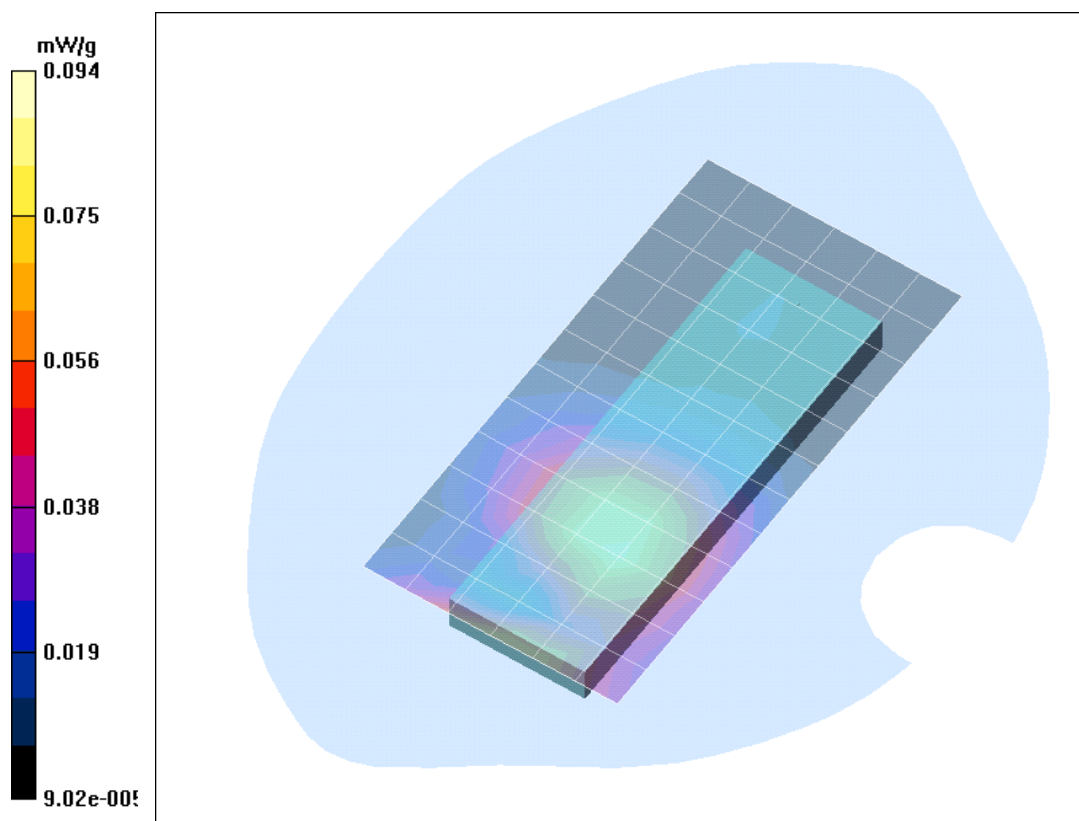


Fig. 9: SAR distribution for PCS 1900, channel 661, antenna towards the ground, GSM (03.07.2005; Ambient Temperature: 21.1° C; Liquid Temperature : 20.1° C).

4 SAR z-axis scans (Validation)

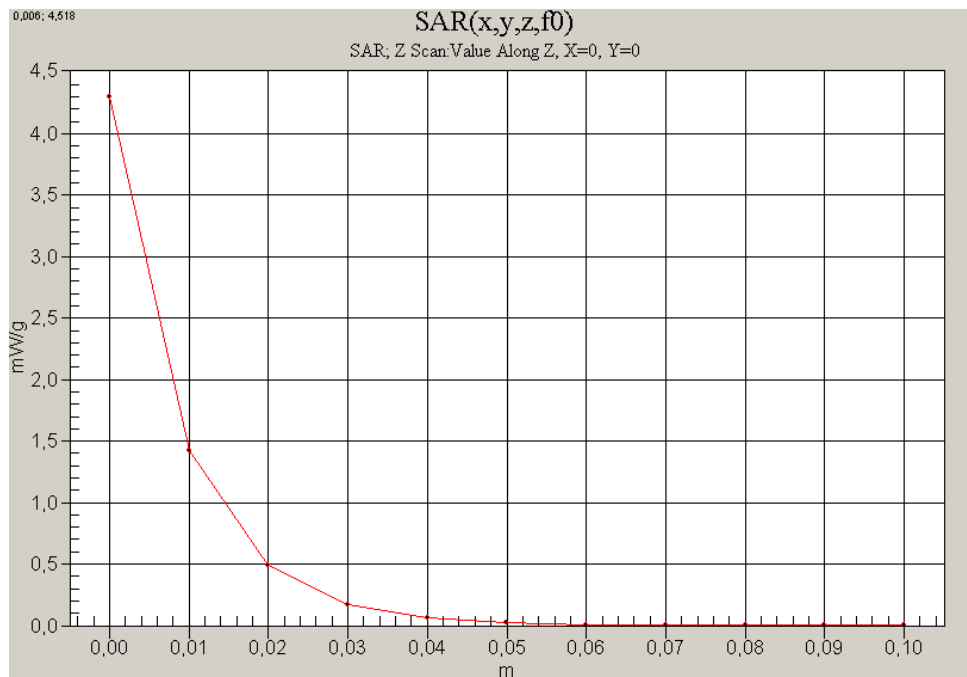


Fig. 10: SAR versus liquid depth, 1900 MHz, head (03.04.2005; Ambient Temperature: 22.0° C; Liquid Temperature : 21.0° C).

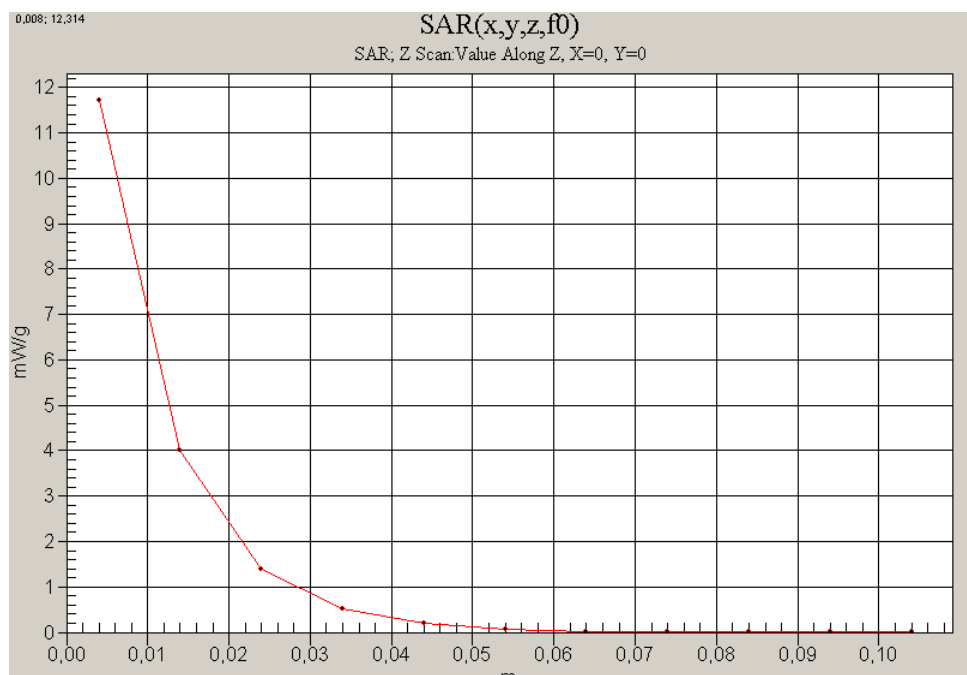


Fig. 11: SAR versus liquid depth, 1900 MHz, body (03.07.2005; Ambient Temperature: 22.0° C; Liquid Temperature : 20.4° C).

5 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

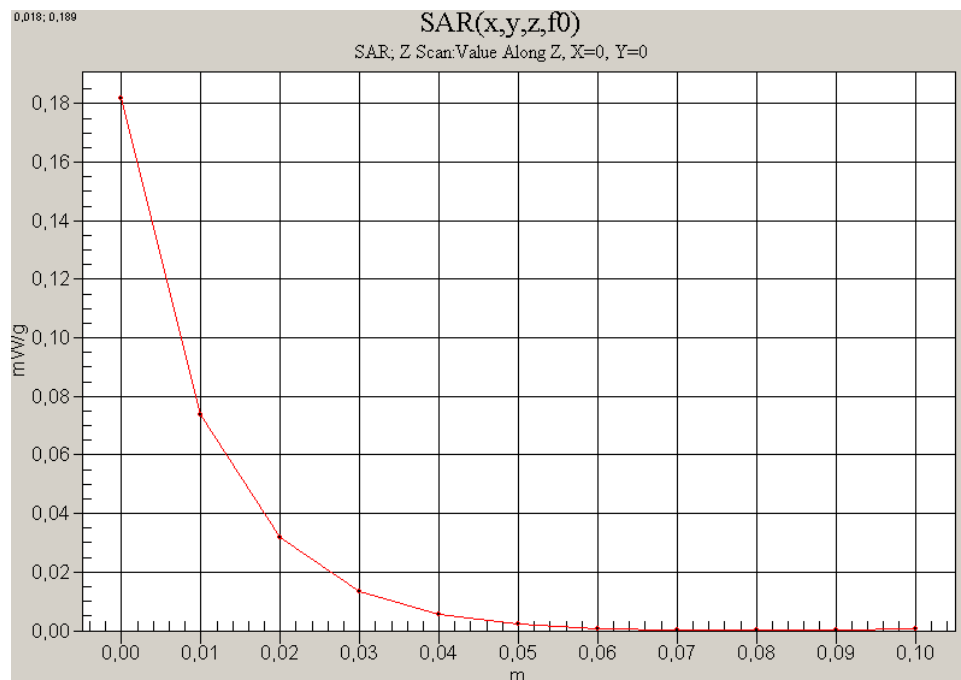


Fig. 12: SAR versus liquid depth, head: PCS 1900, channel 661, cheek position, right side of head (03.04.2005, Ambient Temperature: 21.0° C; Liquid Temperature : 21.2° C).

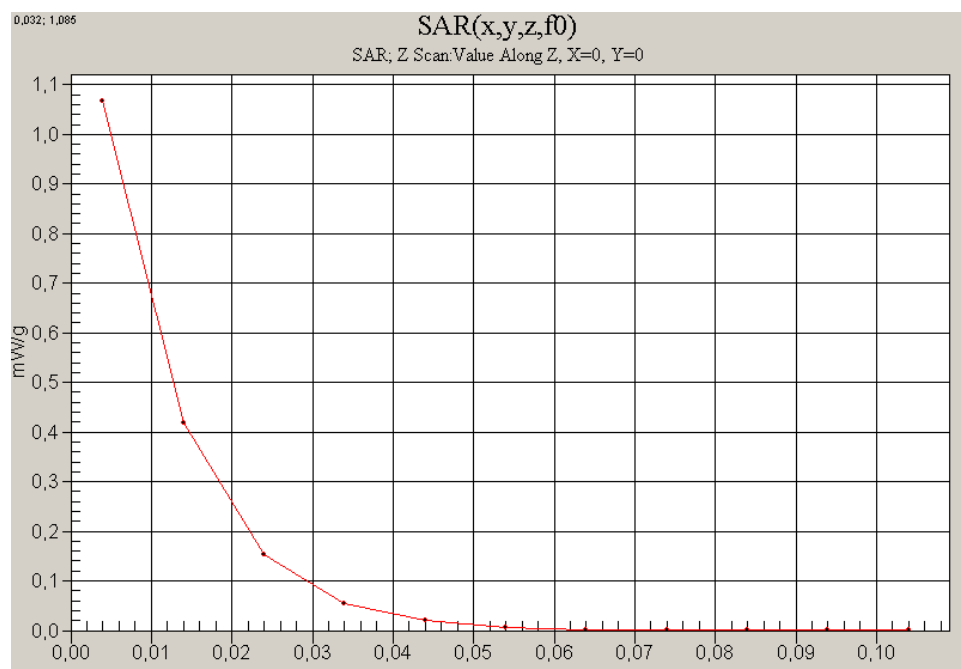


Fig. 13: SAR versus liquid depth, body: PCS 1900, channel 661, antenna towards the phantom, GPRS Class 10 (03.07.2005; Ambient Temperature: 21.1° C; Liquid Temperature : 20.0° C).