

Test Plot 1#: GSM 850_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f=836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r=41.464$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.581 W/kg


Zoom Scan (8x8x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.32 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 0.640 W/kg

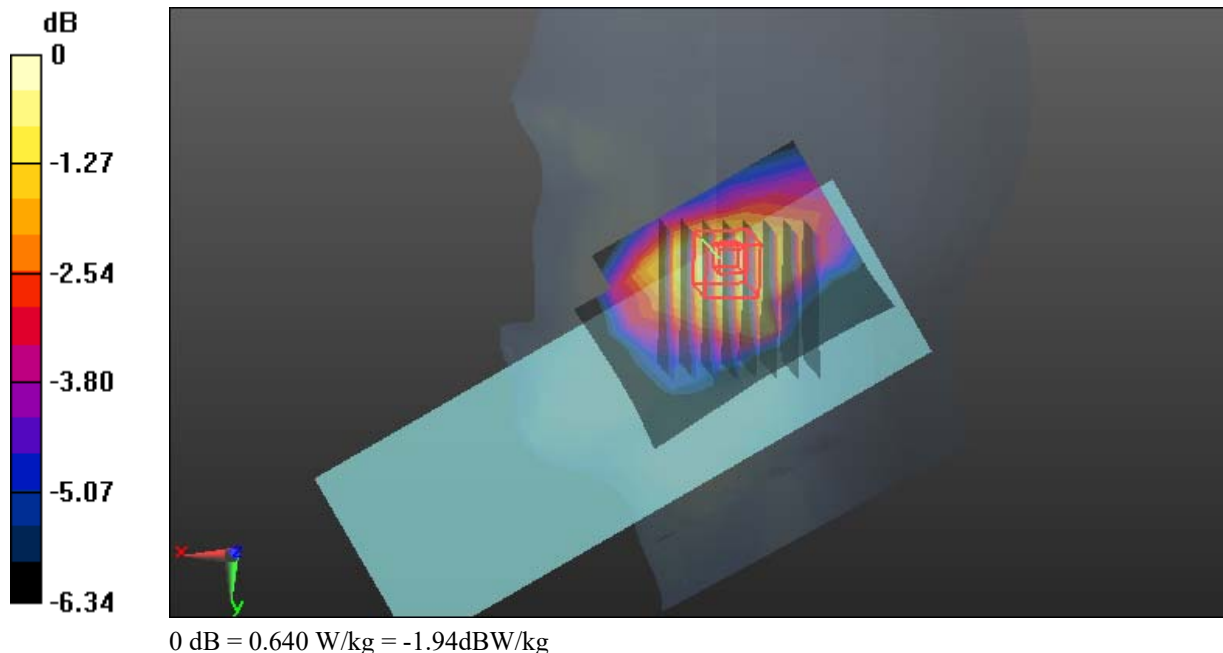

Test Plot 2#: PCS 1900_High_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic GPRS-3 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.66

Medium parameters used: $f=1909.8$ MHz; $\sigma = 1.433$ S/m; $\epsilon_r=38.908$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1909.8 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.474 W/kg


Zoom Scan (7x6x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.44 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.527 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.227 W/kg

Maximum value of SAR (measured) = 0.459 W/kg

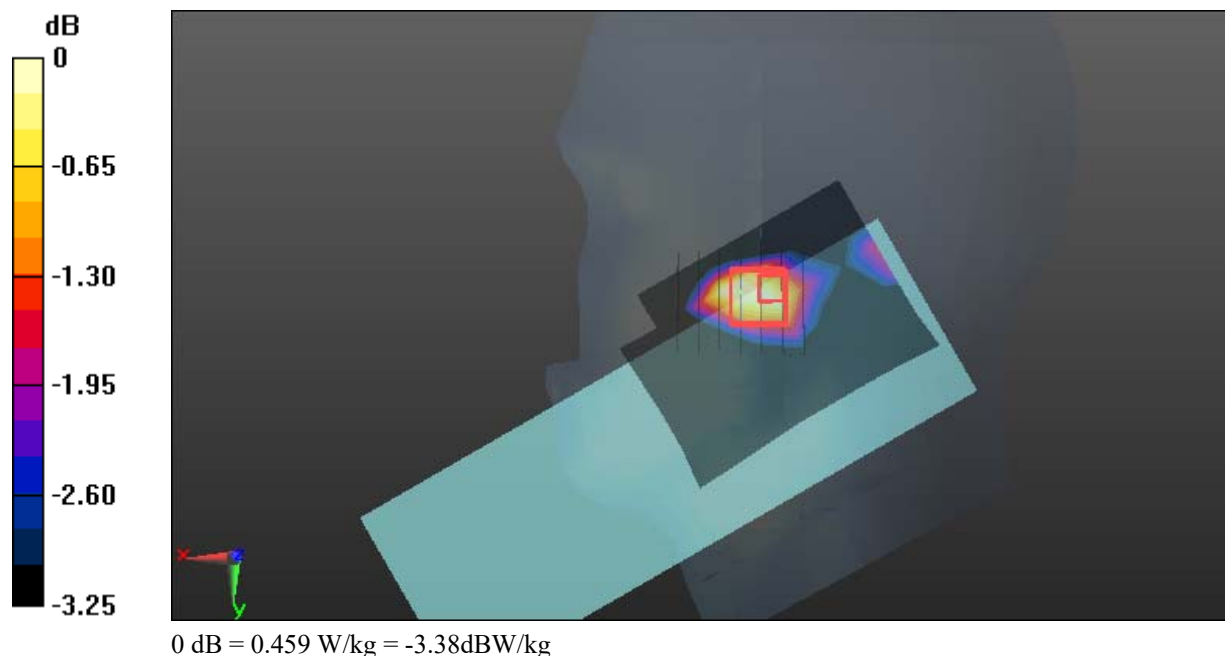

Test Plot 3#: WCDMA Band 2_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1880$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r=39.044$; $\rho = 1000$ kg/m³;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1880 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.977 W/kg


Zoom Scan (6x6x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.094 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 0.859 W/kg

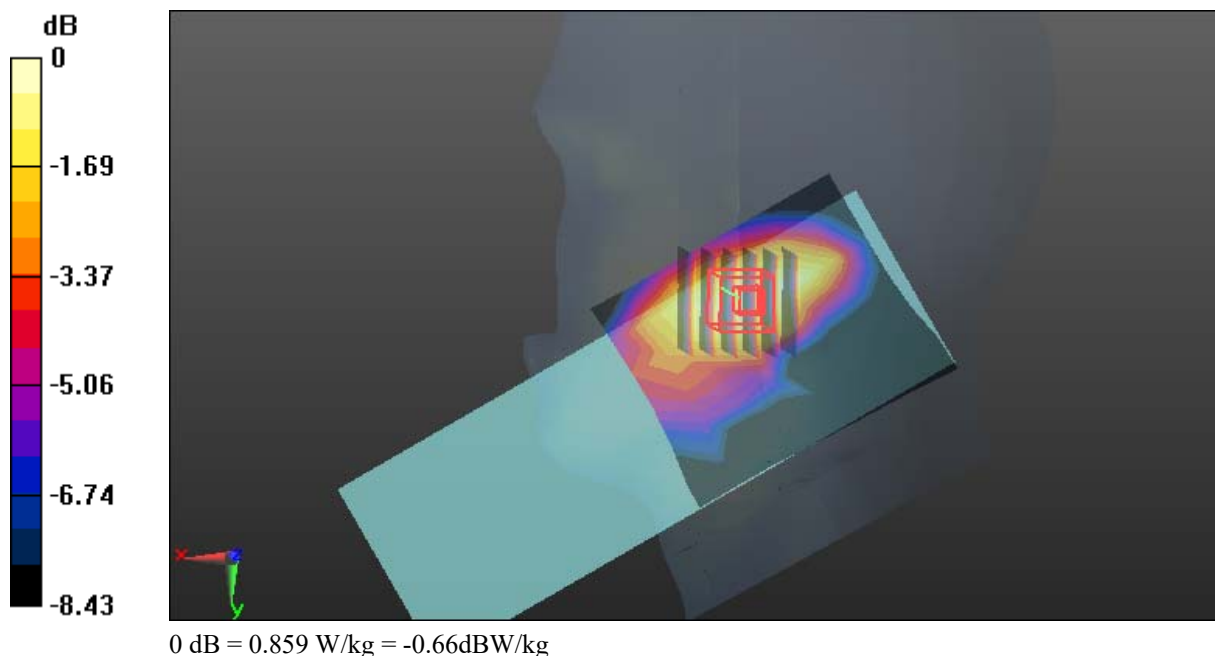

Test Plot 4#: WCDMA Band 4_Low_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f=1712.4$ MHz; $\sigma = 1.319$ S/m; $\epsilon_r=39.696$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1712.4 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.812 W/kg


Zoom Scan (6x7x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.811 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.488 W/kg

Maximum value of SAR (measured) = 0.867 W/kg

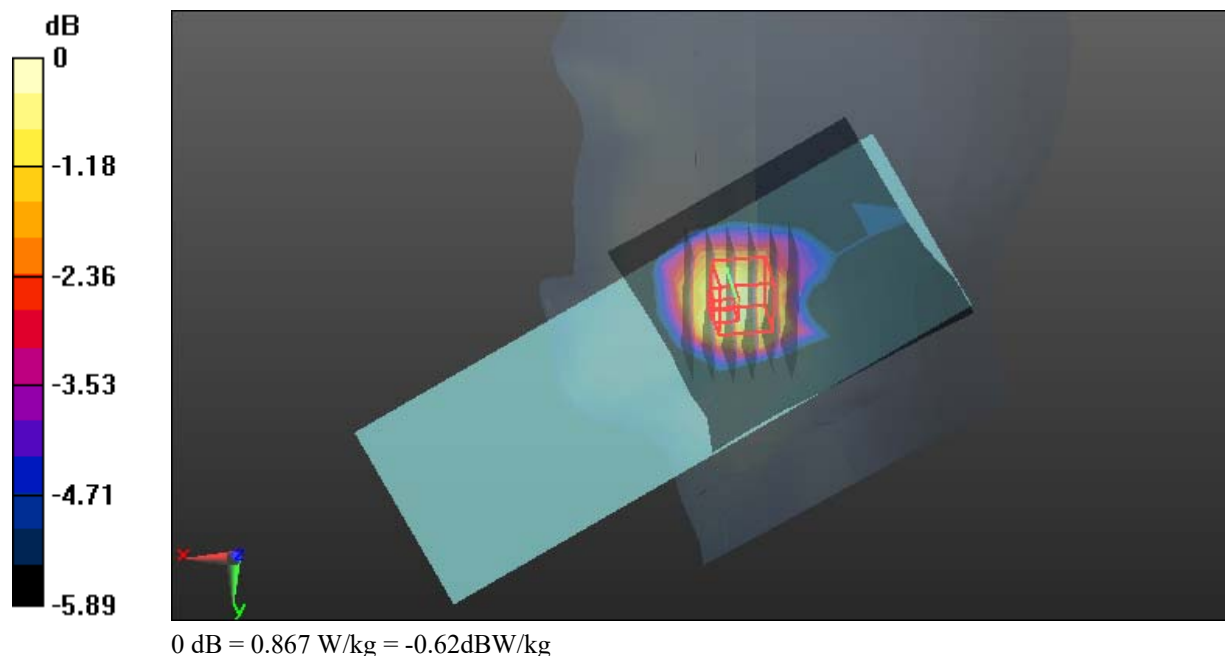

Test Plot 5#: WCDMA Band 5_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f=836.6$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r=41.464$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 836.6 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.775 W/kg


Zoom Scan (6x6x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.592 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.689 W/kg; SAR(10 g) = 0.498 W/kg

Maximum value of SAR (measured) = 0.849 W/kg

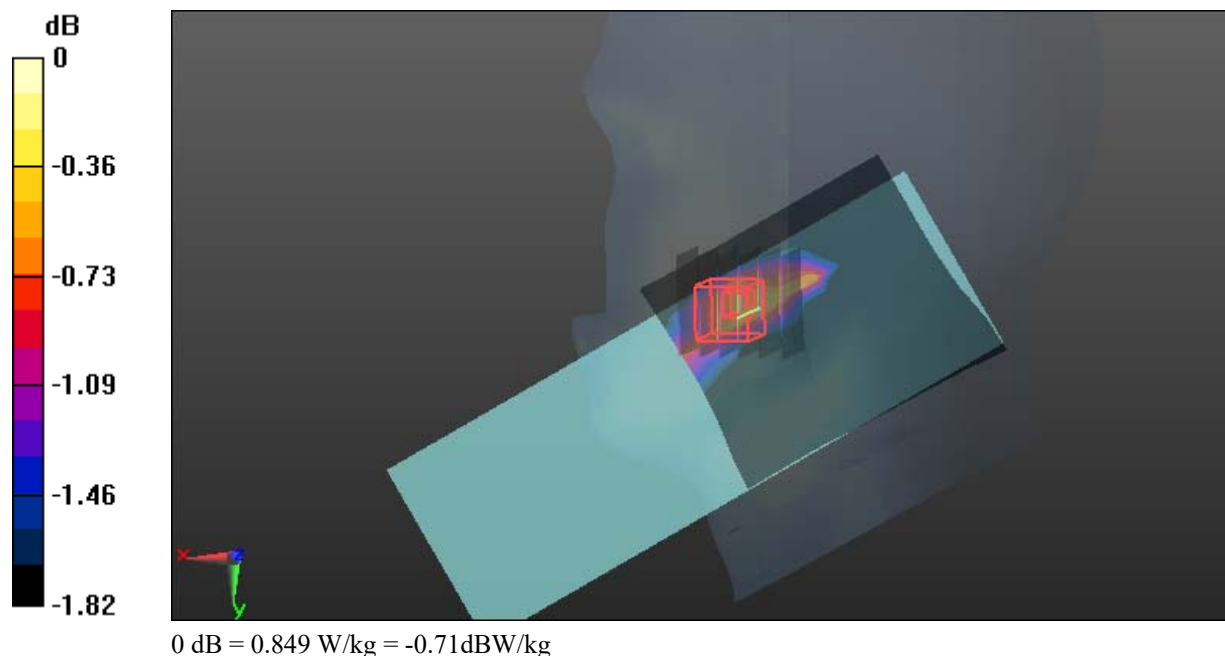

Test Plot 6#: LTE Band 7_1RB_Low_Body Right**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=2510$ MHz; $\sigma = 1.893$ S/m; $\epsilon_r=40.671$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2510 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.915 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.605 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.760 W/kg; SAR(10 g) = 0.379 W/kg

Maximum value of SAR (measured) = 0.962 W/kg

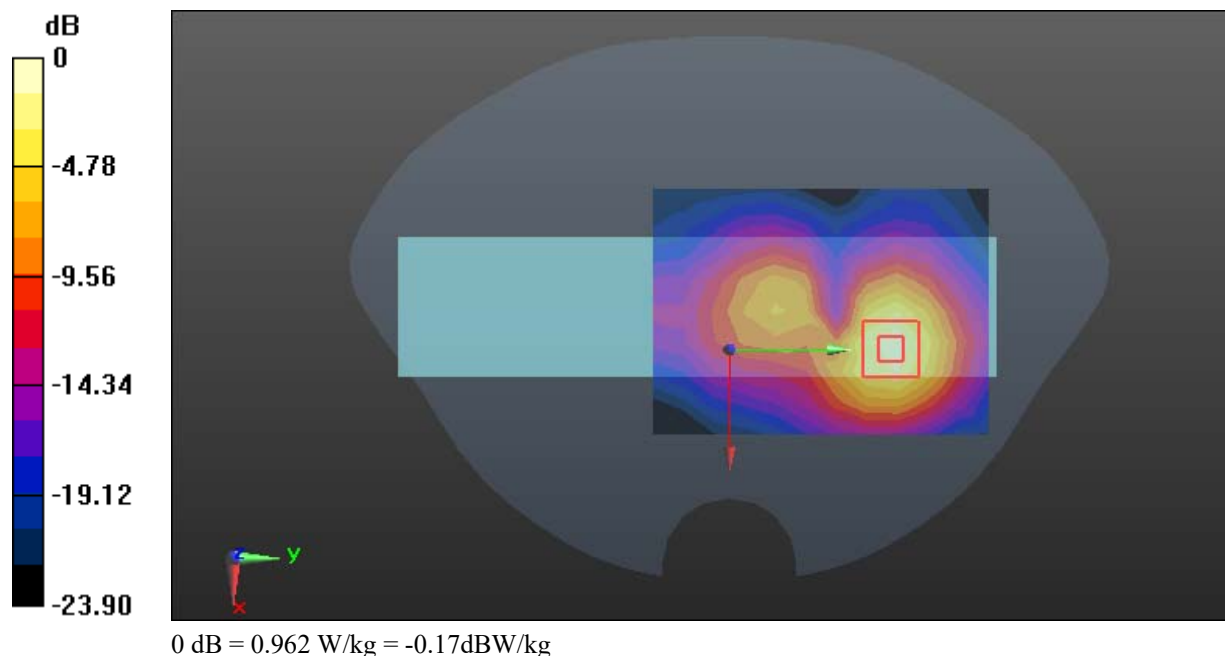

Test Plot 7#: LTE Band 12_1RB_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 43.03$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 707.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.826 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.845 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.635 W/kg; SAR(10 g) = 0.480 W/kg

Maximum value of SAR (measured) = 0.764 W/kg

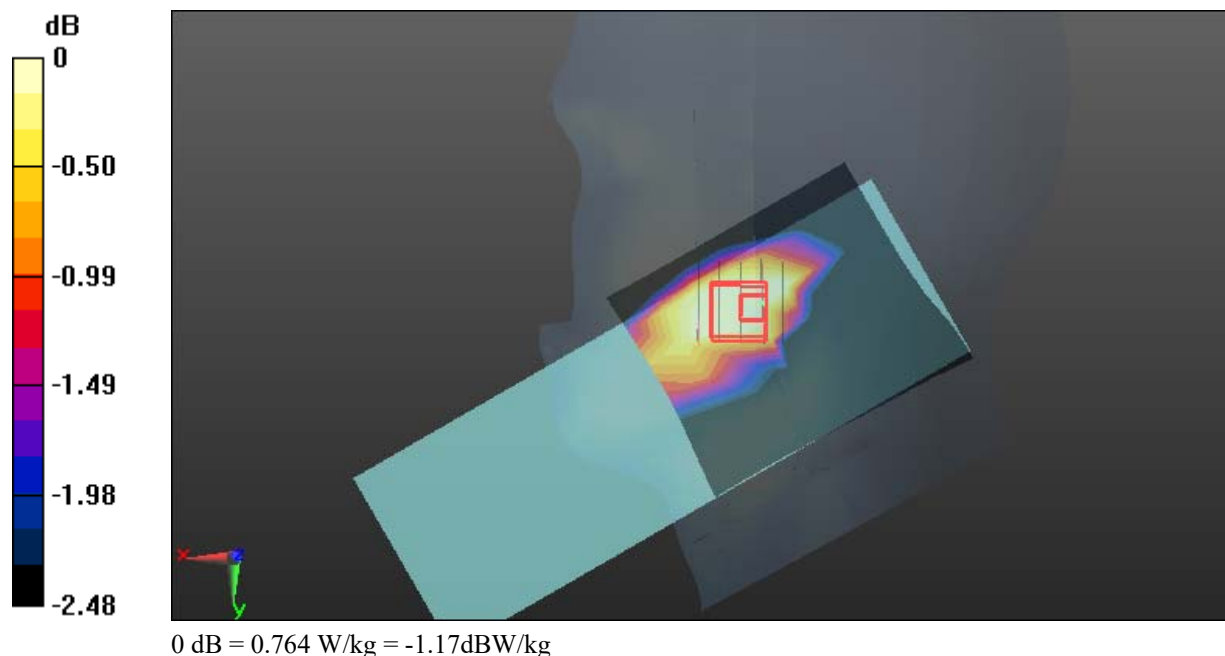

Test Plot 8#: LTE Band 13_1RB_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f=782$ MHz; $\sigma = 0.929$ S/m; $\epsilon_r=42.078$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 782 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.823 W/kg


Zoom Scan (6x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.872 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.494 W/kg

Maximum value of SAR (measured) = 0.825 W/kg

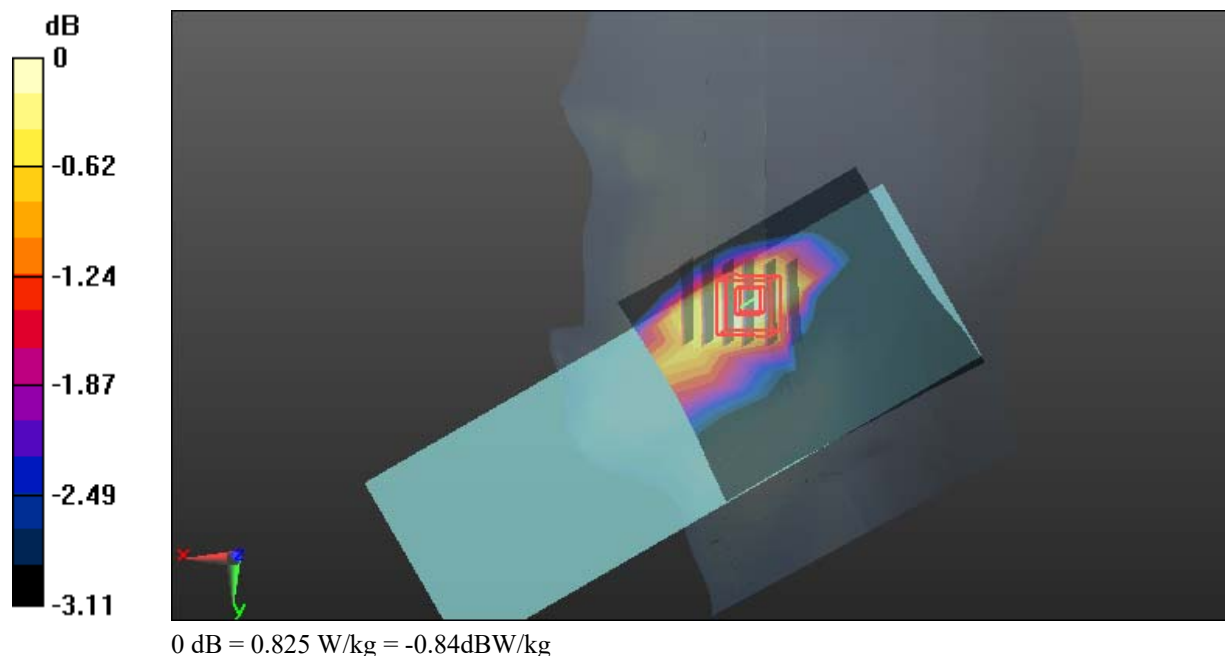

Test Plot 9#: LTE Band 25_1RB_High_Body Right**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 1905 MHz; Duty Cycle: 1:1
 Medium parameters used: $f=1905$ MHz; $\sigma = 1.432$ S/m; $\epsilon_r=38.922$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1905 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.629 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.05 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.585 W/kg; SAR(10 g) = 0.325 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

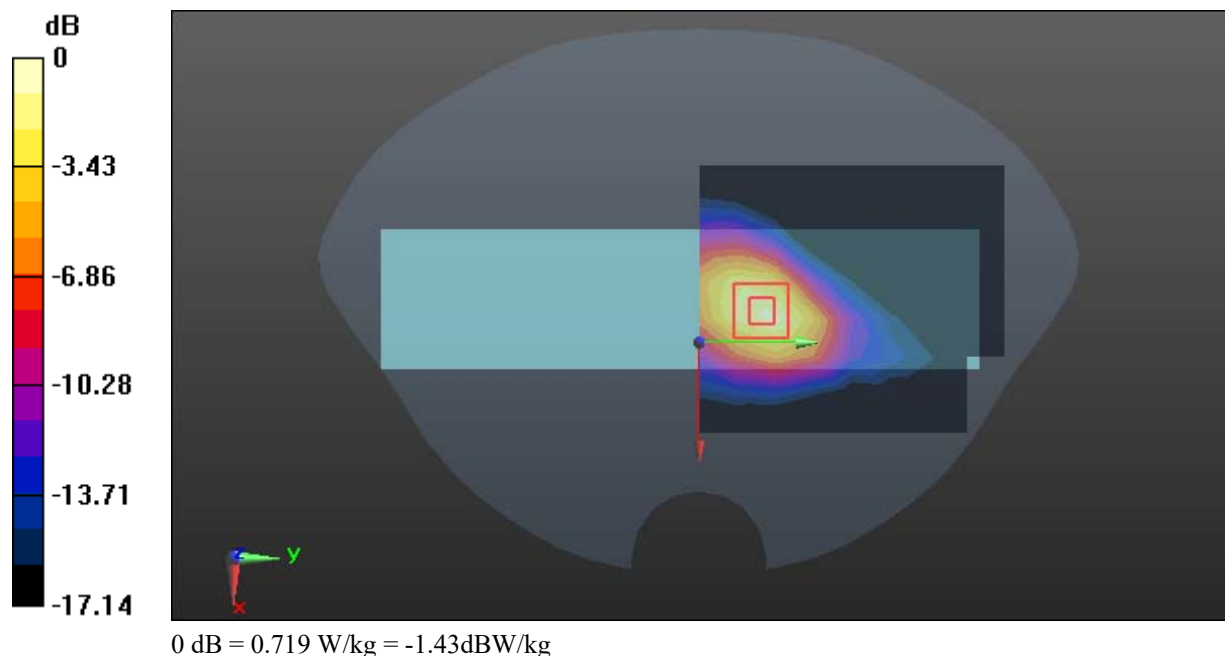

Test Plot 10#: LTE Band 26_1RB_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f=831.5$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r=41.483$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 831.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.684 W/kg


Zoom Scan (6x6x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.683 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 0.741 W/kg

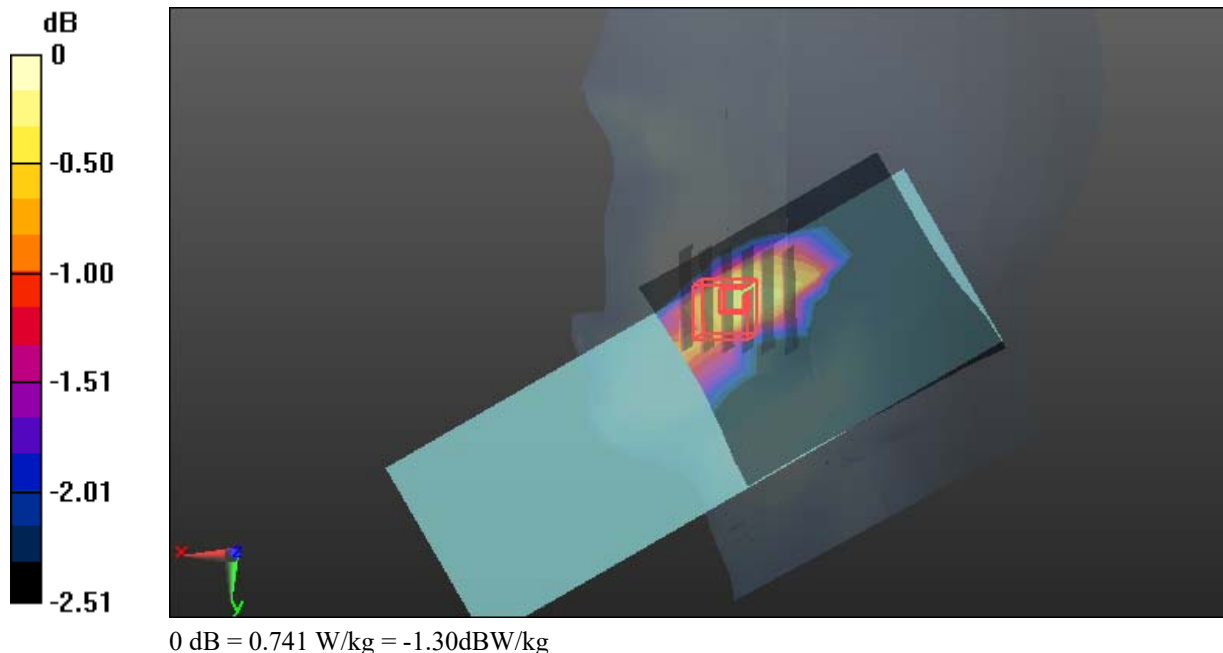

Test Plot 11#: LTE Band 41_50%RB_Mid_Body Right**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic TDD-LTE (0); Frequency: 2595MHz; Duty Cycle: 1:1.58
 Medium parameters used: $f=2595$ MHz; $\sigma = 1.998$ S/m; $\epsilon_r=40.027$; $\rho = 1000$ kg/m³;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2595 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x12x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.229 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.650 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.179 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

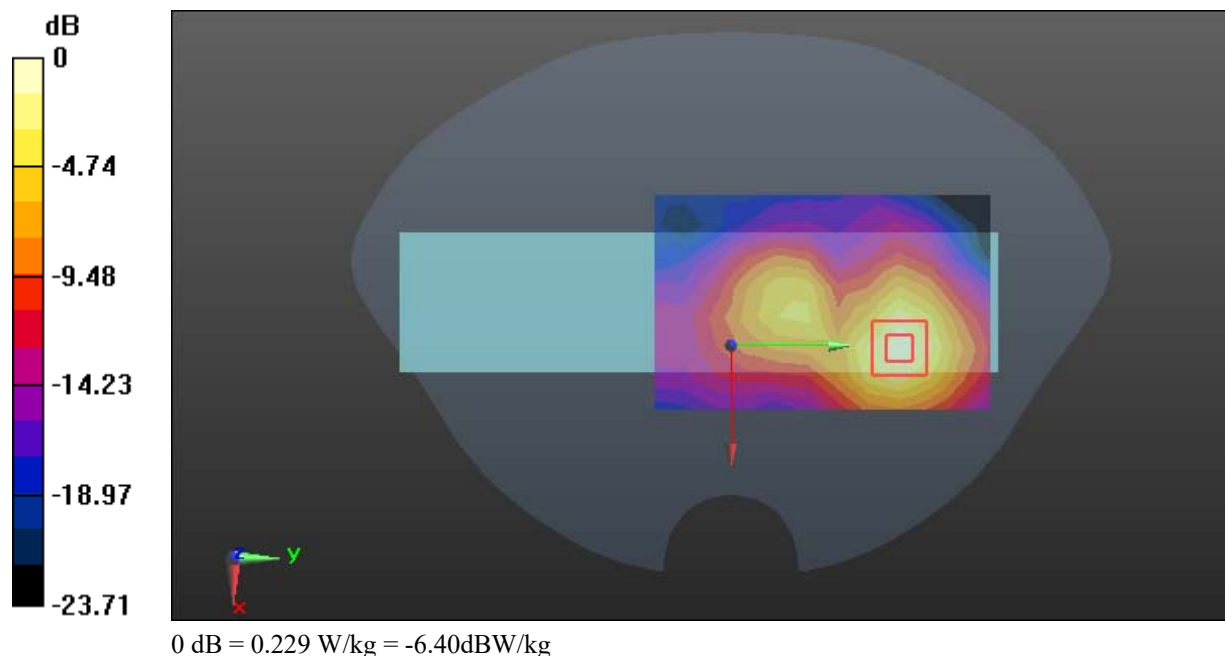

Test Plot 12#: LTE Band 66_1RB_High_Body Right**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f=1770$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r=39.454$; $\rho = 1000$ kg/m³;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1770 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (9x15x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.567 W/kg


Zoom Scan (5x5x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.09 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.872 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

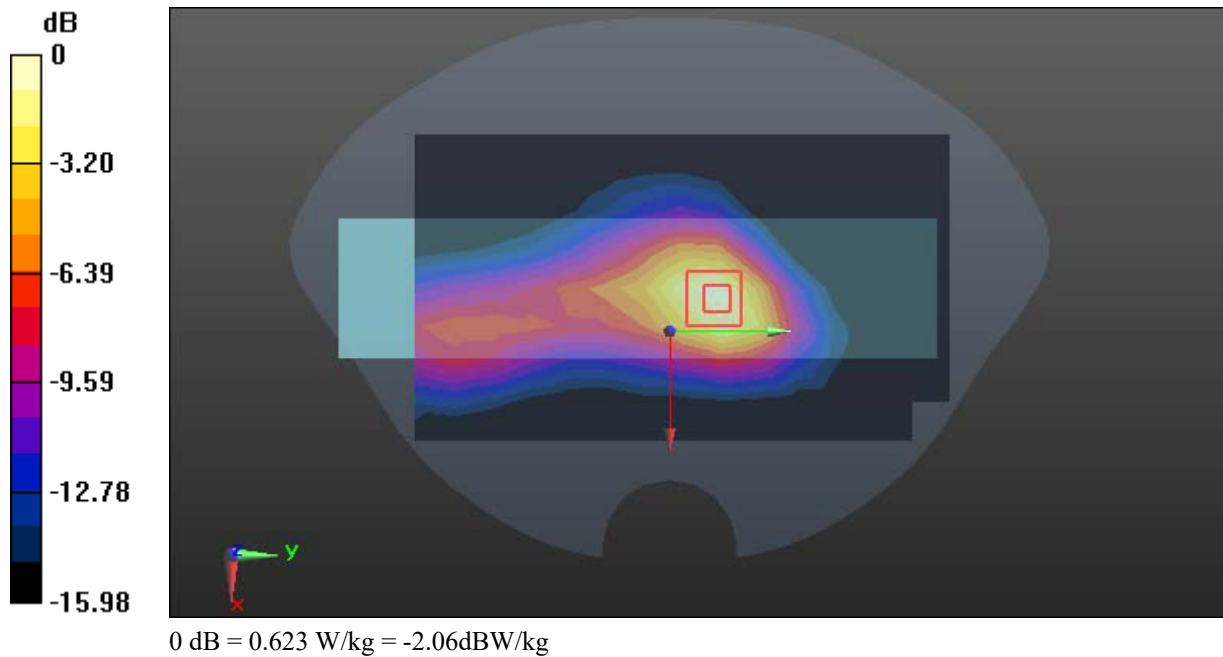

Test Plot 13#: LTE Band 71_1RB_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f=680.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r=43.365$; $\rho = 1000$ kg/m³;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 680.5 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x8x1):Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.924 W/kg


Zoom Scan (6x6x7) /Cube 0:Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.981 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.989 W/kg

SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.584 W/kg

Maximum value of SAR (measured) = 0.931 W/kg

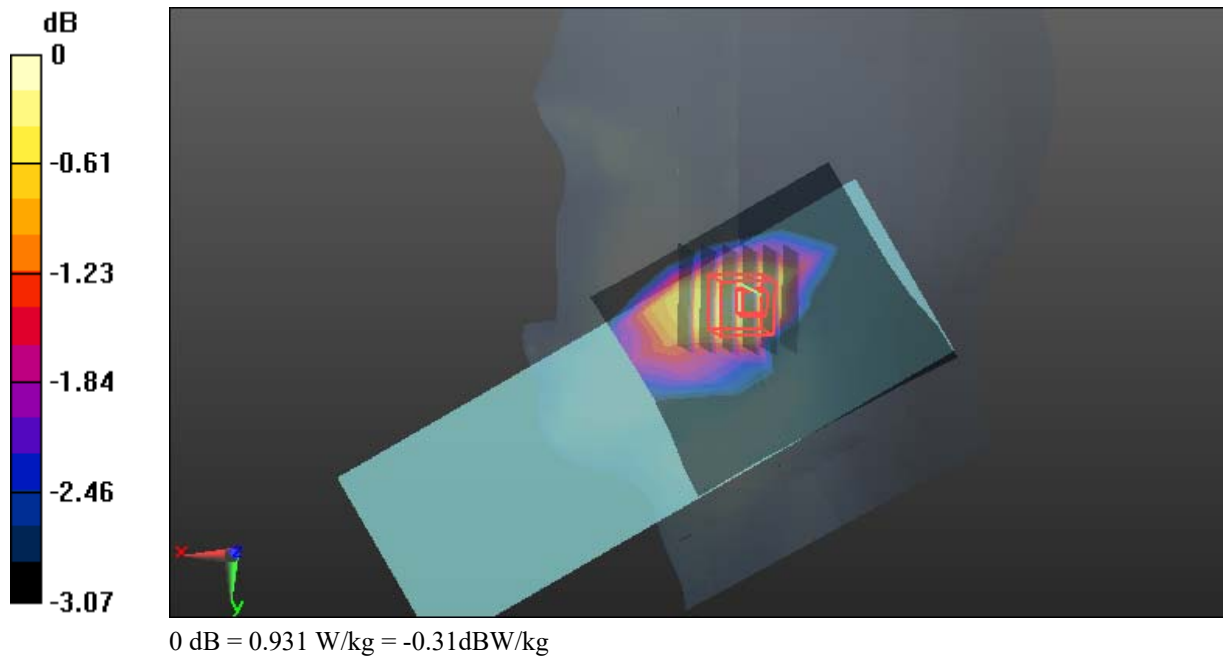

Test Plot 14#: WLAN 2.4G_High_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.01
Medium parameters used: $f=2462$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r=40.416$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2462 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x7x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0328 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.1820 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0366 W/kg

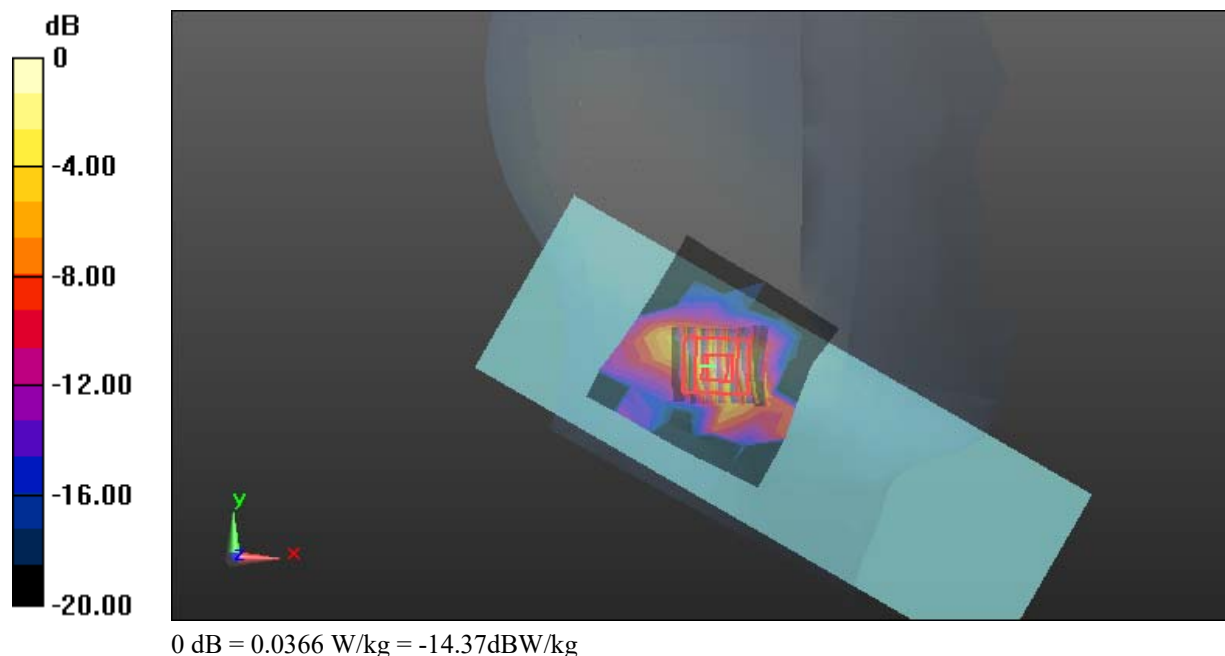

Test Plot 15#: WLAN 5.2G_Low_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: 802.11 n20; Frequency: 5180 MHz; Duty Cycle: 1:1.02

Medium parameters used: $f = 5180$ MHz; $\sigma = 4.52$ S/m; $\epsilon_r = 35.452$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.637 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.136 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.75 W/kg

SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

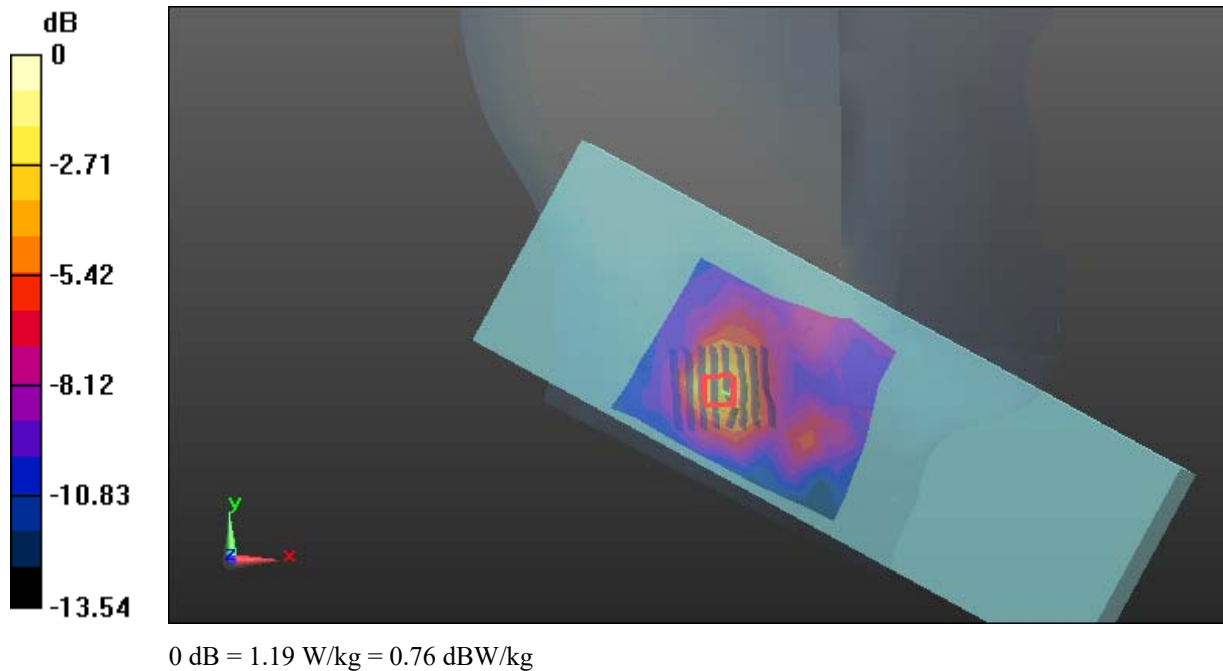

Test Plot 16#: WLAN 5.3G_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: 802.11 n20; Frequency: 5280 MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f=5280$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r=35.322$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5280 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.524 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.471 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.219 W/kg

Maximum value of SAR (measured) = 0.914 W/kg

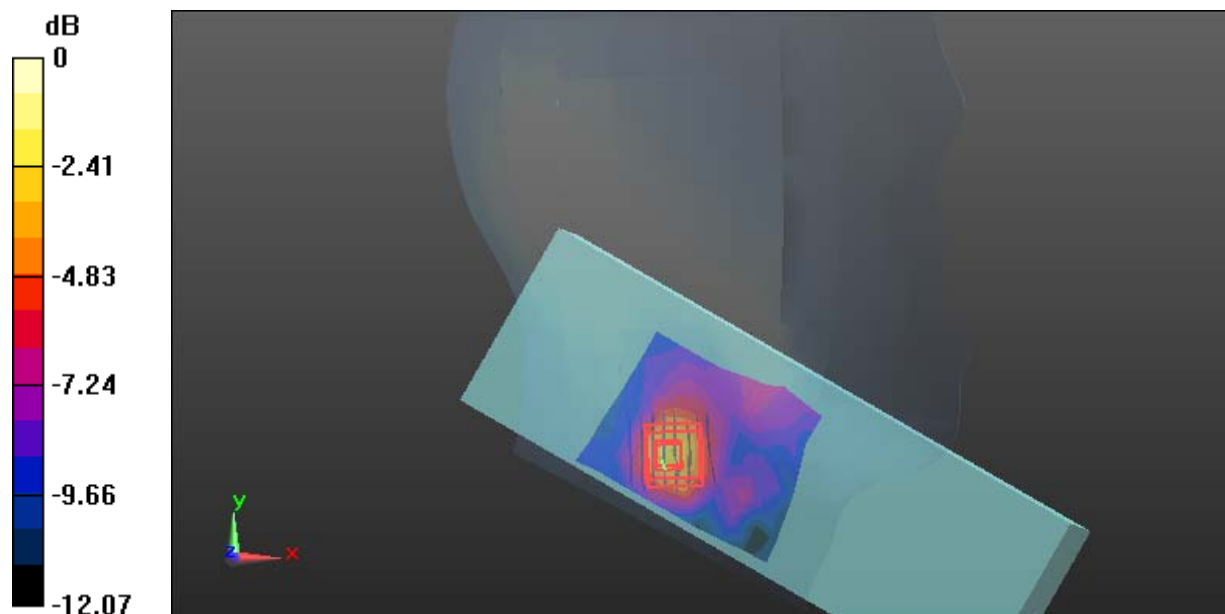

0 dB = 0.914 W/kg = -0.39dBW/kg

Test Plot 17#: 5.6G WIFI_Mid_Body Left**DUT: Mobile Terminal; Type:M20SE; Serial: 2H2-1**

Communication System:802.11 n20; Frequency: 5580MHz; Duty Cycle: 1:1.02
 Medium parameters used: $f=5580$ MHz; $\sigma = 5.036$ S/m; $\epsilon_r=35.705$; $\rho = 1000$ kg/m³ ;
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(4.94, 4.48, 4.39) @ 5580 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x20x1):Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.20 W/kg


Zoom Scan (8x8x16) /Cube 0:Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.053 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

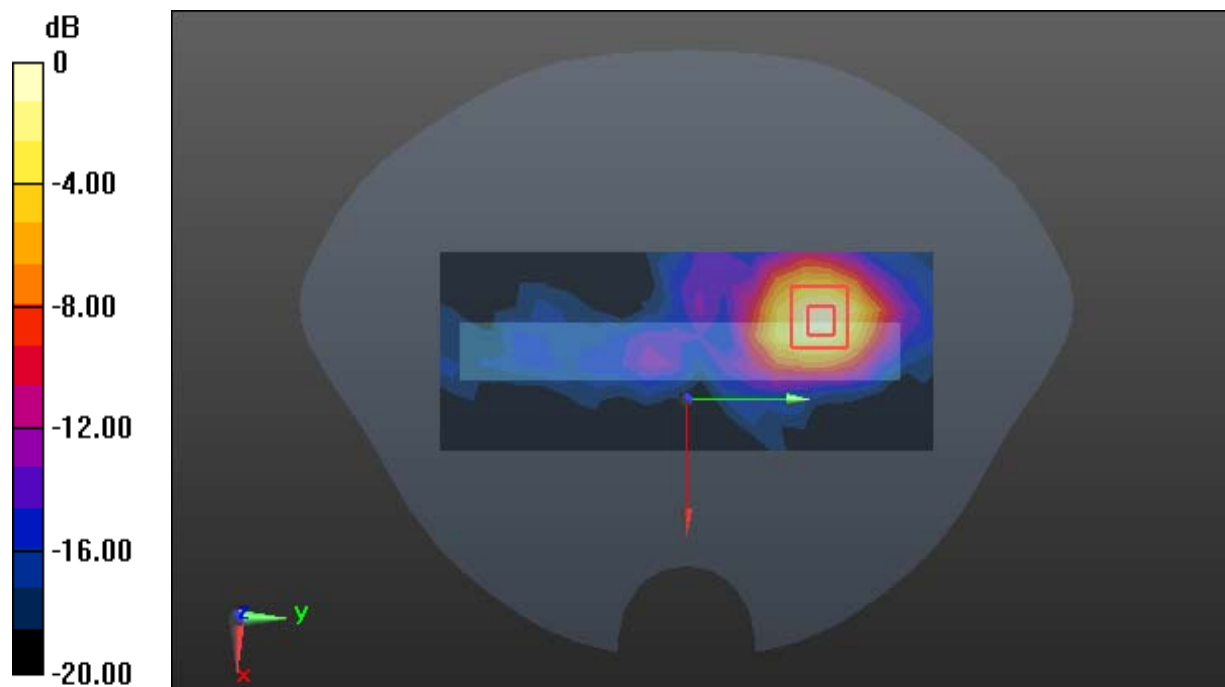

0 dB = 1.34 W/kg = 1.27dBW/kg

Test Plot 18#: WLAN 5.8G_Mid_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2H2-2;**

Communication System: 802.11 n20; Frequency: 5785 MHz; Duty Cycle: 1:1.02
Medium parameters used: $f=5785$ MHz; $\sigma = 5.199$ S/m; $\epsilon_r=34.057$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5785 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.08 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8550 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

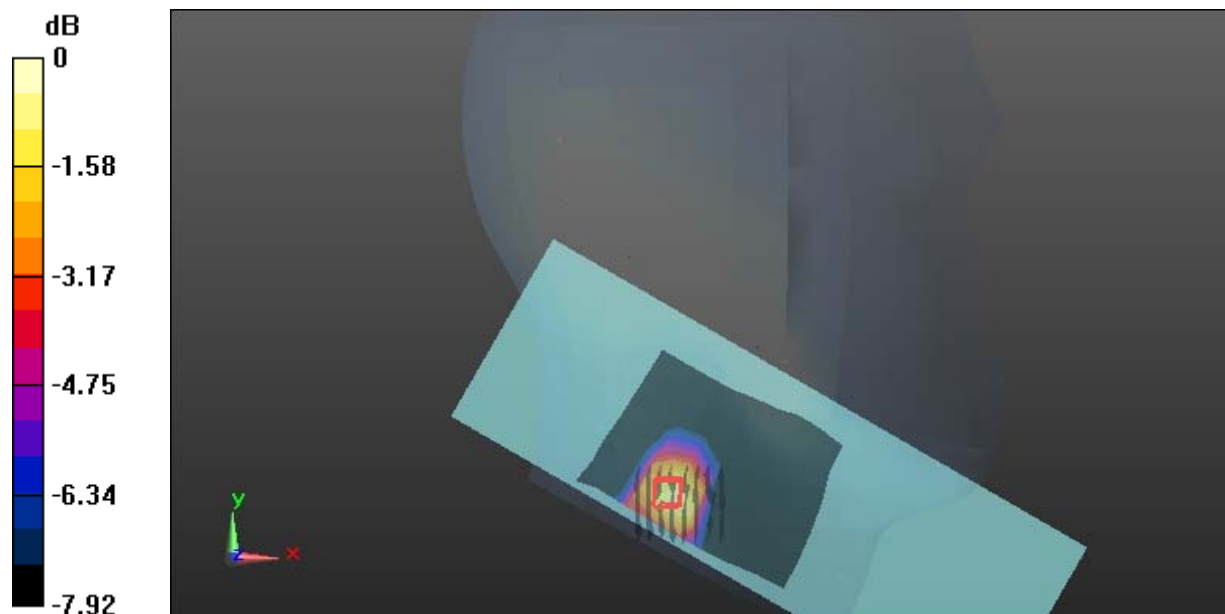

0 dB = 1.26 W/kg = 1.00 dBW/kg

Test Plot 19#: BT_High_Body Back**DUT: Mobile Terminal; Type:M20; Serial: 2II2-2;**

Communication System: Bluetooth(GFSK) (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3
 Medium parameters used: $f=2480$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r=40.355$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2480 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x8x1):Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0716 W/kg


Zoom Scan (7x7x7) /Cube 0:Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.538 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.0698 W/kg

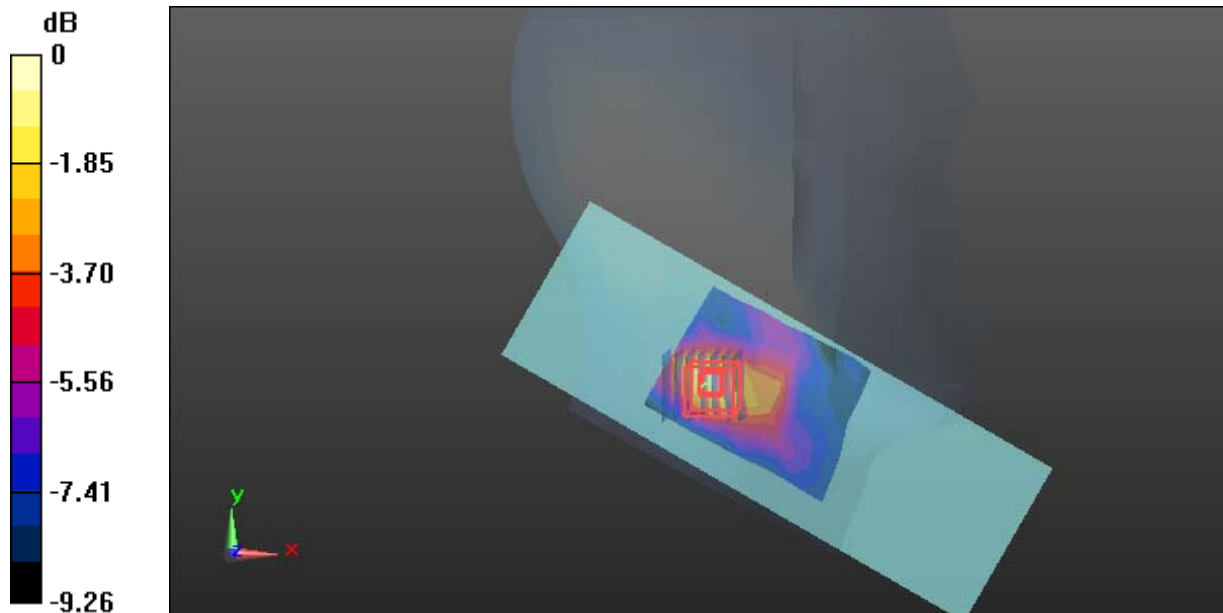

0 dB = 0.0698 W/kg = -11.56dBW/kg