

FCC Test Report

Report No.: AGC01284210304FE10

FCC ID : MMAMXT500

PRODUCT DESIGNATION: GMRS Mobile Radio

BRAND NAME : Midland Radio Corporation

MODEL NAME : MXT500

APPLICANT: Midland Radio Corporation

DATE OF ISSUE : Apr. 29, 2021

STANDARD(S) : FCC Part 95 Rules

REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restroy/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test result presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 2 of 49

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Apr. 29, 2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 3 of 49

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	б
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 TEST FREQUENCY LIST	
2.3 RELATED SUBMITTAL(S) / GRANT (S)	8
2.4 TEST METHODOLOGY	
2.5 CALCULATION OF EMISSION INDICATORS	
2.6 SPECIAL ACCESSORIES	
2.7 EQUIPMENT MODIFICATIONS	8
2.8 ANTENNA REQUIREMENT	
3. TEST ENVIRONMENT	
3.1 ADDRESS OF THE TEST LABORATORY	10
3.2 TEST FACILITY	
3.3 ENVIRONMENTAL CONDITIONS	11
3.4 MEASUREMENT UNCERTAINTY	11
3.5 LIST OF EQUIPMENTS USED	
4.SYSTEM TEST CONFIGURATION	
4.1 EUT CONFIGURATION	13
4.2 EUT EXERCISE	
4.3 CONFIGURATION OF TESTED SYSTEM	13
4.4 EQUIPMENT USED IN TESTED SYSTEM	
4.5 SUMMARY OF TEST RESULTS	14
5. DESCRIPTION OF TEST MODES	
6.FREQUENCY STABILITY	
6.1 PROVISIONS APPLICABLE	
6.2 MEASUREMENT PROCEDURE	16
6.3 MEASUREMENT SETUP	
6.4 MEASUREMENT RESULTS	
7. EMISSION BANDWIDTH	18
7.1 PROVISIONS APPLICABLE	18
7.2 MEASUREMENT PROCEDURE	
7.3 MEASUREMENT SETUP	
7.4 MEASUREMENT RESULTS	
8. SPURIOUS RATIATED EMISSION	22

8.1 PROVISIONS APPLICABLE

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Declicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





	8.2 MEASUREMENT PROCEDURE	
	8.3 MEASUREMENT SETUP	24
	8.4 MEASUREMENT RESULTS	25
	8.5 EMISSION MASK PLOT	
9.1	MODULATION CHARACTERISTICS	31
	9.1 PROVISIONS APPLICABLE	31
	9.2 MEASUREMENT METHOD	31
	9.3 MEASUREMENT SETUP	31
	9.4 MEASUREMENT RESULTS	32
10	MAXIMUMN TRANSMITTER POWER	
	10.1 PROVISIONS APPLICABLE	
	10.2 MEASUREMENT METHOD	
	10.3 MEASUREMENT SETUP	
	10.4 MEASUREMENT RESULTS	39
11.	SPURIOUS EMISSION ON ANTENNA PORT	41
	11.1 PROVISIONS APPLICABLE	41
	11.2 MEASUREMENT METHOD	
	11.3 MEASUREMENT SETUP	41
	11.4 MEASUREMENT RESULTS	42
12	AUDIO LOW PASS FILTER RESPONSE	
	12.1 PROVISIONS APPLICABLE	44
	12.2 MEASUREMENT METHOD	
	13.3 MEASUREMENT SETUP	
	13.4 MEASURET RESULTS	45
AP	PENDIX I: PHOTOGRAPHS OF TEST SETUP	47
ΑP	PENDIX II: PHOTOGRAPHS OF TEST EUT	49

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 5 of 49

1. GENERAL INFORMATION

Applicant	Midland Radio Corporation		
Address	5900 Parretta Drive, Kansas City, MO 64120,USA		
Manufacturer	Midland Radio Corporation		
Address	5900 Parretta Drive, Kansas City, MO 64120,USA		
Factory	Midland Radio Corporation		
Address	5900 Parretta Drive, Kansas City, MO 64120,USA		
Product Designation	GMRS Mobile Radio		
Brand Name	MIDLAND		
Test Model	MXT500		
Deviation from Standard	No any deviation from the test method.		
Date of Receipt	Mar. 22, 2021		
Date of Test	Mar. 26, 2021~Apr. 29, 2021		
Test Result	Pass		

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 95. The test results of this report relate only to the tested sample identified in this report.

Prepared By

Donjon Huang
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Apr. 29, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 6 of 49

2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	VER2.1				
Software Version	V1				
Power Supply	DC 13.8V				
Communication Type	Voice / Tone only				
Operation Frequency Range	462.5500MHz-462.7250MHz (GMRS 462 MHz main channels) 462.5625MHz-462.7125MHz (GMRS 462 MHz interstitial channels) 467.5500MHz-467.7250MHz (GMRS 467 MHz main channels)				
Modulation Type	FM				
Channel Separation	12.5 KHz/25 KHz				
Emission Designator	11K0F3E/16K0F3E				
Emission Bandwidth	GMRS: 10.52 KHz-12.5 KHz GMRS: 15.71 KHz-25 KHz				
Number of Channels:	23 Channels				
Rated Output Power	50W/5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)				
Maximum Transmitter Power	GMRS: 46.80dBm (50W-12.5KHz) GMRS: 36.67dBm (5 W-12.5KHz)				
waxiiiiuiii Italisiiiillei Fowei	GMRS: 46.41dBm (50W-25KHz) GMRS: 36.66dBm (5 W-25KHz)				
Antenna Designation	Detachable				
Antenna Type	External antenna				
Antenna Gain	2.5dBi				
Frequency Tolerance	1.100ppm				

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 49

2.2 TEST FREQUENCY LIST

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range Over which EUT operates	Number of Frequencies	Location in frequency range of operation
1 MHz or less	1 0	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Channel. No	CH. Freq	Rated Power	CH. No	CH. Freq	Rated Power
1	462.5625	(8)	16	467.5500	
2	462.5875	J 2.C	17	467.5750	KG -(
3	462.6125		18	467.6000	
4	462.6375	5W	19	467.6250	FOW.
5	462.6625	8	20	467.6500	50W
6	462.6875	7 2.G	21	467.6750	5 20
7	462.7125		22	467.7000	
8	462.5500		23	467.7250	0
9	462.5750	8	24	0 20	9
10	462.6000		25		-G
11	462.6250	5014	26	® 	
12	462.6500	50W	27	eC ®	
13	462.6750		28		(8)
14	462.7000		29		20
15	462.7250		30	®	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 8 of 49

2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **MMAMXT500**, filing to comply with Part 2, Part 95 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 95	PERSONAL RADIO SERVICES
2	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
3	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
4	ANSI/TIA-603-E-2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
5	KDB 888861 D01	888861 D01 Part 95 GMRS FRS v01

2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 2.5 kHz) = 11 kHz = 11KO

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25kHz)

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

BW = 2(M+D) = 2*(3.0 kHz + 5.0 kHz) = 16 kHz = 16K0

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 9 of 49

2.8 ANTENNA REQUIREMENT

Excerpt from §95.1787 of the FCC Rules/Regulations:

The antenna of each GMRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the GMRS transmitter type.
- (2) The non-detachable antenna is only for handheld portable GMRS equipment.
- This GMRS device has a fixed antenna port
- This GMRS equipment is a mobile station or a fixed station, which can be connected to an external antenna

Conclusion: The unit complies with the requirement of §95.1787.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Algorithms and the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 10 of 49

3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 11 of 49

3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (°C)	15 - 35	-20 - 50
Relative humidty range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106
Power supply	DC 13.8V	DC: LV:11.73V/HV:15.87V
		· · · · · · · · · · · · · · · · · · ·

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty

multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Measurement Uncertainty
±0.5%
±0.8dB
±1.3dB
±2.7dB
±3.2 dB
±3.9 dB
±4.8 dB
±2 %
±2 %
±0.98dB
±0.65dB
0.42 %
6.8 %

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 12 of 49

3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9020A	W1312-60196	Aug. 21, 2020	Aug. 20, 2021
EXA Signal Analyzer	Aglient	N9020A	MY52090123	Sep. 03, 2020	Sep. 02, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.16, 2019	Sep.15, 2021
preamplifier	ChengYi	EMC184045SE	980508	Sep. 23, 2019	Sep. 22, 2011
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 17, 2019	May. 16, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 09, 2020	Jun. 08, 2021
HORN ANTENNA	EM	EM-AH-10180		Feb.26, 2021	Feb.25, 2022
SIGNAL GENERATOR	AGILENT	E4421B	MY43351603	Jun. 09, 2020	Jun. 08, 2021
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 09, 2020	Jun. 08, 2021
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 08, 2021	Jan. 07, 2023
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 20, 2019	Sep. 19, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 11, 2020	Jun. 10, 2021
Modulation Domain Analyzer	HP	53310A	3121A02467	Aug. 26, 2020	Aug. 25, 2021
Small environmental tester	ESPEC	SH-242	© I	Sep. 03, 2020	Sep. 02, 2021
RF Communication Test Set	HP	8920B	- .0	Jun. 09, 2020	Jun. 08, 2021
Attenuator	Weinachel Corp	58-30-33	ML030	Oct. 26, 2020	Oct. 25, 2021
RF Cable	R&S	1#	>	Each time	N/A
RF Cable	R&S	2#	COC.	Each time	N/A
Fliter-UHF	Microwave	N25155M2	498705	May 11, 2020	May 10, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 13 of 49

4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

- ☐ Test Accessories Come From The Laboratory
- ☐ Test Accessories Come From The Manufacturer

Item	Equipment Model No. Identifier		Identifier	Note
1	GMRS Mobile Radio	MXT500	FCC ID: MMAMXT500	EUT
2	Hand microphone	N/A	N/A	Accessories
3	External Antenna	N/A	N/A	Accessories

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Report No.: AGC01284210304FE10 Page 14 of 49

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	FCC 47 CFR PART 95	Antenna Equipment	Pass
2	§ 95.1767& 2.1046(a)	Maximum Transmitter Power	Pass
3	§95.1755& 2.1047(a) (b)	Modulation Limit	Pass
4	§95.1755& 2.1047(a)	Audio Frequency Response	Pass
4	§95.1755(e)	Audio Low Pass Filter Response	Pass
5	§95.1779& 2.1049	Emission Bandwidth	Pass
6	§95.1779& 2.1049	Emission Mask	Pass
7	§95.1765& 2.1055(a) (1)	Frequency Stability	Pass
9	§95.1779& 2.1051	Spurious Emission on Antenna Port	Pass
10	§95.1779& 2.1053	Spurious Ratiated Emission	Pass

Note:

1) N/A: In this whole report not application.

The EUT is External Antenna.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the sedicated fees Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AG presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. /Inspection he test results he test report.



Page 15 of 49

5. DESCRIPTION OF TEST MODES

The EUT (**GMRS Mobile Radio**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

NO.	TEST MODE DESCRIPTION	CHANNEL SEPARATION
1	GMRS TX CHANNEL 4	12.5 kHz/25 kHz
。 2	GMRS TX CHANNEL 12	12.5 kHz/25 kHz
3	GMRS TX CHANNEL 20	12.5 kHz/25 kHz

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. The battery is full-charged during the test.
- 3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 4. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Factorization Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 16 of 49

6.FREQUENCY STABILITY

6.1 PROVISIONS APPLICABLE

Standard Applicable [Part 95.1765] The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

GMRS: The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm

The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm

6.2 MEASUREMENT PROCEDURE


6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz. Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- 1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15° C to 25° C. Otherwise, an environment chamber set for a temperature of 20° C shall be used. The EUT shall be powered by DC 13.8V.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 MEASUREMENT SETUP

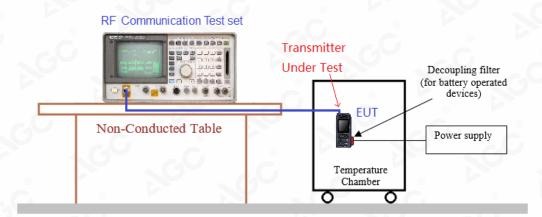

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGC, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Report No.: AGC01284210304FE10 Page 17 of 49

6.4 MEASUREMENT RESULTS

	12.5 kHz Ch	annel Separation, F	M modulation, Assig	ned Frequency Fo	r GMRS	
Test	conditions	F	requency error (ppn	n)		
Voltage	Temp	Т	est Frequency (MHz	z)	Limit (ppm)	Result
(V)	(℃)	462.6375	462.6500	467.6500	(PP)	
	-30	0.436	0.653	0.523	.00	-6
	-20	1.091	0.929	0.938		
	-10	1.033	0.648	0.737	@	
	0	0.663	1.088	0.625	60	(6)
13.80	10	0.961	0.933	0.899		
	20	0.599	0.983	0.718	2.5	Pass
	30	0.501	1.100	0.961		8
	40	0.682	0.555	0.653		
	50	0.808	1.063	1.100		
15.87	20	0.436	0.653	0.523	8	(3)
11.73	20	1.091	0.929	0.938	10°	a.C

	25 kHz Cha	nnel Separation, FN	M modulation, Assigr	ned Frequency For	GMRS	
Test c	onditions	F				
Voltage	Temp	7	Test Frequency (MHz	z)	Limit (ppm)	Result
(V)	(℃)	462.6375	462.6500	467.6500	(PPIII)	
10	-30	0.486	0.443	0.606	C	8
	-20	0.922	0.632	0.614	7	Pass
	-10	0.919	0.783	0.811		
C	0	0.509	0.418	0.867	8	
13.80	10	0.587	0.663	0.737	7 c.C	
8	20	0.412	0.451	0.928	5	
	30	0.506	0.836	0.668	(8)	
	40	0.845	0.477	0.613	A.C	(8)
8	50	0.391	0.874	0.344		GO.
15.87	20	0.486	0.443	0.606	· ·	
11.73	20	0.922	0.632	0.614	G	8

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com. /Inspection he test results



Page 18 of 49

7. EMISSION BANDWIDTH

7.1 PROVISIONS APPLICABLE

FCC Part 95.1773: GMRS: Main channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.

Interstitial channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels.

Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

7.2 MEASUREMENT PROCEDURE

1.The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.

Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).


2. Spectrum set as follow:

Centre frequency = fundamental frequency, span=50kHz for 12.5kHz channel spacing, RBW=300Hz, VBW=1KHz, Sweep = auto,

Detector function = peak, Trace = max hold

- 3.Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 4. Measure and record the results in the test report.

7.3 MEASUREMENT SETUP

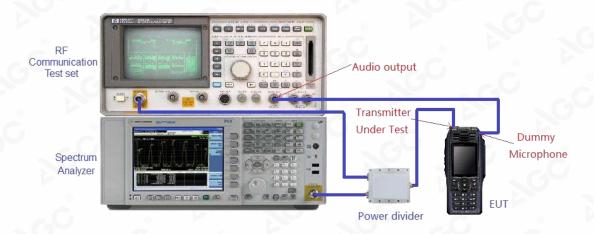



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.







RADIATED BELOW1GHZ

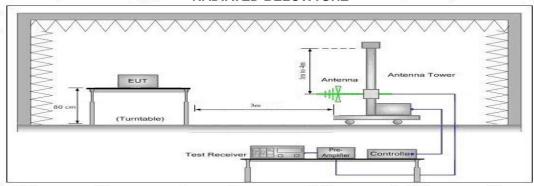

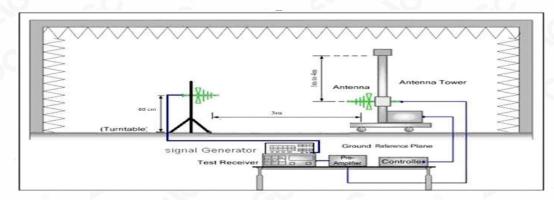

RADIATED ABOVE 1 GHZ

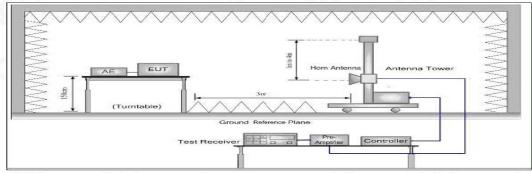

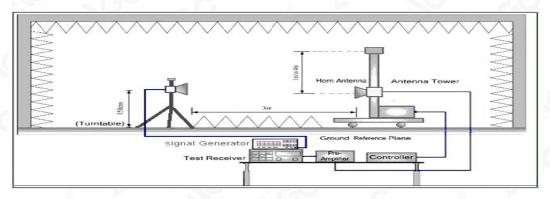

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 20 of 49

7.4 MEASUREMENT RESULTS


Emission Bandwidth Measurement Result-GMRS									
Operating Frequency		12.5 kHz Channel Separation							
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result					
462.6375 MHz	9.647 kHz	10.52 kHz	20.0 kHz	Pass					
462.6500 MHz	9.587 kHz	10.51 kHz	20.0 kHz	Pass					
467.6500 MHz	9.618 kHz	10.51 kHz	20.0 kHz	Pass					

Test plot as follows:

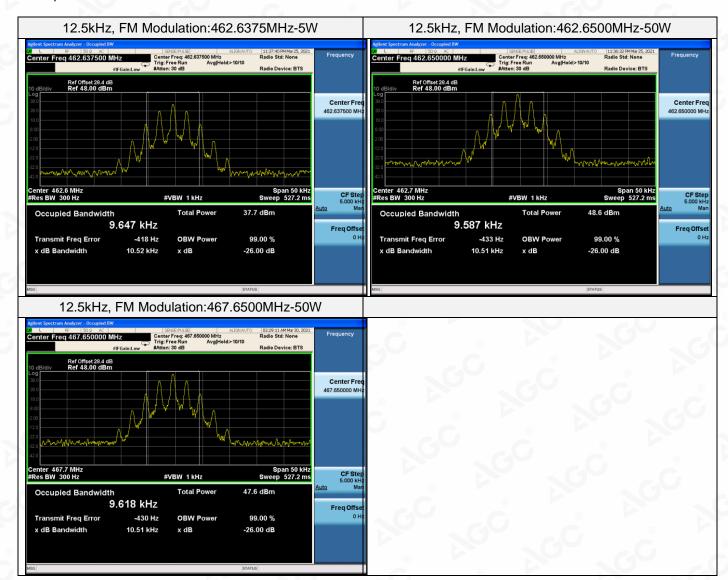


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the g/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15d the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





Emission Bandwidth Measurement Result-GMRS										
Operating Frequency		25 kHz Channel Separ	ation							
Operating Frequency	Occupied Bandwidth	Emission Bandwidth	Limits	Result						
462.6375 MHz	14.591 kHz	15.69 kHz	20.0 kHz	Pass						
462.6500 MHz	14.534 kHz	15.71 kHz	20.0 kHz	Pass						
467.6500 MHz	14.511 kHz	15.69 kHz	20.0 kHz	Pass						

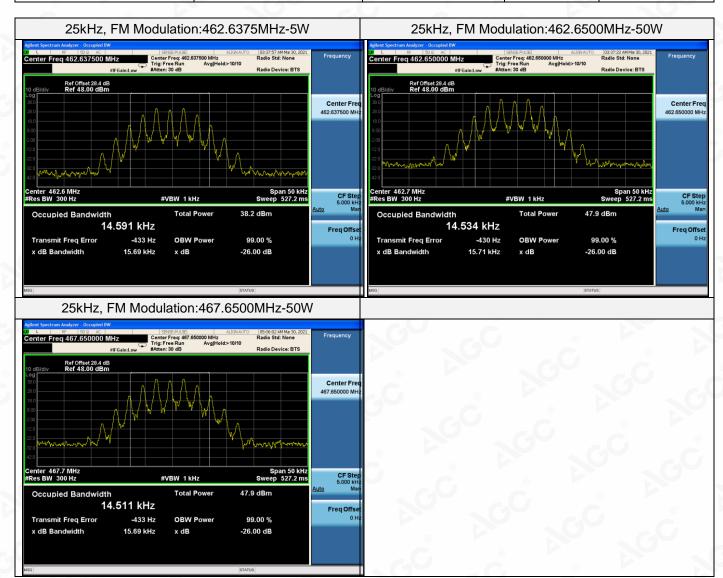

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the sedicated restroy/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 22 of 49

8. SPURIOUS RATIATED EMISSION

8.1 PROVISIONS APPLICABLE

Standard Applicable [FCC Part 95.1779] According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least 43+10 log (Transmit Power) dB

8.2 MEASUREMENT PROCEDURE

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.

a) Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

Emission types filter	Attenuation requirements
A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter	(1), (2), (7)
A1D, A3E, F1D, G1D, F3E, G3E without audio filter	(3), (4), (7)
H1D, J1D, R1D, H3E, J3E, R2E	(5), (6), (7)

- 1) Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).
- Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.
- b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:
- 1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 3) 83 log (fd ÷ 5) dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz up to and including 10 kHz.
- 4) 116 log (fd ÷ 6.1) dB or 50 + 10 log (P) dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.
- 5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.
- 6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.
- 43 + 10 log (P) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 23 of 49

DETAILED OVERVIEW OF THE TEST METHOD IS AS FOLLOWS:


- 1) EUT was placed on a 0.8 or 1.5meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- 2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test
- 6) The measurement results are obtained as described below: Power(EIRP)=PMea- PAg Pcl Ga The measurement results are amend as described below:Power(EIRP)=PMea- Pcl Ga
- 7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8) ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.
- 9) Test the EUT in the lowest channel, the middle channel the Highest channel


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.




8.3 MEASUREMENT SETUP


RADIATED BELOW1GHZ

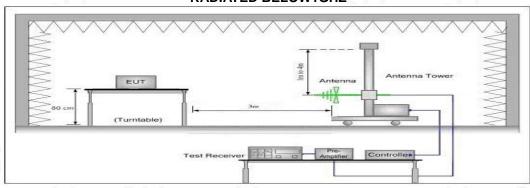

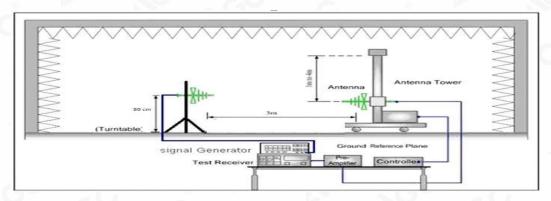

RADIATED ABOVE 1 GHZ

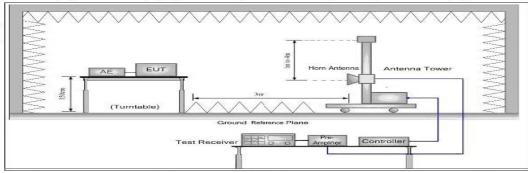

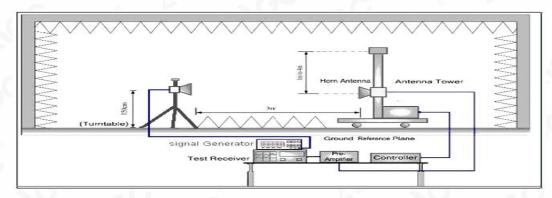

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 25 of 49

8.4 MEASUREMENT RESULTS


Preliminary calculation	Final Result
At least 43+10 log (P) =43+10log (50) =59.99(dB)	Limit=P- Preliminary calculation=46.99-56.99=-13 dBm
At least 43+10 log (P) =43+10log (5) =49.99 (dB)	Limit=P- Preliminary calculation=36.99-49.99=-13 dBm

- 1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
- 2. Factor=Antenna Factor+ Cable loss -Pre-amplifier. (Above 1 GHz)
- 3. Margin=Limit- Level
- 4. Only reflect the 25KHz channel spacing as the worst data.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





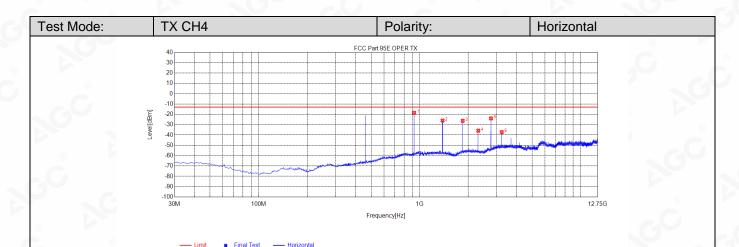




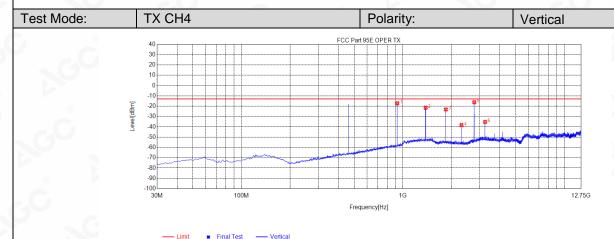


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.3100	-60.73	-17.16	-13.00	4.16	43.57	125	Vertical
2	1387.7888	-22.91	-21.50	-13.00	8.50	1.41	41	Vertical
3	1850.7851	-24.06	-23.13	-13.00	10.13	0.93	267	Vertical
4	2313.7814	-37.77	-38.30	-13.00	25.30	-0.53	0	Vertical
5	2775.6026	-17.47	-16.19	-13.00	3.19	1.28	5	Vertical
6	3238.5989	-38.40	-35.26	-13.00	22.26	3.14	5	Vertical

Any leport having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Teather Institute authorization of AGE" the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.






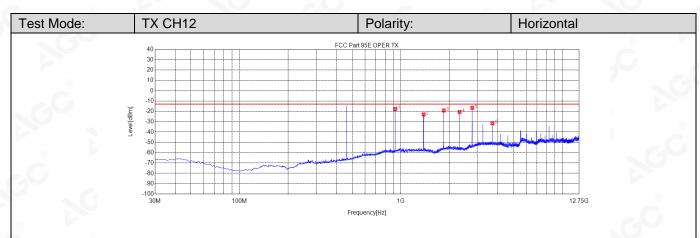

--- Limit # Final Test --- Horizontal


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	926.2800	-61.19	-17.68	-13.00	4.68	43.51	204	Horizontal
2	1387.7888	-19.56	-23.01	-13.00	10.01	-3.45	46	Horizontal
3	1850.7851	-18.57	-19.16	-13.00	6.16	-0.59	55	Horizontal
4	2313.7814	-19.87	-20.58	-13.00	7.58	-0.71	296	Horizontal
5	2775.6026	-17.70	-16.53	-13.00	3.53	1.17	315	Horizontal
6	3701.5952	-35.87	-31.46	-13.00	18.46	4.41	325	Horizontal

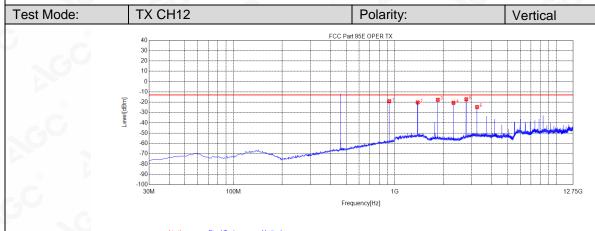


— Limit # Final Test — Vertical

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.3100	-62.61	-19.04	-13.00	6.04	43.57	220	Vertical
2	1387.7888	-21.66	-20.25	-13.00	7.25	1.41	80	Vertical
3	1850.7851	-18.57	-17.64	-13.00	4.64	0.93	145	Vertical
4	2312.6063	-20.06	-20.59	-13.00	7.59	-0.53	0	Vertical
5	2775.6026	-18.46	-17.18	-13.00	4.18	1.28	341	Vertical
6	3238.5989	-27.83	-24.69	-13.00	11.69	3.14	154	Vertical


Any leport having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stedicated Restriction of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.





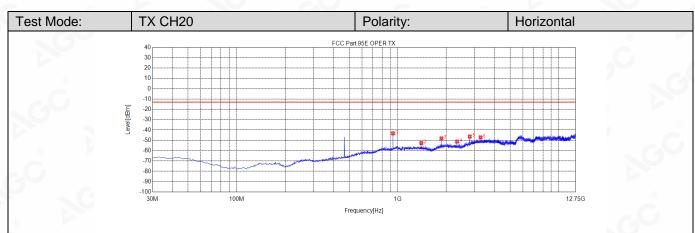

N	Ю.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
	1	935.9800	-86.95	-43.23	-13.00	30.23	43.72	187	Horizontal
	2	1403.0653	-49.23	-52.64	-13.00	39.64	-3.41	75	Horizontal
	3	1870.7621	-47.72	-48.16	-13.00	35.16	-0.44	19	Horizontal
	4	2338.4588	-50.35	-51.15	-13.00	38.15	-0.80	243	Horizontal
	5	2806.1556	-47.80	-46.34	-13.00	33.34	1.46	9	Horizontal
	6	3273.8524	-50.91	-47.13	-13.00	34.13	3.78	131	Horizontal

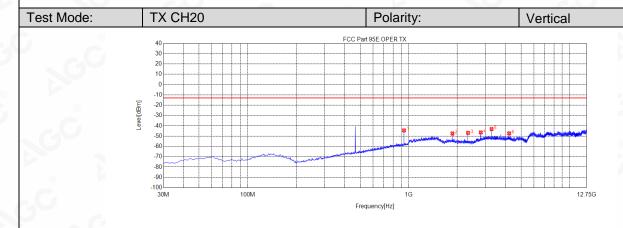

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	935.9800	-88.18	-44.50	-13.00	31.50	43.68	127	Vertical
2	1870.7621	-48.32	-47.46	-13.00	34.46	0.86	6	Vertical
3	2338.4588	-46.25	-46.86	-13.00	33.86	-0.61	174	Vertical
4	2806.1556	-47.93	-46.39	-13.00	33.39	1.54	351	Vertical
5	3273.8524	-46.30	-43.17	-13.00	30.17	3.13	342	Vertical
6	3440.7191	-30.51	-26.44	-13.00	13.44	4.07	351	Vertical

Any leport having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Stedicated Restriction of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 29 of 49

8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

- -Connect the equipment as illustrated.
- -Spectrum set as follow:
- Centre frequency = fundamental frequency, Span=150kHz for 12.5kHz and 25kHz channel spacing, RBW=300Hz, VBW=1KHz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
- Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).
 The input level shall be established at the frequency of maximum response of the audio modulating circuit.
- 4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
- 5. Measure and record the results in the test report.



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.