

13.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power from PC which received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


9.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.



9.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

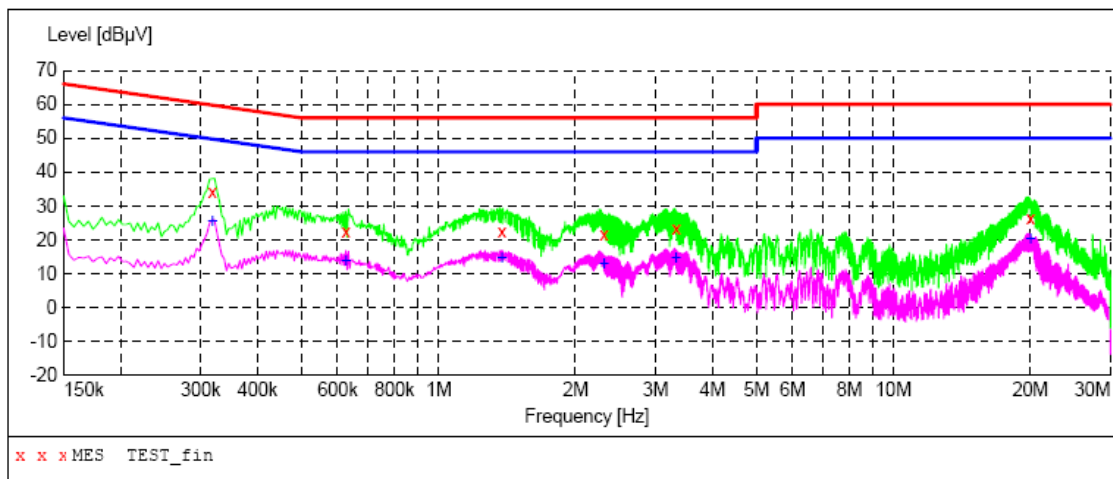

MEASUREMENT RESULT: "TEST_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.318000	33.90	10.2	60	25.9	QP	L1	FLO
0.626000	22.40	10.3	56	33.6	QP	L1	FLO
1.378000	22.40	10.4	56	33.6	QP	L1	FLO
2.310000	21.70	10.4	56	34.3	QP	L1	FLO
3.330000	23.10	10.4	56	32.9	QP	L1	FLO
20.018000	26.30	11.0	60	33.7	QP	L1	FLO

MEASUREMENT RESULT: "TEST_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.318000	25.50	10.2	50	24.3	AV	L1	FLO
0.626000	13.80	10.3	46	32.2	AV	L1	FLO
1.378000	14.60	10.4	46	31.4	AV	L1	FLO
2.310000	13.00	10.4	46	33.0	AV	L1	FLO
3.330000	14.40	10.4	46	31.6	AV	L1	FLO
20.018000	20.30	11.0	50	29.7	AV	L1	FLO



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Line Conducted Emission Test Line 2-N

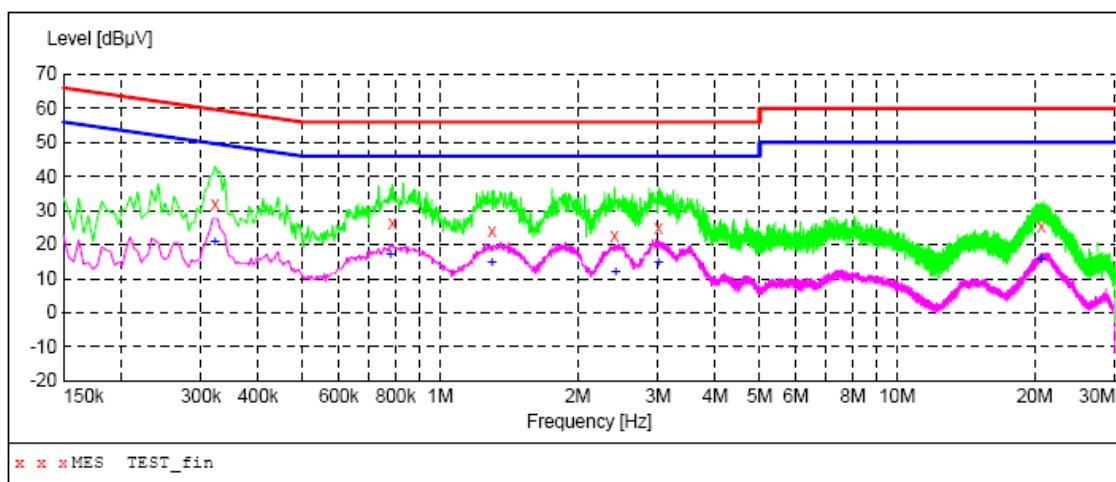

MEASUREMENT RESULT: "TEST_fin"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.322000	32.00	10.2	60	27.7	QP	N	FLO
0.786000	26.50	10.3	56	29.5	QP	N	FLO
1.298000	24.10	10.4	56	31.9	QP	N	FLO
2.406000	22.50	10.4	56	33.5	QP	N	FLO
3.002000	24.70	10.4	56	31.3	QP	N	FLO
20.674000	25.30	11.0	60	34.7	QP	N	FLO

MEASUREMENT RESULT: "TEST_fin2"

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.322000	20.60	10.2	50	29.1	AV	N	FLO
0.778000	16.90	10.3	46	29.1	AV	N	FLO
1.298000	14.50	10.4	46	31.5	AV	N	FLO
2.422000	12.00	10.4	46	34.0	AV	N	FLO
3.002000	14.60	10.4	46	31.4	AV	N	FLO
20.650000	15.40	11.0	50	34.6	AV	N	FLO

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.



Attestation of Global Compliance (Shenzhen) Co., Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP BELOW 1GHZ

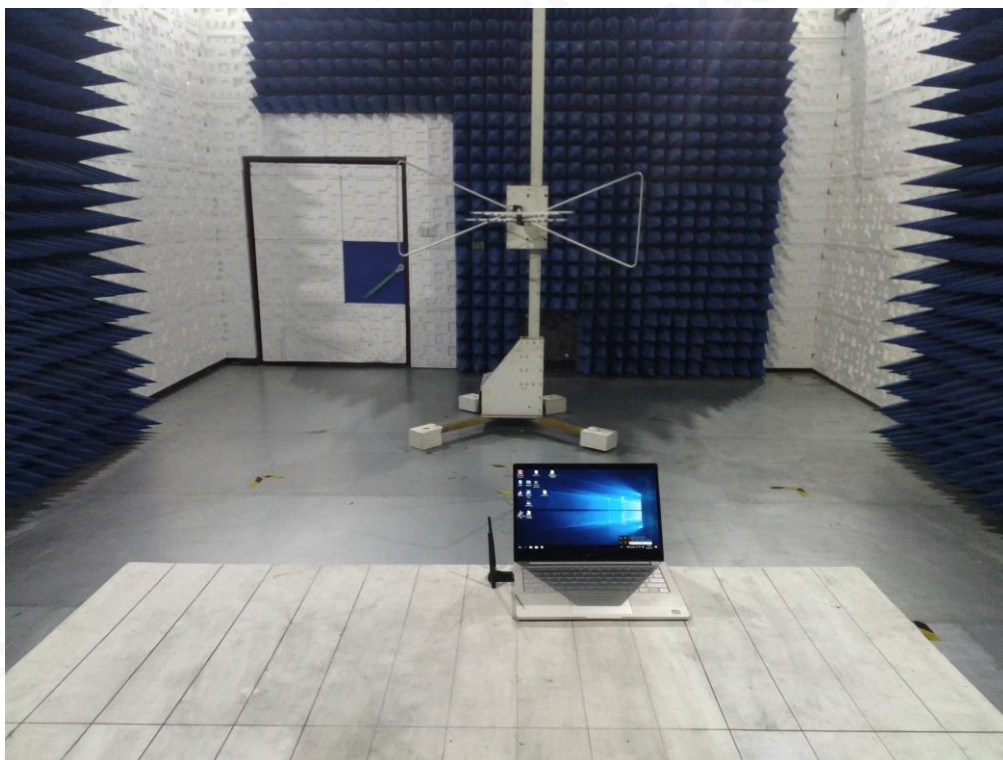

FCC RADIATED EMISSION TEST SETUP ABOVE 1GHZ



APPENDIX B: PHOTOGRAPHS OF EUT

TEST MODE -XHT-6B16

ALL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT




FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT

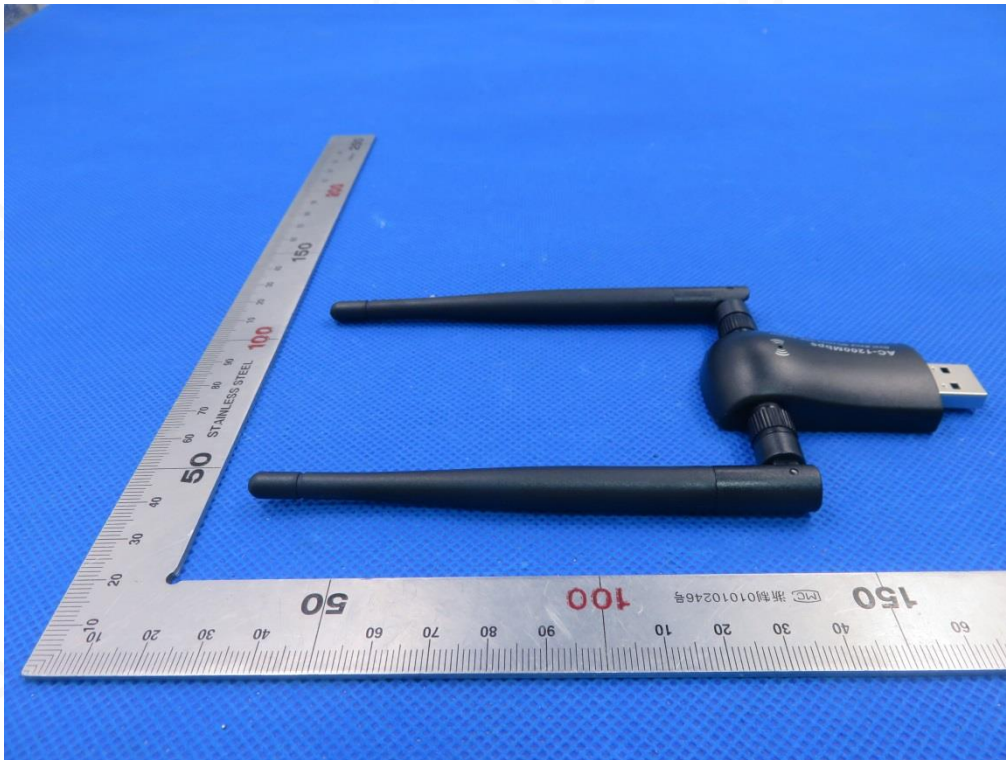


RIGHT VIEW OF EUT




OPEN VIEW OF EUT 1

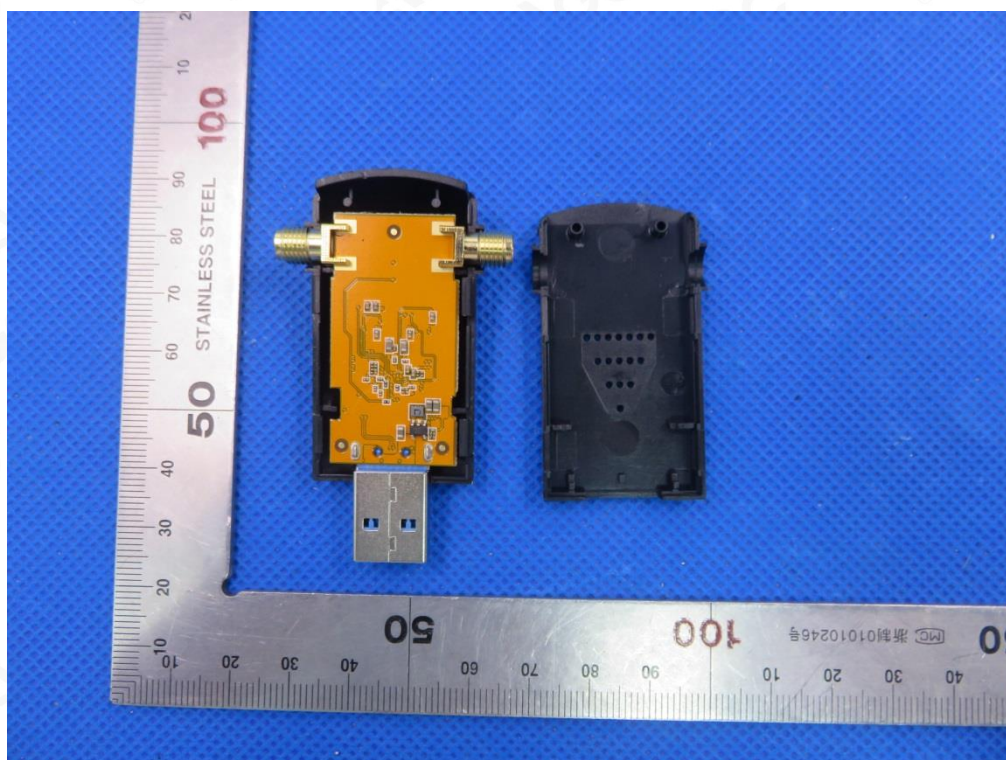


OPEN VIEW OF EUT 2

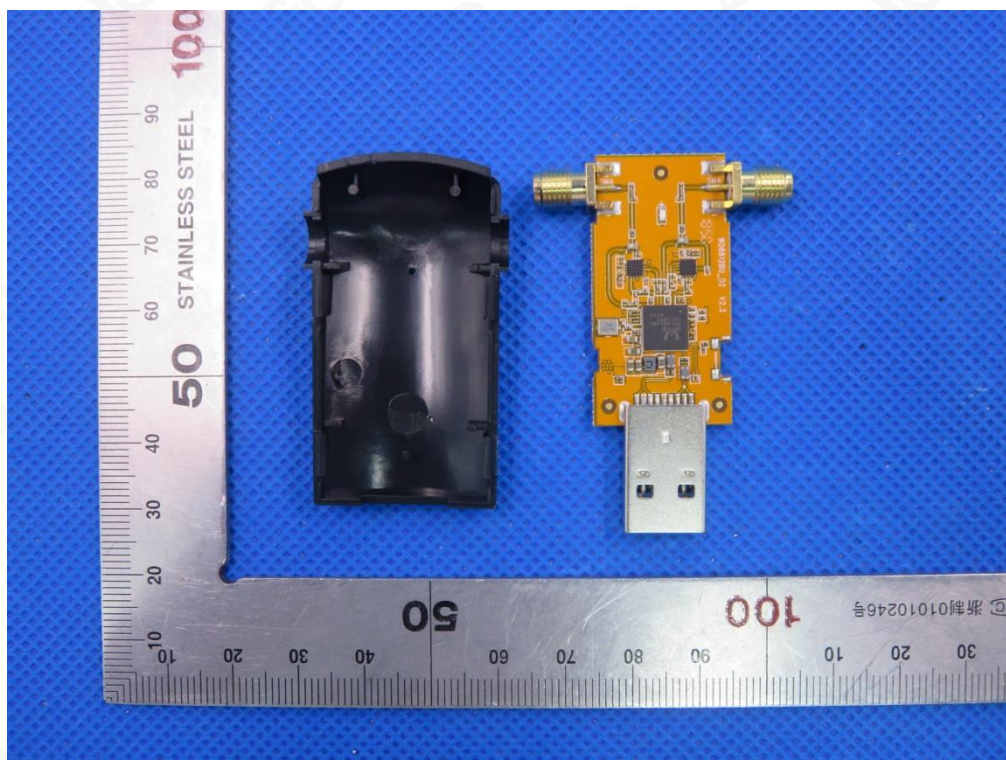

INTERNAL VIEW OF EUT-1

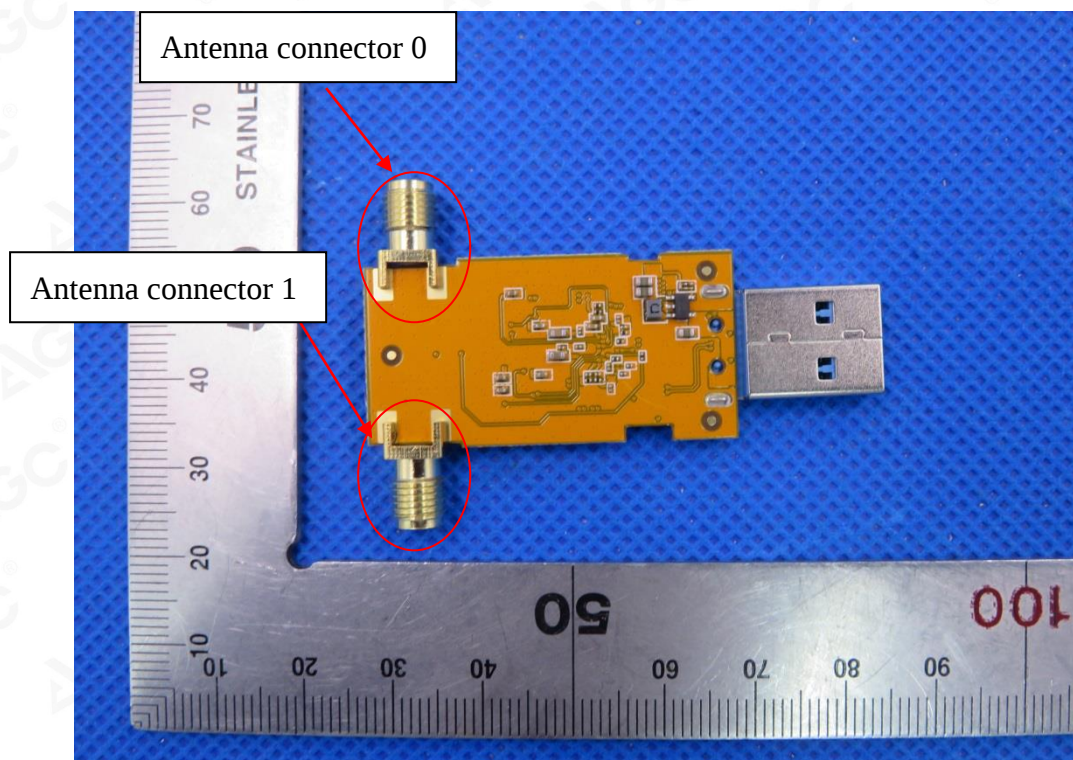

INTERNAL VIEW OF EUT-2

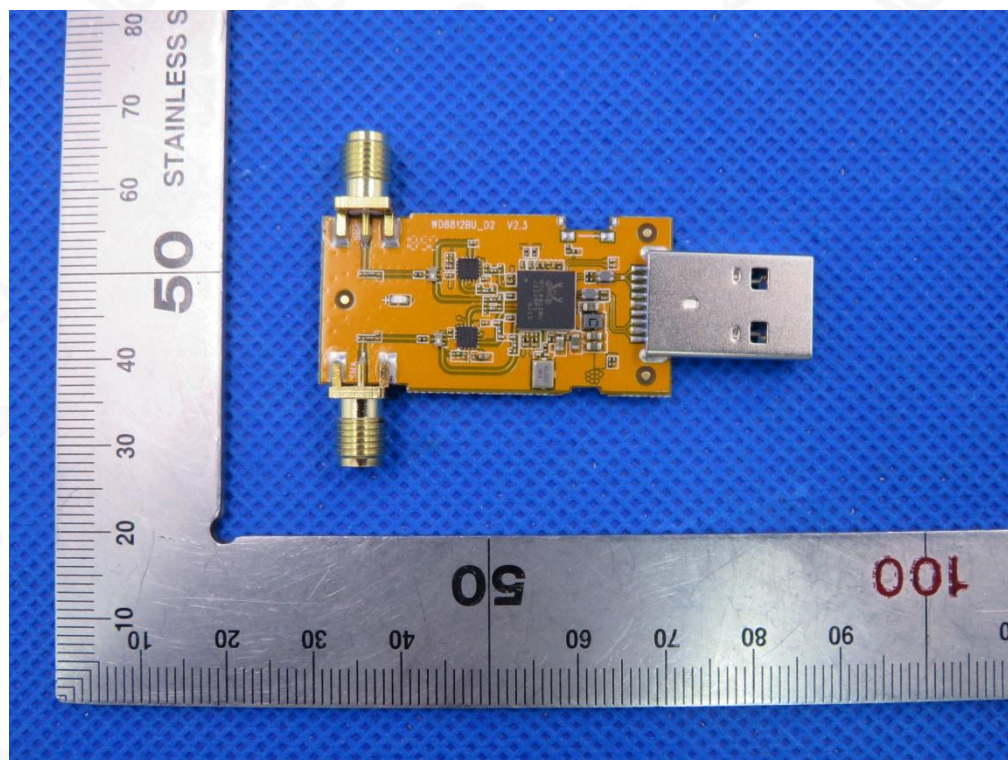

VIEW OF PORT -1



VIEW OF PORT -2




Series Model- XHT-6B18

ALL VIEW OF EUT



TOP VIEW OF EUT

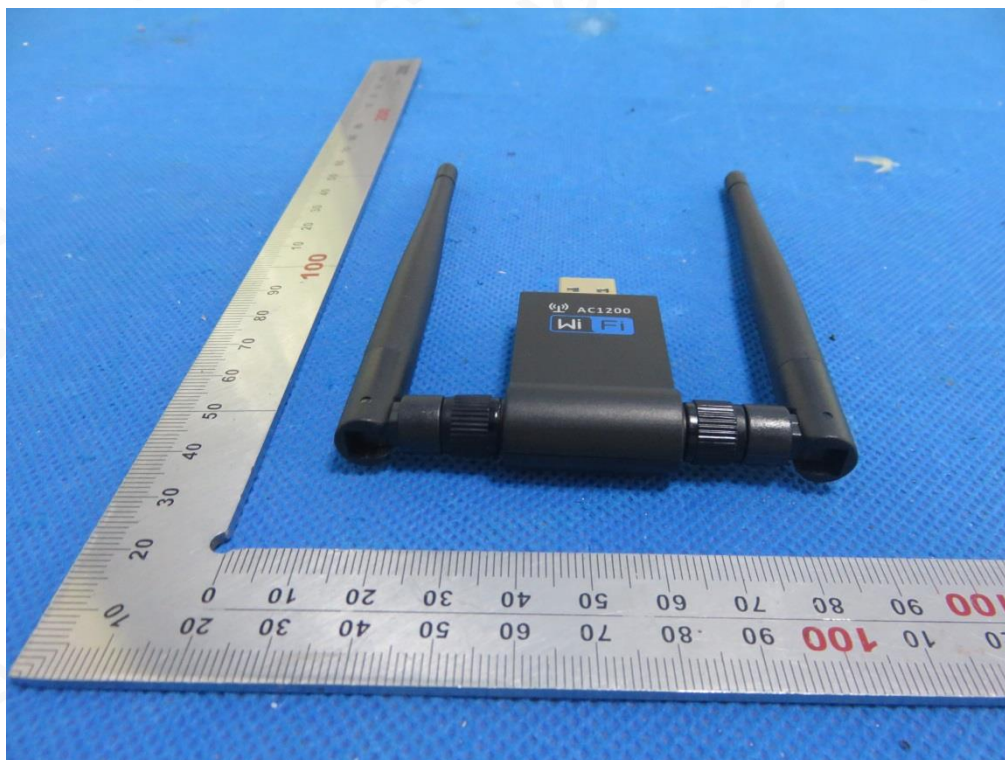

BOTTOM VIEW OF EUT




FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT

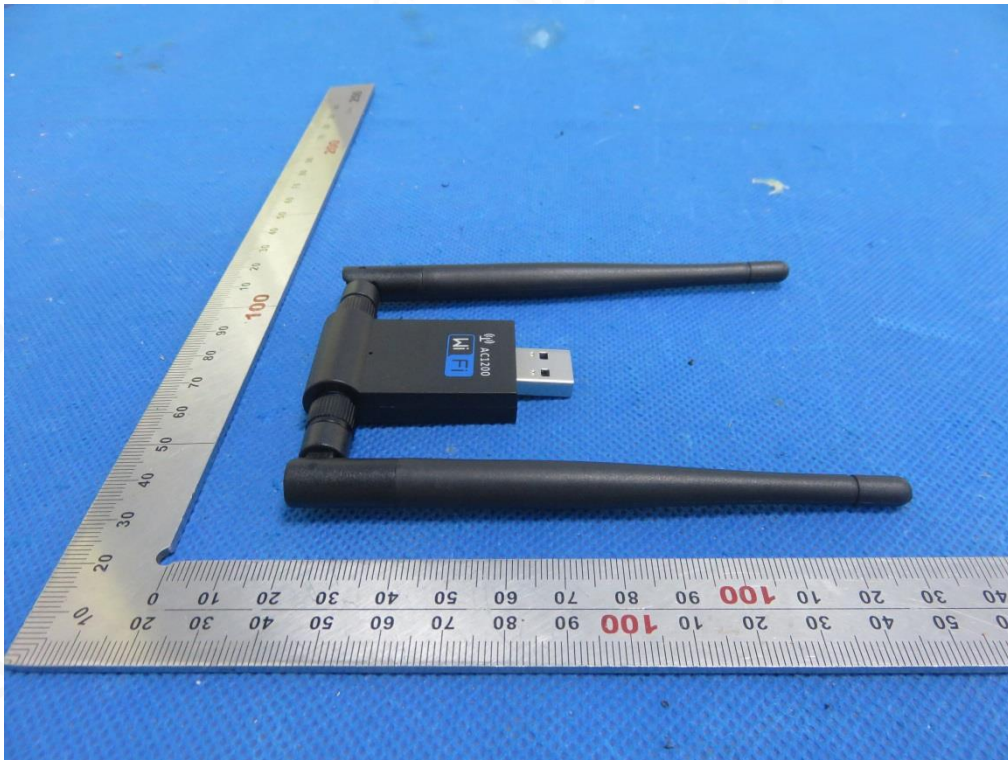


RIGHT VIEW OF EUT




OPEN VIEW OF EUT 1

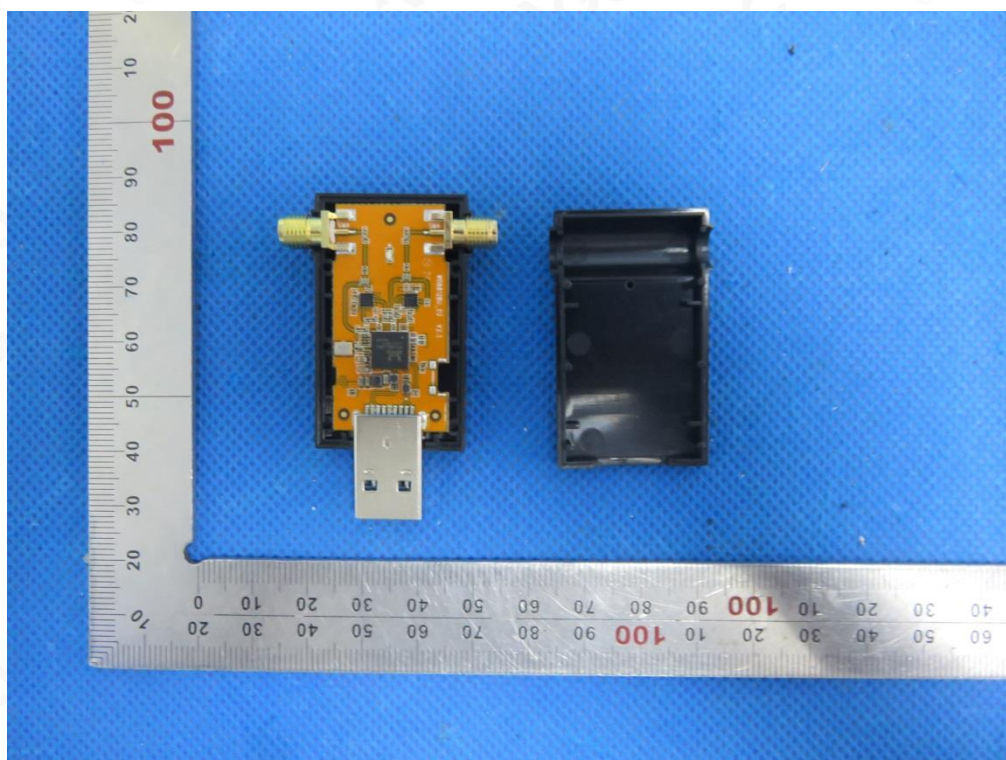

INTERNAL VIEW OF EUT-1

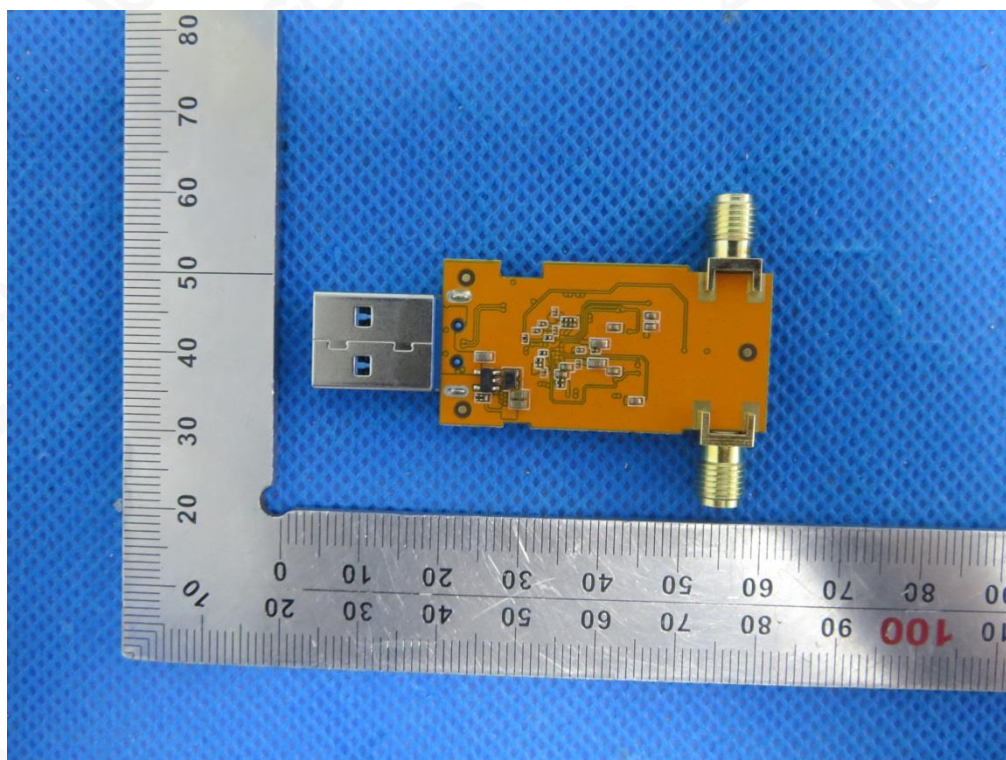

INTERNAL VIEW OF EUT-2

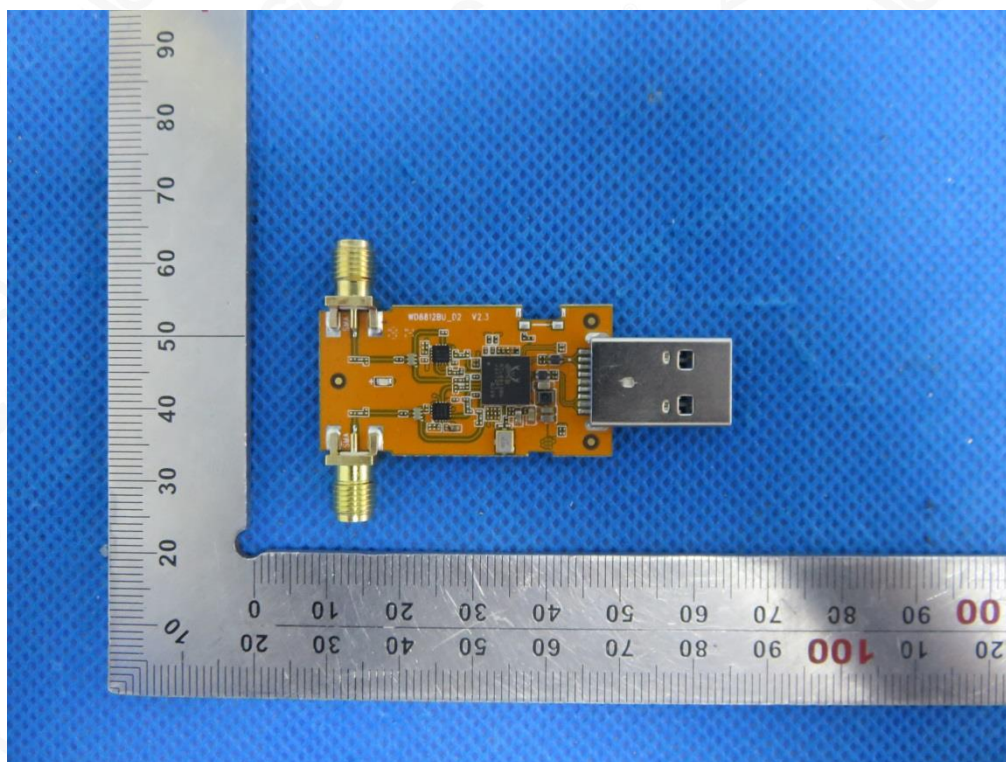

VIEW OF PORT-1



VIEW OF PORT-2



----END OF REPORT---