

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telefon: +49 (0)681 598-9100

Telefax: -9075

RSC11

issue test report consist of 64 Pages

Page 1 (64)



TTI-P-G-166/98-30

Accredited Bluetooth Test Facility (BQTF)

Test report no.: 3_3131-01-02/02

FCC Part 24

TRA RT30F-PCS

FCC-ID: M9H95310001

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 9075

Table of Contents

1 General information

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards

2 Technical test

- 2.1 Summary of test results
- 2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom.de

Accredited testing laboratory

DAR-registration number : TTI-P-G-166/98-30

Accredited Bluetooth™ Test Facility (BQTF)

BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 3 (64)

1.3 Details of applicant

Name : SAGEM SA
Street : 2-4 rue de Petit Albi
City : F-95800 Cergy Saint Christophe
Country : France
Telephone : +33 130 73 7277
Telefax : +33 130 73 7112
Contact : Mr. Alain Zambujo
Telephone : +33 130 73 7277

1.4 Application details

Date of receipt of application : 09.01.2002
Date of receipt of test item : 26.02.2002
Date of test : 26.-28.02.2002

1.5 Test item

Type of equipment : **Wireless local loop terminal (PCS 1900)**
Type designation : **TRA RT30F-PCS**
Manufacturer : Applicant
Street :
City :
Country :
Serial number : 0000000002
Additional information :
Frequency : 1850 – 1910 MHz
Type of modulation : 300KF2D
Number of channels : 300
Antenna : Integral antenna and socket
Power supply : AC/DC Adapter 115V (100-240V) AC / 9.5V+5.0V DC
Output power : 30.28 dBm Peak / ERP :27.3 dBm(Burst); EIRP: 29.4 dBm(Burst)
Type of equipment : Temperature range : -30°C - +60°C
FCC – ID : M9H95310001
Hardware : 1.26
Software : AI 3-3 L

1.6 Test standards: FCC Part 24

2 Technical test

The radiated measurements were performed vertical and horizontal over the whole frequency range. We start at 1 m high with vertical receiving antenna and rotate the dish continuously. During rotation we use the antenna lift system to vary the high from 1 to 4 m. So we find maximum radiation output. At this points we do manual re-measurements. After this we do the same measurements in horizontal position of the receiving antenna. This (horizontal and vertical) is made for all the three planes of the test sample. We use the maximum received results.

The detector function and selection of bandwidth are according ANSI C63.2-1996 item 8.2.1 and ANSI C63.4-1992 Item 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, bi-conical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

Technical responsibility for area of testing :

2002-04-23 RSC 8411 Berg M.

Date	Section	Name	Signature
------	---------	------	-----------

Technical responsibility for area of testing :

2002-04-23 RSC8412 Hausknecht D.

Date	Section	Name	Signature
------	---------	------	-----------

2.2 Testreport

TEST REPORT

Test report no. : 3_3131-01-02/02

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 6 (64)

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

PARAMETER TO BE MEASURED Paragraph	PAGE
POWER OUTPUT	SUBCLAUSE § 24.232 7
FREQUENCY STABILITY	SUBCLAUSE § 24.235 9
AFC FREQ ERROR vs. VOLTAGE	10
AFC FREQ ERROR vs. TEMPERATURE	10
EMISSIONS LIMITS	§24.238 12
CONDUCTED SPURIOUS EMISSIONS	37
OCCUPIED BANDWIDTH	§2.989 46
Conducted emissions	§ 15.107/207 53
TEST SITE	57
PHOTOGRAPHS OF THE EQUIPMENT	61

POWER OUTPUT

SUBCLAUSE § 24.232

Summery:

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Spectrum Analyzer FSIQ 26 (peak and average)

This measurements were done at 3 frequencies, 1850,2 MHz, 1880,0 MHz and 1909,8 MHz (bottom, middle and top of operational frequency range)

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Power Measurements:

Conducted:

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0	30.28	30.08
1880.0	0	30.17	29.97
1909.8	0	30.01	29.81
Measurement uncertainty		±0.5 dB	

EIRP Measurements

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as $Pin + 2.1 - Pr$.
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.1\text{dBi}$.

Limits:

Power Step	Burst Average EIRP (dBm)
0	<33

Power Measurements:

Radiated:

Frequency (MHz)	Power Step	BURST AVERAGE (dBm)		MODULATION AVERAGE (dBm)	
		EIRP	ERP	EIRP	ERP
1850.2	0	29.4	27.3	20.4	18.3
1880.0	0	29.3	27.2	20.3	18.2
1909.8	0	29.2	27.1	20.2	18.1
Measurement uncertainty		±3 dB			

FREQUENCY STABILITY

SUBCLAUSE § 24.235

Method of Measurement:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMD 65 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 115 Volts, connected to the CMD 65 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal 115 Volts. Vary supply voltage from minimum 97.75 Volts to maximum 132.25 Volts, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at 115V
Volts for 1 1/2 hours unpowered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 115 Volts, connected to the CMD 65 and in a simulated call on channel 661 (center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

Measurement Limit:

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment...", Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4 Vdc and 4.0 Vdc, with a nominal voltage of 3.6 Vdc (Li-Polymer accu). Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of + 22.2 % and – 5.4 %. For the purposes of measuring frequency stability these voltage limits are to be used.



AFC FREQ ERROR vs. VOLTAGE

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
97,75	-7	-0,0037	-0,00000037
100,05	-6	-0,0032	-0,00000032
103,50	-6	-0,0032	-0,00000032
105,80	-6	-0,0032	-0,00000032
109,25	-7	-0,0037	-0,00000037
111,55	-6	-0,0032	-0,00000032
115,00	-6	-0,0032	-0,00000032
117,30	-7	-0,0037	-0,00000037
120,75	-6	-0,0032	-0,00000032
123,05	-9	-0,0048	-0,00000048
126,50	-7	-0,0037	-0,00000037
128,80	-6	-0,0032	-0,00000032
132,25	-6	-0,0032	-0,00000032

AFC FREQ ERROR vs. TEMPERATURE

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Frequency Error (%)
-30	10	0,0053	0,00000053
-20	-8	-0,0043	-0,00000043
-10	-7	-0,0037	-0,00000037
±0.0	-9	-0,0048	-0,00000048
+10	-8	-0,0043	-0,00000043
+20	-11	-0,0059	-0,00000059
+30	-9	-0,0048	-0,00000048
+40	9	0,0048	0,00000048
+50	-10	-0,0053	-0,00000053
+60	-9	-0,0048	-0,00000048

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

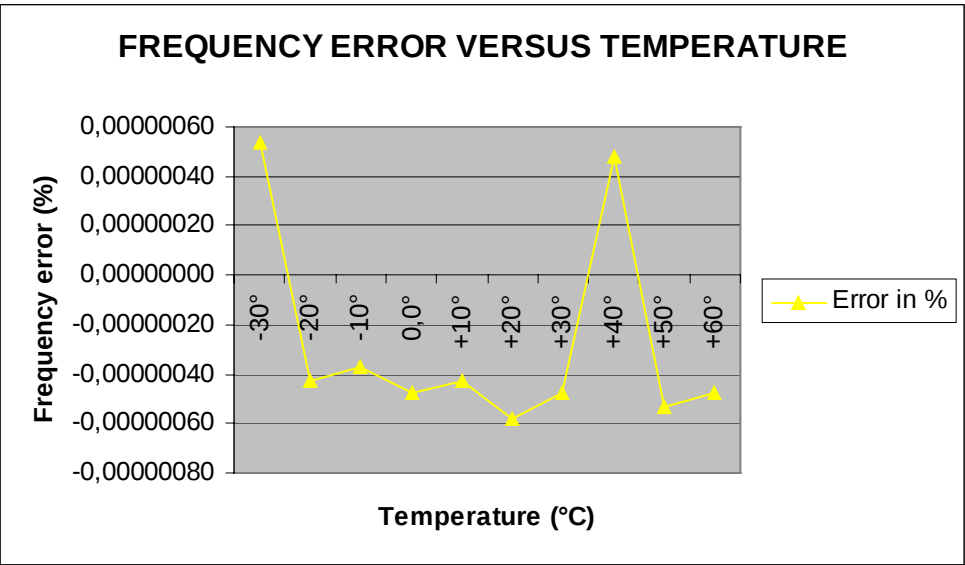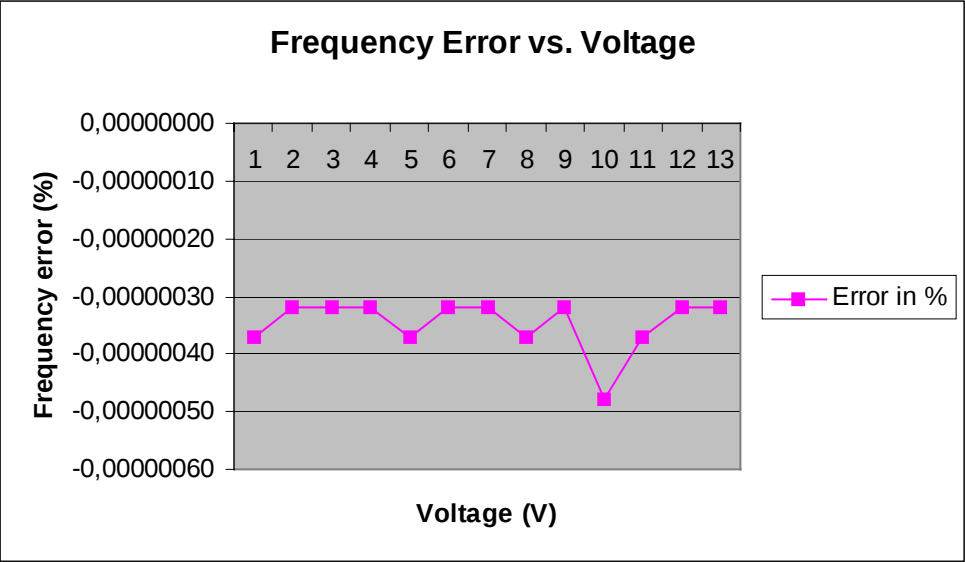

EMISSIONS LIMITS

§24.238

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:

$$P_g = E^2 4\pi d^2 / 120\pi = E^2 d^2 / 30$$

where : P = power in watts
 g = arithmetic gain of transmitting antenna over isotropic radiator.
 E = maximum field strength in volts/meter
 d = measurement distance in meter

Using a dipole gain of 1.67 or 2.2 dB and a test distance of 3 meters, this equation reduces to:

$$P(\text{dBm}) = E(\text{dBuV/m}) - 97.2\text{dB}$$

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43 + 10\log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10\log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 13 (64)

Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:

The final open field radiated levels are presented on the next pages.

As can be seen from this data, the emissions from the test item were within the specification limit.

Channel 512

Data File : /33131_05.DOC

28 Feb 2002

No	EMISSION	SPEC	MEASUREMENTS			POL	SITE		CORR	COMMENTS
	FREQUENCY MHz	LIMIT dBuV/m	ABS	dLIM	MODE		HGT cm	AZM deg		
1	36.633	29.5	24.5	-5.0	QP	V	102	359	15.8	
2	41.440	29.5	24.2	-5.3	QP	V	106	67	13.2	
3	50.4	29.5	21.2	-8.3	PK	V	101	360	N/T	
4	55.2	29.5	22.4	-7.1	PK	V	101	360	N/T	
5	64.6	29.5	22.1	-7.4	PK	V	101	360	N/T	
6	73.9	29.5	19.4	-10.1	PK	V	101	360	N/T	
7	82.8	29.5	21.3	-8.2	PK	H	330	0	N/T	
8	91.9	33.0	21.5	-11.5	PK	H	330	0	N/T	
9	101.3	33.0	19.9	-13.1	PK	H	330	0	N/T	
10	140.6	33.0	21.7	-11.3	PK	V	101	360	N/T	
11	198.0	33.0	21.9	-11.1	PK	V	101	360	N/T	
12	213.9	33.0	29.0	-4.0	PK	H	330	0	N/T	

Channel 661

Data File : /33131_10.DOC

28 Feb 2002

No	EMISSION	SPEC	MEASUREMENTS			POL	SITE		CORR	COMMENTS
	FREQUENCY MHz	LIMIT dBuV/m	ABS	dLIM	MODE		HGT cm	AZM deg		
1	36.628	29.5	24.2	-5.3	QP	V	102	358	15.8	
2	41.435	29.5	23.6	-5.9	QP	V	104	205	13.2	
3	45.6	29.5	22.4	-7.1	PK	H	328	291	N/T	
4	50.4	29.5	21.2	-8.3	PK	V	100	360	N/T	
5	55.2	29.5	23.1	-6.4	PK	V	100	360	N/T	
6	64.1	29.5	21.9	-7.6	PK	V	100	93	N/T	
7	64.5	29.5	25.0	-4.5	PK	V	100	360	N/T	
8	73.9	29.5	19.3	-10.2	PK	V	100	38	N/T	
9	78.2	29.5	17.4	-12.1	PK	V	100	0	N/T	
10	82.8	29.5	18.4	-11.1	PK	V	100	0	N/T	
11	92.4	33.0	21.3	-11.7	PK	H	328	360	N/T	
12	101.5	33.0	22.3	-10.7	PK	H	328	360	N/T	
13	143.0	33.0	23.8	-9.2	PK	V	100	0	N/T	
14	199.6	33.0	22.0	-11.0	PK	V	100	0	N/T	
15	213.9	33.0	30.1	-2.9	PK	V	97	0	N/T	

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02

Issue date: 2002-02-27

Page 14 (64)

Channel 810

Data File : /33131_15.DOC



28 Feb 2002

No	EMISSION	SPEC LIMIT	MEASUREMENTS			POL	SITE		CORR FACTOR	COMMENTS
	FREQUENCY MHz		ABS	dLIM	MODE		HGT	AZM		
			dBuV/m	dB			cm	deg	dB	
1	36.619	29.5	21.4	-8.1	QP	V	101	357	15.8	
2	41.7	29.5	24.9	-4.6	PK	V	97	0	N/T	
3	45.6	29.5	21.8	-7.7	PK	H	330	229	N/T	
4	50.4	29.5	20.3	-9.2	PK	V	97	0	N/T	
5	55.2	29.5	20.3	-9.2	PK	V	97	0	N/T	
6	59.5	29.5	19.1	-10.4	PK	V	97	0	N/T	
7	64.3	29.5	22.1	-7.4	PK	V	97	0	N/T	
8	73.9	29.5	19.9	-9.6	PK	V	97	0	N/T	
9	82.8	29.5	19.1	-10.4	PK	V	97	0	N/T	
10	91.9	33.0	20.6	-12.4	PK	H	330	350	N/T	
11	101.1	33.0	21.5	-11.5	PK	H	330	360	N/T	
12	138.2	33.0	23.4	-9.6	PK	V	97	0	N/T	
13	179.6	33.0	23.1	-9.9	PK	V	97	0	N/T	
14	198.3	33.0	21.9	-11.1	PK	V	97	0	N/T	
15	213.9	33.0	26.7	-6.3	PK	V	97	0	N/T	



N/T in CORR FACTOR column denotes a non-traceable signal.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 512 (up to 1 GHz)

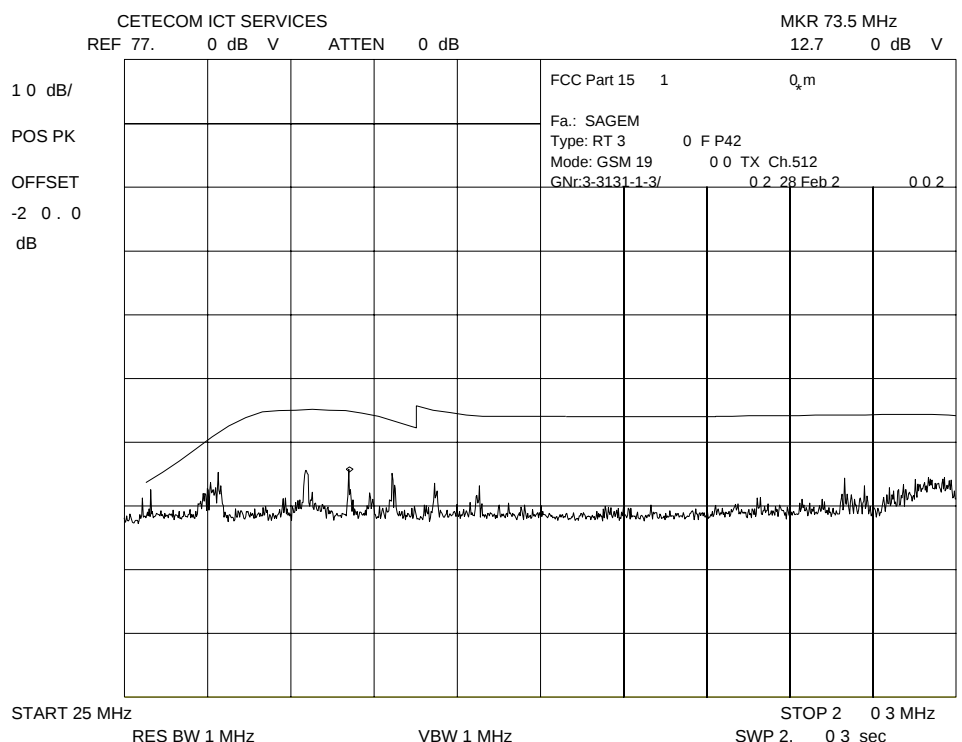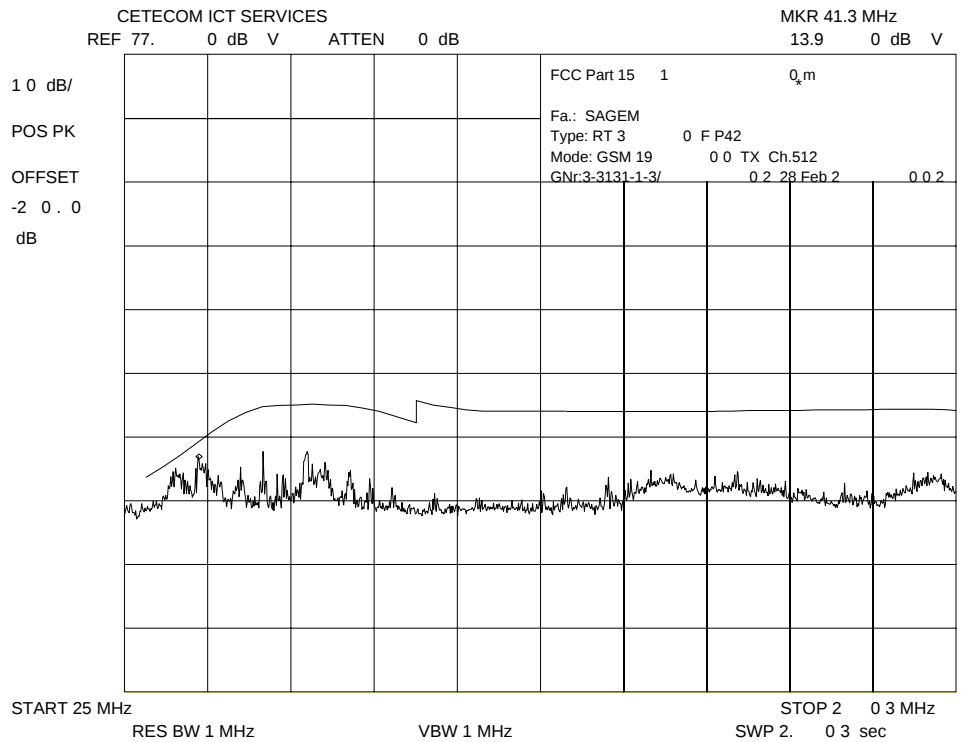


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

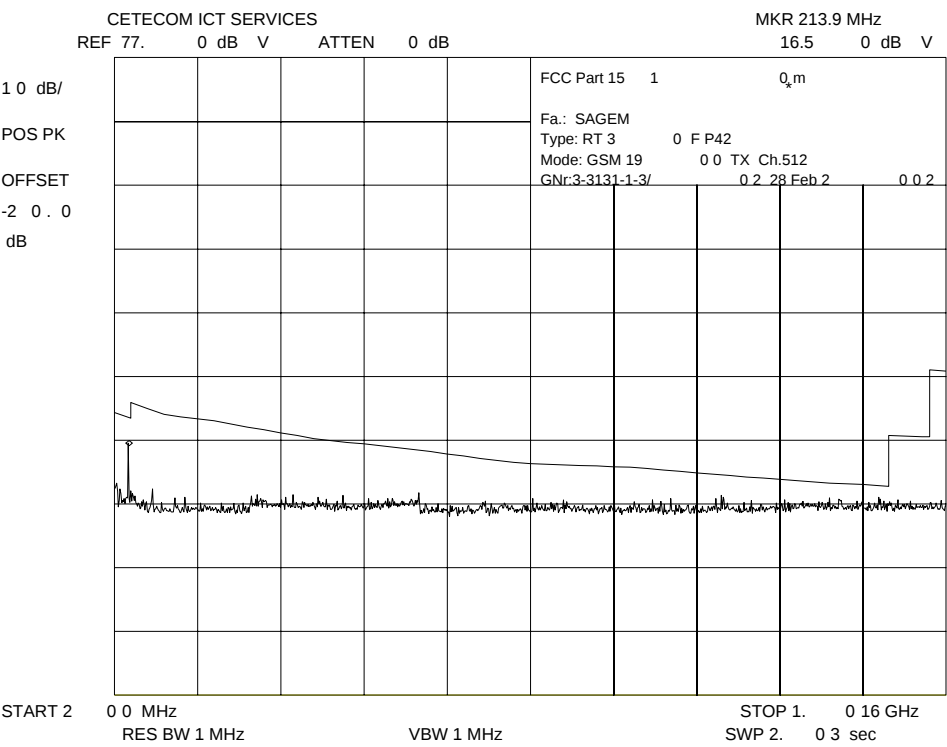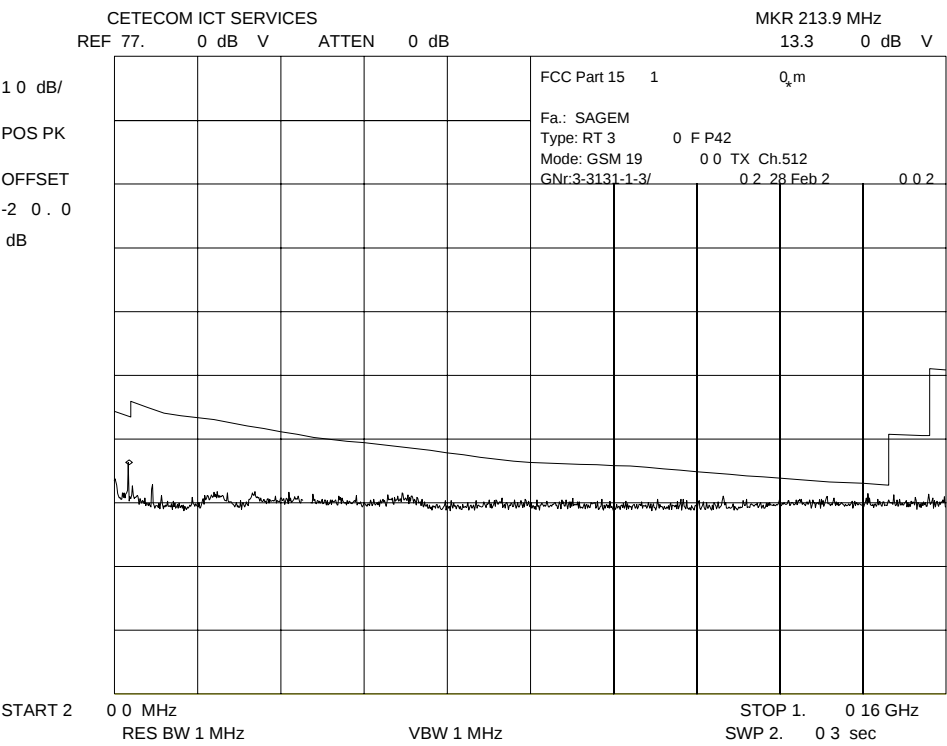

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)



Channel 512 : 1 – 12 GHz

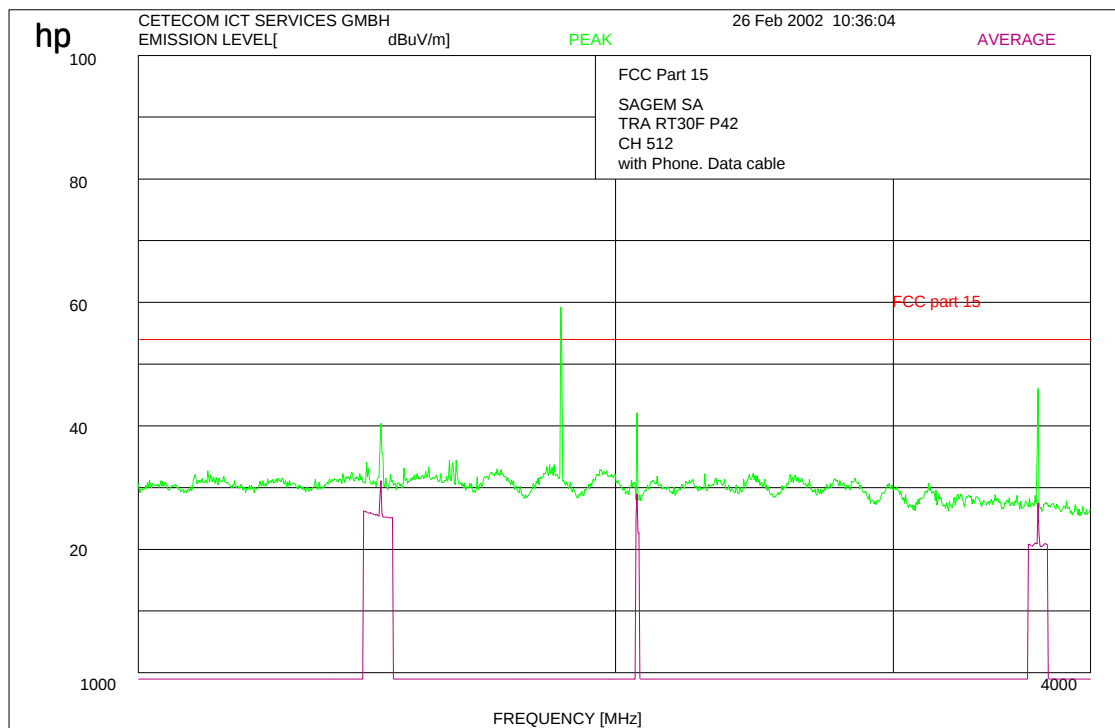

Spurious emissions			
Frequency (MHz)	Level (dBuV/m) AV	Limits (dBuV/m)	Result
1423.5	31.1	54	complies
2066.2	28.9	54	complies
3701.5	27.5	54	complies
5550.6	23.7	54	complies
7400.8	28.9	54	complies

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 18 (64)

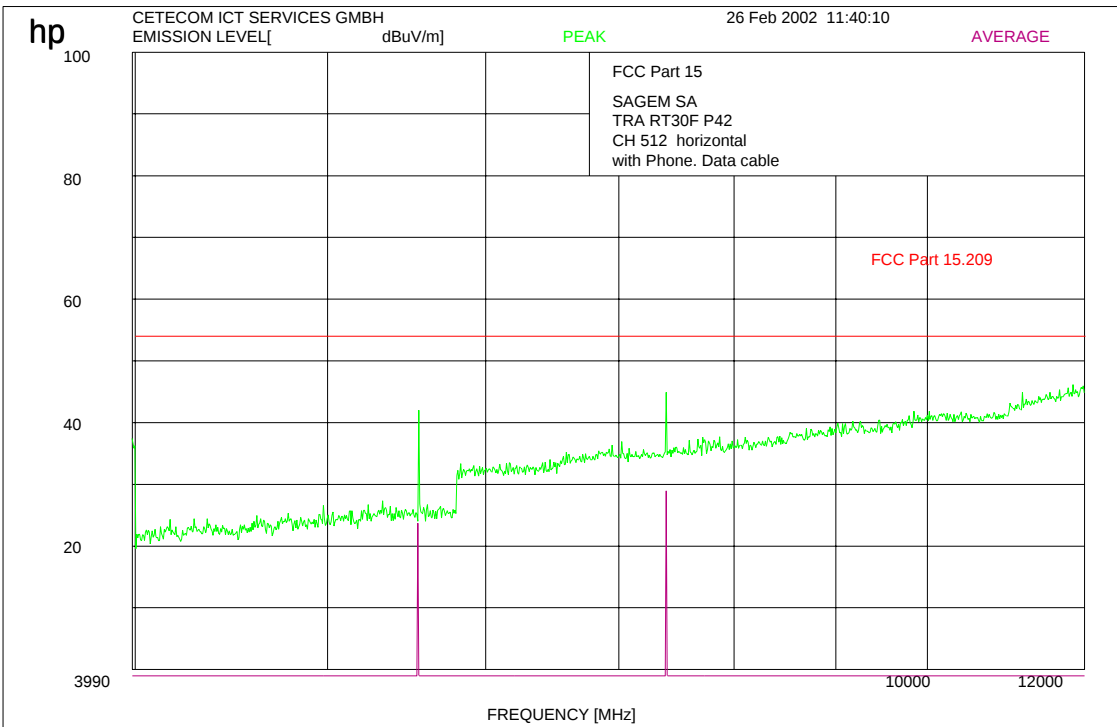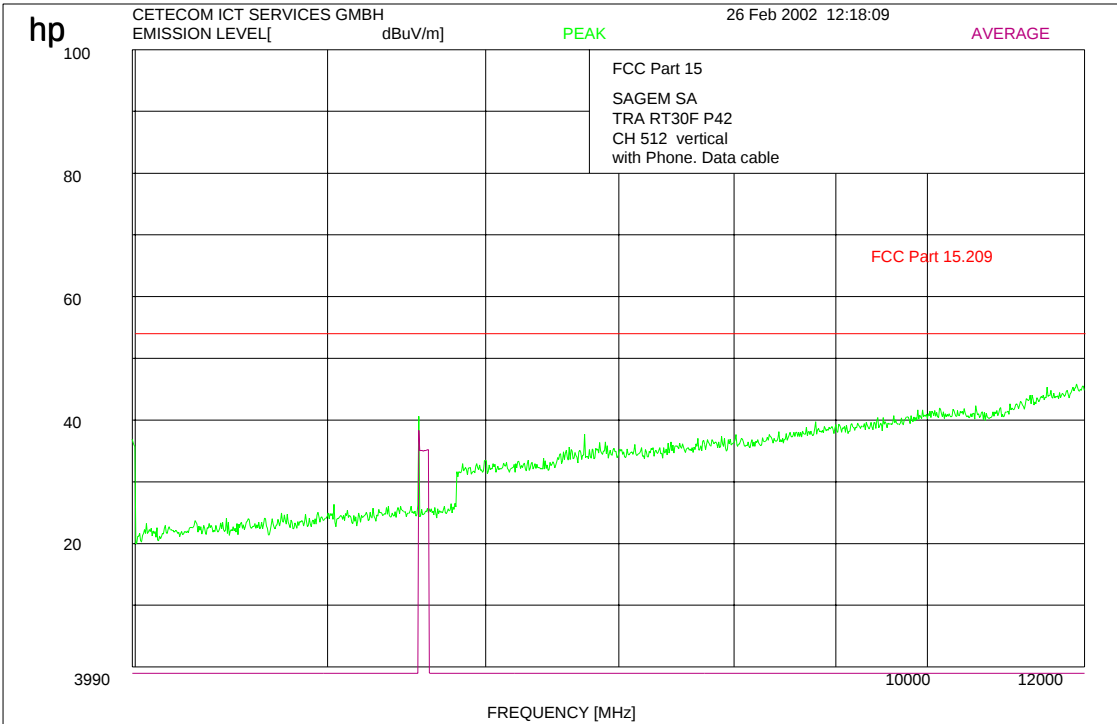



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 - 24



CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 20 (64)

Channel 661 (up to 1 GHz)

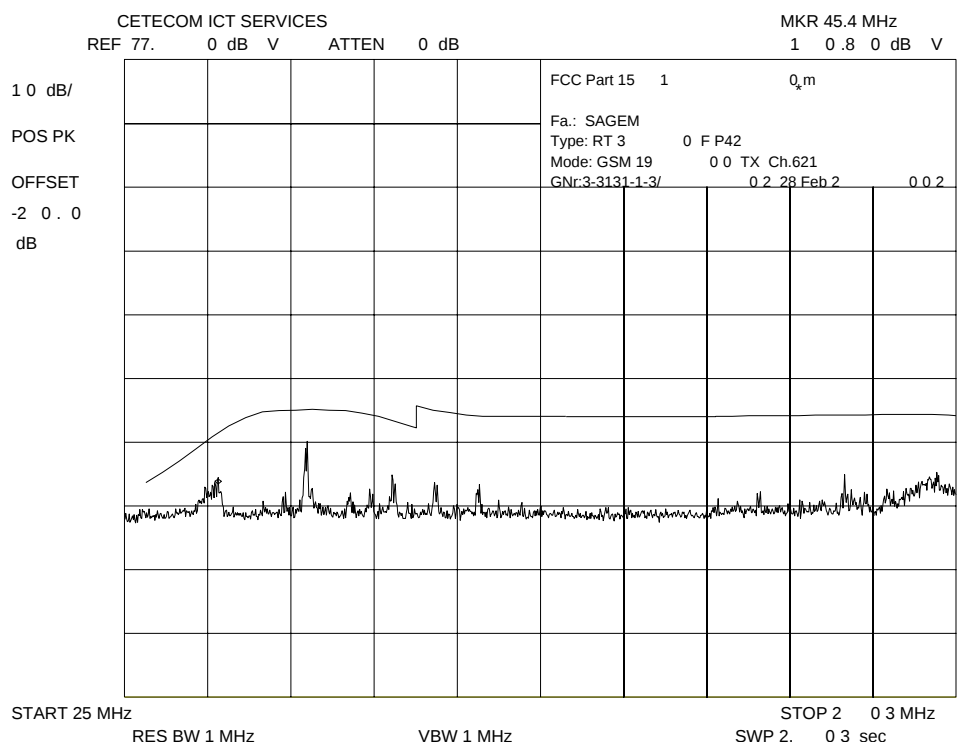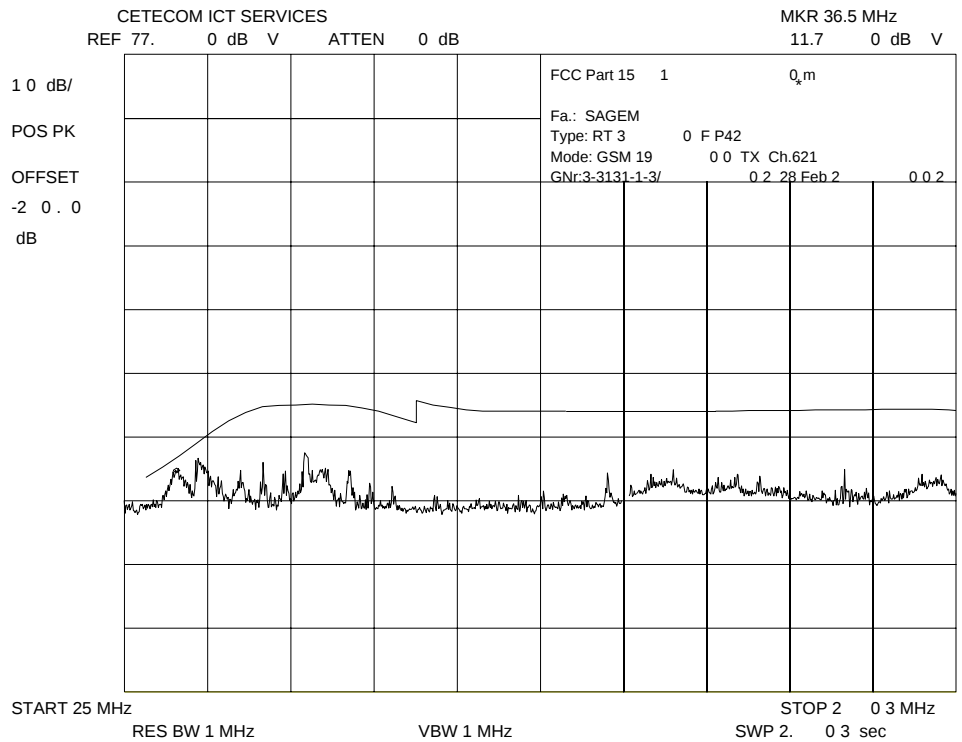

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

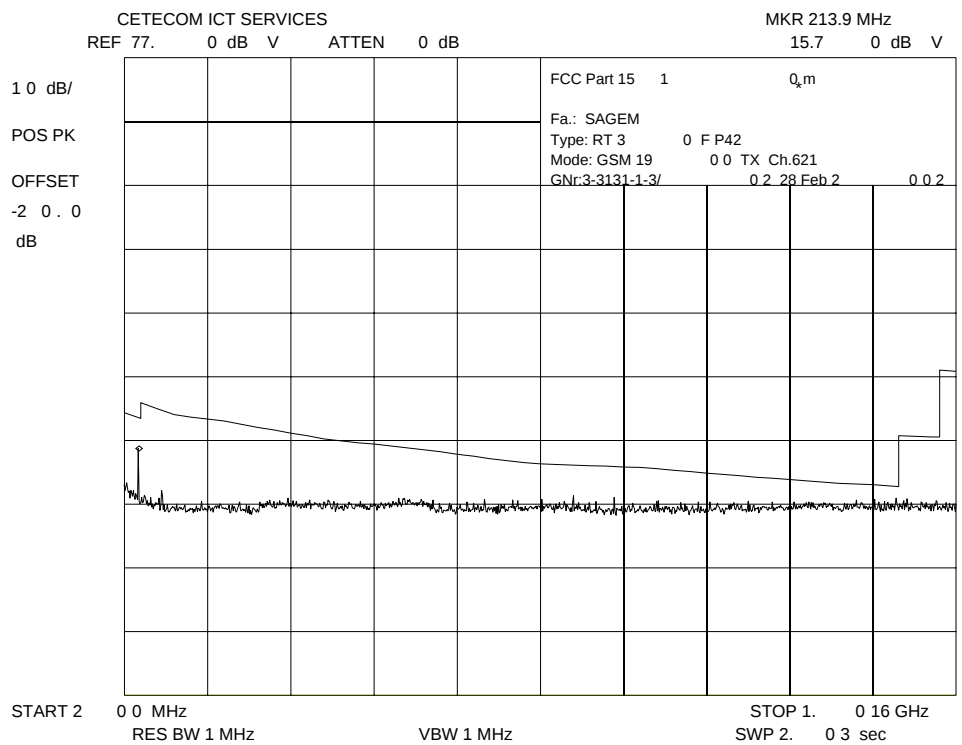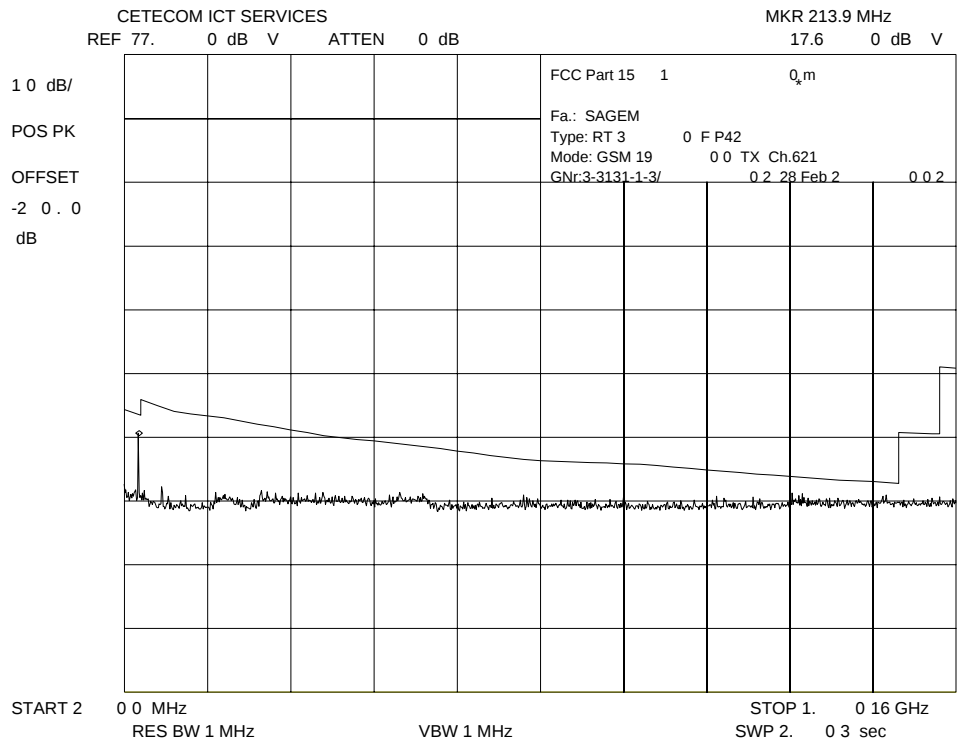

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661 : 1 – 12 GHz


Spurious emissions			
Frequency (MHz)	Level (dBµV/m) AV	Limits (dBµV/m)	Result
1453.4	28.4	54	complies
1667.0	30.6	54	complies
2095.0	30.6	54	complies
2308.2	26.9	54	complies
3200.6	28.6	54	complies
3760.4	22.5	54	complies
5640.6	24.3	54	complies

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02

Issue date: 2002-02-27



Page 23 (64)

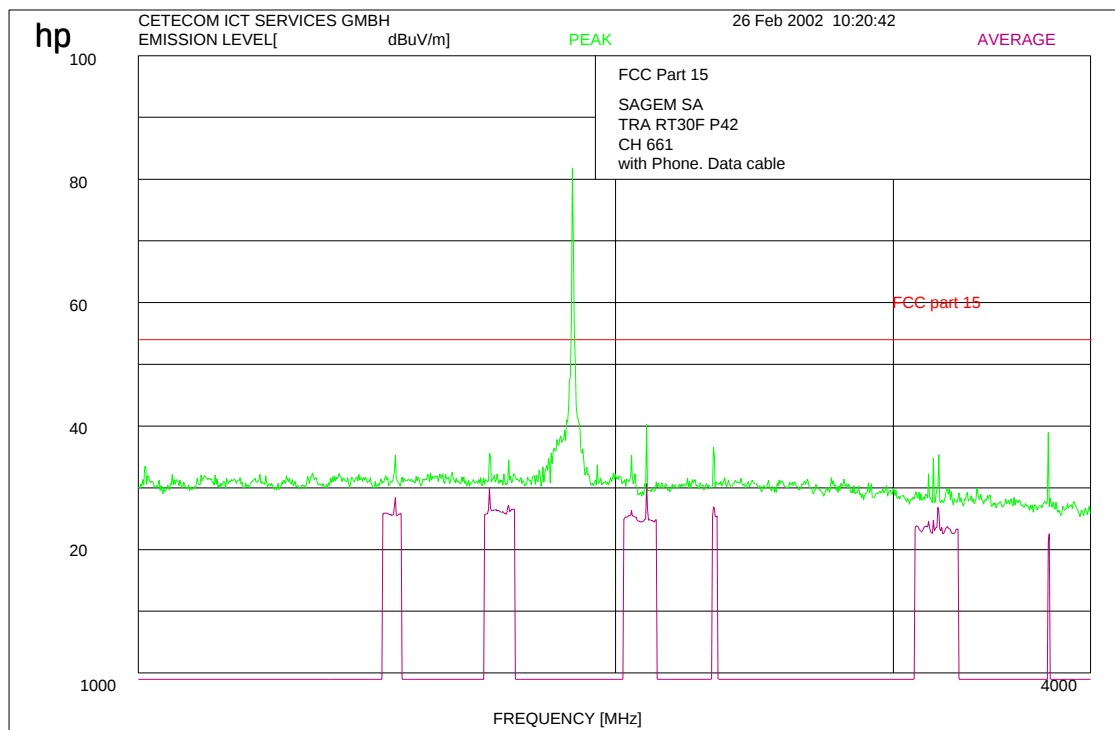

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 24 (64)

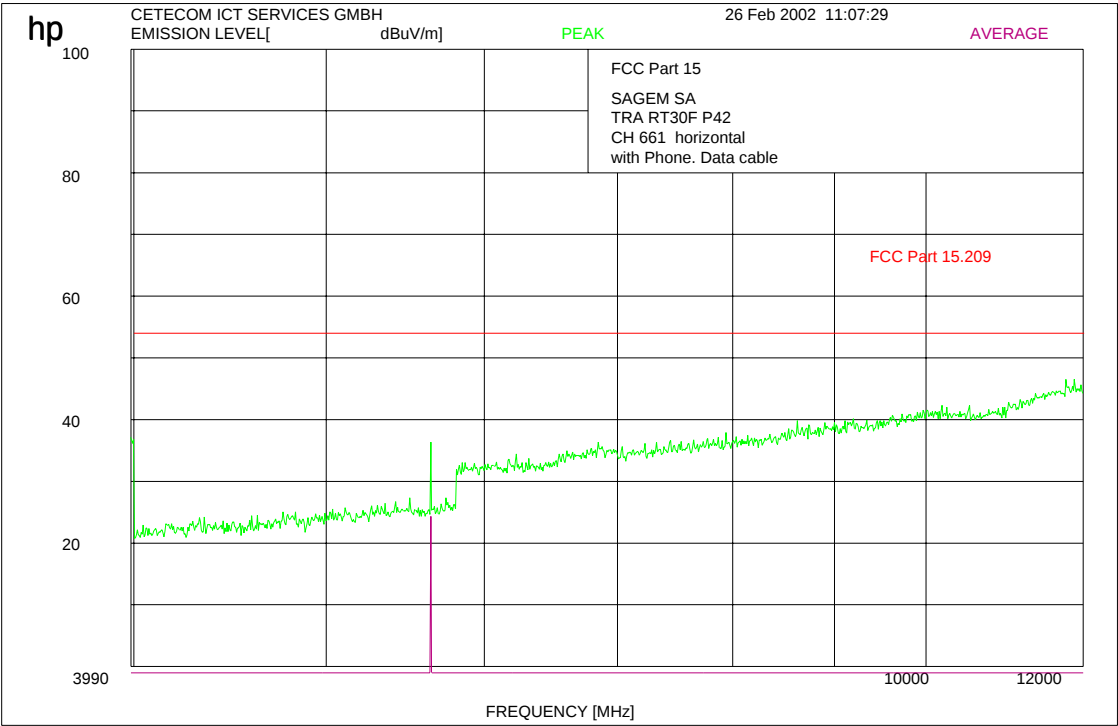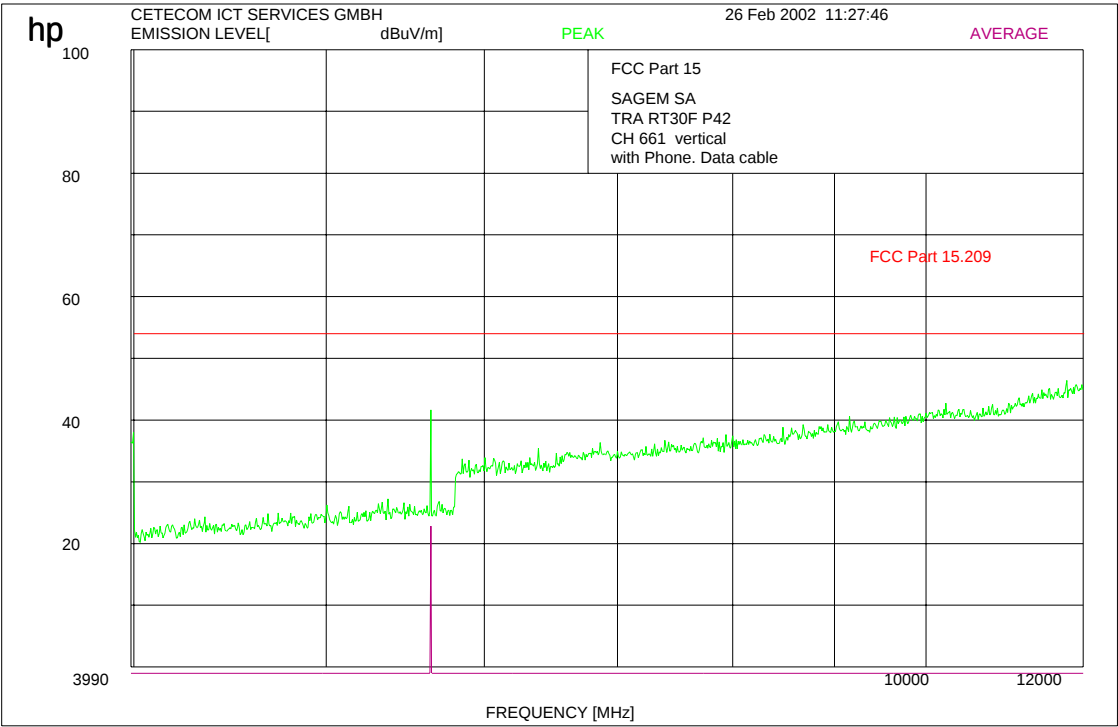

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661 : 12 – 20 GHz


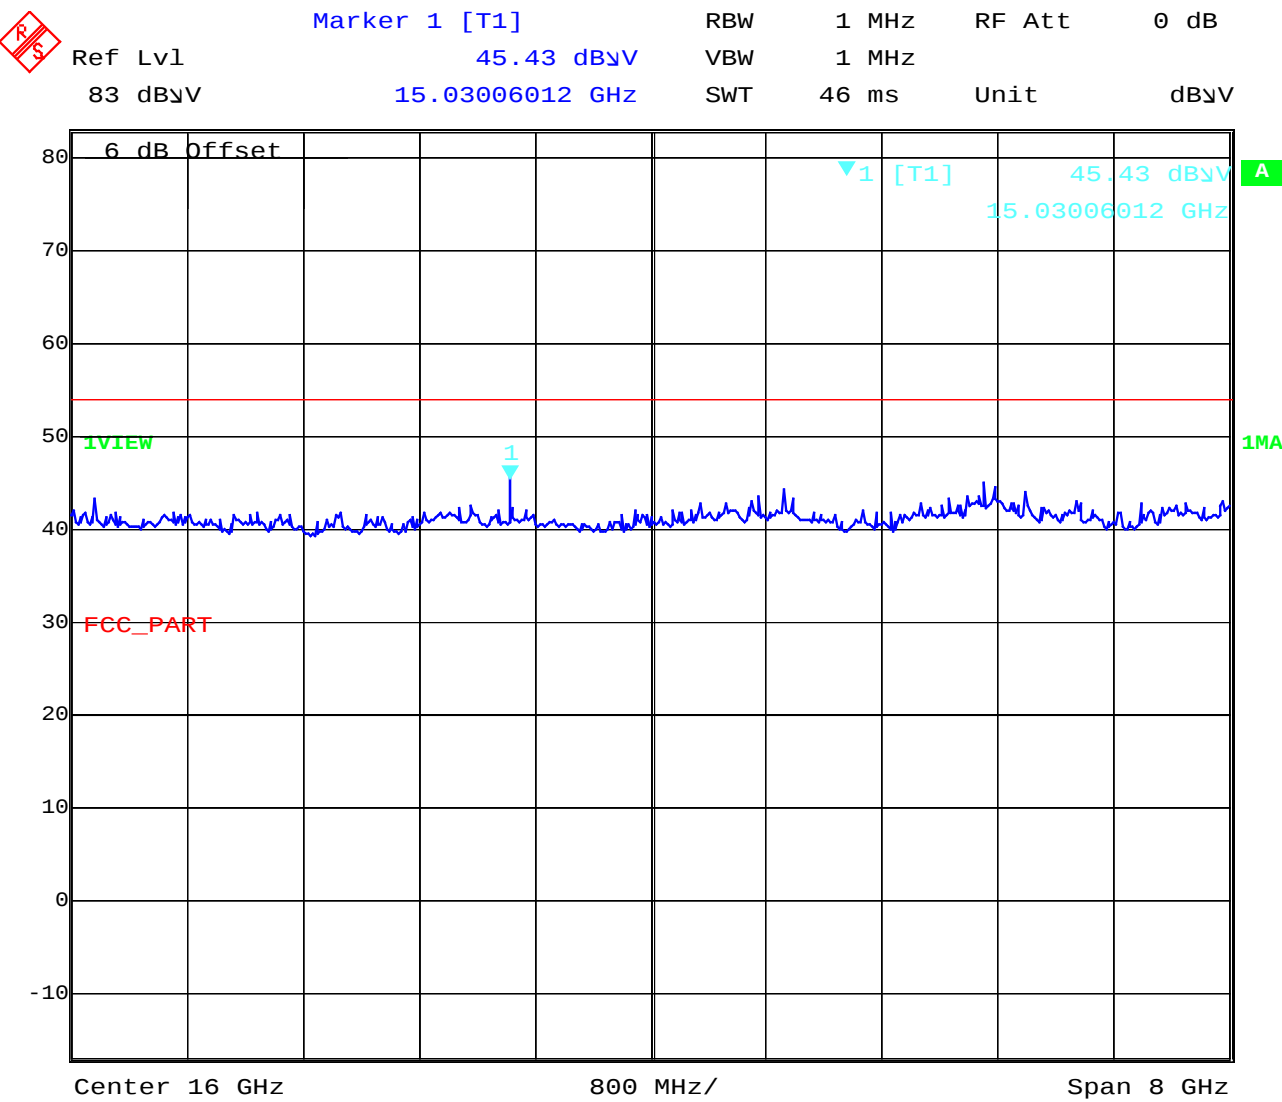


Date: 26.FEB.2002 13:53:48

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 26 (64)

Channel 810 up to 1 GHz

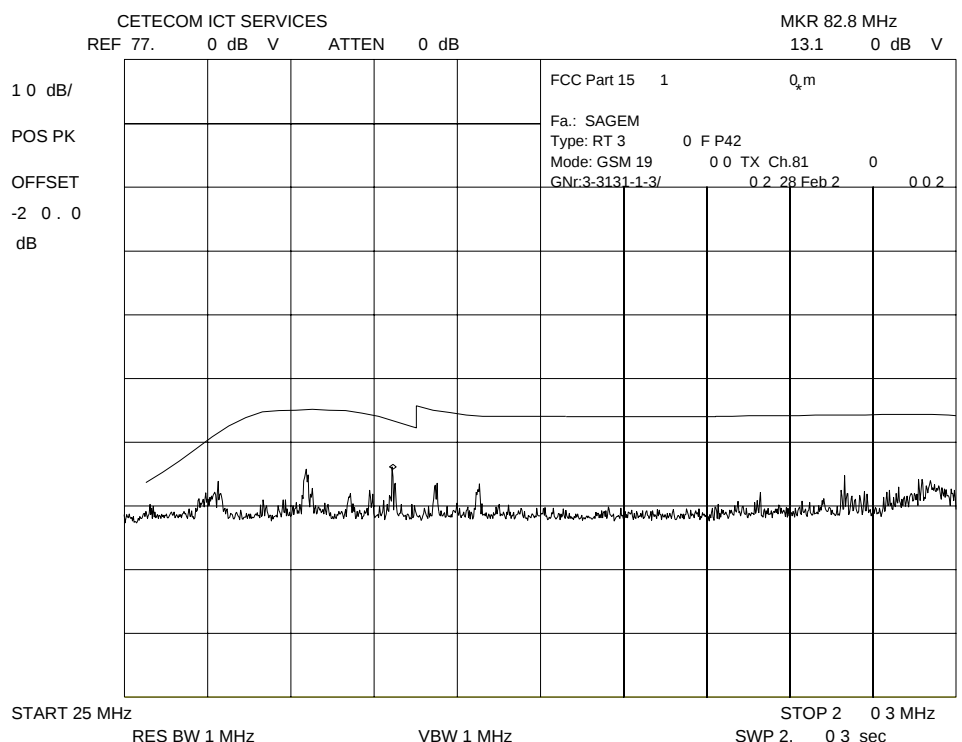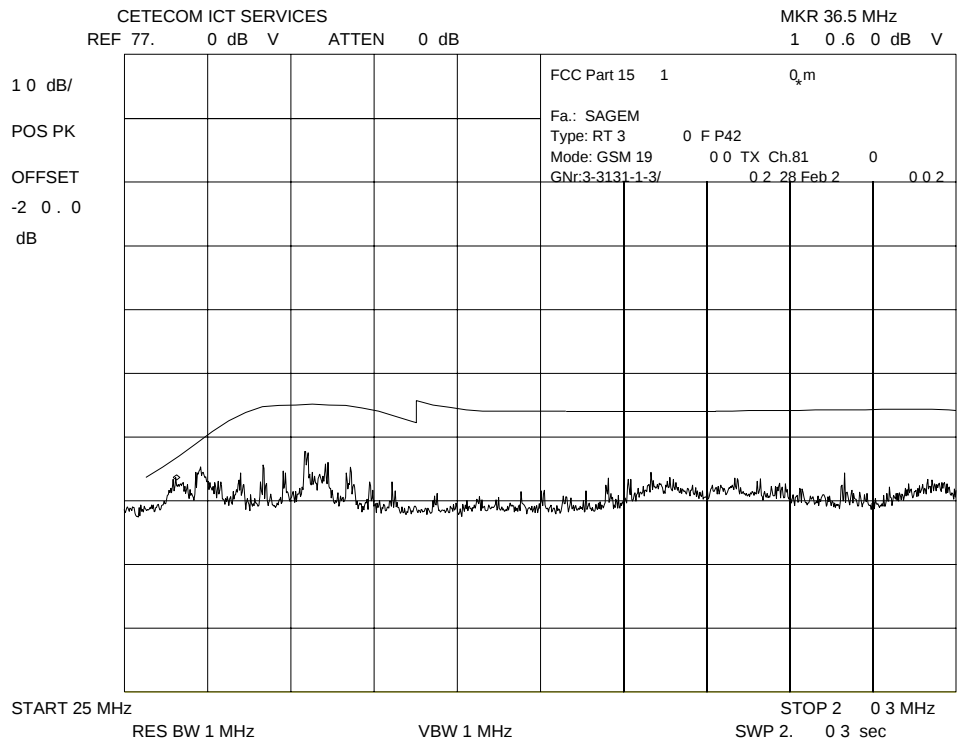



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02

Issue date: 2002-02-27


Page 27 (64)

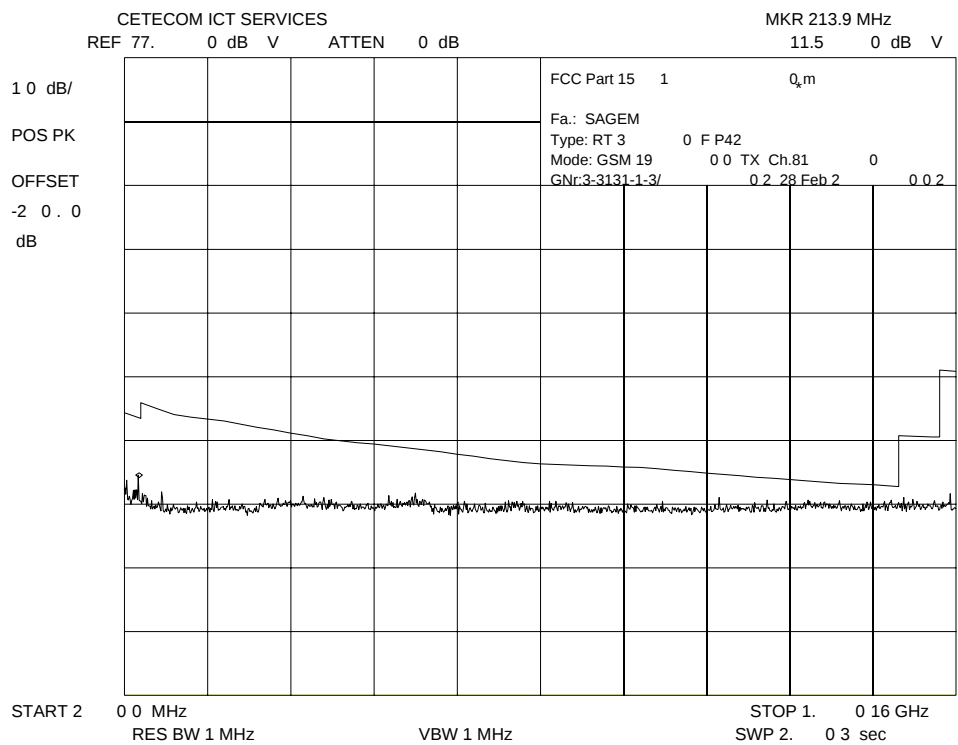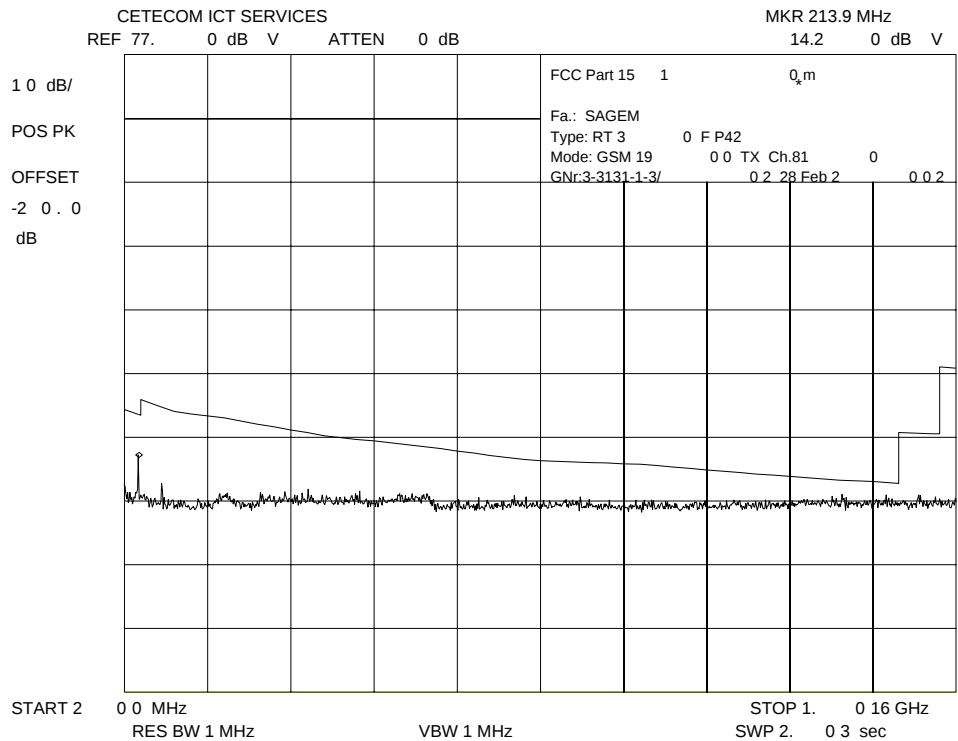

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)



Channel 810 : 1 –12 GHz

Spurious emissions			
Frequency (MHz)	Level (dB μ V/m) AV	Limits (dB μ V/m)	Result
1697.3	28.6	54	complies
2124.2	31.0	54	complies
3819.6	26.0	54	complies
5729.4	42.8	54	complies

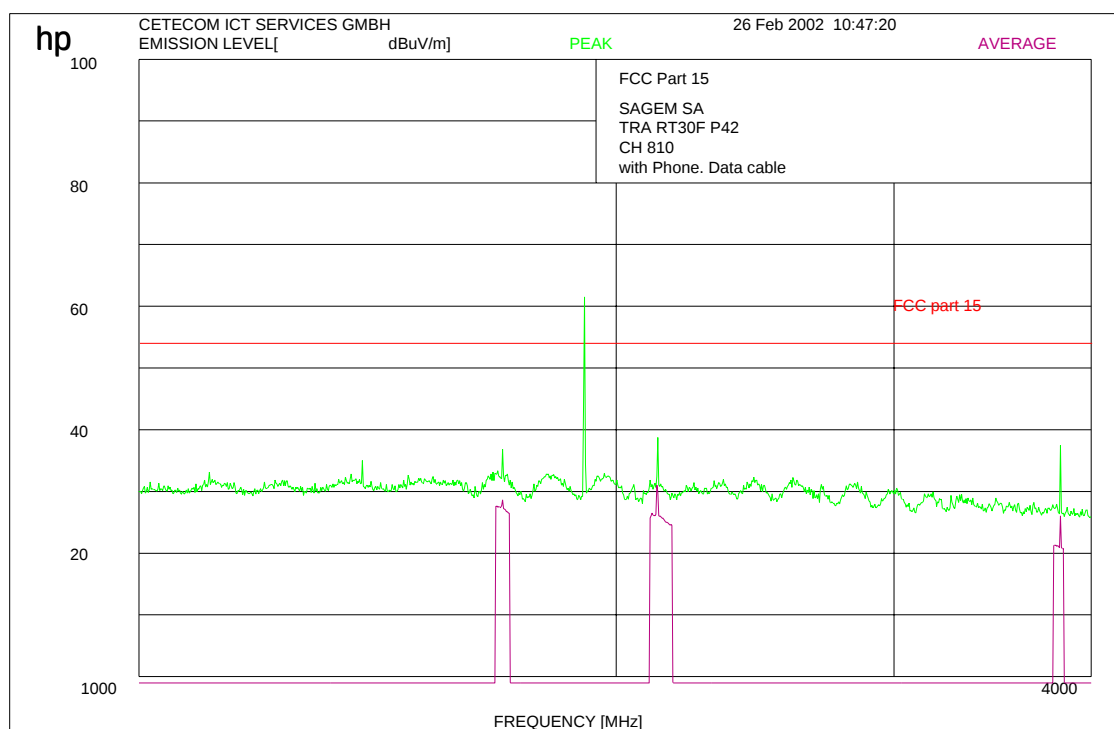


CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 29 (64)

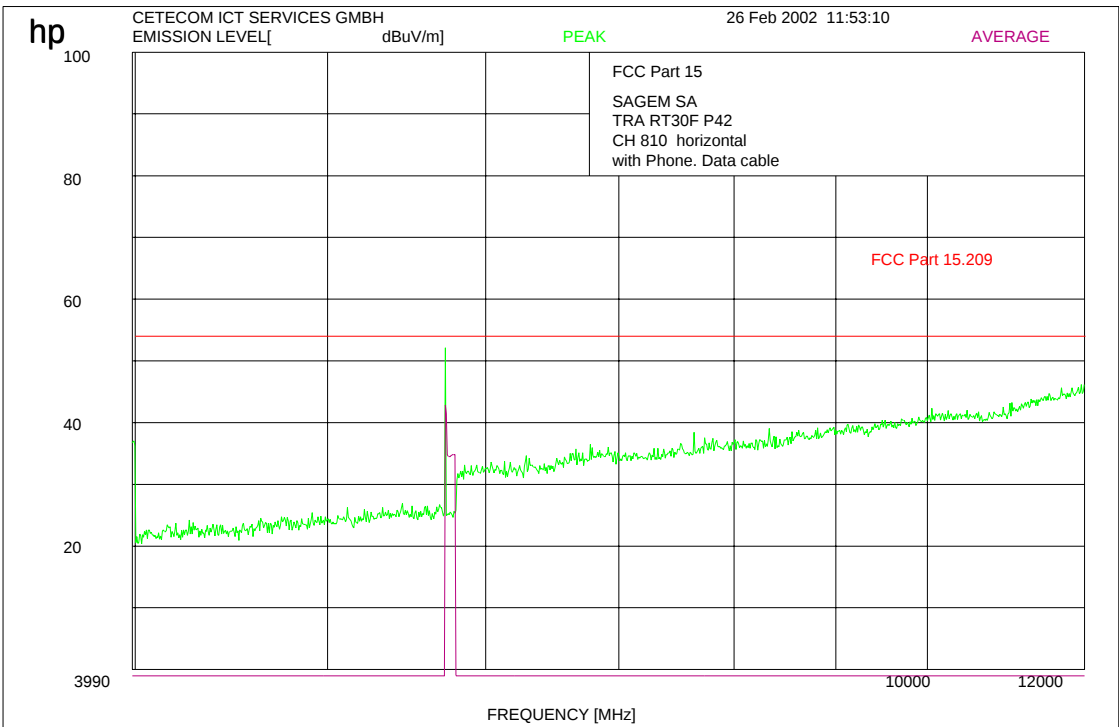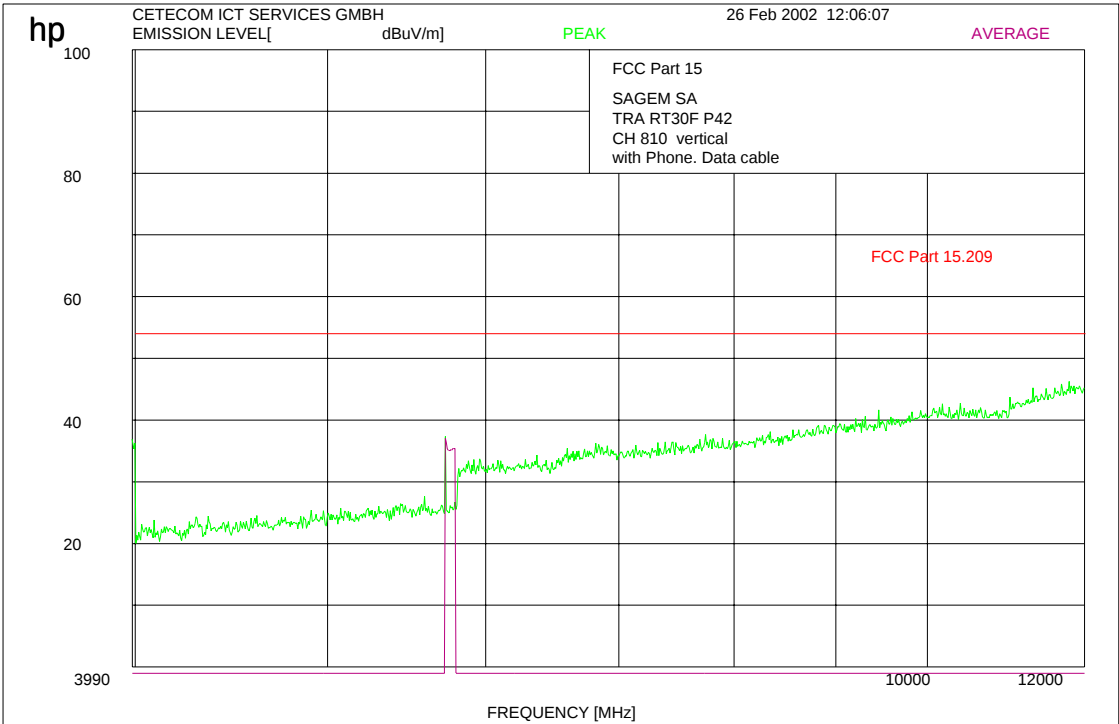

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810 : 12 – 20 GHz

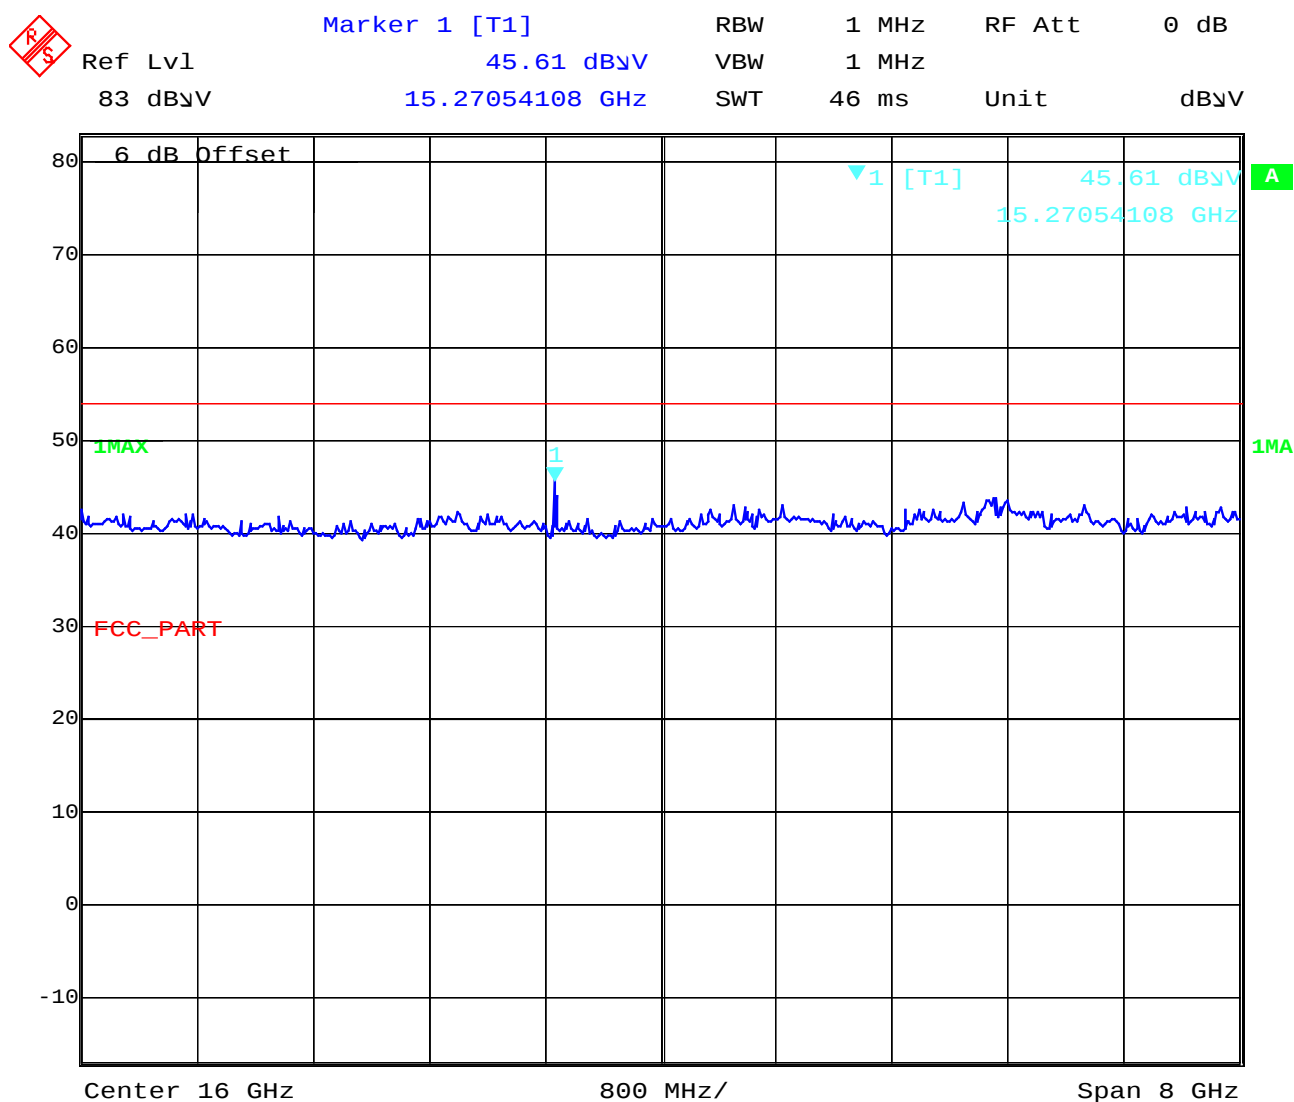

Date: 26.FEB.2002 13:54:55

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02

Issue date: 2002-02-27

Page 31 (64)

Channel 661 (this is valid for all 3 channels and up to 1 GHz)

Idle-Mode

Data File : /33131_20.DOC

28 Feb 2002

No	EMISSION	SPEC	MEASUREMENTS			POL	SITE		CORR	COMMENTS
	FREQUENCY MHz	LIMIT dBuV/m	ABS	dLIM dB	MODE		HGT cm	AZM deg	FACTOR dB	
1	36.9	29.5	24.3	-5.2	PK	V	101	0	N/T	
2	41.5	29.5	23.8	-5.7	PK	V	101	0	N/T	
3	46.3	29.5	19.6	-9.9	PK	V	101	0	N/T	
4	55.2	29.5	20.8	-8.7	PK	V	101	0	N/T	
5	64.5	29.5	21.1	-8.4	PK	V	101	0	N/T	
6	73.7	29.5	19.1	-10.4	PK	V	101	0	N/T	
7	78.0	29.5	18.0	-11.5	PK	V	101	0	N/T	
8	82.8	29.5	21.4	-8.1	PK	H	331	360	N/T	
9	92.4	33.0	20.5	-12.5	PK	H	331	360	N/T	
10	101.5	33.0	21.7	-11.3	PK	H	331	360	N/T	
11	128.9	33.0	21.8	-11.2	PK	V	101	0	N/T	
12	138.2	33.0	22.1	-10.9	PK	V	101	0	N/T	
13	156.8	33.0	21.9	-11.1	PK	V	101	0	N/T	
14	179.6	33.0	22.6	-10.4	PK	V	101	0	N/T	
15	236.7	35.5	22.9	-12.6	PK	H	331	360	N/T	



N/T in CORR FACTOR column denotes a non-traceable signal.

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02 Issue date: 2002-02-27 Page 32 (64)

Idle mode

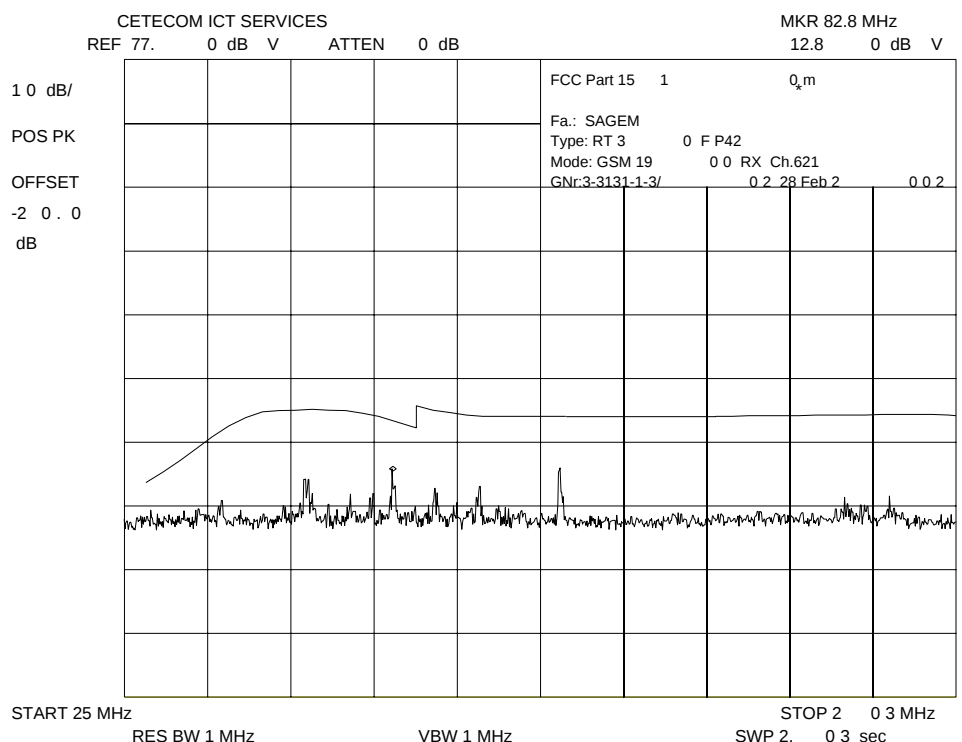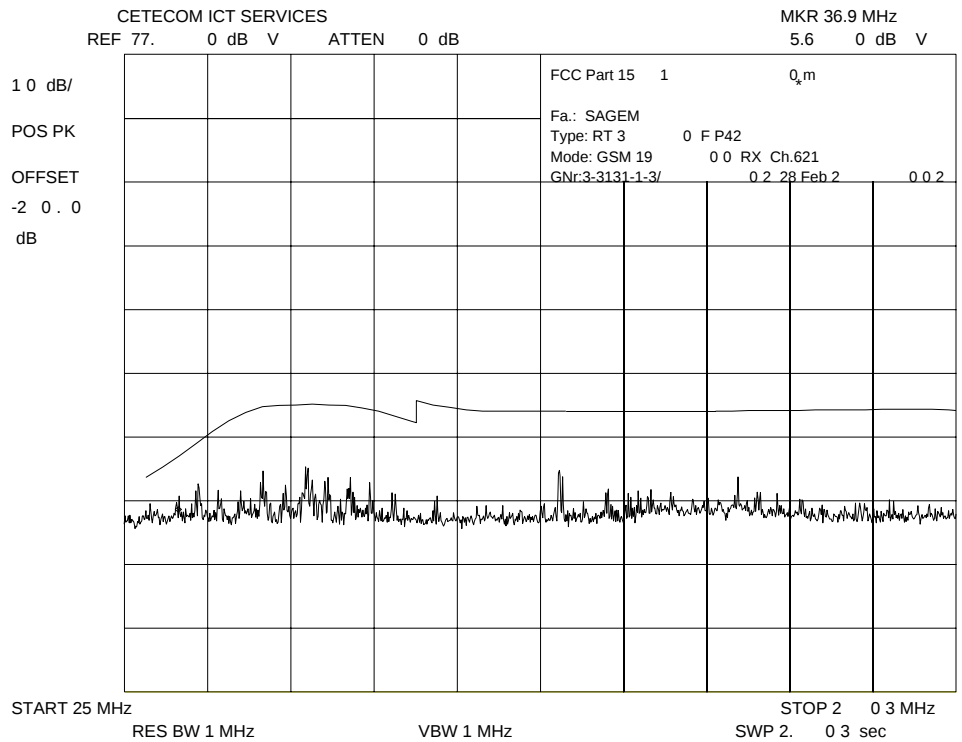



REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 - 24

CETECOM ICT Services GmbH

Test report nr.:3_3131-01-02/02

Issue date: 2002-02-27

Page 33 (64)

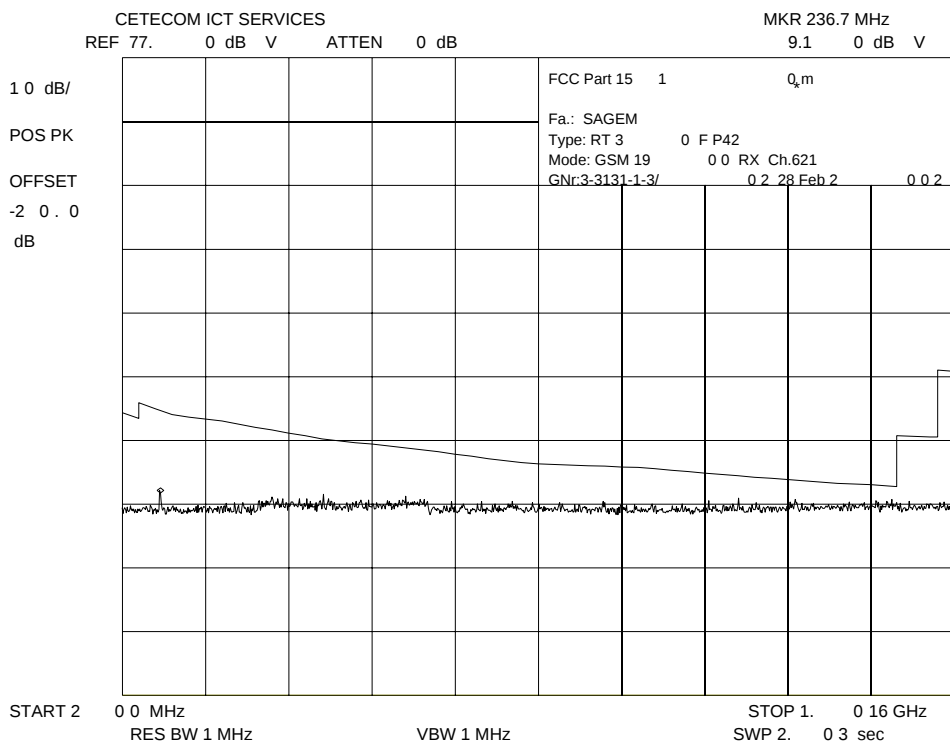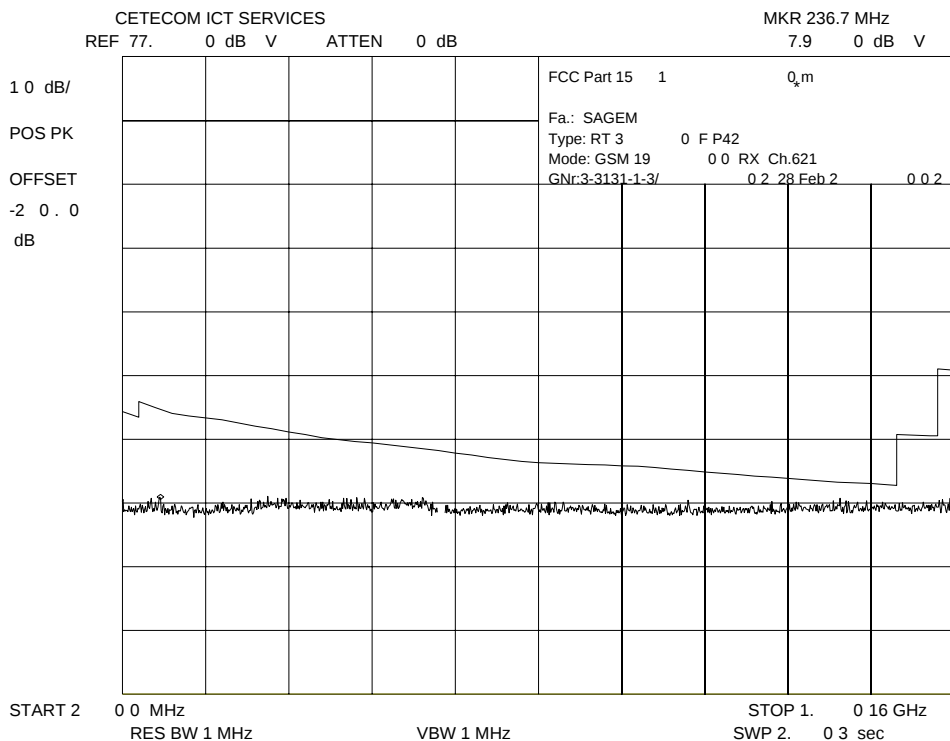


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661 (this is valid for all 3 channels and up to 4 GHz)
Idle-Mode




Spurious emissions			
Frequency (MHz)	Level (dB μ V/m) AV	Limits (dB μ V/m)	Result
3178.5	31.7	54	complies

Channel 661 (this is valid for all 3 channels and 4 to 12 GHz)
Idle-Mode

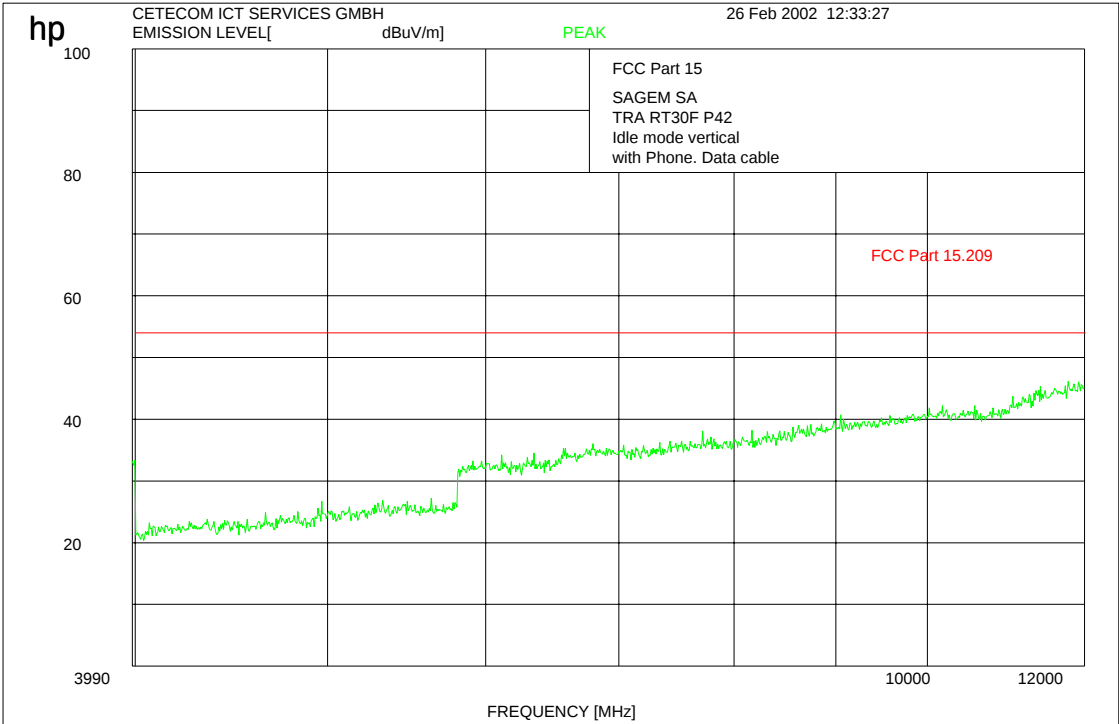

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661 (this is valid for all 3 channels and 12 to 20 GHz)
Idle-Mode

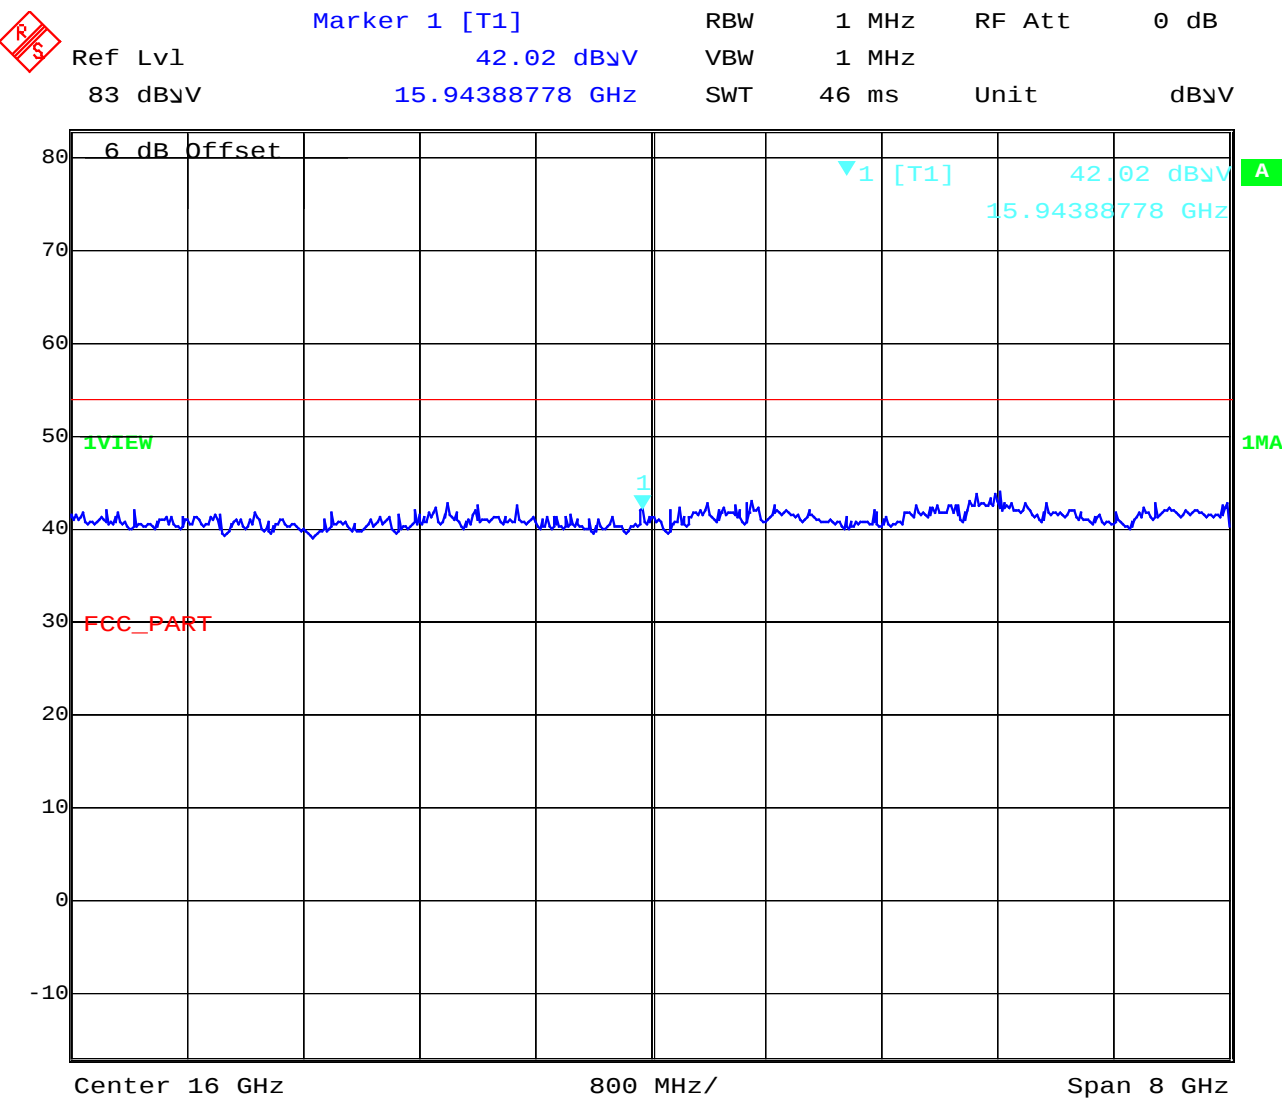

Date: 26.FEB.2002 13:56:14

Conducted Spurious Emissions

Measurement Procedure:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.
2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

USPCS Transmitter

Channel Frequency

512 1850.2 MHz

661 1880.0 MHz

810 1909.8 MHz


Measurement Limit:

Sec. 24.238 Emission Limits.

- (a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


Measurements:

Channel: 512

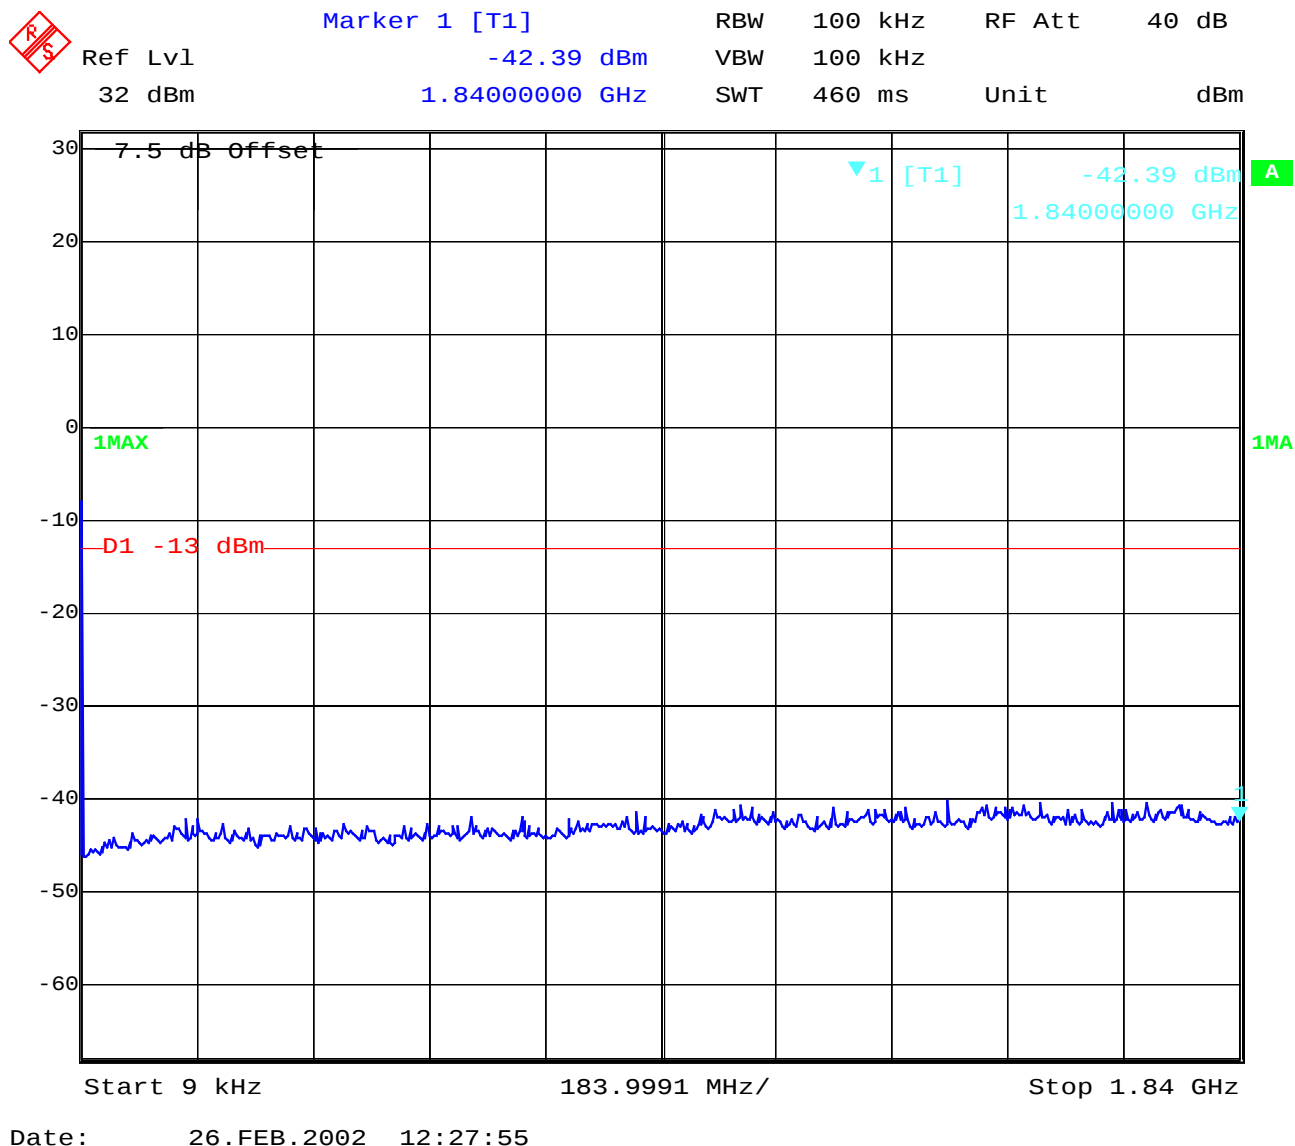


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Channel 512

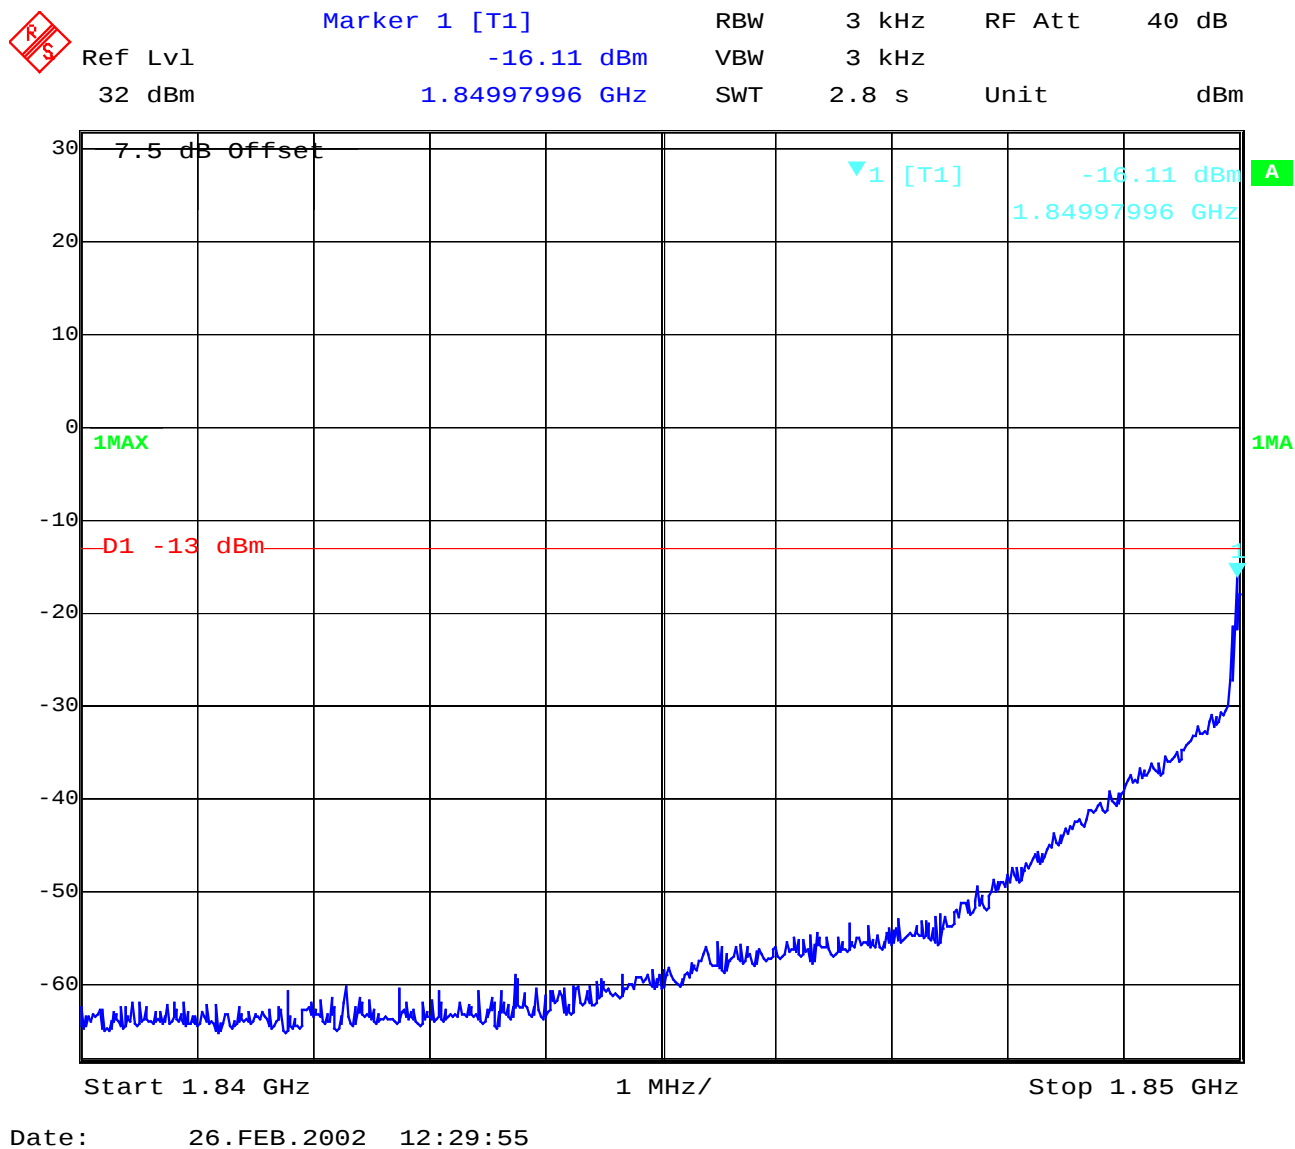


Channel 512

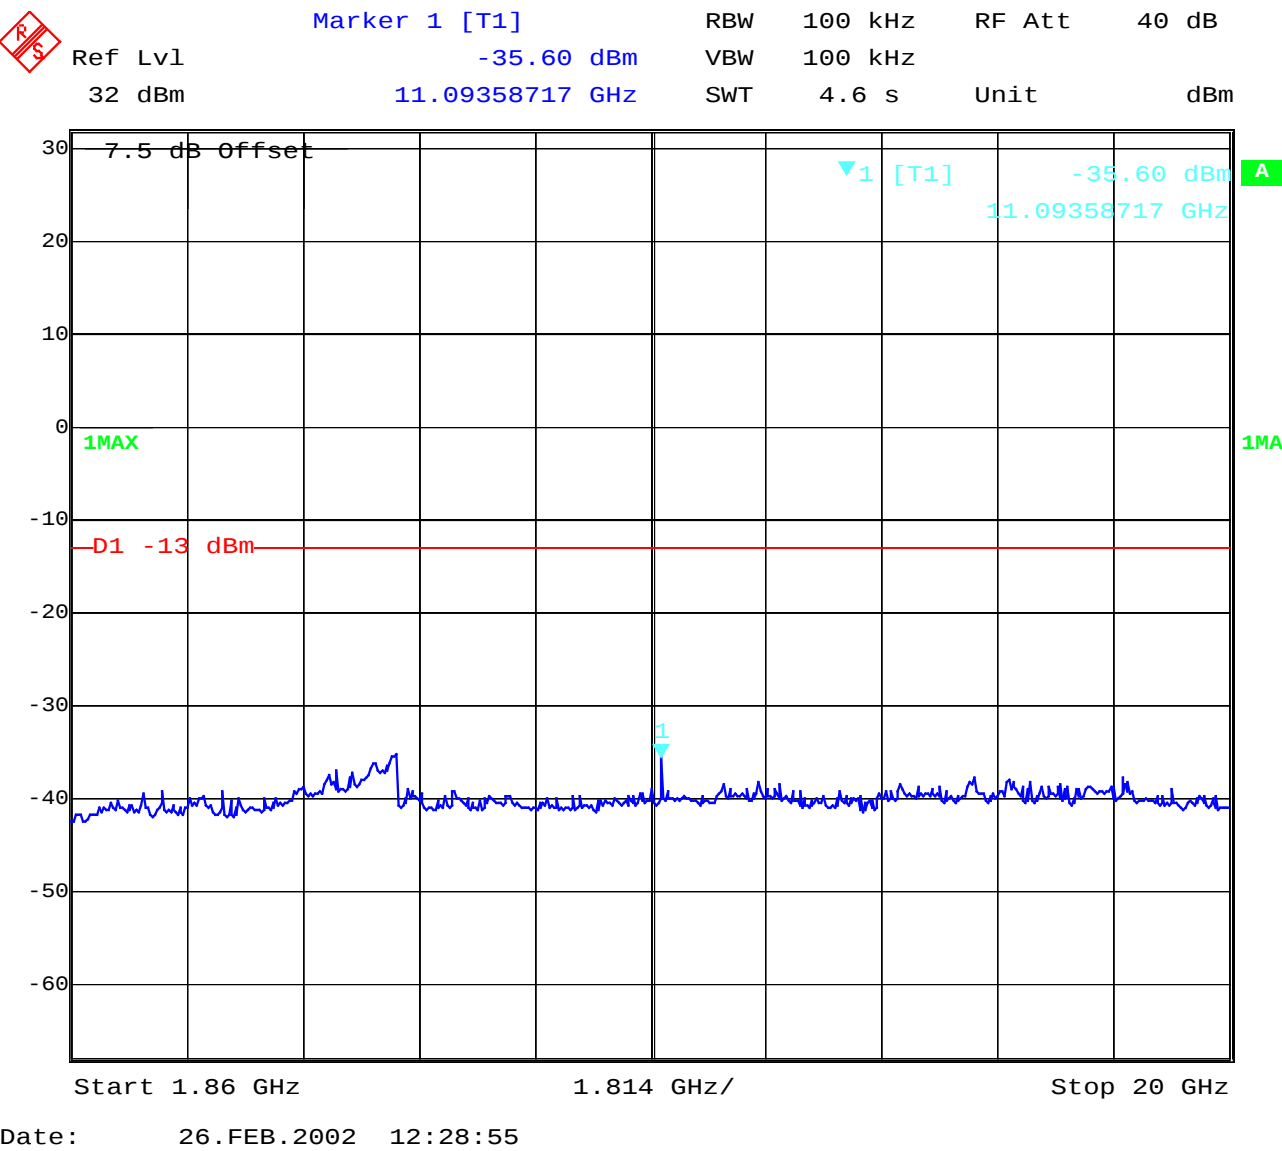

Channel 661

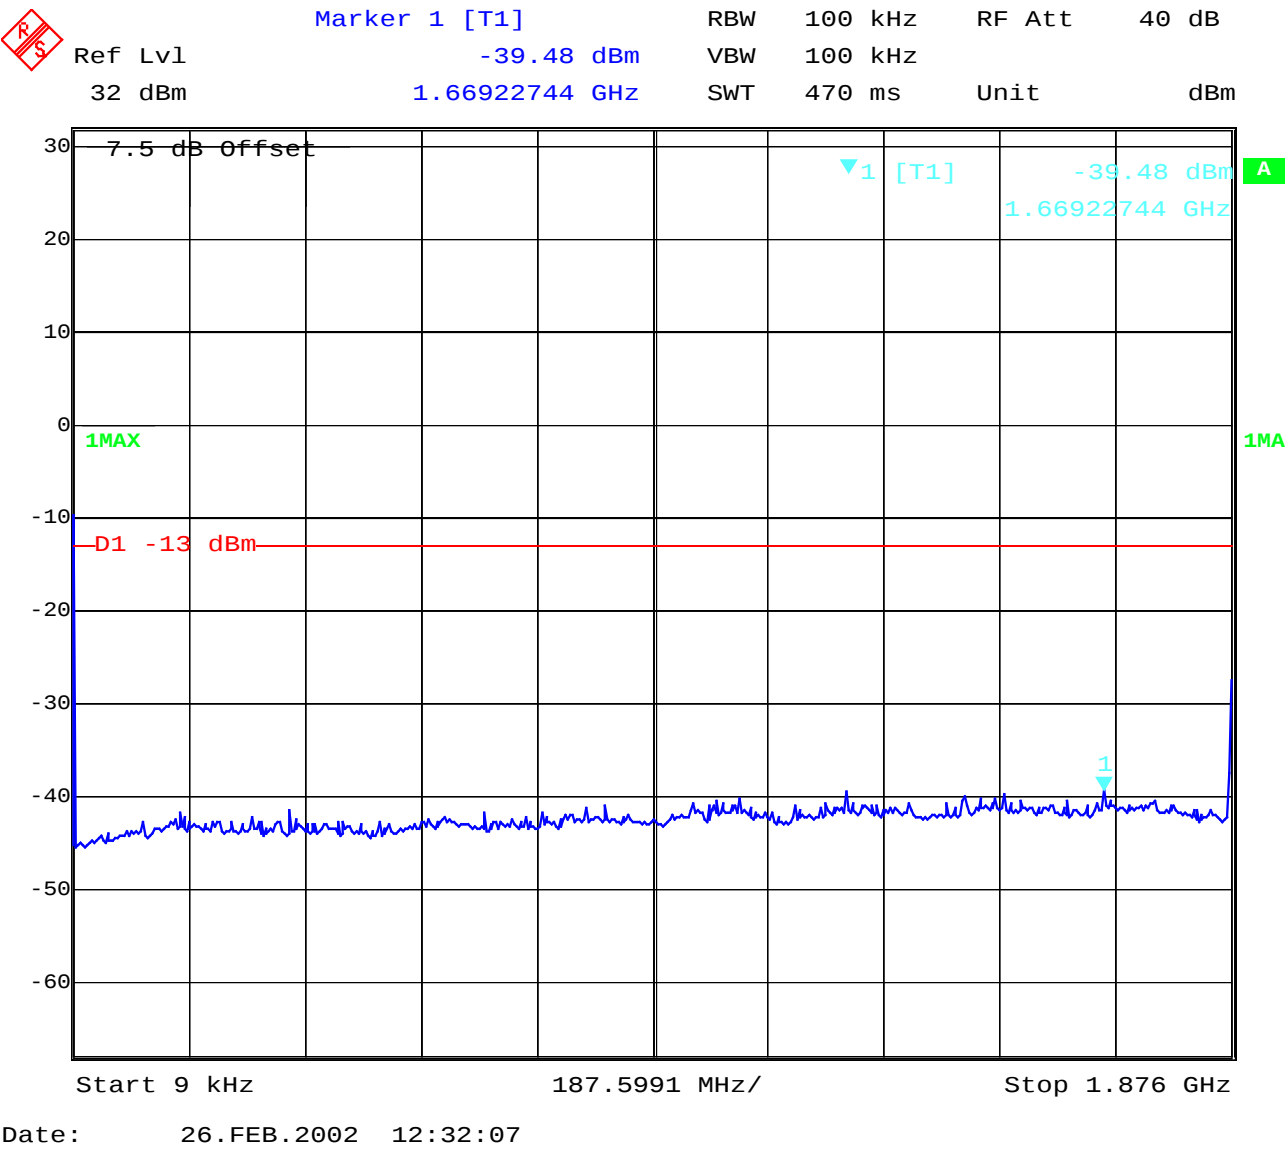


Channel 661

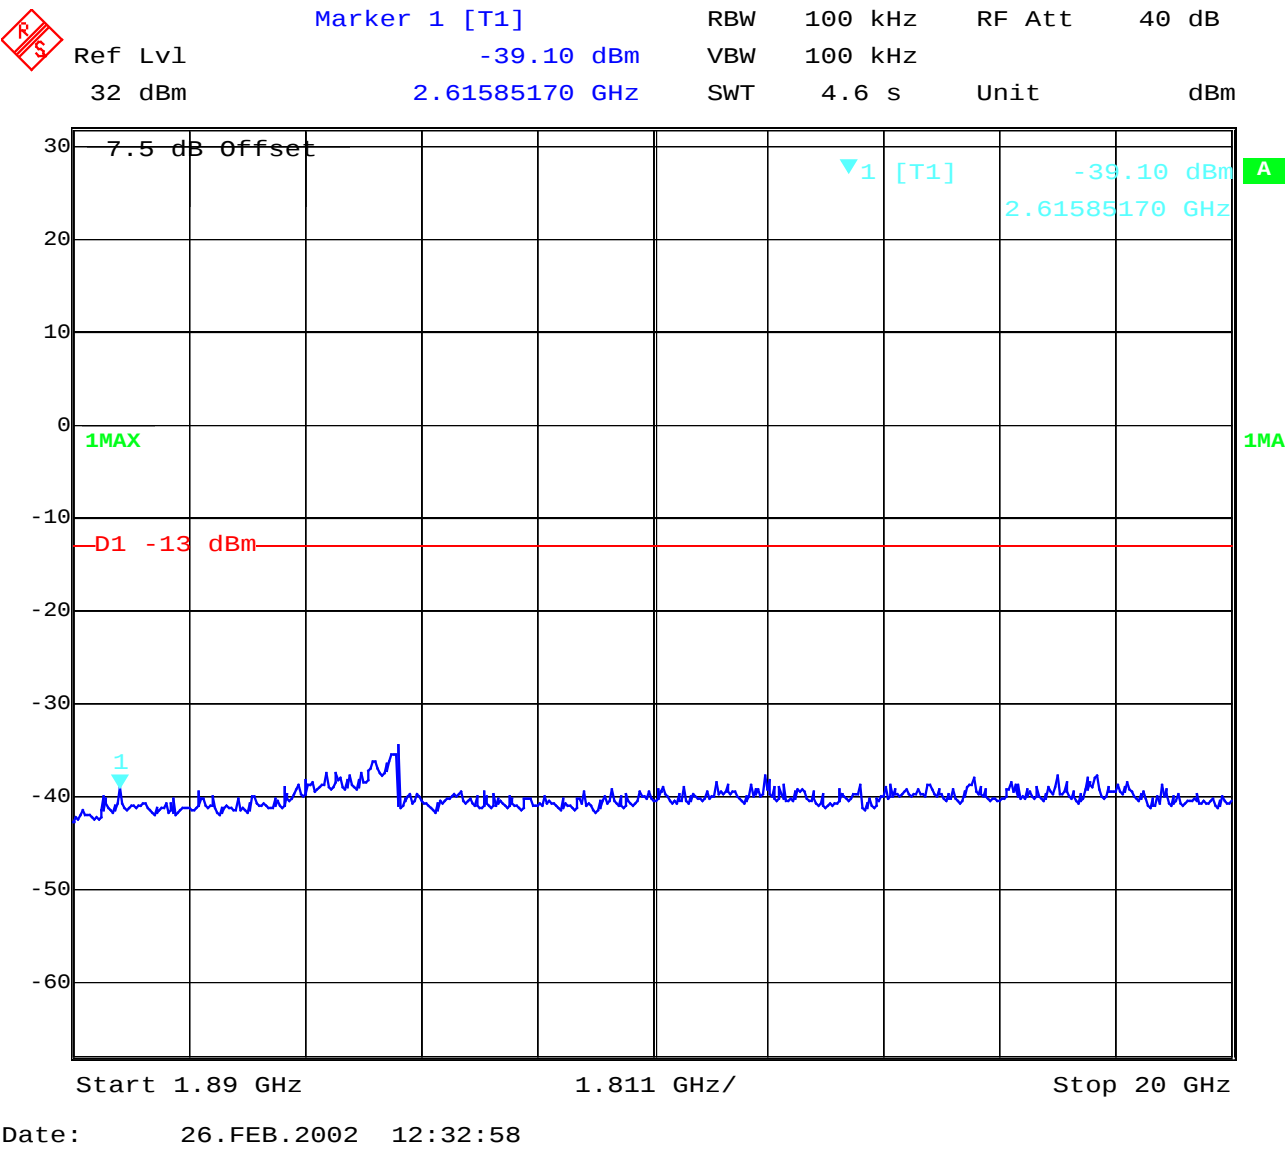


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810

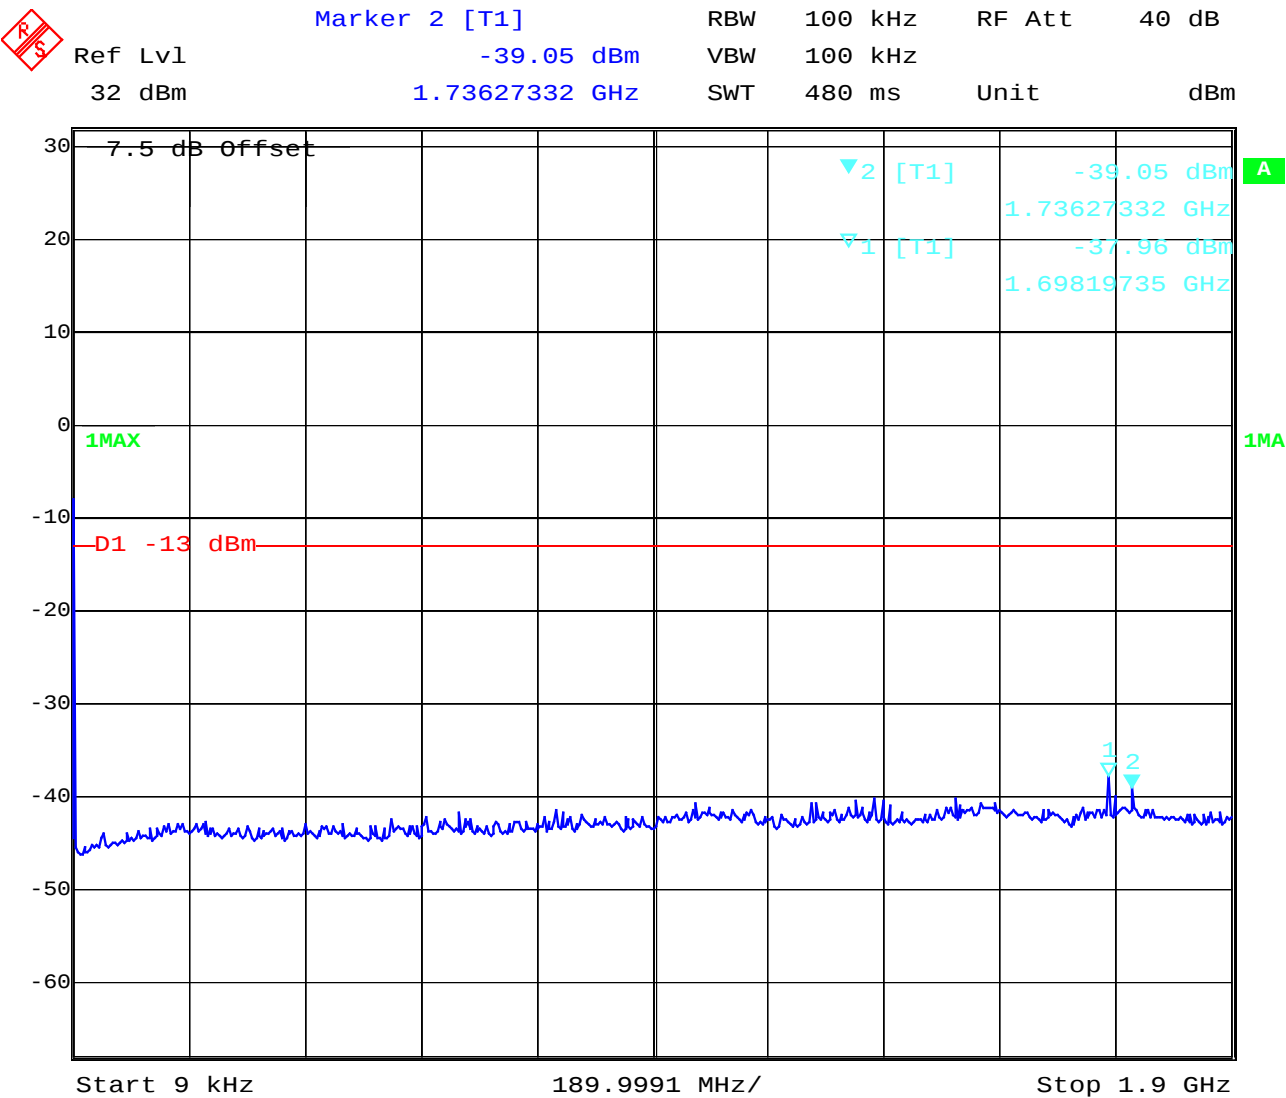


Date: 26.FEB.2002 12:35:41

Channel 810

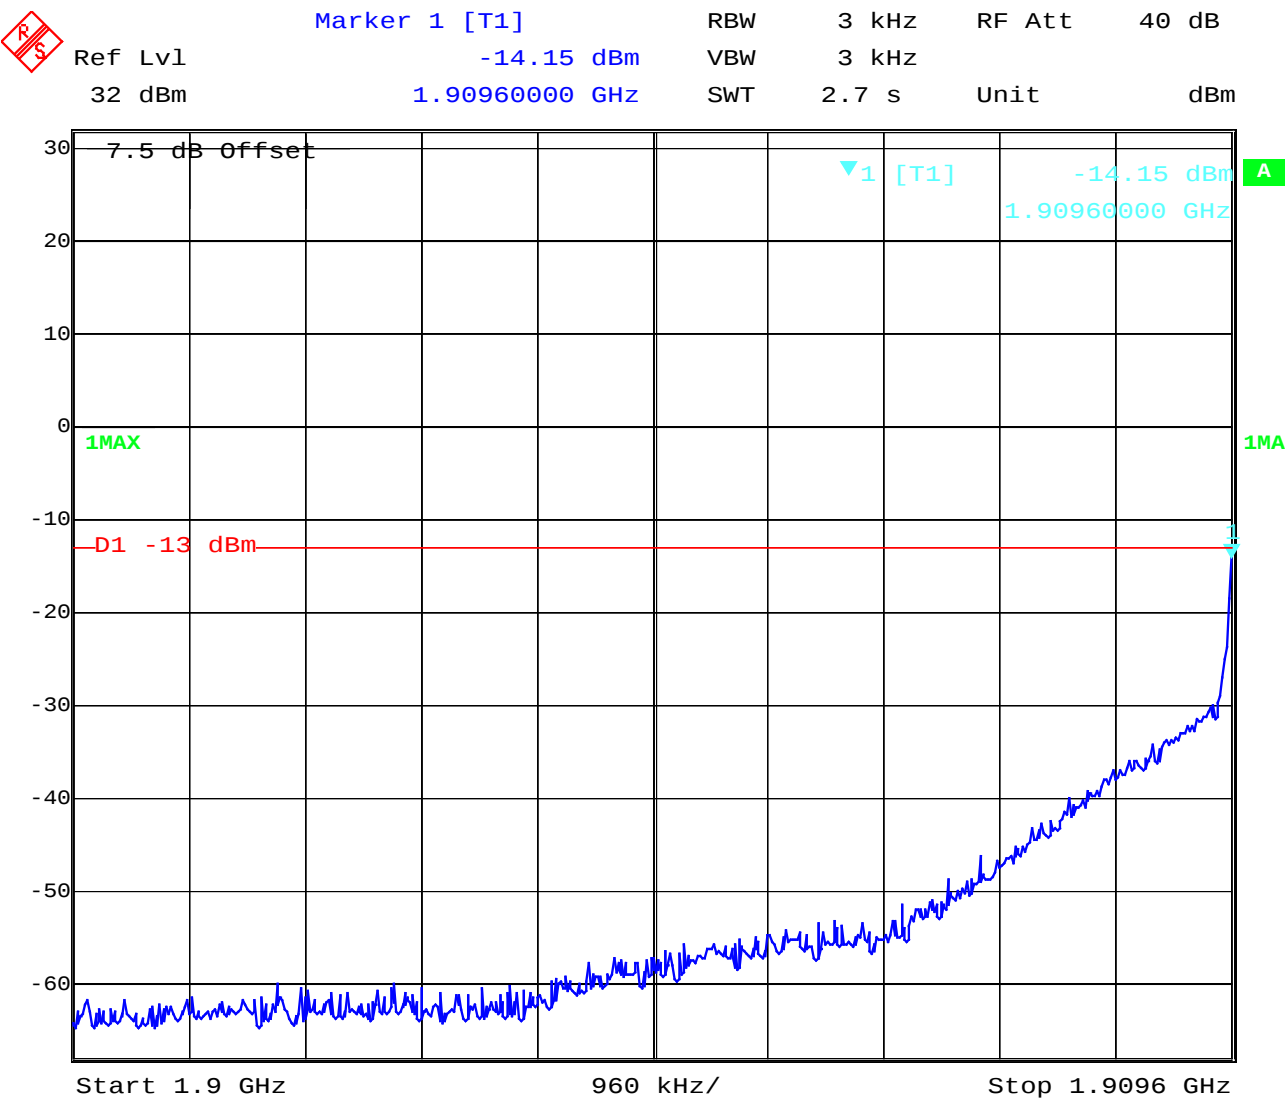

Date: 26.FEB.2002 12:37:07

Channel 810

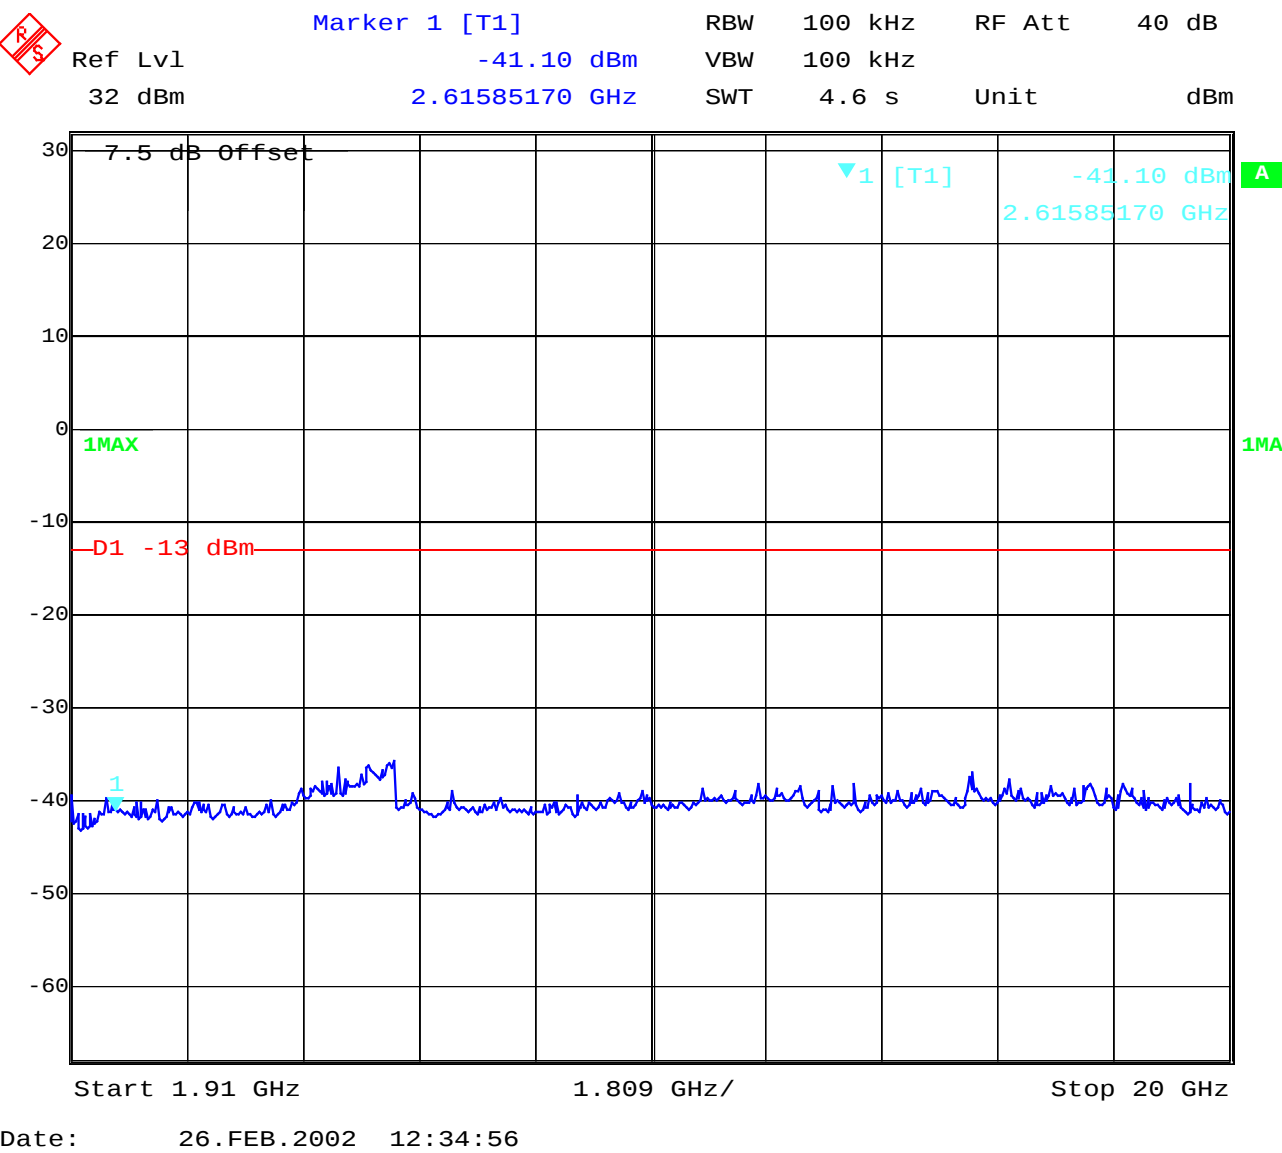

OCCUPIED BANDWIDTH

§2.989


Occupied Bandwidth Results

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.


Frequency	99% Occupied Bandwidth	-26 dBc Bandwidth
1850.2 MHz	274.549	320.641
1880.0 MHz	284.569	320.641
1909.2 MHz	278.557	320.633

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 290 kHz, this equates to a resolution bandwidth of at least 2.8 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

Channel 512
99% Occupied Bandwidth

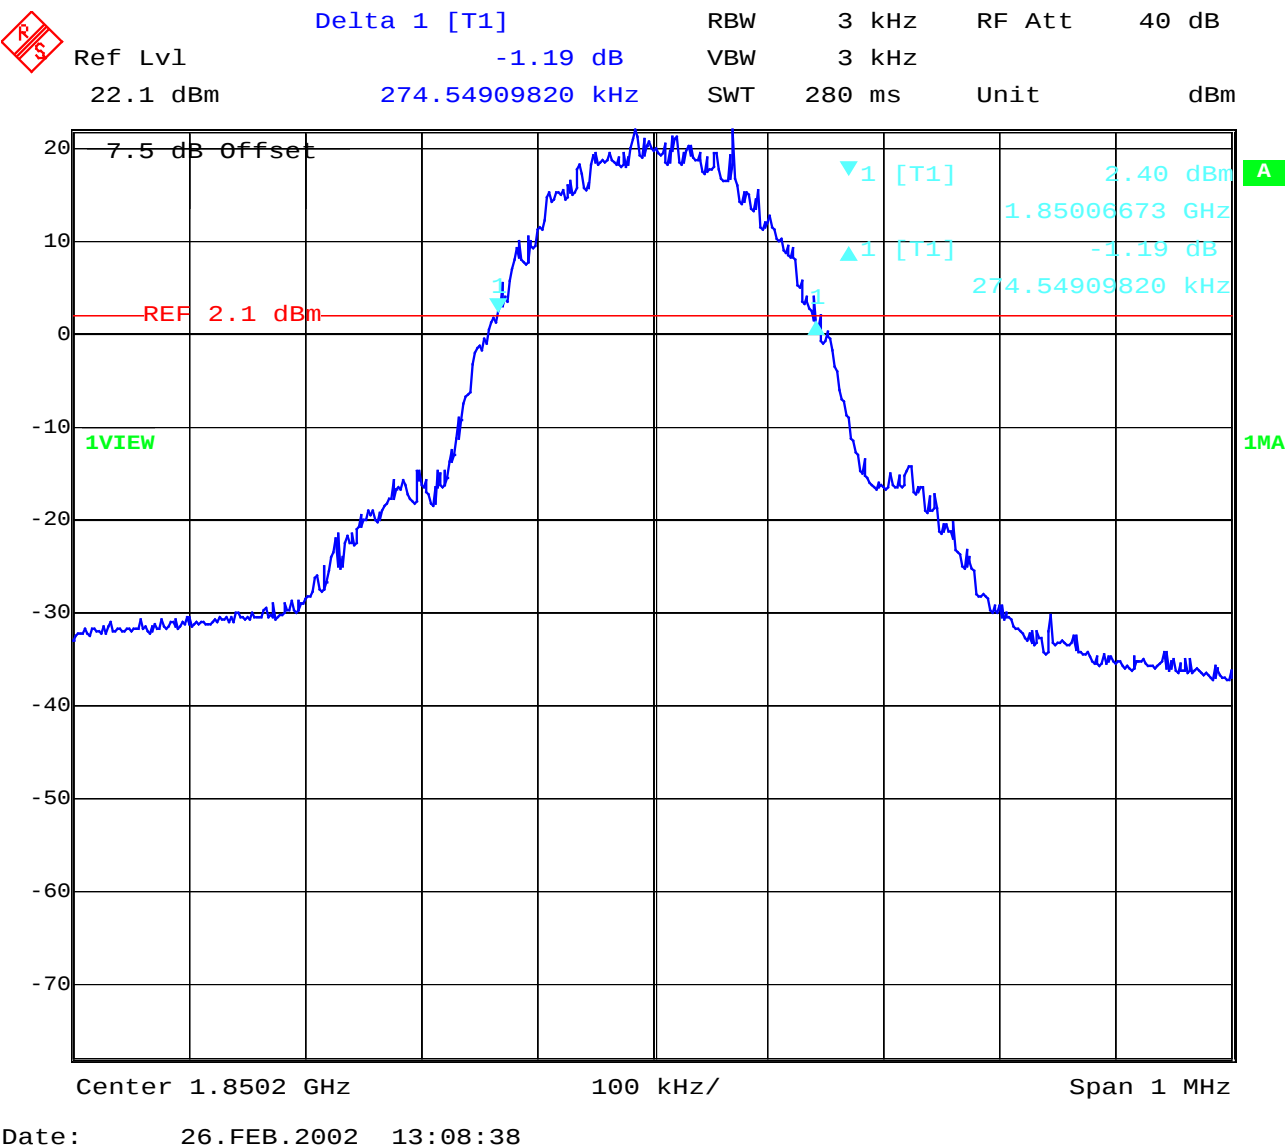


Channel 512
-26 dBc Bandwidth

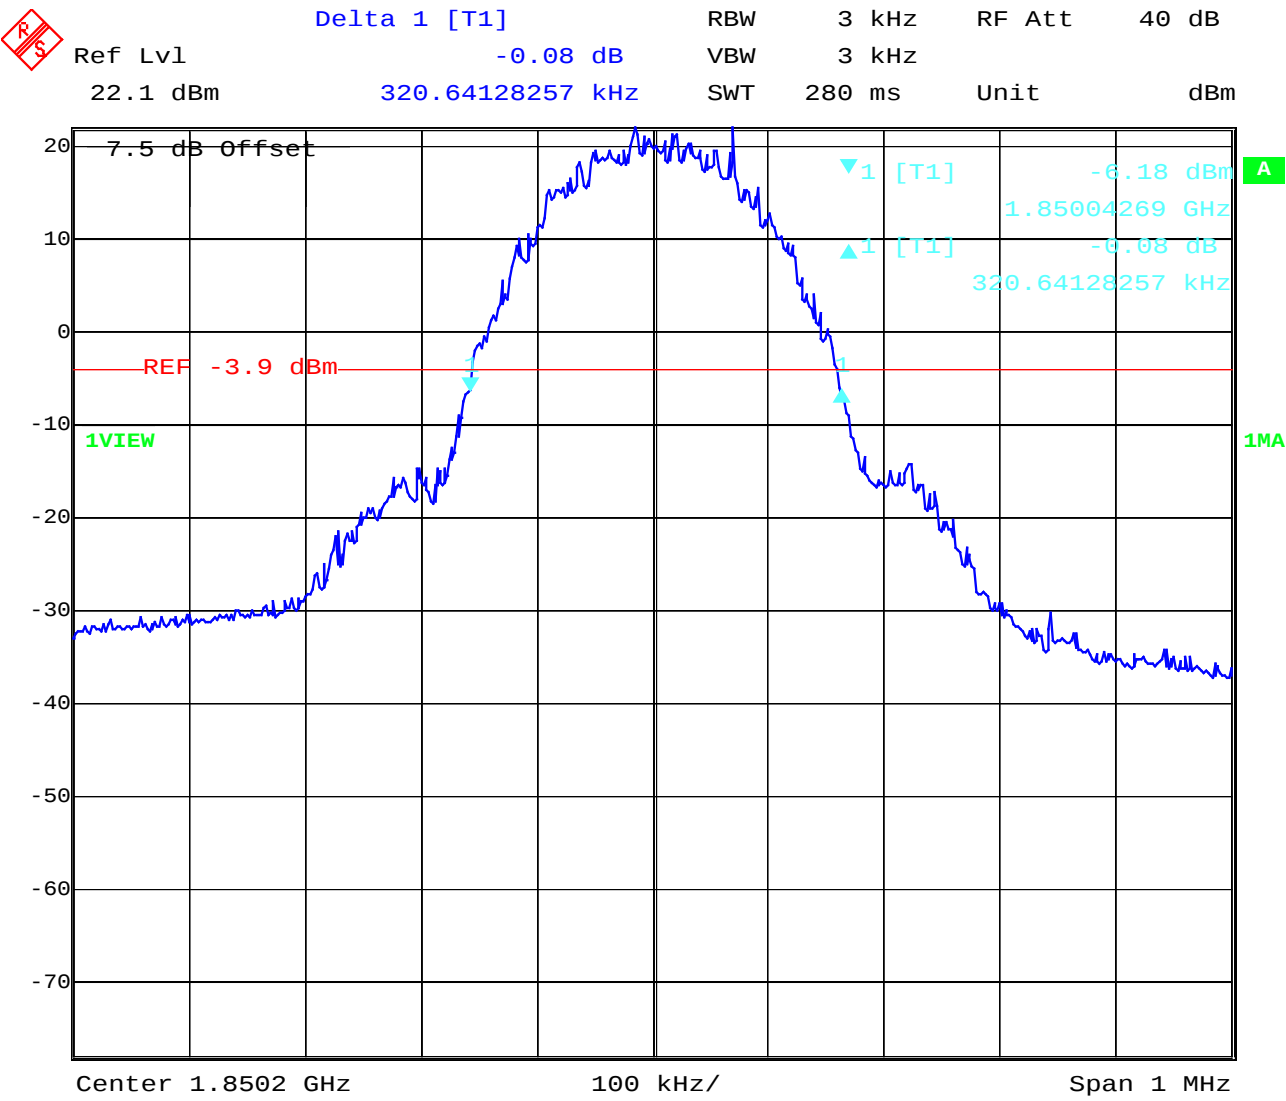

Date: 26.FEB.2002 13:09:36


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 661
99% Occupied Bandwidth

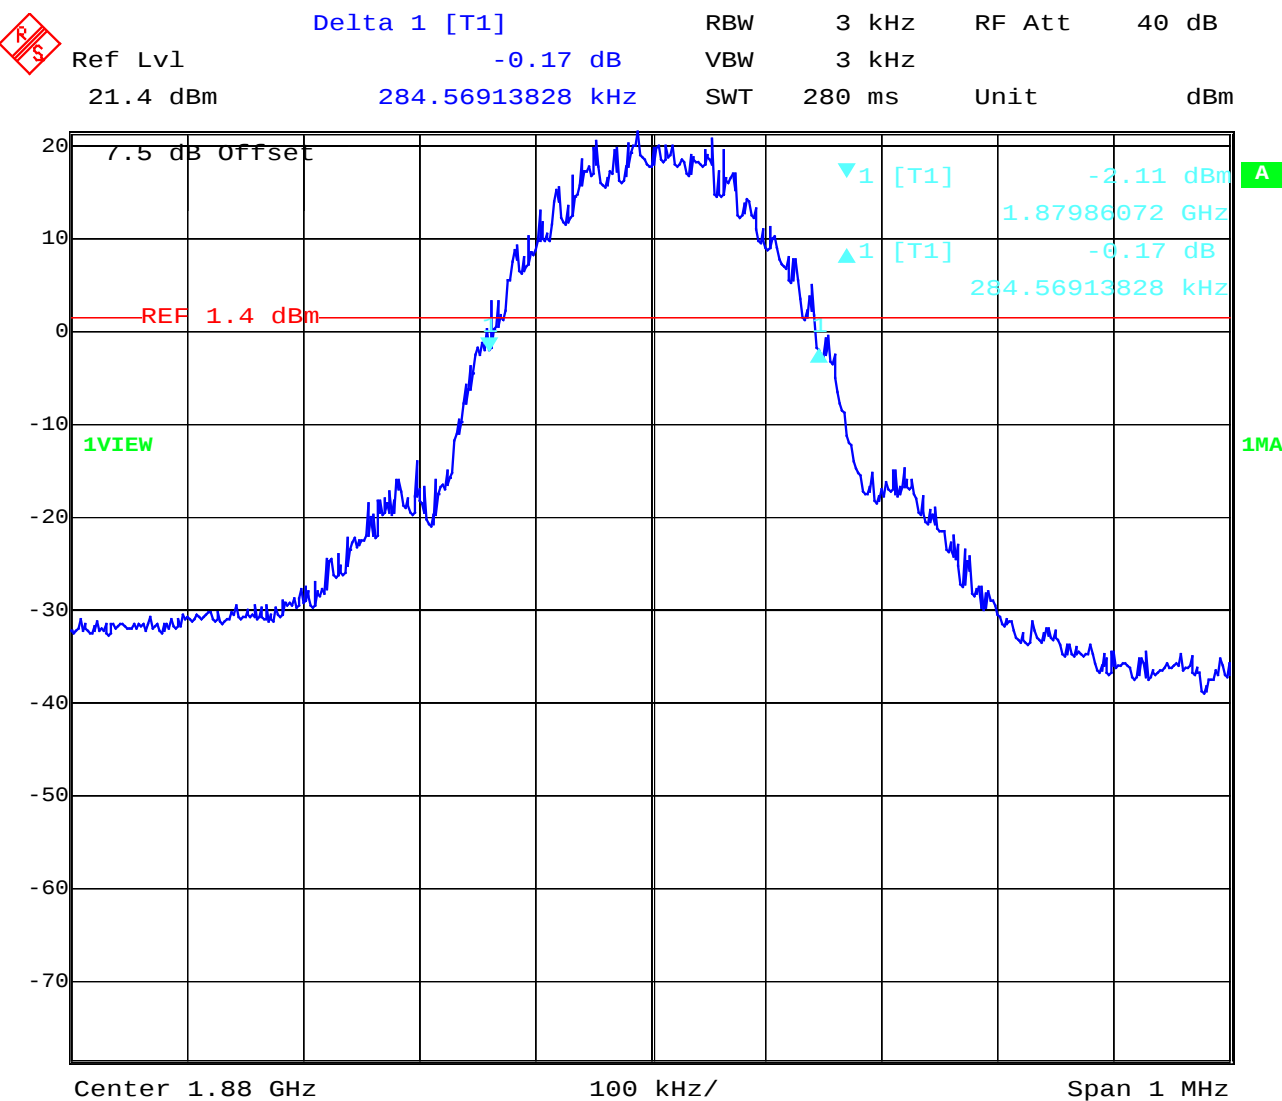

Date: 26.FEB.2002 13:13:16


Channel 661
-26 dBc Bandwidth

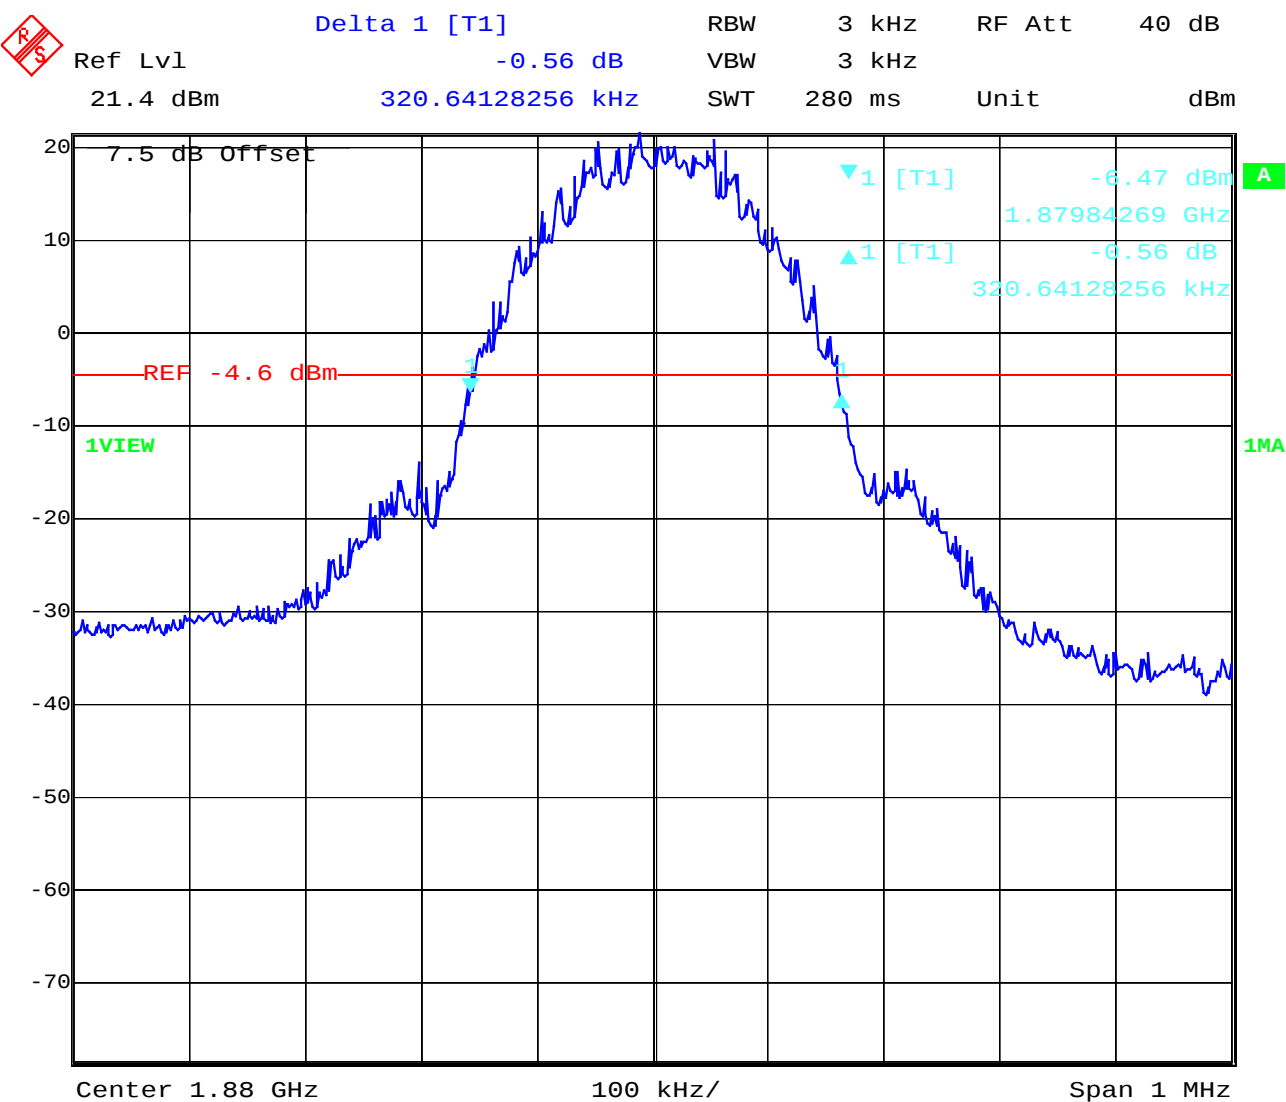

Date: 26.FEB.2002 13:12:33

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)


Channel 810
99% Occupied Bandwidth

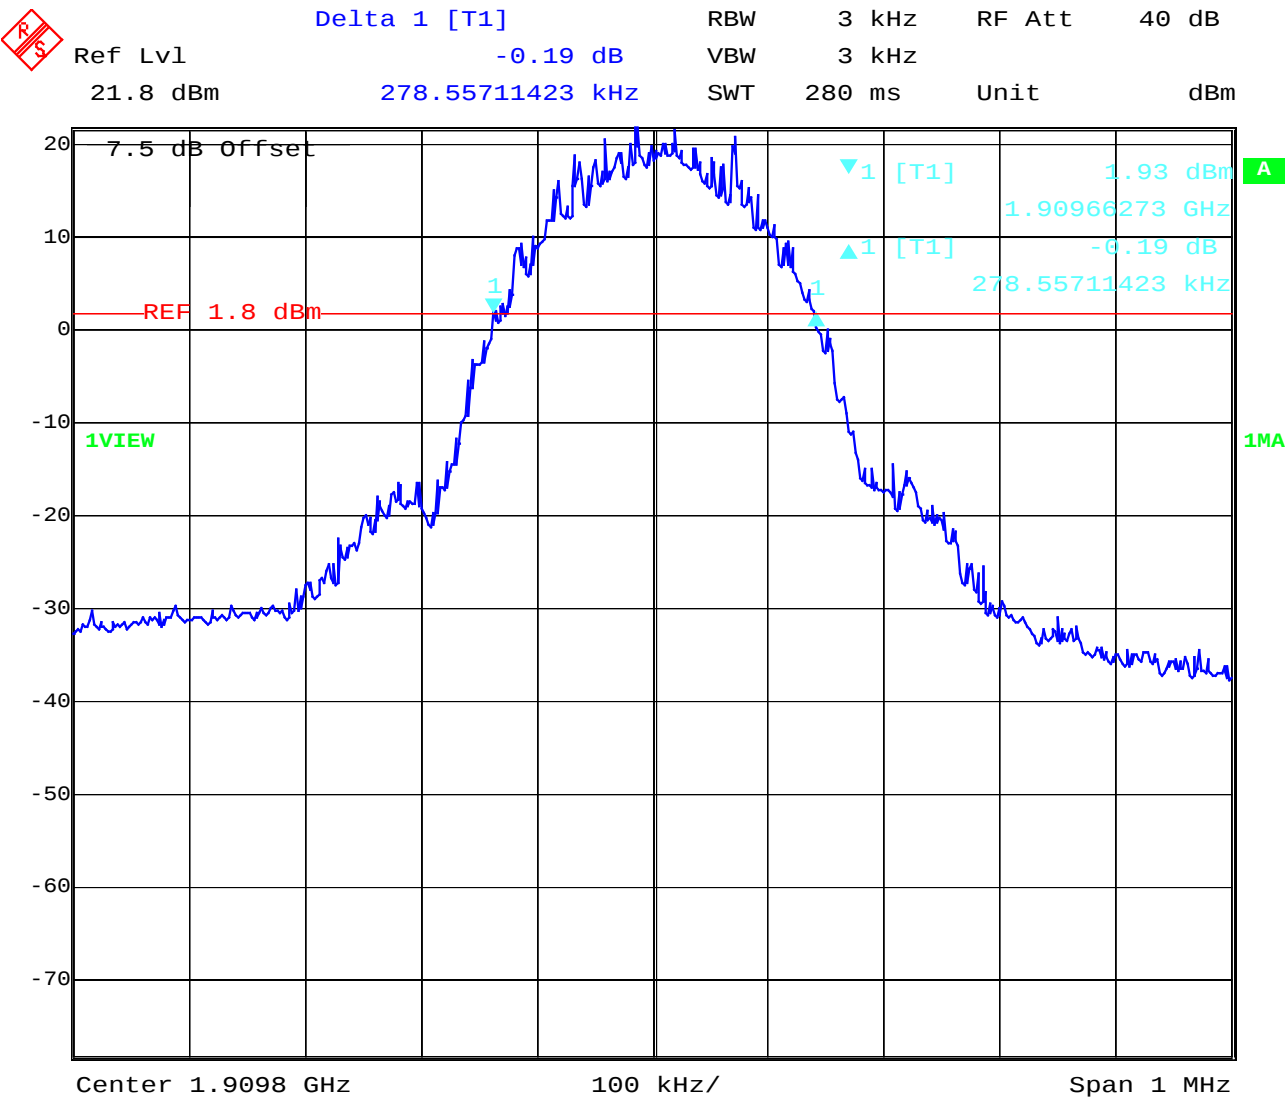

Date: 26.FEB.2002 13:15:57

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Channel 810 -26 dBc Bandwidth

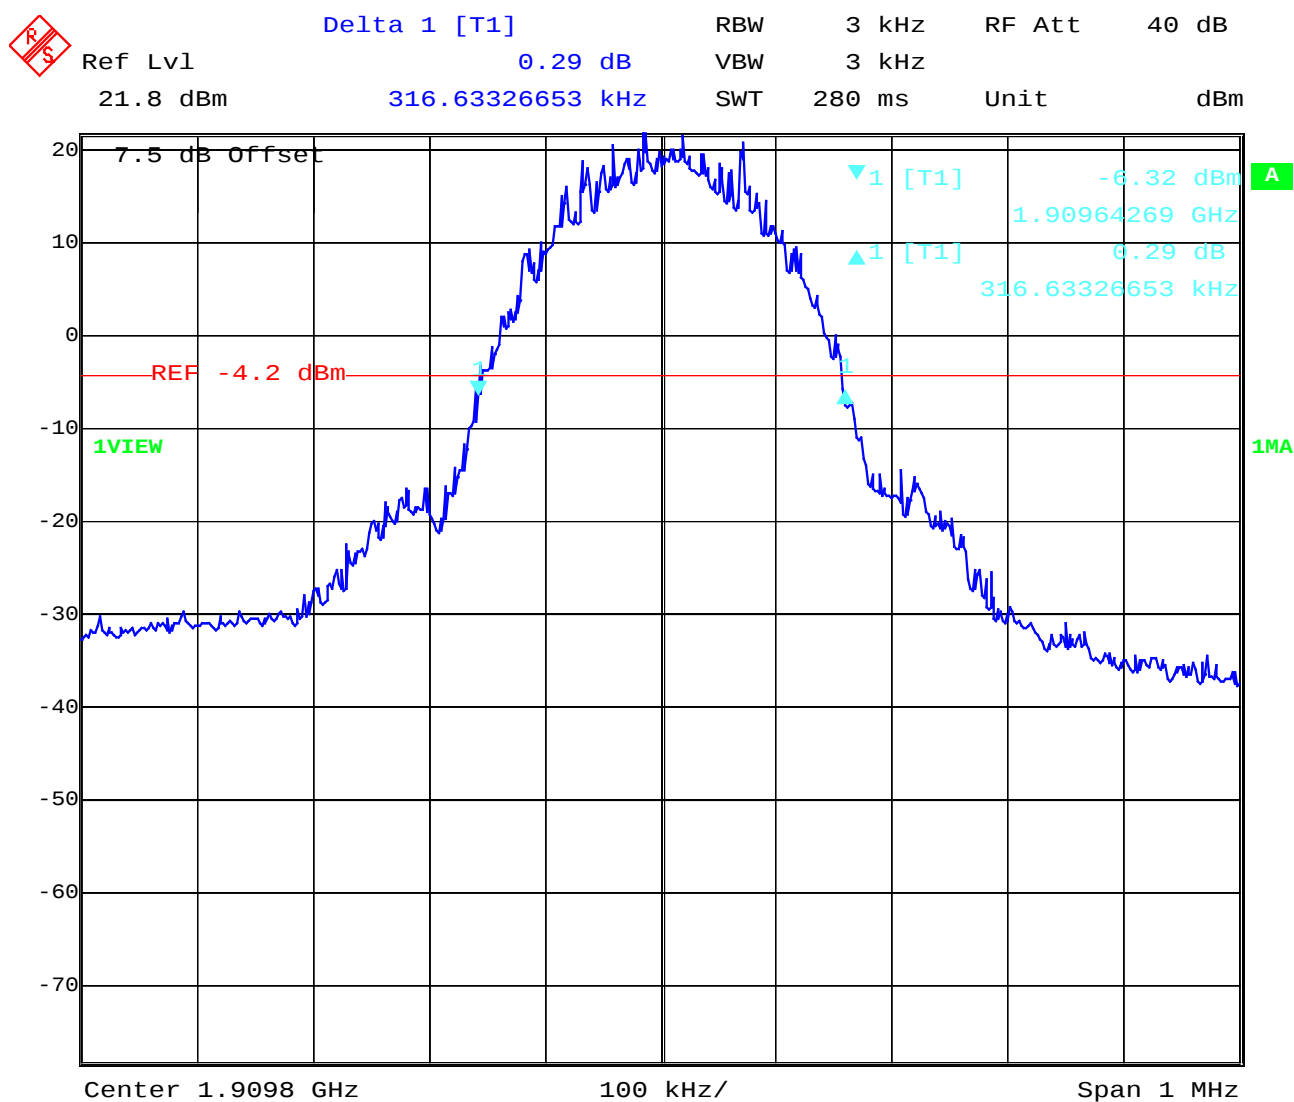


Date: 26.FEB.2002 13:16:37

Conducted emissions

§ 15.107/207

Line L1

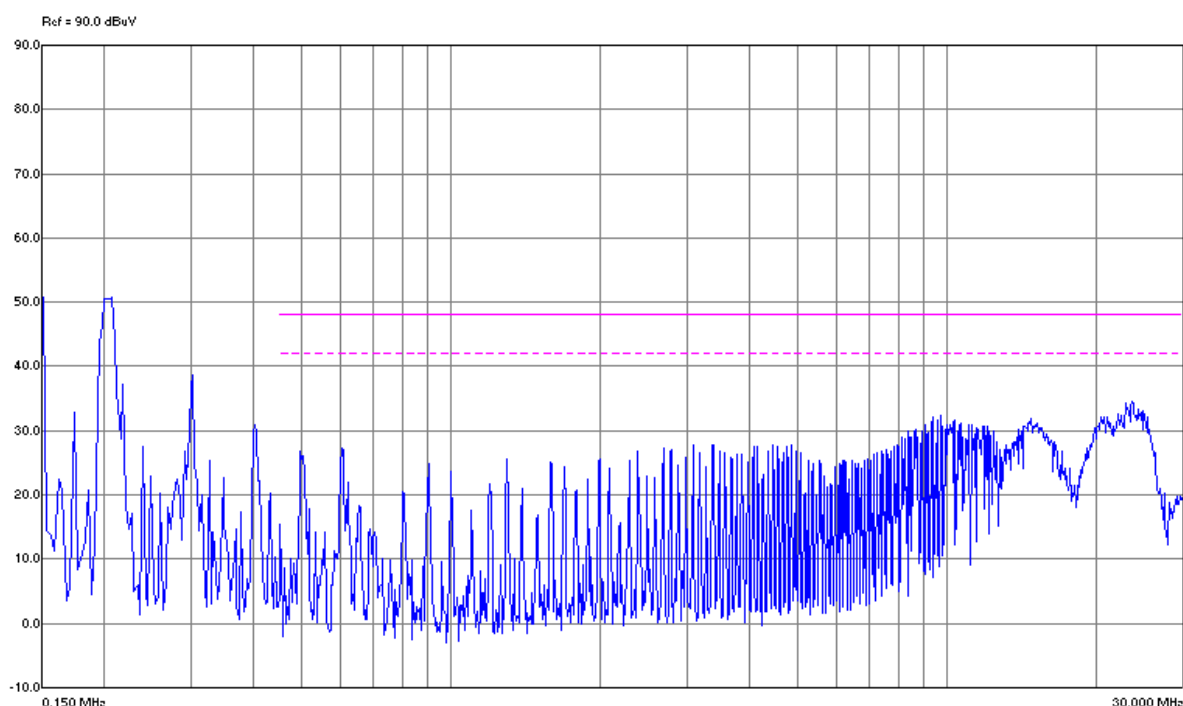

Frequency MHz	Peak dBuV	QP dBuV	Lim dBuV	QP dBuV	DelLim-QP dB	Avg dBuV	Lim dBuV	Avg dBuV	DelLim-Avg dB
23.000296	34.23		48.00	30.01	-17.99	48.00	21.37		-26.63
23.002885	33.77		48.00	28.62	-19.38	48.00	18.38		-29.62
23.205245	34.59		48.00	29.21	-18.79	48.00	19.89		-28.11
23.504735	33.58		48.00	28.71	-19.29	48.00	19.70		-28.30
23.612750	34.96		48.00	28.64	-19.36	48.00	22.51		-25.49
23.704887	34.51		48.00	29.46	-18.54	48.00	22.79		-25.21
23.735780	33.73		48.00	26.57	-21.43	48.00	20.74		-27.26
23.819942	34.63		48.00	28.66	-19.34	48.00	19.22		-28.78
24.319209	34.69		48.00	29.63	-18.37	48.00	22.93		-25.07
25.002053	33.56		48.00	28.35	-19.65	48.00	22.20		-25.80

Limits

SUBCLAUSE § 15.107 / 207

Frequency (MHz)	Conducted Limits (µV)
0.45 – 1.705	1000 / 60 dBµV (Class A)
1.705 – 30.0	3000 / 69.5 dBµV (Class A)
0.45 – 30.0	250 / 48 dBµV (Class B)


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

52 - 63

Conducted emissions

§ 15.107/207

Line N

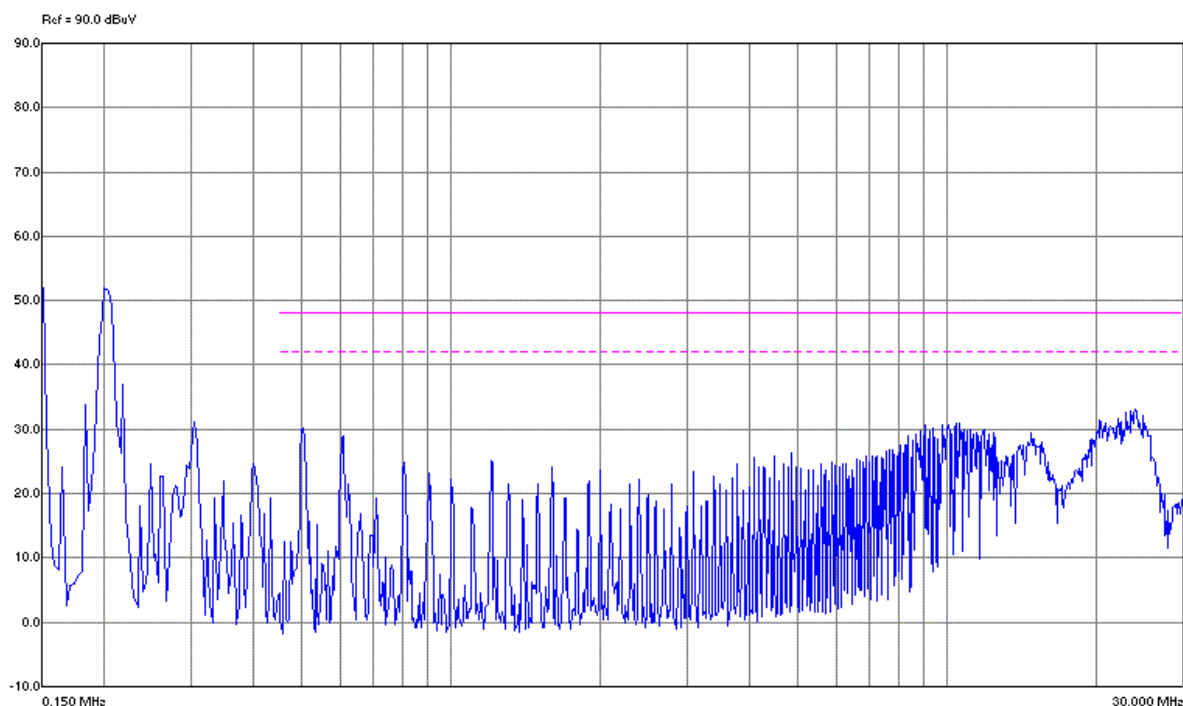

Frequency MHz	Peak dBuV	QP dBuV	Lim dBuV	QP dBuV	DelLim-QP dB	Avg dBuV	Lim dBuV	Avg dBuV	DelLim-Avg dB
20.435791	31.50		48.00	27.37	-20.63		48.00	21.11	-26.89
22.241226	32.13		48.00	28.57	-19.43		48.00	17.23	-30.77
23.040001	33.52		48.00	28.51	-19.49		48.00	20.96	-27.04
23.625134	34.02		48.00	30.00	-18.00		48.00	23.47	-24.53
23.734028	33.55		48.00	29.70	-18.30		48.00	23.17	-24.83
23.929129	33.69		48.00	27.28	-20.72		48.00	19.75	-28.25
24.118861	33.95		48.00	26.95	-21.05		48.00	21.30	-26.70
24.219293	33.70		48.00	27.96	-20.04		48.00	20.41	-27.59
24.422906	33.62		48.00	28.16	-19.84		48.00	21.93	-26.07
24.926843	32.68		48.00	26.78	-21.22		48.00	21.07	-26.93

Limits

SUBCLAUSE § 15.107 / 207

Frequency (MHz)	Conducted Limits (µV)
0.45 – 1.705	1000 / 60 dBµV (Class A)
1.705 – 30.0	3000 / 69.5 dBµV (Class A)
0.45 – 30.0	250 / 48 dBµV (Class B)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.


No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logger Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logger Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				

Test site

RADIATED EMISSIONS




Test site

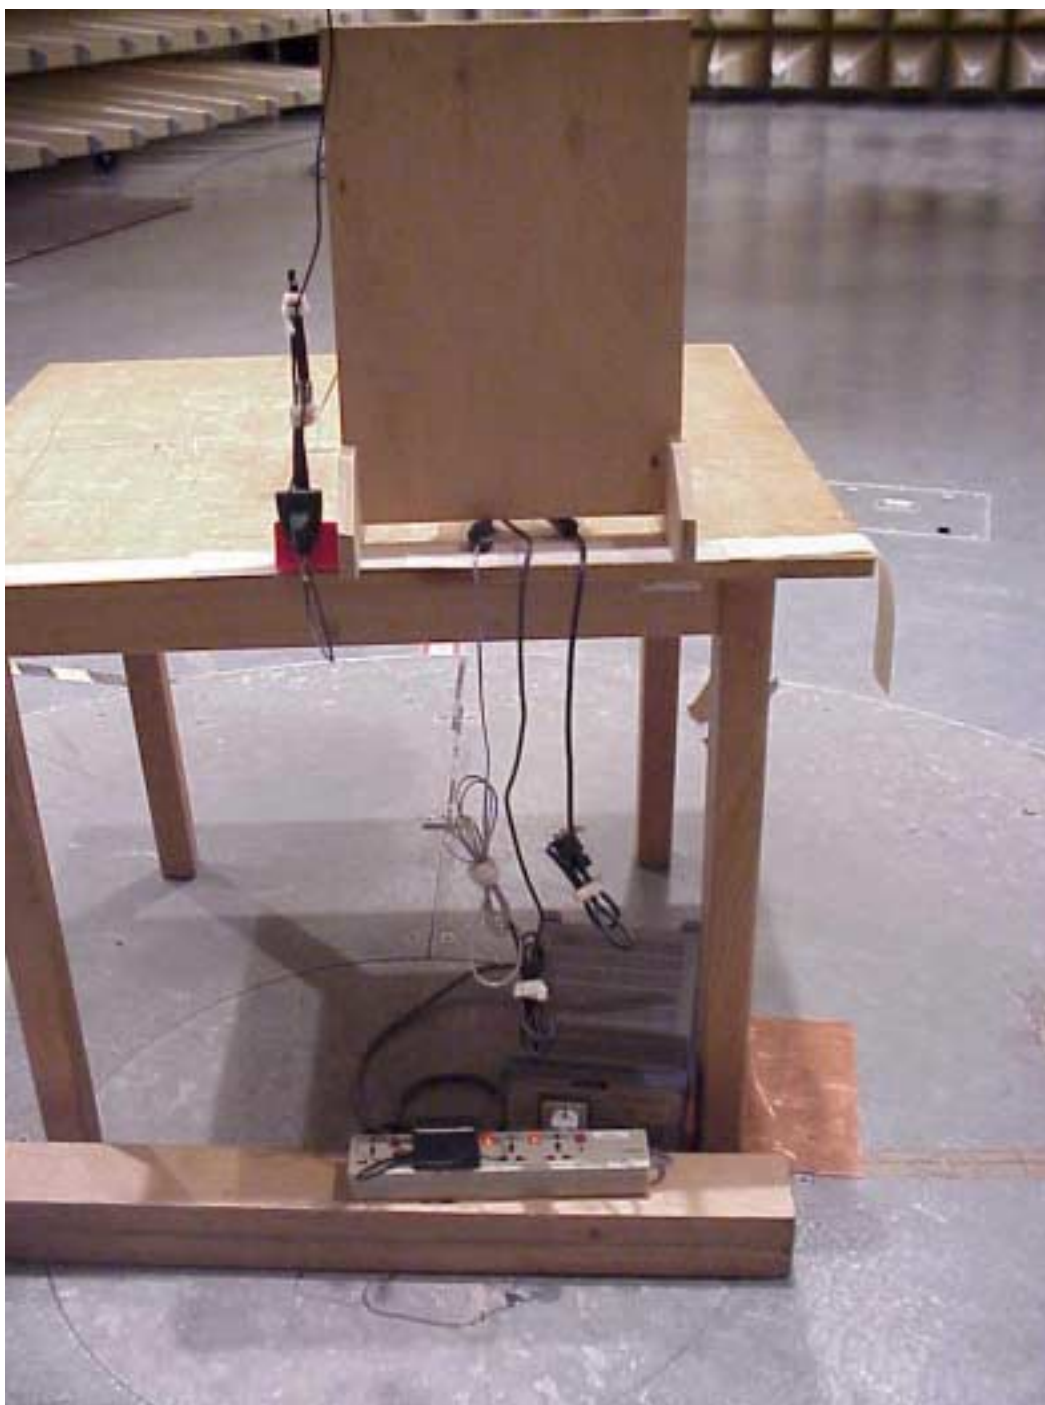

Test site



Test site

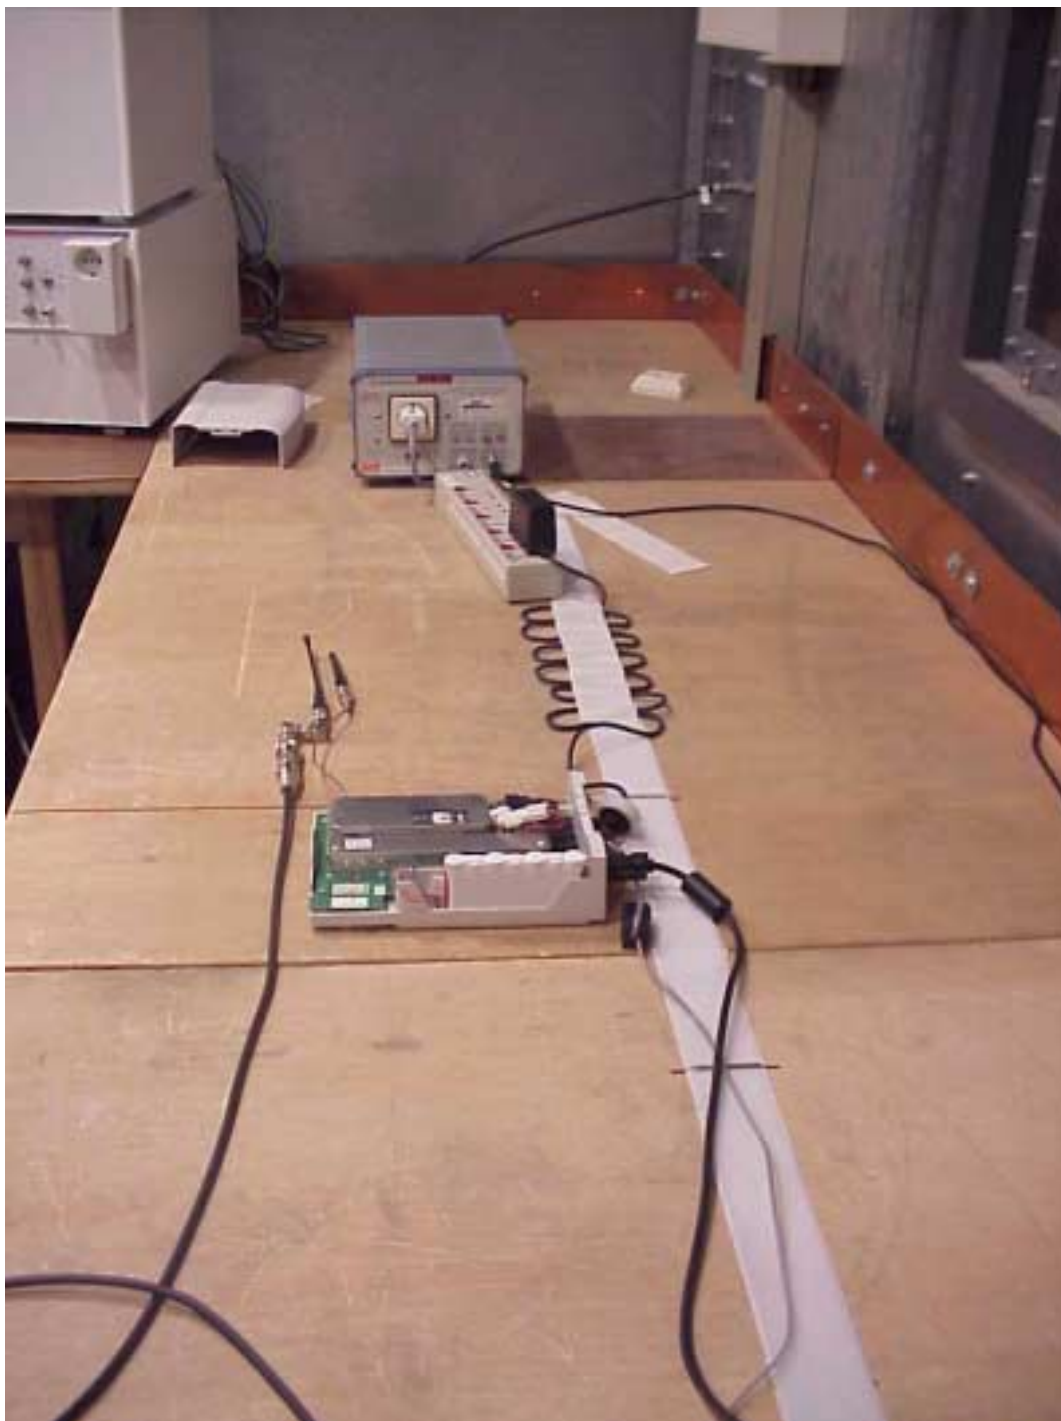

Photographs of the equipment

Photograph no.: 1



Photographs of the equipment

Photograph no.: 2



Photographs of the equipment

Photograph no.: 3



Photographs of the equipment

Photograph no.: 4

