

Gantner Electronic GmbH

TEST REPORT

SCOPE OF WORK

RADIO TESTING – ACCESS CONTROL READER [GR7.1310]

REPORT NUMBER

2240115KAU-008

ISSUE DATE

04-November-2021

PAGES

39

DOCUMENT CONTROL NUMBER

R_FCC 15-225_19-10 (30-October-2019)

© 2017 INTERTEK



TYPE: GR7.1310
DESCRIPTION: Access control reader
SERIAL NO (EUT 1): 2047000001
SERIAL NO (EUT 2)*: 2047000002

*The antenna of the RFID module was replaced by a terminating resistor.
All measurement results refer to the equipment which was tested

MANUFACTURER: Gantner Electronic GmbH
CUSTOMER NAME: Gantner Electronic GmbH
ADDRESS (CUSTOMER): Bundesstr. 12
AT-6714 Nüziders
AUSTRIA

REPORT NO: 2240115KAU-008

TEST RESULT: The equipment complies to 47 CFR Part 15, Subpart C, Intentional radiators, section 15.225 / RSS-210, Issue 10 and RSS-GEN, Issue 5 for 13.56 MHz RFID module (Referring to the operating modes specified in this report).

TEST LABORATORY: Intertek Deutschland GmbH
Innovapark 20, 87600 Kaufbeuren
Germany

FCC DESIGNATION NUMBER: DE0014

FCC TEST FIRM REGISTRATION NUMBER: 359260

ISED CAB IDENTIFIER: DE0014
ISED #: 24854

TEST ENGINEER: M. Bensaid
Project Engineer

REVIEWER: R. Dressler
Technical Manager EMC/ Radio







Details about Accreditations/Acceptances


EMC / Radio National

	<p>The Intertek Deutschland EMC-Lab is accredited by the Deutsche Akkreditierungsstelle GmbH (Dakks)</p> <p>Registration Number (EMC general): D-PL-12085-01-01</p> <p>Registration Number (EMC Med): D-PL-12085-01-03</p> <p>Registration Number (EMC Canada): D-PL-12085-01-04</p> <p>Registration Number (EMC FCC): D-PL-12085-01-05</p>
---	---

International

	<p>The Intertek Deutschland EMC-Lab is accepted to participate in the IECEE (IEC Conformity assessment for Electrotechnical Equipment and Components) CB-Scheme</p> <p>CB Test Laboratory: TL118</p>
	<p>The Intertek Deutschland EMC-Lab is listed at the Federal Communications Commission (FCC)</p> <p>Designation Number: DE0014</p> <p>Test Firm Registration Number: 359260</p>
 <p>BNetzA-CAB-16/21-10</p>	<p>The <i>Bundesnetzagentur</i> recognizes Intertek Deutschland GmbH as Conformity Assessment Body in the sector electromagnetic compatibility (EMC).</p>
	<p>The Intertek Deutschland EMC-Lab is accredited for Innovation, Science and Economic Development Canada (ISED)</p> <p>ISED CAB IDENTIFIER: DE0014</p> <p>ISED #: 24854</p>

Automotive

 <p>Anerkennungsstelle</p> <p>Anerkannt unter KBA-P 00046-03</p>	<p>The Intertek Deutschland EMC-Lab is recognized as technical service of the Kraftfahrt-Bundesamt (KBA)</p> <p>Registration Number: KBA-P 00046-03</p>
---	--

SECTION 1 CONTENTS

SECTION 2	MEASUREMENT AND TEST SPECIFICATION	5
SECTION 3	GENERAL INFORMATION	6
SECTION 4	SUMMARY OF TESTING	7
4.1	General annotation.....	7
4.2	Measurement uncertainty.....	7
4.3	Document History.....	7
SECTION 5	TEST RESULTS – OVERVIEW	8
SECTION 6	INFORMATION ABOUT THE EUT	9
6.1	Description of the EUT	9
6.2	Power interface	10
6.3	Peripheral devices used for testing	10
6.4	Configuration mode.....	10
6.5	Operation mode.....	10
6.6	Clock frequencies of the EUT	11
6.7	Supply and interconnecting cables used for testing.....	11
6.8	Antenna configuration	11
6.9	Block diagram of the test setup for radiated emissions	11
6.10	Block diagram of the test setup for conducted emissions.....	12
6.11	Block diagram of the test setup for 20 dB bandwidth-, Occupied bandwidth- and Frequency Stability- test	12
SECTION 7.....	13
7.1	Conducted emissions	13
7.2	Field strength 13.110 MHz – 14.010 MHz (Emission Mask)	18
7.3	Radiated emissions < 30 MHz	22
7.4	Radiated emissions 30 MHz to 1 GHz	28
7.5	Frequency stability measurement	32
7.6	20 dB bandwidth.....	34
7.7	Occupied bandwidth.....	36
7.8	Measurement uncertainty evaluation	38

SECTION 2

MEASUREMENT AND TEST SPECIFICATION

47 CFR Part 15, Subpart C, Intentional radiators, section 15.207 and section 15.225 /
RSS-210, Issue 10 and RSS-GEN, Issue 5

Test methods in:

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

No additions, deviations or exclusions have been made from standards and accreditation.

The test results detailed in this report apply only to the GR7.1310 with the test setup described. Any modification such as a change, addition to or inclusion of another device into this product will require an additional evaluation.

The support equipment listed as part of the emission tests is required to properly exercise and test the device under test.

SECTION 3

GENERAL INFORMATION

Possible test case verdicts:

Test case does not apply to the test object: N/A (Not Applicable)

Test object does meet the requirement: P (Pass)

Test object does not meet the requirements: F (Fail)

Samples arrived: 2020-11-27 (EUT 1) and 2021-01-20 (EUT 2)

Testing: 2020-12-09 to 2021-10-27

Decimal separator: ☒ Point ☐ Comma

Environmental conditions during testing: Temperature: 15 °C – 35 °C

Humidity: 20 % - 60 %

Atmospheric pressure: 900 mbar – 1000 mbar

If explicitly required by a basic standard the measured climatic conditions are documented in the corresponding test section.

Test sites:

Measurement Chamber	Type of chamber	IC Site filing #
ANECHOIC CHAMBER 1	Semi-anechoic 3 m	24854

SECTION 4

SUMMARY OF TESTING

4.1 General annotation

The tests were performed in the order of the right column in the “Test Results – Overview” table.

At least at one emission test the margin to the limit is less than 3 dB. A minimum margin of 3 – 6 dB is recommended for a serial production.

4.2 Measurement uncertainty

For each test method, an uncertainty evaluation was carried out. The results of the evaluation can be provided upon request from Intertek Deutschland GmbH (see section 7.7).

4.3 Document History

REVISION	DATE	REPORT	CHANGES	AUTHOR
Initial release	2021-11-04	2240115KAU-008	Initial issue	MBE

SECTION 5

TEST RESULTS – OVERVIEW

EMISSION	VERDICT	DATE	NO
Conducted emissions (0.15 MHz – 30 MHz)	P	2021-01-25 2021-05-29	5 6
Field strength (13.110 MHz – 14.010 MHz)	P	2020-12-12	2
Radiated emissions (< 30 MHz)	P	2020-12-12	1
Radiated emissions (30 MHz – 1 GHz)	P	2021-10-22	7
Frequency Stability Test	P	2020-12-18	3
20 dB bandwidth	P	2021-10-27	8
Occupied bandwidth test	P	2020-12-18	4

SECTION 6

INFORMATION ABOUT THE EUT

6.1 Description of the EUT

Device tested as:

☒ table-top EUT

☐ floor-standing EUT

Dimensions:

Height:

Width:

Length:

14.8 cm

4.8 cm

2.3 cm

Firmware version:

Special Version for Testing

Hardware version:

2.1

EUT version:

☒ Production

☐ Prototype

☐ Used

Description: the GR7.1310 is a Multifunctional Access Control Reader. The multi-technology reader reads and writes all popular RFID technologies (LEGIC and MIFARE) and can read the unique numbers of many other identification technologies and RFID standards. The EUT has a RFID module.

6.1.1 Technical data of the RFID module

Transmitter frequency range: 13.56 MHz

Frequency agile or hopping:

☐ Yes

☒ No

Antenna:

☒ Internal antenna

☐ External antenna

Antenna connector:

☒ None, internal antenna

☐ Yes, type

Antenna type:

Internal PCB antenna

Antenna gain:

-

Power rating:

5 VDC / 130 mA max.

Channel spacing:

-

Receiving only mode supported:

☐ Yes

☒ No

6.1.2 Photo of the rating plate and of the EUT

GR7.1310



6.2 Power interface

MODE	VOLTAGE (V)	FREQUENCY	COMMENT
Rated	12 – 24	DC	-
1	120 V (AC) / 24 V (DC)	60 Hz (AC) / DC	Over the ISK 200 via RS 485

6.3 Peripheral devices used for testing

DEVICE	MANUFACTURER	TYPE	SN	FCC ID
Power supply	Gantner	ISK 200	06460376	-
Notebook	HP	HP ProBook 6560b	5CB20246BZ	QDS-BRCM 1043

6.4 Configuration mode

MODE	DESCRIPTION
1	The EUT was placed on the table and was connected to the ISK 200 (see section 6.9).
2	The EUT was placed on the table and was connected to the ISK 200 (see section 6.10).
3	The EUT was placed in the climatic chamber (see section 6.11).

6.5 Operation mode

MODE	DESCRIPTION
1	Normal operation and the RFID module of the EUT was in continuous wave mode.
2	Normal operation and the antenna of the RFID module was replaced by a terminating resistor.
3	Normal operation and transmission mode and the RFID tag was placed in front of the EUT.

6.6 Clock frequencies of the EUT

SOURCE	FREQUENCY
Microcontroller	f_{CPU} : 32 MHz, 2 Crystals: 8 MHz, 32.786 kHz
RFID Reader	13.56 MHz


6.7 Supply and interconnecting cables used for testing

LINE	LENGTH (cm)	SHIELDING	FERRITE	TERMINATION
RS 485 cable (1)	300	Y	N	-
RS 485 cable (2)	100	Y	N	-


6.8 Antenna configuration

DESCRIPTION	
<input type="checkbox"/>	Equipment with an external antenna connector
<input checked="" type="checkbox"/>	Equipment without an external antenna connector (integral antenna)
<input type="checkbox"/>	Equipment with more than one antenna


6.9 Block diagram of the test setup for radiated emissions

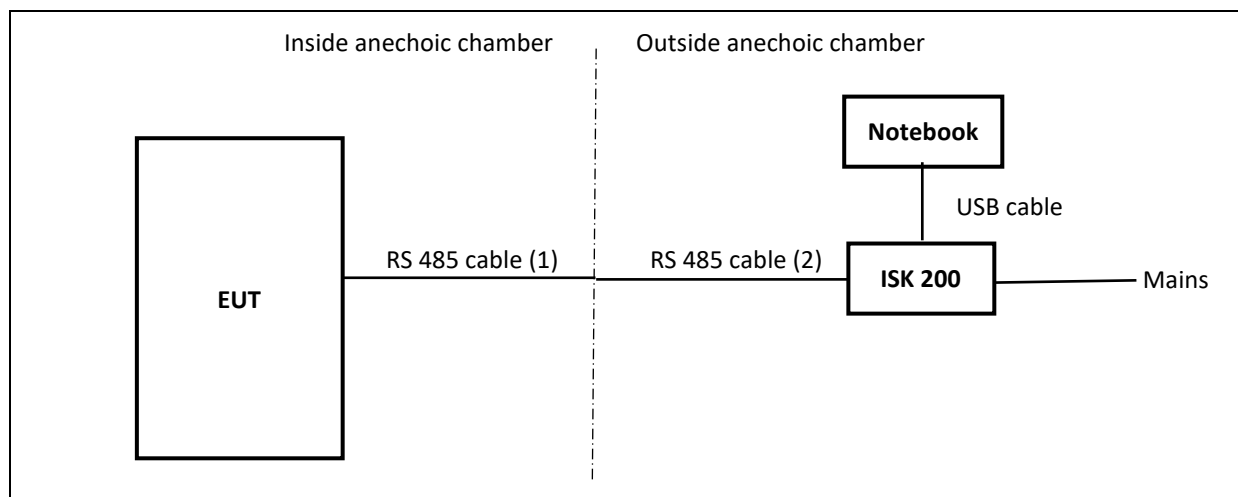

6.10 Block diagram of the test setup for conducted emissions

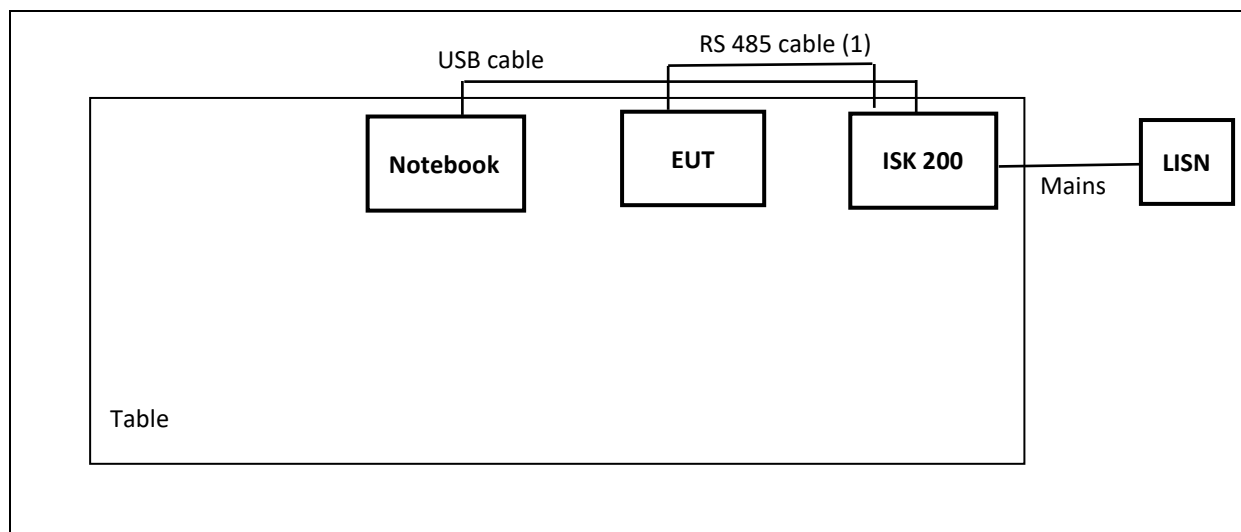

6.11 Block diagram of the test setup for 20 dB bandwidth-, Occupied bandwidth- and Frequency Stability-test

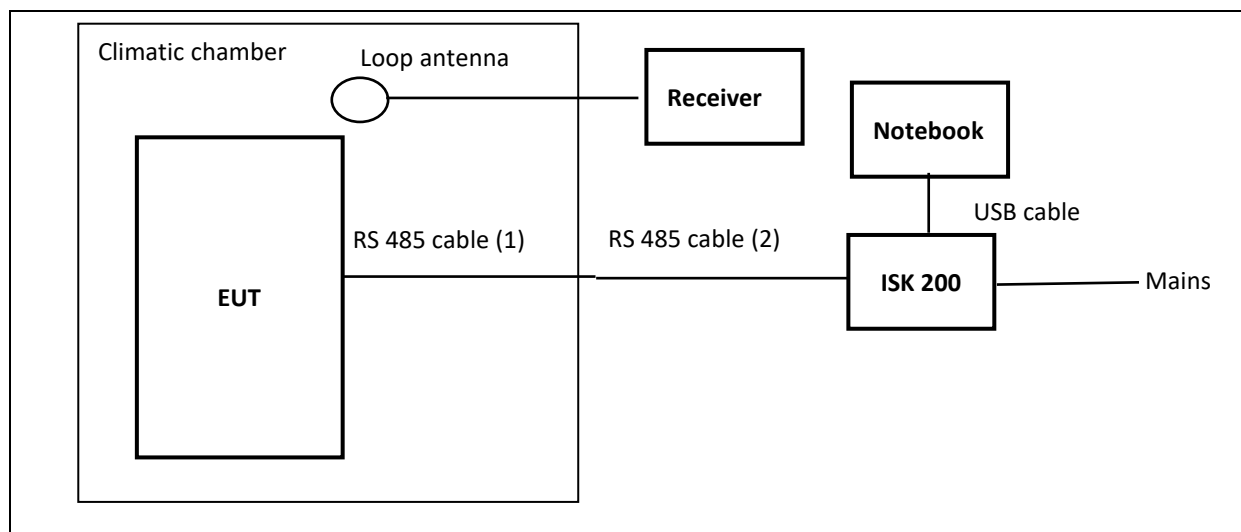

SECTION 7

7.1 Conducted emissions

NORMATIVE REFERENCES			RESULT
Limits according to:	FCC §15.207 RSS-210, Issue 10		P
Methods of measurement according to:	ANSI C63.10 RSS-Gen, Issue 5		
Equipment mode	Power interface	1	
	EUT configuration mode	2	
	Operation mode	1 and 2	
Test requirements	Frequency range	150 kHz – 30 MHz	

Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Shielded cabin	ETS LINDGREN	RFSD 100	3598	PM KF 2955-2	-
Pulse Limiter 10 dB 9 kHz – 200 MHz	Schwarzbeck	VTSD 9561-F N	9561-F N242	PM KF 3059	2020-12 (1 year)
Receiver 9 kHz – 7 GHz	Rohde & Schwarz	ESR7	101757	PM KF 3371	2020-04 (1 year) 2021-04 (1 year)
V-Artificial mains- network, 2 Line	Rohde & Schwarz	ESH3-Z5	863367/018	PM KF 0142	2019-10 (2 years)
Test software	Rohde & Schwarz	EMC 32 V.8.54	-	PM KF 2983	-

Comment


In the following diagram, the N and L line are merged.

Measurement results – Conducted emissions:

Common Information

EUT:	GR7.1310
Project No.:	40115
Test description:	Conducted Emissions
Test standard:	FCC 15 C
Tested port:	Mains
Test verdict:	Pass
Operating conditions:	Normal operation and the RFID module of the EUT was in continuous wave mode.
Operator name:	MBE
Date of testing:	29.05.2021

EN-CE-R32-LN01

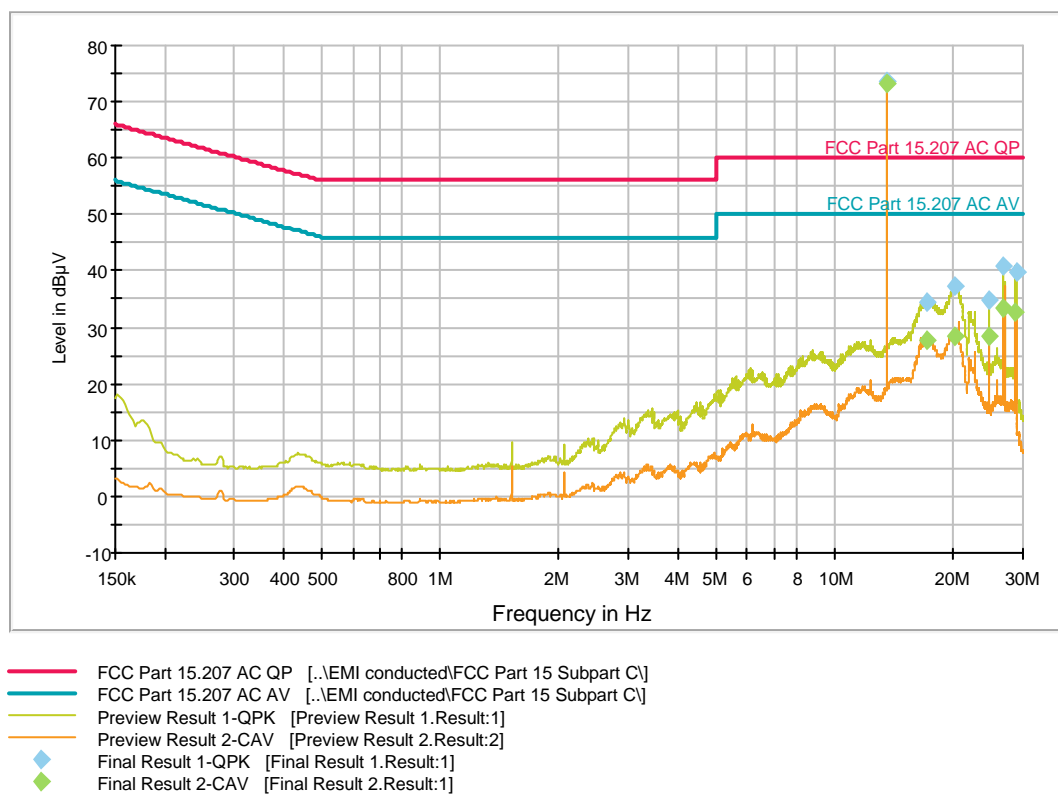

Final Result 1

Frequency (MHz)	QuasiPeak-ClearWrite (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
13.560000	73.5	GND	N	10.7	-13.5	60.0	
17.083500	34.6	GND	N	10.8	25.4	60.0	
20.098500	37.3	GND	N	11.0	22.7	60.0	
24.688500	34.8	GND	N	11.1	25.2	60.0	
26.718000	41.0	GND	N	11.1	19.0	60.0	
...

Final Result 2

Frequency (MHz)	Coverage-ClearWrite (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
13.560000	73.1	GND	N	10.7	-23.1	50.0	
17.097000	27.6	GND	N	10.8	22.4	50.0	
20.258250	28.5	GND	N	11.0	21.5	50.0	
24.645750	28.3	GND	N	11.1	21.7	50.0	
26.724750	33.4	GND	N	11.1	16.6	50.0	
...

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
Measurement Type: 2 Line LISN
Frequency Range: 150 kHz – 30 MHz
Graphics Level Range: 0 dBμV - 80 dBμV

Preview Measurements:
Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz – 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz – 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB

Receiver: [ESR 7]


Data Reduction:
Limit Line #1: FCC Part 15.207 AC QP
Limit Line #2: FCC Part 15.207 AC AV
Peak Search: 6 dB , Maximum Results: 10
Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
Acceptance Offset: -10 dB
Maximum Number of Results: 20
After Data Reduction: Interactive data reduction

Report Settings:
Report Template: Standard Report_EMC KF_Conducted Emission

Common Information

EUT:	GR7.1310
Project No.:	40115
Test description:	Conducted Emissions
Test standard:	FCC 15 C
Tested port:	Mains
Test verdict:	Passed
Operating conditions:	Continuous normal operation. The RFID module was replaced by a terminating resistor
Operator name:	MBE
Date of testing:	25.01.2021

EN-CE-R32-LN01

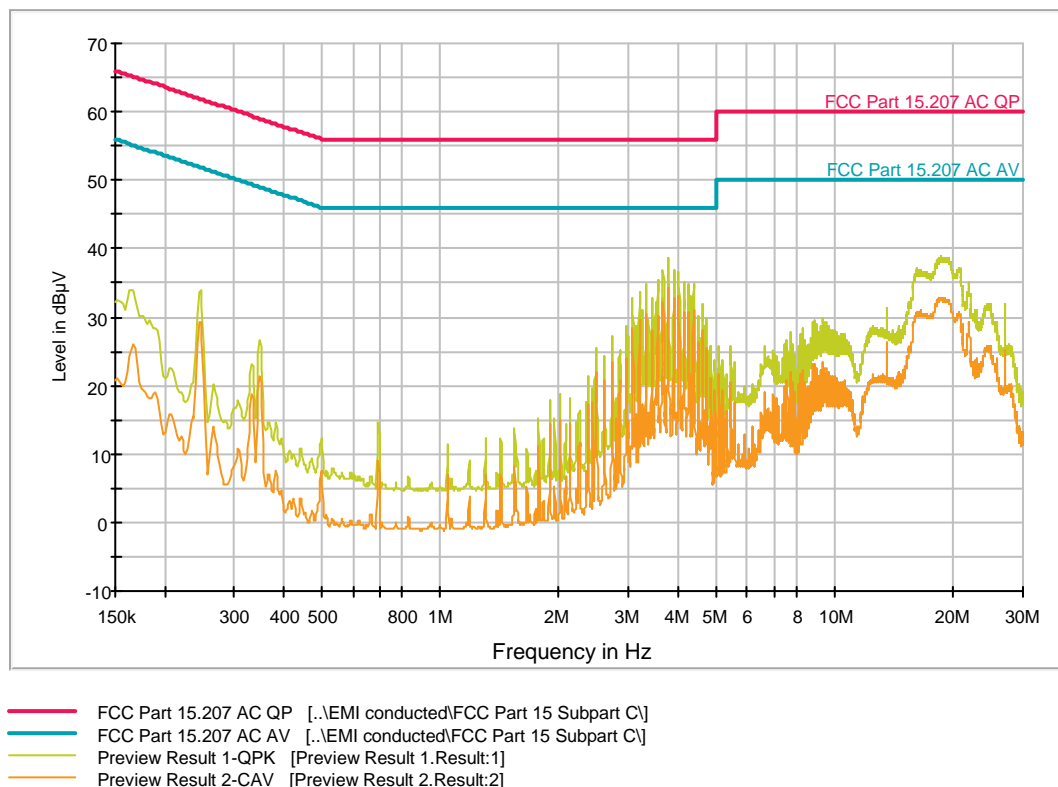

EMI Auto Test Template: EN-CE-R32-LN01

Hardware Setup: EN-CE-R32-LN01
Measurement Type: 2 Line LISN
Frequency Range: 150 kHz – 30 MHz
Graphics Level Range: 0 dBμV - 80 dBμV

Preview Measurements:
Scan Test Template: EN-CE-R32-LN01_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz – 150 kHz	50 Hz	QPK; CAV	200 Hz	1 s	20 dB
150 kHz – 30 MHz	2.25 kHz	QPK; CAV	9 kHz	1 s	0 dB

Receiver: [ESR 7]

Data Reduction:
Limit Line #1: FCC Part 15.207 AC QP
Limit Line #2: FCC Part 15.207 AC AV
Peak Search: 6 dB , Maximum Results: 10
Subrange Maxima: 10 Subranges , Maxima per Subrange: 1
Acceptance Offset: -10 dB
Maximum Number of Results: 20
After Data Reduction: Interactive data reduction

Report Settings:
Report Template: Standard Report_EMC KF_Conducted Emission

7.2 Field strength 13.110 MHz – 14.010 MHz (Emission Mask)

NORMATIVE REFERENCES			RESULT
Limits according to:	FCC §15.225 (a) – (c) RSS-210, Issue 10, section B4		P
Methods of measurement according to:	ANSI C63.10, section 6.3, 6.4 RSS-Gen 6.13, 8.9		
Equipment mode	Power interface	1	
	EUT configuration mode	1	
	Operation mode	1	
Test requirements	Frequency range	13.110 MHz – 14.010 MHz	
	Measurement time	1 s	
	Antenna height	1 m	

Limits

The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31).

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)	Field strength (dBμV/m)	Measurement distance (m)
13.110 – 13.410	106	40.5	30	80.5	3
13.410 – 13.553	334	50.5	30	90.5	3
13.553 – 13.567	15848	84.0	30	124.0	3
13.567 – 13.710	334	50.5	30	90.5	3
13.710 – 14.010	106	40.5	30	80.5	3

Test setup details

Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to 10 kHz or 9 kHz CISPR. The video bandwidth shall be at least three times greater than the resolution bandwidth.

The test was carried out automatically by the test receiver.

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector.


Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Semi-Anechoic chamber (30 – 1000 MHz)	Siepel	REF W460SLB	-	PM KF 1150-01	2019-12 (3 years)
Turntable	Inn-Co	-	-	PM KF 2949-04	-
Tower	Inn-Co	MA4484-XPET	-	PM KF 2949-03	-
Controller	Inn-Co	CO 3000	4970815	PM KF 2949	-
Receiver 9 kHz – 7 GHz	Rohde & Schwarz	ESR7	101757	PM KF 3371	2020-04 (1 year)
Loop antenna 9 kHz- 30 MHz	Rohde & Schwarz	HFH2-Z2	881058/48	PM KF 1401	2020-08 (1 years)
Test software	Rohde & Schwarz	EMC 32 V.10.50.40	-	PM KF 2983-2	-

Measurement results – Field strength 13.110 MHz – 14.010 MHz (Emission Mask):

Common Information

EUT:	GR7.1310
Test Verdict:	Passed
Test Description:	FCC Part 15 C, field strength
Operating Conditions:	The RFID module of the EUT was in continuous wave mode
Operator Name:	MBE
Project Number:	40115
Date	12.12.2020

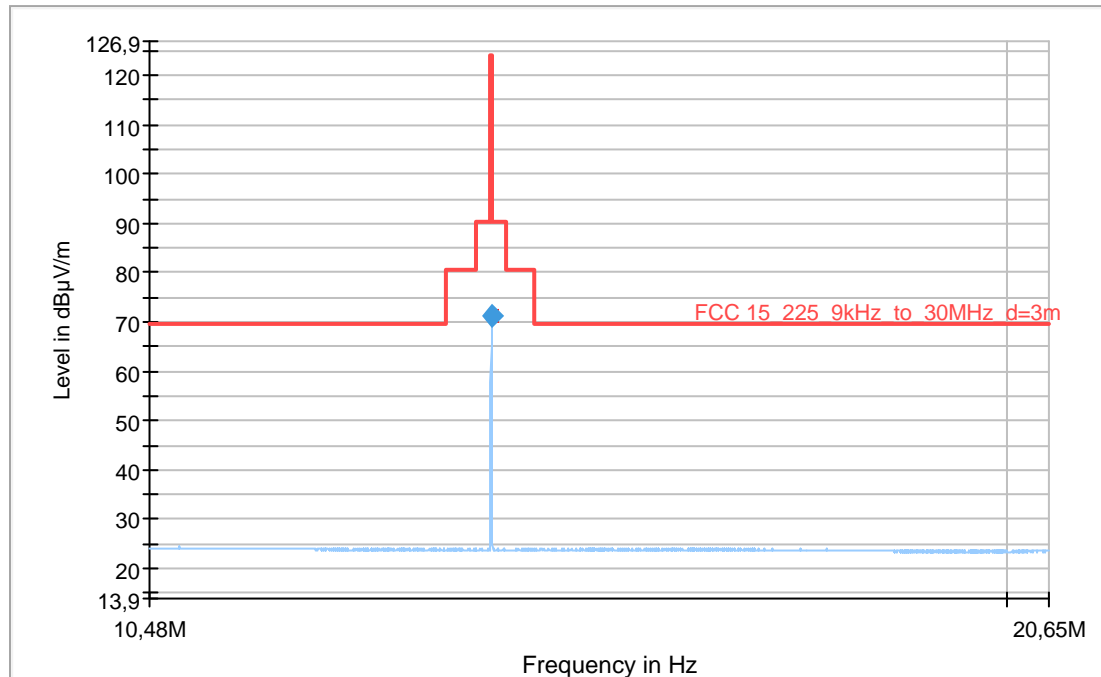

Preview Result 1-QPK [Preview Result 1.Result:1]
 * Critical_Freqs AVG [Critical_Freqs.Result:5]
 * Critical_Freqs QPK [Critical_Freqs.Result:4]
 FCC 15_225_9kHz_to_30MHz_d=3m [.\zF radiated\FCC Part 15C]
 ◆ Final_Result QPK [Final_Result.Result:4]
 ◆ Final_Result AVG [Final_Result.Result:5]

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
13.560000	71.38	---	124.00	52.62	1000.0	9.000	H	242.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
13.560000	20	-

Comment

The RFID transmitter was operated in CW mode. Therefore, the bandwidth of the transmitting signal is smaller than the measuring bandwidth of the measuring receiver. Thus, a measurement with a larger measurement bandwidth was not necessary.

EMI Auto Test Template: FCC-RE-R17-AN23

Hardware Setup: EN-RE-R12-AN23
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 9 kHz – 30 MHz
Graphics Level Range: 0 dBμV/m - 130 dBμV/m

Preview Measurements:
Antenna height: 0 – 1000 cm , Step Size = 0 cm , Positioning Speed = 1
Polarization: H + V
Turntable position: 0 – 352 deg , Step Size = 22 deg , Positioning Speed = 8
Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz – 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz – 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 9 kHz – 30 MHz. It includes automatic turntable of radius 2 m. It enables manual and fully automatic measurements.

To find the highest level of radiation

- the height of the antenna is 1m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation.

The calculations are performed automatically by the measurement software EMC 32.

As example consider the following input values and result:

FREQUENCY (MHZ)	RECEIVER READING U (dBμV)	ANTENNA FACTOR AF (dB/m)	CABLE ATTENUATION A (dB)	CORRECTION ANTENNA + CABLE (dB)	RADIATED FIELD STRENGTH E (dBμV/m)
30.0	20	20.6	0.8	21.4	41.4

$$E = U + AF + A$$

7.3 Radiated emissions < 30 MHz

NORMATIVE REFERENCES			RESULT
Limits according to:	FCC §15.225 (d), §15.209 RSS-210, Issue 10, section B4		P
Methods of measurement according to:	ANSI C63.10, section 6.3, 6.4 RSS-Gen 6.13, 8.9		
Equipment mode	Power interface	1	
	EUT configuration mode	1	
	Operation mode	1	
Test requirements	Frequency range	9 kHz – 30 MHz	
	Antenna height	1 m	

Limits

The limits below 30 MHz are given for different measurement distances. The limits below 30 MHz are converted to 3 m by using the extrapolation factor 40 dB/decade (according to §15.31).

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	67.6 – 20 · log(F(kHz))	300
0.490 – 1.705	24000/F(kHz)	87.6 – 20 · log(F(kHz))	30
1.705 – 13.110	30	29.5	30
14.010 – 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			

Test setup details

Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to 10 kHz or 9 kHz CISPR. The video bandwidth shall be at least three times greater than the resolution bandwidth.

The test was carried out automatically by the test receiver.

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.


Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Semi-Anechoic chamber (30 – 1000 MHz)	Siepel	REF W460SLB	-	PM KF 1150-01	2019-12 (3 years)
Turntable	Inn-Co	-	-	PM KF 2949-04	-
Tower	Inn-Co	MA4484-XPET	-	PM KF 2949-03	-
Controller	Inn-Co	CO 3000	4970815	PM KF 2949	-
Receiver 9 kHz – 7 GHz	Rohde & Schwarz	ESR7	101757	PM KF 3371	2020-04 (1 year)
Loop antenna 9 kHz- 30 MHz	Rohde & Schwarz	HFH2-Z2	881058/48	PM KF 1401	2020-08 (1 years)
Test software	Rohde & Schwarz	EMC 32 V.10.50.40	-	PM KF 2983-2	-

Measurement results – Radiated emissions < 30 MHz:

Common Information

EUT:	GR7.1310
Test Verdict:	Passed
Test Description:	FCC Part 15 C, 9kHz – 30 MHz
Operating Conditions:	The RFID module of the EUT was in continuous wave mode
Operator Name:	MBE
Project Number:	40115
Date	12.12.2020

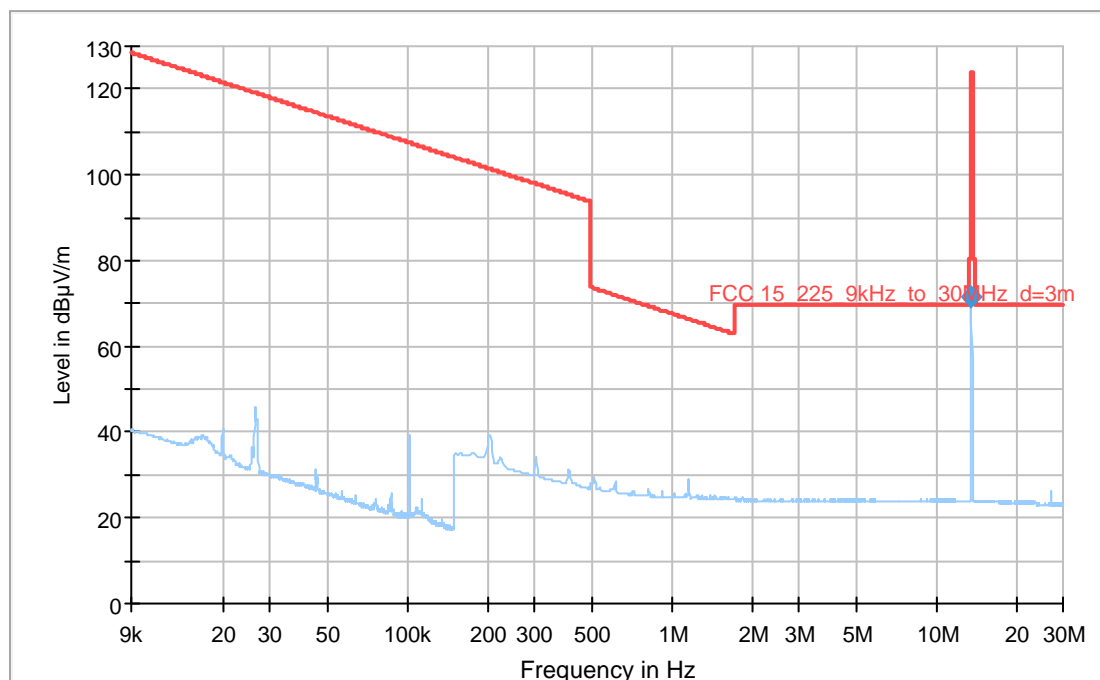

Preview Result 1-QPK [Preview Result 1.Result:1]
 * Critical_Freqs AVG [Critical_Freqs.Result:5]
 * Critical_Freqs QPK [Critical_Freqs.Result:4]
 FCC 15_225_9kHz_to_30MHz_d=3m [..zF radiated\FCC Part 15C]
 ◆ Final_Result QPK [Final_Result.Result:4]
 ◆ Final_Result AVG [Final_Result.Result:5]

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
13.560000	71.38	---	124.00	52.62	1000.0	9.000	H	242.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
13.560000	20	-

Comment

The RFID transmitter was operated in CW mode. Therefore, the bandwidth of the transmitting signal is smaller than the measuring bandwidth of the measuring receiver. Thus, a measurement with a larger measurement bandwidth was not necessary.

EMI Auto Test Template: FCC-RE-R17-AN23


Hardware Setup: EN-RE-R12-AN23
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 9 kHz – 30 MHz
Graphics Level Range: 0 dBμV/m - 130 dBμV/m

Preview Measurements:
Antenna height: 0 – 1000 cm , Step Size = 0 cm , Positioning Speed = 1
Polarization: H + V
Turntable position: 0 – 352 deg , Step Size = 22 deg , Positioning Speed = 8
Scan Test Template: EN-RE-R12-AN23_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz – 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz – 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

Common Information

EUT:	GR7.1310
Test Verdict:	Passed
Test Description:	RSS-Gen, 9 kHz – 30 MHz
Operating Conditions:	The RFID module of the EUT was in continuous wave mode
Operator Name:	MBE
Project Number:	40115
Date	12.12.2020

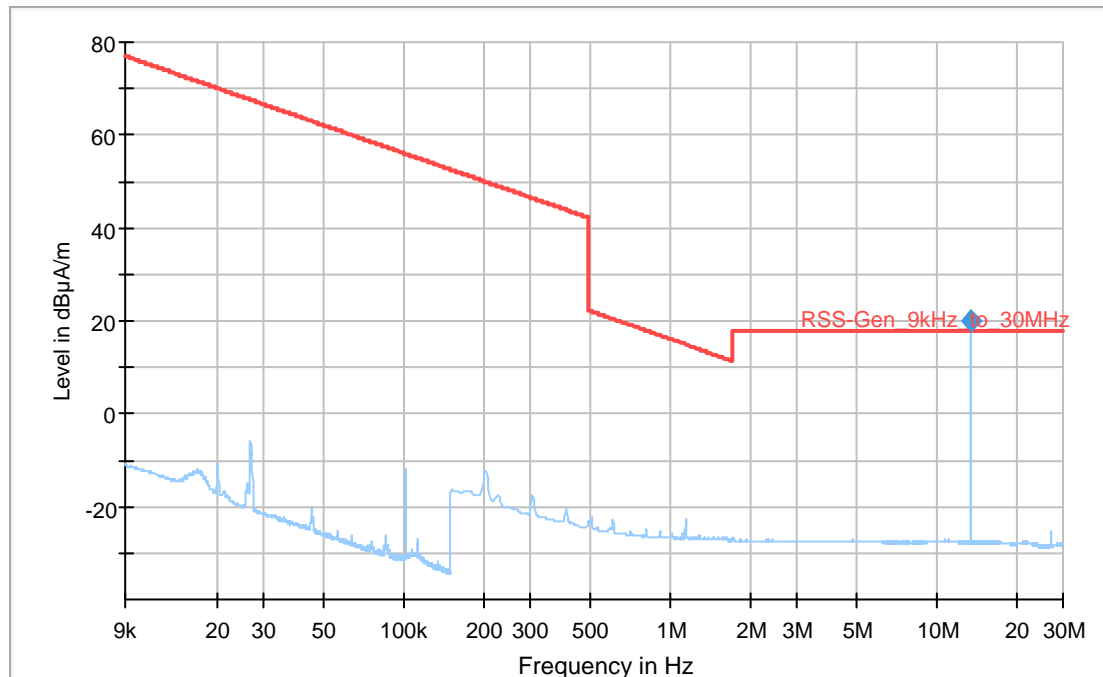

— Preview Result 1-QPK [Preview Result 1.Result:1]
 — RSS-Gen_9kHz_to_30MHz [.\zF radiated\RSS-Gen]
 * QPK [Critical_Freqs.Result:4]
 * AVG [Critical_Freqs.Result:5]
 ◆ Final_Result QPK [Final_Result.Result:4]
 ◆ Final_Result AVG [Final_Result.Result:5]

Final_Result

Frequency (MHz)	QuasiPeak (dBμA/m)	Average (dBμA/m)	Limit (dBμA/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)
13.560000	19.88	---	---	---	1000.0	9.000	H	242.0

(continuation of the "Final_Result" table from column 14 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
13.560000	20.0	The field strength of the RFID module shall not exceed 124 dBμV/m. The field strength was measured and is 71.38 dBμV/m.

EMI Auto Test Template: EN-RE-R17-AN24

Hardware Setup: EN-RE-R12-AN24
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 9 kHz – 30 MHz
Graphics Level Range: -40 dBμA/m - 80 dBμA/m

Preview Measurements:
Antenna height: 0 – 1000 cm , Step Size = 0 cm , Positioning Speed = 1
Polarization: H + V
Turntable position: 0 – 352 deg , Step Size = 22 deg , Positioning Speed = 8
Scan Test Template: EN-RE-R12-AN24_PRE

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
9 kHz – 150 kHz	50 Hz	QPK	200 Hz	1 s	0 dB
150 kHz – 30 MHz	2,25 kHz	QPK	9 kHz	1 s	0 dB

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 9 kHz – 30 MHz. It includes automatic turntable of radius 2 m. It enables manual and fully automatic measurements.

To find the highest level of radiation

- the height of the antenna is 1m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation.

The calculations are performed automatically by the measurement software EMC 32.

As example consider the following input values and result:

FREQUENCY (MHZ)	RECEIVER READING U (dBμV)	ANTENNA FACTOR AF (dB/m)	CABLE ATTENUATION A (dB)	CORRECTION ANTENNA + CABLE (dB)	RADIATED FIELD STRENGTH E (dBμV/m)
30.0	20	20.6	0.8	21.4	41.4

$$E = U + AF + A$$

7.4 Radiated emissions 30 MHz to 1 GHz

NORMATIVE REFERENCES			RESULT
Limits according to:	FCC §15.225 (d), §15.209 RSS-210, Issue 10, section B4		P
Methods of measurement according to:	ANSI C63.10, section 6.3, 6.5 RSS-Gen 6.13, 8.9		
Equipment mode	Power interface	1	
	EUT configuration mode	1	
	Operation mode	1	
Test requirements	Frequency range	30 MHz – 1 GHz	

Limits

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
30 – 88	100	40.0	3
88 – 216	150	43.5	3
216 – 960	200	46.0	3
Above 960	500	54.0	3

Test setup details

The EUT is a table-top EUT and was standing on a table made of Styrodur with a Pertinax plate on top and the dimensions 1.6 m x 1.0 m x 0.8 m (Length x Width x Height).

Overview sweeps performed with peak detectors and final measurement with quasi-peak detectors.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector.


Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Semi-Anechoic chamber (30 – 1000 MHz)	Siepel	REF W460SLB	-	PM KF 1150-01	2019-12 (3 years)
Turntable	Inn-Co	-	-	PM KF 2949-04	-
Tower	Inn-Co	MA4484-XPET	-	PM KF 2949-03	-
Controller	Inn-Co	CO 3000	4970815	PM KF 2949	-
Receiver 9 kHz – 7 GHz	Rohde & Schwarz	ESR7	101757	PM KF 3371	2021-04 (1 year)
Trilog broadband antenna	Schwarzbeck	VULB 9163	9163-974	PM KF 3196	2021-01 (1 year)
Test software	Rohde & Schwarz	EMC 32 V.10.50.40	-	PM KF 2983-2	-

Measurement results – Radiated emissions 30 MHz to 1 GHz:

Common Information

EUT:	GR7.1310
Test Verdict:	Pass
Test Description:	FCC Part 15 C, 30 MHz – 1 GHz
Operating Conditions:	The RFID module of the EUT was in continuous wave mode
Operator Name:	MBE
Project Number:	40115
Date	22.10.2020

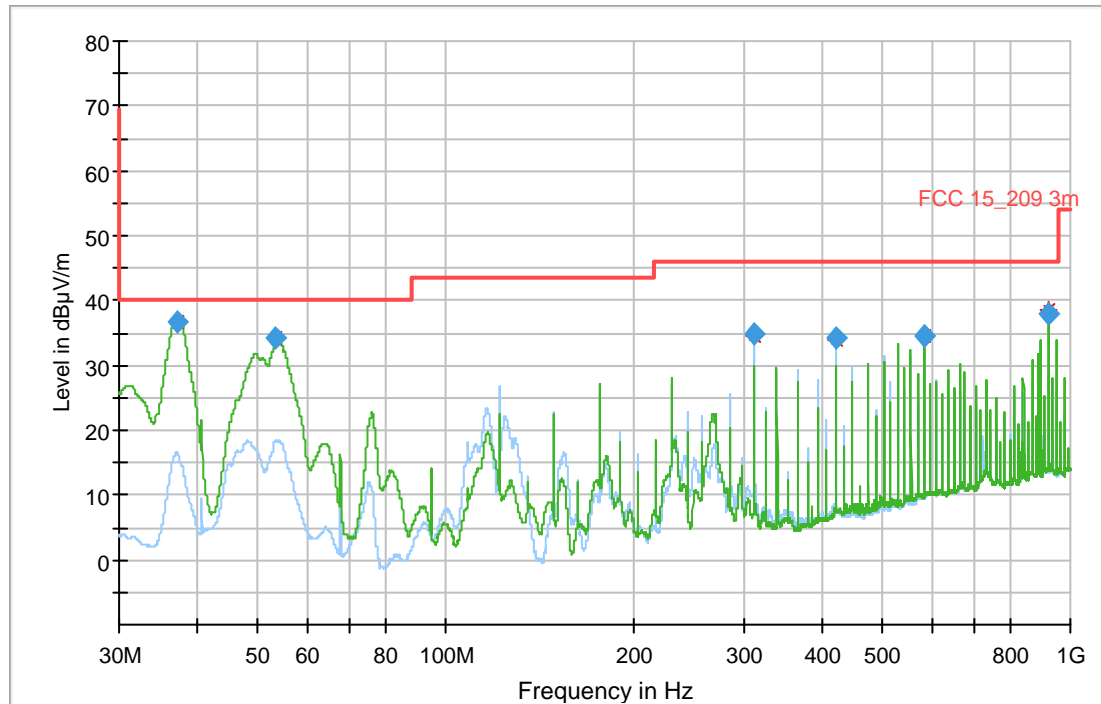

— Preview Result 1H-QPK [Preview Result 1H.Result:2]
 — Preview Result 1V-QPK [Preview Result 1V.Result:2]
 * Critical_Freqs QPK [Critical_Freqs.Result:4]
 — FCC 15_209 3m [.\EMI radiated\FCC Part 15C]
 ◆ Final_Result QPK [Final_Result.Result:4]

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
37.110000	36.75	40.00	3.25	1000.0	120.000	100.0	V	31.0
53.550000	34.12	40.00	5.88	1000.0	120.000	100.0	V	340.0
311.880000	34.99	46.02	11.03	1000.0	120.000	100.0	H	121.0
420.360000	34.21	46.02	11.81	1000.0	120.000	100.0	H	227.0
583.080000	34.40	46.02	11.62	1000.0	120.000	100.0	V	85.0
922.080000	37.85	46.02	8.17	1000.0	120.000	103.0	V	239.0

(continuation of the "Final_Result" table from column 15 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
37.110000	12	--
53.550000	14	--
311.880000	15	--
420.360000	18	--
583.080000	20	--
922.080000	25	--

EMI Auto Test Template: FCC-RE-R17-AN34_QP

Hardware Setup: EN-RE-R17-AN34
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 30 MHz - 1 GHz
Graphics Level Range: 0 dBμV/m - 80 dBμV/m

Preview Measurements:
Antenna height: 100 - 355 cm , Step Size = 85 cm , Positioning Speed = 8
Polarization: H + V
Turntable position: 0 - 352 deg , Step Size = 22 deg , Positioning Speed = 8
Graphics Display: Show separate traces for horizontal and vertical polarization
Scan Test Template: EN-RE-R17-AN34_PRE_QP

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 1 GHz	30 kHz	QPK	120 kHz	1 s	20 dB
1 GHz - 3 GHz	250 kHz	QPK	1 MHz	1 s	20 dB

Frequency Zoom:
Zoom Scan Template: EN-RE-R17-AN34_ZOOM_QP

Adjustment:
Antenna height: Range = 180 cm , Measuring Speed = 1
Turntable position: Range = 60 deg , Measuring Speed = 1
Template for Single Meas.: EN-RE-R17-AN34_FIN

Final Measurements:
Template for Single Meas.: EN-RE-R17-AN34_FIN

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESR 7]					
30 MHz - 200 MHz	40 kHz	QPK	120 kHz	1 s	20 dB
200 MHz - 1 GHz	40 kHz	QPK	120 kHz	1 s	20 dB
1 GHz - 3 GHz	400 kHz	QPK	1 MHz	1 s	20 dB

Anechoic chamber

Test procedure

The test site is an anechoic chamber suitable for radiated emission measurements in the frequency range of 30 MHz – 18 GHz (40 GHz). It includes automatic antenna mast of height 4 m and turntable of radius 2 m. It enables both manual and fully automatic measurements. To find the highest level of radiation

- the height of the antenna is scanned in range 1m to 4 m with antenna in horizontal and vertical polarization;
- the turntable is rotated in range from 0° to 360°.

The system was configured for testing in a typical worst case fashion (as a customer may use it). All interface cables were moved to determine the position which resulted in the highest emission levels.

Correction factors

The field strength is calculated by adding the antenna factor and cable attenuation. The calculations are performed automatically by the measurement software EMC 32. As example consider the following input values and result:

FREQUENCY (MHZ)	RECEIVER READING U (dBμV)	ANTENNA FACTOR AF (dB/m)	CABLE ATTENUATION A (dB)	CORRECTION ANTENNA + CABLE (dB)	RADIATED FIELD STRENGTH E (dBμV/m)
30.0	20	20.6	0.8	21.4	41.4

$$E = U + AF + A$$

7.5 Frequency stability measurement

NORMATIVE REFERENCES			RESULT
Limits according to:	FCC §15.225 (e) RSS-210, Issue 10, section B4 RSS-Gen Issue 5, section 6.11		P
Methods of measurement according to:	ANSI C63.10, section 9.14		
Equipment mode	Power interface	1	
	EUT configuration mode	3	
	Operation mode	3	

Limits

Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range of the RFID module:	-20 degree to + 50 degree
Voltage range:	0.85 x 120 V and 1.15*120 V

Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Temperature Chamber	HT4010	Heraeus-Vötsch	45021	PM KF 1402	2020-03 (1 year)
Receiver 10 Hz - 40 GHz	Rohde & Schwarz	FSV40	101400	PM KF 2783	2020-08 (1 year)
Loop antenna	Rohde & Schwarz	HZ-10	100055	PM KF 0965	2020-05 (3 year)

Measurement results – Frequency stability measurement:

Temperature °C	Carrier at 20°C MHz	Upper limit: 13.561356 MHz
		Lower limit: 13.558644 MHz
		Measured frequency under temperature influence:
+50	13.559964	13.559957
+40		13.559927
+30		13.559934
+20		13.559964
+10		13.560007
0		13.560036
-10		13.560065
-20		13.560087

Comment

The EUT was supplied with the ISK 200 power supply unit, serial number 06460376. The AC supply voltage was varied from 102 to 138 V.

The DC voltage was varied from 12 to 24 V.

The voltage variations had no influence on the transmission frequency and the transmission level.

Voltage V	Temperature	Upper limit: 13.561356 MHz
		Lower limit: 13.558644 MHz
		Measured frequency under AC supply voltage variation:
102	20°C	13.559964
138		13.559964

Voltage V	Temperature	Upper limit: 13.561356 MHz
		Lower limit: 13.558644 MHz
		Measured frequency under DC voltage variation:
12	20°C	13.559897
24		13.559898

7.6 20 dB bandwidth

NORMATIVE REFERENCES			RESULT
Limits according to:	FCC §15.215 (c)		P
Methods of measurement according to:	RSS-Gen, Issue 5, 6.7		
Equipment mode	Power interface	1	
	EUT configuration mode	3	
	Operation mode	3	

Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Receiver 10 Hz - 40 GHz	Rohde & Schwarz	FSV40	101400	PM KF 2783	2021-08 (1 year)
Loop antenna	Rohde & Schwarz	HZ-10	100055	PM KF 0965	2020-05 (3 year)

Comment

The 20-bandwidth is 43.1 kHz.

Measurement results – 20 dB bandwidth:

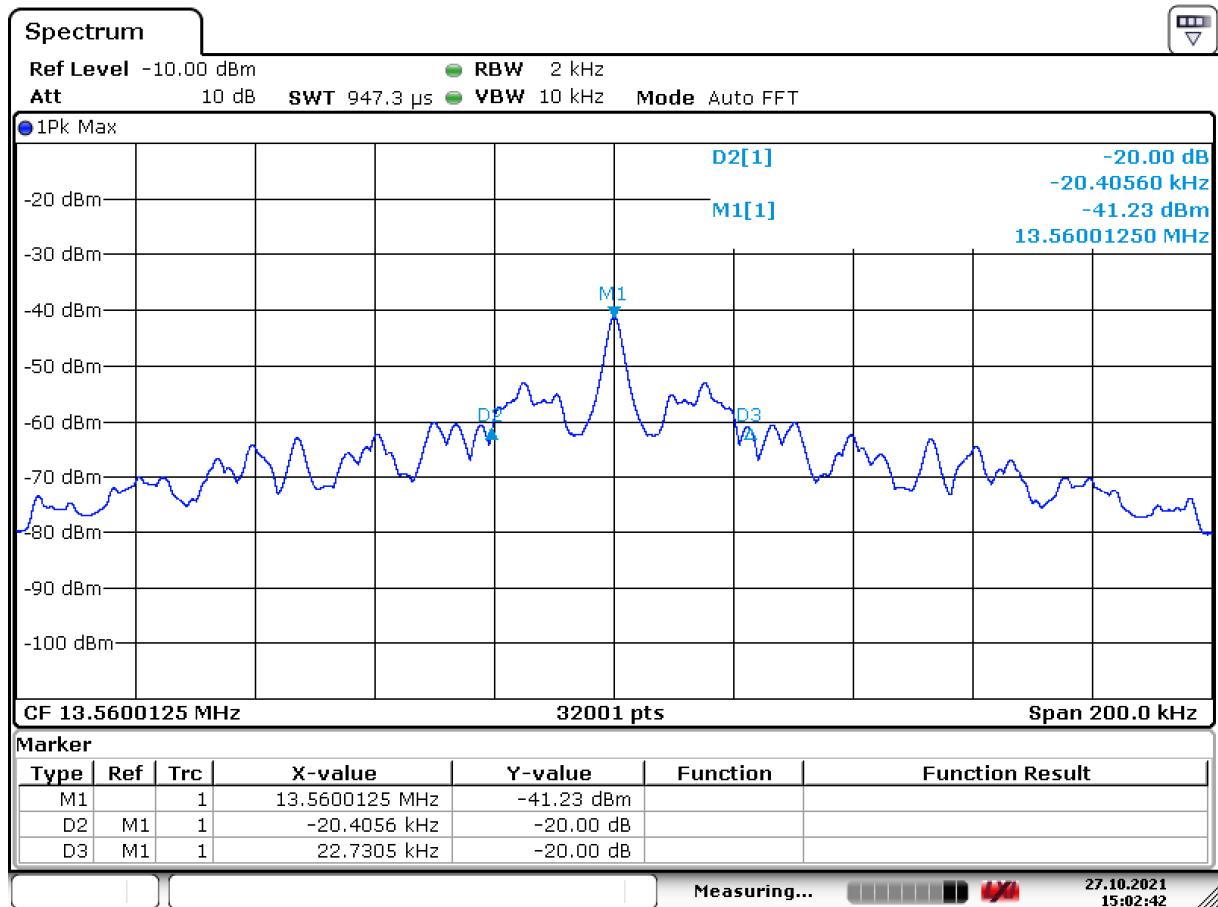

Date: 27.OCT.2021 15:02:41

7.7 Occupied bandwidth

NORMATIVE REFERENCES			RESULT
Limits according to:	RSS-Gen, Issue 5, 6.7		P
Methods of measurement according to:	RSS-Gen, Issue 5, 6.7		
Equipment mode	Power interface	1	
	EUT configuration mode	3	
	Operation mode	3	


Test equipment

DESCRIPTION	MANUFACTURER	TYPE	SN	ASSET NO.	CALIBRATION
Receiver 10 Hz - 40 GHz	Rohde & Schwarz	FSV40	101400	PM KF 2783	2020-08 (1 year)
Loop antenna	Rohde & Schwarz	HZ-10	100055	PM KF 0965	2020-05 (3 year)

Comment

The 99% occupied bandwidth is 1.0775 MHz.

Measurement results – 99% occupied bandwidth:

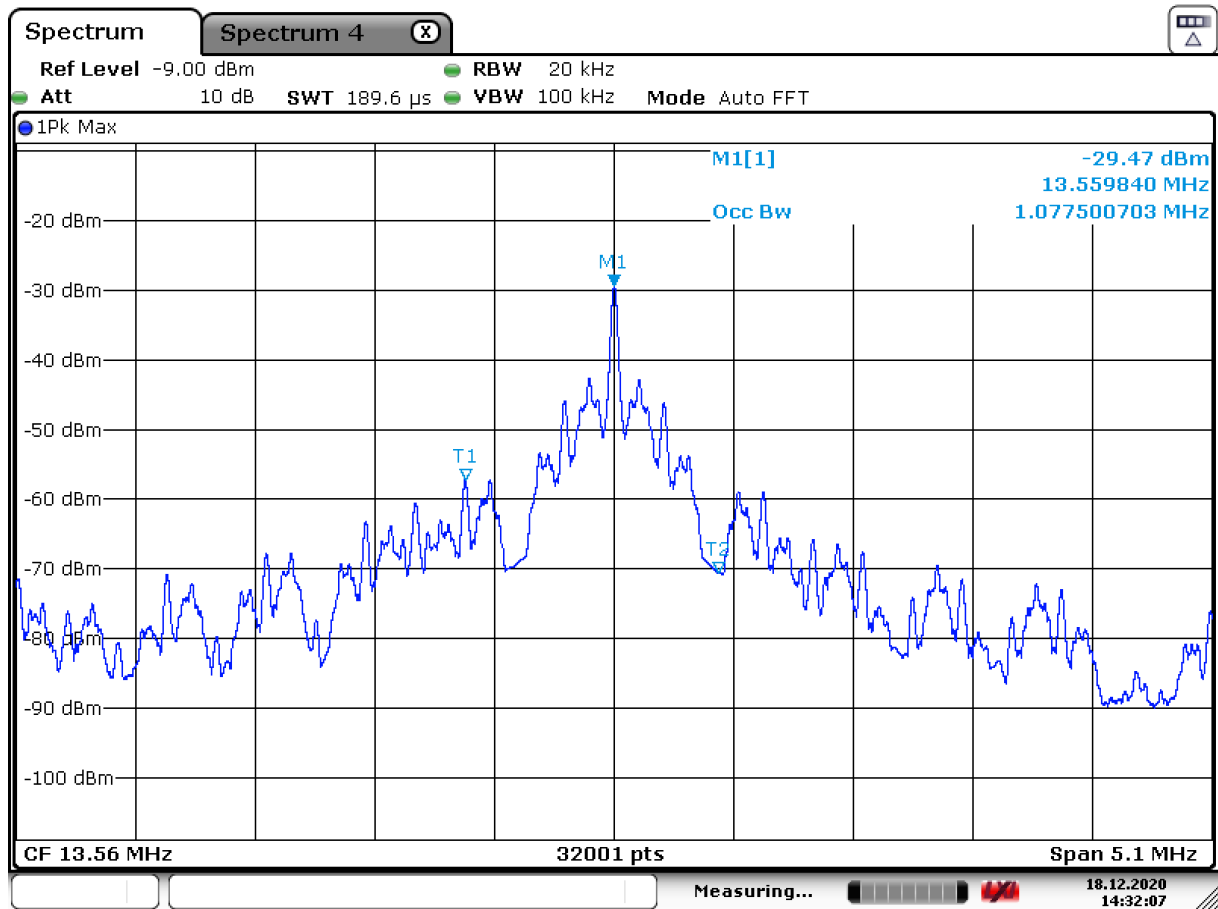

Date: 18.DEC.2020 14:32:07

7.8 Measurement uncertainty evaluation

Measurement uncertainty for conducted emissions, LISN, 150 kHz -30 MHz	± 2.3 dB
Measurement uncertainty for radiated magnetic field, 9 kHz – 30 MHz	± 4.9 dB
Measurement uncertainty for radiated emission, 30 MHz - 1000 MHz	± 5.9 dB
Measurement uncertainty for OBW	± 4.3 %
601 points resolution (Spectrum analyzer)	± 0.83 %
30000 points resolution (Spectrum analyzer)	± 0.016 %
Measurement uncertainty for Frequency error	± 1 x 10 ⁻⁸

End of test report