



FCC SAR TEST REPORT

Report No.: SET2019-04386

Product: LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone

Brand Name: ZTE

Model No.: ZTE Blade V10

FCC ID: SRQ-BLADEV10L

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Shenzhen, China

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Lab Location: Building 28/29, East of Shigu Xili Industrial Zone, Nanshan District
Shenzhen, Guangdong 518055, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

Mail: manager@ccic-set.com **Website:** <http://www.ccic-set.com>

This test report consists of 76 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report


Product.: LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone
Model No.: ZTE Blade V10
Brand Name.....: ZTE
FCC ID.....: SRQ-BLADEV10L
Applicant.....: ZTE Corporation
Applicant Address.....: ZTE Plaza, Keji Road South, Shenzhen, China
Manufacturer.....: ZTE Corporation
Manufacturer Address: ZTE Plaza, Keji Road South, Shenzhen, China

Test Standards.....: **47CFR § 2.1093-** Radiofrequency Radiation Exposure Evaluation: Portable Devices;
ANSI C95.1-1992: Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE 1528-2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques


Test Result.....: Pass
Test Date.....: 2019.04.15-2019.04.30

Tested by  2019-05-05

Mei Chun, Test Engineer

Reviewed by.....:  2019-05-05

Chris You, Senior Engineer

Approved by.....:  2019-05-05

Shuangwen Zhang, Manager



Contents

Test Report	2
1. Administrative Data.....	4
2. Equipment Under Test (EUT)	5
3. SAR Summary	7
4. Specific Absorption Rate (SAR).....	9
5. Tissue check and recommend Dielectric Parameters	13
6. SAR measurement procedure	19
7. Conducted RF Output Power	20
8. SAR test Exclusion and estimate SAR calculation:	49
9. Scaling Factor calculation	52
10. Test Results	54
11. Simultaneous Transmissions Analysis	69
12. Measurement Uncertainty	71
13. Equipment List.....	75
ANNEX A: Appendix A: SAR System performance Check Plots.....	76
ANNEX B: Appendix B: SAR Measurement results Plots.....	76
ANNEX C: Appendix C: Calibration reports	76
ANNEX D: Appendix D: SAR Test Setup.....	76

1. Administrative Data

1.1 Testing Laboratory

Test Site: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd

Address: Electronic Testing Building, No. 43 Shahe Road, Xili Jiedao, Nanshan District, Shenzhen, Guangdong, China

CNAS Lab Code: CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

NVLAP Lab Code: CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

FCC Registration: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2019.

ISED Registration: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Aug. 03, 2019.

Test Environment Temperature (°C): 21 °C

Condition: Relative Humidity (%): 60%

Atmospheric Pressure (kPa): 86KPa-106KPa

2. Equipment Under Test (EUT)

Identification of the Equipment under Test

Device Type:	Portable	
Exposure Category:	Population/Uncontrolled	
Sample Name:	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone	
Brand Name:	ZTE	
Model Name:	ZTE Blade V10	
General description:	Support Band	GSM850MHz/1900/900/1800MHz, WCDMA 850MHz/1700MHz/1900MHz, LTE Band2/3/4/5/7/12/66,WIFI 2.4G/5G, BT,GPS
	Test Band	GSM850MHz/1900MHz, WCDMA 850MHz/1700MHz/1900MHz, LTE Band 2/4/5/7/12/66,WIFI2.4G/5G
	IMEI No.	865647040492128
	Device Class	Class B
	Multi Class	GPRS: Class 12; EGPRS: Class 12
	Development Stage	Identical Prototype
	Accessories	Power Supply
	Hotspot	2.4GHz WLAN support Hotspot mode
	Antenna type	Internal Antenna
	Operation mode	GSM /WCDMA / LTE /WIFI
	Modulation mode	GSM(GMSK),UMTS(QPSK),LTE(QPSK,16QAM,64QAM), WIFI(OFDM/DSSS) ,BT(GFSK/π /4-DQPSK/8-DPSK)
	DTM mode	Not support
	Hardware Version	ujdA
	Software Version	TEL_MX_ZTE_Blade_V10V1.0
	Max. RF Power	32.13dBm
	Max. SAR Value	Head: 0.698 W/Kg Body: 1.258 W/Kg(Limit:1.6W/Kg, 10mm distance)

NOTE:

- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

**EUT testing configuration**

Tested frequency range(s)	Transmitter Frequency Range	Receiver Frequency Range
GSM850:	824-849 MHz	869-894 MHz
GSM1900:	1850-1910 MHz	1930-1990 MHz
UMTS Band II:	1850-1910 MHz	1930-1990 MHz
UMTS Band IV:	1710-1755 MHz	2110-2155 MHz
UMTS Band V:	824-849 MHz	869-894 MHz
LTE Band2:	1850-1910 MHz	1930-1990 MHz
LTE Band4:	1710-1755 MHz	2110-2155 MHz
LTE Band5:	824-849 MHz	869-894 MHz
LTE Band7:	2500-2570 MHz	2620-2690 MHz
LTE Band12:	699-716 MHz	729-746 MHz
LTE Band66	1710-1780MHz	
WIFI(tested):	2412-2462 MHz	
	5180-5240 MHz	
	5745-5825MHz	
Bluetooth:	2402-2480 MHz	
Test channels(low-mid-high):	128-190-251(GSM850)	
	512-661-810(GSM1900)	
	9262-9400-9538(UMTS Band II)	
	1312-1412-1513(UMTS Band IV)	
	4132-4183-4233(UMTS Band V)	
	18700-18900-19100(LTE Band 2 Bandwidth 20M)	
	20050-20175-20300(LTE Band 4 Bandwidth 20M)	
	20450-20525-20600(LTE Band 5 Bandwidth 10M)	
	20850-21100-21350(LTE Band 7 Bandwidth 20M)	
	23060-23095-23130(LTE Band 12 Bandwidth 10M)	
	131979-132422-132572(LTE Band 66 Bandwidth 20M)	
	1-6-11(Wi-Fi 2.4G 802.11b)	
	5190(Wi-Fi 5G 802.11ac)	
	5755(Wi-Fi 5G 802.11a)	

3. SAR Summary

Highest Standalone SAR Summary

Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Head	GSM850	0.181	0.698
	GSM1900	0.152	
	WCDMA Band II	0.294	
	WCDMA Band IV	0.221	
	WCDMA Band V	0.247	
	LTE Band 2	0.171	
	LTE Band 4	0.202	
	LTE Band 5	0.141	
	LTE Band 7	0.181	
	LTE Band 12	0.098	
	LTE Band 66	0.074	
	WIFI 2.4G 802.11b	0.498	
	WIFI 5G 802.11ac	0.698	
	BT	0.135	

Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Body-worn (10mm Gap)	GSM850	0.864	1.063
	GSM1900	0.709	
	WCDMA Band II	1.063	
	WCDMA Band IV	0.675	
	WCDMA Band V	0.430	
	LTE Band 2	0.485	
	LTE Band 4	0.714	
	LTE Band 5	0.263	
	LTE Band 7	1.021	
	LTE Band 12	0.269	
	LTE Band 66	0.370	
	WIFI 2.4G 802.11b	0.192	
	WIFI 5G 802.11ac	0.304	
	BT	0.115	



Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Hotspot (10mm Gap)	GSM850	0.864	1.258
	GSM1900	1.019	
	WCDMA Band II	1.258	
	WCDMA Band IV	0.675	
	WCDMA Band V	0.430	
	LTE Band 2	0.570	
	LTE Band 4	0.714	
	LTE Band 5	0.263	
	LTE Band 7	1.021	
	LTE Band 12	0.269	
	LTE Band 66	0.425	
	WIFI 2.4G 802.11b	0.192	

Highest Simultaneous SAR Summary

Exposure Position	Frequency Band	Highest Scaled 1g-SAR(W/kg)
Hotspot (10mmGap)	WWAN(WCDMA Band II)&WIFI 2.4G	1.258

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4.2 Applicable Standards and Limits

4.2.1 Applicable Standards

47CFR § 2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI C95.1–1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE 1528–2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 248227 D01	v02r02 802.11 Wi-Fi SAR
KDB 447498 D01	v06 General RF Exposure Guidance
KDB 648474 D04	v01r03 Handset SAR
KDB 865664 D01	v01r04 SAR Measurement 100MHz to 6GHz
KDB 865664 D02	v01r02 SAR Exposure Reporting
KDB 941225 D01	v03r01 3G SAR Procedures
KDB 941225 D05	v02r05 SAR for LTE Devices
KDB 941225 D05A	v01r02 LTE Rel.10 KDB Inquiry Sheet
KDB 941225 D06	v02r01 Hotspot Mode

4.2.2 RF exposure Limits

Human Exposure	Uncontrolled Environment General Population
Spatial Peak SAR* (Brain/Body)	1.60 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g
Spatial Peak SAR*** (Limbs)	4.00 mW/g

The limit applied in this test report is shown in bold letters.

Notes:

* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

4.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

4.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

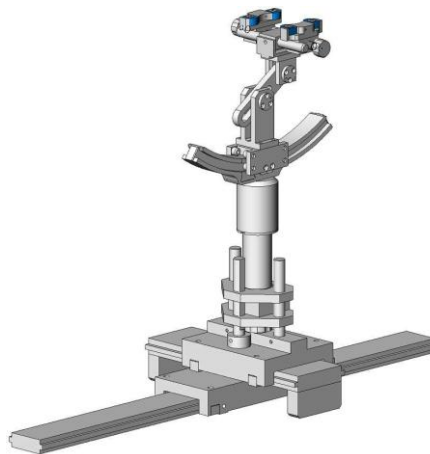

Device holder

4.5 Probe Specification




Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	700 MHz to 3 GHz; Linearity: ± 0.5 dB (700 MHz to 3 GHz)
Directivity	± 0.25 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	1.5 μ W/g to 100 mW/g; Linearity: ± 0.5 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 5 mm Distance from probe tip to dipole centers: <2.7 mm
Application	General dosimetry up to 3 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Compatibility	COMOSAR

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

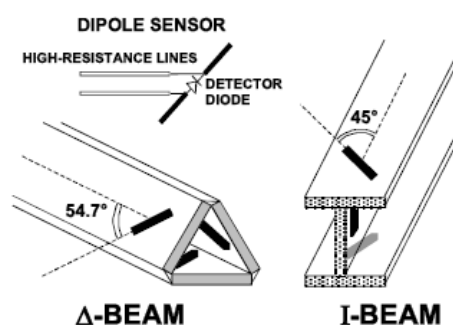

5. Tissue check and recommend Dielectric Parameters

5.1 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 1: Recommended Dielectric Performance of Tissue

Ingredients (% by weight)	Frequency (MHz)											
	450		835		915		1900		2450		2600	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.46	52.4	41.05	56.0	54.9	40.4	62.7	73.2	55.24	64.49
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04	0.5	0.024
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	44.45	32.25
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.2	52.5	39.0	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.80	1.78	1.96	2.16

MSL/HSL750 (Body and Head liquid for 650 – 850 MHz)

Item	Head Tissue Simulation Liquid HSL750 Muscle(body)Tissue Simulation Liquid MSL750			
H2O	Water, 35 – 58%			
Sucrose	Sugar, white, refined, 40-60%			
NaCl	Sodium Chloride, 0-6%			
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%			
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1-0.7%			
Frequency (MHz)	Head ϵ_r		Head σ (S/m)	
750	41.9		0.89	
	Body ϵ_r		Body σ (S/m)	
	55.2		0.97	

Note: The liquid of 700MHz&2600MHz typical liquid composition is provided by SATIMO.

Frequency:5200/5400/5600/5800MHz	
Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

Table 2 Recommended Tissue Dielectric Parameters

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

5.2 Simulate liquid

Liquid check results:

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	750MHz	$41.9 \pm 5\%$	$0.89 \pm 5\%$
Validation value (2019-04-15)	750MHz	41.97	0.88
Target value	850MHz	$41.5 \pm 5\%$	$0.90 \pm 5\%$
Validation value (2019-04-16)	850MHz	41.32	0.87
Target value	1800MHz	$40.5 \pm 5\%$	$1.40 \pm 5\%$
Validation value (2019-04-17)	1800MHz	40.34	1.31
Target value	1900MHz	$40.5 \pm 5\%$	$1.40 \pm 5\%$
Validation value (2019-04-18)	1900MHz	40.65	1.42
Target value	2450MHz	$39.2 \pm 5\%$	$1.80 \pm 5\%$
Validation value (2019-04-19)	2450MHz	39.34	1.82
Target value	2600MHz	$39.0 \pm 5\%$	$1.96 \pm 5\%$
Validation value (2019-04-20)	2600MHz	39.12	1.98
Target value	5200MHz	$36.0 \pm 5\%$	$4.66 \pm 5\%$
Validation value (2019-04-21)	5200MHz	36.22	4.52
Target value	5800MHz	$35.3 \pm 5\%$	$5.27 \pm 5\%$
Validation value (2019-04-22)	5800MHz	35.2	5.25
Target value	2600MHz	$39.0 \pm 5\%$	$1.96 \pm 5\%$
Validation value (2019-04-30)	2600MHz	39.08	1.99


Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	750MHz	$55.5 \pm 5\%$	$0.96 \pm 5\%$
Validation value (2019-04-15)	750MHz	55.52	0.98
Target value	850MHz	$55.2 \pm 5\%$	$0.97 \pm 5\%$
Validation value (2019-04-16)	850MHz	55.24	0.99
Target value	1800MHz	$53.3 \pm 5\%$	$1.52 \pm 5\%$
Validation value (2019-04-17)	1800MHz	53.39	1.52
Target value	1900MHz	$53.3 \pm 5\%$	$1.52 \pm 5\%$
Validation value (2019-04-18)	1900MHz	53.40	1.53
Target value	2450MHz	$52.7 \pm 5\%$	$1.95 \pm 5\%$
Validation value (2019-04-19)	2450MHz	52.65	1.93
Target value	2600MHz	$52.5 \pm 5\%$	$2.16 \pm 5\%$
Validation value (2019-04-20)	2600MHz	52.35	2.12
Target value	5200MHz	$49.0 \pm 5\%$	$5.30 \pm 5\%$
Validation value (2019-04-21)	5200MHz	49.33	5.12
Target value	5800MHz	$48.2 \pm 5\%$	$6.0 \pm 5\%$
Validation value (2019-04-22)	5800MHz	48.15	5.89
Target value	2600MHz	$52.5 \pm 5\%$	$2.16 \pm 5\%$
Validation value (2019-04-30)	2600MHz	52.25	2.14

SAR System validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the IEEE standard P1528. Setup according to the setup diagram below:

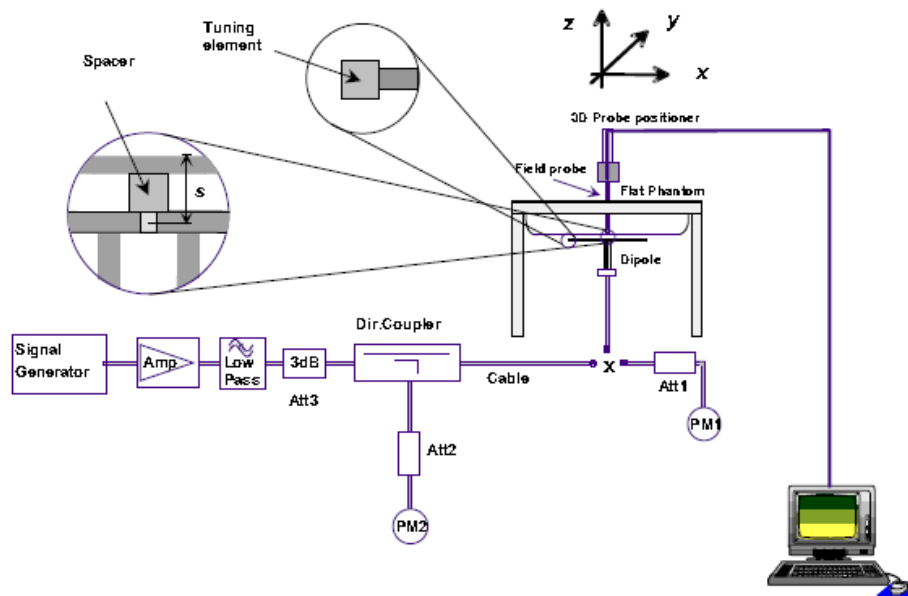

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.01W (10 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

- Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.
- Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.
- Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 5 and Table 6. The humidity and ambient temperature of test facility

were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528 and the place of the antenna).

Table 4: Head SAR system validation (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			10 mW	1W
750MHz(2019-04-15)	1:1	$8.62 \pm 10\%$	0.0832	8.32
850MHz(2019-04-16)	1:1	$9.61 \pm 10\%$	0.0932	9.32
1800MHz(2019-04-17)	1:1	$37.35 \pm 10\%$	0.3971	39.71
1900MHz(2019-04-18)	1:1	$39.35 \pm 10\%$	0.4104	41.04
2450MHz(2019-04-19)	1:1	$52.67 \pm 10\%$	0.5311	53.11
2600MHz(2019-04-20)	1:1	$55.47 \pm 10\%$	0.5528	55.28
5200MHz(2019-04-21)	1:1	$164.1 \pm 10\%$	1.525	152.5
5800MHz(2019-04-22)	1:1	$185.54 \pm 10\%$	1.710	171.0
2600MHz(2019-04-30)	1:1	$55.47 \pm 10\%$	0.5673	56.73

Body SAR system validation (1g)


Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			10 mW	1W
750MHz(2019-04-15)	1:1	$8.68 \pm 10\%$	0.0860	8.60
850MHz(2019-04-16)	1:1	$9.88 \pm 10\%$	0.0978	9.78
1800MHz(2019-04-17)	1:1	$37.68 \pm 10\%$	0.3746	37.46
1900MHz(2019-04-18)	1:1	$38.84 \pm 10\%$	0.3839	38.39
2450MHz(2019-04-19)	1:1	$51.42 \pm 10\%$	0.5289	52.89
2600MHz(2019-04-20)	1:1	$53.45 \pm 10\%$	0.5509	55.09
5200MHz(2019-04-21)	1:1	$155.78 \pm 10\%$	1.444	144.4
5800MHz(2019-04-22)	1:1	$170.49 \pm 10\%$	1.574	157.4
2600MHz(2019-04-30)	1:1	$53.45 \pm 10\%$	0.5791	57.91

* Note: Target value was referring to the measured value in the calibration certificate of reference dipole.

Note: All SAR values are normalized to 1W forward power.

6. SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

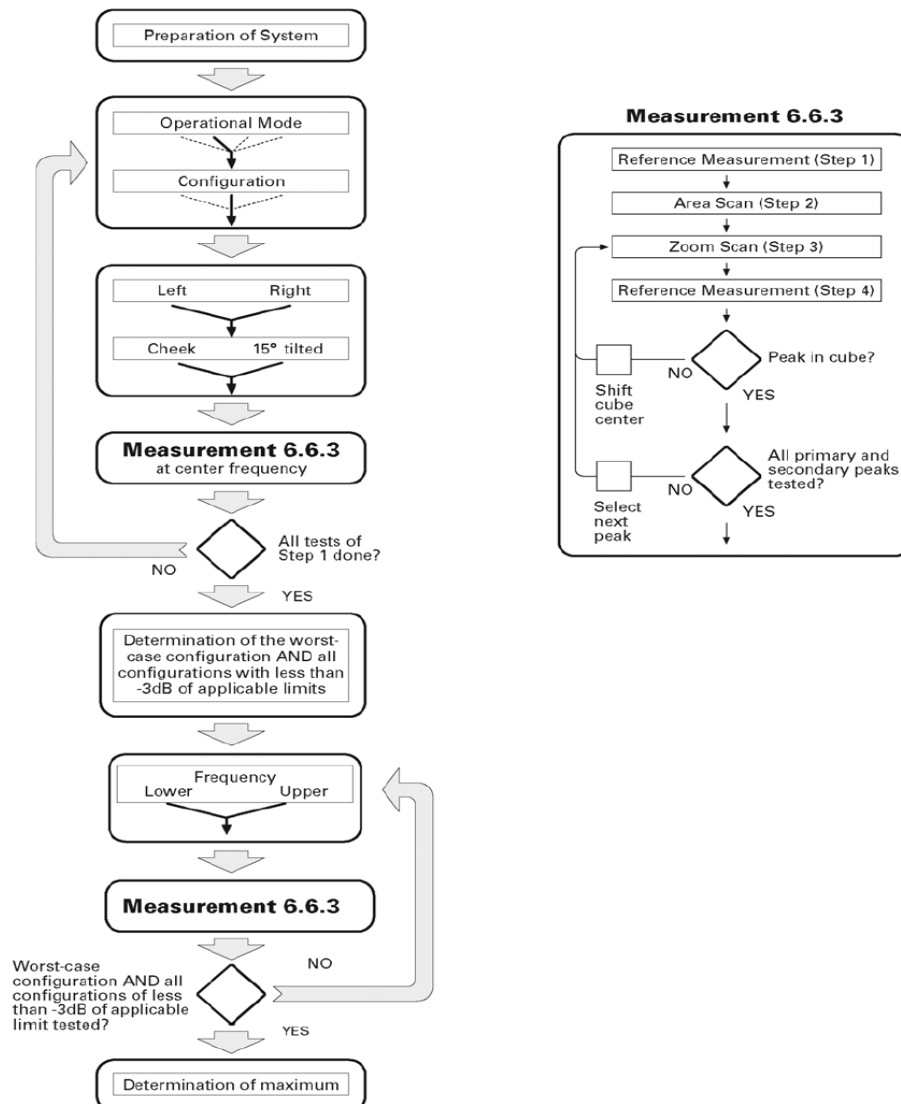

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.

After an area scan has been done at a fixed distance of 2mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE p1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

7. Conducted RF Output Power

7.1 GSM Conducted Power

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		28CH	190CH	251CH
GSM (CS)		31.90	32.10	32.10	-9.19	22.71	22.91	22.91
GPRS (GMSK)	1 Tx Slot	31.87	32.13	32.11	-9.19	22.81	22.91	22.81
	2 Tx Slots	28.99	29.02	28.91	-6.13	22.86	22.89	22.78
	3 Tx Slots	27.58	27.54	27.66	-4.42	23.16	23.12	23.24
	4 Tx Slots	27.43	27.86	27.39	-3.18	24.25	24.68	24.21
EDGE (8PSK)	1 Tx Slot	26.90	27.00	27.10	-9.19	17.71	17.81	17.91
	2 Tx Slots	23.53	23.56	23.36	-6.13	17.40	17.43	17.23
	3 Tx Slots	22.05	21.99	22.10	-4.42	17.63	17.57	17.68
	4 Tx Slots	21.31	21.42	21.36	-3.18	18.13	18.24	18.18
GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		28.60	28.90	29.20	-9.19	19.41	19.71	20.01
GPRS (GMSK)	1 Tx Slot	28.60	28.90	29.20	-9.19	19.41	19.71	20.01
	2 Tx Slots	26.02	26.04	26.93	-6.13	19.89	19.91	20.80
	3 Tx Slots	24.66	24.59	24.69	-4.42	20.24	20.17	20.27
	4 Tx Slots	23.76	23.98	23.46	-3.18	20.58	20.80	20.28
EDGE (8PSK)	1 Tx Slot	25.10	25.50	26.00	-9.19	15.91	16.31	16.81
	2 Tx Slots	23.86	23.88	23.71	-6.13	17.73	17.75	17.58
	3 Tx Slots	22.38	22.27	22.38	-4.42	17.96	17.85	17.96
	4 Tx Slots	21.52	21.58	21.57	-3.18	18.34	18.40	18.39

Note: Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

For hotspot SAR, EUT was performed at GPRS Class 12 multi-slots(4Tx) mode

For Head and Body-worn SAR testing, EUT was set in GSM Voice mode for both GSM850 and GSM1900

Timeslot consignations

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2UpDown	3UpDown	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Crest Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

7.2 WCDMA Conducted output Power

UMTS1900 (Band II)		Average Power (dBm)		
		9262CH	9400CH	9538cH
WCDMA	12.2kbps RMC	22.35	22.43	22.65
HSDPA	Subtest 1	21.67	21.75	21.97
	Subtest 2	21.26	21.34	21.56
	Subtest 3	20.87	20.95	21.17
	Subtest 4	20.66	20.74	20.96
HSUPA	Subtest 1	22.23	22.32	22.57
	Subtest 2	21.43	22.2	22.5
	Subtest 3	21.04	21.81	22.11
	Subtest 4	20.76	21.53	21.83
	Subtest 5	20.57	21.34	21.64
UMTS1700 (Band IV)		Average Power (dBm)		
		1313CH	1413CH	1513CH
WCDMA	12.2kbps RMC	21.13	21.50	21.05
HSDPA	Subtest 1	20.45	20.82	20.37
	Subtest 2	20.04	20.41	19.96
	Subtest 3	19.65	20.02	19.57
	Subtest 4	19.44	19.81	19.36
HSUPA	Subtest 1	21.02	21.42	22.32
	Subtest 2	20.9	21.35	20.87
	Subtest 3	20.51	20.96	20.48
	Subtest 4	20.23	20.68	20.2
	Subtest 5	20.04	20.49	20.01
UMTS850 (Band V)		Average Power (dBm)		
		4132CH	4183CH	4233CH
WCDMA	12.2kbps RMC	22.87	22.94	22.86
HSDPA	Subtest 1	22.19	22.26	22.18
	Subtest 2	21.78	21.85	21.77
	Subtest 3	21.39	21.46	21.38
	Subtest 4	21.18	21.25	21.17
HSUPA	Subtest 1	22.69	22.76	22.41
	Subtest 2	22.24	22.31	21.96
	Subtest 3	21.85	21.92	21.57
	Subtest 4	21.57	21.64	21.29
	Subtest 5	21.38	21.45	21.1

Note:

- WCDMA SAR was tested under RMC 12.2kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25dB higher than the RMC level and SAR was less than 1.2W/kg.
- It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2dB more than specified by 3GPP, but also as low as 0dB according to the chipset implementation in this model

7.3 LTE Conducted peak output Power

LTE Test Configurations

The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all frames.

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction(MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3)A-MPR LTE procedures for SAR testing

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of “NS_01” on the base station simulator.

4)LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test

requirements i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

5) LTE CA operation

4.3.1.1.7A FDD reference test frequencies for CA in operating band 7

Table 4.3.1.1.7A-1: Test frequencies for CA_7C

Range	CC-Combo / N _{RB,agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1: Carriers in increasing frequency order.											

1. LTE Band 2 Conducted Power Test Verdict:

LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.38	22.54	22.47	22.0±1.0
		1	3	22.31	22.46	22.42	
		1	5	22.27	22.38	22.31	
		3	0	22.16	22.29	22.24	21.5±1.0
		3	2	22.08	22.18	22.11	
		3	3	21.97	22.07	22	
		6	0	21.76	21.95	21.88	21.5±1.0
	16QAM	1	0	21.71	21.87	21.84	21.0±1.0
		1	3	21.64	21.76	21.72	
		1	5	21.51	21.65	21.6	
		3	0	21.46	21.57	21.51	20.5±1.0
		3	2	21.31	21.44	21.38	
		3	3	21.14	21.33	21.22	
		6	0	20.92	21.12	21.05	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18615/1851.5	18900/1880	19185/1908.5	
3MHz	QPSK	1	0	22.41	22.64	22.56	22.0±1.0
		1	7	22.38	22.51	22.47	
		1	14	22.34	22.45	22.4	
		8	0	22.26	22.35	22.31	21.5±1.0
		8	4	22.14	22.27	22.23	
		8	7	22.07	22.16	22.11	
		15	0	21.94	22.08	22.02	21.5±1.0
	16QAM	1	0	21.02	21.86	21.37	21.0±1.0
		1	7	20.67	21.54	20.73	
		1	14	20.45	21.31	20.61	
		8	0	20.12	20.98	20.28	20.5±1.0
		8	4	20.06	20.35	20.17	
		8	7	19.87	20.12	20.02	
		15	0	19.73	20.11	19.9	20.5±1.0

LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	22.45	22.74	22.65	22.0±1.0
		1	13	22.43	22.64	22.53	
		1	24	22.34	22.54	22.46	
		12	0	22.27	22.46	22.35	21.5±1.0
		12	6	22.18	22.34	22.28	
		12	13	22.11	22.23	22.21	
		25	0	22.05	22.15	22.1	21.5±1.0
	16QAM	1	0	21.95	22.06	22.01	21.5±1.0
		1	13	21.72	21.94	21.86	
		1	24	21.6	21.81	21.74	
		12	0	21.55	21.75	21.61	21.0±1.0
		12	6	21.47	21.63	21.51	
		12	13	21.37	21.54	21.45	
		25	0	21.22	21.45	21.35	21.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	22.47	22.65	22.58	22.0±1.0
		1	25	22.43	22.56	22.53	
		1	49	22.38	22.45	22.41	
		25	0	22.26	22.42	22.34	21.5±1.0
		25	13	22.14	22.31	22.27	
		25	25	22.06	22.22	22.16	
		50	0	22.01	22.15	22.07	21.5±1.0
	16QAM	1	0	21.86	22.06	21.94	21.5±1.0
		1	25	21.73	21.92	21.87	
		1	49	21.67	21.84	21.75	
		25	0	21.56	21.73	21.64	21.0±1.0
		25	13	21.43	21.62	21.54	
		25	25	21.38	21.52	21.47	
		50	0	21.21	21.44	21.33	21.0±1.0

LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	22.56	22.78	22.68	22.0 ± 1.0
		1	38	22.48	22.64	22.53	
		1	74	22.38	22.56	22.49	
		36	0	22.28	22.42	22.31	21.5 ± 1.0
		36	18	22.16	22.31	22.25	
		36	39	22.05	22.22	22.17	
		75	0	21.98	22.1	22.08	21.5 ± 1.0
	16QAM	1	0	21.77	22.05	21.86	21.5 ± 1.0
		1	38	21.72	21.92	21.84	
		1	74	21.67	21.86	21.75	
		36	0	21.56	21.75	21.63	21.0 ± 1.0
		36	18	21.46	21.62	21.54	
		36	39	21.35	21.51	21.48	
		75	0	21.23	21.46	21.37	21.0 ± 1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	22.45	22.86	22.67	22.0 ± 1.0
		1	50	22.37	22.54	22.41	
		1	99	22.16	22.34	22.27	
		50	0	21.88	22.11	21.89	21.5 ± 1.0
		50	25	21.61	22.14	21.75	
		50	50	21.98	22.21	21.86	
		100	0	21.15	22.01	21.34	21.5 ± 1.0
	16QAM	1	0	21.77	21.92	21.86	21.5 ± 1.0
		1	50	21.69	21.84	21.78	
		1	99	21.58	21.73	21.64	
		50	0	21.43	21.62	21.56	21.0 ± 1.0
		50	25	21.33	21.53	21.42	
		50	50	21.21	21.44	21.34	
		100	0	21.15	21.38	21.26	21.0 ± 1.0

2. LTE Band 4 Conducted Power Test Verdict:

LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	22.43	22.61	22.53	22.0±1.0
		1	3	22.36	22.54	22.46	
		1	5	22.29	22.45	22.37	
		3	0	22.2	22.34	22.26	21.5±1.0
		3	2	22.12	22.22	22.18	
		3	3	22.04	22.15	22.1	
		6	0	21.86	22.03	21.98	21.5±1.0
	16QAM	1	0	21.74	21.92	21.84	21.0±1.0
		1	3	21.61	21.82	21.73	
		1	5	21.54	21.73	21.65	
		3	0	21.32	21.52	21.45	21.0±1.0
		3	2	21.18	21.38	21.32	
		3	3	21.07	21.27	21.16	
		6	0	20.89	21.13	21.04	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	22.24	22.34	22.37	21.5±1.0
		1	7	22.29	22.29	22.26	
		1	14	22.27	22.35	22.4	
		8	0	21.95	22.34	21.88	21.5±1.0
		8	4	22.06	22.24	22.15	
		8	7	21.91	22.32	21.98	
		15	0	21.74	21.95	21.82	21.5±1.0
	16QAM	1	0	21.68	21.65	21.77	21.0±1.0
		1	7	21.8	21.71	21.61	
		1	14	21.69	21.78	21.57	
		8	0	21.35	21.32	21.2	20.5±1.0
		8	4	21.28	21.31	21.53	
		8	7	21.41	21.34	21.49	
		15	0	20.89	21.13	21.04	20.5±1.0

LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	22.45	22.64	22.51	22.0±1.0
		1	13	22.34	22.53	22.45	
		1	24	22.27	22.46	22.33	
		12	0	22.18	22.34	22.23	21.5±1.0
		12	6	22.12	22.26	22.17	
		12	13	21.95	22.12	22.06	
		25	0	21.74	21.94	21.82	21.0±1.0
	16QAM	1	0	21.62	21.83	21.71	21.0±1.0
		1	13	21.54	21.73	21.65	
		1	24	21.44	21.62	21.53	
		12	0	21.33	21.53	21.41	21.0±1.0
		12	6	21.29	21.41	21.35	
		12	13	21.16	21.3	21.21	
		25	0	21.06	21.2	21.13	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	22.43	22.54	22.49	22.0±1.0
		1	25	22.34	22.46	22.41	
		1	49	22.29	22.37	22.32	
		25	0	22.17	22.24	22.2	21.5±1.0
		25	13	22.07	22.16	22.11	
		25	25	21.86	22.05	21.94	
		50	0	21.73	21.97	21.84	21.0±1.0
	16QAM	1	0	21.62	21.82	21.71	21.0±1.0
		1	25	21.52	21.73	21.66	
		1	49	21.43	21.61	21.52	
		25	0	21.33	21.53	21.46	21.0±1.0
		25	13	21.24	21.41	21.32	
		25	25	21.15	21.32	21.21	
		50	0	21.05	21.22	21.13	20.5±1.0

LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	22.35	22.56	22.48	22.0±1.0
		1	38	22.31	22.46	22.38	
		1	74	22.21	22.37	22.3	
		36	0	22.17	22.28	22.25	21.5±1.0
		36	18	22.06	22.19	22.11	
		36	39	21.88	22.07	21.94	
		75	0	21.74	21.96	21.83	21.0±1.0
	16QAM	1	0	21.61	21.83	21.71	21.0±1.0
		1	38	21.56	21.72	21.65	
		1	74	21.44	21.61	21.53	
		36	0	21.33	21.52	21.46	21.0±1.0
		36	18	21.24	21.43	21.35	
		36	39	21.16	21.32	21.24	
		75	0	21.05	21.23	21.14	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	22.45	22.68	22.54	22.0±1.0
		1	50	22.34	22.56	22.48	
		1	99	22.28	22.45	22.34	
		50	0	22.17	22.31	22.2	21.5±1.0
		50	25	22.06	22.18	22.1	
		50	50	21.87	22.07	21.94	
		100	0	21.74	21.95	21.82	21.0±1.0
	16QAM	1	0	21.61	21.83	21.71	21.0±1.0
		1	50	21.56	21.72	21.65	
		1	99	21.43	21.6	21.52	
		50	0	21.32	21.52	21.45	21.0±1.0
		50	25	21.18	21.38	21.32	
		50	50	21.07	21.27	21.16	
		100	0	20.89	21.13	21.04	20.5±1.0

3. LTE Band 5 Conducted Power Test Verdict:

LTE FDD Band 5				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20407/824.7	20525/836.5	20643/848.3	
1.4MHz	QPSK	1	0	22.28	22.54	22.36	22.0±1.0
		1	3	22.32	22.49	22.26	
		1	5	22.55	22.45	22.41	
		3	0	22.14	22.15	22.12	21.5±1.0
		3	2	22.19	22.14	22.13	
		3	3	22.13	22.11	22.12	
		6	0	22.06	21.94	21.9	21.0±1.0
	16QAM	1	0	21.16	21.41	21.22	20.5±1.0
		1	3	21.05	21.26	21.07	
		1	5	21.15	21.38	21.19	
		3	0	20.25	20.46	20.37	20.0±1.0
		3	2	20.28	20.59	20.44	
		3	3	20.3	20.57	20.33	
		6	0	20.16	20.45	20.21	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20415/825.5	20525/836.5	20635/847.5	
3MHz	QPSK	1	0	22.43	22.29	22.36	22.0±1.0
		1	7	22.33	22.29	22.36	
		1	14	22.49	22.38	22.39	
		8	0	22.13	22.11	22.15	21.5±1.0
		8	4	22.11	22.2	22.19	
		8	7	22.13	22.14	22.12	
		15	0	22.01	22.03	21.96	21.5±1.0
	16QAM	1	0	21.72	21.74	21.83	21.0±1.0
		1	7	21.8	21.84	21.8	
		1	14	21.81	21.75	21.86	
		8	0	21.21	21.36	21.55	20.5±1.0
		8	4	21.51	21.57	21.36	
		8	7	21.45	21.39	21.45	
		15	0	21.31	21.25	21.31	20.5±1.0

LTE FDD Band 5				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	22.56	22.4	22.4	22.0±1.0
		1	13	22.46	22.25	22.54	
		1	24	22.32	22.4	22.4	
		12	0	22.12	22.24	22.17	21.5±1.0
		12	6	22.12	22.31	22.14	
		12	13	22.26	22.24	22.21	
		25	0	21.95	22.11	22	21.5±1.0
	16QAM	1	0	21.56	21.27	21.26	21.5±1.0
		1	13	21.45	21.12	21.11	
		1	24	21.55	21.24	21.23	
		12	0	20.65	20.32	20.41	21.0±1.0
		12	6	20.68	20.45	20.48	
		12	13	20.7	20.43	20.37	
		25	0	20.56	20.31	20.25	20.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	22.46	22.67	22.54	22.0±1.0
		1	25	22.37	22.54	22.46	
		1	49	22.26	22.43	22.35	
		25	0	21.86	22.05	21.98	21.5±1.0
		25	13	21.92	22.04	22.01	
		25	25	21.98	22.00	22.02	
		50	0	21.88	22.04	21.97	21.5±1.0
	16QAM	1	0	21.75	21.95	21.86	21.0±1.0
		1	25	21.64	21.83	21.71	
		1	49	21.54	21.74	21.62	
		25	0	21.43	21.63	21.51	21.0±1.0
		25	13	21.35	21.54	21.4	
		25	25	21.21	21.46	21.34	
		50	0	21.15	21.31	21.22	20.5±1.0

4. LTE Band 7 Conducted Power Test Verdict:

LTE FDD Band 7				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	22.51	22.81	22.6	22.0±1.0
		1	13	22.43	22.72	22.56	
		1	24	22.34	22.61	22.45	
		12	0	22.28	22.46	22.41	21.5±1.0
		12	6	22.17	22.37	22.3	
		12	13	22.1	22.23	22.18	
		25	0	21.95	22.11	22.08	21.5±1.0
	16QAM	1	0	21.74	21.93	21.84	21.0±1.0
		1	13	21.65	21.84	21.73	
		1	24	21.54	21.74	21.63	
		12	0	21.43	21.63	21.53	21.0±1.0
		12	6	21.31	21.55	21.41	
		12	13	21.23	21.4	21.34	
		25	0	21.01	21.25	21.16	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	22.52	22.81	22.71	22.0±1.0
		1	25	22.43	22.73	22.64	
		1	49	22.34	22.61	22.46	
		25	0	22.21	22.43	22.37	21.5±1.0
		25	13	22.15	22.36	22.3	
		25	25	22.1	22.24	22.19	
		50	0	21.97	22.16	22.07	21.5±1.0
	16QAM	1	0	21.76	21.95	21.84	21.0±1.0
		1	25	21.66	21.84	21.76	
		1	49	21.54	21.73	21.63	
		25	0	21.41	21.63	21.53	21.0±1.0
		25	13	21.34	21.54	21.41	
		25	25	21.23	21.45	21.34	
		50	0	21.11	21.29	21.2	20.5±1.0

LTE FDD Band 7				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	22.54	22.8	22.64	22.0±1.0
		1	38	22.47	22.64	22.59	
		1	74	22.34	22.56	22.47	
		36	0	22.25	22.49	22.39	21.5±1.0
		36	18	22.16	22.34	22.23	
		36	39	22.11	22.23	22.18	
		75	0	21.98	22.11	22.08	21.5±1.0
	16QAM	1	0	21.76	21.93	21.86	21.0±1.0
		1	38	21.63	21.81	21.71	
		1	74	21.54	21.73	21.63	
		36	0	21.44	21.64	21.53	21.0±1.0
		36	18	21.34	21.56	21.41	
		36	39	21.21	21.43	21.36	
		75	0	21.04	21.32	21.15	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	22.59	22.86	22.76	22.0±1.0
		1	50	22.48	22.75	22.61	
		1	99	22.37	22.64	22.48	
		50	0	22.25	22.53	22.39	21.5±1.0
		50	25	22.16	22.38	22.31	
		50	50	22.1	22.21	22.18	
		100	0	21.95	22.15	22.08	21.5±1.0
	16QAM	1	0	21.76	21.92	21.86	21.0±1.0
		1	50	21.62	21.84	21.71	
		1	99	21.54	21.72	21.63	
		50	0	21.44	21.61	21.53	21.0±1.0
		50	25	21.34	21.52	21.41	
		50	50	21.22	21.45	21.34	
		100	0	21.07	21.31	21.12	20.5±1.0

5. LTE Band 12 Conducted Power Test Verdict:

LTE FDD Band 12				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23017/699.7	23095/707.5	23173/715.3	
1.4MHz	QPSK	1	0	22.31	22.51	22.41	22.0±1.0
		1	3	22.23	22.43	22.35	
		1	5	22.18	22.34	22.26	
		3	0	22.11	22.23	22.17	21.5±1.0
		3	2	21.76	21.92	21.84	
		3	3	21.64	21.83	21.71	
		6	0	21.53	21.76	21.63	21.0±1.0
	16QAM	1	0	21.29	21.44	21.38	20.5±1.0
		1	3	21.2	21.33	21.28	
		1	5	21.1	21.22	21.14	
		3	0	21.01	21.15	21.09	20.5±1.0
		3	2	20.86	21.03	20.95	
		3	3	20.74	20.92	20.83	
		6	0	20.61	20.8	20.74	20.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23025/700.5	23095/707.5	23165/714.5	
3MHz	QPSK	1	0	22.33	22.55	22.41	22.0±1.0
		1	7	22.3	22.46	22.34	
		1	14	22.2	22.34	22.26	
		8	0	22.12	22.27	22.15	21.5±1.0
		8	4	21.75	21.93	21.84	
		8	7	21.64	21.84	21.71	
		15	0	21.53	21.76	21.62	21.0±1.0
	16QAM	1	0	21.3	21.47	21.38	20.5±1.0
		1	7	21.2	21.33	21.27	
		1	14	21.1	21.24	21.16	
		8	0	21.02	21.13	21.05	20.5±1.0
		8	4	20.84	21.03	20.95	
		8	7	20.74	20.92	20.84	
		15	0	20.61	20.79	20.69	20.0±1.0

LTE FDD Band 12				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23035/701.5	23095/707.5	23155/713.5	
5MHz	QPSK	1	0	22.34	22.54	22.42	22.0±1.0
		1	13	22.26	22.46	22.33	
		1	24	22.19	22.35	22.26	
		12	0	22.1	22.21	22.13	21.5±1.0
		12	6	21.76	21.92	21.84	
		12	13	21.62	21.82	21.73	
		25	0	21.51	21.74	21.62	21.0±1.0
	16QAM	1	0	21.3	21.43	21.35	20.5±1.0
		1	13	21.21	21.34	21.26	
		1	24	21.08	21.25	21.14	
		12	0	20.97	21.14	21.08	20.5±1.0
		12	6	20.86	21.02	20.95	
		12	13	20.76	21.93	20.84	
		25	0	20.6	20.82	20.71	20.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				23060/704	23095/707.5	23130/711	
10MHz	QPSK	1	0	22.38	22.59	22.46	22.0±1.0
		1	25	22.27	22.48	22.39	
		1	49	22.2	22.35	22.27	
		25	0	22.11	22.24	22.16	21.5±1.0
		25	13	21.76	21.92	21.84	
		25	25	21.64	21.83	21.71	
		50	0	21.53	21.76	21.64	21.0±1.0
	16QAM	1	0	21.31	21.47	21.38	20.5±1.0
		1	25	21.2	21.34	21.29	
		1	49	21.08	21.25	21.14	
		25	0	21	21.14	21.08	20.5±1.0
		25	13	20.86	21.03	20.95	
		25	25	20.74	20.92	20.84	
		50	0	20.63	20.81	20.72	20.0±1.0

6. LTE Band 66 Conducted Power Test Verdict

LTE FDD Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				131979/1710.7	132322/1745	132665/1779.3	
1.4MHz	QPSK	1	0	22.66	22.78	22.79	22.0±1.0
		1	3	22.75	22.71	22.64	
		1	5	22.81	22.62	22.78	
		3	0	22.59	22.59	22.54	22.0±1.0
		3	2	22.56	22.48	22.55	
		3	3	22.52	22.6	22.54	
		6	0	22.42	22.39	22.37	21.5±1.0
	16QAM	1	0	21.86	21.87	21.83	21.0±1.0
		1	3	21.8	21.87	21.85	
		1	5	21.79	21.77	21.8	
		3	0	21.68	21.7	21.57	21.0±1.0
		3	2	21.64	21.73	21.75	
		3	3	21.61	21.67	21.6	
		6	0	21.47	21.55	21.48	21.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				131987/1711.5	12322/1745	132657/1778.5	
3MHz	QPSK	1	0	22.75	22.8	22.64	22.0±1.0
		1	7	22.66	22.66	22.78	
		1	14	22.76	22.68	22.64	
		8	0	22.59	22.5	22.47	22.0±1.0
		8	4	22.58	22.46	22.53	
		8	7	22.57	22.46	22.59	
		15	0	22.42	22.39	22.3	21.5±1.0
	16QAM	1	0	21.83	21.94	21.93	21.0±1.0
		1	7	21.87	21.78	21.8	
		1	14	21.84	21.96	21.78	
		8	0	21.62	21.66	21.68	21.0±1.0
		8	4	21.64	21.67	21.74	
		8	7	21.74	21.65	21.68	
		15	0	21.6	21.53	21.56	21.0±1.0

LTE FDD Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	22.69	22.74	22.76	22.0±1.0
		1	13	22.7	22.73	22.78	
		1	24	22.67	22.71	22.68	
		12	0	22.52	22.57	22.49	22.0±1.0
		12	6	22.55	22.59	22.54	
		12	13	22.5	22.6	22.46	
		25	0	22.35	22.39	22.32	21.5±1.0
	16QAM	1	0	21.81	21.86	21.79	21.0±1.0
		1	13	21.87	21.81	21.89	
		1	24	21.81	21.86	21.79	
		12	0	21.7	21.69	21.64	21.0±1.0
		12	6	21.72	21.62	21.57	
		12	13	21.57	21.74	21.57	
		25	0	21.43	21.62	21.45	21.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	22.78	22.69	22.73	22.0±1.0
		1	25	22.71	22.62	22.76	
		1	49	22.62	22.75	22.81	
		25	0	22.54	22.48	22.56	22.0±1.0
		25	13	22.59	22.57	22.46	
		25	25	22.51	22.49	22.49	
		50	0	22.37	22.39	22.39	21.5±1.0
	16QAM	1	0	21.8	21.92	21.77	21.0±1.0
		1	25	21.89	21.87	21.92	
		1	49	21.89	21.95	21.91	
		25	0	21.59	21.7	21.62	21.0±1.0
		25	13	21.75	21.7	21.7	
		25	25	21.74	21.72	21.74	
		50	0	21.6	21.6	21.62	21.0±1.0

LTE FDD Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	22.7	22.73	22.79	22.0±1.0
		1	38	22.73	22.62	22.67	
		1	74	22.72	22.72	22.8	
		36	0	22.58	22.51	22.53	22.0±1.0
		36	18	22.59	22.47	22.51	
		36	39	22.51	22.56	22.55	
		75	0	22.41	22.39	22.36	21.5±1.0
	16QAM	1	0	21.89	21.78	21.94	21.0±1.0
		1	38	21.77	21.95	21.96	
		1	74	21.96	21.82	21.96	
		36	0	21.6	21.56	21.66	21.0±1.0
		36	18	21.61	21.72	21.61	
		36	39	21.6	21.65	21.7	
		75	0	21.46	21.53	21.58	21.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	22.67	22.86	22.74	22.0±1.0
		1	50	22.54	22.74	22.65	
		1	99	22.43	22.61	22.56	
		50	0	22.31	22.52	22.43	22.0±1.0
		50	25	22.26	22.45	22.37	
		50	50	22.2	22.4	22.28	
		100	0	22.14	22.39	22.26	21.5±1.0
	16QAM	1	0	22.16	22.26	22.21	21.5±1.0
		1	50	22.05	22.11	22.06	
		1	99	22.15	22.23	22.18	
		50	0	21.25	21.31	21.36	20.5±1.0
		50	25	21.28	21.44	21.43	
		50	50	21.3	21.42	21.32	
		100	0	21.16	21.3	21.2	20.5±1.0

7.Band 7 CA

BW (MHz)	Freq (MHz)	Freq (MHz)	Mode	PCC RB	PCC RB	SCC RB	SCC RB	Power (dBm)
				Size	offset	Size	offset	
10+20	2505.5	2519.9	QPSK	1	49	1	0	22.18
				1	24	1	49	15.84
				50	0	100	0	20.74
			16QAM	1	49	1	0	22.07
				1	24	1	49	15.72
				50	0	100	0	20.17
10+20	2525.6	2540.0	QPSK	1	49	1	0	22.35
				1	24	1	49	15.24
				50	0	100	0	20.87
			16QAM	1	49	1	0	21.89
				1	24	1	49	14.95
				50	0	100	0	20.32
10+20	2545.6	2560.0	QPSK	1	49	1	0	21.32
				1	24	1	49	14.89
				50	0	100	0	20.74
			16QAM	1	49	1	0	21.89
				1	24	1	49	14.59
				50	0	100	0	20.83
20+10	2510.0	2524.4	QPSK	1	0	1	0	14.42
				1	0	1	49	14.15
				1	0	50	0	18.74
				1	99	1	49	13.57
				1	99	50	0	19.08
				100	0	1	49	19.14
				100	0	50	0	19.87



				1	99	1	0	21.78
				100	0	1	0	19.95
			16QAM	1	0	1	0	15.42
				1	0	1	49	15.11
				1	0	50	0	19.35
				1	99	1	49	14.52
				1	99	50	0	19.87
				100	0	1	49	19.32
				100	0	50	0	19.74
				1	99	1	0	22.09
				100	0	1	0	19.79
20+10	2530.1	2544.5	QPSK	1	0	1	0	14.84
				1	0	1	49	14.86
				1	0	50	0	19.63
				1	99	1	49	14.73
				1	99	50	0	19.09
				100	0	1	49	19.35
				100	0	50	0	19.57
				1	99	1	0	21.28
				100	0	1	0	19.78
			16QAM	1	0	1	0	14.71
				1	0	1	49	14.04
				1	0	50	0	18.65
				1	99	1	49	14.1
				1	99	50	0	19.13
				100	0	1	49	19.44
				100	0	50	0	19.88
				1	99	1	0	22.38
				100	0	1	0	20.08
20+10	2550.1	2564.5	QPSK	1	0	1	0	14.72



				1	0	1	49	14.14
				1	0	50	0	18.83
				1	99	1	49	13.9
				1	99	50	0	19.33
				100	0	1	49	19.26
				100	0	50	0	19.77
				1	99	1	0	22.02
				100	0	1	0	19.65
			16QAM	1	0	1	0	14.52
				1	0	1	49	13.84
				1	0	50	0	18.38
				1	99	1	49	13.75
				1	99	50	0	18.69
				100	0	1	49	19.22
				100	0	50	0	19.57
				1	99	1	0	22.35
				100	0	1	0	19.83
15+20	2507.8	2524.9	QPSK	1	74	1	0	21.94
				1	36	1	49	11.46
				75	0	100	0	19.68
			16QAM	1	74	1	0	21.74
				1	36	1	49	13.65
				75	0	100	0	19.65
15+20	2523.5	2542.4	QPSK	1	74	1	0	22.04
				1	36	1	49	12.74
				75	0	100	0	18.25
			16QAM	1	74	1	0	21.37
				1	36	1	49	12.18
				75	0	100	0	19.88
15+20	2542.9	2560.0	QPSK	1	74	1	0	22.00



				1	36	1	49	11.67
				75	0	100	0	19.48
			16QAM	1	74	1	0	21.97
				1	36	1	49	12.24
				75	0	100	0	19.79
15+15	2507.5	2522.5	QPSK	1	74	1	0	22.35
				75	0	75	0	19.74
			16QAM	1	74	1	0	21.95
				75	0	75	0	19.37
15+15	2527.5	2542.5	QPSK	1	74	1	0	22.20
				75	0	75	0	19.49
			16QAM	1	74	1	0	20.74
				75	0	75	0	19.19
15+15	2547.5	2562.5	QPSK	1	74	1	0	22.27
				75	0	75	0	19.35
			16QAM	1	74	1	0	21.74
				75	0	75	0	19.29
15+10	2507.5	2519.5	QPSK	1	74	1	49	22.00
				1	36	1	24	12.17
				75	0	50	0	19.8
			16QAM	1	74	1	49	21.83
				1	36	1	24	11.62
				75	0	50	0	19.94
15+10	2530.1	2542.1	QPSK	1	74	1	49	22.2
				1	36	1	24	12.43
				75	0	50	0	19.82
			16QAM	1	74	1	49	21.82
				1	36	1	24	11.51
				75	0	50	0	19.83
15+10	2552.7	2564.7	QPSK	1	74	1	49	22.15



				1	36	1	24	12.54
				75	0	50	0	19.79
			16QAM	1	74	1	49	21.85
				1	36	1	24	11.27
				75	0	50	0	19.39
20+15	2510.0	2527.1	QPSK	1	99	1	0	20.3
				100	0	75	0	19.89
			16QAM	1	99	1	0	21.01
				100	0	75	0	19.96
20+15	2527.6	2544.7	QPSK	1	99	1	0	20.19
				100	0	75	0	19.88
			16QAM	1	99	1	0	20.95
				100	0	75	0	19.76
20+15	2545.1	2562.2	QPSK	1	99	1	0	20.21
				100	0	75	0	19.79
			16QAM	1	99	1	0	20.91
				100	0	75	0	19.94
20+20	2510.0	2529.8	QPSK	1	0	1	0	14.83
				1	0	1	99	13.75
				1	0	100	0	19.79
				1	49	1	49	14.32
				1	99	1	99	14.19
				1	99	100	0	21.00
				100	0	1	99	20.4
				100	0	1	99	20.69
				1	99	1	0	22.78
				100	0	1	0	21.01
			16QAM	1	0	1	0	14.12
				1	0	1	99	13.67
				1	0	100	0	19.47



				1	49	1	49	14.09
				1	99	1	99	14.35
				1	99	100	0	20.85
				100	0	1	99	20.19
				100	0	1	99	20.85
				1	99	1	0	22.75
				100	0	1	0	20.97
20+20	2525.1	2544.9	QPSK	1	0	1	0	14.73
				1	0	1	99	13.70
				1	0	100	0	19.75
				1	49	1	49	14.42
				1	99	1	99	14.38
				1	99	100	0	20.66
				100	0	1	99	20.28
				100	0	1	99	20.47
				1	99	1	0	22.69
				100	0	1	0	20.75
			16QAM	1	0	1	0	14.04
				1	0	1	99	13.49
				1	0	100	0	19.27
				1	49	1	49	13.83
				1	99	1	99	14.39
				1	99	100	0	20.62
				100	0	1	99	20.07
				100	0	1	99	20.64
				1	99	1	0	22.59
				100	0	1	0	20.67
20+20	2540.2	2560.0	QPSK	1	0	1	0	14.64
				1	0	1	99	13.58
				1	0	100	0	19.52



				1	49	1	49	14.27
				1	99	1	99	14.59
				1	99	100	0	20.74
				100	0	1	99	20.57
				100	0	1	99	20.32
				1	99	1	0	21.95
				100	0	1	0	20.75
			16QAM	1	0	1	0	15.08
				1	0	1	99	13.74
				1	0	100	0	19.65
				1	49	1	49	14.12
				1	99	1	99	14.37
				1	99	100	0	20.54
				100	0	1	99	20.05
				100	0	1	99	20.71
				1	99	1	0	22.49
				100	0	1	0	20.88

7.4 WIFI Conducted Power

WLAN 2.4GHz Band Conducted Power

Channel/Freq.(MHz)	Maximum Conducted Out Power (dBm) Average		
	802.11b	802.11g	802.11n(HT20)
1(2412)	16.59	16.38	14.03
6(2437)	17.20	16.45	13.84
11(2462)	17.18	16.10	12.16
Channel/Freq.(MHz)	Maximum Conducted Out Power (dBm) Average		
	802.11n40		
3(2422)	14.46		
6(2437)	13.93		
9(2452)	14.90		

WLAN 5GHz Band Conducted Power

U-NII-1 AVGSA Output Power

Mode	Test Frequency (MHz)	Max Conducted Output Power (dBm)
802.11n (20MHz)	5180	13.53
802.11n (20MHz)	5220	13.69
802.11n (20MHz)	5240	13.78
802.11n (40MHz)	5190	14.16
802.11n (40MHz)	5230	14.29
802.11a (20MHz)	5180	14.10
802.11a (20MHz)	5220	13.99
802.11a (20MHz)	5240	14.02
802.11ac (20MHz)	5180	14.00
802.11ac (20MHz)	5220	13.63
802.11ac (20MHz)	5240	13.66
802.11ac (40MHz)	5190	14.37
802.11ac (40MHz)	5230	14.14
802.11ac (80MHz)	5210	13.77

U-NII-3 AVGSA Output Power

Mode	Test Frequency (MHz)	Max Conducted Output Power (dBm)
802.11a (20MHz)	5745	13.61
802.11a (20MHz)	5785	13.57
802.11a (20MHz)	5825	13.69
802.11n (20MHz)	5745	13.67
802.11n (20MHz)	5785	13.48
802.11n (20MHz)	5825	13.63
802.11n (40MHz)	5755	14.08
802.11n (40MHz)	5795	13.98
802.11ac (20MHz)	5745	13.48
802.11ac (20MHz)	5785	13.39
802.11ac (20MHz)	5825	13.35
802.11ac (40MHz)	5755	14.20
802.11ac (40MHz)	5795	13.62
802.11ac (80MHz)	5775	14.06

Note:

1. Per KDB248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at lowest data rate
3. Per KDB248227 D01 v02r02, 802.11g /11n-HT20/11n-HT40 is not required. . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/Kg}$. Thus the SAR can be excluded.

7.5 Bluetooth Output Power

Channel	Frequency (MHz)	BT3.0 Output Power(dBm)		
		GFSK	π /4-DQPSK	8-DPSK
CH 0	2402	9.16	8.54	8.57
CH 39	2441	9.22	8.66	8.67
CH 78	2480	9.63	9.07	9.11
Channel	Frequency (MHz)	BT4.0 Output Power(dBm)		
		GFSK		
CH 0	2402	6.121		
CH 20	2442	6.176		
CH 39	2480	6.054		

8. SAR test Exclusion and estimate SAR calculation:

Note:

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\leq 50\text{mm}$ are determined by: $[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are round to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
 - If the test separation distance(antenna-user) is $< 5\text{mm}$, 5mm is used for excluded SAR calculation

BT4.0 Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
7.0	5.012	5	2.45	1.569

Per KDB 447498 D01v06 exclusion thresholds is $1.569 < 3$, RF exposure evaluation is not required.

BT estimated SAR value = $\text{Exclusion Thresholds} / 7.5 = 1.569 / 7.5 = \mathbf{0.209\text{W/Kg}}$



BT4.0 Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
7.0	5.012	10	2.45	0.784

Per KDB 447498 D01v06 exclusion thresholds is $0.784 < 3$, RF exposure evaluation is not required.

BT estimated SAR value = $\text{Exclusion Thresholds} / 7.5 = 0.784 / 7.5 = \mathbf{0.105\text{W/Kg}}$

The estimated SAR value is used for simultaneous transmission analysis.

Antenna Location:

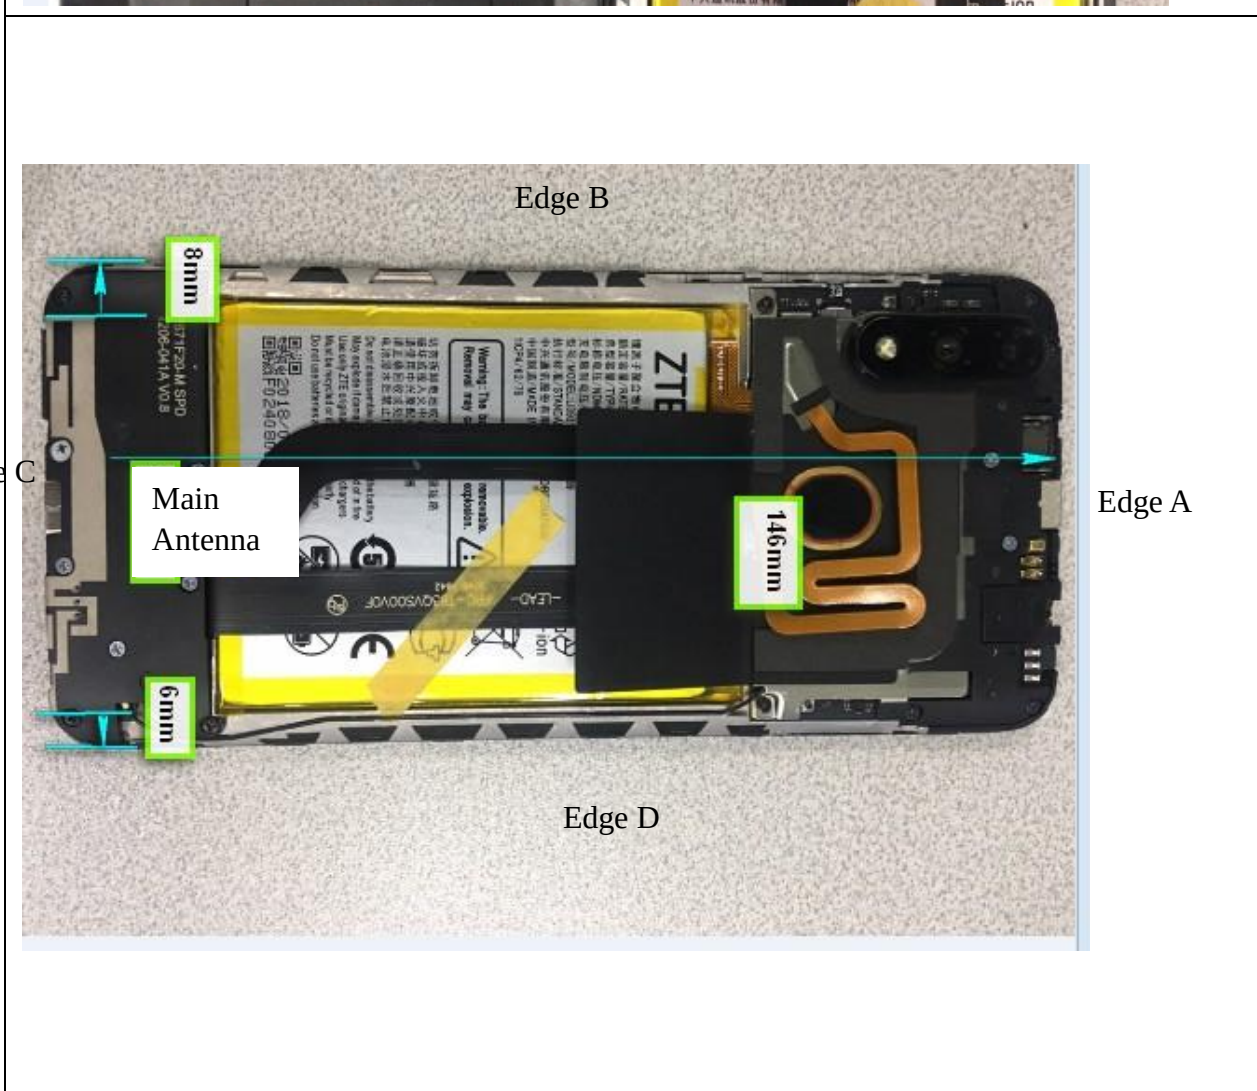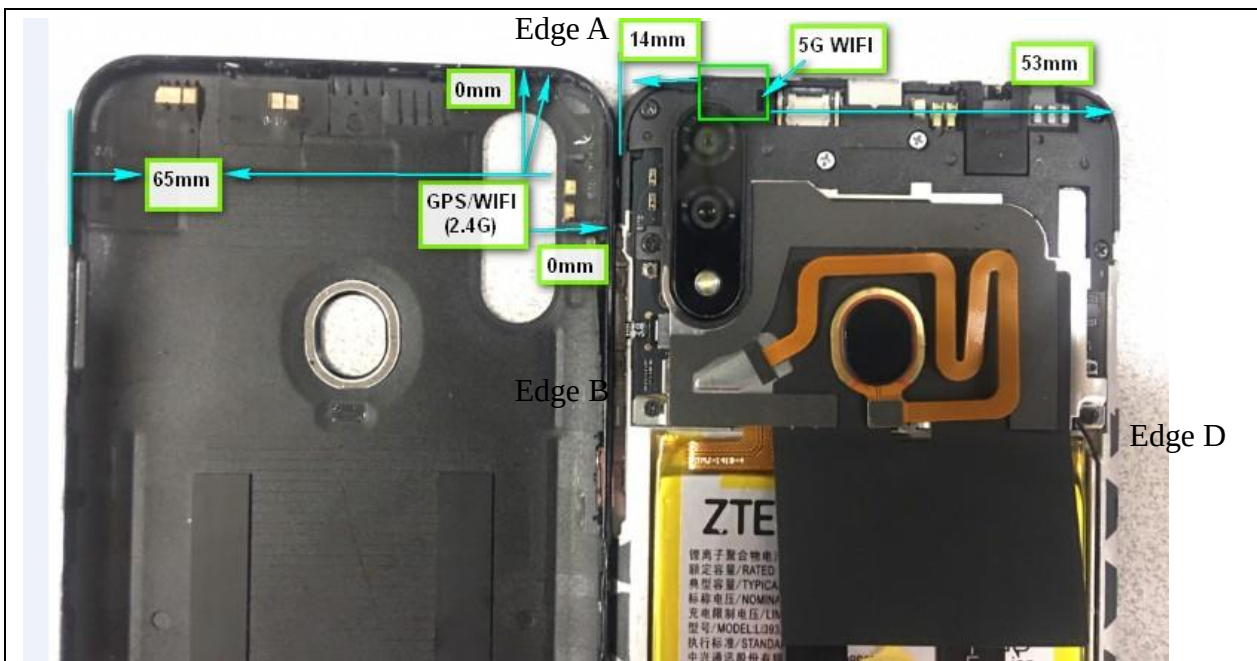

Antenna-to-User (Edge Side) distance (mm):

Antenna	Front	Back	Edge A	Edge B	Edge C	Edge D
WWAN Main Antenna	2	2	146	8	0	6
WIFI 2.4G/BT	2	2	0	0	137	65
WIFI 5G	4.5	2	0	14	150	53

Note: The diagonal distance of the overall section is 15.5cm.

The Body SAR measurement positions of each band are as below:

Antenna	Front	Back	Edge A	Edge B	Edge C	Edge D
WWAN Antenna Body-worn	Yes	Yes	No	No	No	No
WWAN Antenna hotspot	Yes	Yes	No	Yes	Yes	Yes
WIFI Antenna Body-worn	Yes	Yes	No	No	No	No
WIFI 2.4G Antenna hotspot	Yes	Yes	Yes	Yes	No	No
WIFI 5G Antenna Body-worn	Yes	Yes	No	No	No	No

Note: According to KDB 941225 D06 v02r01, when antenna-to-edge>2.5cm, SAR is not required.

9. Scaling Factor calculation

Operation Mode	Channel /Frequency	Output Power(dBm)	Tune up Power in tolerance(dBm)	Scaling Factor
GSM850	128/824.2	31.90	31.5 $\pm$ 1.0	1.148
	190/836.6	32.10	31.5 $\pm$ 1.0	1.096
	251/848.8	32.10	31.5 $\pm$ 1.0	1.096
GPRS850 (GPRS 4Tx)	128/824.2	27.43	27.0 $\pm$ 1.0	1.140
	190/836.6	27.86	27.0 $\pm$ 1.0	1.033
	251/848.8	27.39	27.0 $\pm$ 1.0	1.151
GSM1900	512/1850.2	28.60	28.5 $\pm$ 1.0	1.230
	661/1880.0	28.90	28.5 $\pm$ 1.0	1.148
	810/1909.8	29.20	28.5 $\pm$ 1.0	1.072
GPRS1900 (GPRS 4Tx)	512/1850.2	23.76	23.0 $\pm$ 1.0	1.057
	661/1880.0	23.98	23.0 $\pm$ 1.0	1.005
	810/1909.8	23.46	23.0 $\pm$ 1.0	1.132
WCDMA1900	9262/1852.4	22.35	22.0 $\pm$ 1.0	1.161
	9400/1880.0	22.43	22.0 $\pm$ 1.0	1.140
	9538/1907.6	22.65	22.0 $\pm$ 1.0	1.084
WCDMA1700	19300/1720	21.13	20.5 $\pm$ 1.0	1.089
	19575/1747.5	21.50	20.5 $\pm$ 1.0	1.000
	19850/1775	21.05	20.5 $\pm$ 1.0	1.109
WCDMA850	4132/826.4	22.87	22.0 $\pm$ 1.0	1.030
	4183/836.6	22.94	22.0 $\pm$ 1.0	1.014
	4233/846.6	22.86	22.0 $\pm$ 1.0	1.033
LTE B2 20MHz 1RB#0	18100/1930	22.45	22.0 $\pm$ 1.0	1.135
	18300/1950	22.86	22.0 $\pm$ 1.0	1.033
	18500/1970	22.67	22.0 $\pm$ 1.0	1.079
LTE B2 20MHz 50RB#50	18100/1930	21.98	21.5 $\pm$ 1.0	1.127
	18300/1950	22.21	21.5 $\pm$ 1.0	1.069
	18500/1970	21.86	21.5 $\pm$ 1.0	1.159
LTE B4 20MHz 1RB#0	19300/1720	22.45	22.0 $\pm$ 1.0	1.135
	19575/1747.5	22.68	22.0 $\pm$ 1.0	1.076
	19850/1775	22.54	22.0 $\pm$ 1.0	1.112
LTE B4 20MHz 50RB#0	19300/1720	22.17	21.5 $\pm$ 1.0	1.079
	19575/1747.5	22.31	21.5 $\pm$ 1.0	1.045
	19850/1775	22.20	21.5 $\pm$ 1.0	1.072
LTE B5 10MHz 1RB#0	20450/829	22.46	22.0 $\pm$ 1.0	1.132
	20525/836.5	22.67	22.0 $\pm$ 1.0	1.079
	20600/844	22.54	22.0 $\pm$ 1.0	1.112
LTE B5 10MHz 50RB#0	20450/829	21.86	21.5 $\pm$ 1.0	1.159
	20525/836.5	22.05	21.5 $\pm$ 1.0	1.109
	20600/844	21.98	21.5 $\pm$ 1.0	1.127

LTE B7 20MHz 1RB#0	20850/2510	22.59	22.0 ± 1.0	1.099
	21100/2535	22.86	22.0 ± 1.0	1.033
	21350/2560	22.76	22.0 ± 1.0	1.057
LTE B7 20MHz 50RB#0	20850/2510	22.25	22.0 ± 1.0	1.189
	21100/2535	22.53	22.0 ± 1.0	1.114
	21350/2560	22.39	22.0 ± 1.0	1.151
LTE B12 10MHz 1RB#0	23060/704	22.38	22.0 ± 1.0	1.153
	23095/707.5	22.59	22.0 ± 1.0	1.099
	23130/711	22.46	22.0 ± 1.0	1.132
LTE B12 10MHz 25RB#0	23060/704	22.11	21.5 ± 1.0	1.094
	23095/707.5	22.24	21.5 ± 1.0	1.062
	23130/711	22.16	21.5 ± 1.0	1.081
LTE B66 20MHz 1RB#0	38750/2310	22.67	22.0 ± 1.0	1.079
	39150/2350	22.86	22.0 ± 1.0	1.033
	39550/2390	22.74	22.0 ± 1.0	1.062
LTE B66 20MHz 50RB#0	38750/2310	22.31	22.0 ± 1.0	1.172
	39150/2350	22.52	22.0 ± 1.0	1.117
	39550/2390	22.43	22.0 ± 1.0	1.140
WIFI 2.4G 802.11b	1/2412	16.95	16.5 ± 1.0	1.135
	6/2437	17.20	16.5 ± 1.0	1.072
	11/2462	17.18	16.5 ± 1.0	1.076
BT	CH0	9.16	9.0 ± 1.0	1.213
	CH39	9.22	9.0 ± 1.0	1.197
	CH78	9.63	9.0 ± 1.0	1.089
WIFI 5G 802.11ac(40 MHz)	5190	14.37	13.5 ± 1.0	1.030
WIFI 5G 802.11ac (40 MHz)	5755	14.20	13.5 ± 1.0	1.072
LTE B7 20MHz+20MHz 1RB#99,1RB#0	Low	22.78	22 ± 1.0	1.052
	Middle	22.69	22 ± 1.0	1.074
	High	21.95	22 ± 1.0	1.274

Note: for LTE power tolerance, only QPSK modulation mode was provide here.

10. Test Results

Results overview of GSM850

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	190/836.6	Voice	0.165	1.096	0.181	-2.89	Yes
Left Tilt 15°	190/836.6	Voice	0.096	1.096	0.105	-2.04	/
Right Cheek	190/836.6	Voice	0.135	1.096	0.148	-2.73	/
Right Tilt 15°	190/836.6	Voice	0.100	1.096	0.110	-3.07	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	128/824.2	GPRS 4Tx	0.792	1.140	0.903	-4.55	/
Back Upward	190/836.6	GPRS 4Tx	0.837	1.033	0.864	-3.36	Yes
Back Upward	251/848.8	GPRS 4Tx	0.785	1.151	0.903	-3.96	/
Back Upward	128/824.2	GPRS 4Tx	0.789	1.140	0.900	-2.58	/
Back Upward	190/836.6	GPRS 4Tx	0.824	1.033	0.851	-3.25	/
Back Upward	251/848.8	GPRS 4Tx	0.784	1.151	0.902	-2.84	/
Face Upward	190/836.6	GPRS 4Tx	0.339	1.033	0.350	-1.66	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	128/824.2	GPRS 4Tx	0.792	1.140	0.903	-4.55	/
Back Upward	190/836.6	GPRS 4Tx	0.837	1.033	0.864	-3.36	Yes
Back Upward	251/848.8	GPRS 4Tx	0.785	1.151	0.903	-3.96	/
Back Upward	128/824.2	GPRS 4Tx	0.789	1.140	0.900	-2.58	/
Back Upward	190/836.6	GPRS 4Tx	0.824	1.033	0.851	-3.25	/
Back Upward	251/848.8	GPRS 4Tx	0.784	1.151	0.902	-2.84	/
Face Upward	190/836.6	GPRS 4Tx	0.339	1.033	0.350	-1.66	/
Edge B	190/836.6	GPRS 4Tx	0.366	1.033	0.378	-3.30	/
Edge C	190/836.6	GPRS 4Tx	0.482	1.033	0.498	-1.43	/
Edge D	190/836.6	GPRS 4Tx	0.186	1.033	0.192	-0.63	/

Results overview of GSM1900

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	661/1880.0	Voice	0.132	1.148	0.152	-3.88	/
Left Tilt 15°	661/1880.0	Voice	0.089	1.148	0.102	-3.72	/
Right Cheek	661/1880.0	Voice	0.082	1.148	0.094	-4.37	/
Right Tilt 15°	661/1880.0	Voice	0.058	1.148	0.067	-2.85	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	661/1880.0	GPRS 4Tx	0.706	1.005	0.709	-0.28	Yes
Face Upward	661/1880.0	GPRS 4Tx	0.412	1.005	0.414	-3.60	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	661/1880.0	GPRS 4Tx	0.706	1.005	0.709	-0.28	/
Face Upward	661/1880.0	GPRS 4Tx	0.412	1.005	0.414	-3.60	/
Edge B	661/1880.0	GPRS 4Tx	0.203	1.005	0.204	-4.89	/
Edge C	512/1850.2	GPRS 4Tx	0.928	1.084	1.006	2.54	/
Edge C	661/1880.0	GPRS 4Tx	1.014	1.005	1.019	-3.93	Yes
Edge C	810/1909.8	GPRS 4Tx	1.007	1.000	1.007	1.05	/
Edge C Repeated	512/1850.2	GPRS 4Tx	0.923	1.084	1.001	0.52	/
Edge C Repeated	661/1880.0	GPRS 4Tx	0.997	1.005	1.002	-0.78	/
Edge C Repeated	810/1909.8	GPRS 4Tx	1.010	1.000	1.010	0.36	/
Edge D	661/1880.0	GPRS 4Tx	0.212	1.005	0.213	-3.58	/

Results overview of WCDMA1900

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	9400/1880.0	RMC	0.237	1.140	0.270	-4.24	/
Left Tilt 15°	9400/1880.0	RMC	0.106	1.140	0.121	-3.39	/
Right Cheek	9400/1880.0	RMC	0.258	1.140	0.294	2.96	Yes
Right Tilt 15°	9400/1880.0	RMC	0.090	1.140	0.103	-3.16	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	9262/1852.4	RMC	0.921	1.161	1.070	1.02	/
Back Upward	9400/1880.0	RMC	0.932	1.140	1.063	-0.58	Yes
Back Upward	9538/1907.6	RMC	0.930	1.084	1.008	-1.84	/
Back Upward Repeated	9262/1852.4	RMC	0.917	1.161	1.065	0.38	/
Back Upward Repeated	9400/1880.0	RMC	0.930	1.140	1.060	0.47	/
Back Upward Repeated	9538/1907.6	RMC	0.925	1.084	1.003	1.36	/
Face Upward	9400/1880.0	RMC	0.632	1.140	0.721	-1.89	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	9262/1852.4	RMC	0.921	1.161	1.070	1.02	/
Back Upward	9400/1880.0	RMC	0.932	1.140	1.063	-0.58	/
Back Upward	9538/1907.6	RMC	0.930	1.084	1.008	-1.84	/
Back Upward Repeated	9262/1852.4	RMC	0.917	1.161	1.065	0.38	/
Back Upward Repeated	9400/1880.0	RMC	0.930	1.140	1.060	0.47	/
Back Upward Repeated	9538/1907.6	RMC	0.925	1.084	1.003	1.36	/
Face Upward	9400/1880.0	RMC	0.632	1.140	0.721	-1.89	/
Edge B	9400/1880.0	RMC	0.324	1.140	0.369	-2.35	/
Edge C	9262/1852.4	RMC	1.044	1.161	1.212	0.28	/
Edge C	9400/1880.0	RMC	1.103	1.140	1.258	-1.56	Yes
Edge C	9538/1907.6	RMC	1.081	1.084	1.172	-1.66	/
Edge C Repeated	9262/1852.4	RMC	1.020	1.161	1.184	-1.04	/
Edge C Repeated	9400/1880.0	RMC	1.098	1.140	1.252	-1.56	/
Edge C Repeated	9538/1907.6	RMC	1.083	1.084	1.174	-0.95	/
Edge D	9400/1880.0	RMC	0.299	1.140	0.341	-3.40	/

Results overview of WCDMA1700

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	1413/1732.6	RMC	0.221	1.000	0.221	-2.96	/
Left Tilt 15°	1413/1732.6	RMC	0.097	1.000	0.097	-0.49	/
Right Cheek	1413/1732.6	RMC	0.195	1.000	0.195	-1.53	/
Right Tilt 15°	1413/1732.6	RMC	0.073	1.000	0.073	-4.59	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	1413/1732.6	RMC	0.675	1.000	0.675	-0.96	Yes
Face Upward	1413/1732.6	RMC	0.545	1.000	0.545	-1.01	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	1413/1732.6	RMC	0.675	1.000	0.675	-0.96	Yes
Face Upward	1413/1732.6	RMC	0.545	1.000	0.545	-1.01	/
Edge B	1413/1732.6	RMC	0.244	1.000	0.244	-0.91	/
Edge C	1413/1732.6	RMC	0.567	1.000	0.567	-1.68	/
Edge D	1413/1732.6	RMC	0.141	1.000	0.141	-3.92	/

Results overview of WCDMA850

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	4183/836.6	RMC	0.209	1.014	0.212	-3.37	/
Left Tilt 15°	4183/836.6	RMC	0.134	1.014	0.136	-3.35	/
Right Cheek	4183/836.6	RMC	0.244	1.014	0.247	-0.09	Yes
Right Tilt 15°	4183/836.6	RMC	0.140	1.014	0.142	-2.91	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	4183/836.6	RMC	0.424	1.014	0.430	-1.56	Yes
Face Upward	4183/836.6	RMC	0.380	1.014	0.385	-0.49	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	4183/836.6	RMC	0.424	1.014	0.430	-1.56	Yes
Face Upward	4183/836.6	RMC	0.380	1.014	0.385	-0.49	/
Edge B	4183/836.6	RMC	0.223	1.014	0.226	-3.52	/
Edge C	4183/836.6	RMC	0.256	1.014	0.260	-1.08	/
Edge D	4183/836.6	RMC	0.133	1.014	0.135	-1.56	/

Results overview of FDD LTE Band 2, QPSK, 20MHz Bandwidth

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Left Cheek	18300/1950	Data	0.105	1.033	0.108	3.83	/
Left Tilt 15°	18300/1950	Data	0.076	1.033	0.078	-4.94	/
Right Cheek	18300/1950	Data	0.166	1.033	0.171	-4.05	Yes
Right Tilt 15°	18300/1950	Data	0.088	1.033	0.091	-2.14	/
50%RB#50							
Left Cheek	18300/1950	Data	0.088	1.069	0.094	2.33	/
Left Tilt 15°	18300/1950	Data	0.067	1.069	0.072	1.25	/
Right Cheek	18300/1950	Data	0.129	1.069	0.138	0.61	/
Right Tilt 15°	18300/1950	Data	0.079	1.069	0.084	2.67	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Back Upward	18300/1950	Data	0.470	1.033	0.485	-3.07	Yes
Face Upward	18300/1950	Data	0.259	1.033	0.267	-2.16	/
50%RB#50							
Back Upward	18300/1950	Data	0.395	1.069	0.422	1.02	/
Face Upward	18300/1950	Data	0.201	1.069	0.215	-0.33	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	Limit (W/kg)
1RB#0							
Back Upward	18300/1950	Data	0.470	1.033	0.485	-3.07	/
Face Upward	18300/1950	Data	0.259	1.033	0.267	-2.16	/
Edge B	18300/1950	Data	0.155	1.033	0.160	-3.66	/
Edge C	18300/1950	Data	0.552	1.033	0.570	-2.71	Yes
Edge D	18300/1950	Data	0.189	1.033	0.195	-1.93	/
50%RB#50							
Back Upward	18300/1950	Data	0.395	1.069	0.422	1.02	/
Face Upward	18300/1950	Data	0.201	1.069	0.215	-0.33	/
Edge B	18300/1950	Data	0.104	1.069	0.111	3.04	/
Edge C	18300/1950	Data	0.472	1.069	0.505	-2.50	/
Edge D	18300/1950	Data	0.141	1.069	0.151	-4.18	/

Results overview of FDD LTE Band 4, QPSK, 20MHz Bandwidth

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Left Cheek	19575/1747.5	Data	0.187	1.076	0.201	-3.86	/
Left Tilt 15°	19575/1747.5	Data	0.060	1.076	0.065	-4.84	/
Right Cheek	19575/1747.5	Data	0.188	1.076	0.202	-3.25	Yes
Right Tilt 15°	19575/1747.5	Data	0.061	1.076	0.066	-4.18	/
50%RB#0							
Left Cheek	19575/1747.5	Data	0.154	1.045	0.161	2.05	/
Left Tilt 15°	19575/1747.5	Data	0.051	1.045	0.053	1.35	/
Right Cheek	19575/1747.5	Data	0.157	1.045	0.164	0.65	/
Right Tilt 15°	19575/1747.5	Data	0.052	1.045	0.054	0.42	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Back Upward	19575/1747.5	Data	0.663	1.076	0.714	-0.89	Yes
Face Upward	19575/1747.5	Data	0.492	1.076	0.530	-1.33	/
50%RB#0							
Back Upward	19575/1747.5	Data	0.577	1.045	0.603	1.02	/
Face Upward	19575/1747.5	Data	0.421	1.045	0.440	3.17	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	Limit (W/kg)
1RB#0							
Back Upward	19575/1747.5	Data	0.663	1.076	0.714	-0.89	Yes
Face Upward	19575/1747.5	Data	0.492	1.076	0.530	-1.33	/
Edge B	19575/1747.5	Data	0.243	1.076	0.262	-3.18	/
Edge C	19575/1747.5	Data	0.636	1.076	0.685	-1.64	/
Edge D	19575/1747.5	Data	0.142	1.076	0.153	-2.51	/
50%RB#0							
Back Upward	19575/1747.5	Data	0.577	1.045	0.603	1.02	/
Face Upward	19575/1747.5	Data	0.421	1.045	0.440	3.17	/
Edge B	19575/1747.5	Data	0.182	1.045	0.190	1.33	/
Edge C	19575/1747.5	Data	0.583	1.045	0.609	2.14	/
Edge D	19575/1747.5	Data	0.117	1.045	0.122	1.67	/

Results overview of FDD LTE Band 5, QPSK, 10MHz Bandwidth

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Left Cheek	21625/897.5	Data	0.109	1.079	0.118	2.30	/
Left Tilt 15°	21625/897.5	Data	0.079	1.079	0.085	0.32	/
Right Cheek	21625/897.5	Data	0.131	1.079	0.141	-4.97	Yes
Right Tilt 15°	21625/897.5	Data	0.060	1.079	0.065	-4.53	/
50%RB#0							
Left Cheek	21625/897.5	Data	0.078	1.109	0.087	1.02	/
Left Tilt 15°	21625/897.5	Data	0.057	1.109	0.063	0.35	/
Right Cheek	21625/897.5	Data	0.102	1.109	0.113	2.36	/
Right Tilt 15°	21625/897.5	Data	0.051	1.109	0.057	3.41	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Back Upward	21625/897.5	Data	0.244	1.079	0.263	-2.57	Yes
Face Upward	21625/897.5	Data	0.095	1.079	0.102	-3.48	/
50%RB#0							
Back Upward	21625/897.5	Data	0.178	1.109	0.197	1.35	/
Face Upward	21625/897.5	Data	0.067	1.109	0.074	2.30	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	Limit (W/kg)
1RB#0							
Back Upward	21625/897.5	Data	0.244	1.079	0.263	-2.57	Yes
Face Upward	21625/897.5	Data	0.095	1.079	0.102	-3.48	/
Edge B	21625/897.5	Data	0.146	1.079	0.158	-2.35	/
Edge C	21625/897.5	Data	0.072	1.079	0.078	-4.50	/
Edge D	21625/897.5	Data	0.087	1.079	0.094	-1.79	/
50%RB#0							
Back Upward	21625/897.5	Data	0.178	1.109	0.197	1.35	/
Face Upward	21625/897.5	Data	0.067	1.109	0.074	2.30	/
Edge B	21625/897.5	Data	0.105	1.109	0.116	0.33	/
Edge C	21625/897.5	Data	0.056	1.109	0.062	1.24	/
Edge D	21625/897.5	Data	0.061	1.109	0.068	-1.05	/

Results overview of FDD LTE Band 7, QPSK, 20MHz Bandwidth

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Left Cheek	21100/2535	Data	0.175	1.033	0.181	-3.31	Yes
Left Tilt 15°	21100/2535	Data	0.071	1.033	0.073	-3.50	/
Right Cheek	21100/2535	Data	0.065	1.033	0.067	2.83	/
Right Tilt 15°	21100/2535	Data	0.036	1.033	0.037	-4.24	/
50%RB#0							
Left Cheek	21100/2535	Data	0.145	1.114	0.162	0.52	/
Left Tilt 15°	21100/2535	Data	0.052	1.114	0.058	1.30	/
Right Cheek	21100/2535	Data	0.057	1.114	0.064	2.03	/
Right Tilt 15°	21100/2535	Data	0.028	1.114	0.031	0.41	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Back Upward	20850/2510	Data	0.917	1.099	1.008	1.05	/
Back Upward	21100/2535	Data	0.989	1.033	1.021	-4.29	Yes
Back Upward	21350/2560	Data	0.924	1.057	0.976	0.33	/
Back Upward Repeated	20850/2510	Data	0.911	1.099	1.001	2.30	/
Back Upward Repeated	21100/2535	Data	0.982	1.033	1.014	1.52	/
Back Upward Repeated	21350/2560	Data	0.908	1.057	0.960	4.03	/
Face Upward	21100/2535	Data	0.345	1.033	0.356	-2.86	/
50%RB#0							
Back Upward	20850/2510	Data	0.854	1.189	1.015	1.44	/
Back Upward	21100/2535	Data	0.869	1.114	0.968	1.05	/
Back Upward	21350/2560	Data	0.847	1.151	0.975	2.03	/
Back Upward Repeated	20850/2510	Data	0.851	1.189	1.012	-1.05	/
Back Upward Repeated	21100/2535	Data	0.865	1.114	0.964	0.52	/
Back Upward Repeated	21350/2560	Data	0.846	1.151	0.974	0.37	/
Face Upward	21100/2535	Data	0.314	1.114	0.350	0.24	/

Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	Limit (W/kg)
1RB#0							
Back Upward	20850/2510	Data	0.917	1.099	1.008	1.05	/
Back Upward	21100/2535	Data	0.989	1.033	1.021	-4.29	Yes
Back Upward	21350/2560	Data	0.924	1.057	0.976	0.33	/
Back Upward Repeated	20850/2510	Data	0.911	1.099	1.001	2.30	/
Back Upward Repeated	21100/2535	Data	0.982	1.033	1.014	1.52	/
Back Upward Repeated	21350/2560	Data	0.908	1.057	0.960	4.03	/
Face Upward	21100/2535	Data	0.345	1.033	0.356	-2.86	/
Edge B	21100/2535	Data	0.028	1.033	0.029	-2.44	/
Edge C	20850/2510	Data	0.923	1.099	1.014	0.25	/
Edge C	21100/2535	Data	0.982	1.033	1.014	-3.50	/
Edge C	21350/2560	Data	0.953	1.057	1.007	0.38	/
Edge C	20850/2510	Data	0.942	1.099	1.035	1.08	/
Edge C	21100/2535	Data	0.975	1.033	1.007	-2.36	/
Edge C	21350/2560	Data	0.948	1.057	1.002	-1.20	/
Edge D	21100/2535	Data	0.143	1.033	0.148	0.10	/
50%RB#0							
Back Upward	20850/2510	Data	0.854	1.189	1.015	1.44	/
Back Upward	21100/2535	Data	0.869	1.114	0.968	1.05	/
Back Upward	21350/2560	Data	0.847	1.151	0.975	2.03	/
Back Upward Repeated	20850/2510	Data	0.851	1.189	1.012	-1.05	/
Back Upward Repeated	21100/2535	Data	0.865	1.114	0.964	0.52	/
Back Upward Repeated	21350/2560	Data	0.846	1.151	0.974	0.37	/
Face Upward	21100/2535	Data	0.314	1.114	0.350	0.24	/
Edge B	21100/2535	Data	0.028	1.114	0.031	-2.44	/
Edge C	20850/2510	Data	0.837	1.189	0.995	0.58	/
Edge C	21100/2535	Data	0.842	1.114	0.938	-2.36	/
Edge C	21350/2560	Data	0.834	1.151	0.960	1.52	/
Edge C	20850/2510	Data	0.835	1.189	0.993	-4.36	/
Edge C	21100/2535	Data	0.840	1.114	0.936	2.51	
Edge C	21350/2560	Data	0.833	1.151	0.959	3.65	/
Edge D	21100/2535	Data	0.143	1.114	0.159	0.10	/

Results overview of FDD LTE Band 12, QPSK, 10MHz Bandwidth

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Left Cheek	23095/707.5	Data	0.089	1.099	0.098	-4.43	Yes
Left Tilt 15°	23095/707.5	Data	0.070	1.099	0.077	-4.34	/
Right Cheek	23095/707.5	Data	0.082	1.099	0.090	-1.72	/
Right Tilt 15°	23095/707.5	Data	0.060	1.099	0.066	-4.39	/
50%RB#0							
Left Cheek	23095/707.5	Data	0.075	1.062	0.080	1.23	/
Left Tilt 15°	23095/707.5	Data	0.062	1.062	0.066	2.02	/
Right Cheek	23095/707.5	Data	0.076	1.062	0.081	1.41	/
Right Tilt 15°	23095/707.5	Data	0.055	1.062	0.058	2.53	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Back Upward	23095/707.5	Data	0.245	1.099	0.269	-2.63	Yes
Face Upward	23095/707.5	Data	0.073	1.099	0.080	-1.67	/
50%RB#0							
Back Upward	23095/707.5	Data	0.211	1.062	0.224	1.02	/
Face Upward	23095/707.5	Data	0.068	1.062	0.072	2.33	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	Limit (W/kg)
1RB#0							
Back Upward	23095/707.5	Data	0.245	1.099	0.269	-2.63	Yes
Face Upward	23095/707.5	Data	0.073	1.099	0.080	-1.67	/
Edge B	23095/707.5	Data	0.124	1.099	0.136	4.88	/
Edge C	23095/707.5	Data	0.047	1.099	0.052	-3.47	/
Edge D	23095/707.5	Data	0.074	1.099	0.081	-1.56	/
50%RB#0							
Back Upward	23095/707.5	Data	0.211	1.062	0.224	1.02	/
Face Upward	23095/707.5	Data	0.068	1.062	0.072	2.33	/
Edge B	23095/707.5	Data	0.098	1.062	0.104	1.00	/
Edge C	23095/707.5	Data	0.041	1.062	0.044	2.41	/
Edge D	23095/707.5	Data	0.066	1.062	0.070	-0.25	/

Results overview of FDD LTE Band 66, QPSK, 20MHz Bandwidth

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Left Cheek	132322/1745	Data	0.072	1.033	0.074	-4.00	Yes
Left Tilt 15°	132322/1745	Data	0.062	1.033	0.064	-4.38	/
Right Cheek	132322/1745	Data	0.065	1.033	0.067	-4.33	/
Right Tilt 15°	132322/1745	Data	0.053	1.033	0.055	-3.24	/
50%RB#0							
Left Cheek	132322/1745	Data	0.065	1.117	0.073	1.05	/
Left Tilt 15°	132322/1745	Data	0.058	1.117	0.065	2.33	/
Right Cheek	132322/1745	Data	0.058	1.117	0.065	1.22	/
Right Tilt 15°	132322/1745	Data	0.049	1.117	0.055	1.56	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
1RB#0							
Back Upward	132322/1745	Data	0.358	1.033	0.370	-1.78	Yes
Face Upward	132322/1745	Data	0.317	1.033	0.327	-1.65	/
50%RB#0							
Back Upward	132322/1745	Data	0.330	1.117	0.369	0.85	/
Face Upward	132322/1745	Data	0.228	1.117	0.322	2.62	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	Limit (W/kg)
1RB#0							
Back Upward	132322/1745	Data	0.358	1.033	0.370	-1.78	/
Face Upward	132322/1745	Data	0.317	1.033	0.327	-1.65	/
Edge B	132322/1745	Data	0.182	1.033	0.188	-4.38	/
Edge C	132322/1745	Data	0.411	1.033	0.425	-2.95	Yes
Edge D	132322/1745	Data	0.110	1.033	0.114	-3.53	/
50%RB#0							
Back Upward	132322/1745	Data	0.330	1.117	0.369	0.85	/
Face Upward	132322/1745	Data	0.228	1.117	0.322	2.62	/
Edge B	132322/1745	Data	0.157	1.117	0.175	2.34	/
Edge C	132322/1745	Data	0.379	1.117	0.423	2.01	/
Edge D	132322/1745	Data	0.095	1.117	0.106	3.52	/

Results overview of WIFI 2.4G 802.11b

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	6/2437	DSSS	0.465	1.072	0.498	-1.25	Yes
Left Tilt 15°	6/2437	DSSS	0.382	1.072	0.409	-2.00	/
Right Cheek	6/2437	DSSS	0.184	1.072	0.197	-1.34	/
Right Tilt 15°	6/2437	DSSS	0.223	1.072	0.239	4.03	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	6/2437	DSSS	0.179	1.072	0.192	-2.10	Yes
Face Upward	6/2437	DSSS	0.083	1.072	0.089	-3.24	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	6/2437	DSSS	0.179	1.072	0.192	-2.10	Yes
Face Upward	6/2437	DSSS	0.083	1.072	0.089	-3.24	/
Edge B	6/2437	DSSS	0.111	1.072	0.119	-1.76	/
Edge A	6/2437	DSSS	0.097	1.072	0.104	-2.08	/
Edge D	6/2437	DSSS	0.027	1.072	0.029	-3.38	/

Results overview of BT3.0 GFSK

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	79/2480	DSSS	0.113	1.197	0.135	-4.50	Yes
Left Tilt 15°	79/2480	DSSS	0.084	1.197	0.101	-2.31	/
Right Cheek	79/2480	DSSS	0.061	1.197	0.073	-2.38	/
Right Tilt 15°	79/2480	DSSS	0.056	1.197	0.067	-3.56	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	79/2480	DSSS	0.096	1.197	0.115	-4.70	Yes
Face Upward	79/2480	DSSS	0.041	1.197	0.049	-4.40	/

Results overview of WIFI 5G 802.11ac-40MHz

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	38/5190	OFDM	0.462	1.030	0.476	-4.20	Yes
Left Tilt 15°	38/5190	OFDM	0.354	1.030	0.365	-3.75	/
Right Cheek	38/5190	OFDM	0.276	1.030	0.284	-2.93	/
Right Tilt 15°	38/5190	OFDM	0.241	1.030	0.248	-1.65	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	38/5190	OFDM	0.178	1.030	0.183	-3.39	Yes
Face Upward	38/5190	OFDM	0.064	1.030	0.066	-2.09	/

Results overview of WIFI 5G 802.11ac-40MHz

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	155/5755	OFDM	0.651	1.072	0.698	-1.10	Yes
Left Tilt 15°	155/5755	OFDM	0.468	1.072	0.502	-3.45	/
Right Cheek	155/5755	OFDM	0.543	1.072	0.582	-3.51	/
Right Tilt 15°	155/5755	OFDM	0.513	1.072	0.550	-2.47	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	155/5755	OFDM	0.284	1.072	0.304	0.90	Yes
Face Upward	155/5755	OFDM	0.192	1.072	0.206	-4.60	/

Results overview of LTE Band 7,CA, 20MHz+20MHz, QPSK

Test Position of Head	Channel /Frequency	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Left Cheek	Middle	0.103	1.074	0.111	-3.47	Yes
Left Tilt 15°	Middle	0.055	1.074	0.059	-3.59	/
Right Cheek	Middle	0.059	1.074	0.063	-3.06	/
Right Tilt 15°	Middle	0.042	1.074	0.045	-3.58	/
Body-worn(10mm)	Channel /Frequency	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	Middle	0.666	1.074	0.715	-1.02	Yes
Face Upward	Middle	0.170	1.074	0.183	-2.58	/
Hotspot(10mm)	Channel /Frequency	SAR Value (W/kg)1-g	Scaled Factor	Scaled SAR (W/Kg)1-g	Power drift(%)	SAR Plot.
Back Upward	Middle	0.666	1.074	0.715	-1.02	Yes
Face Upward	Middle	0.170	1.074	0.183	-2.58	/
Edge B	Middle	0.039	1.074	0.042	-1.67	/
Edge C	Middle	0.680	1.074	0.730	-2.37	/
Edge D	Middle	0.104	1.074	0.112	-2.84	/

Note:

Per KDB941225 D06 v02r01, When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. As the manufacture requirement the separation distance use 5mm for Hotspot mode.

Per KDB Publication 941225 D01v03r01. RMC 12.2kbps was as primary mode SAR, when the primary mode SAR less than 1.2W/kg, secondary SAR (HSPA) was not requires.

When the 1-g SAR for the mid-band channel or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v06)

- ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg, when the transmission band is ≥ 200 MHz

11. Simultaneous Transmissions Analysis

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 6 of this report. Maximum localized SAR is **below** exposure limits specified in the relevant standards.

Simultaneous SAR

No.	Transmitter Combinations	Scenario Supported or not	Supported for Mobile Hotspot or not
1	GSM + BT	Yes	No
2	GSM + WIFI 2.4G	Yes	Yes
3	WCDMA +BT	Yes	No
4	WCDMA +WIFI2.4G	Yes	Yes
5	LTE+BT	Yes	No
6	LTE+WIFI2.4G	Yes	Yes
7	WIFI+BT	No	No
8	GSM/WCDMA/LTE+WIFI 5G	Yes	No

Simultaneous Tx Combination of GSM/WCDMA/LTE and BT/WIFI (Head)

Test Position		Left Cheek	Left Tilt	Right Cheek	Right Tilt
Head MAX 1-g SAR(W/Kg)	GPRS850	0.181	0.105	0.148	0.110
	GPRS1900	0.152	0.102	0.094	0.067
	WCDMA 850	0.212	0.136	0.247	0.142
	WCDMA 1700	0.221	0.097	0.195	0.073
	WCDMA 1900	0.270	0.121	0.294	0.103
	LTE Band2	0.108	0.078	0.171	0.091
	LTE Band4	0.201	0.065	0.202	0.066
	LTE Band5	0.118	0.085	0.141	0.065
	LTE Band7	0.181	0.073	0.067	0.037
	LTE Band12	0.098	0.077	0.090	0.066
	LTE Band66	0.074	0.064	0.067	0.055
	2.4G WIFI 802.11b	0.498	0.409	0.197	0.239
	5G WIFI 802.11ac	0.698	0.502	0.582	0.550
	BT	0.135	0.101	0.073	0.067
WIFI Simultaneous Σ 1-g SAR(W/Kg)		0.968	0.638	0.876	0.692
BT Simultaneous Σ 1-g SAR(W/Kg)		0.405	0.237	0.367	0.209

Simultaneous Tx Combination of GSM/WCDMA/LTE and BT/WIFI (Body).

Test Position		Face	Back	Edge A	Edge B	Edge C	Edge D
Body-worn 10mm separation MAX 1-g SAR(W/Kg)	GPRS850	0.350	0.864	/	/	/	/
	GPRS1900	0.414	0.709	/	/	/	/
	WCDMA 850	0.385	0.430	/	/	/	/
	WCDMA 1700	0.545	0.675	/	/	/	/
	WCDMA 1900	0.721	1.063	/	/	/	/
	LTE Band2	0.267	0.485	/	/	/	/
	LTE Band4	0.530	0.714	/	/	/	/
	LTE Band5	0.102	0.263	/	/	/	/
	LTE Band7	0.356	1.021	/	/	/	/
	LTE Band12	0.080	0.269	/	/	/	/
	LTE Band66	0.327	0.370	/	/	/	/
	2.4G WIFI 802.11b	0.089	0.192	/	/	/	/
	5G WIFI 802.11ac	0.206	0.304	/	/	/	/
	BT	0.049	0.115	/	/	/	/
WIFI Simultaneous Σ 1-g SAR(W/Kg)		0.927	1.367	/	/	/	/
BT Simultaneous Σ 1-g SAR(W/Kg)		0.770	1.178	/	/	/	/

Simultaneous Tx Combination of GSM/WCDMA/LTE and WIFI (Body).

Test Position		Face	Back	Edge A	Edge B	Edge C	Edge D
Hotspot 10mm separation MAX 1-g SAR(W/Kg)	GPRS850	0.350	0.864	/	0.378	0.498	0.192
	GPRS1900	0.414	0.709	/	0.204	1.019	0.213
	WCDMA 850	0.385	0.430	/	0.226	0.260	0.135
	WCDMA 1700	0.545	0.675	/	0.244	0.567	0.141
	WCDMA 1900	0.721	1.063	/	0.369	1.258	0.341
	LTE Band2	0.267	0.485	/	0.160	0.570	0.195
	LTE Band4	0.530	0.714	/	0.262	0.685	0.153
	LTE Band5	0.102	0.263	/	0.158	0.078	0.094
	LTE Band7	0.356	1.021	/	0.029	1.014	0.148
	LTE Band12	0.080	0.269	/	0.136	0.052	0.081
	LTE Band66	0.327	0.370	/	0.188	0.425	0.114
	2.4G WIFI 802.11b	0.089	0.192	0.104	0.119	/	0.029
WIFI Simultaneous Σ 1-g SAR(W/Kg)		0.810	1.255	0.104	0.497	1.258	0.370

The estimated SAR value with * Signal

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required

12.Measurement Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom V_{eff} or v_i
Measurement System								
1	– Probe Calibration	B	5.8	N	1	1	5.8	∞
2	– Axial isotropy	B	3.5	R	$\sqrt{3}$	0.5	1.43	∞
3	– Hemispherical Isotropy	B	5.9	R	$\sqrt{3}$	0.5	2.41	∞
4	– Boundary Effect	B	1	R	$\sqrt{3}$	1	0.58	∞
5	– Linearity	B	4.7	R	$\sqrt{3}$	1	2.71	∞
6	– System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.58	∞
7	Modulation response	B	3	N	1	1	3.00	
8	– Readout Electronics	B	0.5	N	1	1	0.50	∞
9	– Response Time	B	1.4	R	$\sqrt{3}$	1	0.81	∞
10	– Integration Time	B	3.0	R	$\sqrt{3}$	1	1.73	∞
11	– RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
12	– Probe Position Mechanical tolerance	B	1.4	R	$\sqrt{3}$	1	0.81	∞
13	– Probe Position with respect to Phantom Shell	B	1.4	R	$\sqrt{3}$	1	0.81	∞
14	– Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	2.3	R	$\sqrt{3}$	1	1.33	∞

Uncertainties of the DUT								
15	– Position of the DUT	A	2.6	N	$\sqrt{3}$	1	2.6	5
16	– Holder of the DUT	A	3	N	$\sqrt{3}$	1	3.0	5
17	– Output Power Variation –SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.89	∞
Phantom and Tissue Parameters								
18	– Phantom Uncertainty(shape and thickness tolerances)	B	4	R	$\sqrt{3}$	1	2.31	∞
19	Uncertainty in SAR correction for deviation(in permittivity and conductivity)	B	2	N	1	1	2.00	
20	– Liquid Conductivity Target –tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
21	– Liquid Conductivity –measurement Uncertainty)	B	4	N	$\sqrt{3}$	1	0.92	9
22	– Liquid Permittivity Target tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
23	– Liquid Permittivity –measurement uncertainty	B	5	N	$\sqrt{3}$	1	1.15	∞
Combined Standard Uncertainty				RSS			10.63	
Expanded uncertainty (Confidence interval of 95 %)				K=2			21.26	

System Check Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom V_{eff} or v_i
Measurement System								
1	– Probe Calibration	B	5.8	N	1	1	5.8	∞

2	– Axial isotropy	B	3.5	R	$\sqrt{3}$	0.5	1.43	∞
3	– Hemispherical Isotropy	B	5.9	R	$\sqrt{3}$	0.5	2.41	∞
4	– Boundary Effect	B	1	R	$\sqrt{3}$	1	0.58	∞
5	– Linearity	B	4.7	R	$\sqrt{3}$	1	2.71	∞
6	– System Detection Limits	B	1	R	$\sqrt{3}$	1	0.58	∞
7	Modulation response	B	0	N	1	1	0.00	
8	– Readout Electronics	B	0.5	N	1	1	0.50	∞
9	– Response Time	B	0.00	R	$\sqrt{3}$	1	0.00	∞
10	– Integration Time	B	1.4	R	$\sqrt{3}$	1	0.81	∞
11	– RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
12	– Probe Position Mechanical tolerance	B	1.4	R	$\sqrt{3}$	1	0.81	∞
13	– Probe Position with respect to Phantom Shell	B	1.4	R	$\sqrt{3}$	1	0.81	∞
14	– Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	2.3	R	$\sqrt{3}$	1	1.33	∞
Uncertainties of the DUT								
15	Deviation of experimental source from numerical source	A	4	N	1	1	4.00	5
16	Input Power and SAR drift measurement	A	5	R	$\sqrt{3}$	1	2.89	5
17	Dipole Axis to Liquid Distance	B	2	R	$\sqrt{3}$	1	1.2	∞

Phantom and Tissue Parameters								
18	– Phantom Uncertainty(shape and thickness tolerances)	B	4	R	$\sqrt{3}$	1	2.31	∞
19	Uncertainty in SAR correction for deviation(in permittivity and conductivity)	B	2	N	1	1	2.00	
20	– Liquid Conductivity Target –tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
21	– Liquid Conductivity –measurement Uncertainty)	B	4	N	$\sqrt{3}$	1	0.92	9
22	– Liquid Permittivity Target tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
23	– Liquid Permittivity –measurement uncertainty	B	5	N	$\sqrt{3}$	1	1.15	∞
Combined Standard Uncertainty				RSS			10.15	
Expanded uncertainty (Confidence interval of 95 %)				K=2			20.29	

13. Equipment List

This table is a complete overview of the SAR measurement equipment. Devices used during the test described are marked ☒.

	EQUIPMENT	Model	Serial number	Calibration Date	Due Date
☒	SAR Probe	SSE2	SN27/15 EPGO261	2019/03/04	2020/03/03
☒	Dipole	SID750	SN 23/15 DIP0G750-378	2017/11/27	2019/11/26
☒	Dipole	SID835	SN 09/13 DIP0G835-217	2017/11/27	2019/11/26
☐	Dipole	SID900	SN 09/13 DIP0G900-215	2017/11/27	2019/11/26
☒	Dipole	SID1800	SN 09/13 DIP1G800-216	2017/11/27	2019/11/26
☒	Dipole	SID1900	SN 09/13 DIP2G000-218	2017/11/27	2019/11/26
☐	Dipole	SID2000	SN 09/13 DIP2G000-219	2017/11/27	2019/11/26
☒	Dipole	SID2450	SN_09/13_DIP2G450-220	2017/11/27	2019/11/26
☒	Dipole	SID2600	SN 32/14_DIP2G600-338	2017/11/27	2019/11/26
☒	Dipole	SWG5500	SN15/15 WGA39	2017/11/27	2019/11/26
☒	Multimeter	Keithley-2000	4085310	2018/09/06	2019/09/05
☒	System Simulator(Agilent 8960)	E5515C	GB 47200710	2017/11/08	2019/11/07
☒	System Simulator(R&S)	CMW500	130805	2017/08/29	2019/08/28
☒	KEYSIGHT	E7515A	MY56040357	2019/04/01	2020/04/01
☒	Vector Network Analyzer(R&S)	ZVB8	A0802530	2018/05/09	2019/05/09
☒	PC 3.5 Fixed Match Calibration Kit	ZV-Z32	100571	2017/11/29	2019/11/28
☒	Dielectric Probe Kit	SCLMP	SN 09/13 OCPG51	2017/11/27	2019/11/26
☒	Signal Generator	SMU200A	A140801889	2018/05/09	2019/05/08
☒	Amplifier	Nucletudes	143060	2019/03/26	2020/03/25
☒	Directional Coupler	DC6180A	305827	2019/03/26	2020/03/25
☒	Power Meter	NRP2	A140401673	2019/03/26	2020/03/25
☒	Power Sensor	NPR-Z11	1138.3004.02-114072-nq	2019/03/26	2020/03/25
☒	Power Meter	NRVS	A0802531	2019/03/26	2020/03/25
☒	Power Sensor	NRV-Z4	100069	2019/03/26	2020/03/25

ANNEX A: Appendix A: SAR System performance Check Plots

(Please See Appendix A)

ANNEX B: Appendix B: SAR Measurement results Plots

(Please See Appendix B)

ANNEX C: Appendix C: Calibration reports

(Please See Appendix C)

ANNEX D: Appendix D: SAR Test Setup

(Please See Appendix D)

—End of the Report—