

FCC Part 15 EMI TEST REPORT of

E.U.T. : Launcher series(LauncherPlus,
LauncherOne,LauncherX)
FCC ID. : H79ESSQL-300
Model No. : QL-300

for

APPLICANT : Delta Electronics, Inc.
ADDRESS : 3 Tungyuan Road, Chungli Industrial Zone,
Taoyuan County 32063, Taiwan

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU VIL., LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel : (02)26023052 Fax : (02)26010910

<http://www.etc.org.tw> ; e-mail: emc@etc.org.tw

Report Number : 18-05-RBF-008-04

TEST REPORT CERTIFICATION

Applicant : Delta Electronics, Inc.
3 Tungyuan Road, Chungli Industrial Zone, Taoyuan County 32063,
Taiwan

Manufacturer : Delta Electronics, Inc.
3 Tungyuan Road, Chungli Industrial Zone, Taoyuan County 32063,
Taiwan

Description of EUT

- a) Type of EUT : Launcher series(LauncherPlus,LauncherOne,LauncherX)
- b) Trade Name : Delta, Vivitek
- c) Model No. : QL-300
- d) Power Supply : DC 5V from USB

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	Pass
Emission Bandwidth	Pass
Output Power	Pass
100 kHz Bandwidth of Band Edges	Pass
Power Density	Pass
Out-of-Band Conducted Emission	Pass
Duty Cycle	N.A.

Date Test Item Received : May 04,2018
Date Test Campaign Completed : May 29, 2018
Date of Issue : Jun.20, 2018

Test Engineer :

Brian Huang
(Brian Huang, Engineer)



Approve & Authorized Signer :

Vincent Chang
Vincent Chang, Supervisor
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology.....	2
1.4 Test Facility.....	2
2 PROVISIONS APPLICABLE.....	3
2.1 Definition	3
2.2 Requirement for Compliance	4
2.3 Restricted Bands of Operation	6
2.4 Labeling Requirement	6
2.5 User Information	7
3. SYSTEM TEST CONFIGURATION.....	8
3.1 Justification	8
3.2 Devices for Tested System	8
4 RADIATED EMISSION MEASUREMENT	9
4.1 Applicable Standard	9
4.2 Measurement Procedure.....	9
4.3 Measuring Instrument.....	11
4.4 Radiated Emission Data	12
4.5 Field Strength Calculation.....	44
4.6 Photos of Radiation Measuring Setup.....	45
5 CONDUCTED EMISSION MEASUREMENT.....	49
5.1 Standard Applicable	49
5.2 Measurement Procedure.....	49
5.3 Conducted Emission Data	50
5.4 Result Data Calculation.....	54
5.5 Conducted Measurement Equipment	54
5.6 Photos of Conduction Measuring Setup.....	55
6 ANTENNA REQUIREMENT	57
6.1 Standard Applicable	57
6.2 Antenna Construction and Directional Gain	57
7 EMISSION BANDWIDTH MEASUREMENT.....	58
7.1 Standard Applicable	58
7.2 Measurement Procedure.....	58

7.3 Measurement Equipment.....	58
7.4 Measurement Data.....	59
8 OUTPUT POWER MEASUREMENT	72
8.1 Standard Applicable	72
8.2 Measurement Procedure	72
8.3 Measurement Equipment.....	72
8.4 Measurement Data.....	73
9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT	75
9.1 Standard Applicable	75
9.2 Measurement Procedure	75
9.3 Measurement Equipment.....	75
9.4 Measurement Data.....	76
10 POWER DENSITY MEASUREMENT	83
10.1 Standard Applicable	83
10.2 Measurement Procedure	83
10.3 Measurement Equipment.....	83
10.4 Measurement Data.....	84
11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT	98
11.1 Standard Applicable	98
11.2 Measurement Procedure	98
11.3 Measurement Equipment.....	98
11.4 Measurement Data.....	99
12. DUTY CYCLE	118
12.1 Standard Applicable	118
12.2 Measurement Equipment.....	118
12.3 Measurement Data.....	118

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Launcher series(LauncherPlus,LauncherOne,LauncherX)
 b) Trade Name : Delta, Vivitek
 c) Model No. : QL-300
 d) Power Supply : DC 5V from USB

1.2 Characteristics of Device

- a)The product is a Launcher series.

Specification	
Product / Model	Launcher series(LauncherPlus,LauncherOne,LauncherX)/ QL-300
Power Consumption	USB , 5VDC, 500mA
Interface	USB
Buttons	5
Dimensions	187 x 70 x 15 mm (L x W x H)
Weight	60g
OS supported	WindowWinds 7 and above / Mac 10.7 and above
Features	Full "Desktop Streamer" features
Software Upgradeable	Yes

- b) Launcher series model and product description as below for details

Difference Item		PCB Layout	Circuit Diagram	Function	Combination	Shape & Color
Description						
Product description	Model	O	O	Equipped with flash version or without flash version.	1. Equipped with Plastic frame or Metal frame. 2. Equipped with USB Type A cable or Type C cable. Note: The type C version without PD(Power Delivery).	The shape of the product is the same, with the following color differences: 1. Sliver frame and black Top cover/Bottom base 2. Iron gray frame and black Top cover/Bottom base 3. Blue frame, white Top cover, and black Bottom base
LauncherPlus	QL-300			Note: Without flash version removes NAND FLASH and FLASH controller.		
LauncherOne						
LauncherX						
Notes: All product description is identical for marking purpose used.						

1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details. For RF test the measurement procedure was referred to FCC KDB 558074 D01 DTS Meas Guidance v03r05.

Software	Version	Note
e3	Version 6.100618b	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

1.4 Test Facility

Location of the Test site: No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

Designation Number: TW2628.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

(7) Power Density Requirement

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the cables connected to EUT to maximize the emission from EUT.

For conducted and radiated spurious emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 1 by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model	Description
LauncherPlus*	Delta Electronics, Inc.	QL-300	0.1m Shielded USB Cable
LauncherOne			
LauncherX*			
Notebook PC	ASUS	X555L	0.9m Unshielded AC Power Cord
Wireless Presentation & Collabration System	Delta	NOVOPRO	1.0m HDMI Cable 0.9m Shielded USB Cord
Monitor	SNOY	KDL-20S4000	1.8m Unshielded AC Power Cord

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


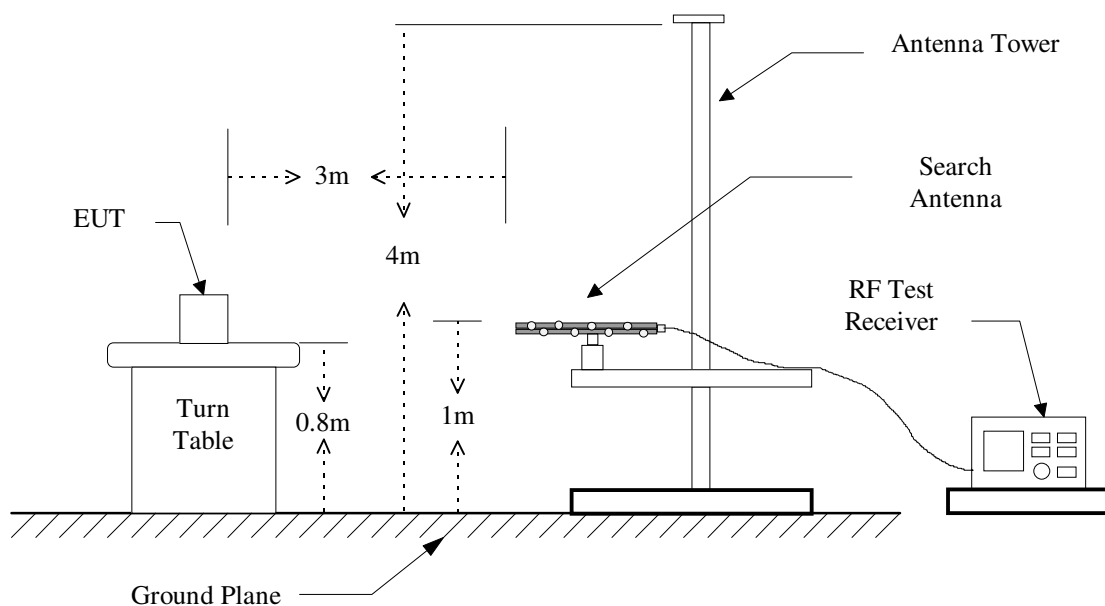


Figure 2 : Frequencies measured above 1 GHz configuration

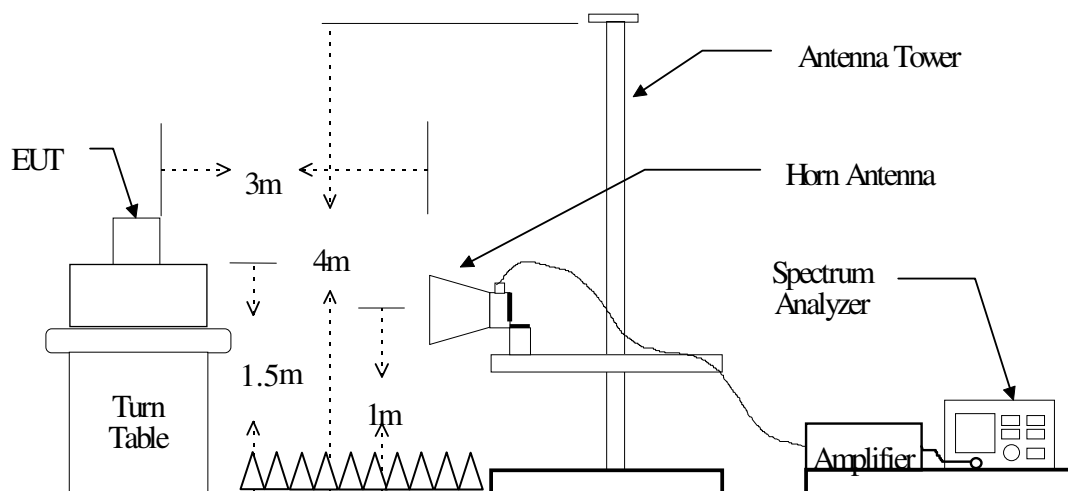

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum	Rohde & Schwarz	FSP40	2017/11/02	2018/11/01
EMI Test Receiver	Rohde & Schwarz	ESCI	2017/09/19	2018/09/18
Double Ridged Antenna	EMCO	3115	2017/10/11	2018/10/10
Double Ridged Guide Horn Antenna	EMCO	3116	2017/11/15	2018/11/14
Log-periodic Antenna	EMCO	3146	2017/08/10	2018/08/09
Bilog Antenna	ETC & JYE BAO	MCTD 2786	2017/10/26	2018/10/25
Amplifier	HP	8449B	2017/10/05	2018/10/04
Amplifier	HP	8447D	2017/10/05	2018/10/04
Amplifier	HP	83051A	2017/08/25	2018/08/24

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:


VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW $\geq 1/T$, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.4 Radiated Emission Data

4.4.1 RF Portion

A. (802.11b)

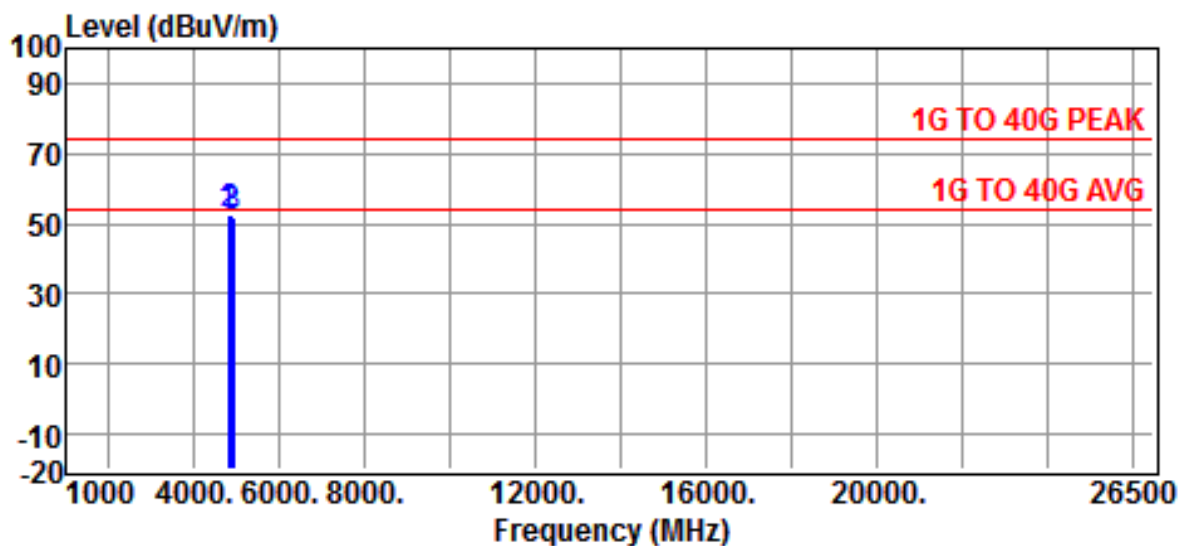


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11b		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	51.07	1.54	52.61	74.00	-21.39	Peak
4884.0000	50.67	1.71	52.38	74.00	-21.62	Peak
4944.0000	49.92	1.94	51.86	74.00	-22.14	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

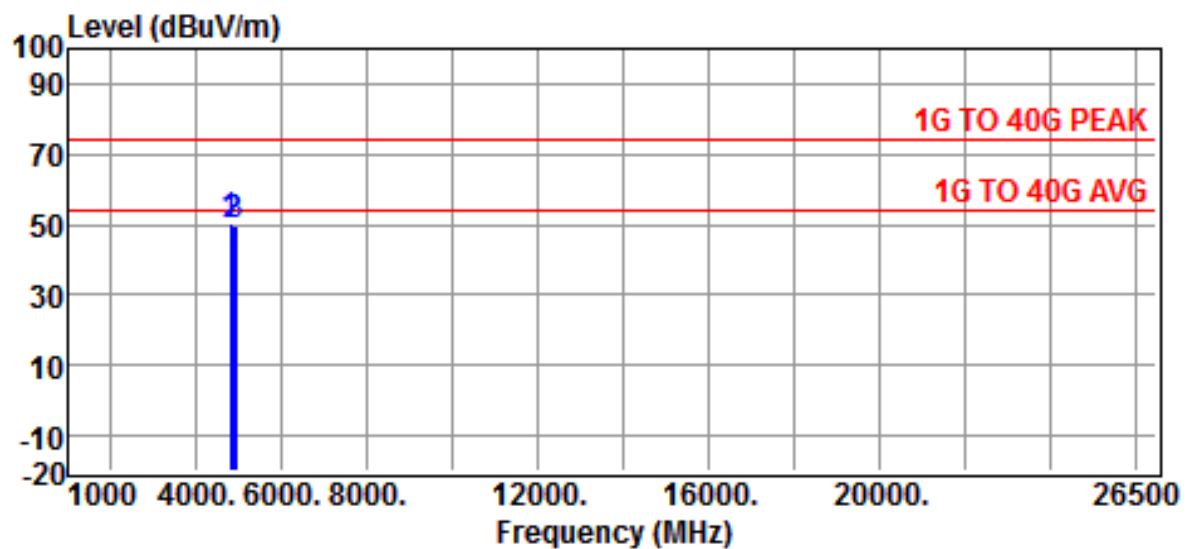


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11b		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	49.17	1.54	50.71	74.00	-23.29	Peak
4884.0000	48.23	1.71	49.94	74.00	-24.06	Peak
4944.0000	47.75	1.94	49.69	74.00	-24.31	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

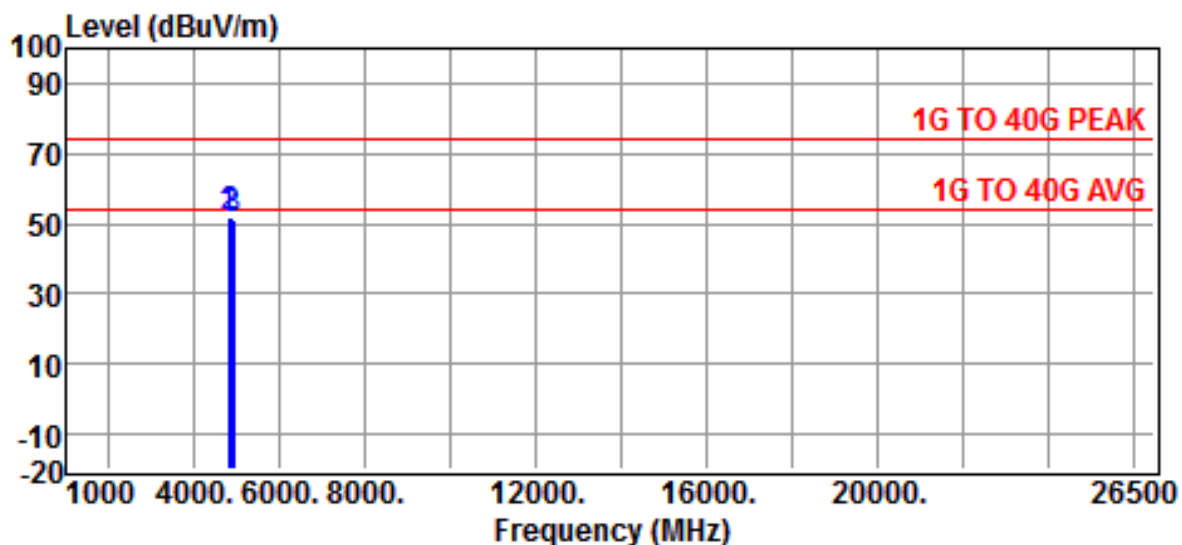
B. (802.11g)

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11g		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	50.25	1.54	51.79	74.00	-22.21	Peak
4884.0000	49.82	1.71	51.53	74.00	-22.47	Peak
4944.0000	49.13	1.94	51.07	74.00	-22.93	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

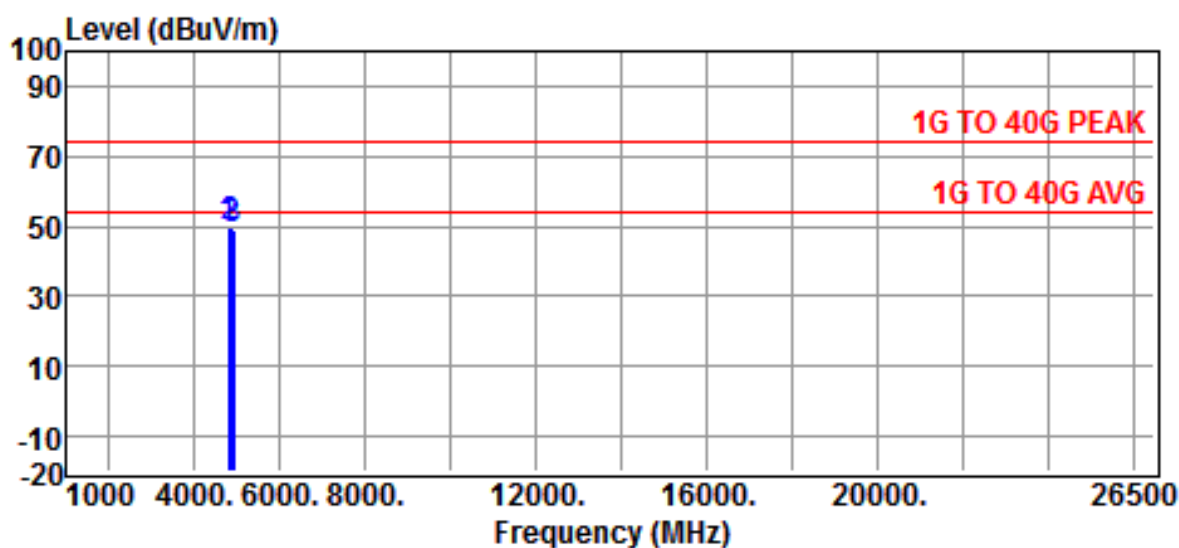


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11g		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	48.32	1.54	49.86	74.00	-24.14	Peak
4884.0000	47.95	1.71	49.66	74.00	-24.34	Peak
4944.0000	47.07	1.94	49.01	74.00	-24.99	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

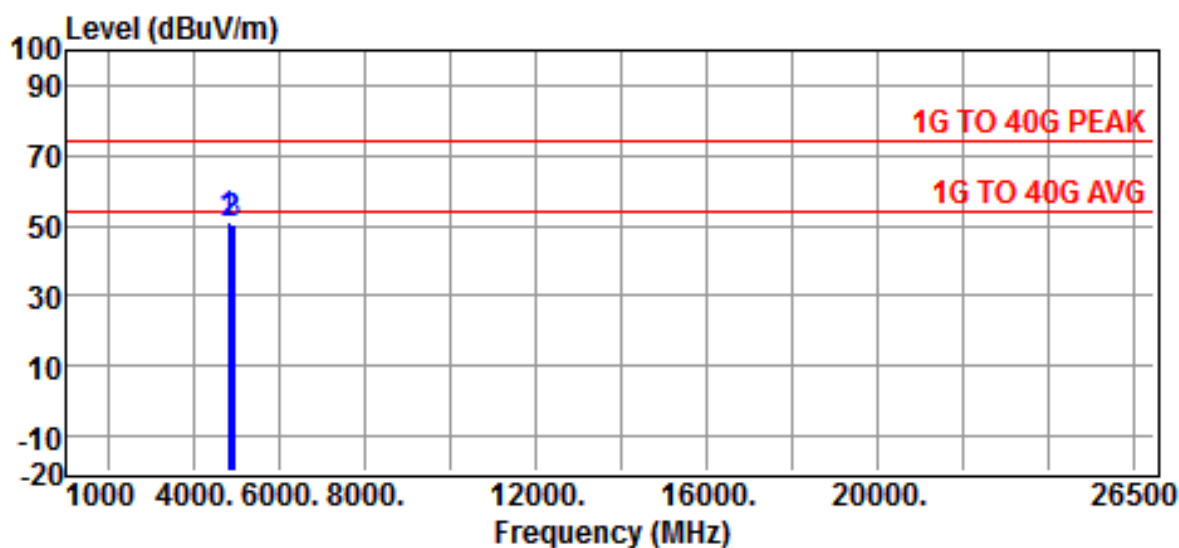
C. (802.11n HT-20) ANT0

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	: HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28°C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	49.60	1.54	51.14	74.00	-22.86	Peak
4884.0000	48.87	1.71	50.58	74.00	-23.42	Peak
4944.0000	48.12	1.94	50.06	74.00	-23.94	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

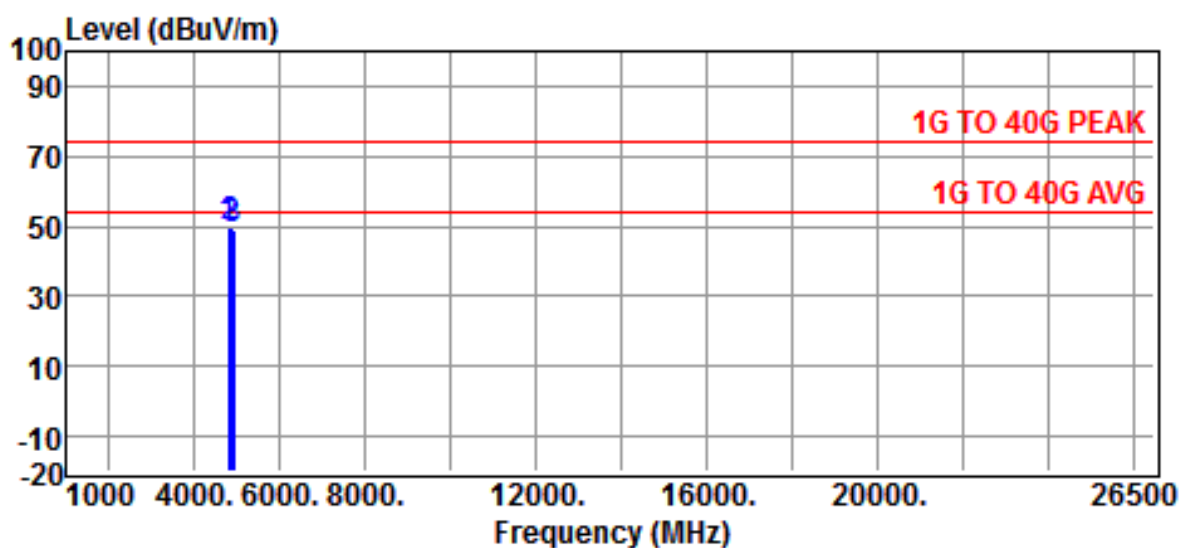


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28°C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	48.35	1.54	49.89	74.00	-24.11	Peak
4884.0000	47.86	1.71	49.57	74.00	-24.43	Peak
4944.0000	46.99	1.94	48.93	74.00	-25.07	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

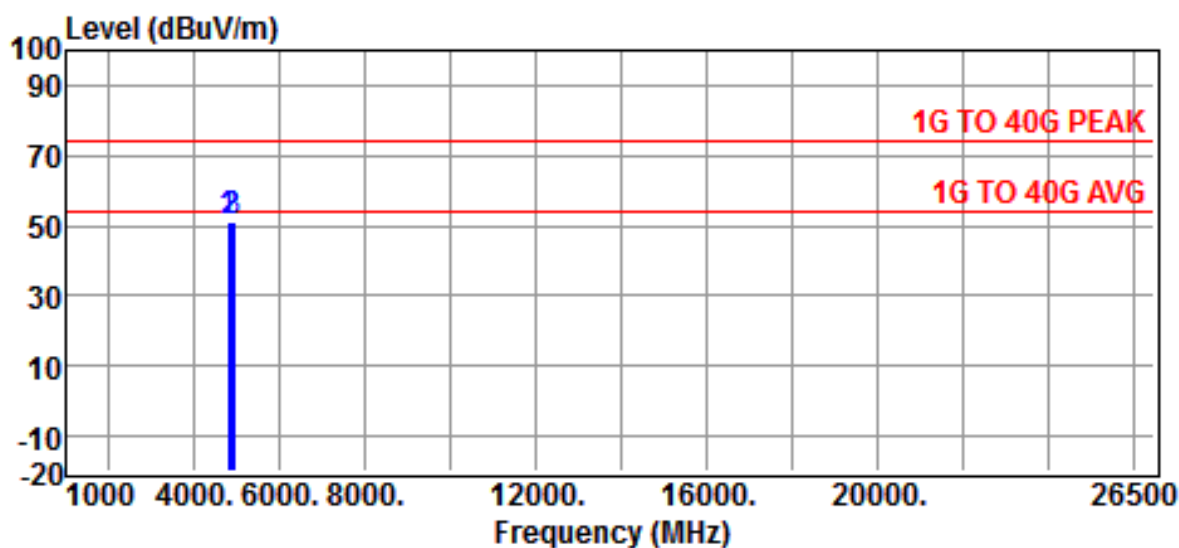
D. (802.11n HT-20) ANT1

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	: HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	49.93	1.54	51.47	74.00	-22.53	Peak
4884.0000	49.59	1.71	51.30	74.00	-22.70	Peak
4944.0000	48.98	1.94	50.92	74.00	-23.08	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

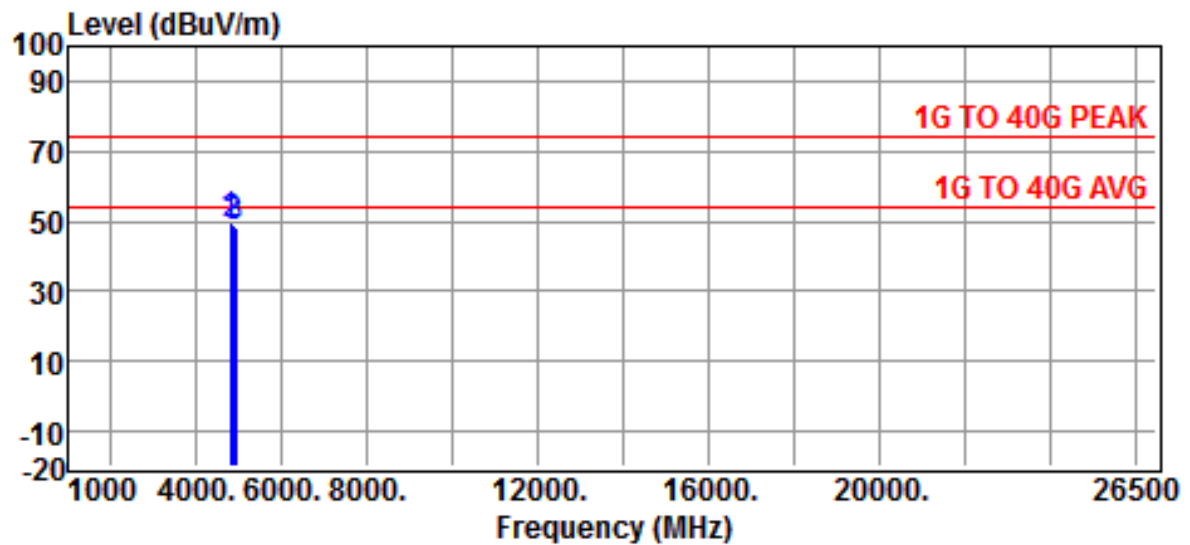


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4824.0000	48.12	1.54	49.66	74.00	-24.34	Peak
4884.0000	47.56	1.71	49.27	74.00	-24.73	Peak
4944.0000	46.63	1.94	48.57	74.00	-25.43	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

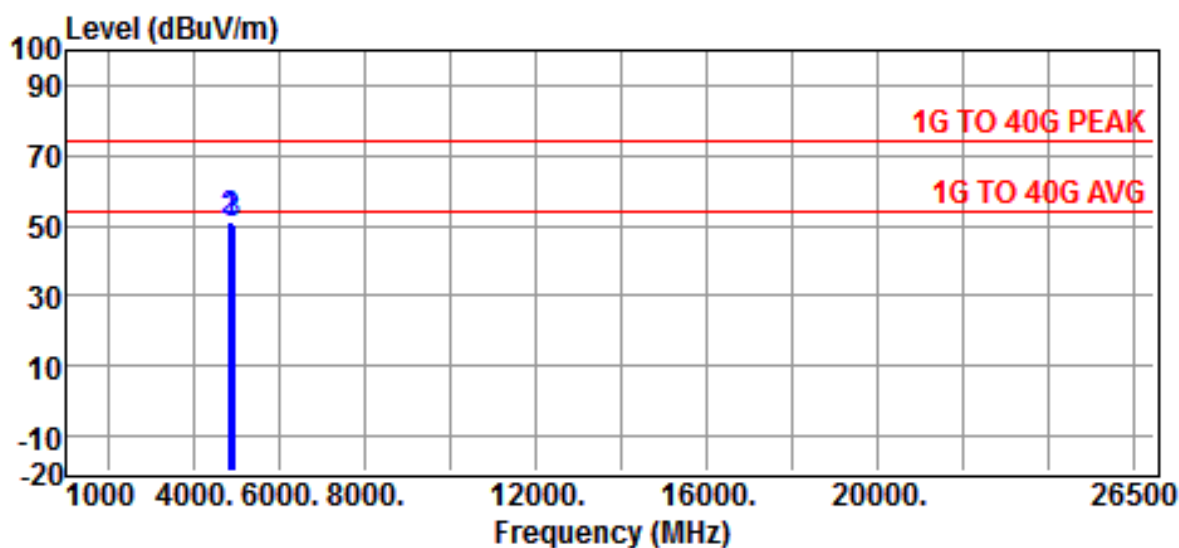
E. (802.11n HT-40) ANT0

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4844.0000	49.82	1.60	51.42	74.00	-22.58	Peak
4884.0000	49.17	1.71	50.88	74.00	-23.12	Peak
4924.0000	48.29	1.88	50.17	74.00	-23.83	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.
5. The margin value=Limit - Result

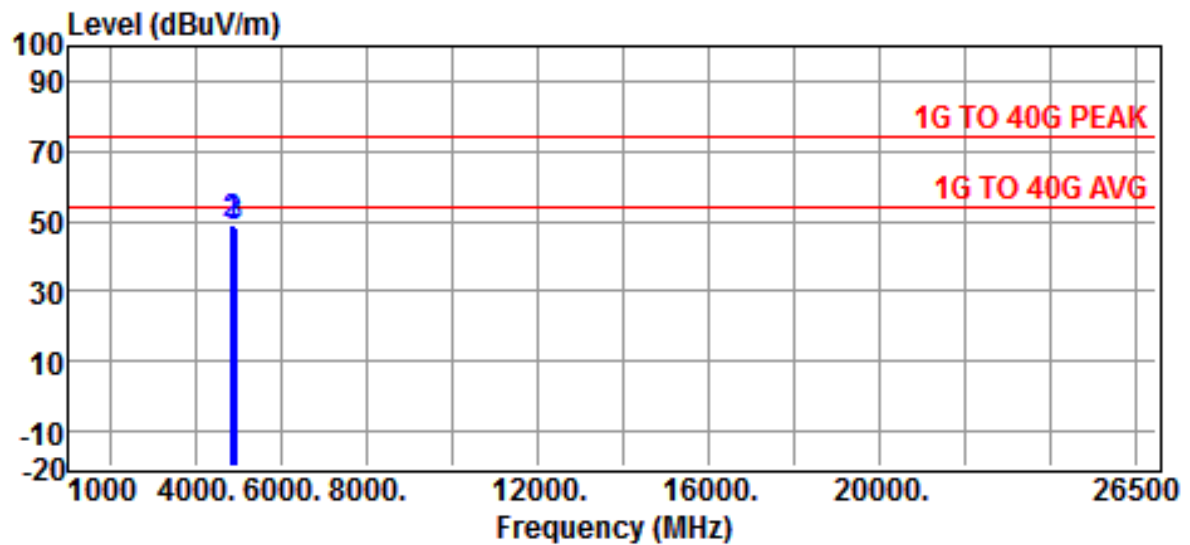


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4844.0000	47.67	1.60	49.27	74.00	-24.73	Peak
4884.0000	47.26	1.71	48.97	74.00	-25.03	Peak
4924.0000	46.68	1.88	48.56	74.00	-25.44	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The expanded uncertainty of the radiated emission tests is 3.53 dB.
5. The margin value=Limit - Result

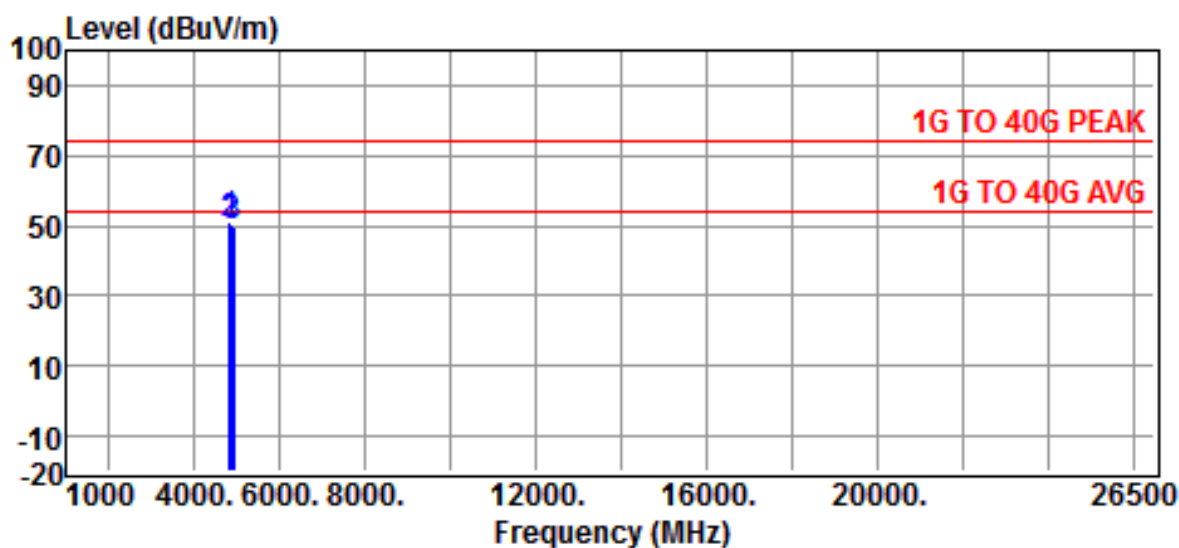
F. (802.11n HT-40) ANT1

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		

Freq MHz	Reading dBUV	Correction Factor dB	Result dBUV/m	Limits dBUV/m	Over limit dB	Detector
4844.0000	49.46	1.60	51.06	74.00	-22.94	Peak
4884.0000	48.91	1.71	50.62	74.00	-23.38	Peak
4924.0000	48.10	1.88	49.98	74.00	-24.02	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

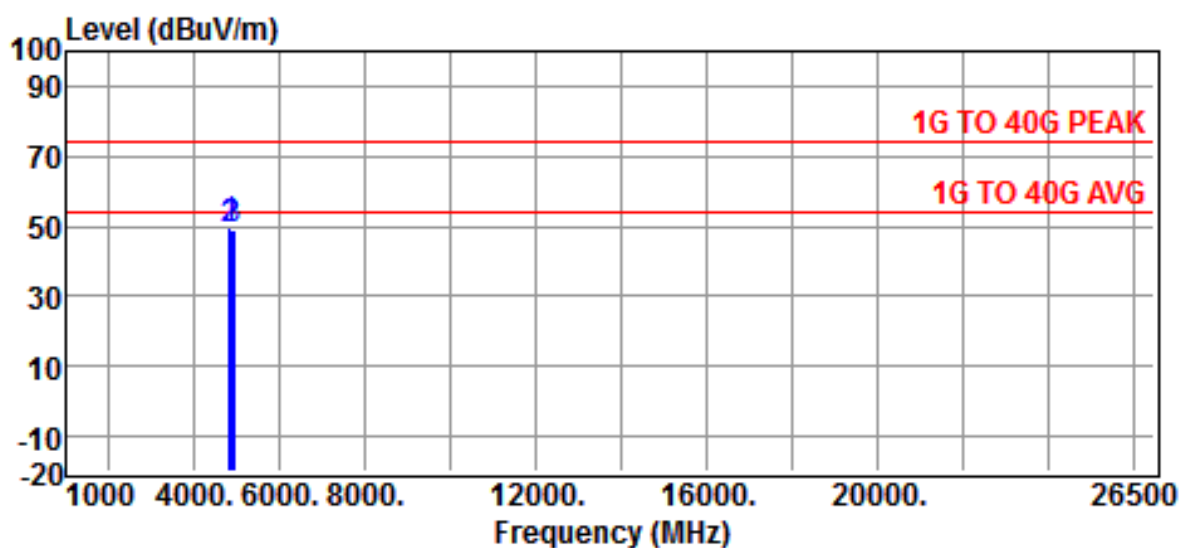

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4844.0000	47.82	1.60	49.42	74.00	-24.58	Peak
4884.0000	47.54	1.71	49.25	74.00	-24.75	Peak
4924.0000	46.75	1.88	48.63	74.00	-25.37	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.2 Radiated Emission of Restricted bands

Mode: 802.11b

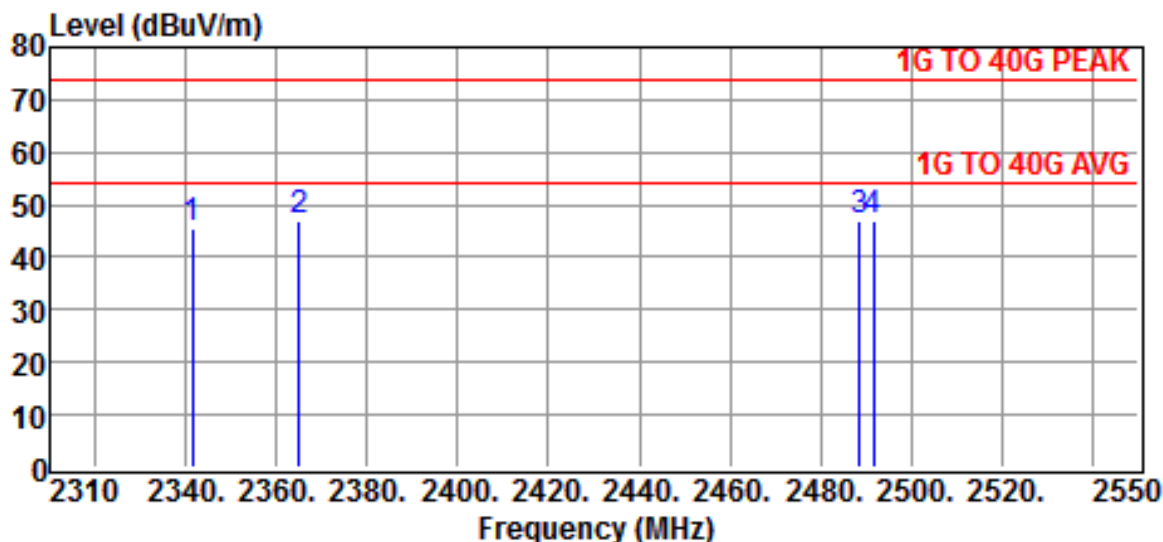


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11b		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2341.5000	51.22	-5.60	45.62	74.00	-28.38	Peak
2365.0000	52.63	-5.55	47.08	74.00	-26.92	Peak
2488.5000	52.29	-5.24	47.05	74.00	-26.95	Peak
2491.6500	52.00	-5.24	46.76	74.00	-27.24	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

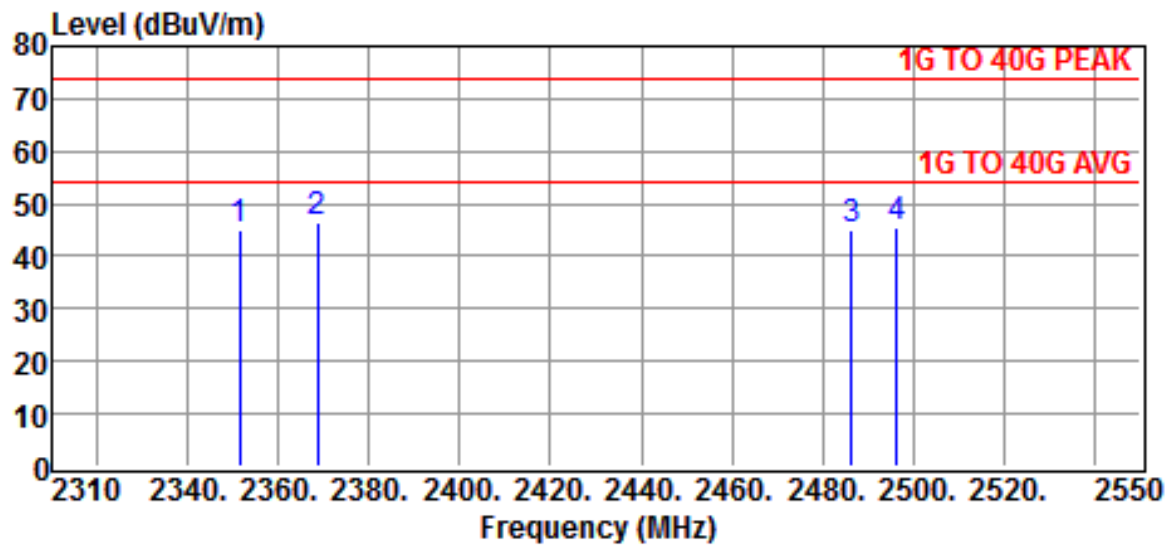


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11b		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2351.4000	50.72	-5.59	45.13	74.00	-28.87	Peak
2368.5100	52.03	-5.52	46.51	74.00	-27.49	Peak
2486.5000	50.44	-5.27	45.17	74.00	-28.83	Peak
2496.2500	50.92	-5.23	45.69	74.00	-28.31	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

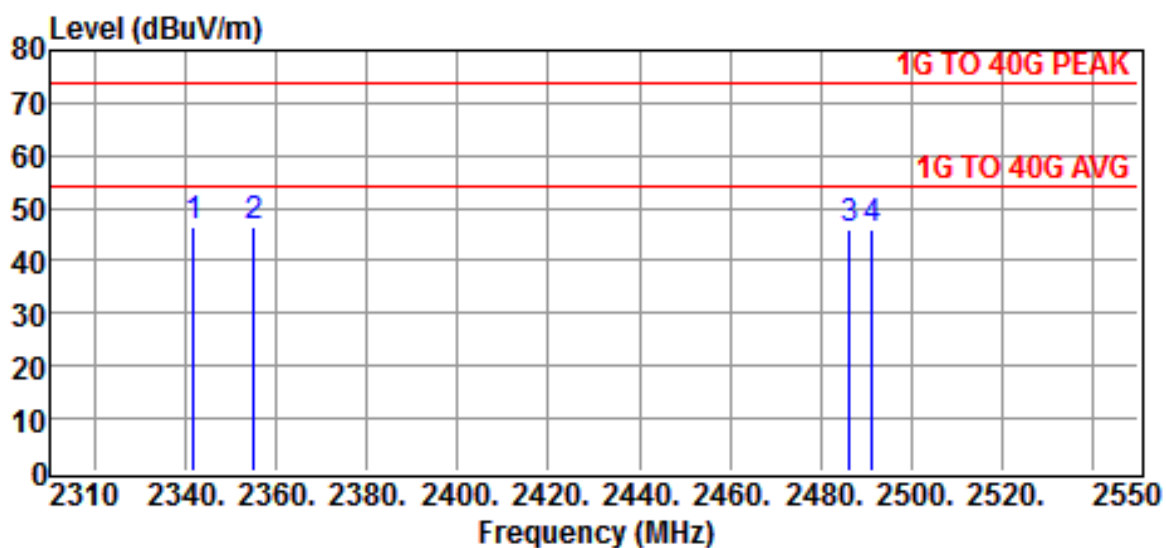
Mode: 802.11g

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11g		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2341.6000	51.94	-5.60	46.34	74.00	-27.66	Peak
2355.0000	52.14	-5.56	46.58	74.00	-27.42	Peak
2486.5000	51.40	-5.27	46.13	74.00	-27.87	Peak
2491.4700	51.22	-5.24	45.98	74.00	-28.02	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

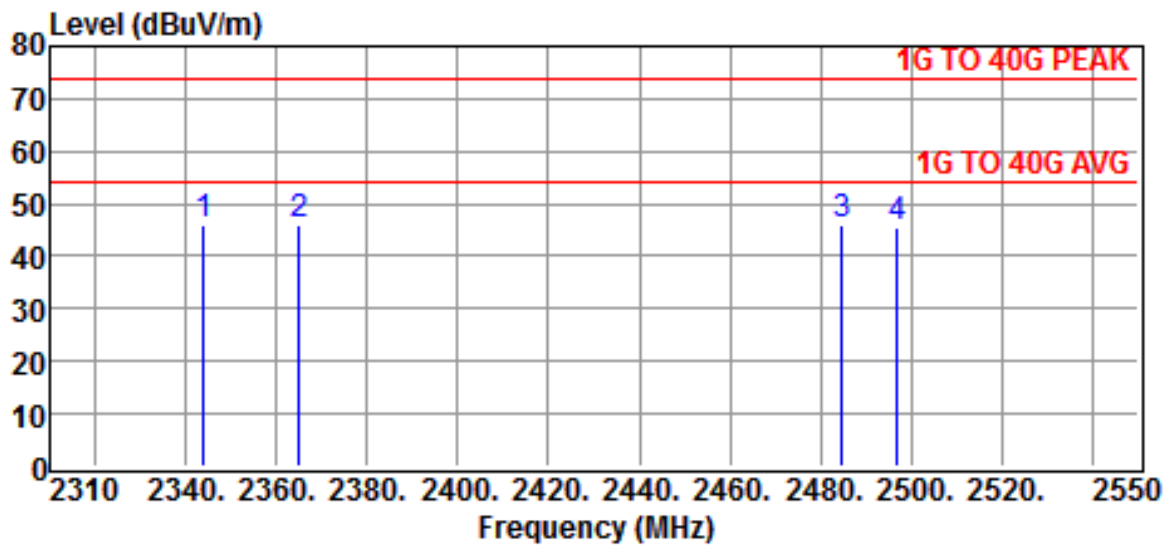


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11g		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2344.0000	51.39	-5.60	45.79	74.00	-28.21	Peak
2365.0000	51.63	-5.55	46.08	74.00	-27.92	Peak
2484.7000	51.14	-5.27	45.87	74.00	-28.13	Peak
2497.0000	50.92	-5.23	45.69	74.00	-28.31	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

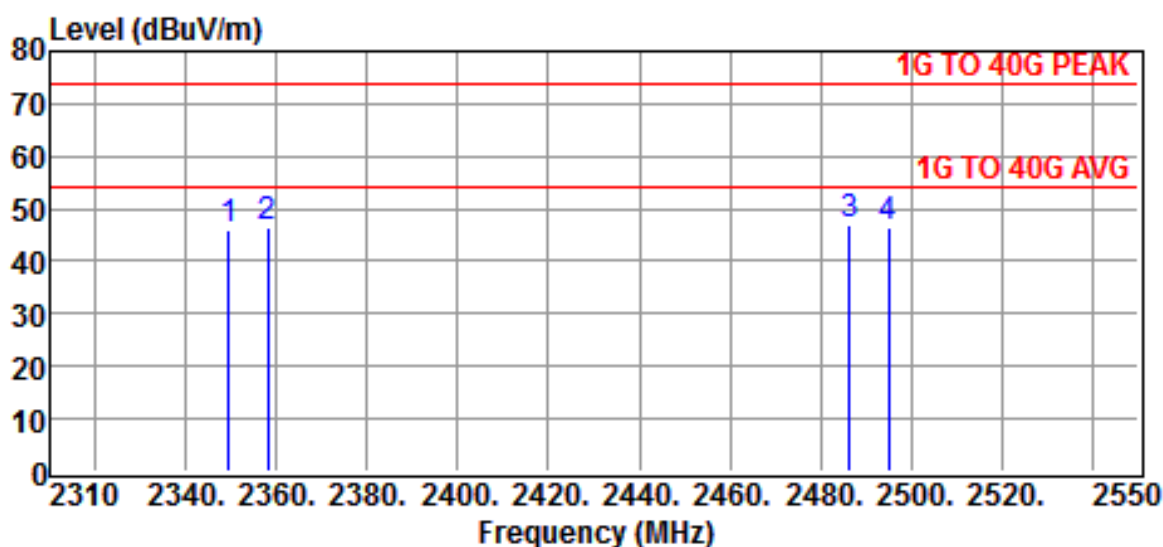
Mode: 802.11n HT-20 ANT0

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2349.5000	51.34	-5.59	45.75	74.00	-28.25	Peak
2358.0000	51.81	-5.56	46.25	74.00	-27.75	Peak
2486.5000	52.32	-5.27	47.05	74.00	-26.95	Peak
2495.0000	51.62	-5.23	46.39	74.00	-27.61	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

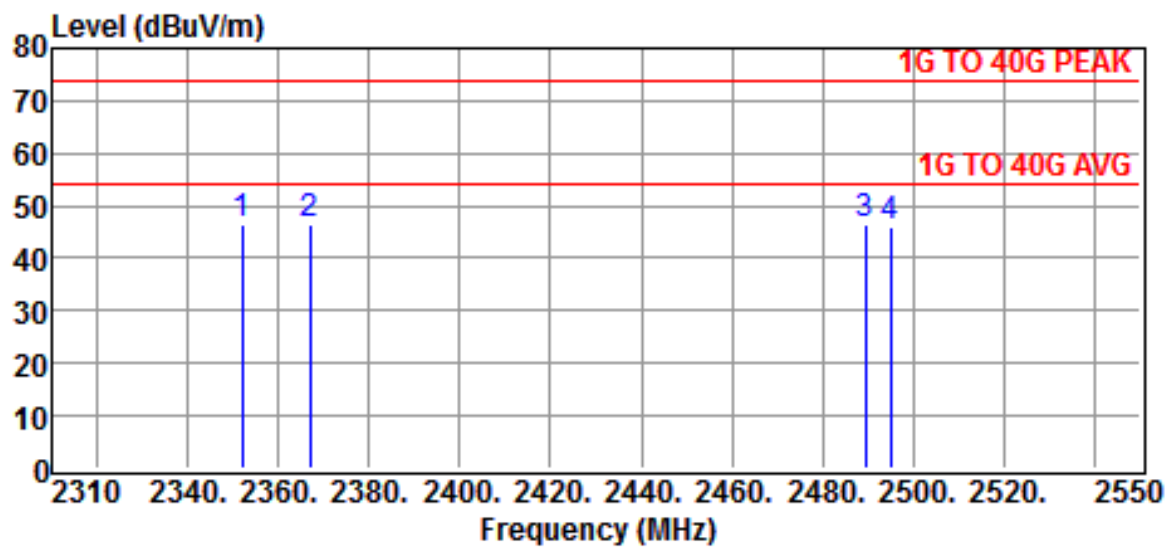


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2352.0000	52.11	-5.56	46.55	74.00	-27.45	Peak
2367.0000	51.94	-5.55	46.39	74.00	-27.61	Peak
2489.4000	51.59	-5.24	46.35	74.00	-27.65	Peak
2495.0000	51.21	-5.23	45.98	74.00	-28.02	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

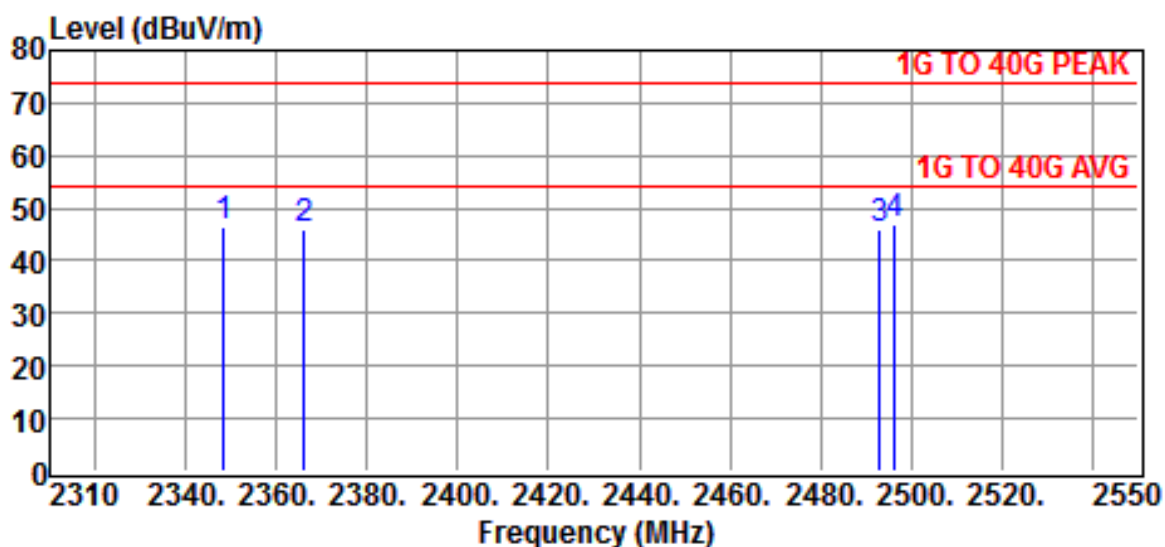
Mode: 802.11n HT-20 ANT1

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2348.5000	52.17	-5.60	46.57	74.00	-27.43	Peak
2366.0000	51.63	-5.55	46.08	74.00	-27.92	Peak
2493.0000	51.17	-5.24	45.93	74.00	-28.07	Peak
2496.5000	51.97	-5.23	46.74	74.00	-27.26	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

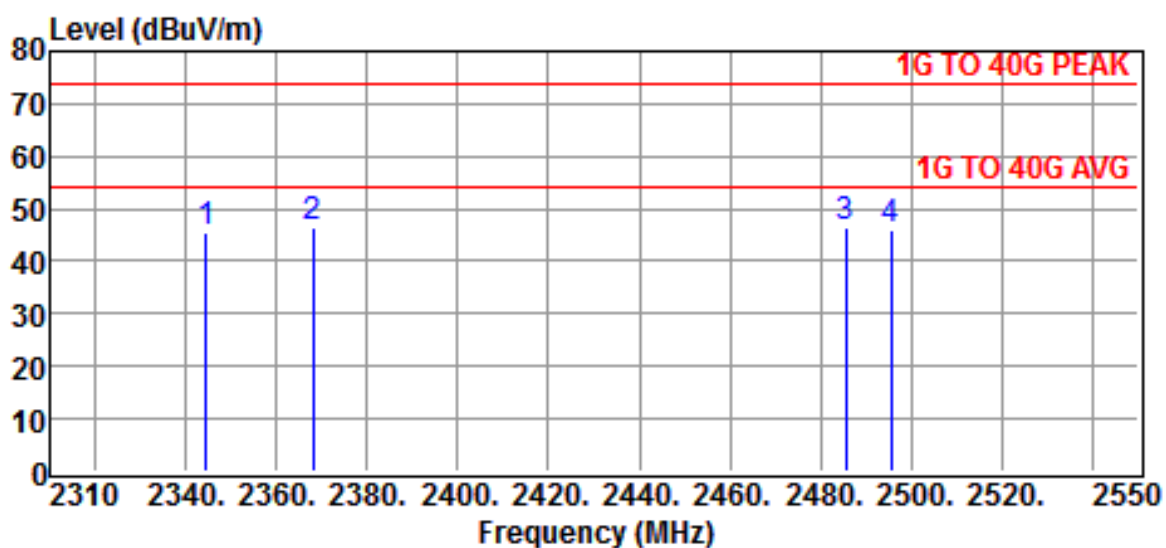


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n20		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2344.6000	51.12	-5.60	45.52	74.00	-28.48	Peak
2368.0000	51.80	-5.55	46.25	74.00	-27.75	Peak
2485.6000	51.66	-5.27	46.39	74.00	-27.61	Peak
2495.6000	51.10	-5.23	45.87	74.00	-28.13	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

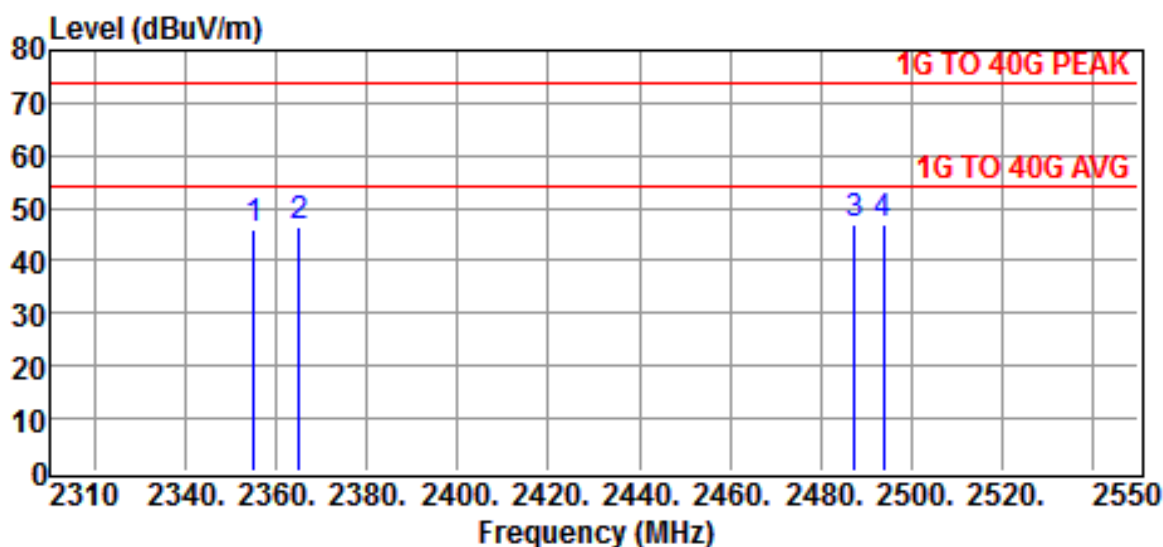
Mode: 802.11n HT-40 ANT0

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2355.0000	51.32	-5.56	45.76	74.00	-28.24	Peak
2365.0000	51.90	-5.55	46.35	74.00	-27.65	Peak
2487.4000	52.29	-5.27	47.02	74.00	-26.98	Peak
2494.0000	52.18	-5.23	46.95	74.00	-27.05	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

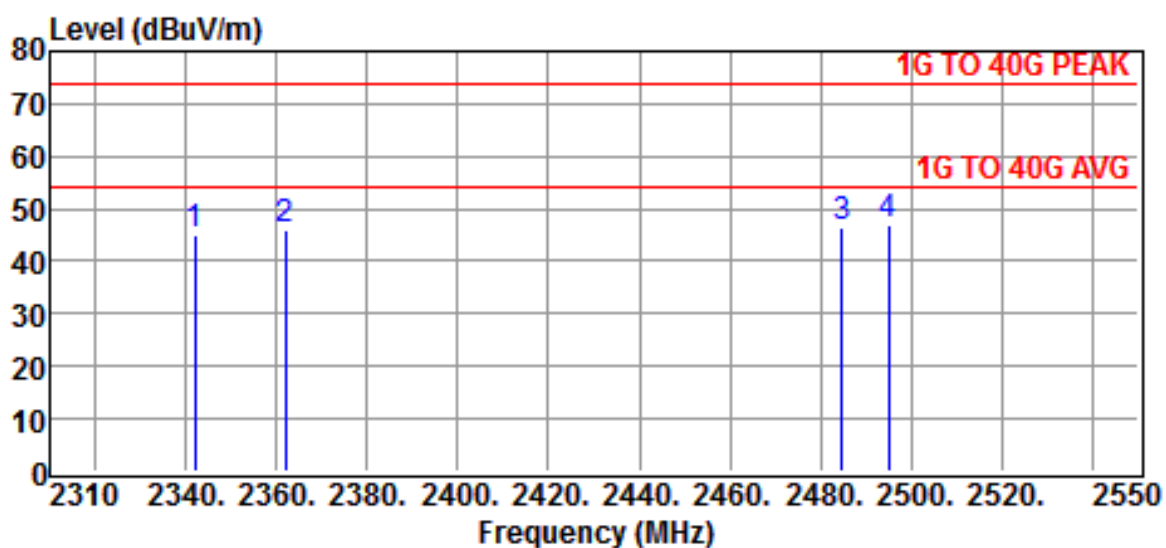


Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2342.0000	50.78	-5.60	45.18	74.00	-28.82	Peak
2362.0000	51.41	-5.55	45.86	74.00	-28.14	Peak
2484.6000	51.66	-5.27	46.39	74.00	-27.61	Peak
2495.0000	52.24	-5.23	47.01	74.00	-26.99	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

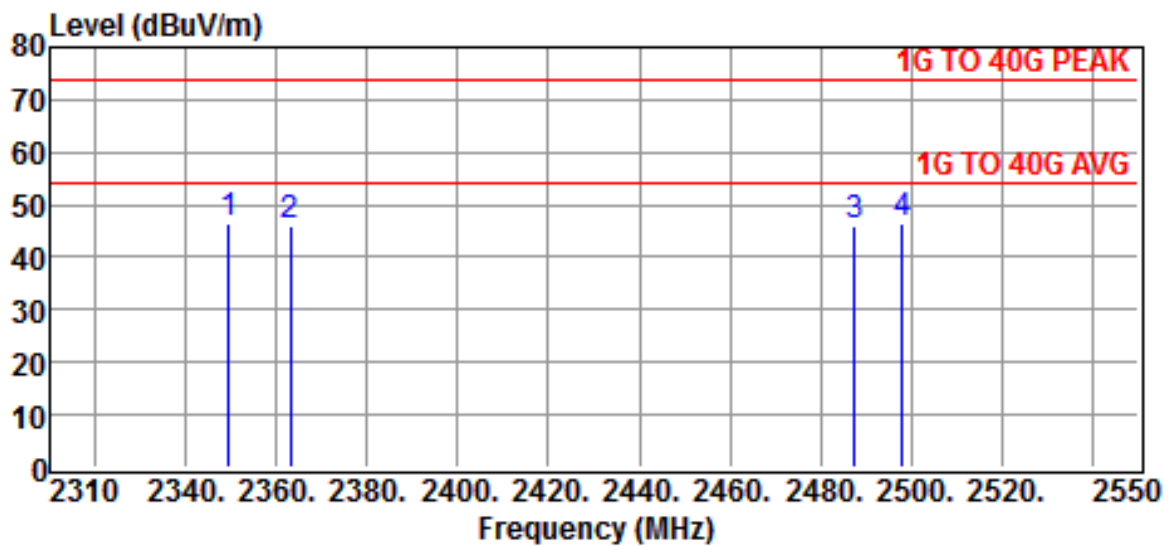
Mode: 802.11n HT-40 ANT1

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2349.5000	52.13	-5.59	46.54	74.00	-27.46	Peak
2363.0000	51.61	-5.55	46.06	74.00	-27.94	Peak
2487.4000	51.10	-5.27	45.83	74.00	-28.17	Peak
2498.0000	51.62	-5.23	46.39	74.00	-27.61	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

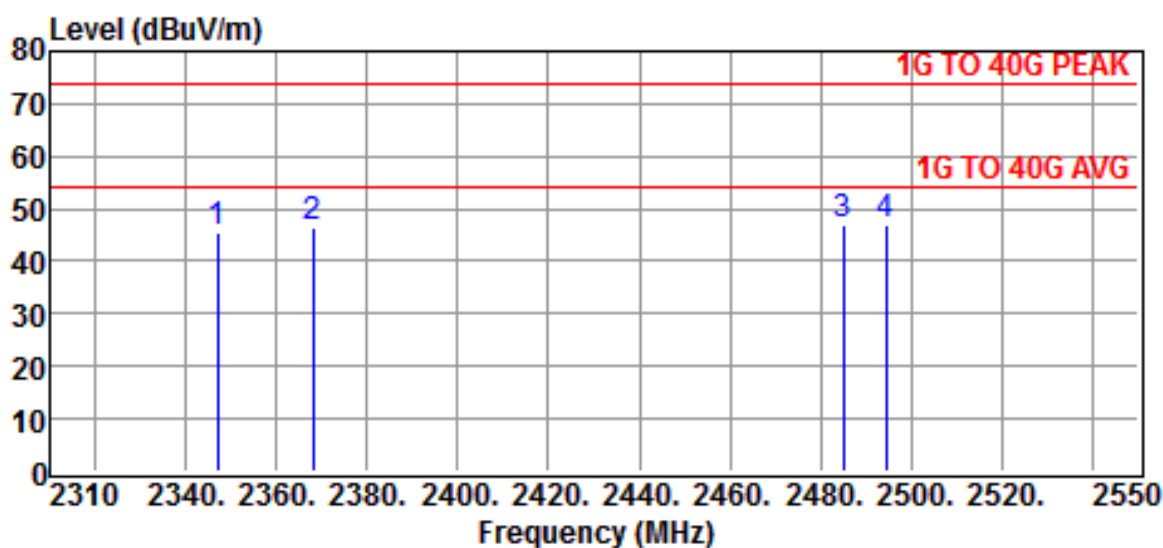

Site	:open site	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:11n40		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2347.0000	50.99	-5.60	45.39	74.00	-28.61	Peak
2368.0000	52.19	-5.55	46.64	74.00	-27.36	Peak
2485.0000	52.25	-5.27	46.98	74.00	-27.02	Peak
2494.5000	52.26	-5.23	47.03	74.00	-26.97	Peak


Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.3 Other Emission

a) Emission frequencies below 1 GHz

1) Metal frame

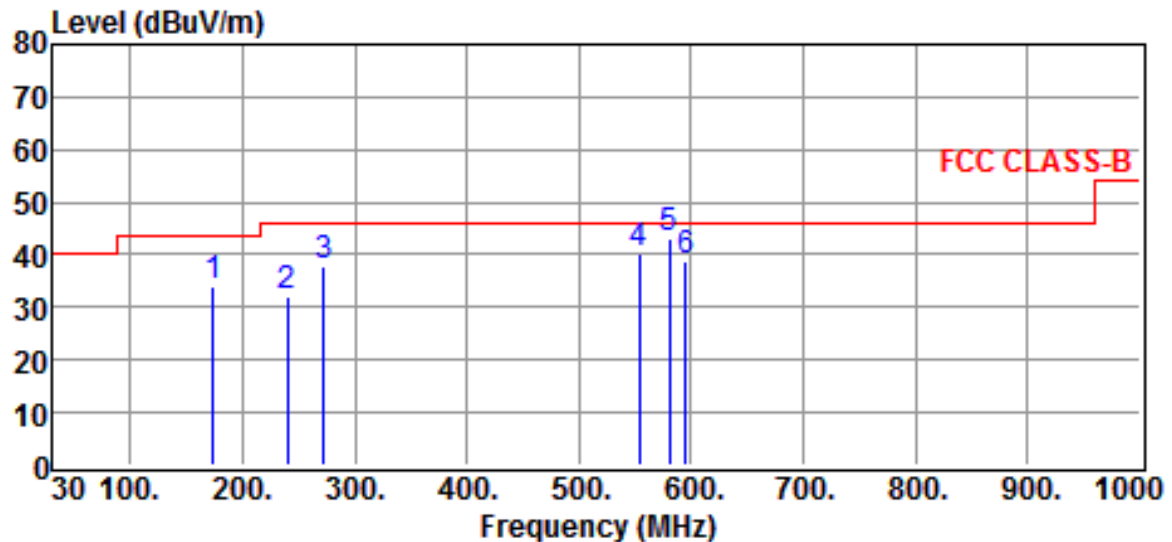


Site	:Chamber #2	Date	:2018-05-18
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Link Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
173.5600	43.96	-9.84	34.12	43.50	-9.38	QP
239.5200	39.90	-7.91	31.99	46.00	-14.01	QP
272.5000	43.60	-5.78	37.82	46.00	-8.18	QP
553.8000	40.04	-0.02	40.02	46.00	-5.98	QP
580.9600	42.41	0.49	42.90	46.00	-3.10	QP
594.5400	38.15	0.74	38.89	46.00	-7.11	QP

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1GHz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

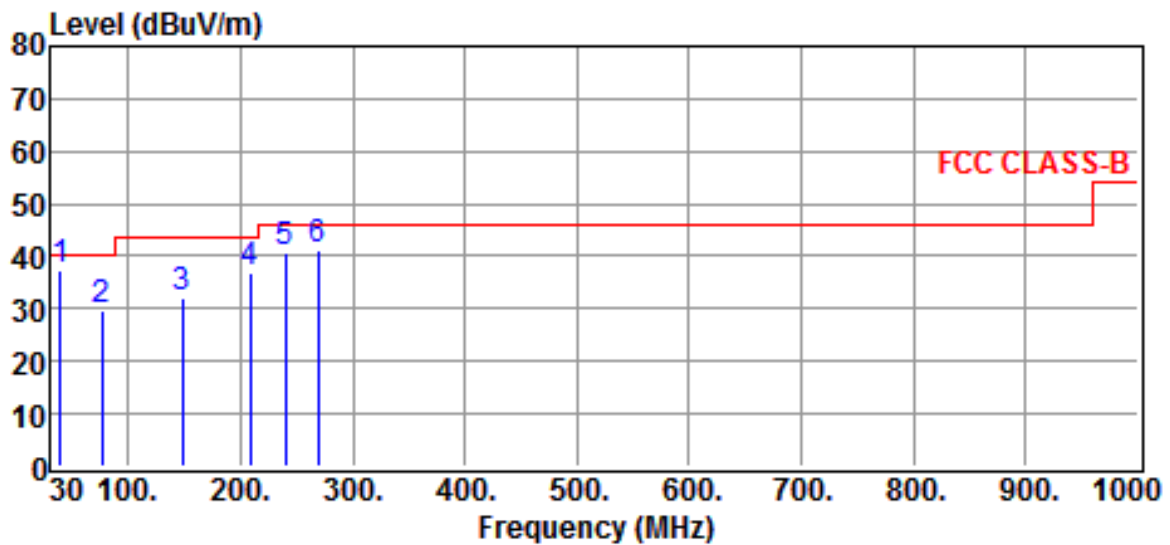


Site	:Chamber #2	Date	:2018-05-18
Limit	:FCC CLASS-B	Ant. Pol.	: VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Link Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
39.7000	44.80	-7.51	37.29	40.00	-2.71	QP
76.5600	44.54	-14.61	29.93	40.00	-10.07	QP
148.3400	40.77	-8.79	31.98	43.50	-11.52	QP
208.4800	45.14	-8.21	36.93	43.50	-6.57	QP
239.5200	48.60	-7.91	40.69	46.00	-5.31	QP
268.6200	46.94	-5.95	40.99	46.00	-5.01	QP

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

2) Plastic frame

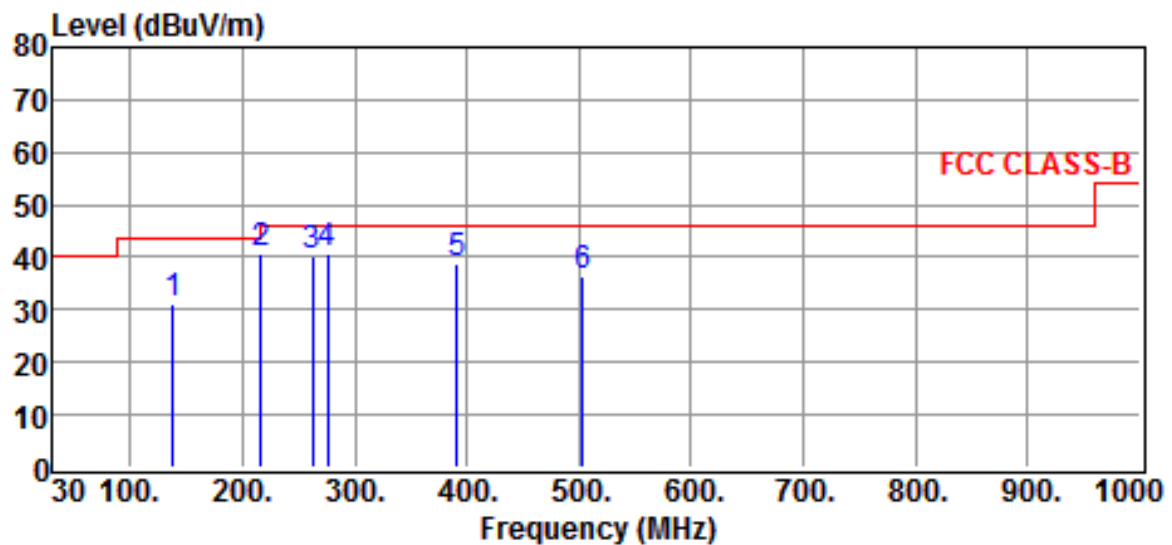


Site	:Chamber #2	Date	:2018-05-24
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	: LauncherX	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Link Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
138.6400	40.00	-8.67	31.33	43.50	-12.17	QP
216.2400	48.67	-8.18	40.49	46.00	-5.51	QP
262.8000	46.05	-6.01	40.04	46.00	-5.96	QP
276.3800	46.21	-5.56	40.65	46.00	-5.35	QP
390.8400	40.86	-2.21	38.65	46.00	-7.35	QP
503.3600	36.94	-0.77	36.17	46.00	-9.83	QP

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

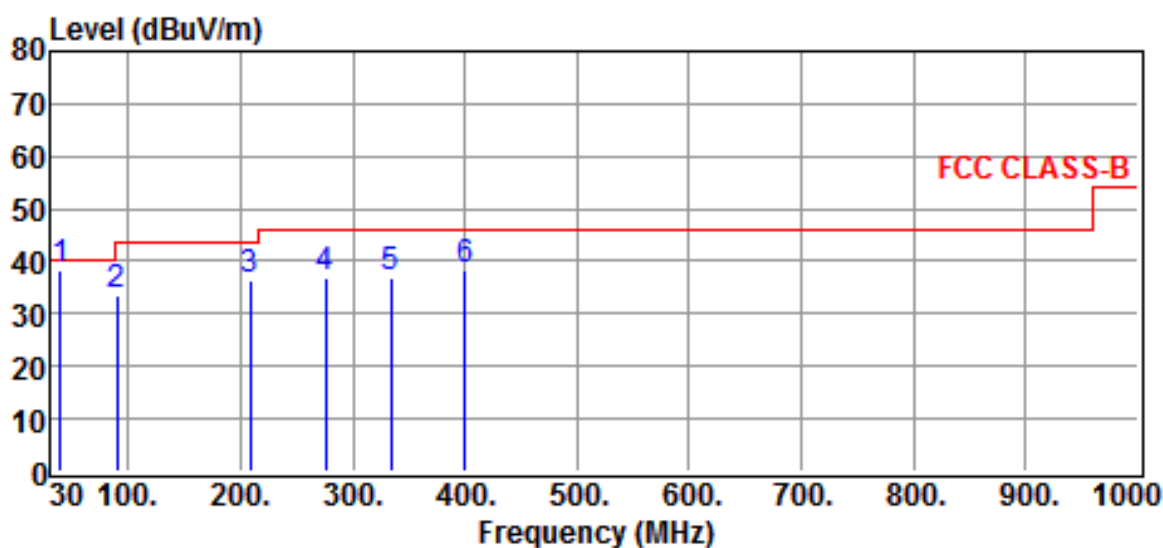

Site	:Chamber #2	Date	:2018-05-24
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	: LauncherX	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:28 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Link Mode		


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
39.7000	45.97	-7.51	38.46	40.00	-1.54	QP
90.1400	45.96	-12.50	33.46	43.50	-10.04	QP
208.4800	44.69	-8.21	36.48	43.50	-7.02	QP
275.4100	42.45	-5.62	36.83	46.00	-9.17	QP
334.5800	40.51	-3.71	36.80	46.00	-9.20	QP
400.5400	40.08	-1.93	38.15	46.00	-7.85	QP

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

b) Emission frequencies Above 1GHz

1) Metal frame

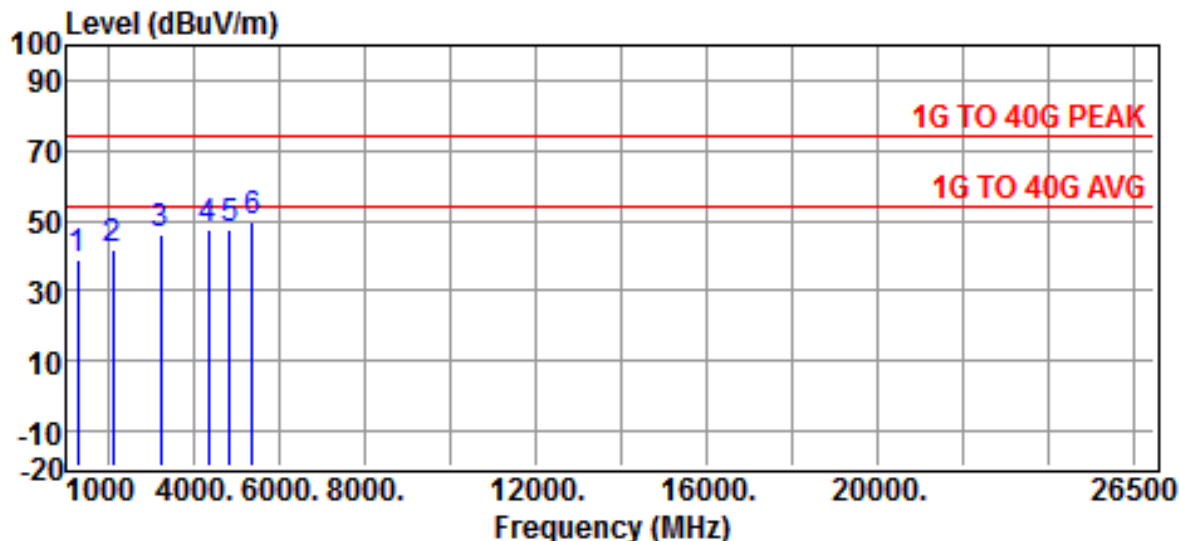


Site	:Chamber #2	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:LINK Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
1290.0000	49.26	-10.42	38.84	74.00	-35.16	Peak
2100.0000	47.89	-6.15	41.74	74.00	-32.26	Peak
3225.0000	48.51	-2.53	45.98	74.00	-28.02	Peak
4350.0000	47.39	0.39	47.78	74.00	-26.22	Peak
4845.0000	46.23	1.60	47.83	74.00	-26.17	Peak
5385.0000	46.70	2.89	49.59	74.00	-24.41	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

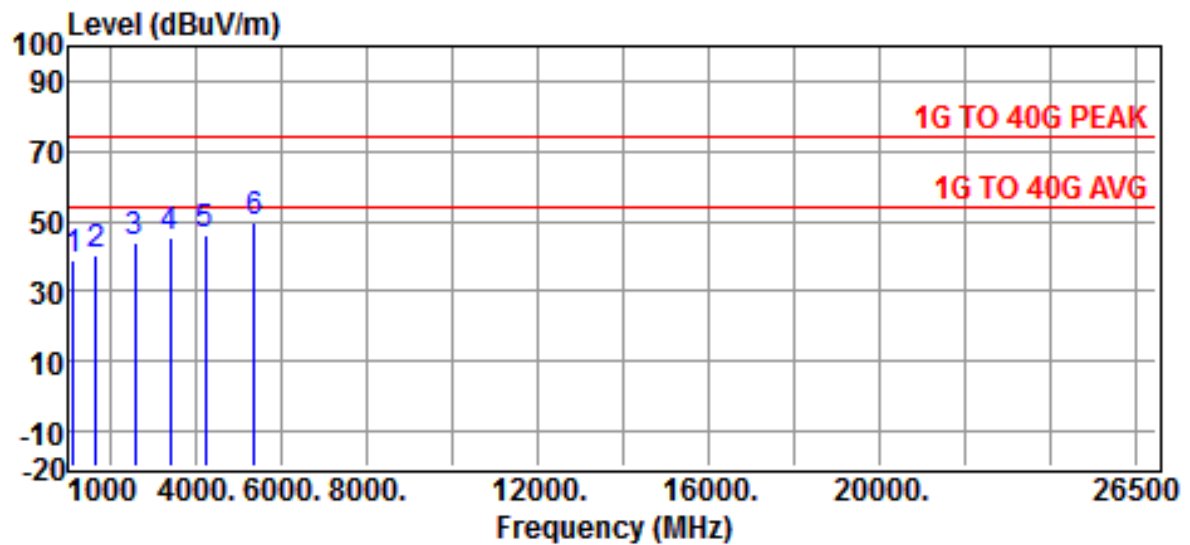


Site	:Chamber #2	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:LauncherPlus	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:LINK Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
1135.0000	49.94	-10.89	39.05	74.00	-34.95	Peak
1650.0000	48.90	-8.74	40.16	74.00	-33.84	Peak
2575.0000	48.73	-4.91	43.82	74.00	-30.18	Peak
3405.0000	47.51	-1.99	45.52	74.00	-28.48	Peak
4215.0000	45.88	0.33	46.21	74.00	-27.79	Peak
5385.0000	46.70	2.89	49.59	74.00	-24.41	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

2) Plastic frame

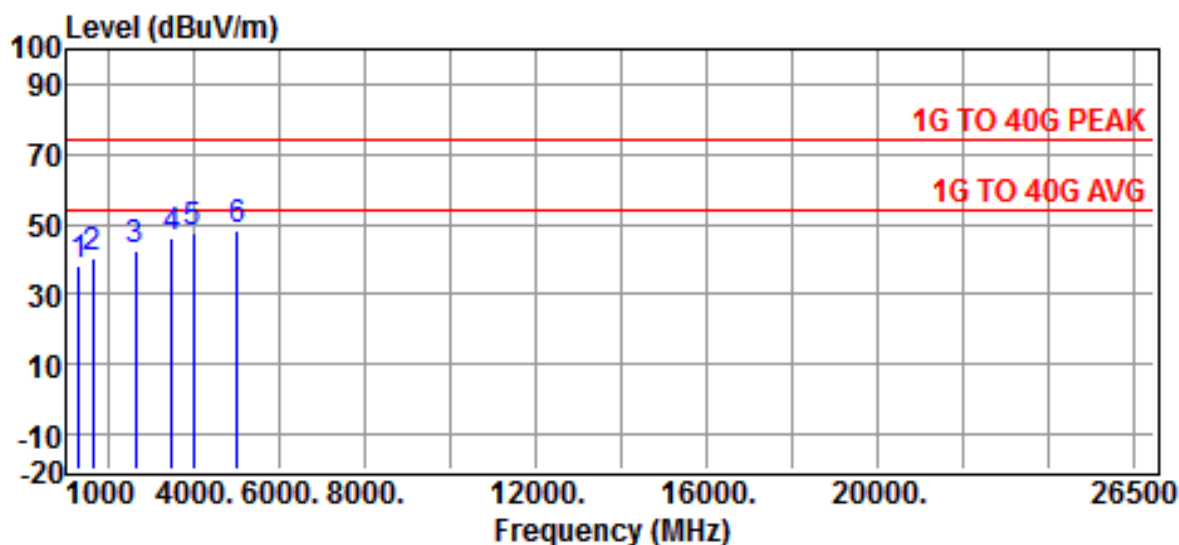


Site	:Chamber #2	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	: LauncherX	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:LINK Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
1315.0000	48.84	-10.34	38.50	74.00	-35.50	Peak
1630.0000	49.02	-8.84	40.18	74.00	-33.82	Peak
2620.0000	47.41	-4.77	42.64	74.00	-31.36	Peak
3475.0000	47.84	-1.72	46.12	74.00	-27.88	Peak
3990.0000	47.05	0.21	47.26	74.00	-26.74	Peak
5005.0000	46.13	2.13	48.26	74.00	-25.74	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

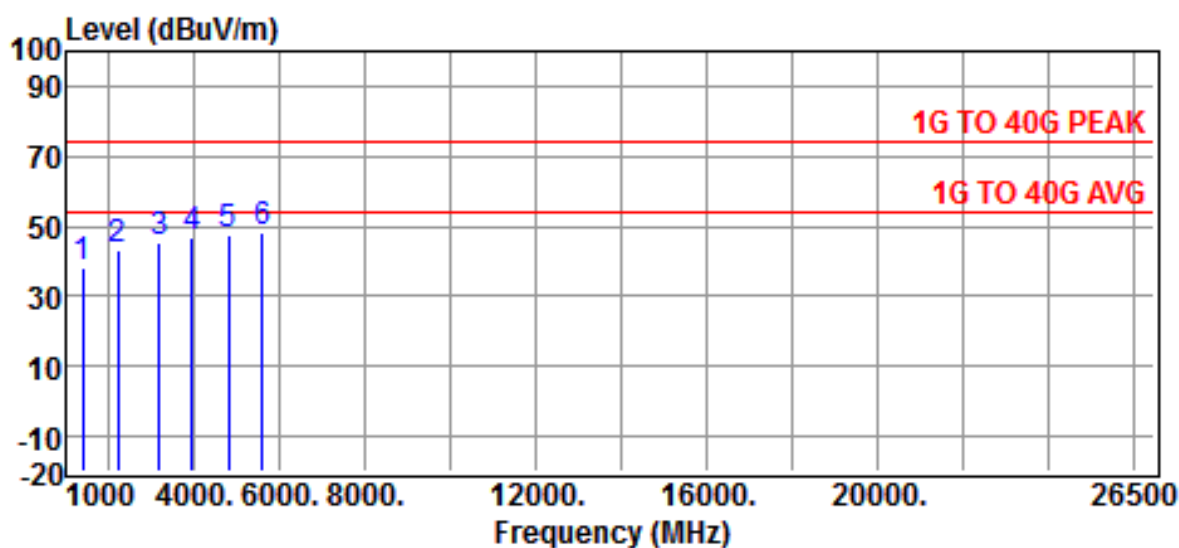

Site	:Chamber #2	Date	:2018-05-29
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	: LauncherX	Model	:QL-300
Power Rating	:DC 5V From PC	Temp.	:26 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:LINK Mode		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
1405.0000	48.29	-10.03	38.26	74.00	-35.74	Peak
2215.0000	49.41	-5.91	43.50	74.00	-30.50	Peak
3180.0000	47.80	-2.70	45.10	74.00	-28.90	Peak
3970.0000	46.79	0.14	46.93	74.00	-27.07	Peak
4800.0000	46.15	1.47	47.62	74.00	-26.38	Peak
5610.0000	44.63	3.28	47.91	74.00	-26.09	Peak

Note :

1. Result = Reading + Corrected Factor
2. Average Result = Peak Result + Duty Factor ()
3. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
4. The margin value=Limit - Result
5. Above 1Ghz : Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emission were detected from 9kHz to 30MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\textbf{Result = Reading + Corrected Factor}$$


where

Corrected Factor = Antenna FACTOR + Cable Loss + High Pass Filter Loss - Amplifier Gain


4.6 Photos of Radiation Measuring Setup

(Below 1GHz)

1) Equipped with flash version, Metal frame and USB Type A

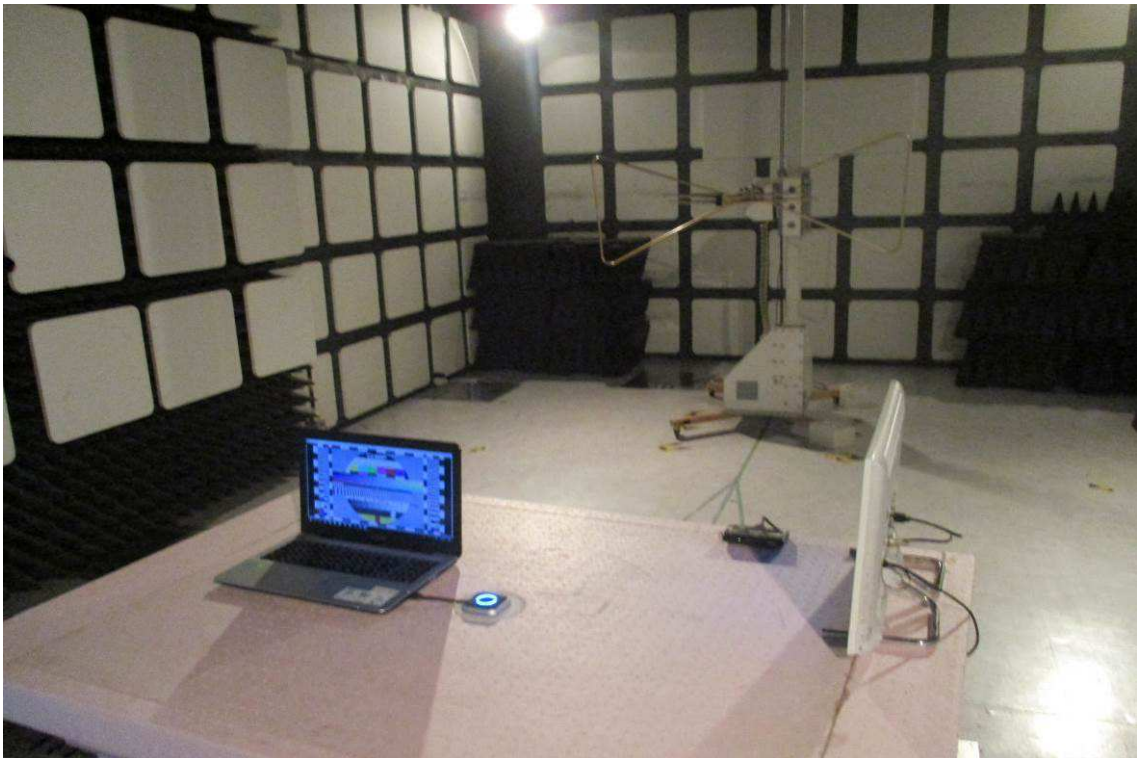


2) Equipped with flash version, Plastic frame and USB Type A

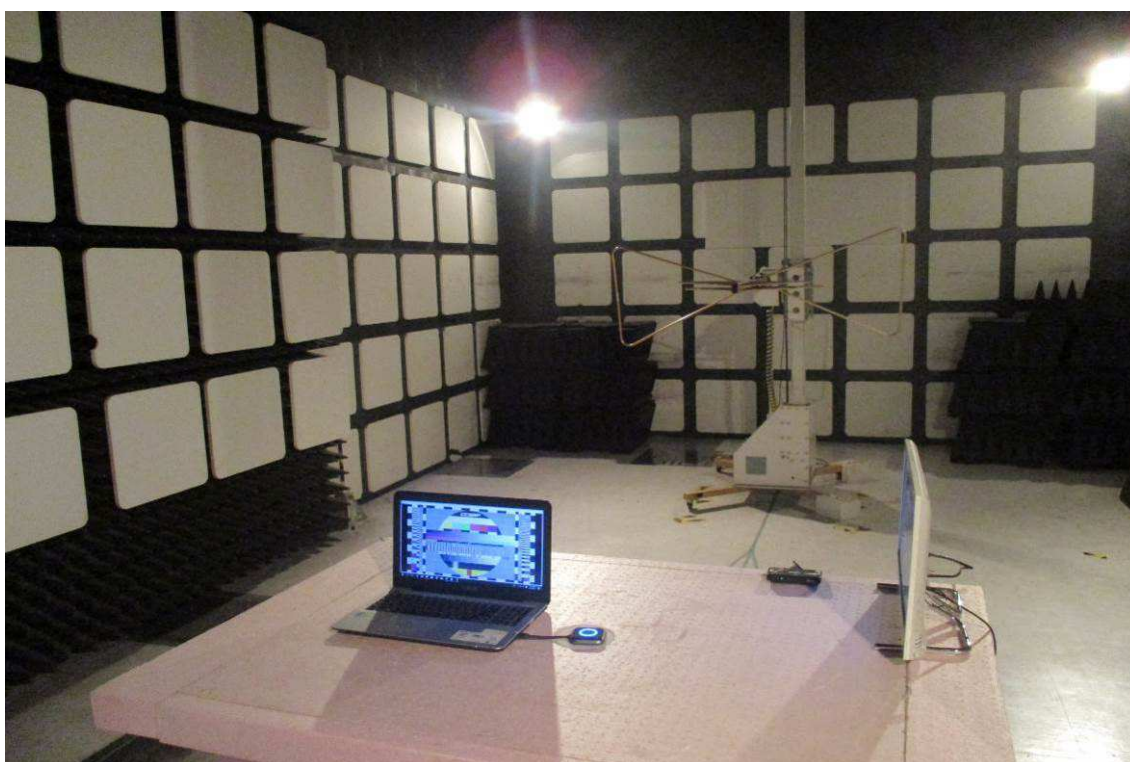


(Above 1GHz)

1) Equipped with flash version, Metal frame and USB Type A

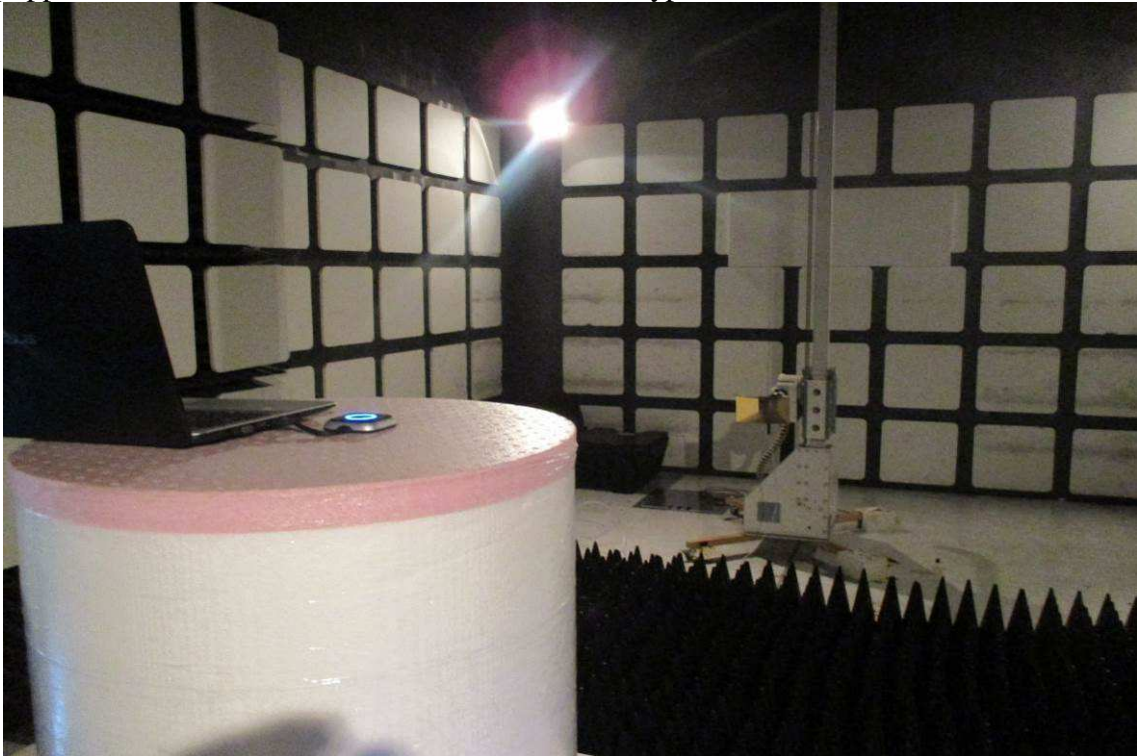

2) Equipped with flash version, Plastic frame and USB Type A

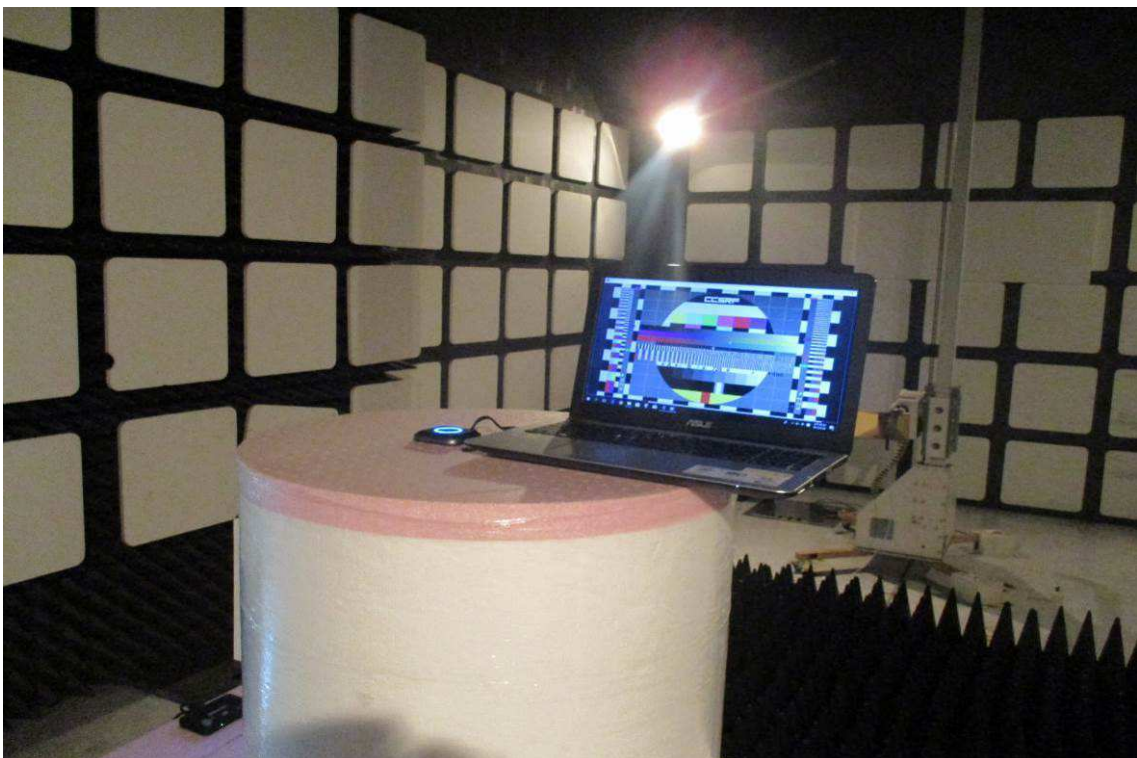

5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to §15.107(a) and §15.207(a) respectively. Both Limits are identical specification.

5.2 Measurement Procedure


1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

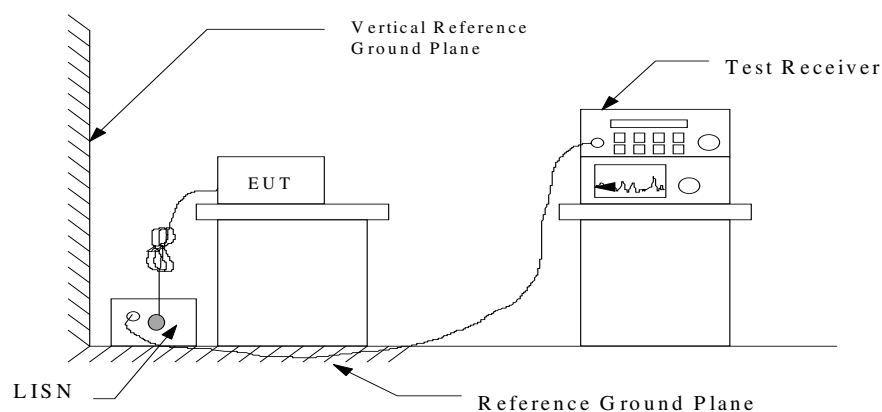

5.3 Conducted Emission Data

1) Metal frame

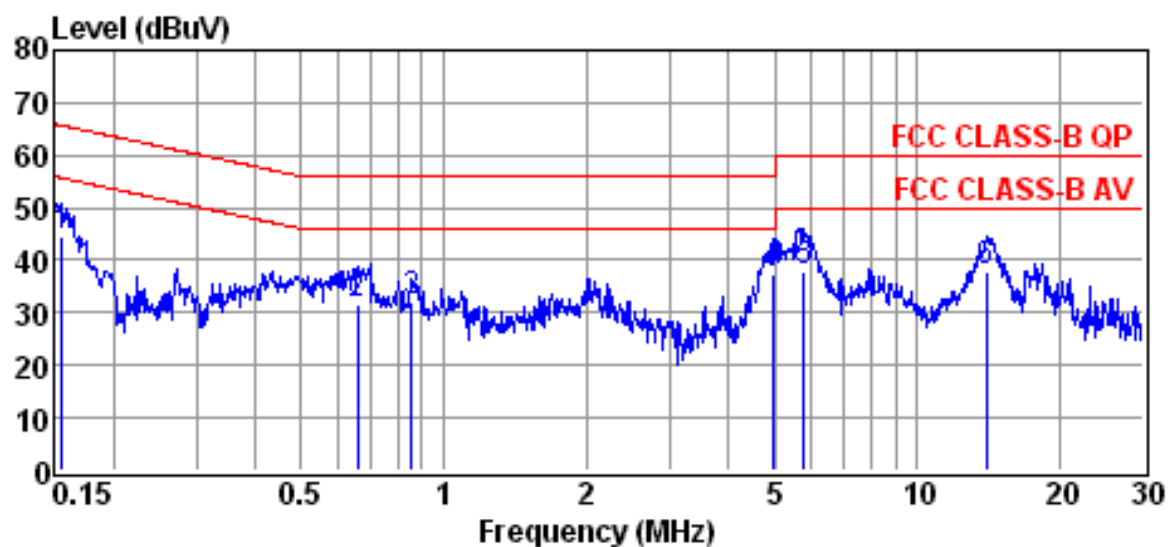


Site : conducted #1
 Condition : FCC CLASS-B QP
 Tem / Hum : 28 °C / 52%
 EUT : LauncherPlus
 Memo :

Date : 05-22-2018
 LISN : NEUTRAL
 Test Mode : Operation Mode
 Power Rating : DC 5V From PC
 Memo :

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1565	34.31	10.42	44.73	65.65	-20.92	QP
0.6578	21.25	10.47	31.72	56.00	-24.28	QP
0.8528	21.76	10.48	32.24	56.00	-23.76	QP
4.9520	26.87	10.68	37.55	56.00	-18.45	QP
5.7740	26.95	10.72	37.67	60.00	-22.33	QP
13.9890	26.69	11.00	37.69	60.00	-22.31	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

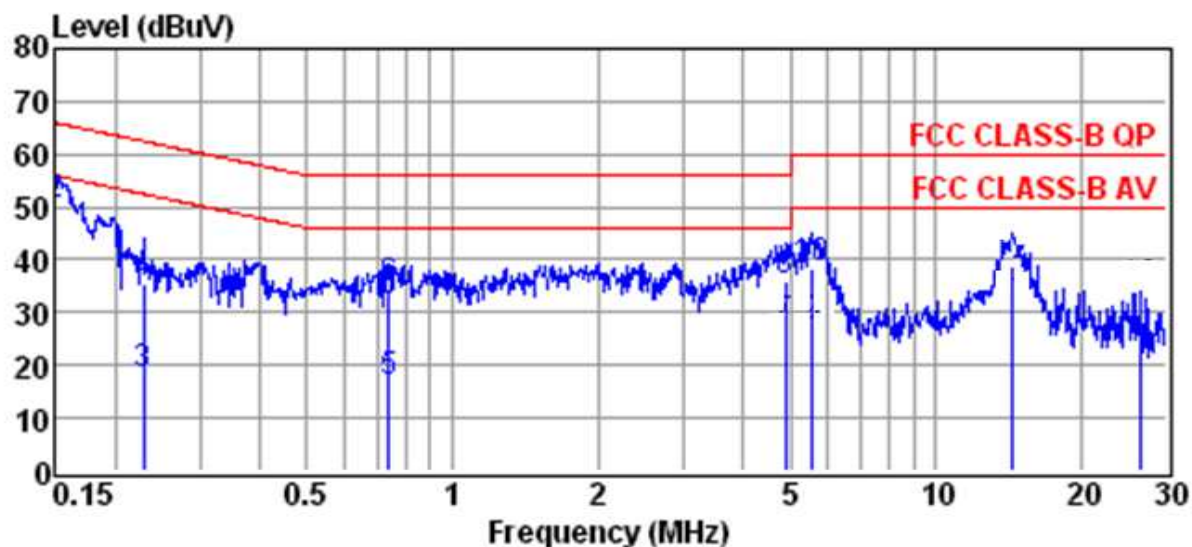

Site : conducted #1
 Condition : FCC CLASS-B QP
 Tem / Hum : 28 °C / 52%
 EUT : LauncherPlus
 Memo :


Date : 05-22-2018
 LISN : LINE
 Test Mode : Operation Mode
 Power Rating : DC 5V From PC
 Memo :

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1508	40.17	10.36	50.53	65.96	-15.43	QP
0.2292	25.25	10.36	35.61	62.48	-26.87	QP
0.7391	24.22	10.42	34.64	56.00	-21.36	QP
4.9000	25.45	10.63	36.08	56.00	-19.92	QP
5.5640	27.58	10.66	38.24	60.00	-21.76	QP
14.3640	27.74	11.13	38.87	60.00	-21.13	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

2) Plastic frame

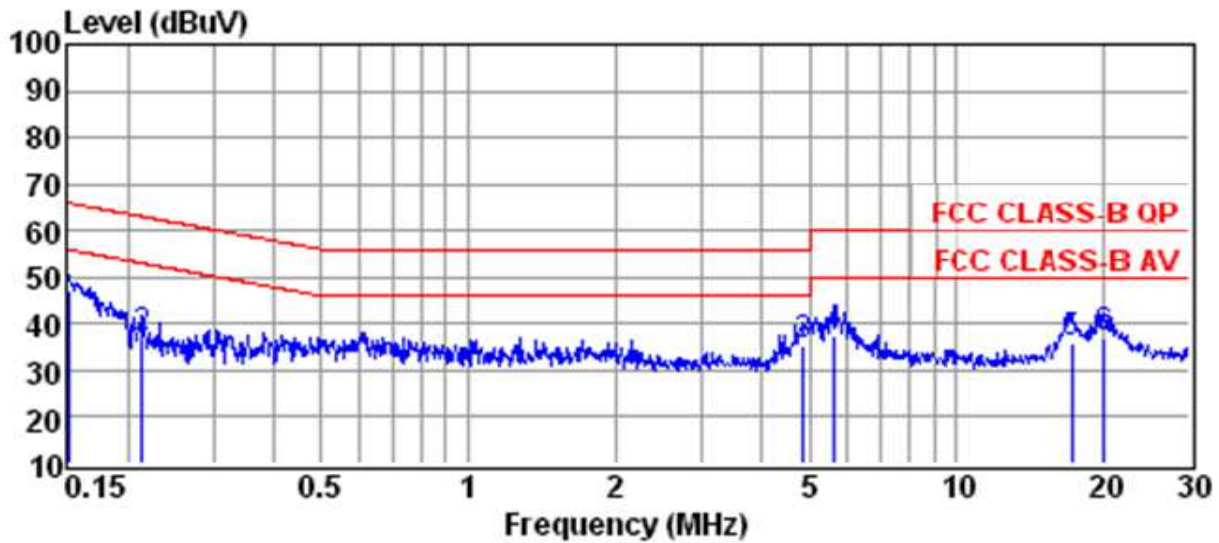

Site : conducted #1

Date : 05-28-2018

Condition : FCC CLASS-B-QP

LISN : NEUTRAL

Tem / Hum : 28 °C / 52%

Test Mode : Operation Mode

EUT : LauncherX

Power Rating : DC 5V From PC

Memo :


Memo :

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1516	36.58	10.42	47.00	65.91	-18.91	QP
0.2151	26.70	10.43	37.13	63.01	-25.88	QP
4.8740	24.62	10.68	35.30	56.00	-20.70	QP
5.6230	26.89	10.71	37.60	60.00	-22.40	QP
17.2910	24.71	11.12	35.83	60.00	-24.17	QP
20.0560	25.62	11.19	36.81	60.00	-23.19	QP

Note :

1. Result = Reading + Factor

2. Factor = LISN Factor + Cable Loss

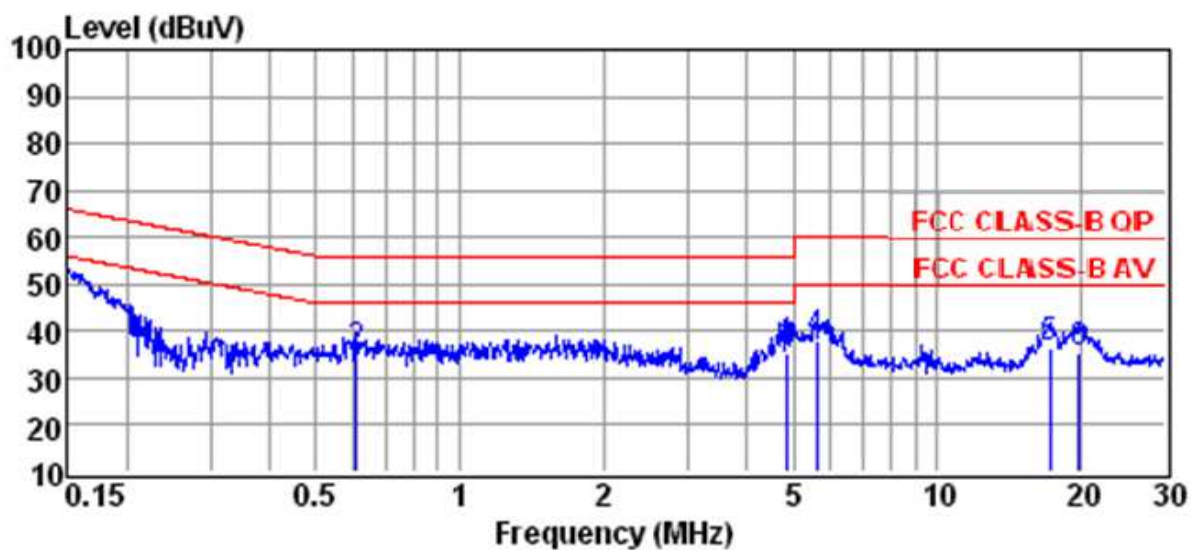

Site : conducted #1
 Condition : FCC CLASS-B-QP
 Tem / Hum : 28 °C / 52%
 EUT : LauncherX
 Memo :

Date : 05-28-2018
 LISN : LINE
 Test Mode : Operation Mode
 Power Rating : DC 5V From PC
 Memo :

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1508	39.88	10.36	50.24	65.96	-15.72	QP
0.6075	24.79	10.40	35.19	56.00	-20.81	QP
4.8740	24.45	10.63	35.08	56.00	-20.92	QP
5.5940	27.57	10.66	38.23	60.00	-21.77	QP
17.2910	24.91	11.29	36.20	60.00	-23.80	QP
19.8450	23.82	11.41	35.23	60.00	-24.77	QP

Note :

1. Result = Reading + Factor
2. Factor = LISN Factor + Cable Loss

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2017/09/19	2018/09/18
LISN	Rohde & Schwarz	ESH2-Z5	2018/04/11	2019/04/10

5.6 Photos of Conduction Measuring Setup

1) Equipped with flash version, Metal frame and USB Type A



2) Equipped with flash version, Plastic frame and USB Type A



6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

The antenna gain is -3.37 dBi so there is no need to reduce the power.

Please see internal photos and the antenna specifications.

7 EMISSION BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value. The settings of spectrum analyzer is as followings.
 - 1) Set RBW = 100 kHz.
 - 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - 3) Detector = Peak.
 - 4) Trace mode = max hold.
 - 5) Sweep = auto couple.
 - 6) Allow the trace to stabilize.
 - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/11/02	2018/11/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

7.4 Measurement Data

Test Date : Mary 18, 2018 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 8.48 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 9.06 MHz
- c) Channel High: 6 dB Emission Bandwidth is 8.88 MHz

B. 802.11g @6 Mbps

- a) Channel Low: 6 dB Emission Bandwidth is 16.48 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 16.50 MHz
- c) Channel High: 6 dB Emission Bandwidth is 16.64 MHz

C. 802.11n HT-20 @6.5 Mbps

Antenna1

- a) Channel Low: 6 dB Emission Bandwidth is 17.44 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.58 MHz
- c) Channel High: 6 dB Emission Bandwidth is 17.60 MHz

Antenna2

- a) Channel Low: 6 dB Emission Bandwidth is 17.60 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 17.76 MHz
- c) Channel High: 6 dB Emission Bandwidth is 17.60 MHz

D. 802.11n HT-40 @13.5 Mbps

Antenna1


- a) Channel Low: 6 dB Emission Bandwidth is 36.7 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 36.4 MHz
- c) Channel High: 6 dB Emission Bandwidth is 36.50 MHz

Antenna2


- a) Channel Low: 6 dB Emission Bandwidth is 36.40 MHz
- b) Channel Mid: 6 dB Emission Bandwidth is 36.20 MHz
- c) Channel High: 6 dB Emission Bandwidth is 36.40 MHz

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ ($1 \text{ GHz} < f \leq 18 \text{ GHz}$).


802.11b / Channel Low

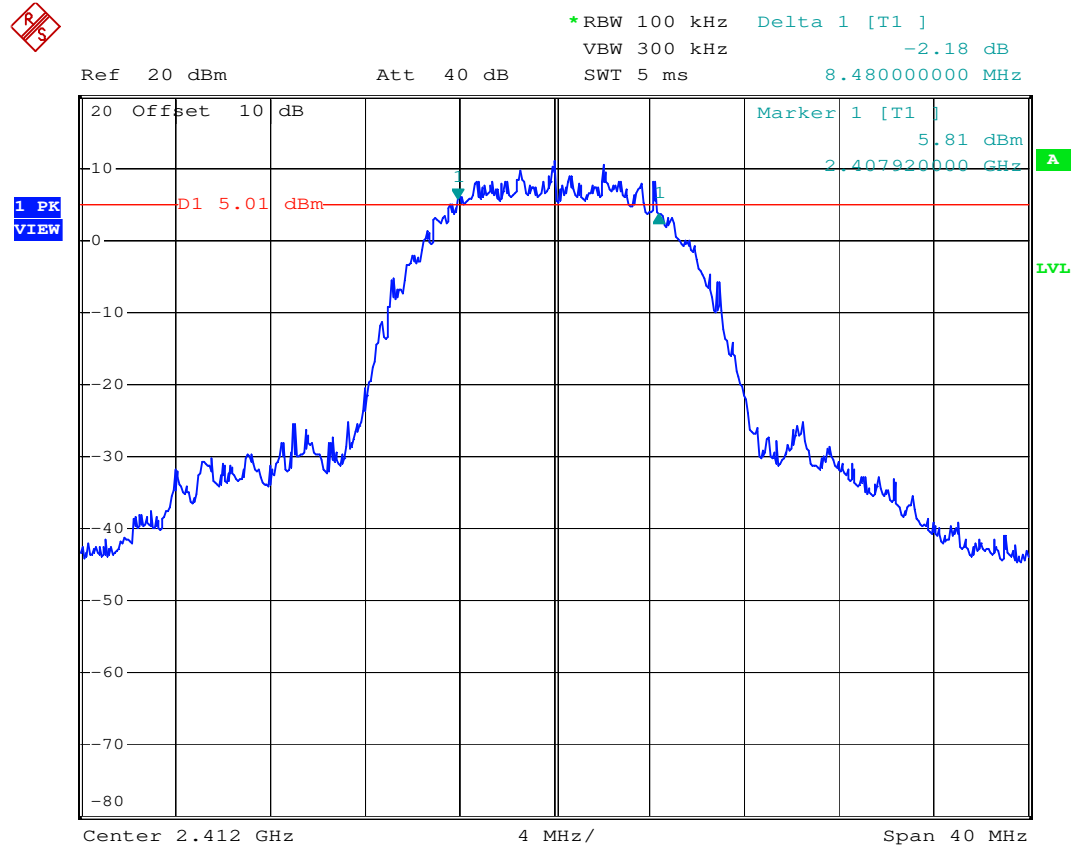


802.11b / Channel Mid

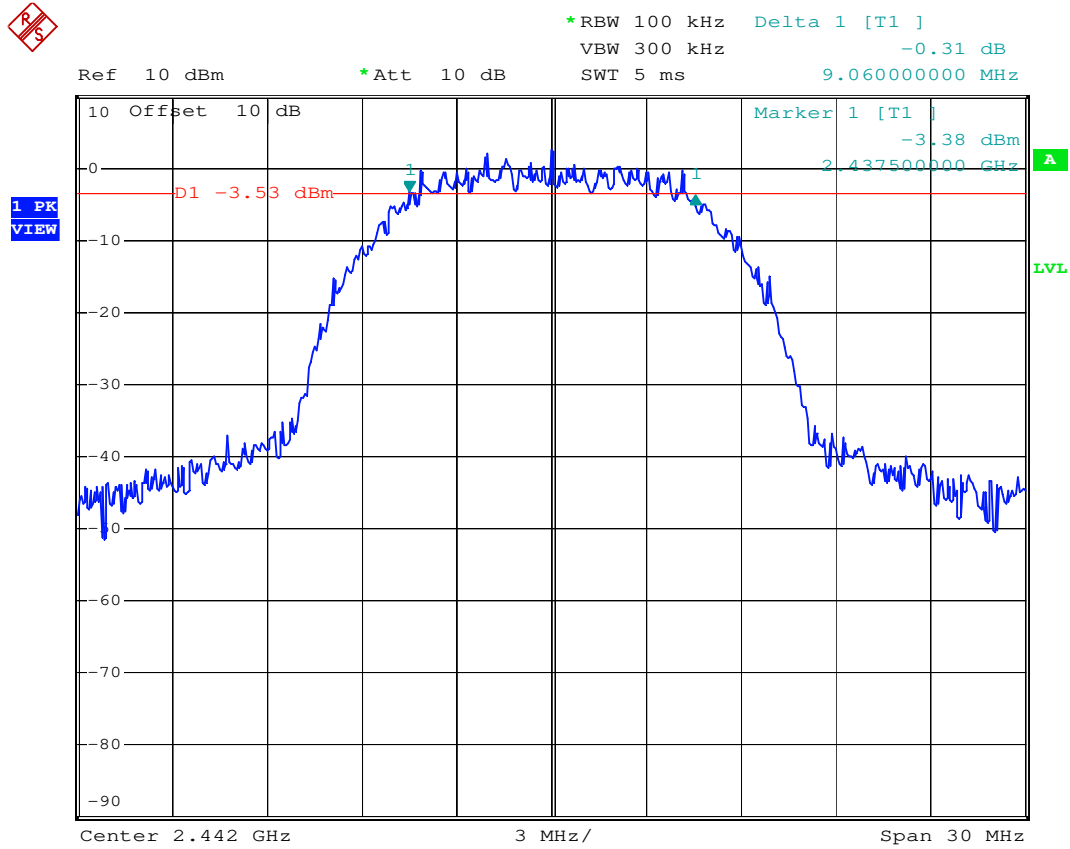


802.11b / Channel High

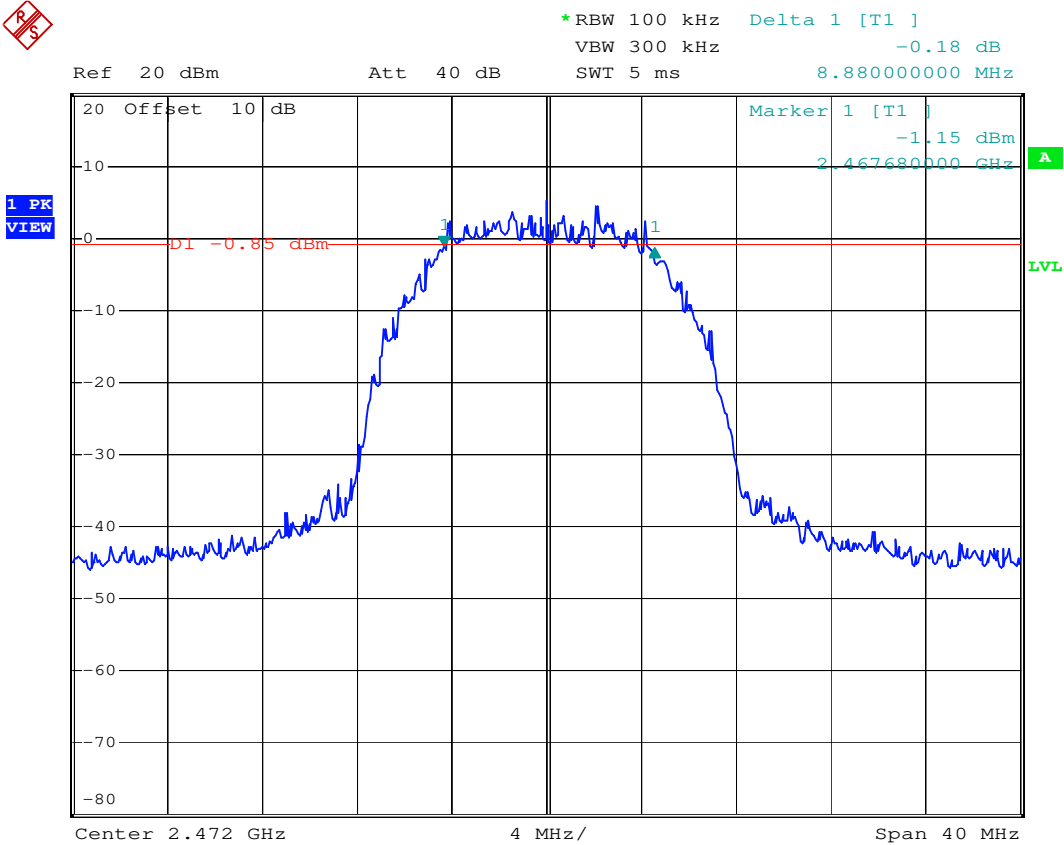


802.11g / Channel Low


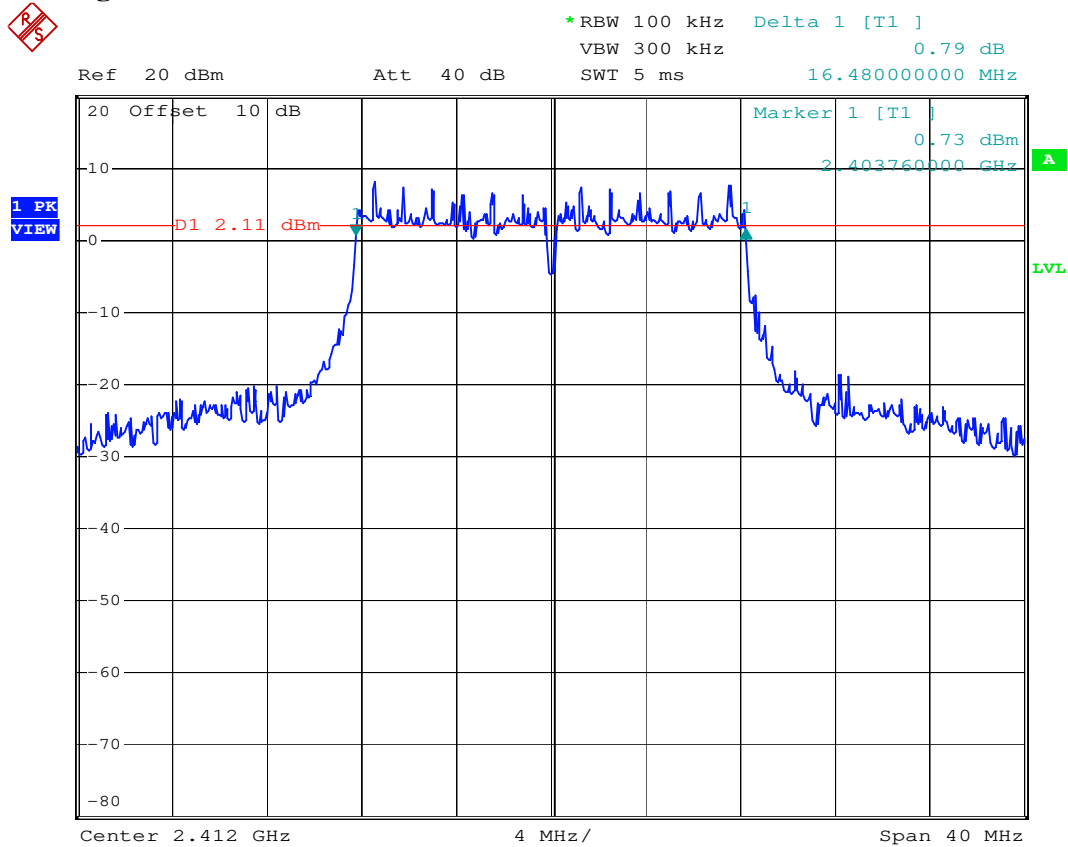


802.11g / Channel Mid

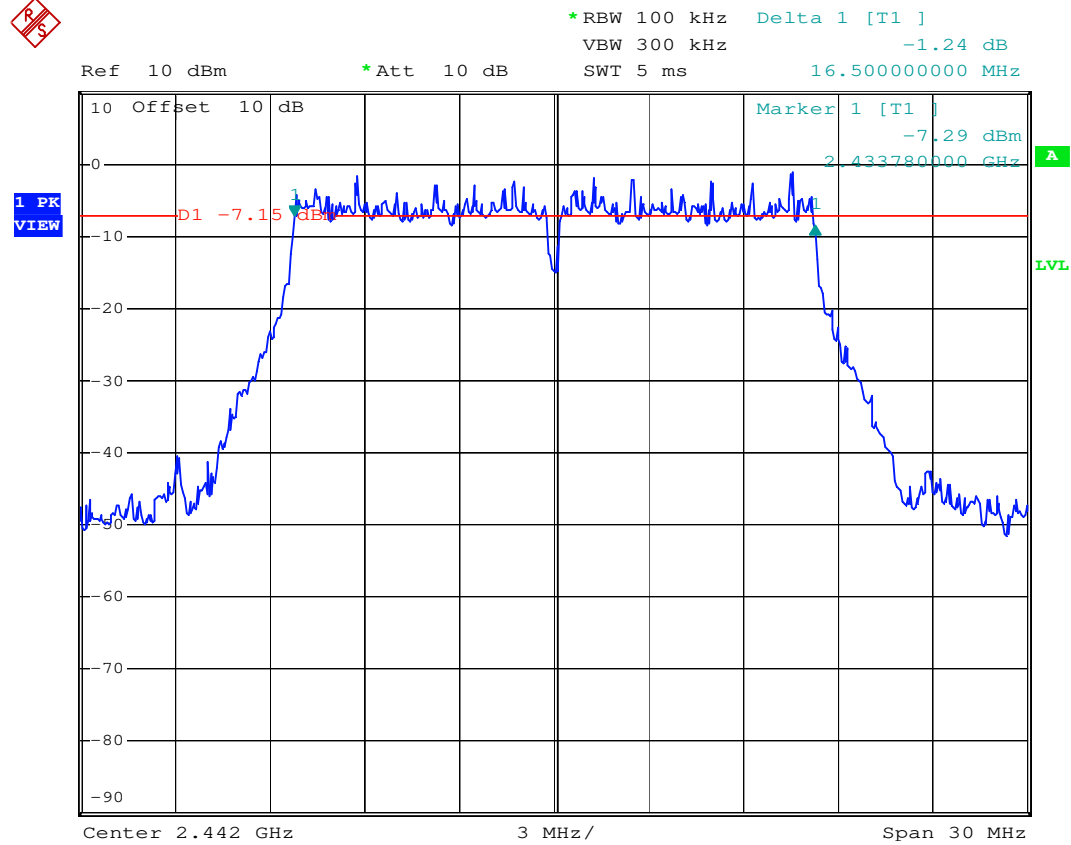


802.11g / Channel High

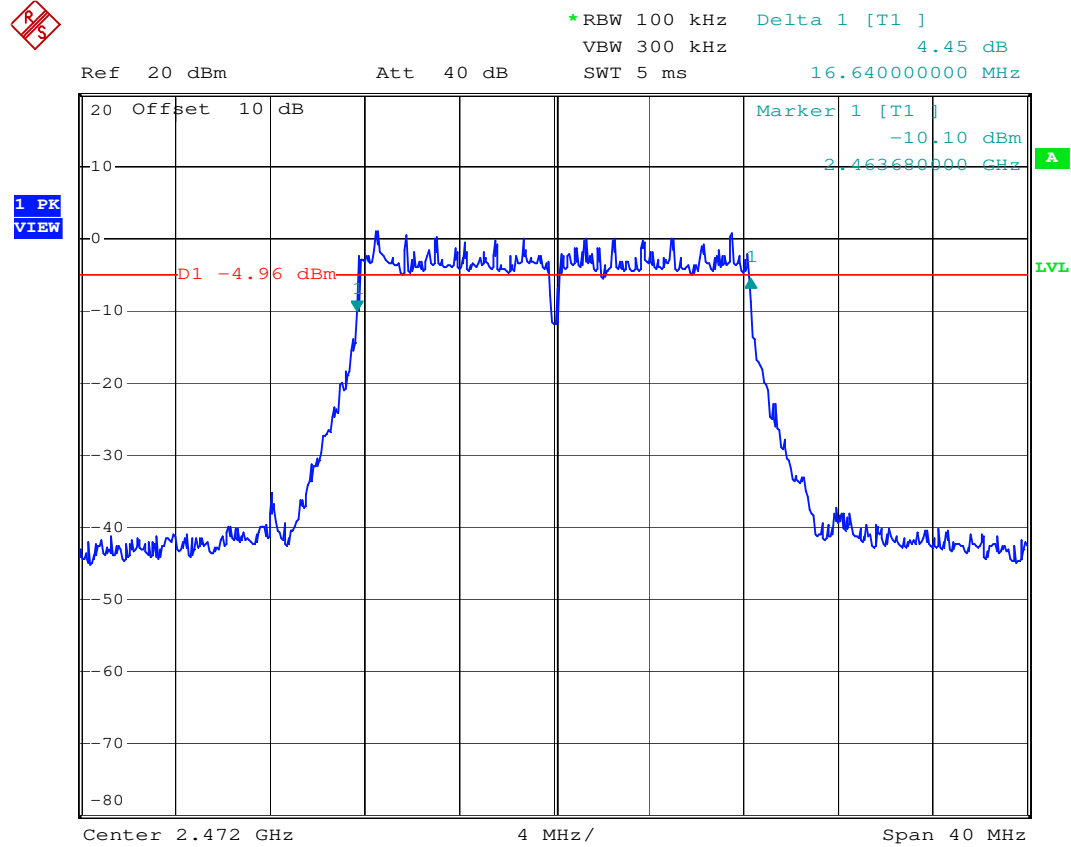


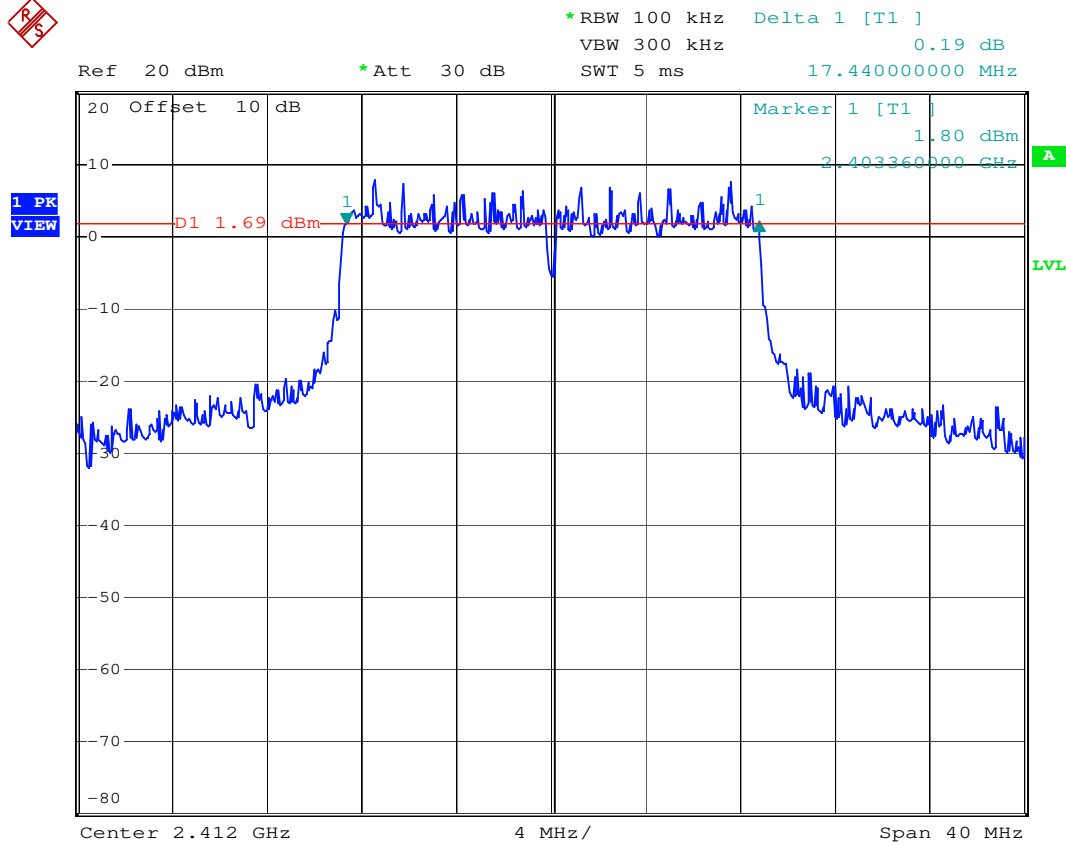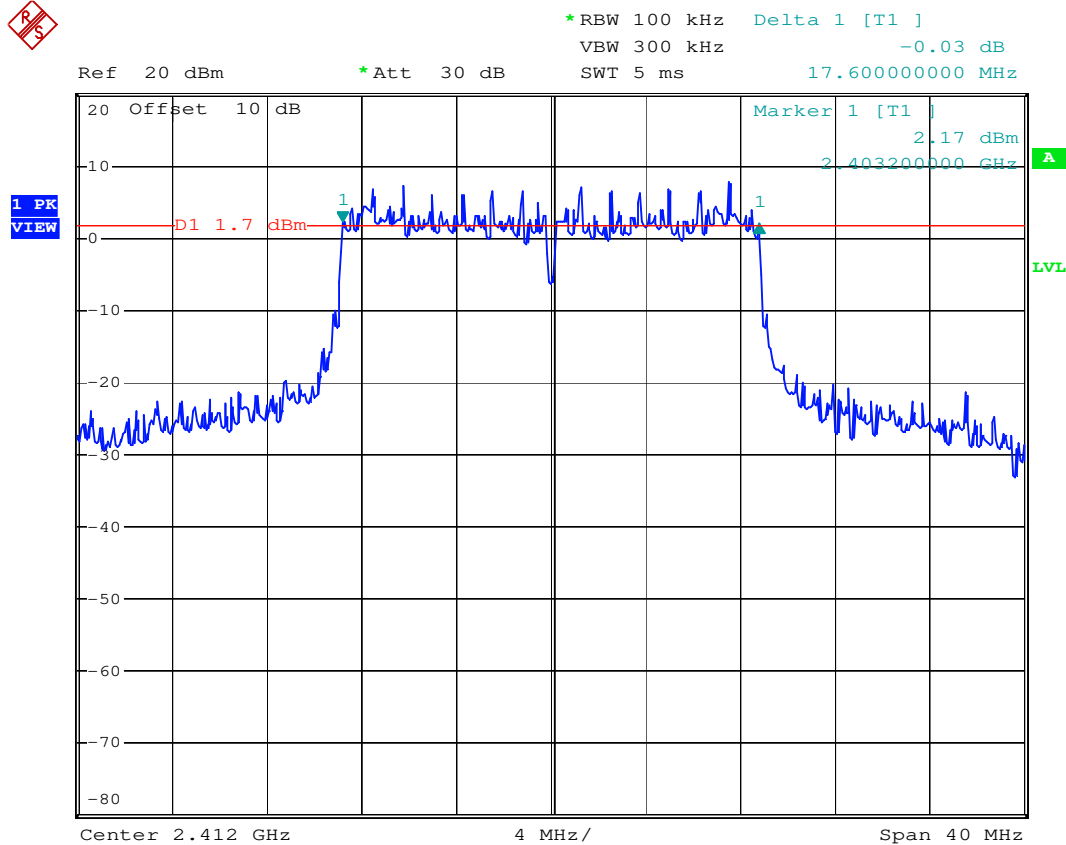802.11n HT-20/ Channel Low (Antenna1)**802.11n HT-20/ Channel Low (Antenna2)**


802.11n HT-20/ Channel Mid (Antenna1)

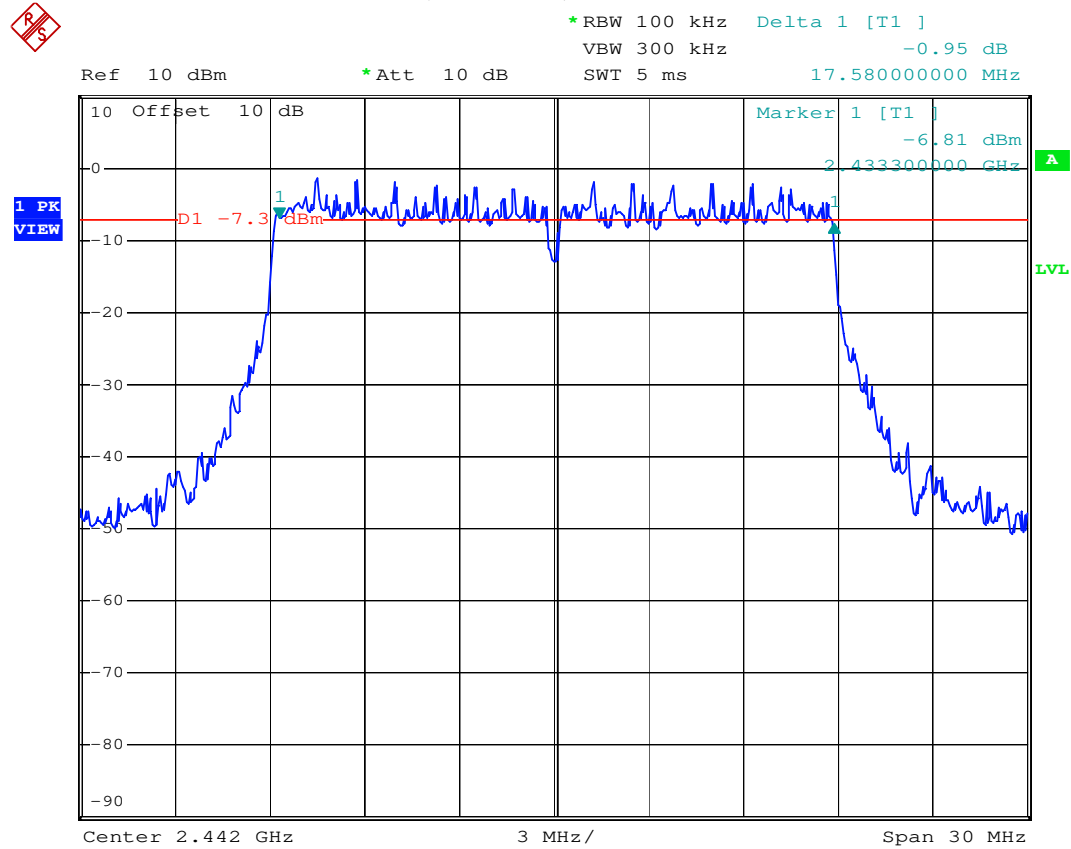


802.11n HT-20/ Channel Mid (Antenna2)


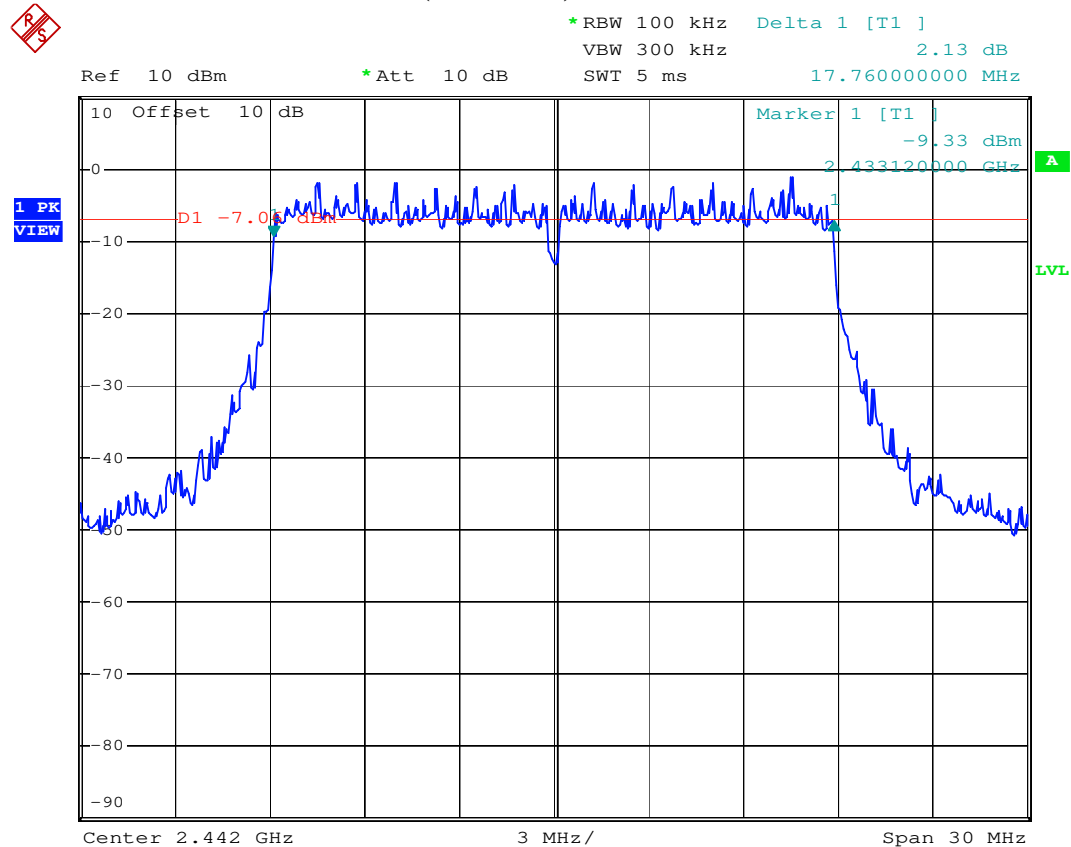




802.11n HT-20/ Channel High (Antenna1)

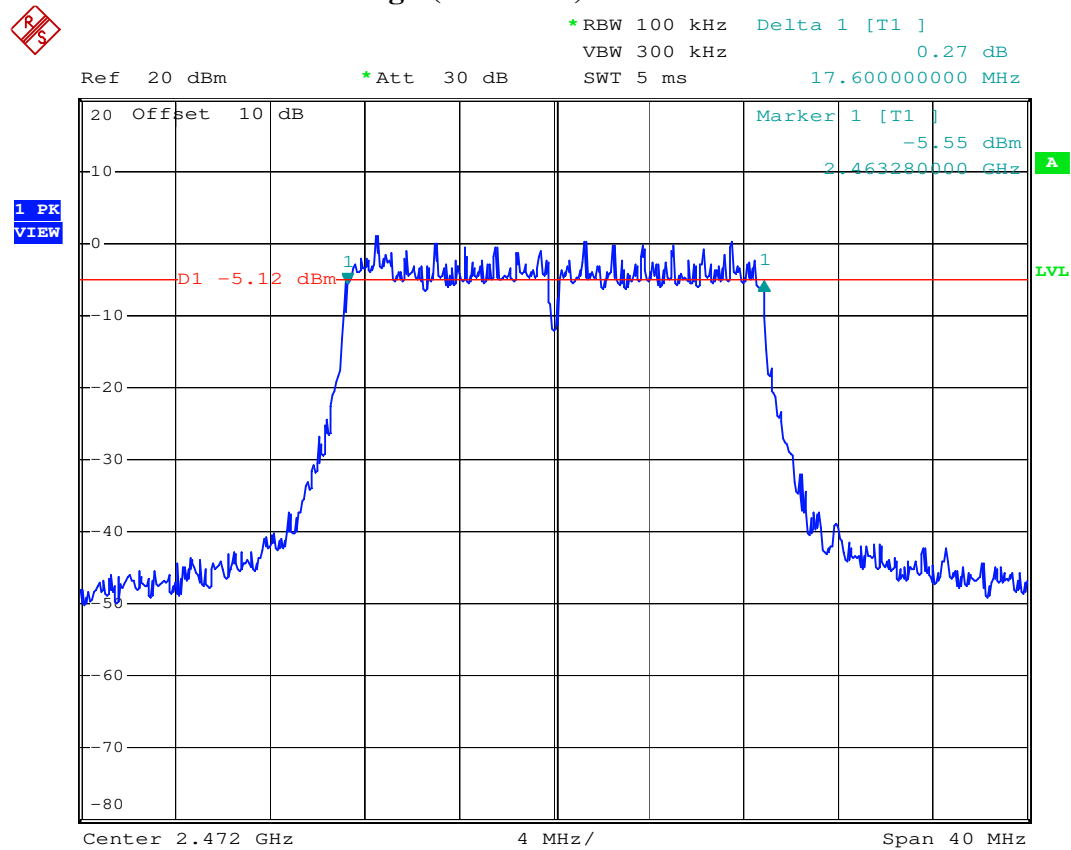


802.11n HT-20/ Channel High (Antenna2)

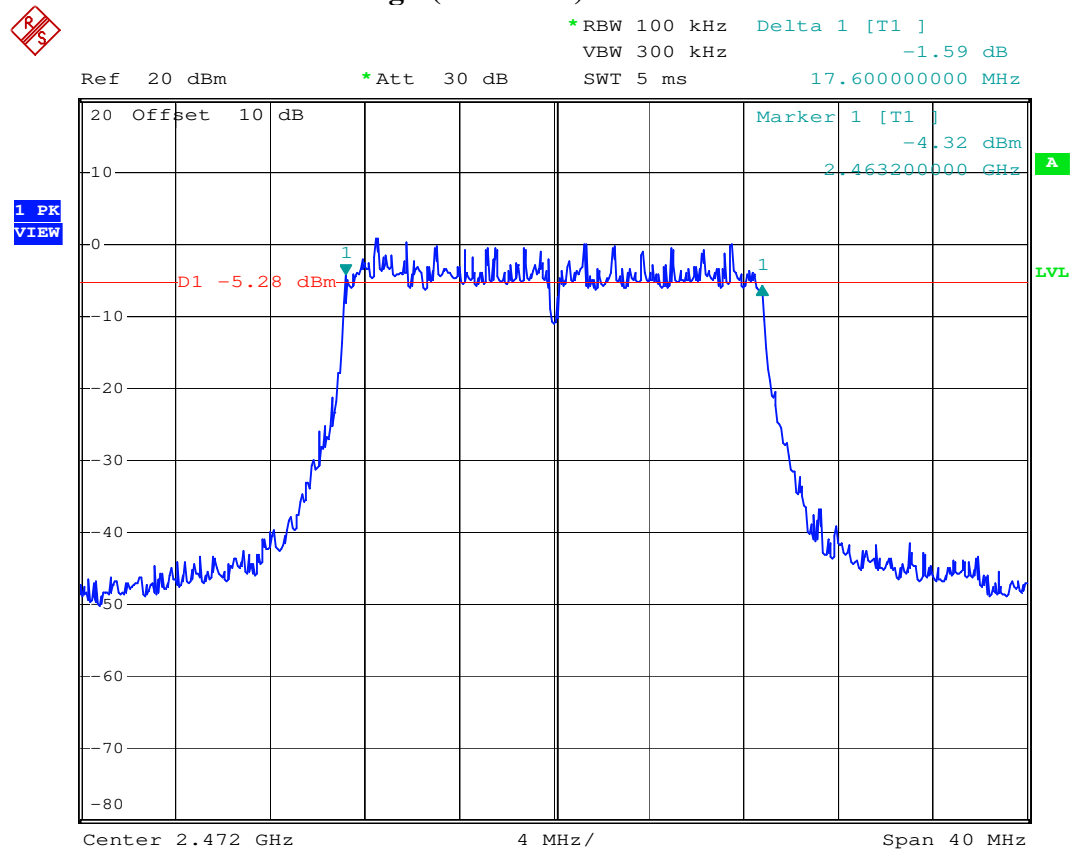

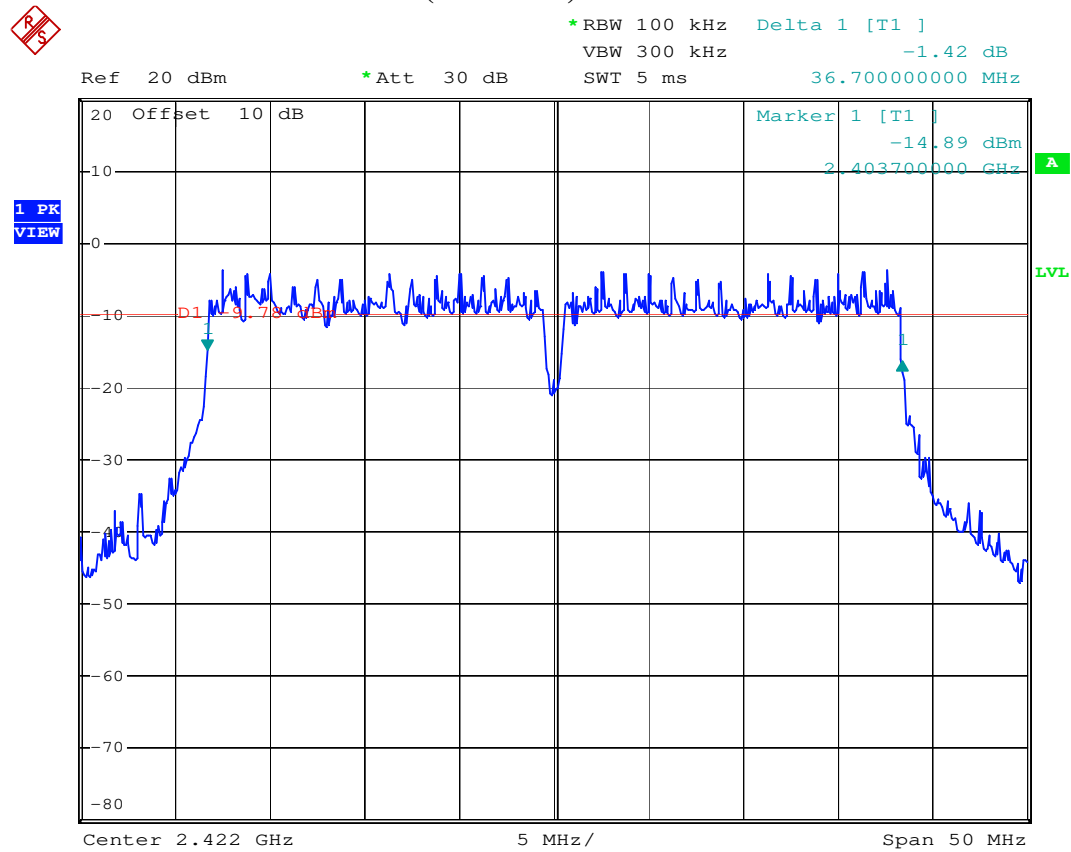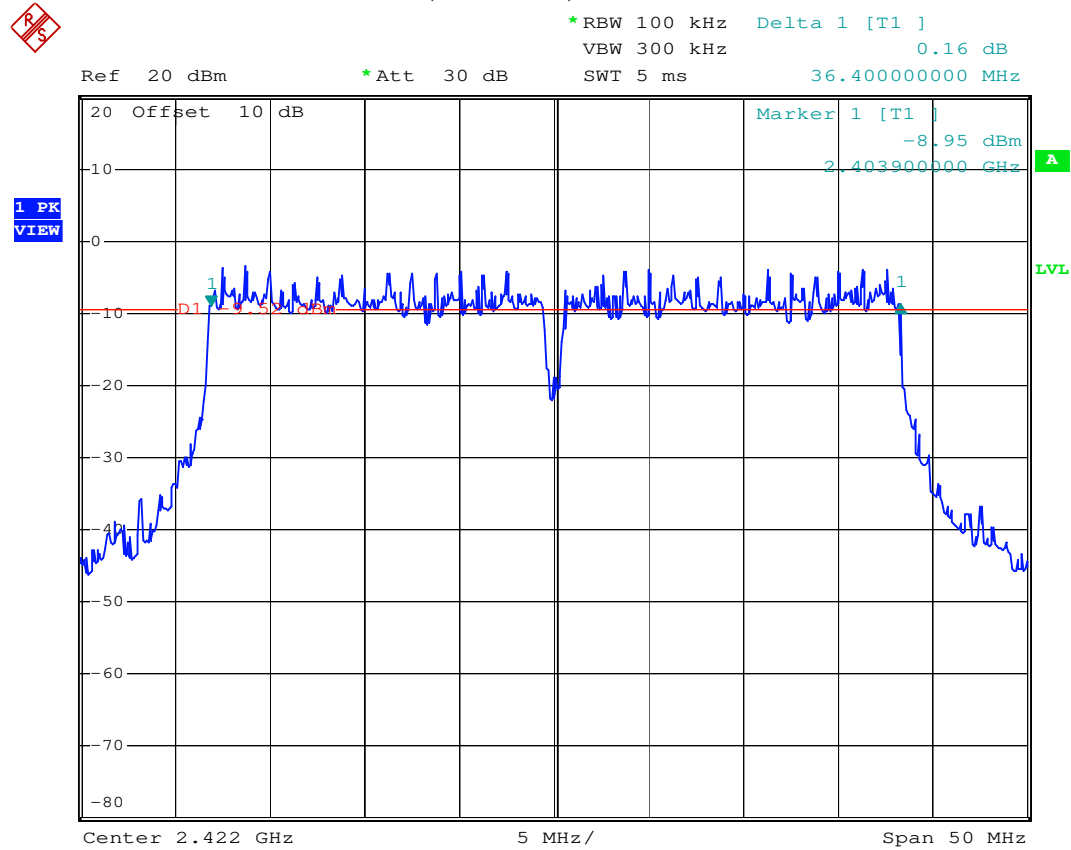
802.11n HT-40/ Channel Low (Antenna1)**802.11n HT-40/ Channel Low (Antenna2)**

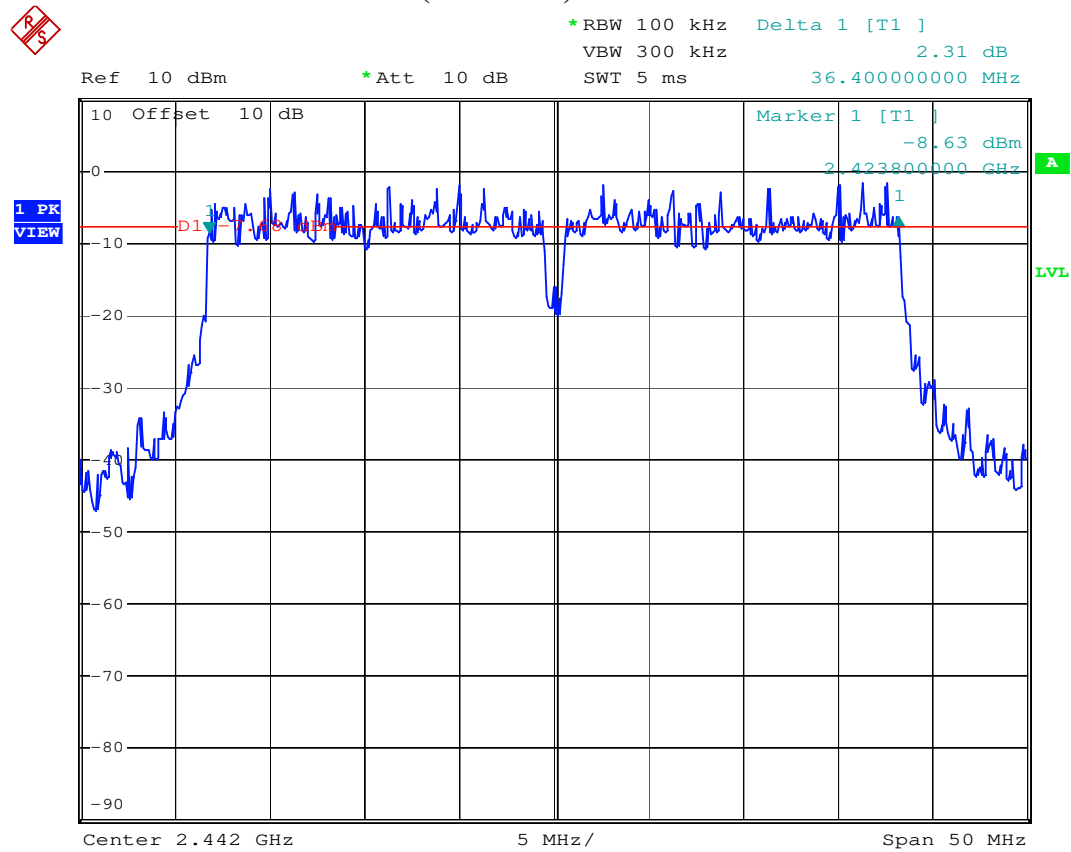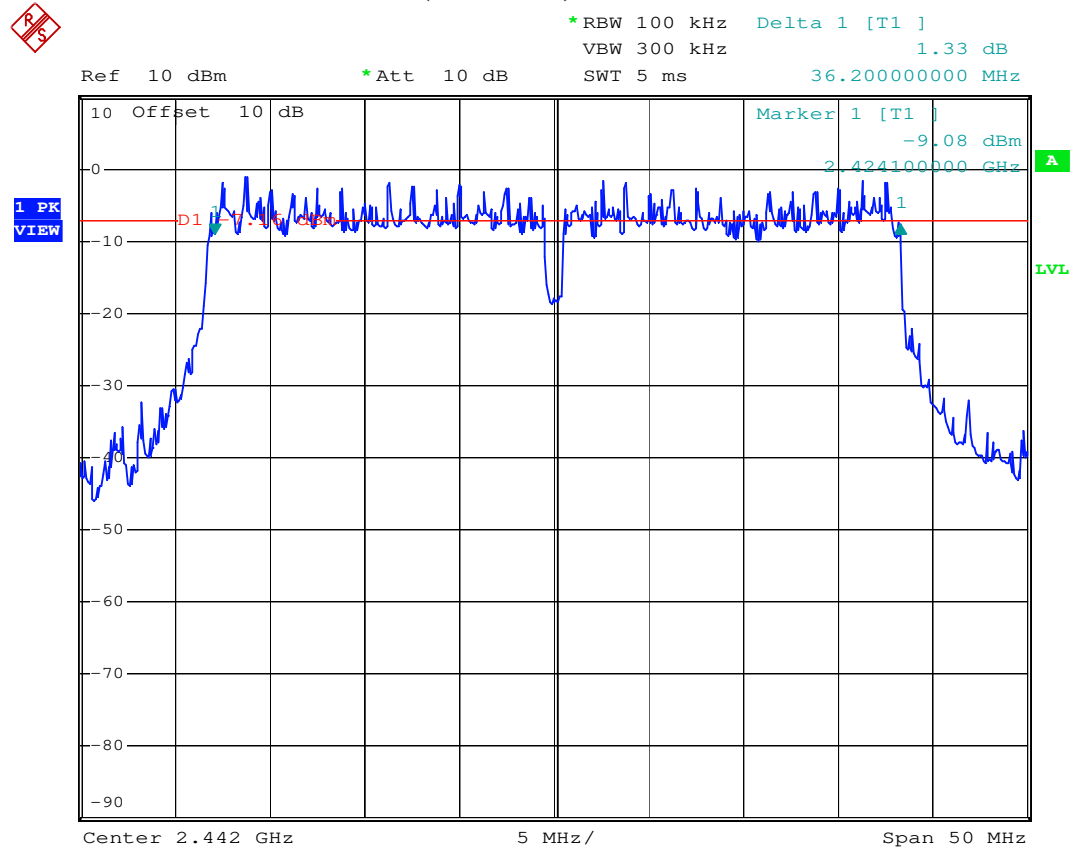802.11n HT-40/ Channel Mid (Antenna1)**802.11n HT-40/ Channel Mid (Antenna2)**

802.11n HT-40/ Channel High (Antenna1)

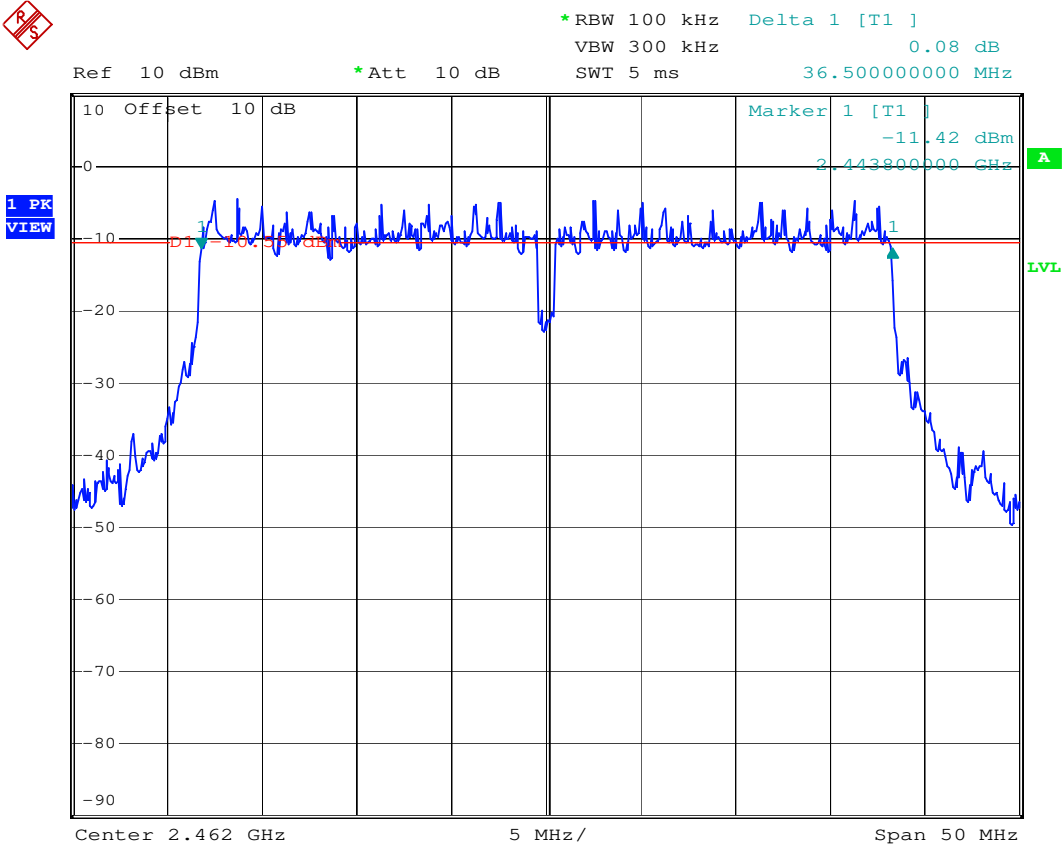

802.11n HT-40/ Channel High (Antenna2)

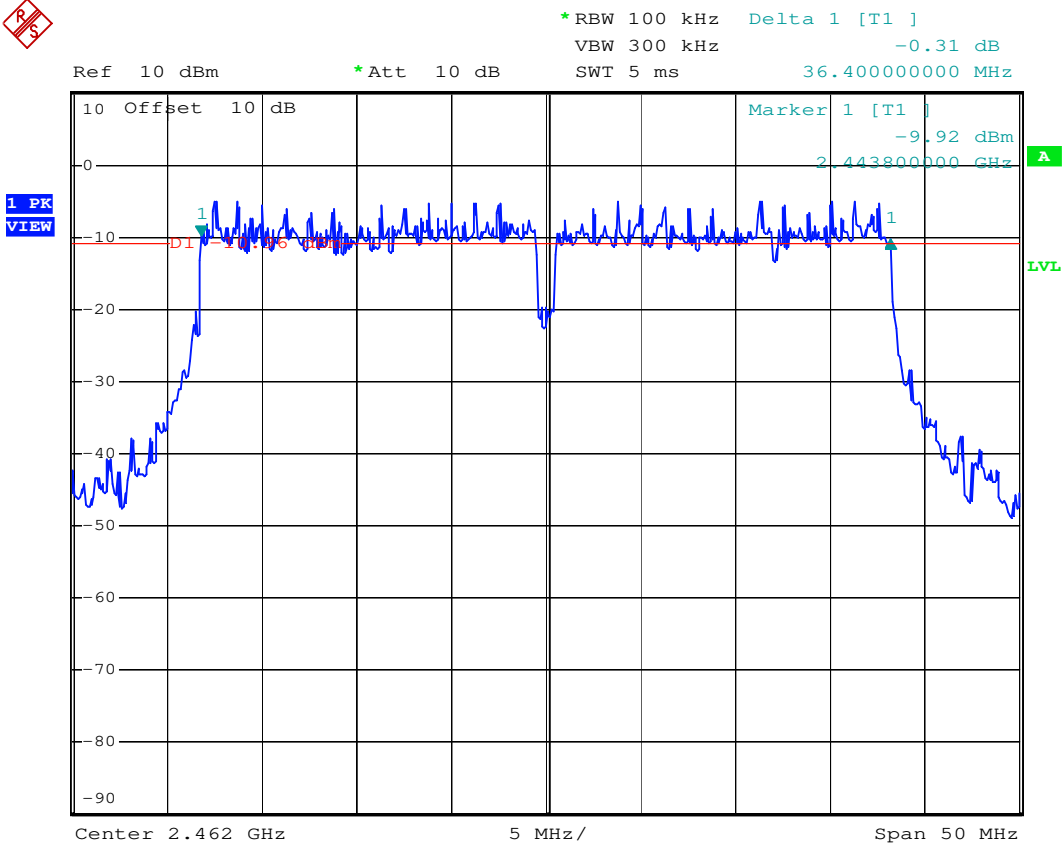

8 OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


8.2 Measurement Procedure

Measurement Procedure:

9.1.2 PKPM1 Peak power meter method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Record the readings on the instrument and add a compensat factor of the attenuator.
4. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
POWER METER +SENSOR	ANRITSU	ML2487A +MA2491A	2018/05/23	2019/05/22
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

8.4 Measurement Data

Test Date : Mar. 11, 2017 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	16.8	47.86301
	Channel Mid:2442MHz	16.57	45.39416
	Channel High:2472MHz	16.35	43.15191

B. 802.11g @6 Mbps

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	15.73	37.41106
	Channel Mid:2442MHz	15.66	36.8129
	Channel High:2472MHz	15.359	34.34788

C. 802.11n HT-20 @6.5 Mbps

Antenna1

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	14.62	28.97344
	Channel Mid:2442MHz	14.521	28.32044
	Channel High:2472MHz	14.35	27.22701

Antenna2

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	14.61	28.9068
	Channel Mid:2442MHz	14.57	28.64178
	Channel High:2472MHz	14.29	26.85344

Total Power (Antenna1+Antenna2)

Output Peak Power		dBm	mW
Operation	Channel Low:2412MHz	17.6252	57.880
	Channel Mid:2442MHz	17.5558	56.962
	Channel High:2472MHz	17.3303	54.080

D. 802.11n HT-40 @13.5 Mbps**Antenna1**

Output Peak Power		dBm	mW
Operation	Channel Low:2422MHz	14.57	28.64178
	Channel Mid:2442MHz	14.52	28.31392
	Channel High:2462MHz	14.41	27.60578

Antenna2

Output Peak Power		dBm	mW
Operation	Channel Low:2422MHz	14.39	27.47894
	Channel Mid:2442MHz	14.34	27.16439
	Channel High:2462MHz	14.29	26.85344

Total Power (Antenna1+Antenna2)

Output Peak Power		dBm	mW
Operation	Channel Low:2422MHz	17.4912	56.1207
	Channel Mid:2442MHz	17.4412	55.4783
	Channel High:2462MHz	17.3607	54.4592

Note : The expanded uncertainty: 2dB.

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100kHz and VBW to 1 MHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/11/02	2018/11/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

9.4 Measurement Data

Test Date : May 23, 2018 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

B. 802.11g @6 Mbps

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

C. 802.11n HT-20 @6.5 Mbps



- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

D. 802.11n HT-40 @13.5 Mbps



- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.



Note : The expanded uncertainty: 2dB.



802.11b

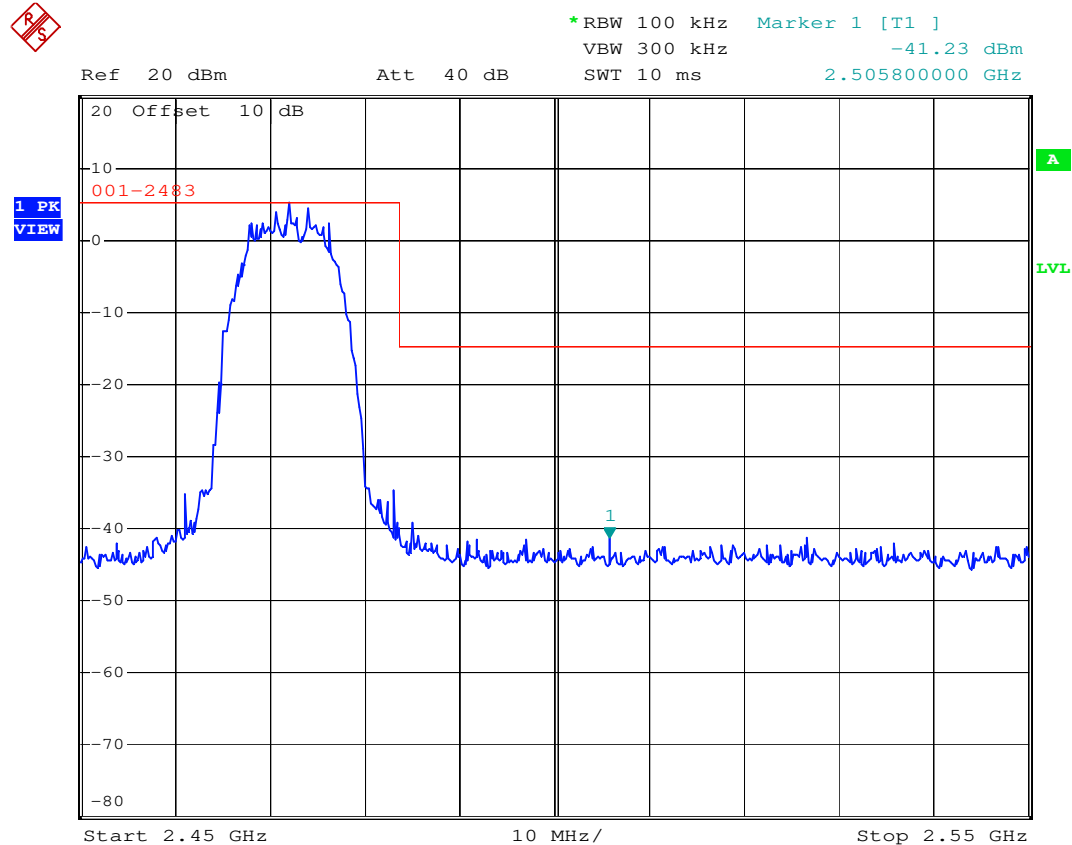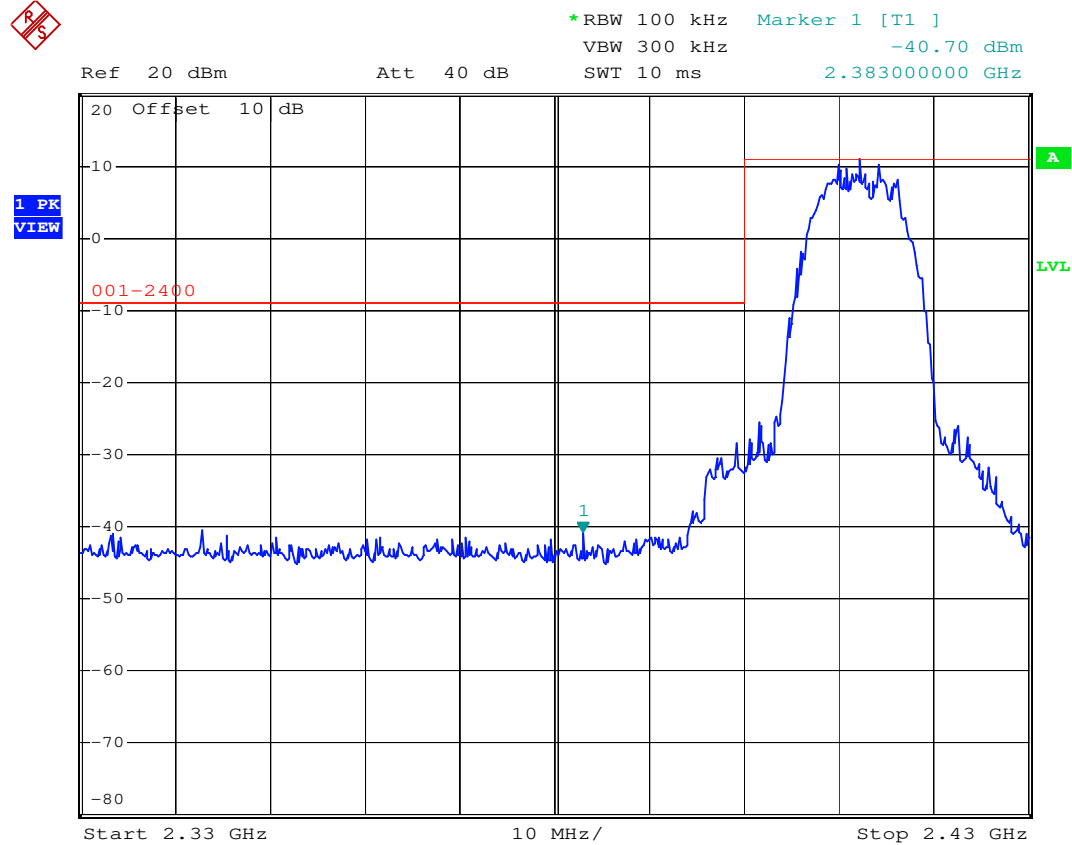



802.11g

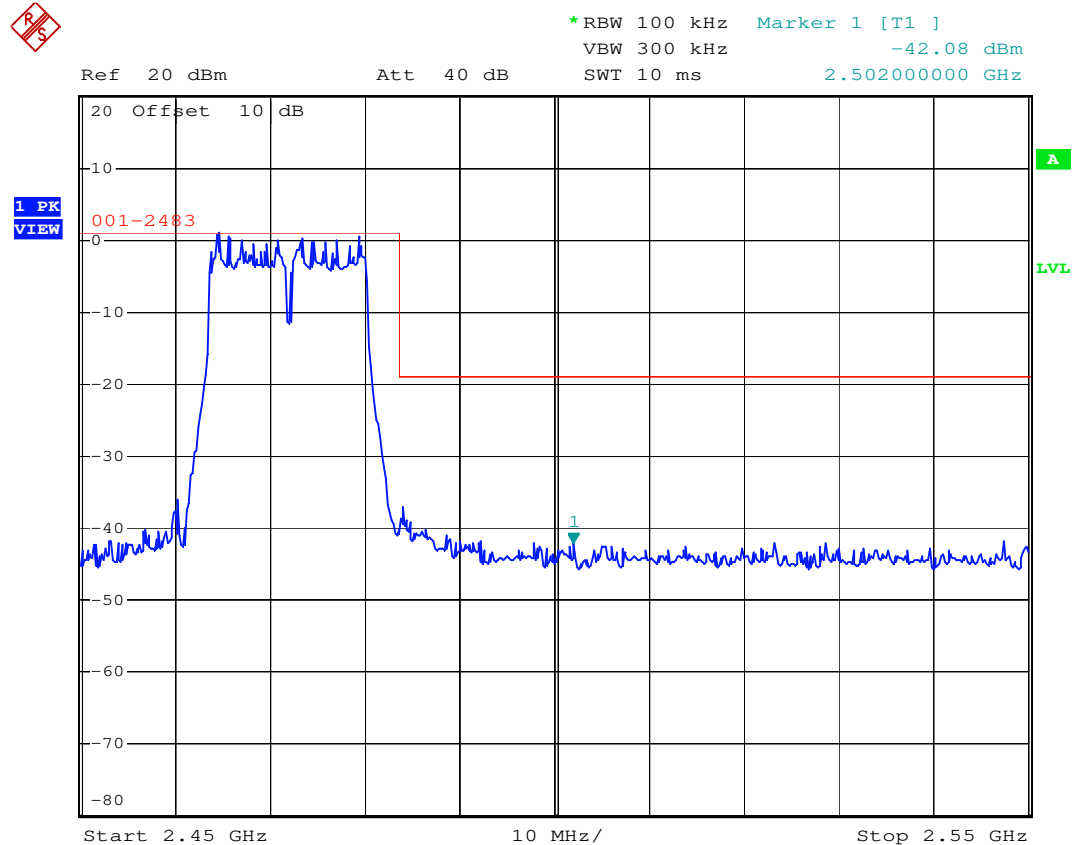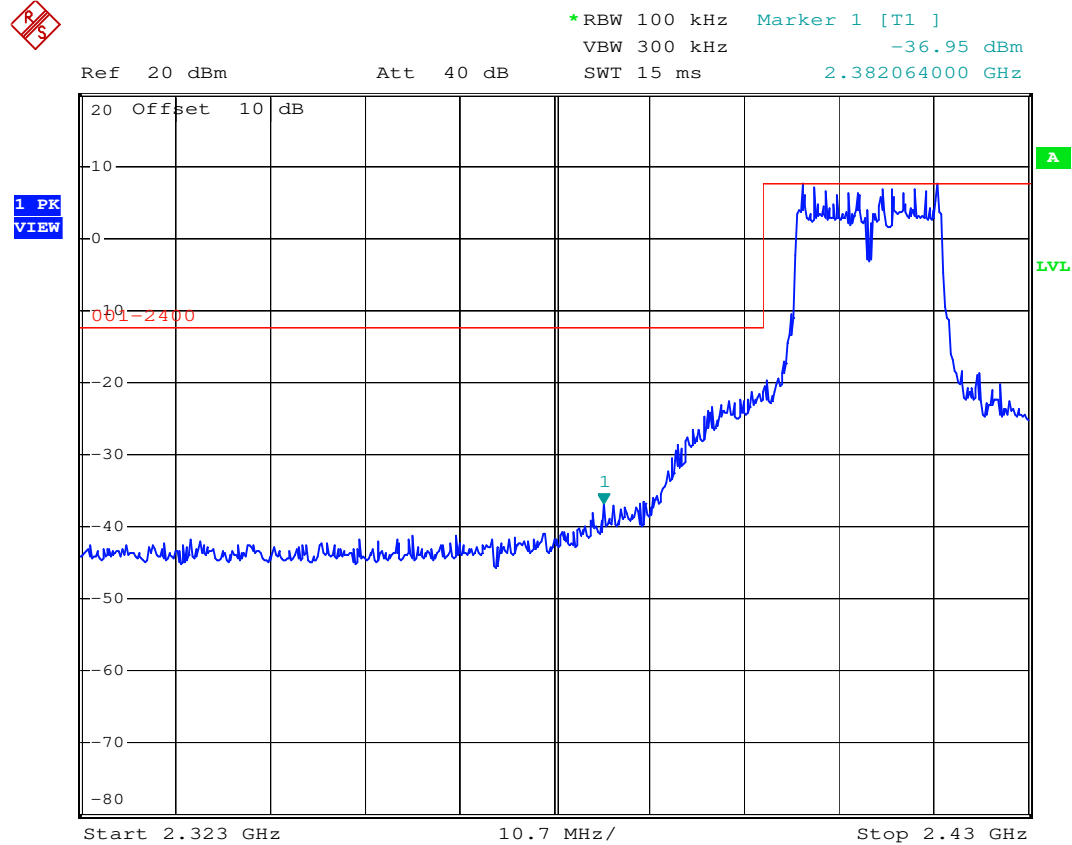

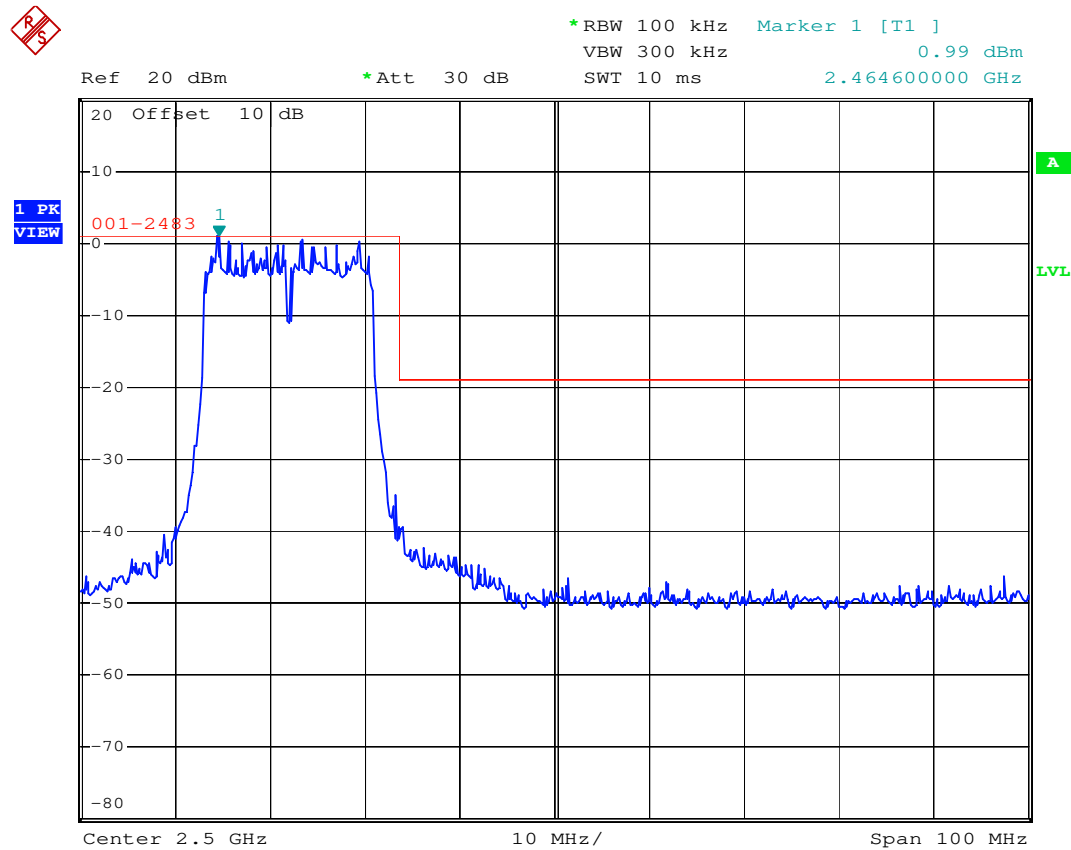
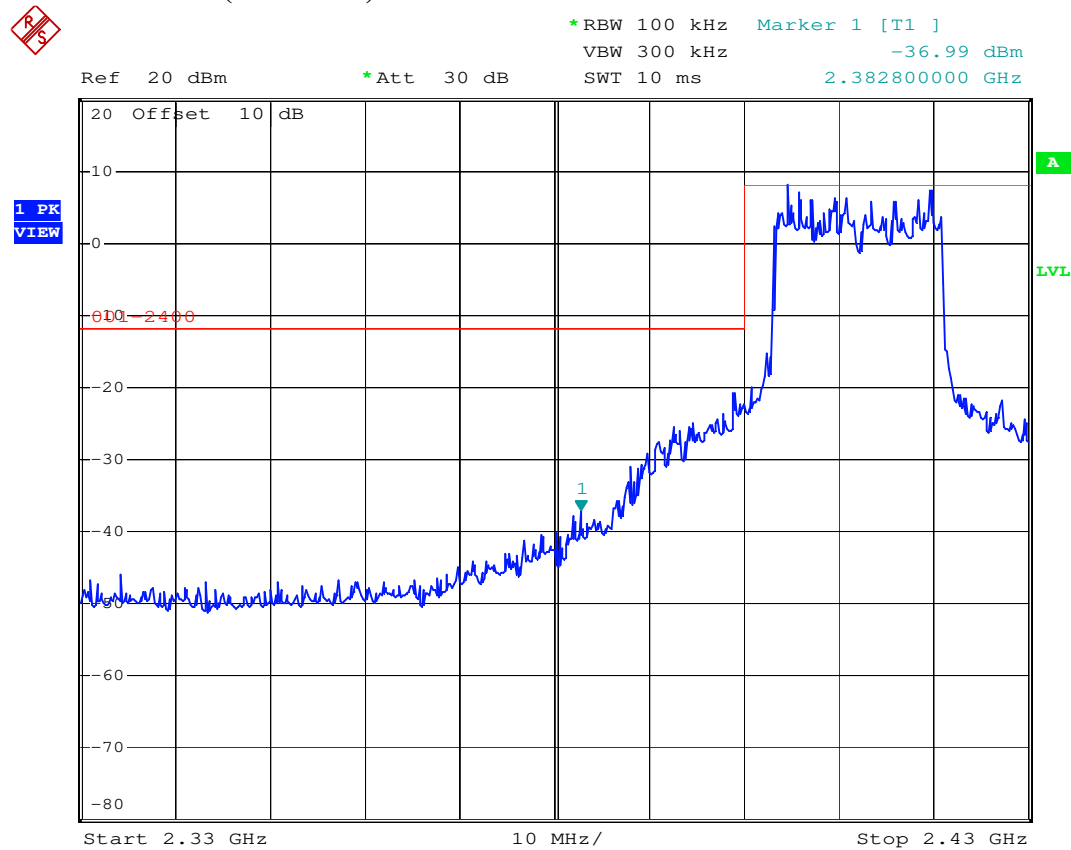
802.11n HT-20 (Antenna1)

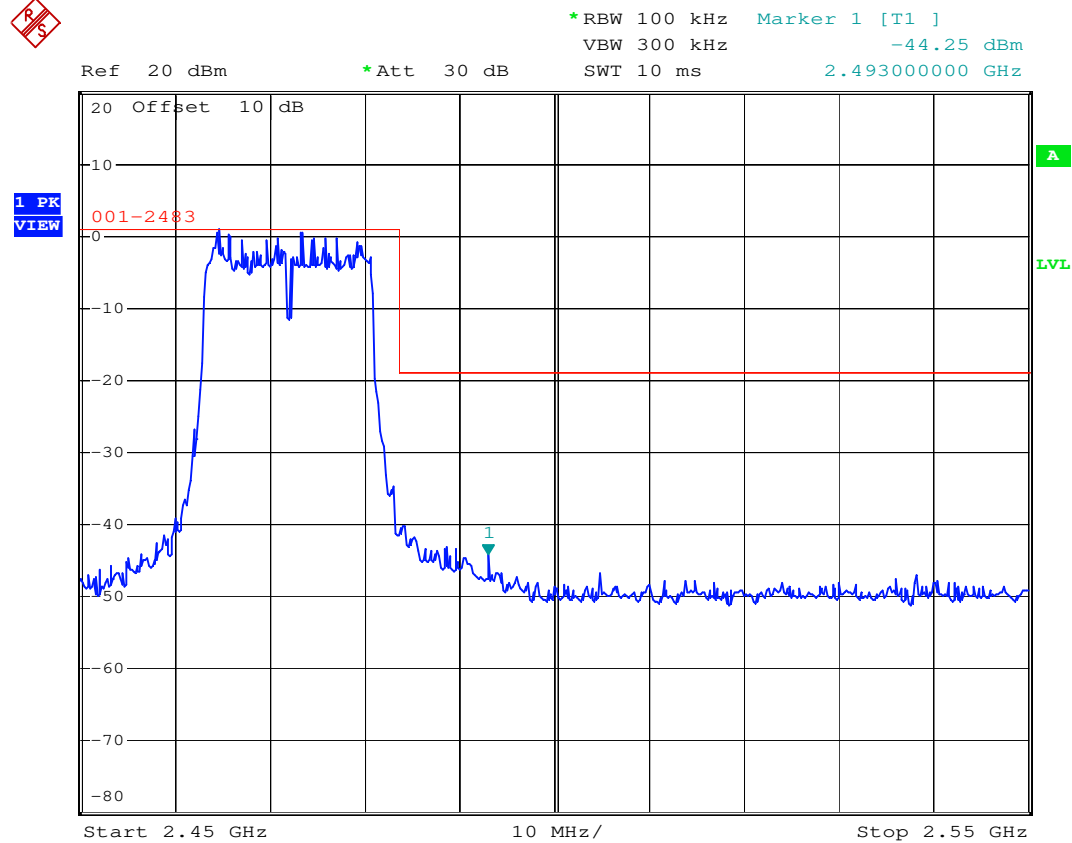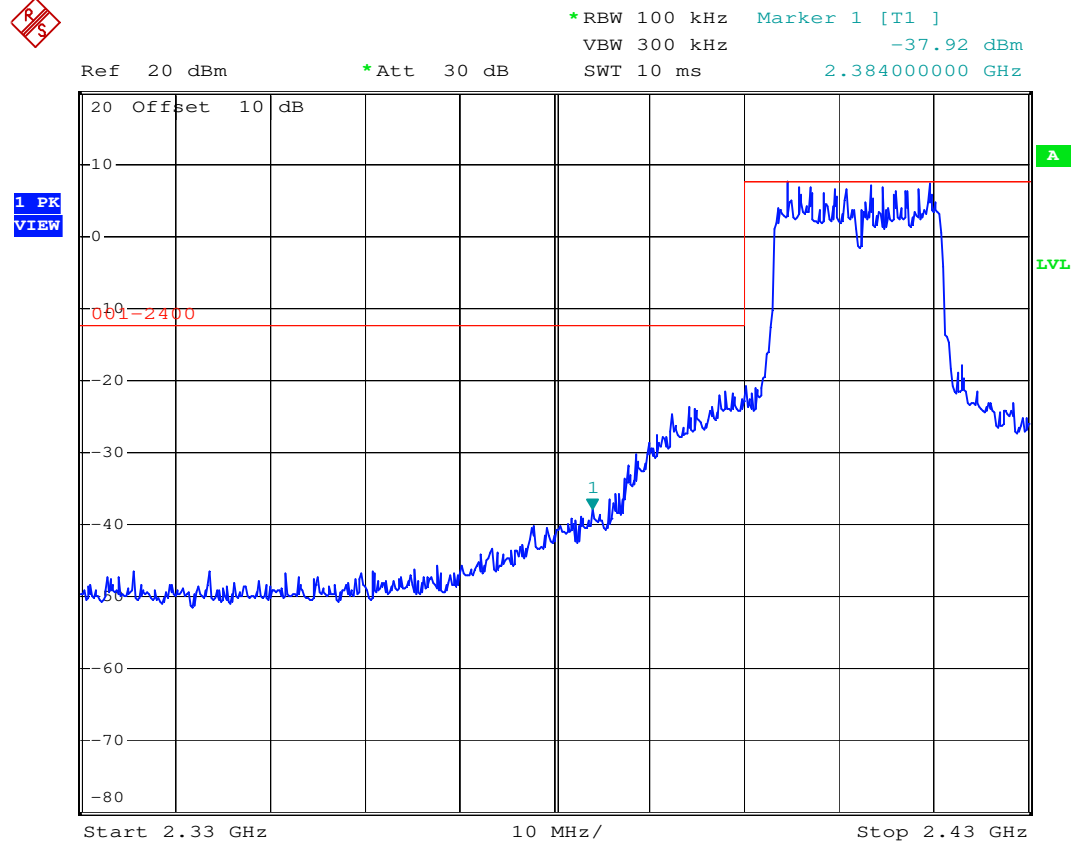802.11n HT-20 (Antenna2)

802.11n HT-40 (Antenna1)

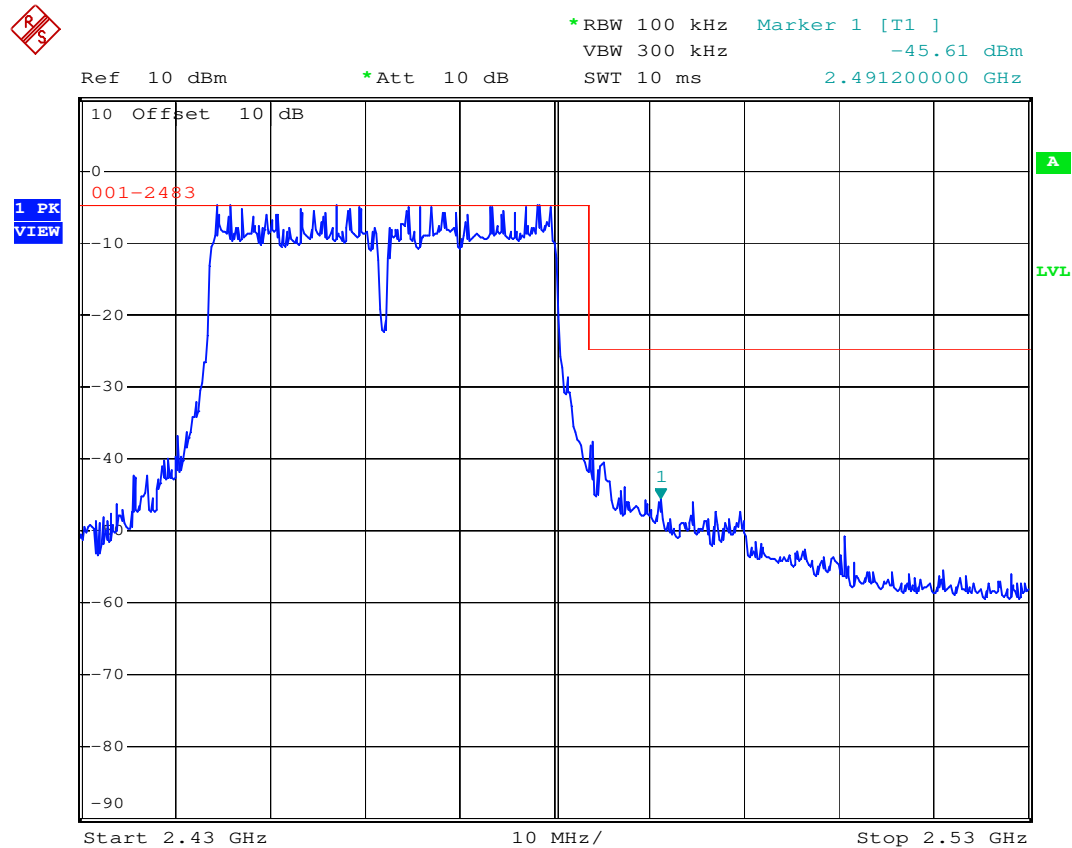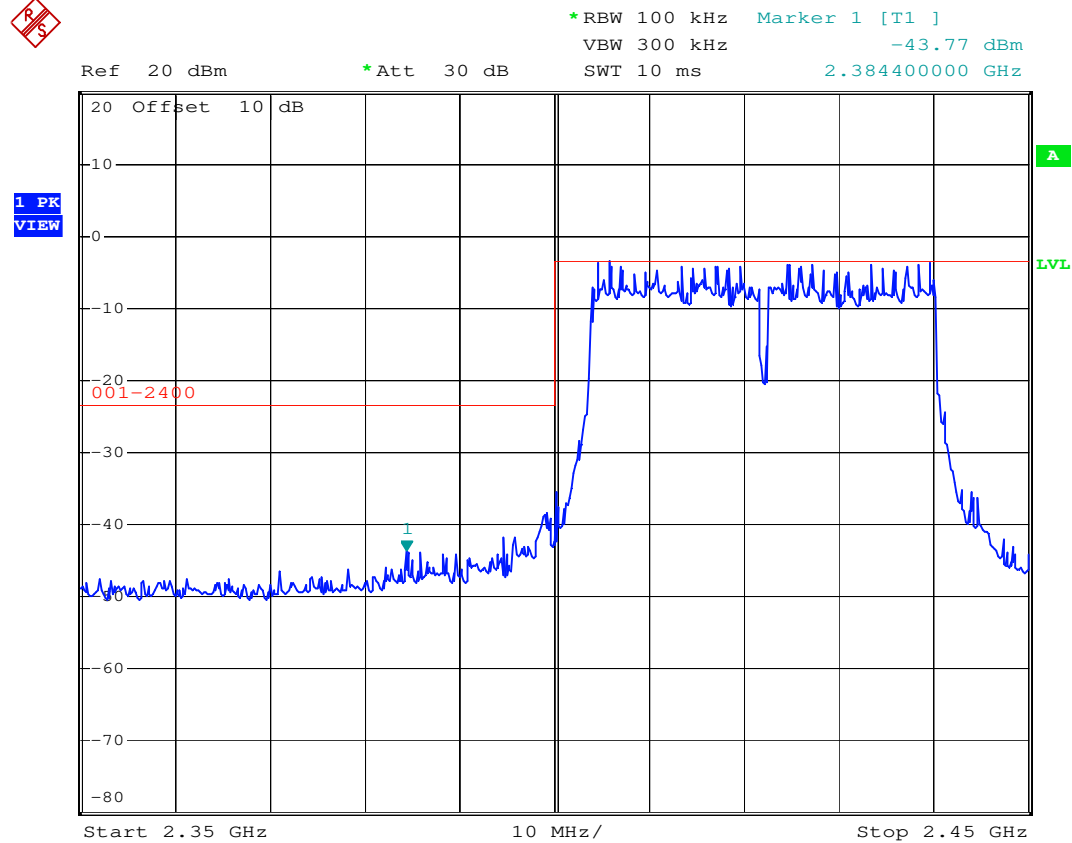

802.11n HT-40 (Antenna2)

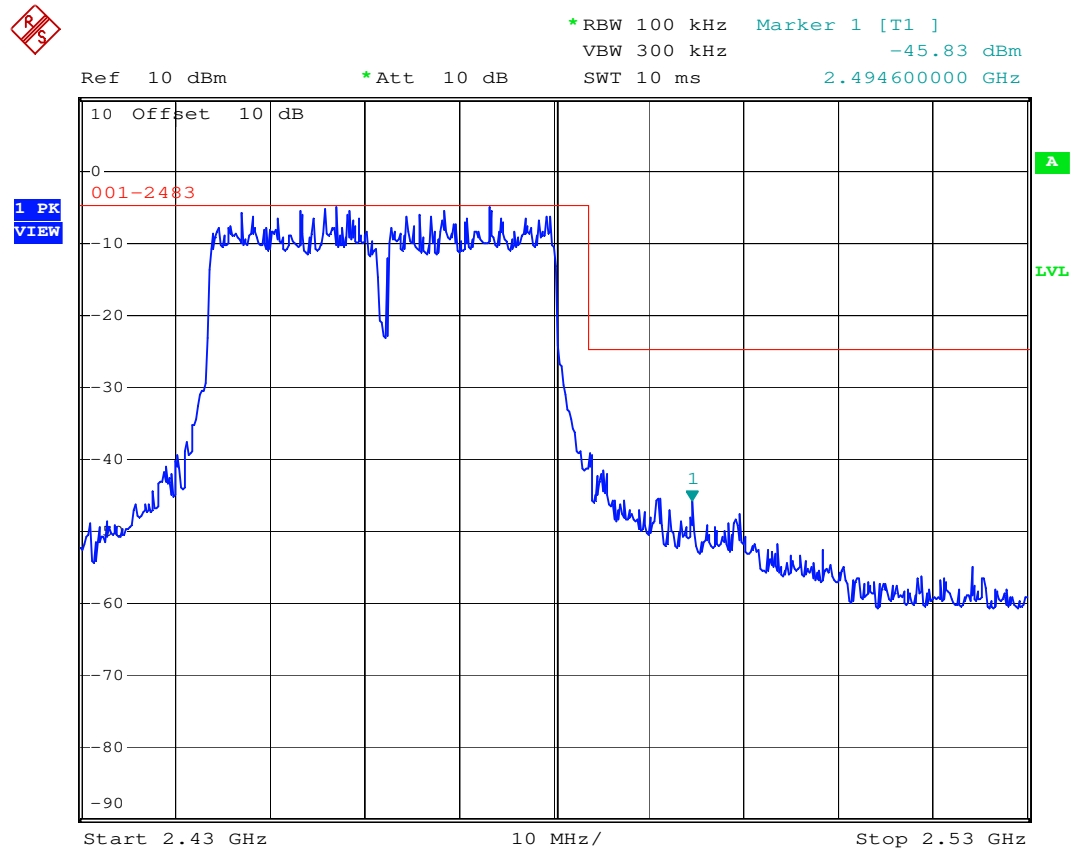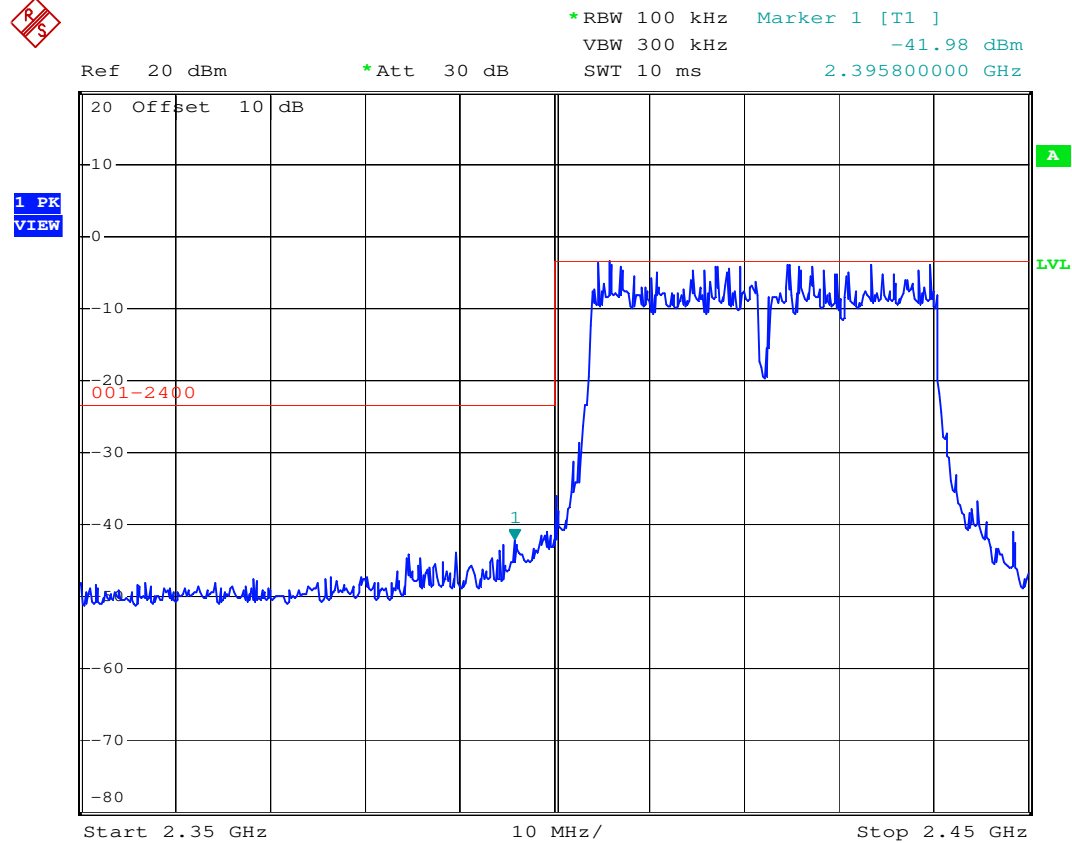

10 POWER DENSITY MEASUREMENT

10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

10.2 Measurement Procedure

Measurement Method: PKPSD

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
6. Set the VBW $\geq 3 \times \text{RBW}$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
13. Repeat above procedures until all measured frequencies were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/11/02	2018/11/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

10.4 Measurement Data

Test Date : May. 23, 2018 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

- a) Channel Low: Maximun PSD is -3.93 dBm
- b) Channel Mid: Maximun PSD is -12.16 dBm
- c) Channel High: Maximun PSD is -9.79 dBm

B. 802.11g @6 Mbps

- a) Channel Low: Maximun PSD is -8.00 dBm
- b) Channel Mid: Maximun PSD is -18.90 dBm
- c) Channel High: Maximun PSD is -15.89 dBm

C. 802.11n HT-20 @6.5 Mbps

Antenna1

- a) Channel Low: Maximun PSD is -9.26 dBm
- b) Channel Mid: Maximun PSD is -18.08 dBm
- c) Channel High: Maximun PSD is -16.26 dBm

Antenna2

- a) Channel Low: Maximun PSD is -9.87 dBm
- b) Channel Mid: Maximun PSD is -18.22 dBm
- c) Channel High: Maximun PSD is -16.59 dBm

TX Chain	Chan. Freq.(MHz)	PSD Reading (dBm)	Factor $10 \log (N_{ANT})$ (N=2)	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	2412	-9.26	3.01	-12.27	8.00	Pass
	2442	-18.08	3.01	-21.09	8.00	Pass
	2472	-16.26	3.01	-19.27	8.00	Pass
1	2412	-9.87	3.01	-12.88	8.00	Pass
	2442	-18.22	3.01	-21.23	8.00	Pass
	2472	-16.59	3.01	-19.6	8.00	Pass

D. 802.11n HT-40 @13.5 Mbps**Antenna1**

- a) Channel Low: Maximun PSD is -22.36 dBm
- b) Channel Mid: Maximun PSD is -19.36 dBm
- c) Channel High: Maximun PSD is -22.41 dBm


Antenna2


- a) Channel Low: Maximun PSD is -21.13 dBm
- b) Channel Mid: Maximun PSD is -17.60 dBm
- c) Channel High: Maximun PSD is -22.36 dBm

TX Chain	Chan. Freq.(MHz)	PSD Reading (dBm)	Factor $10 \log (N_{ANT})$ (N=2)	Total PSD (dBm)	Limit (dBm)	Pass/Fail
0	2422	-22.36	3.01	-25.37	8.00	Pass
	2442	-19.36	3.01	-22.37	8.00	Pass
	2462	-22.41	3.01	-25.42	8.00	Pass
1	2422	-21.13	3.01	-24.14	8.00	Pass
	2442	-17.60	3.01	-20.61	8.00	Pass
	2462	-22.36	3.01	-25.37	8.00	Pass


Note : The expanded uncertainty: 2dB.


802.11b / Channel Low

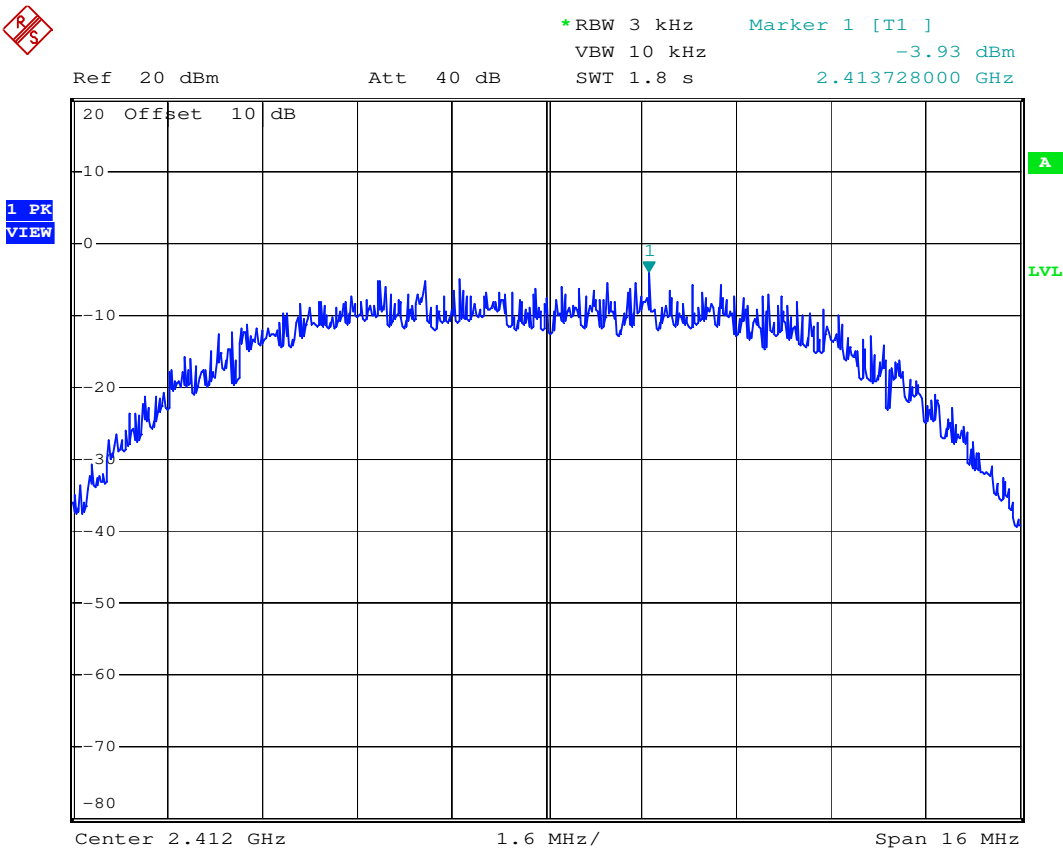

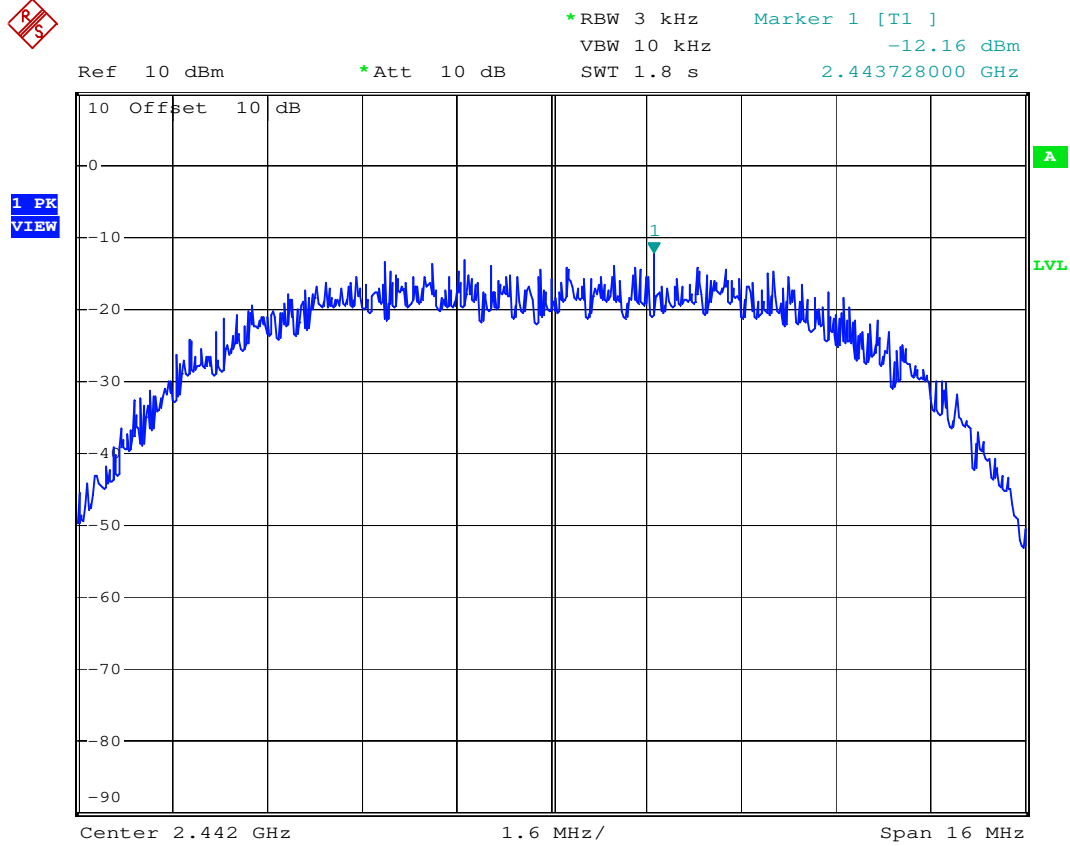
802.11b / Channel Mid


802.11b / Channel High

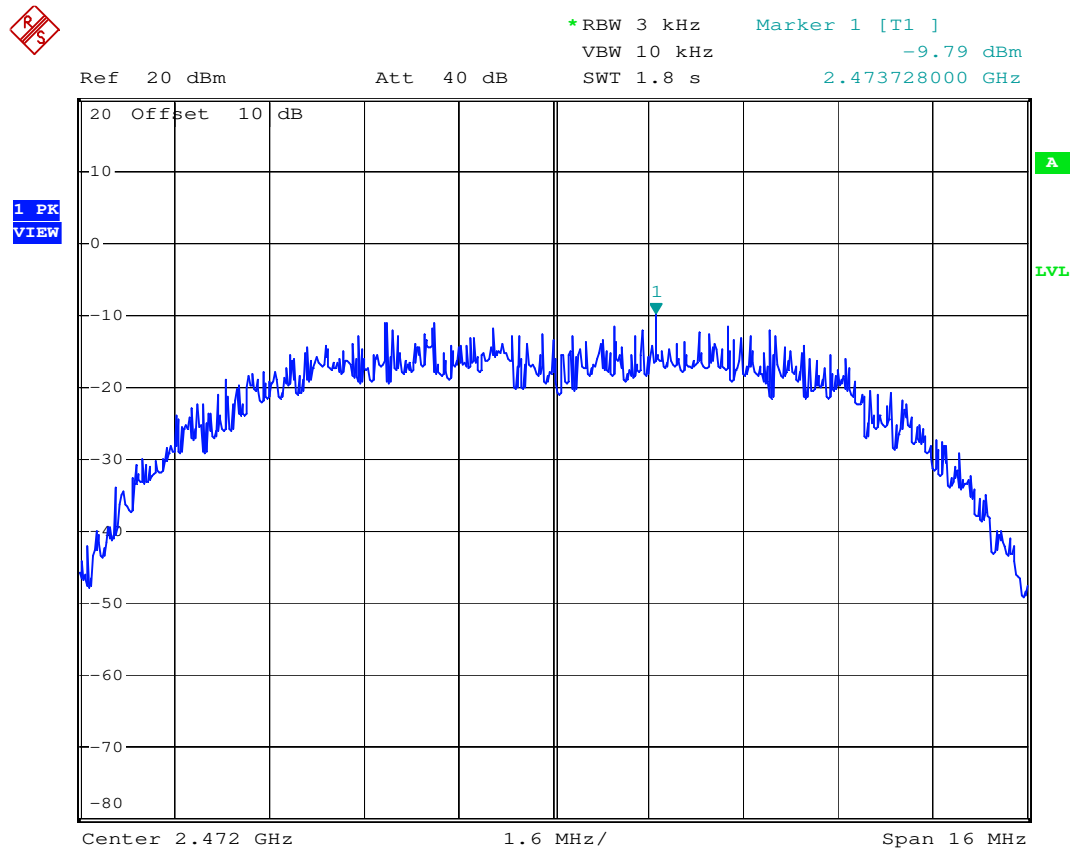

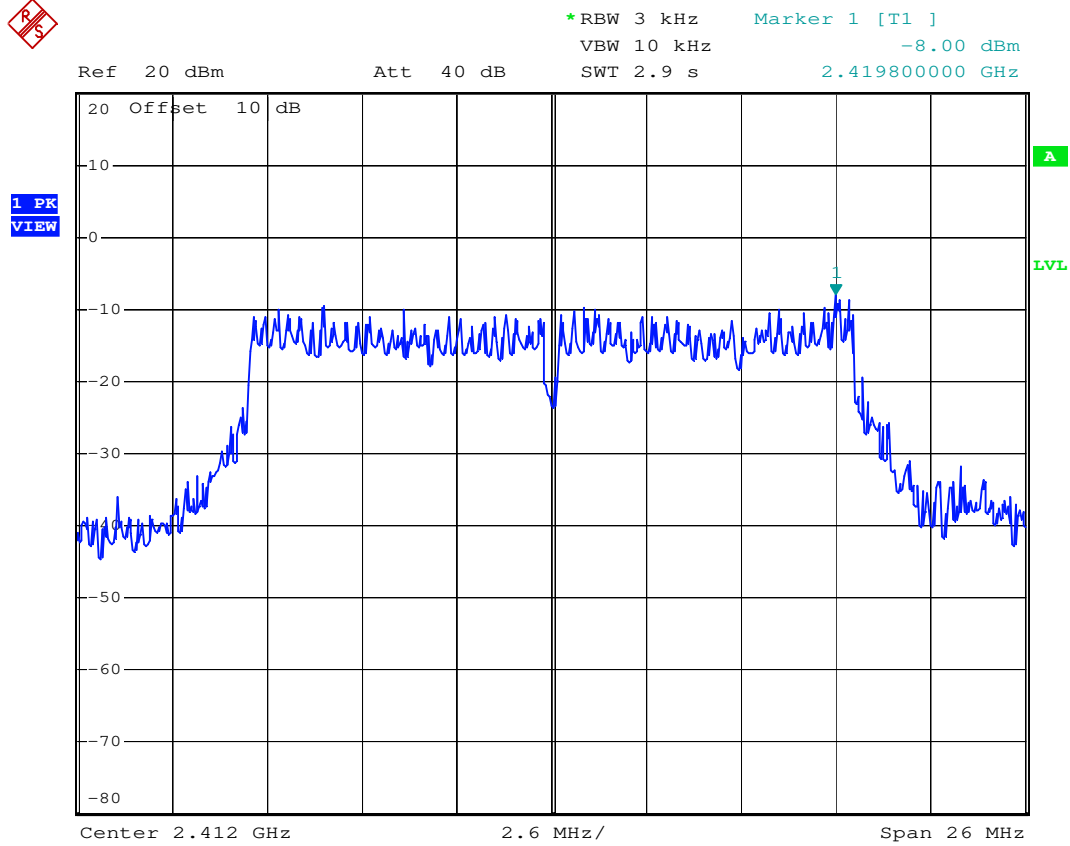802.11g / Channel Low


802.11g / Channel Mid

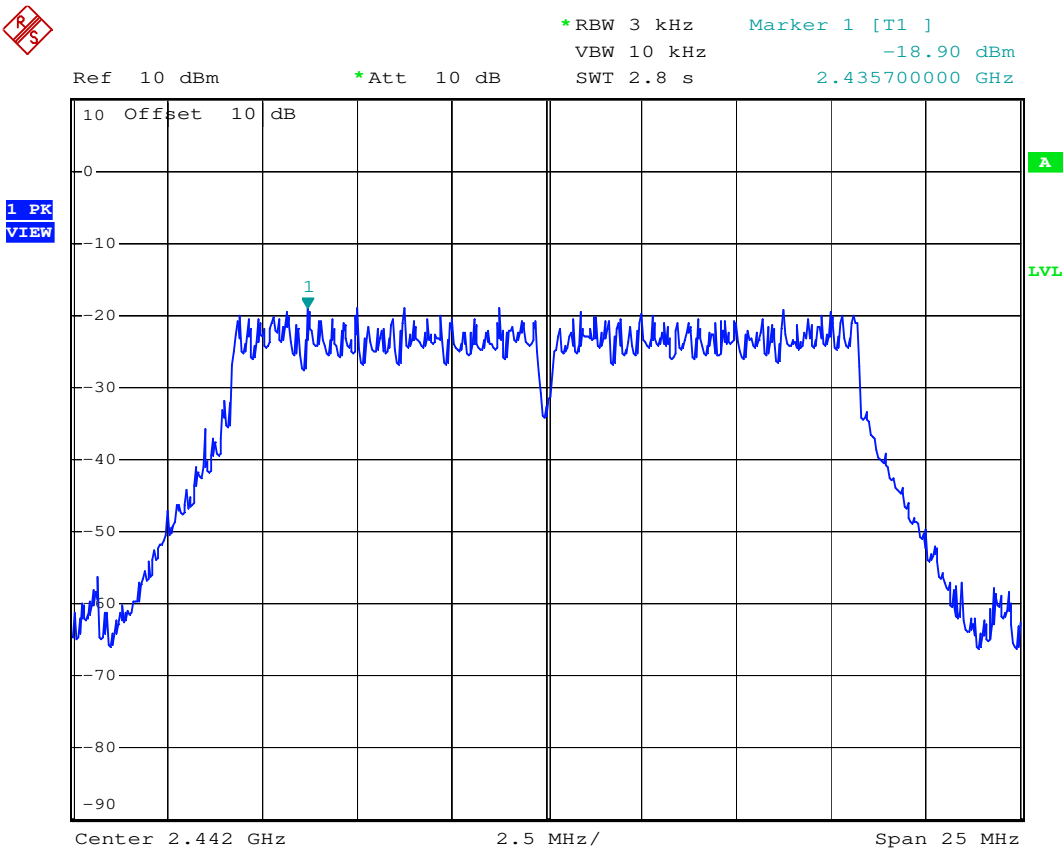

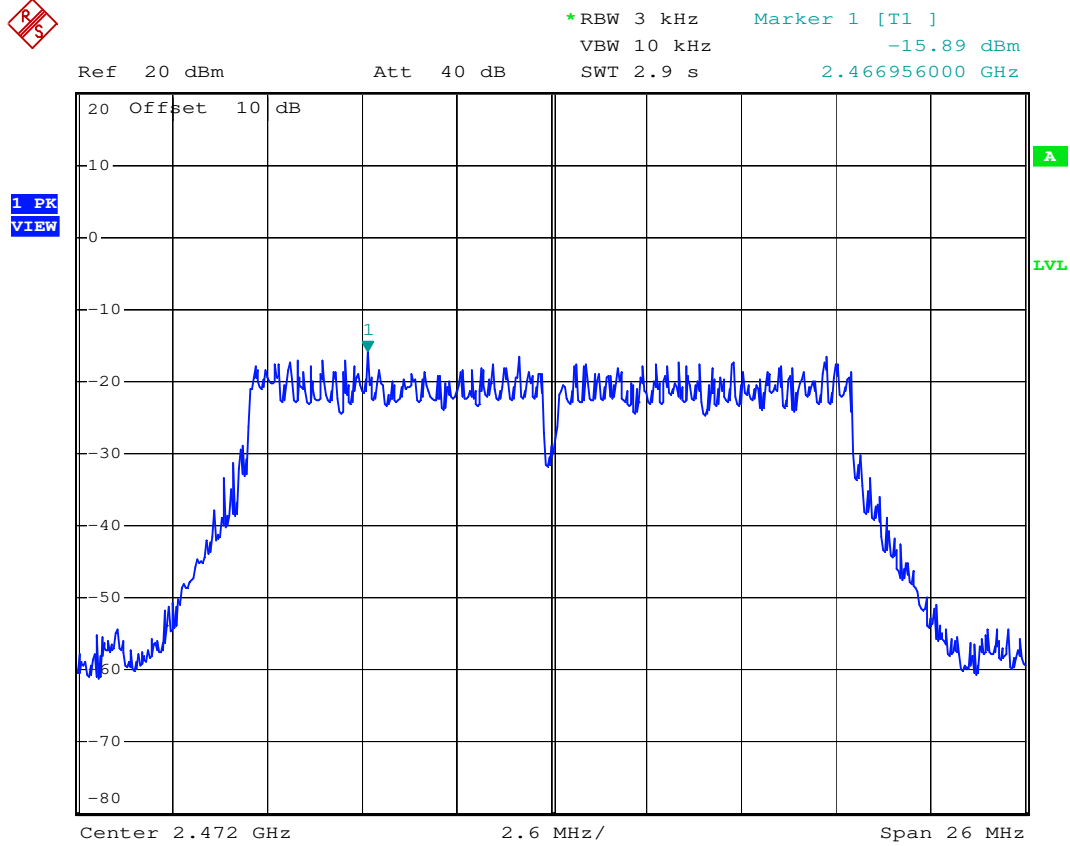
802.11g / Channel High

802.11n HT-20/Channel Low

Antenna1

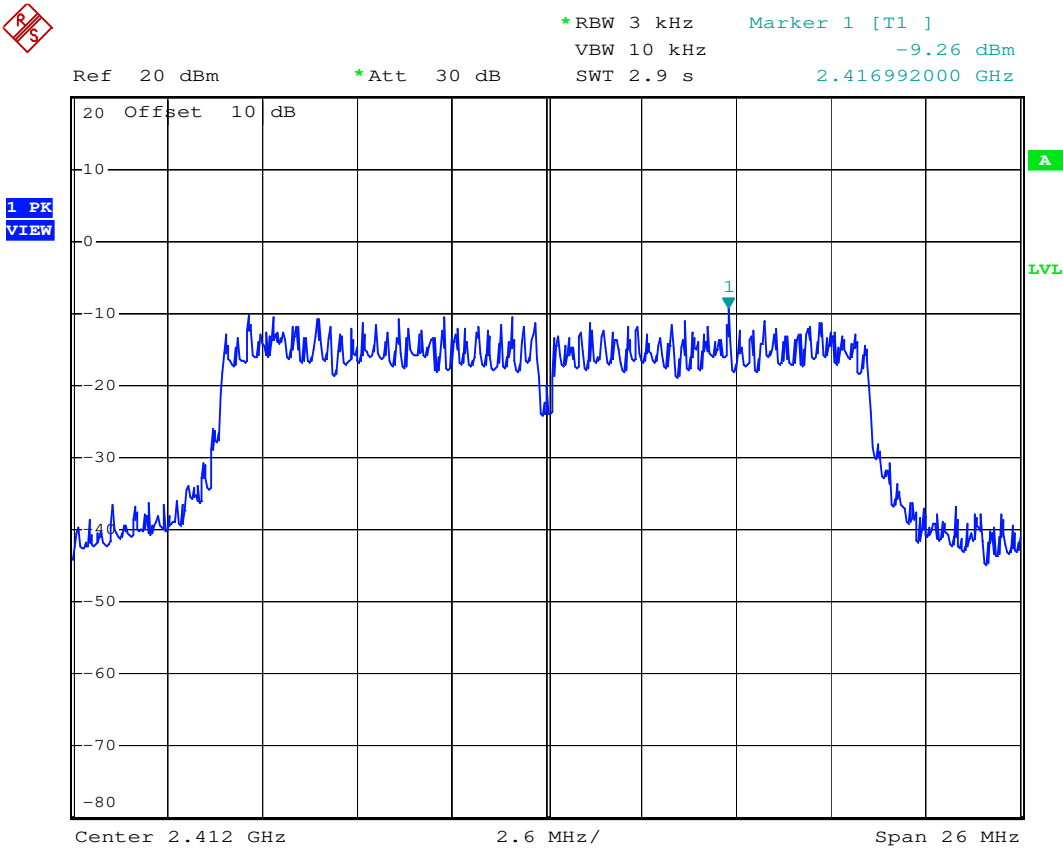


Antenna2

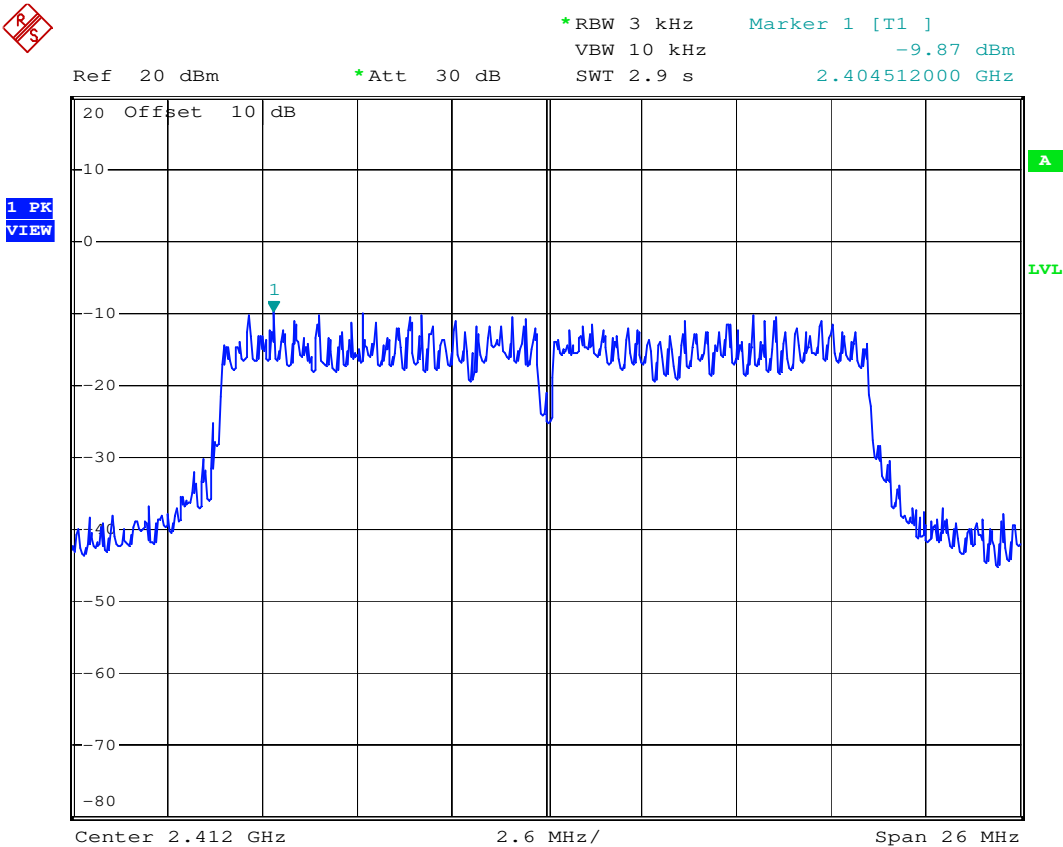




802.11n HT-20/ Channel Mid



Antenna1

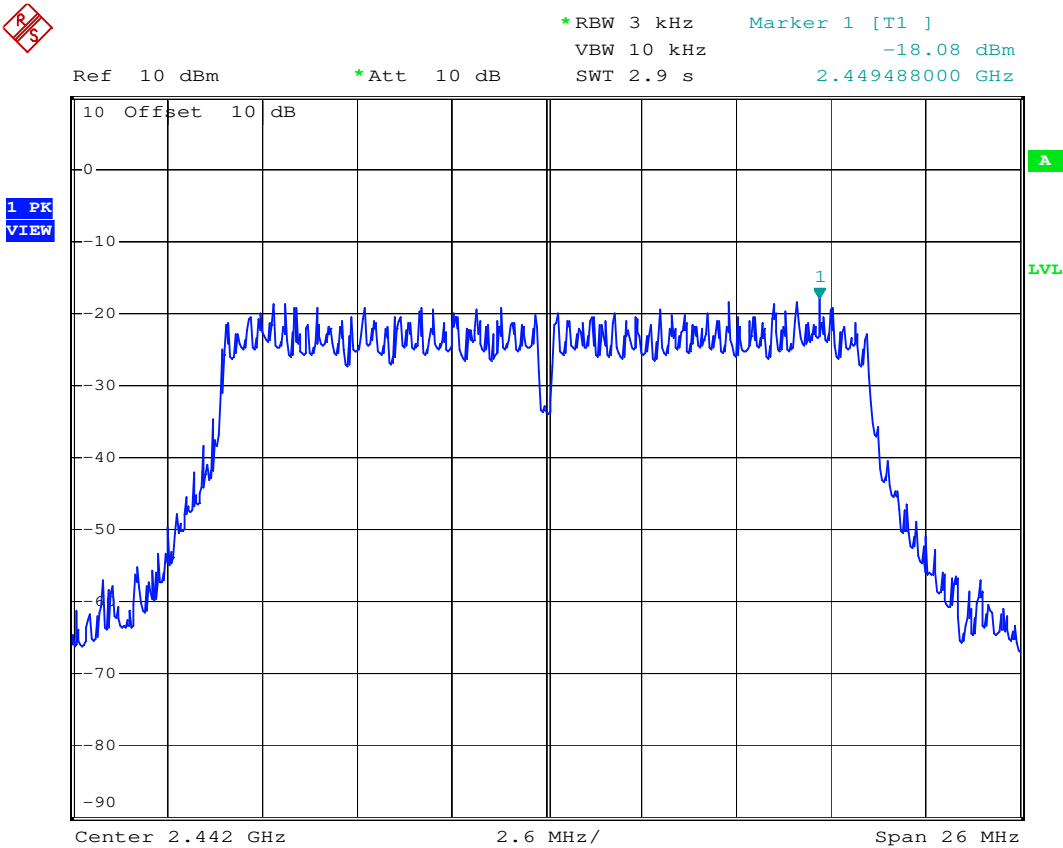

Antenna2

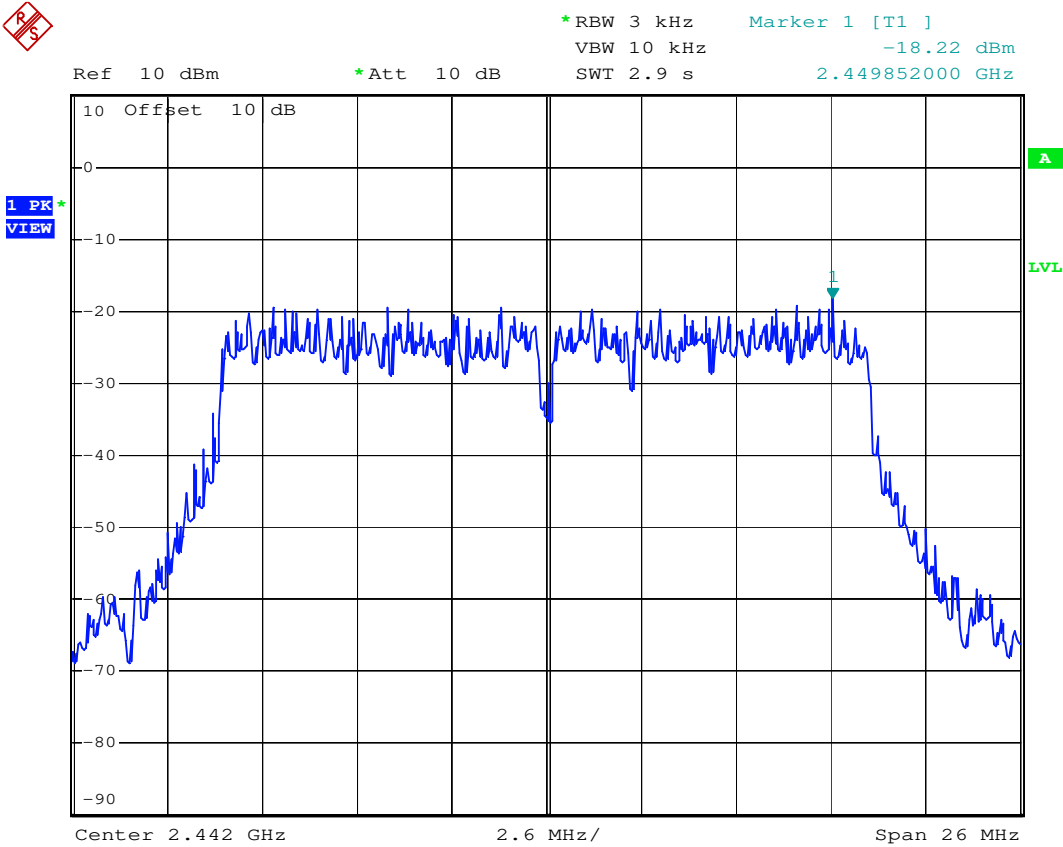


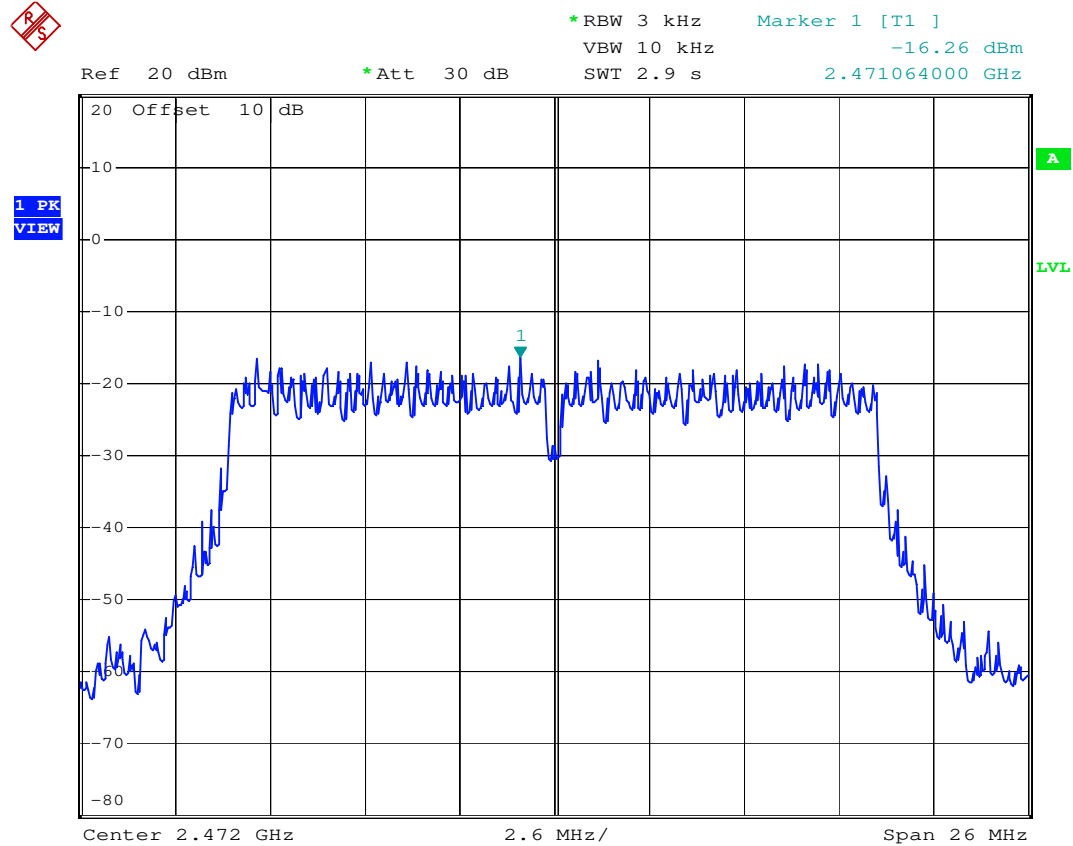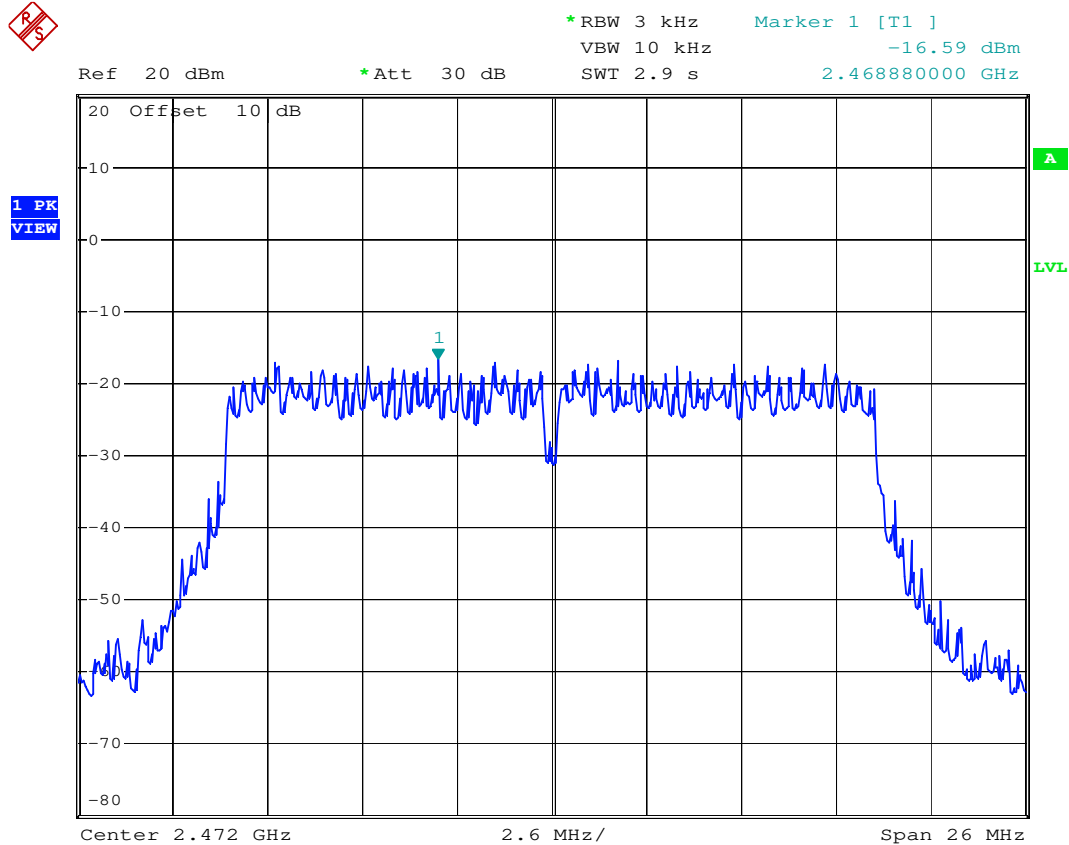802.11n HT-20/ Channel High**Antenna1****Antenna2**

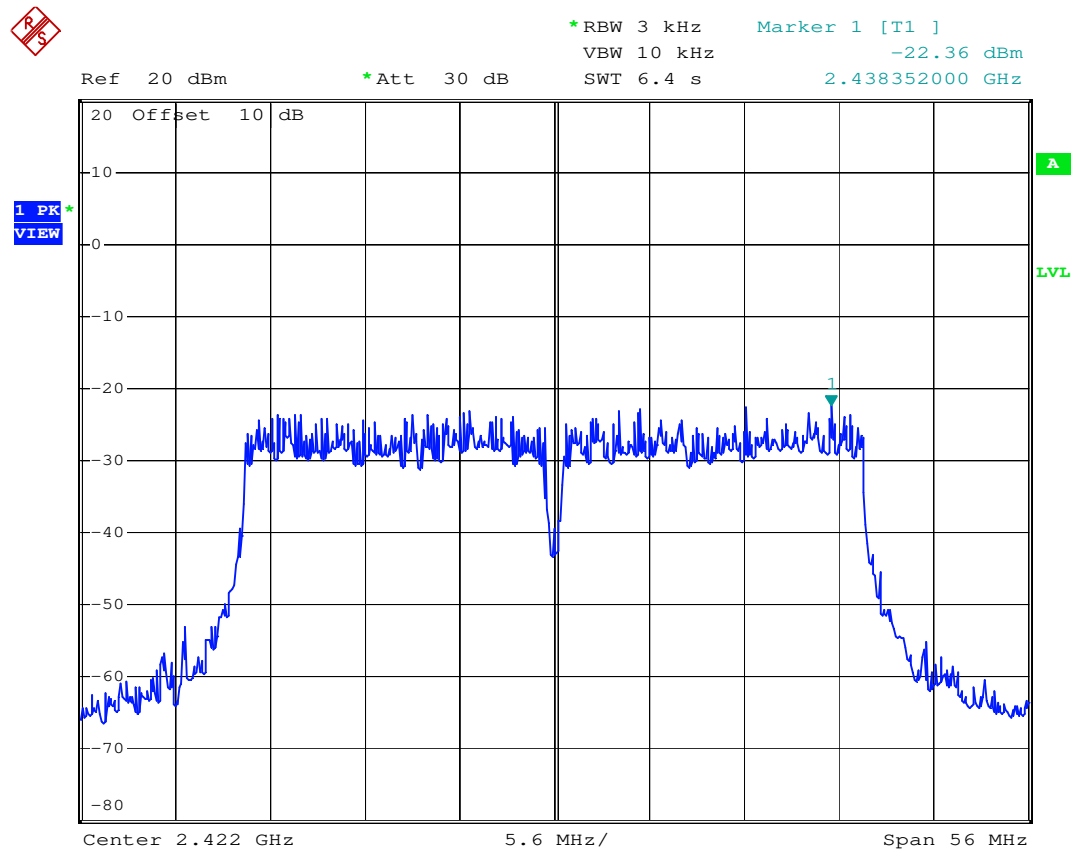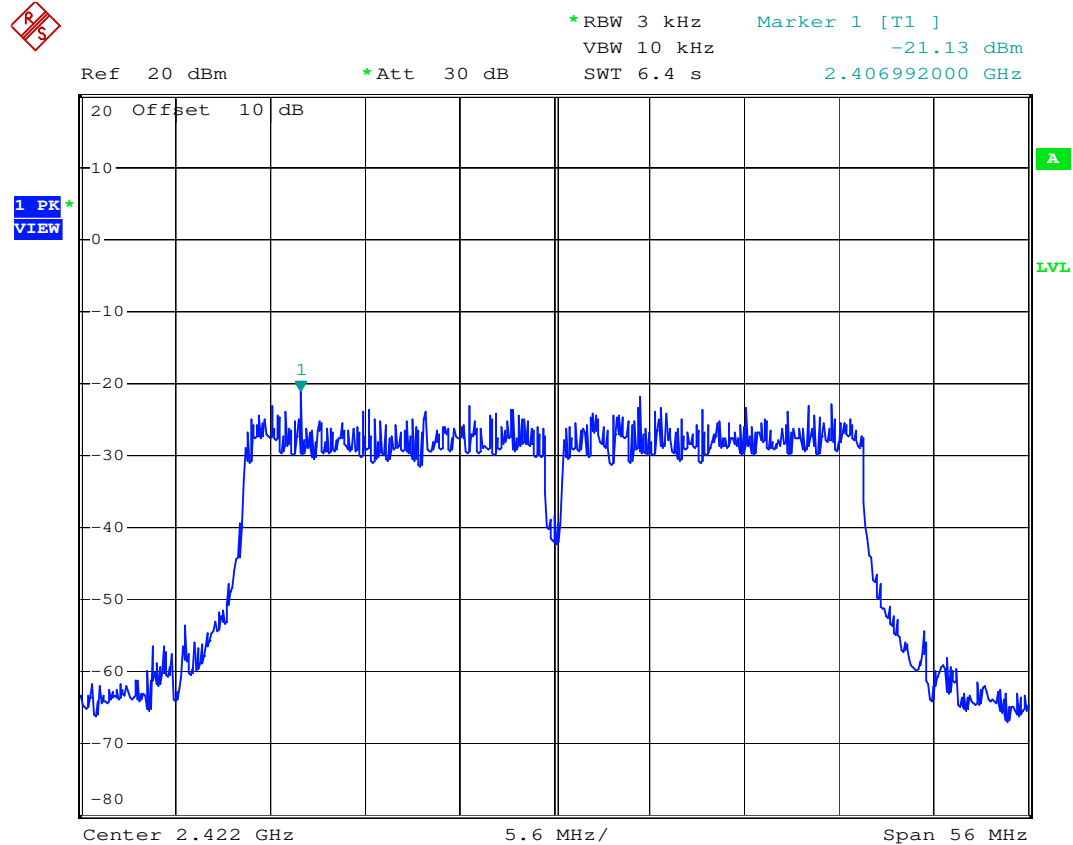
802.11n HT-40/ Channel Low**Antenna1****Antenna2**



802.11n HT-40 /Channel Mid

Antenna1

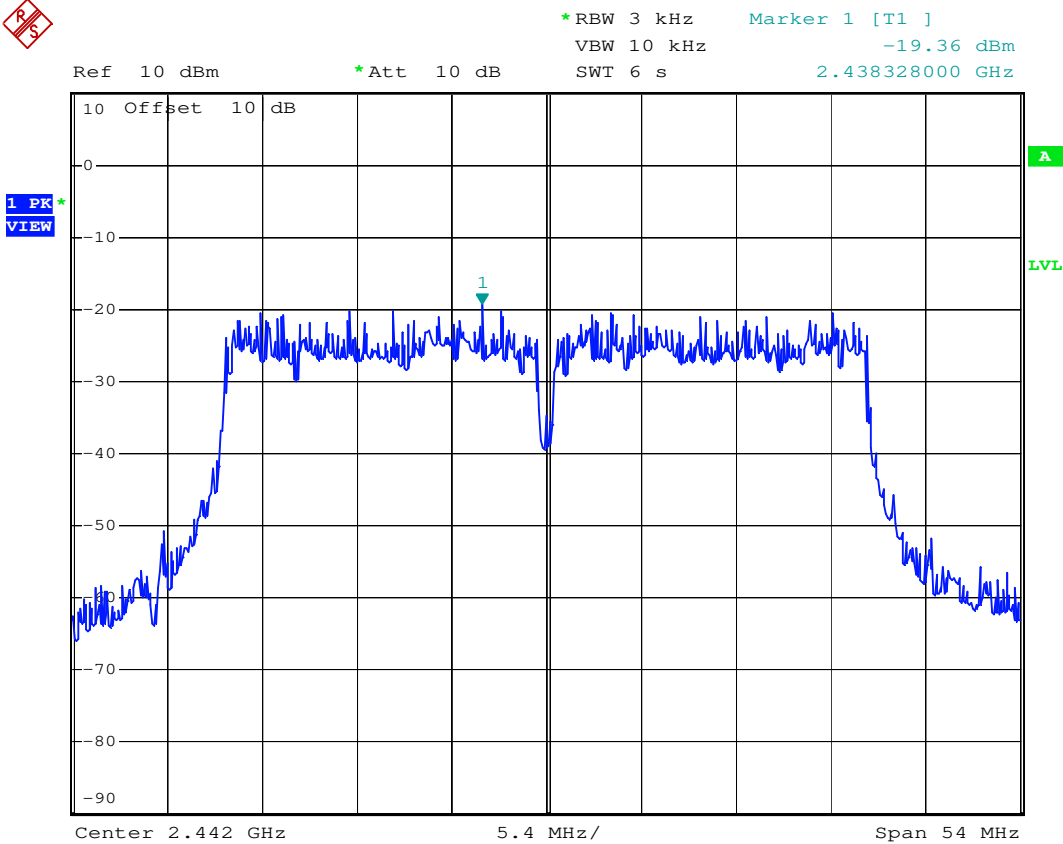

Antenna2

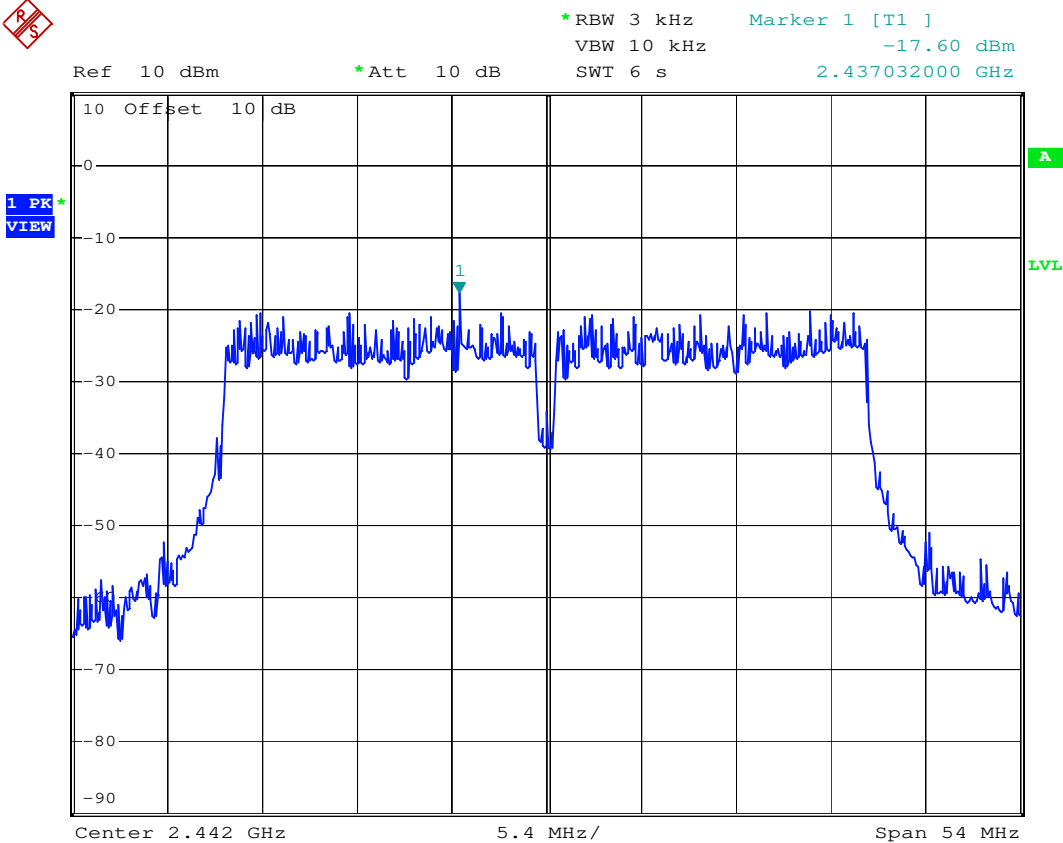

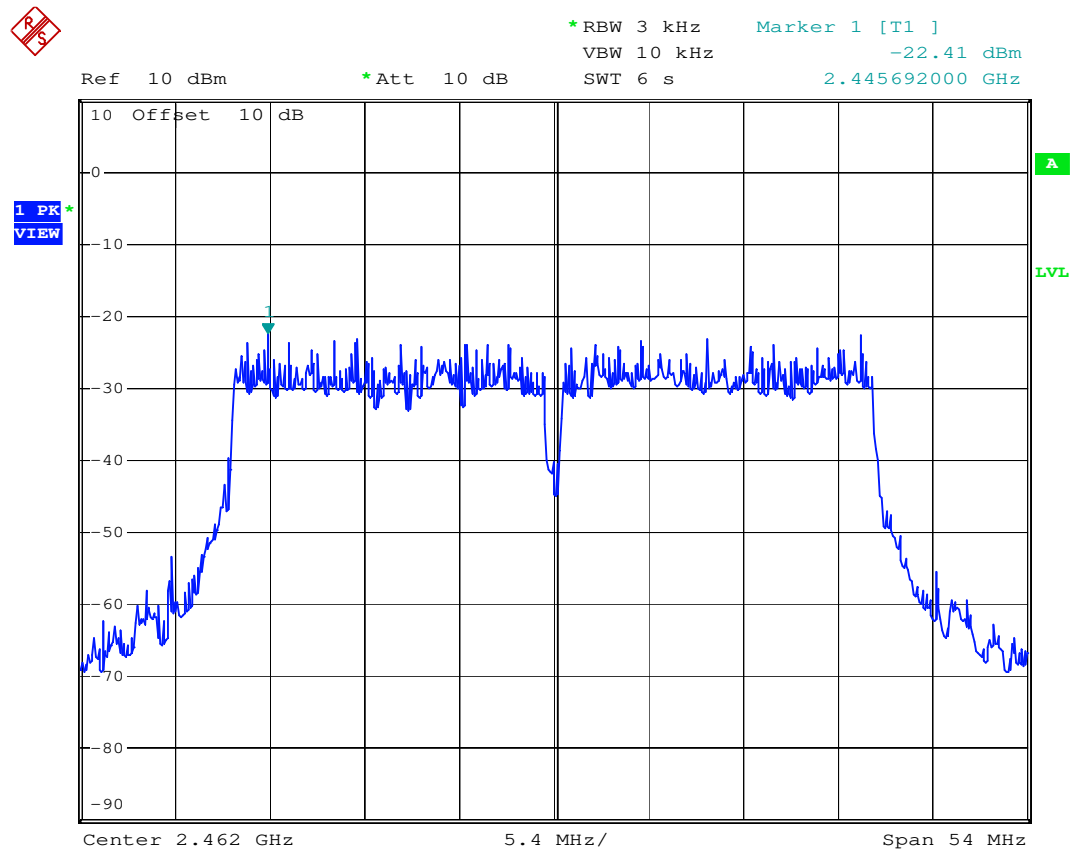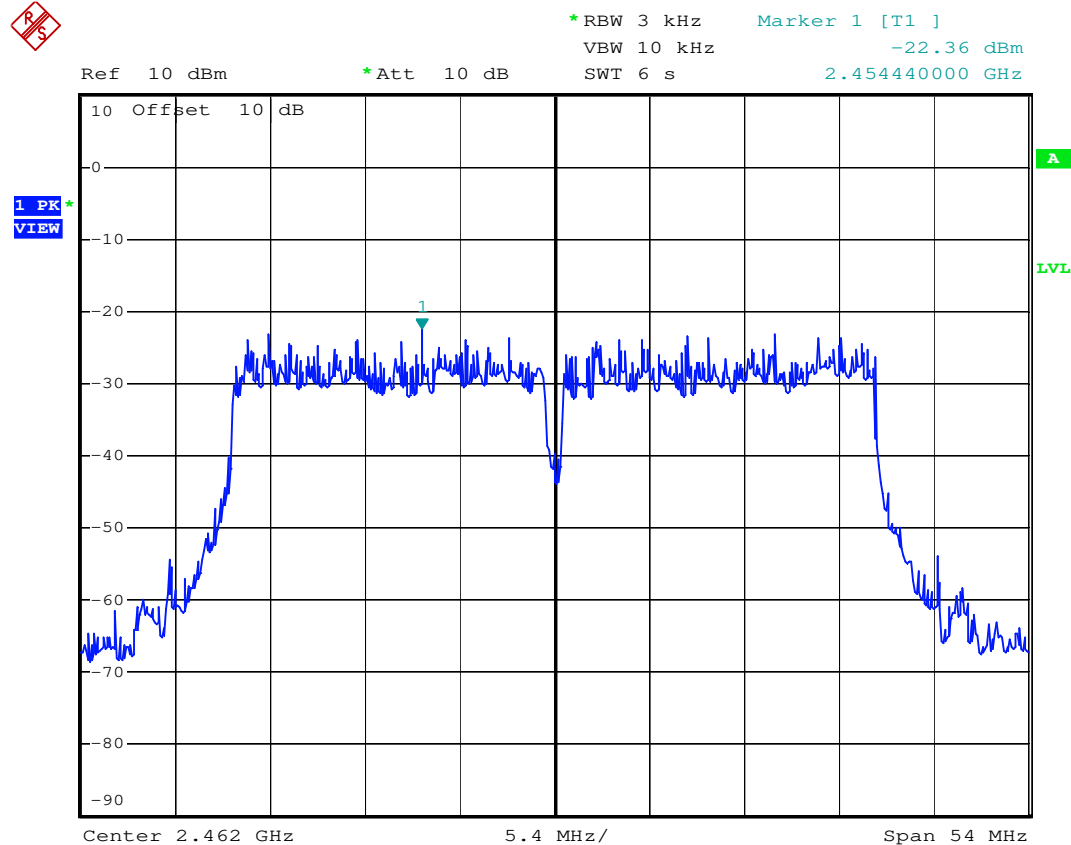802.11n HT-40/ Channel High**Antenna1****Antenna2**

11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

11.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/11/02	2018/11/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

11.4 Measurement Data

Test Date : May 23, 2018 Temperature : 25 °C Humidity : 65 %

A. 802.11b @1 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

B. 802.11g @6 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

C. 802.11n HT-20 @6.5 Mbps

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.



D. 802.11n HT-40 @13.5 Mbps

Mode: Channel Low, Mid, High



30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.



802.11b / Channel Low

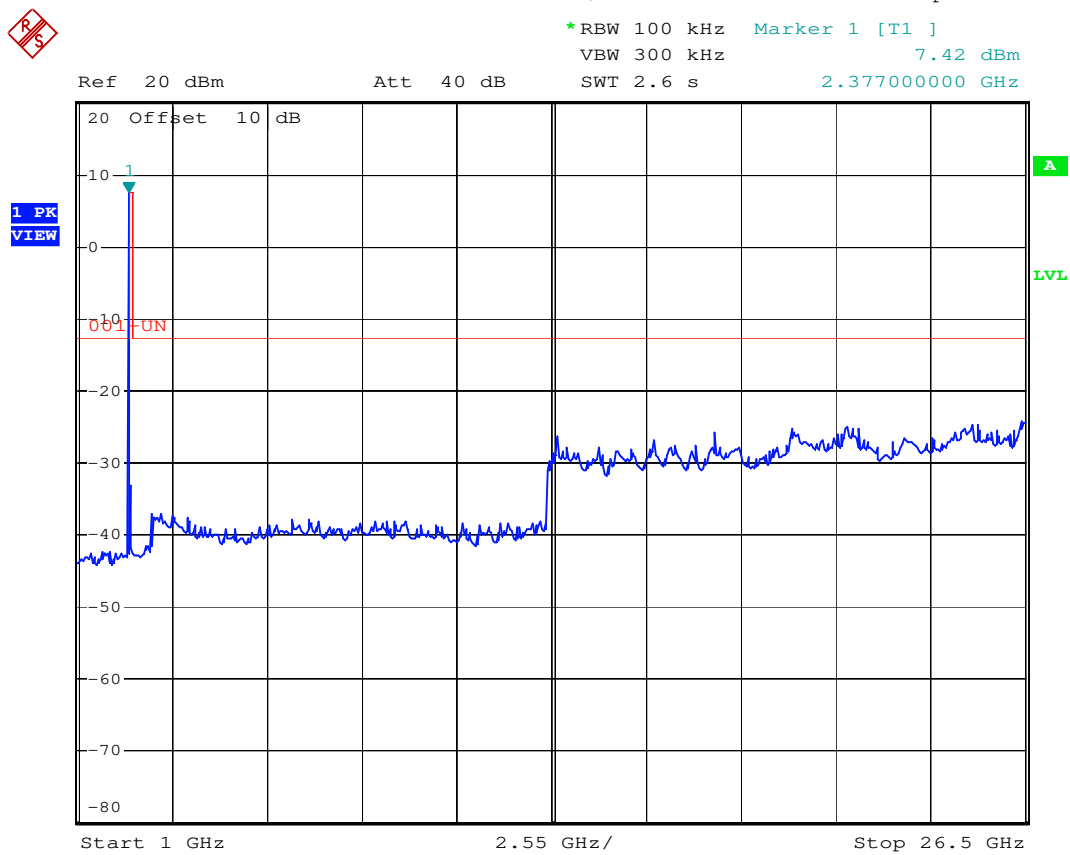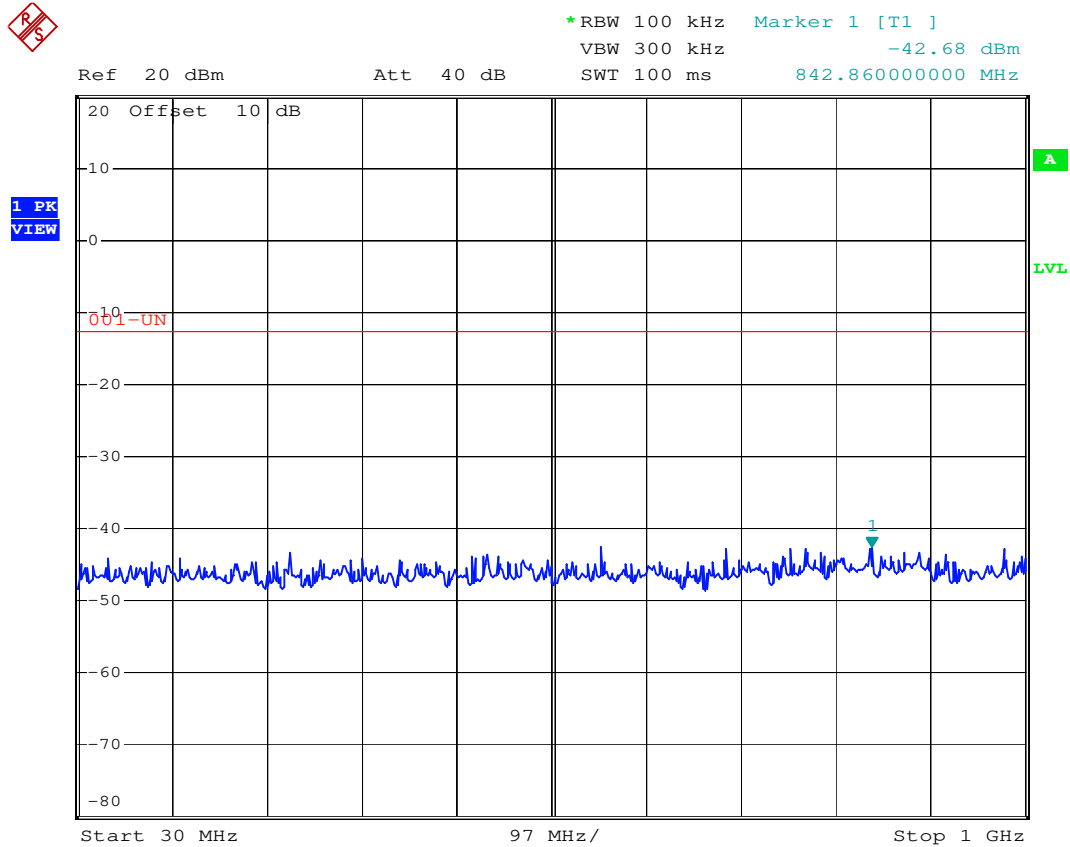



802.11b / Channel Mid

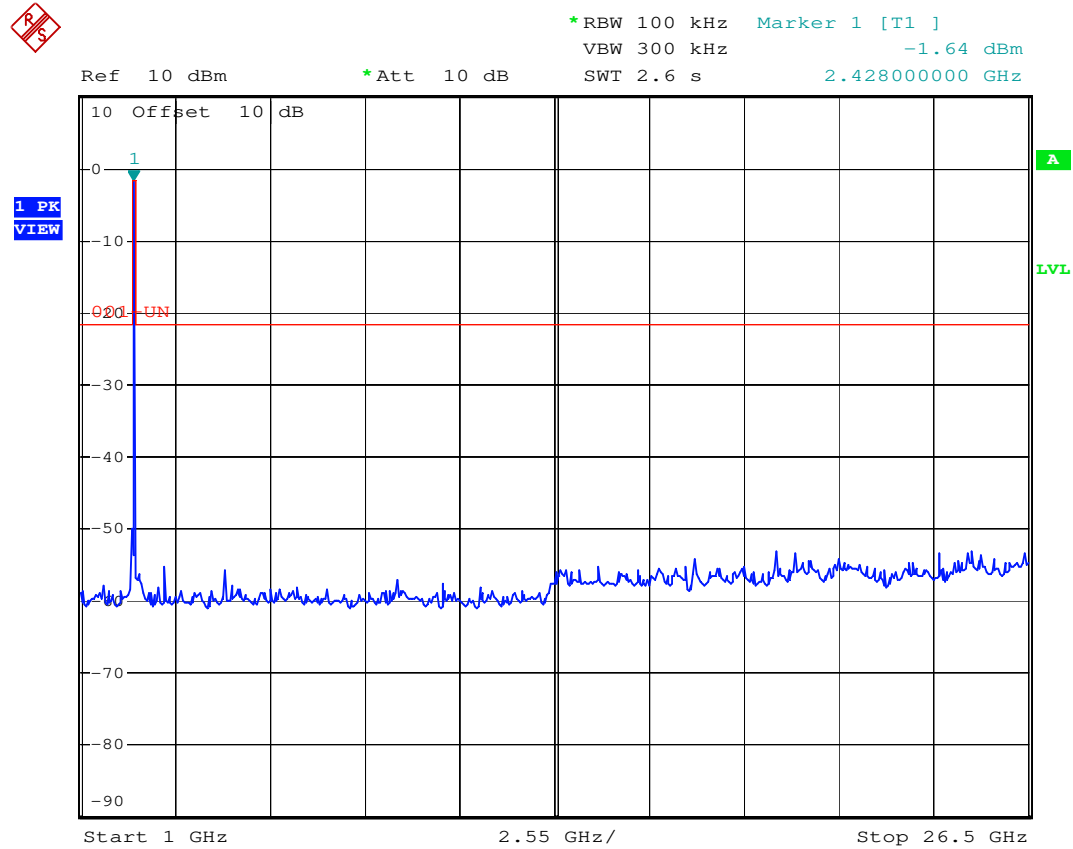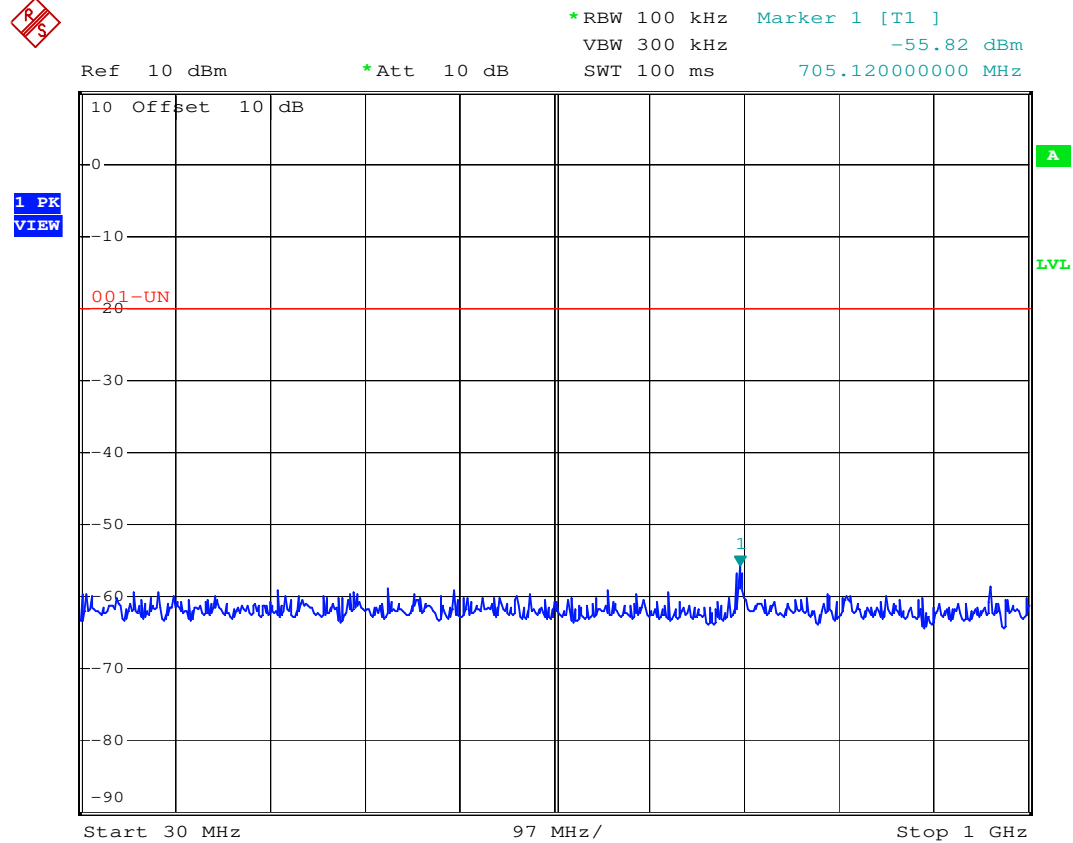



802.11b / Channel High

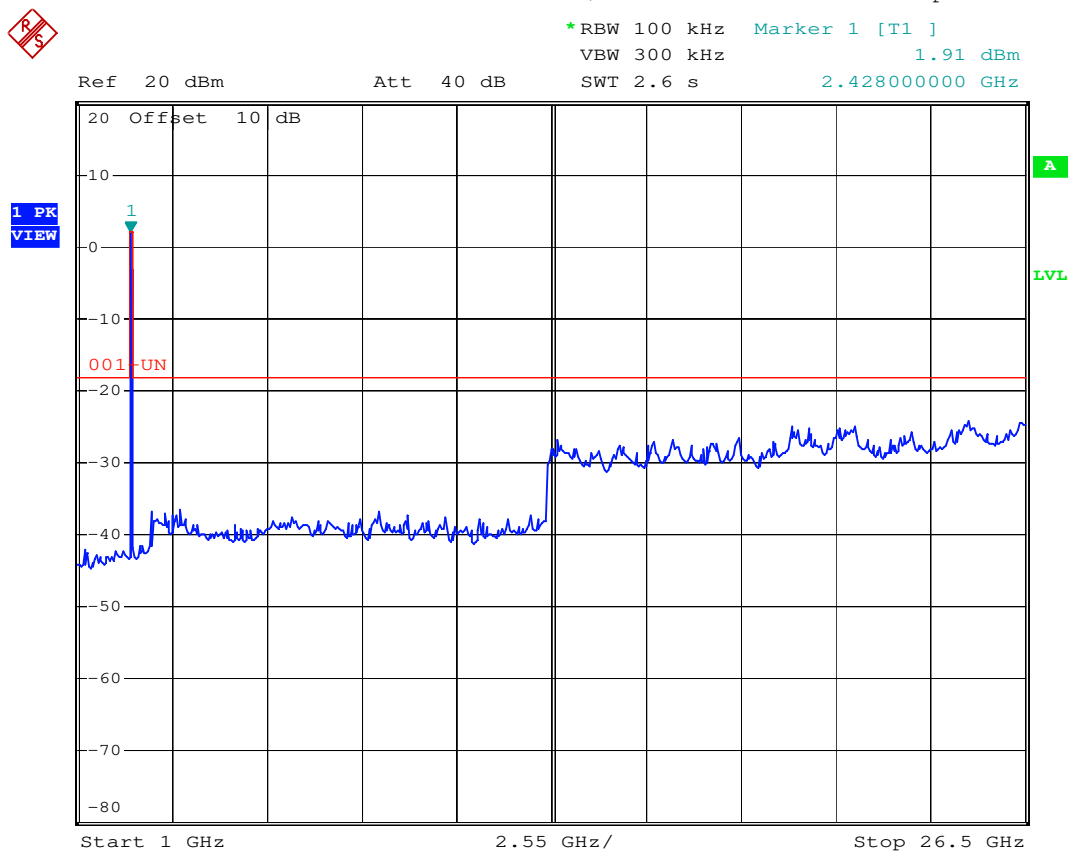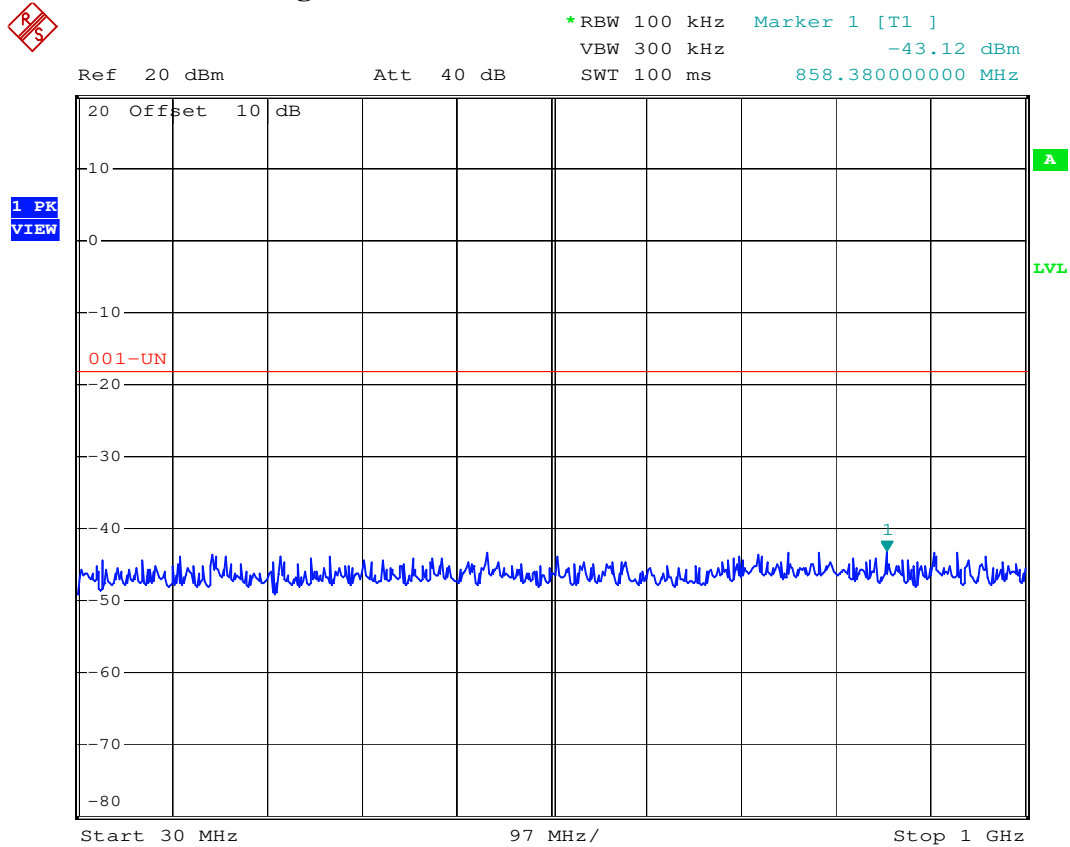



802.11g / Channel Low

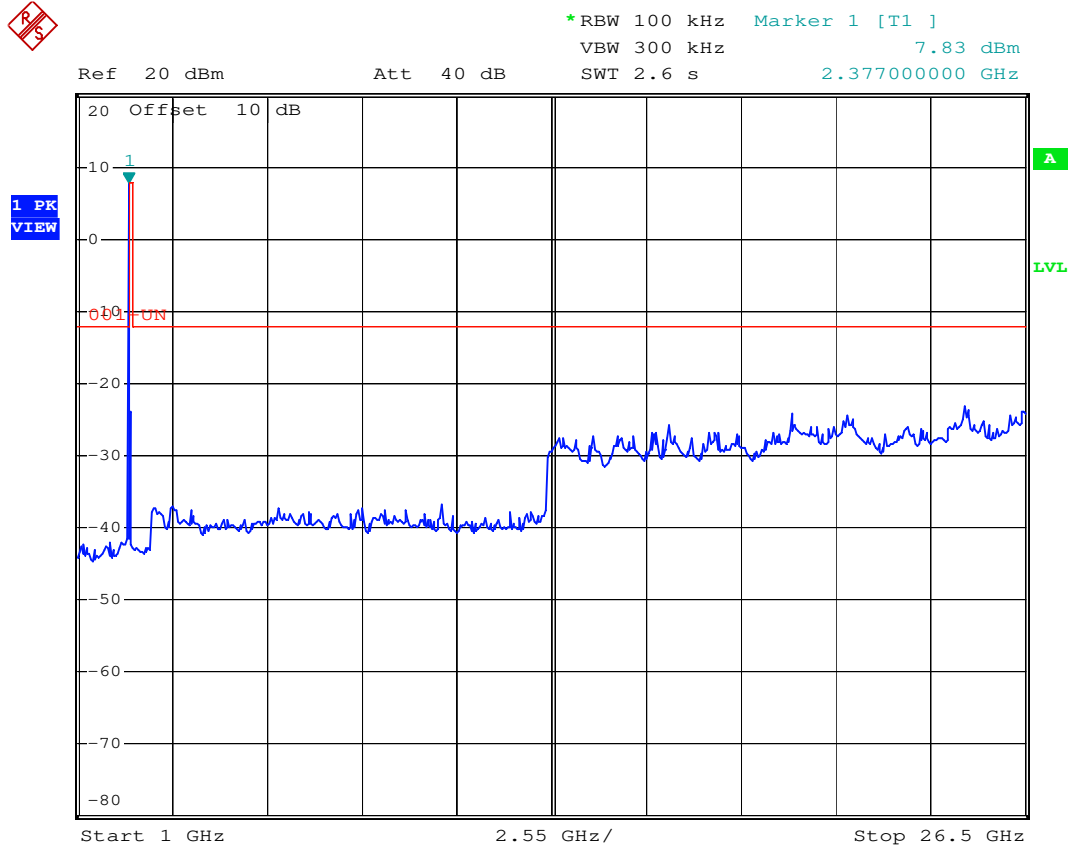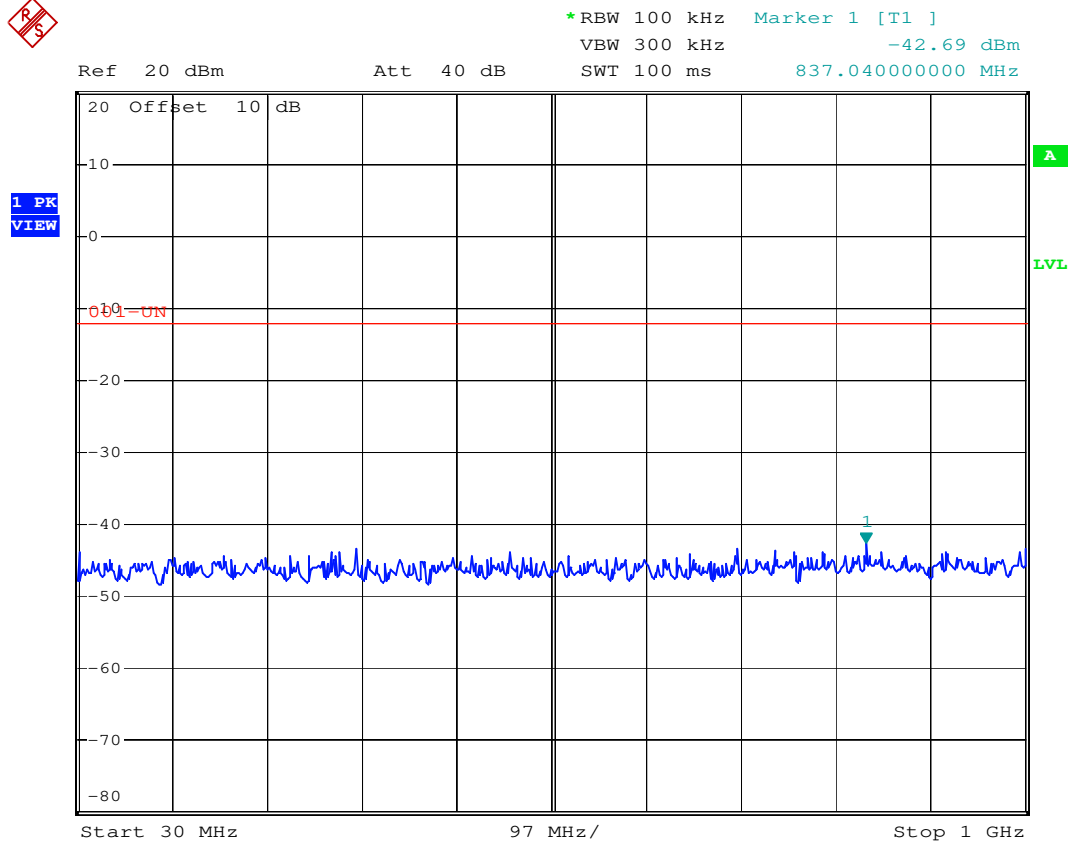



802.11g / Channel Mid

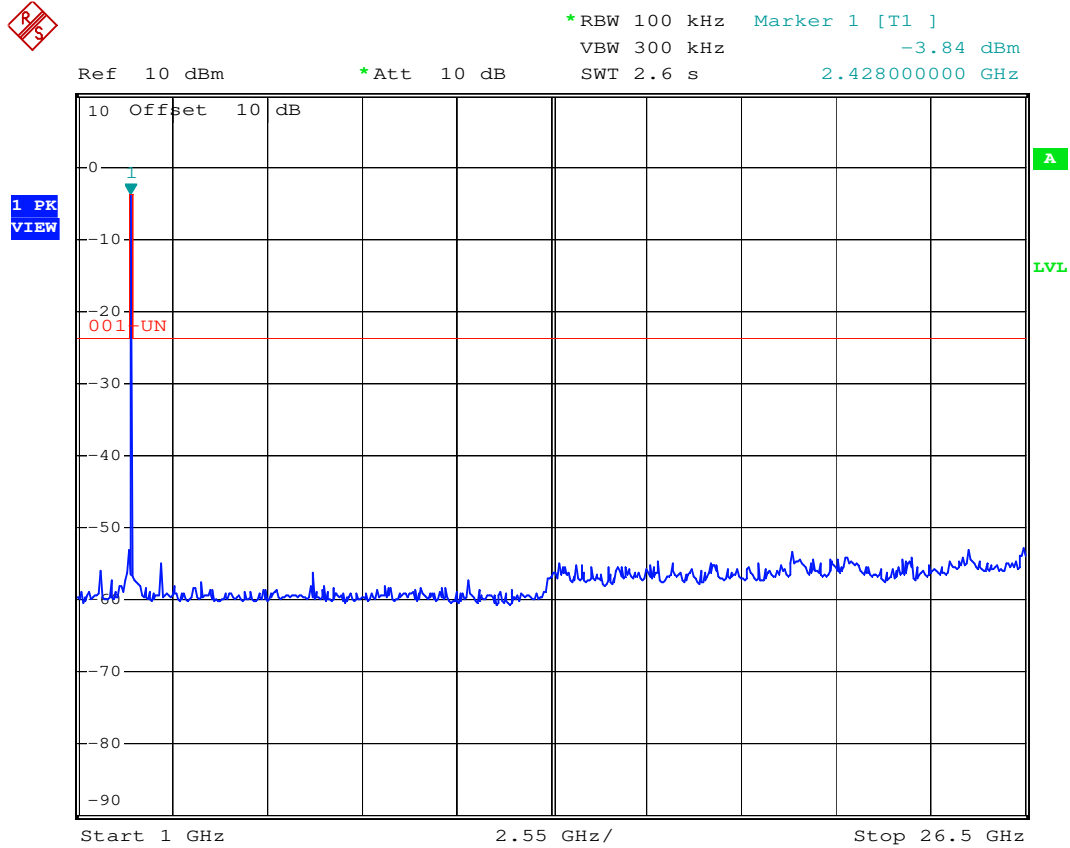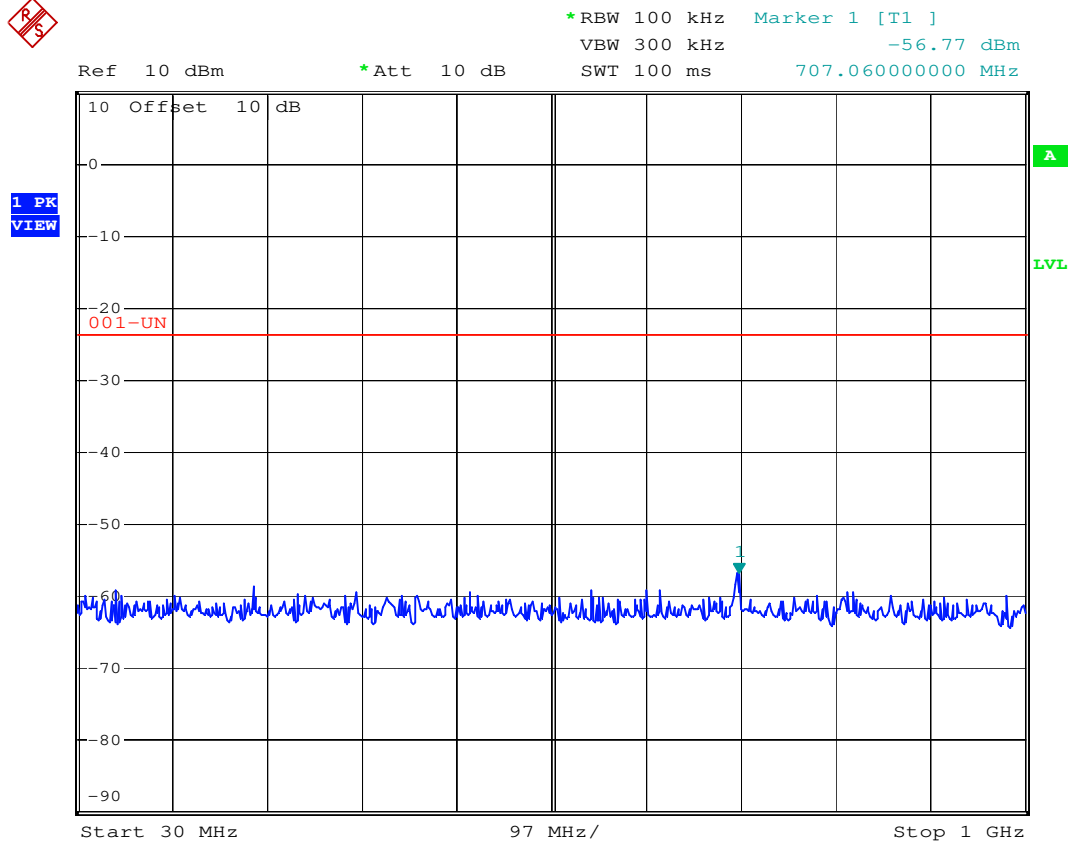



802.11g / Channel High

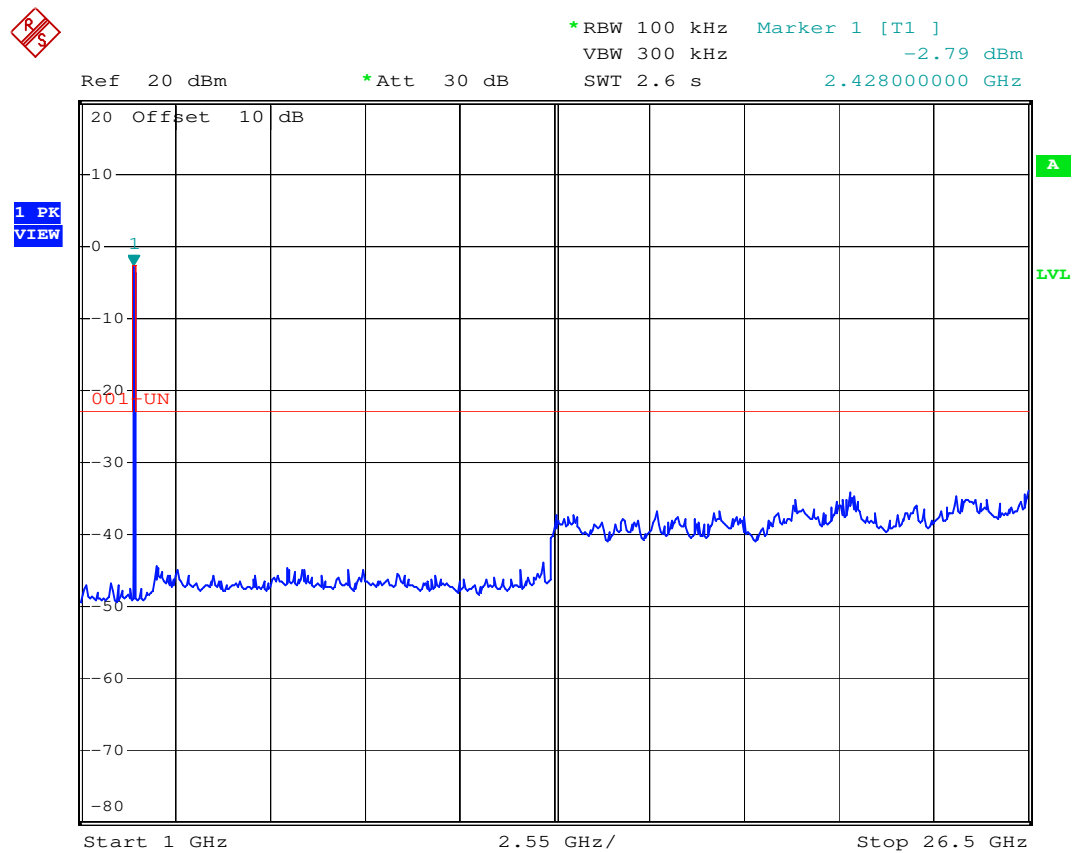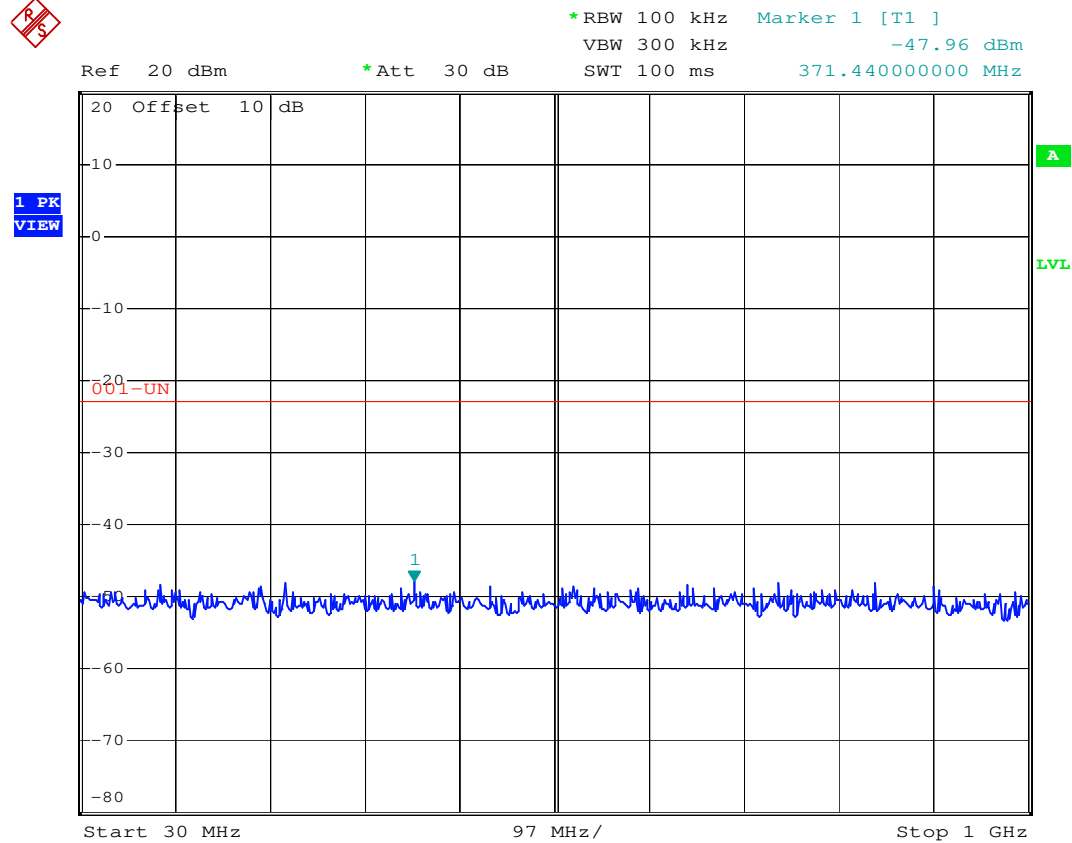



802.11n HT-20/ Channel Low (Antenna1)

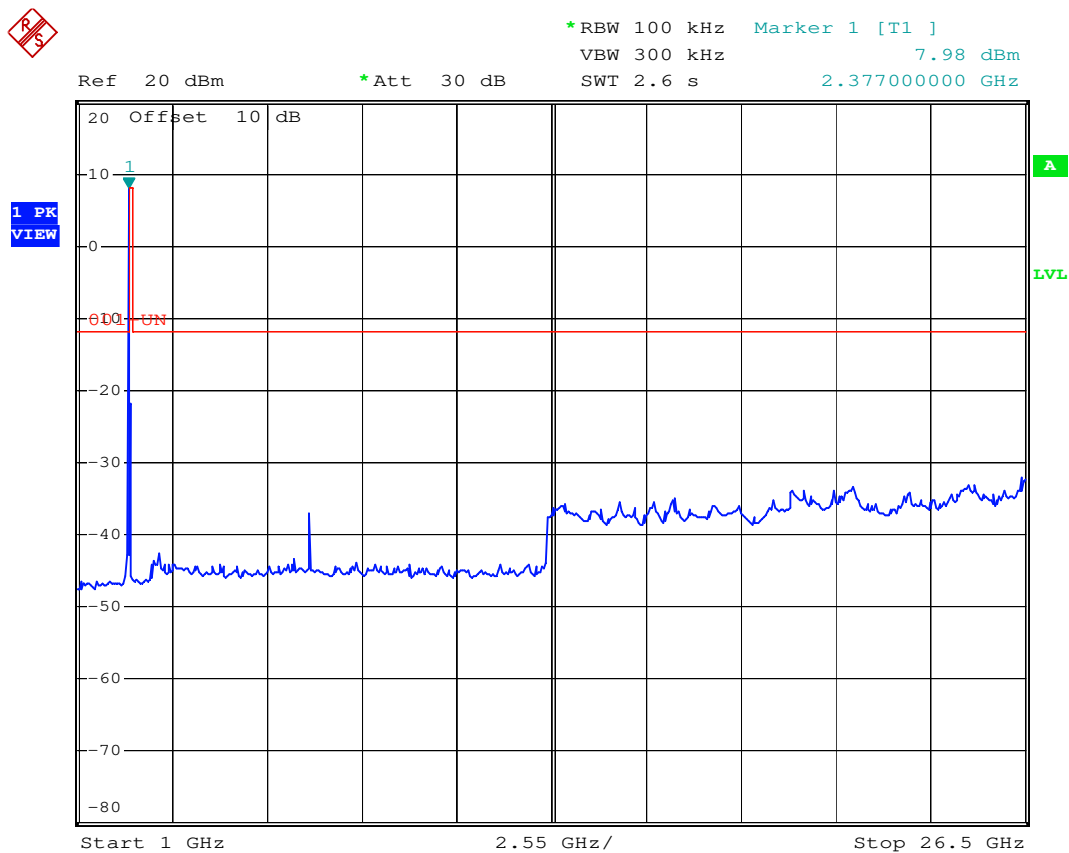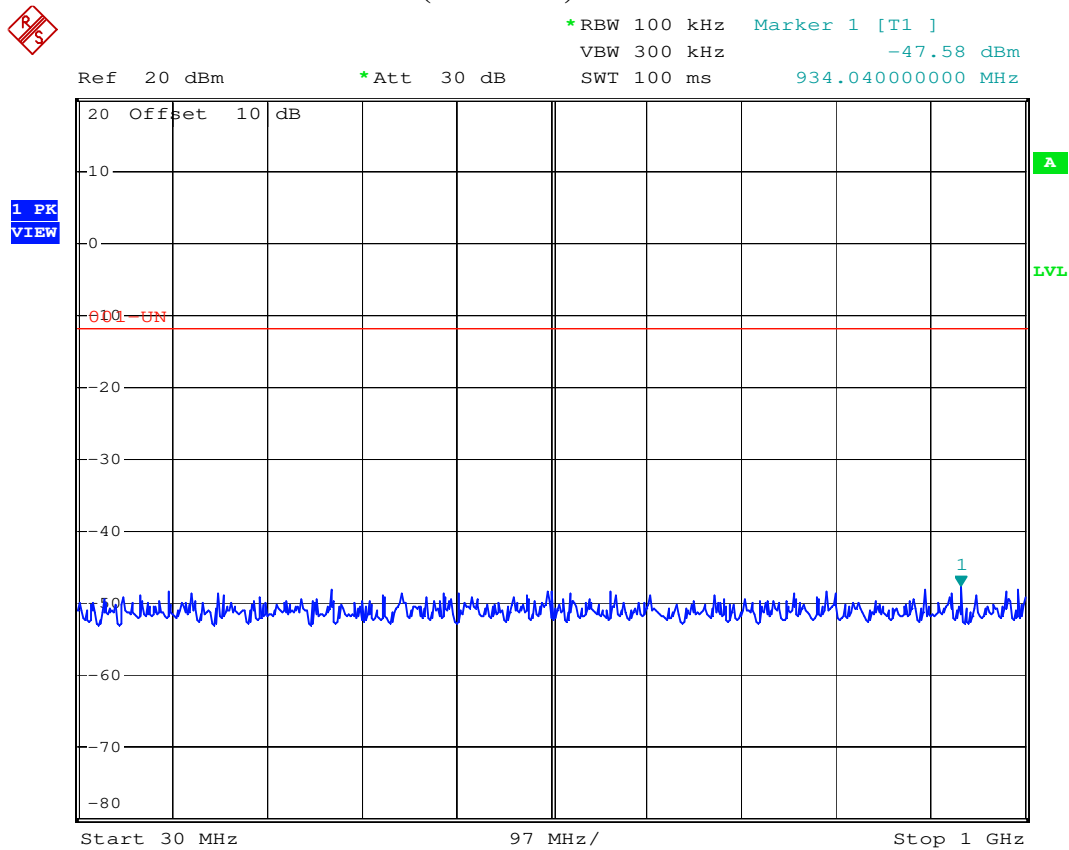



802.11n HT-20/ Channel Mid (Antenna1)

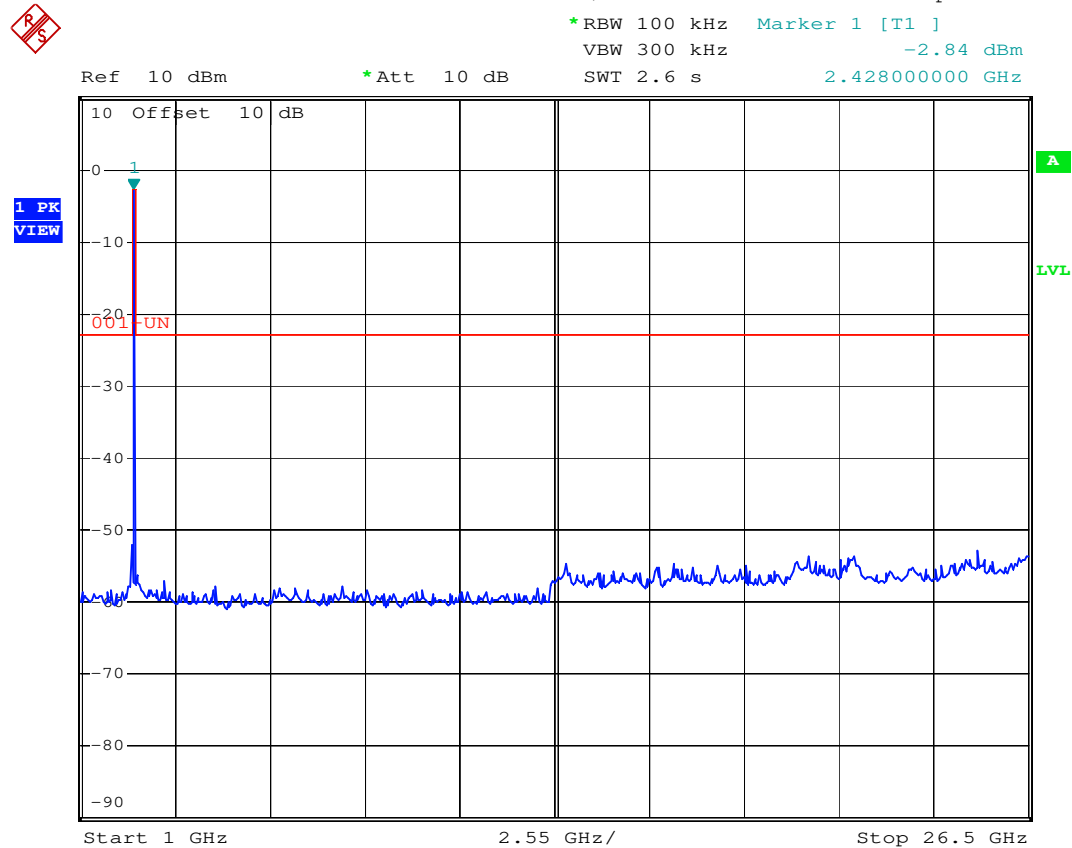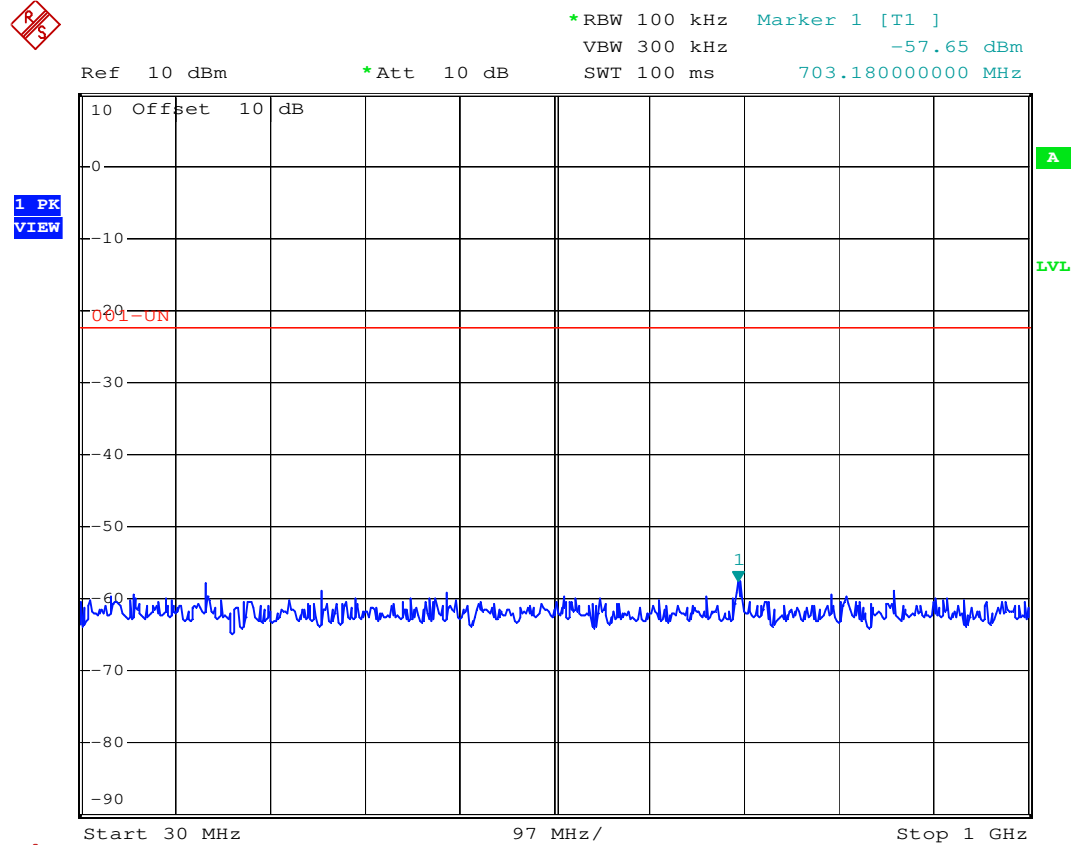



802.11n HT-20/ Channel High (Antenna1)

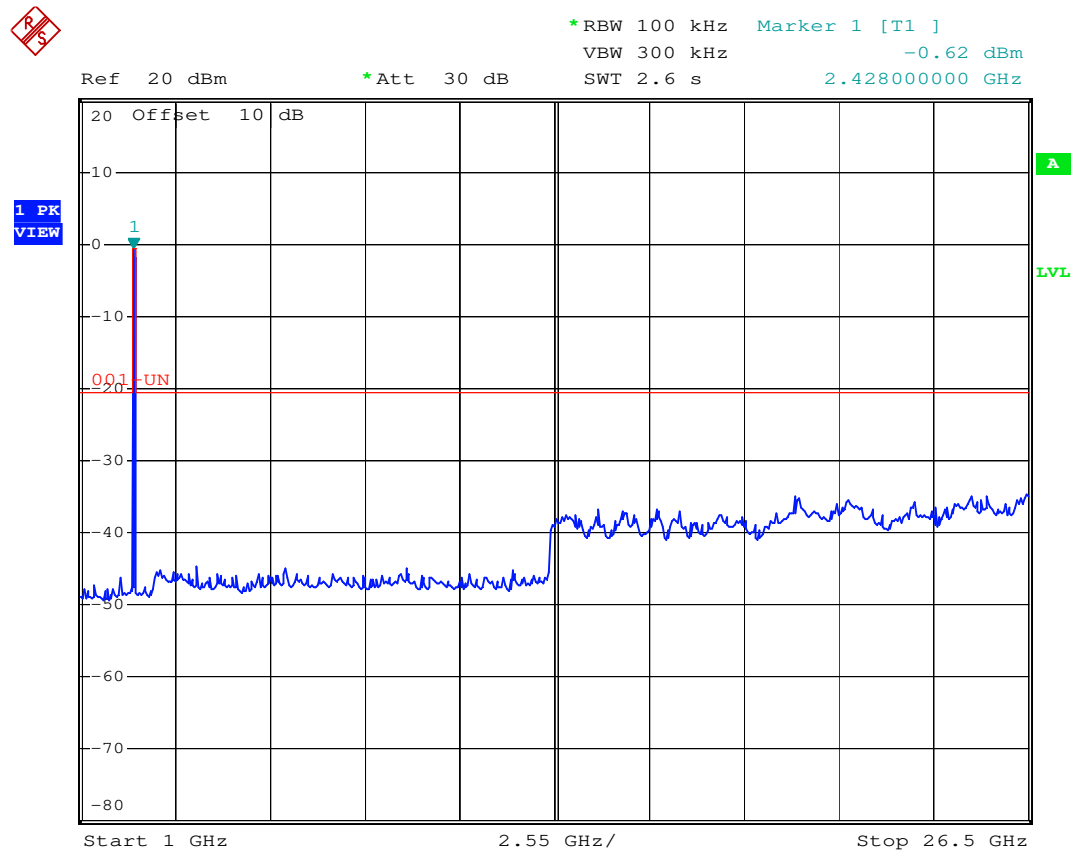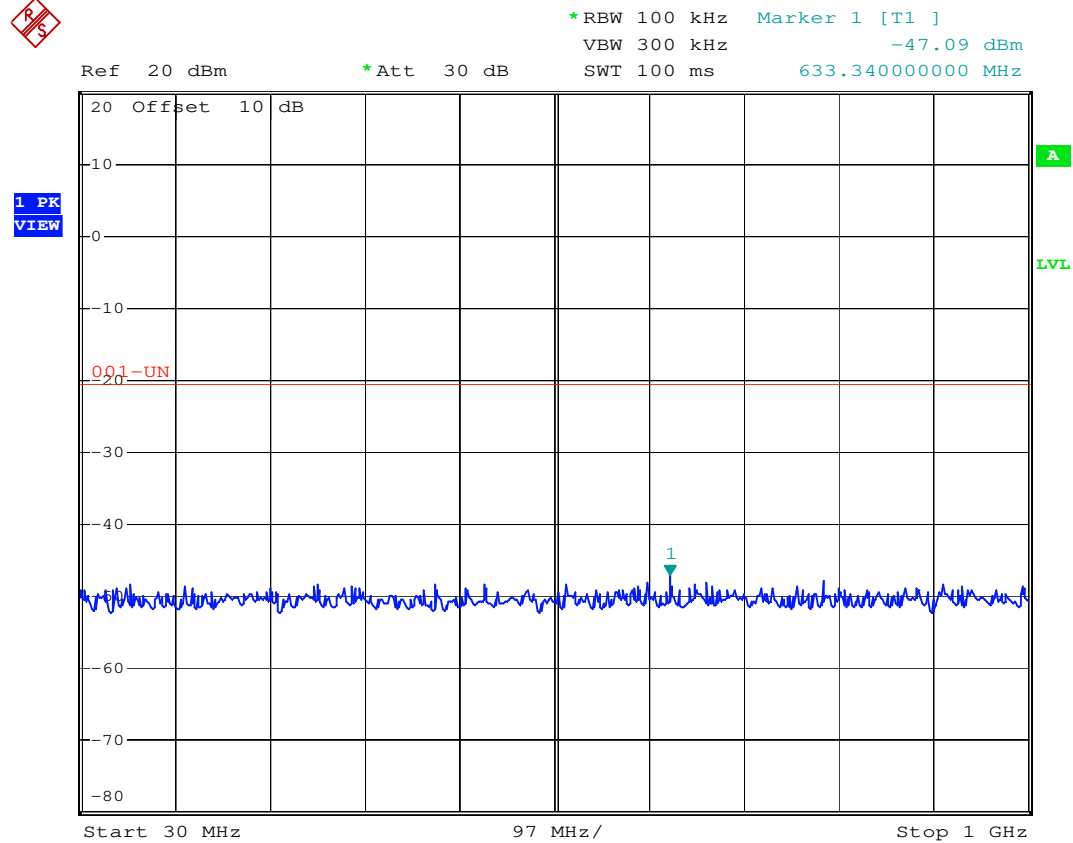



802.11n HT-20/ Channel Low (Antenna2)

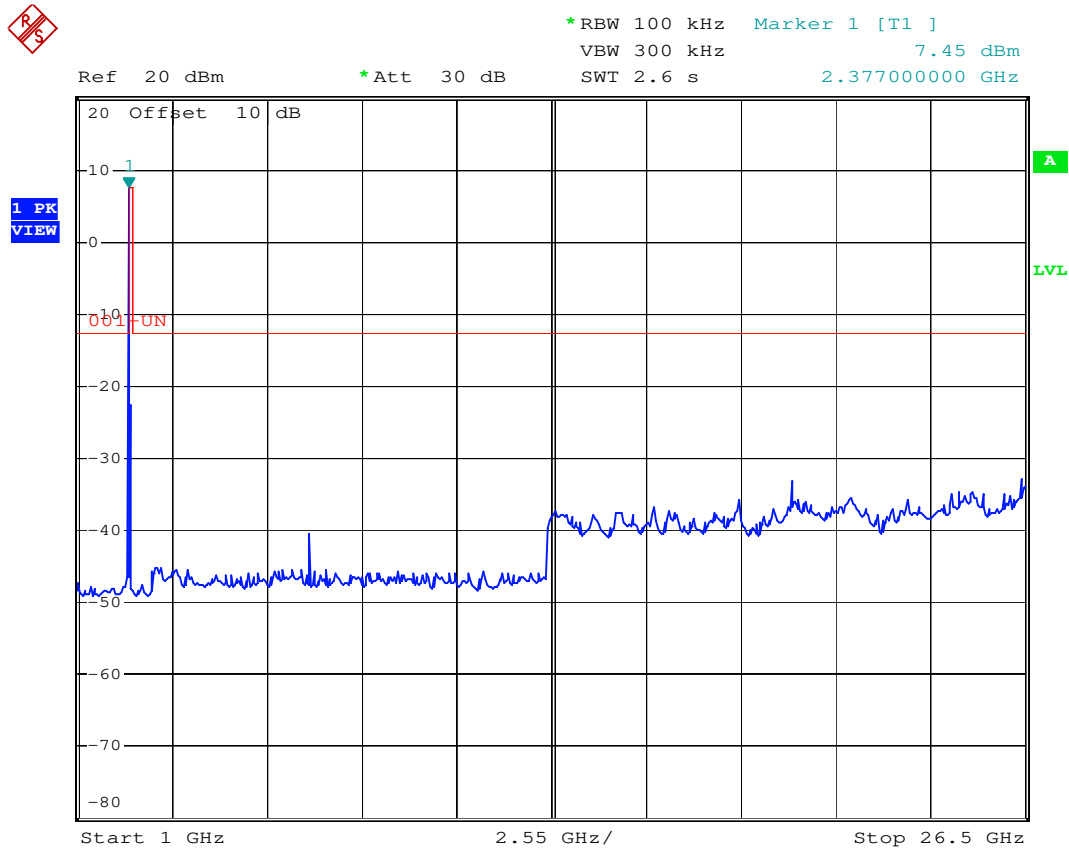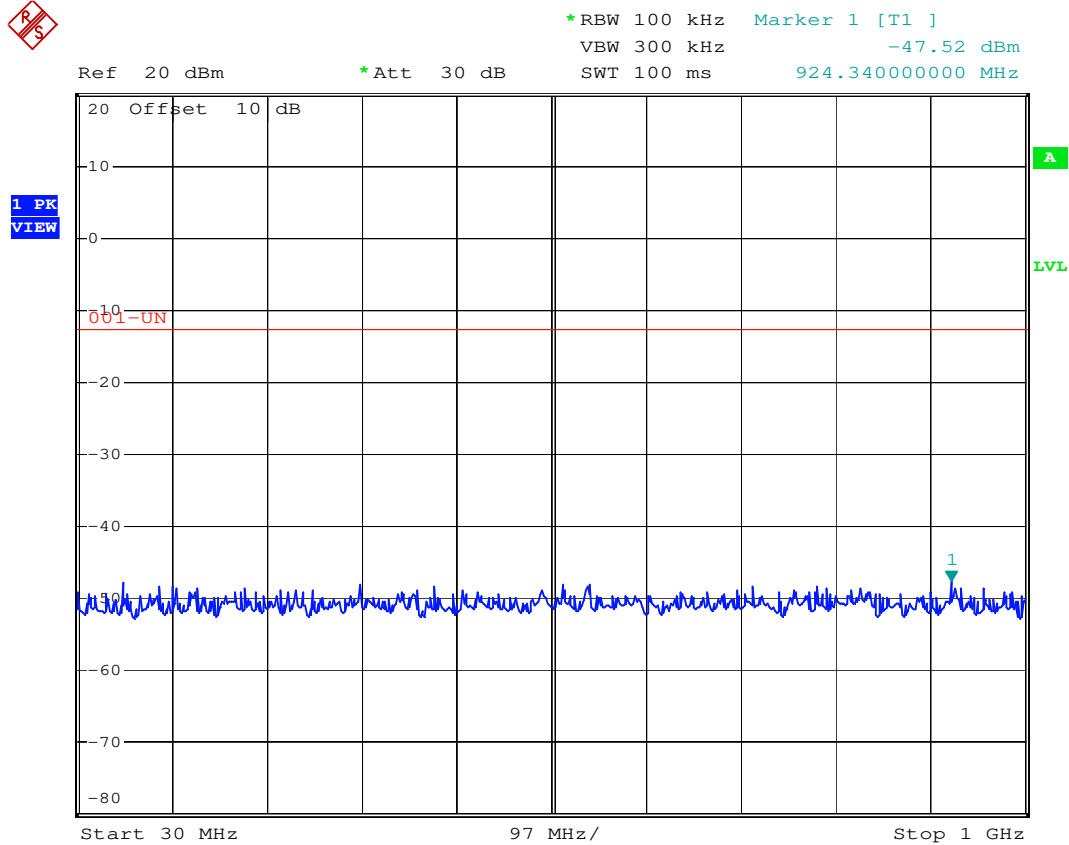



802.11n HT-20/ Channel Mid (Antenna2)

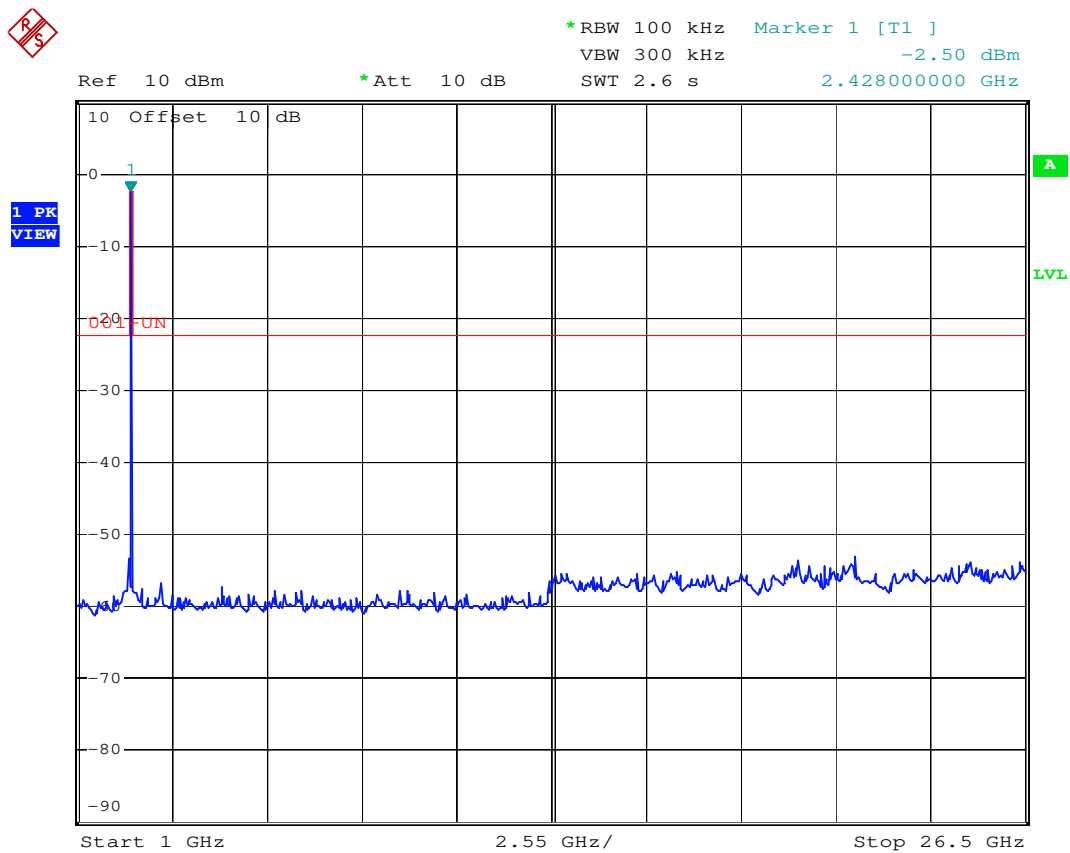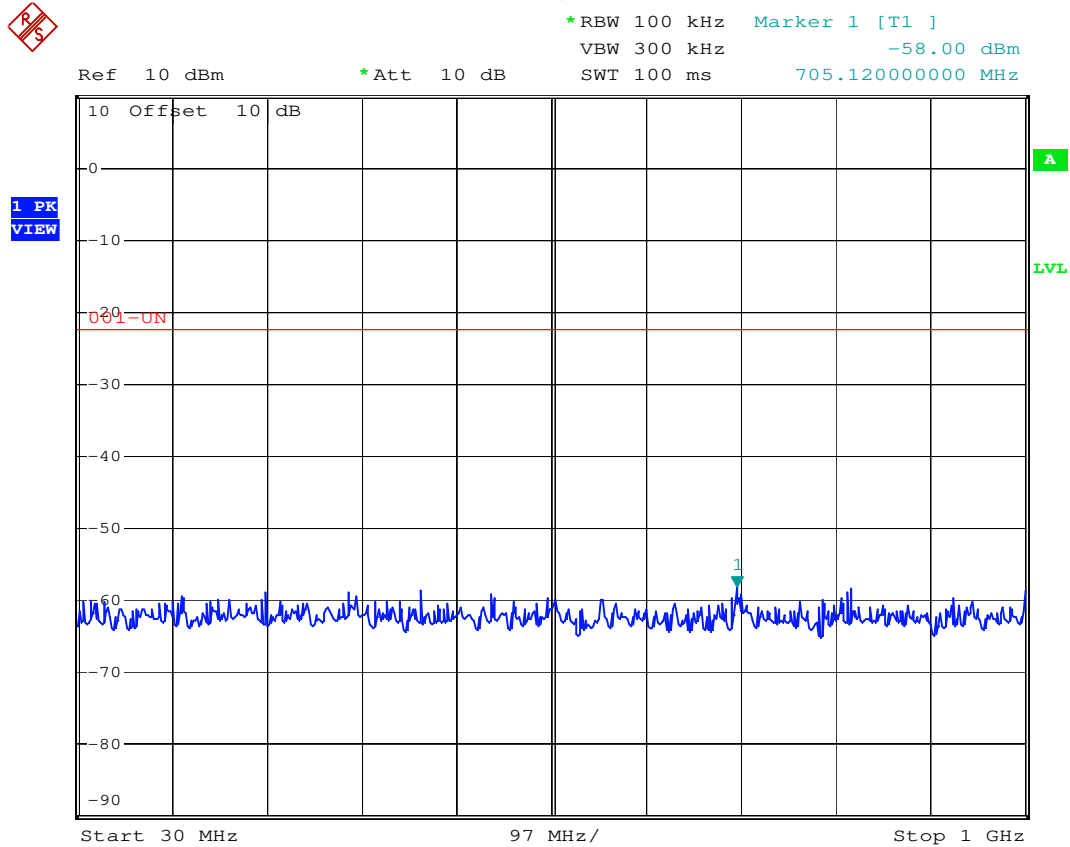



802.11n HT-20/ Channel High (Antenna2)

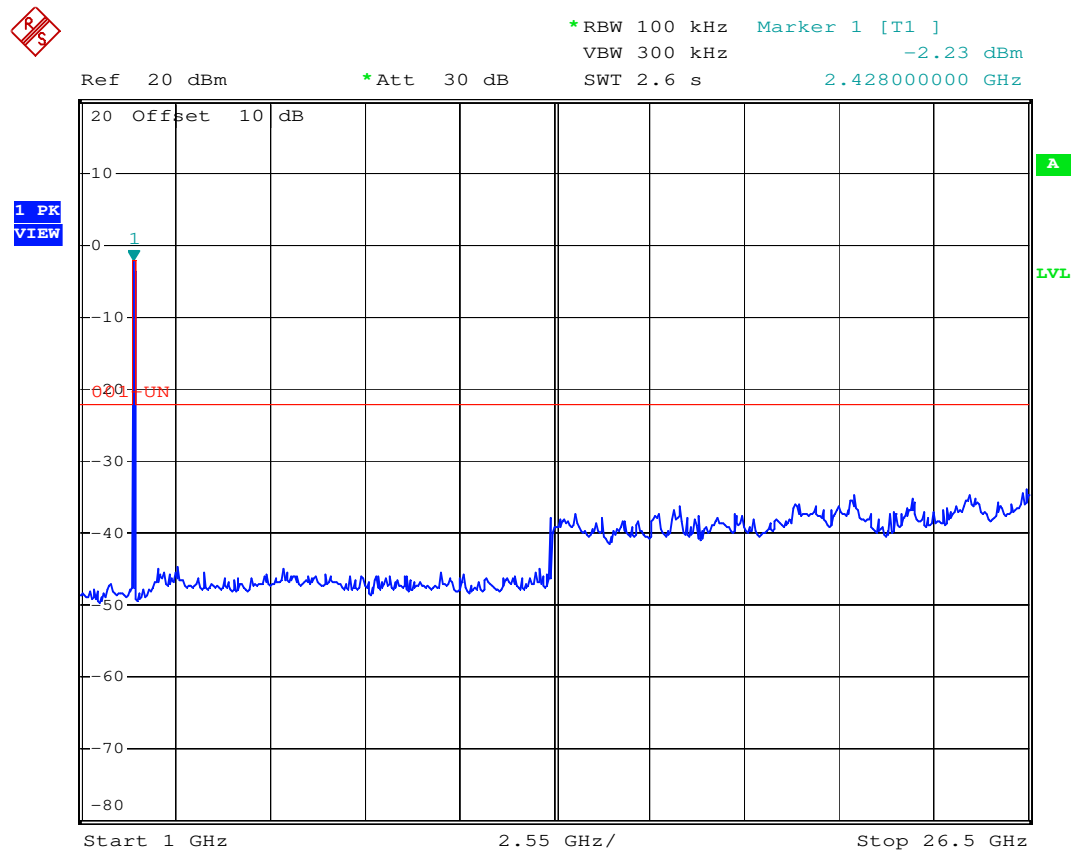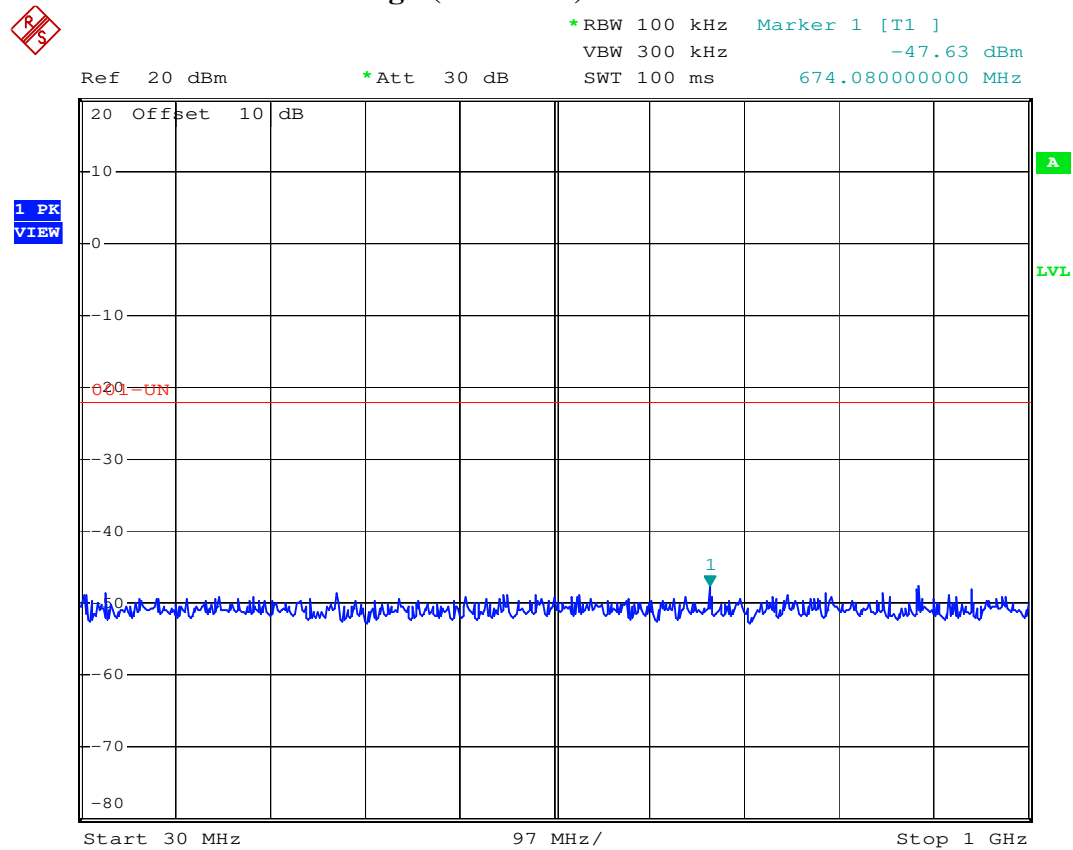



802.11n HT-40/ Channel Low (Antenna1)

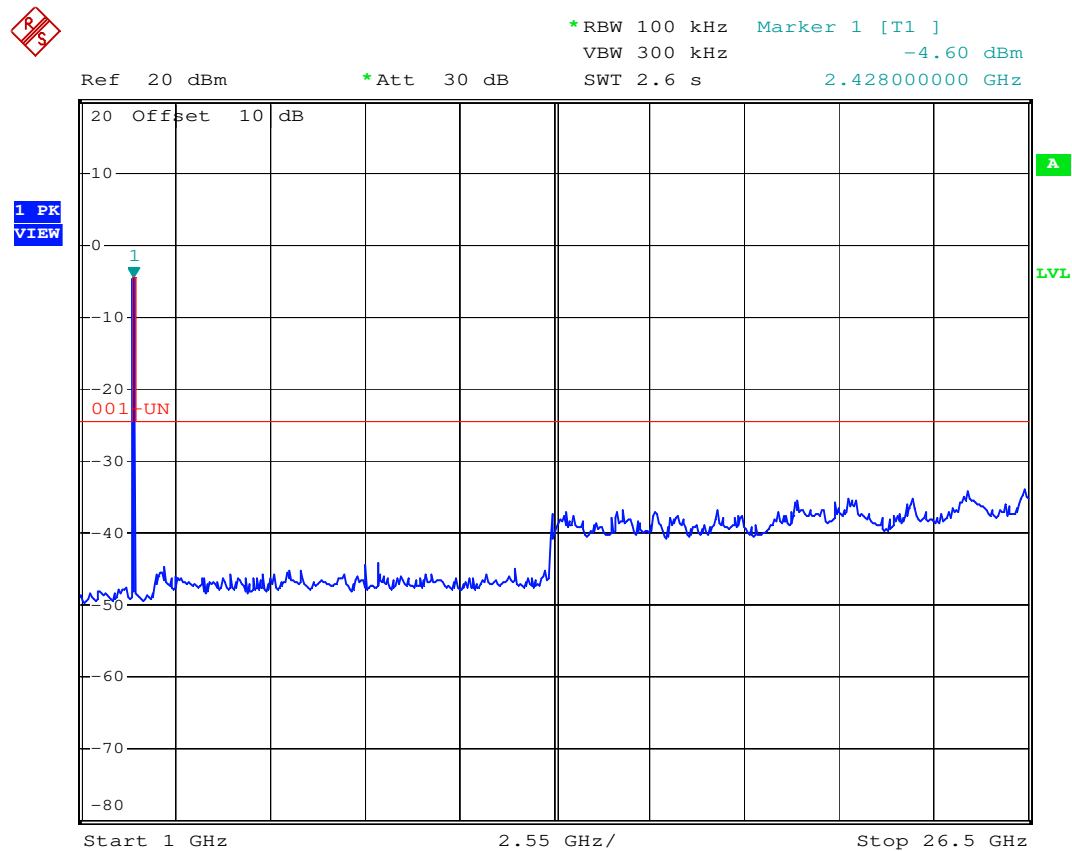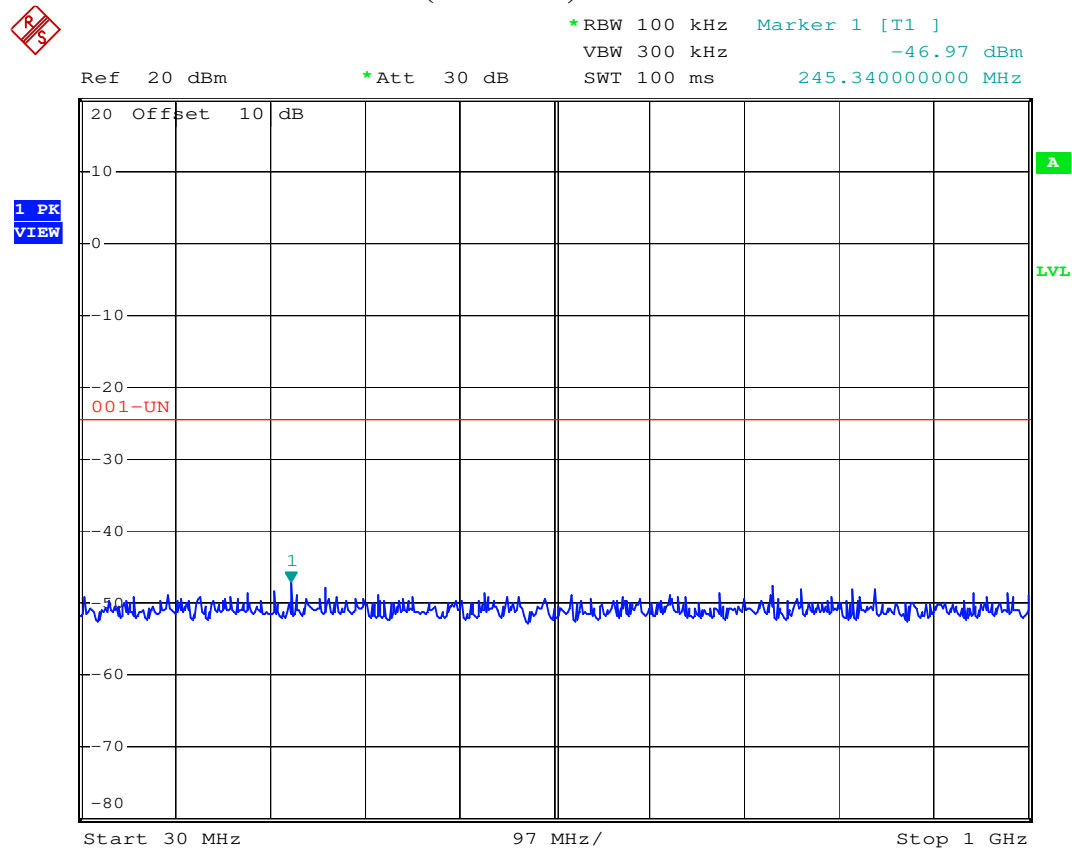



802.11n HT-40/ Channel Mid (Antenna1)

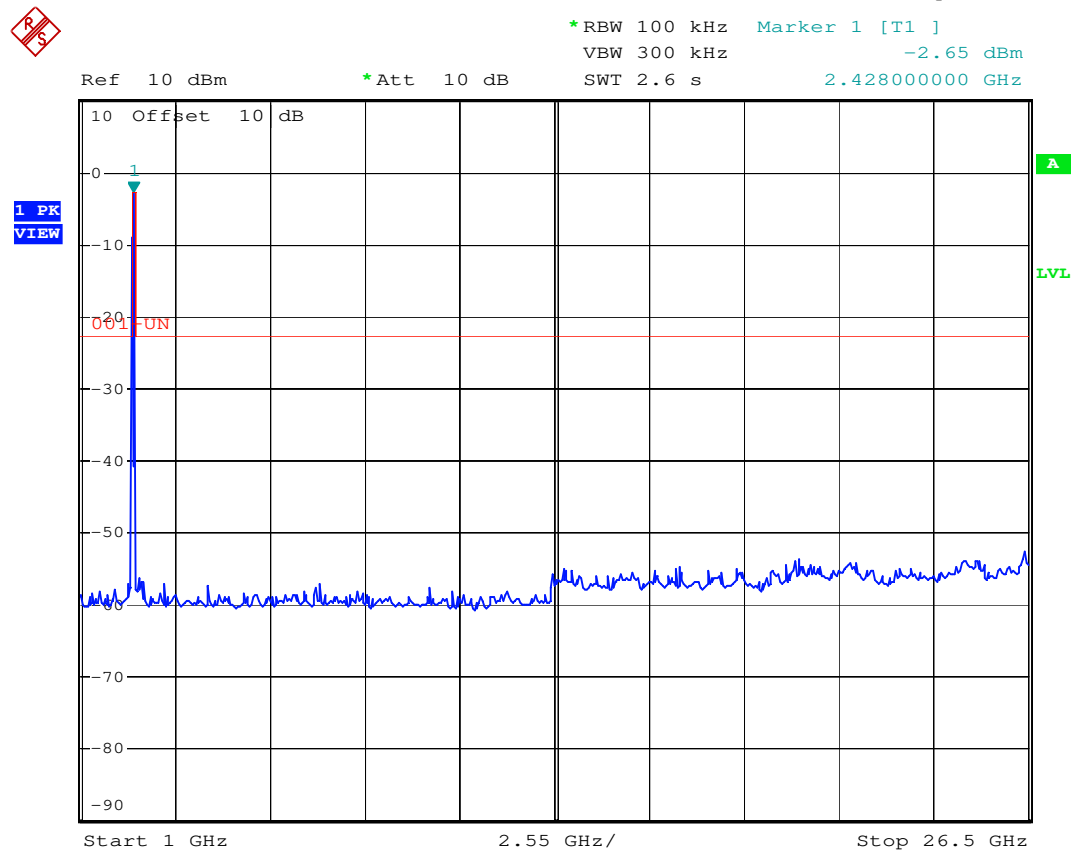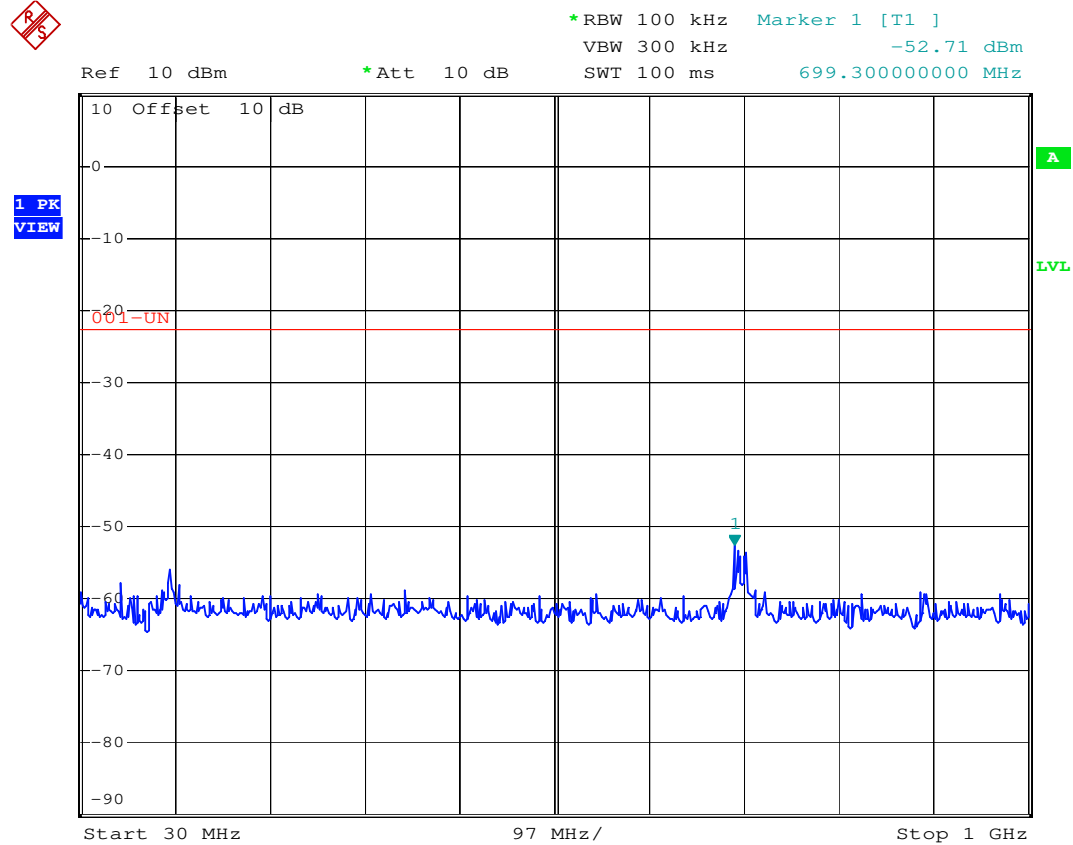



802.11n HT-40/ Channel High (Antenna1)

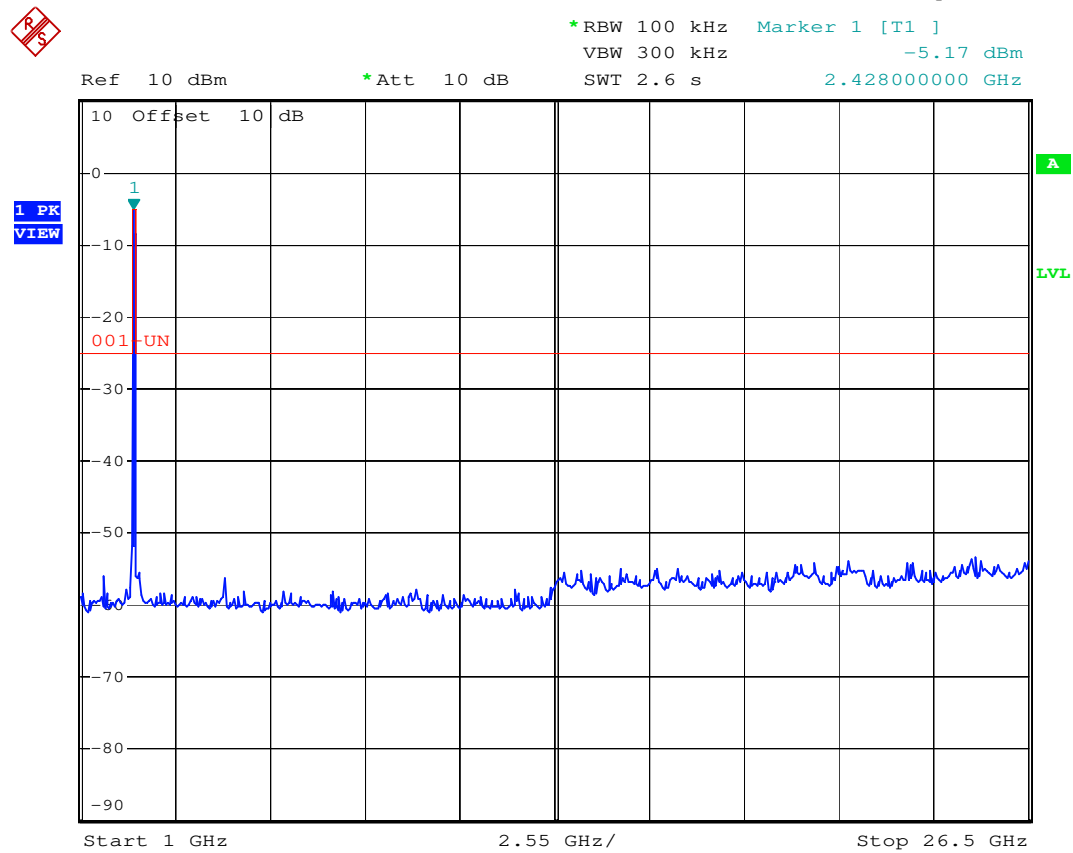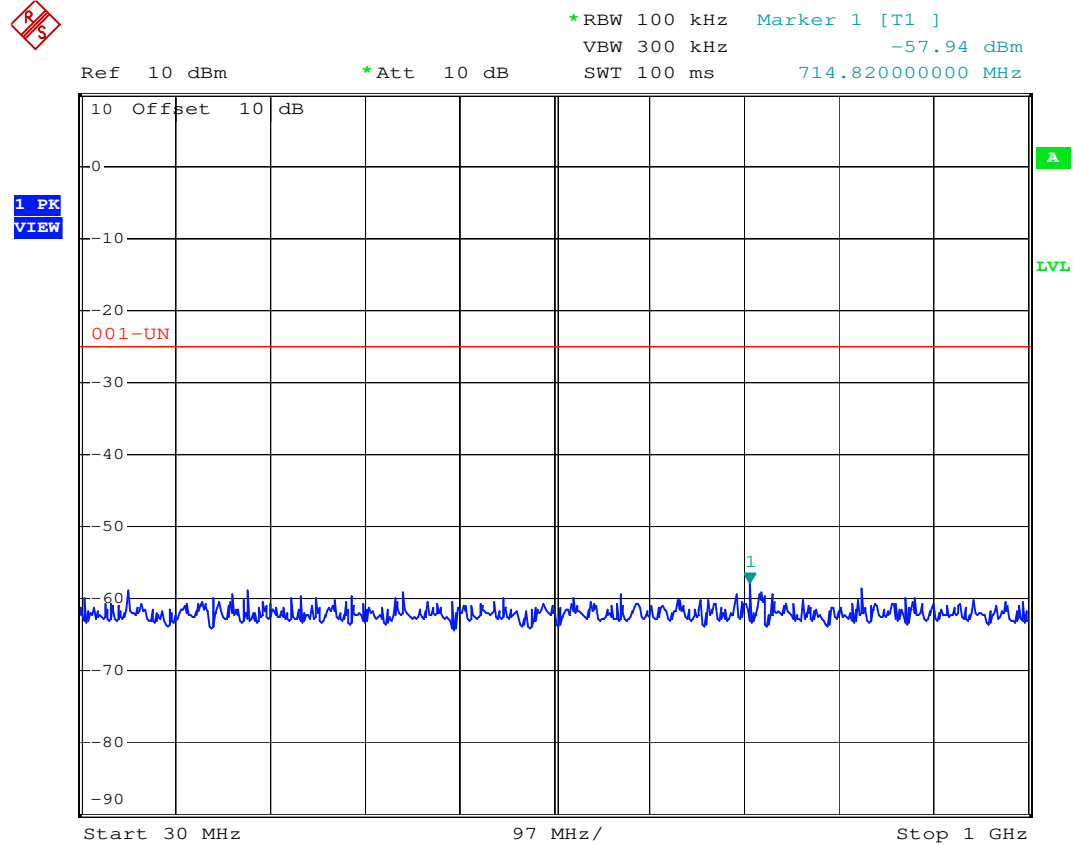



802.11n HT-40/ Channel Low (Antenna2)

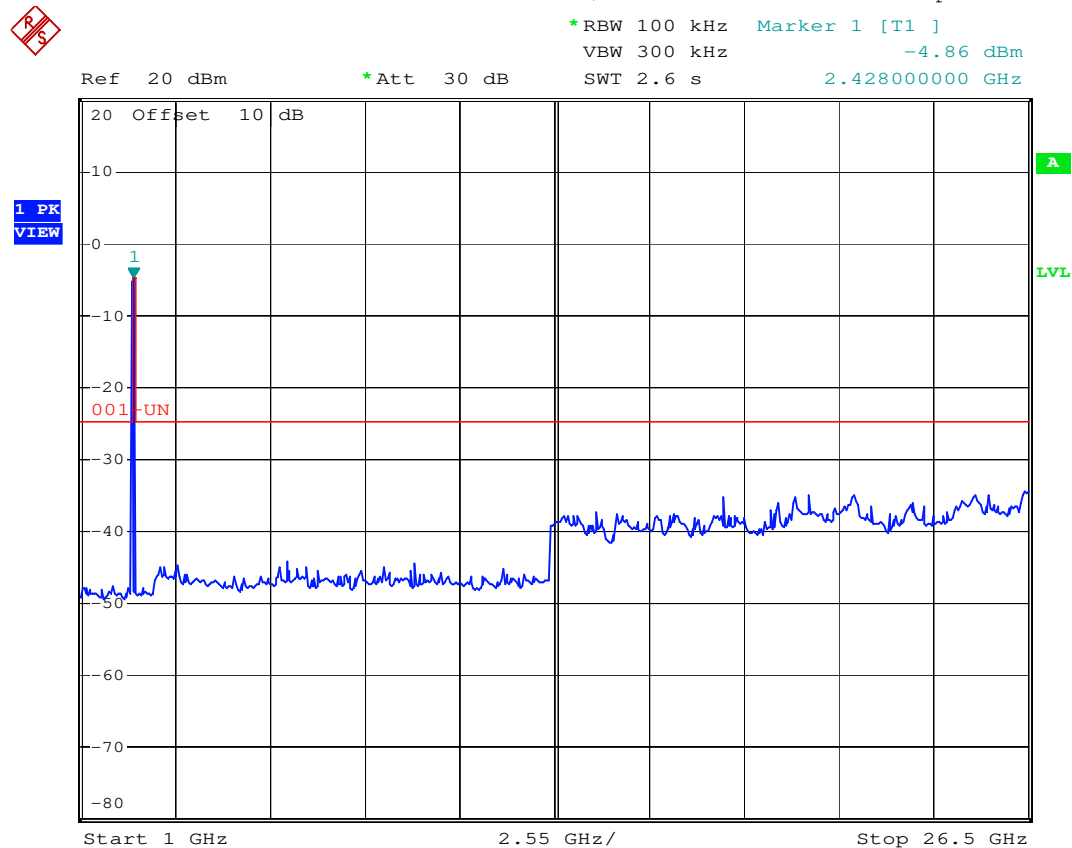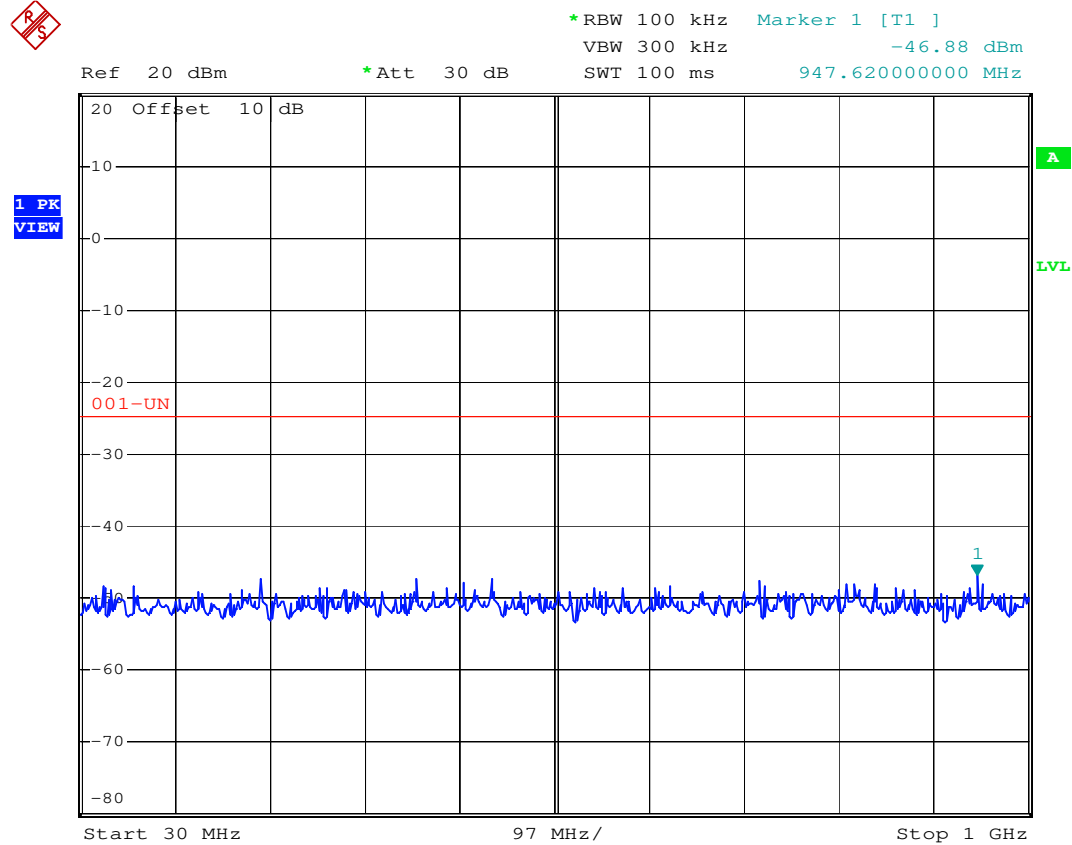

802.11n HT-40/ Channel Mid (Antenna2)

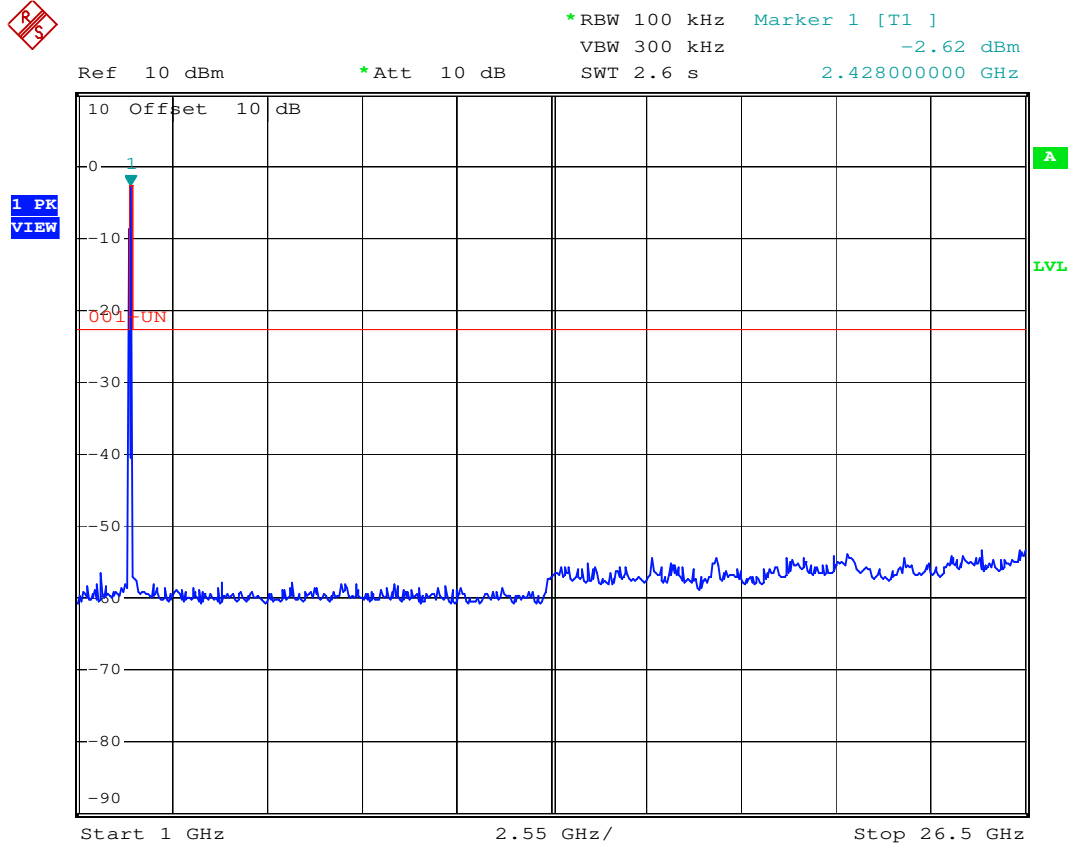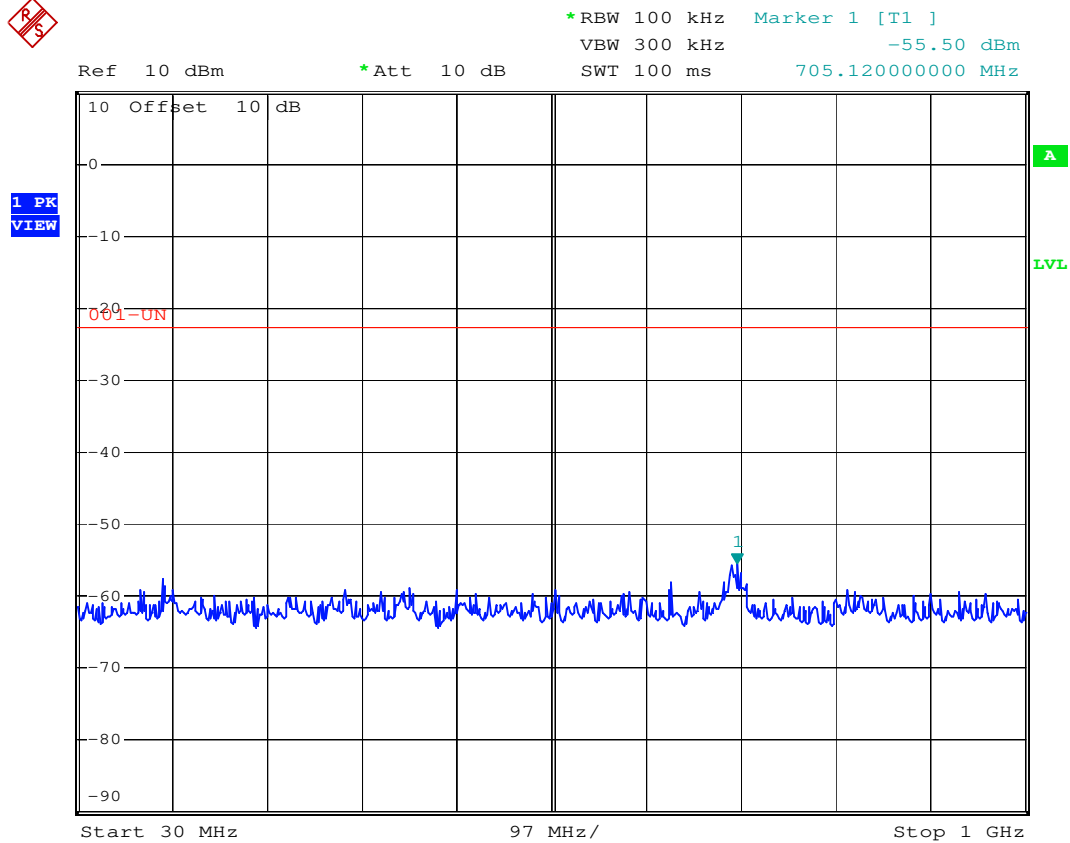

802.11n HT-40/ Channel High (Antenna2)

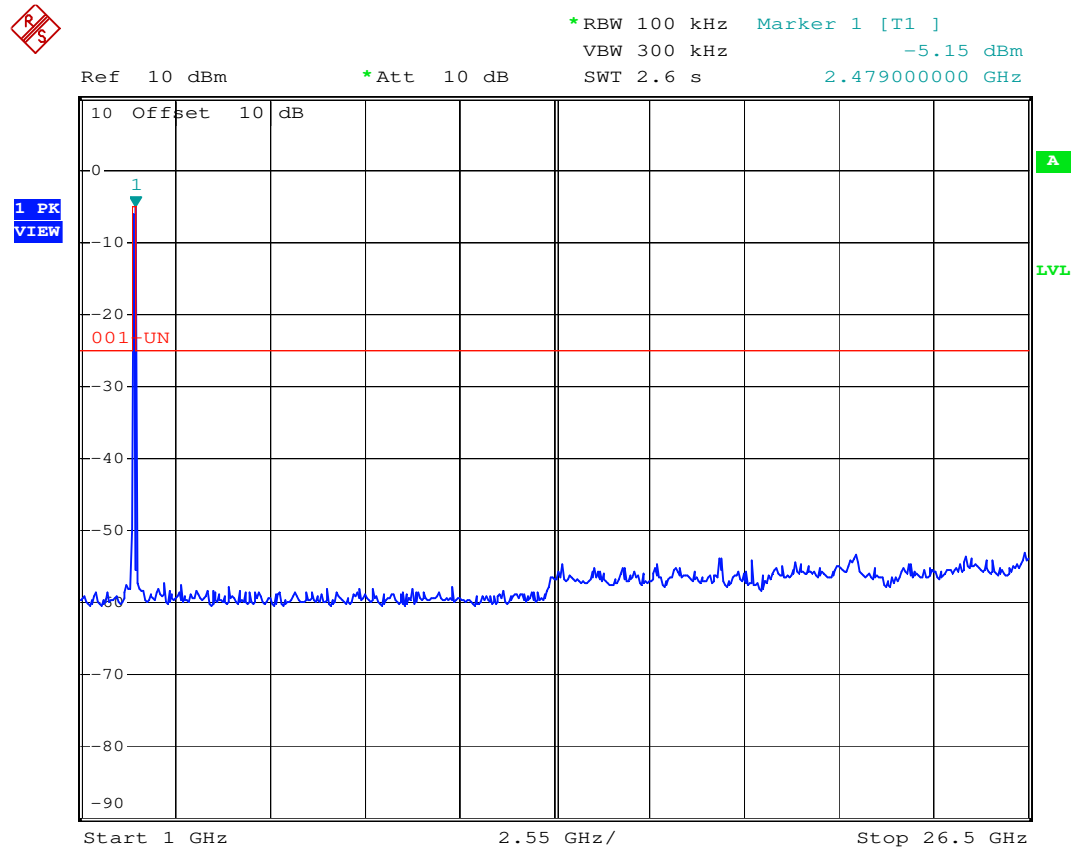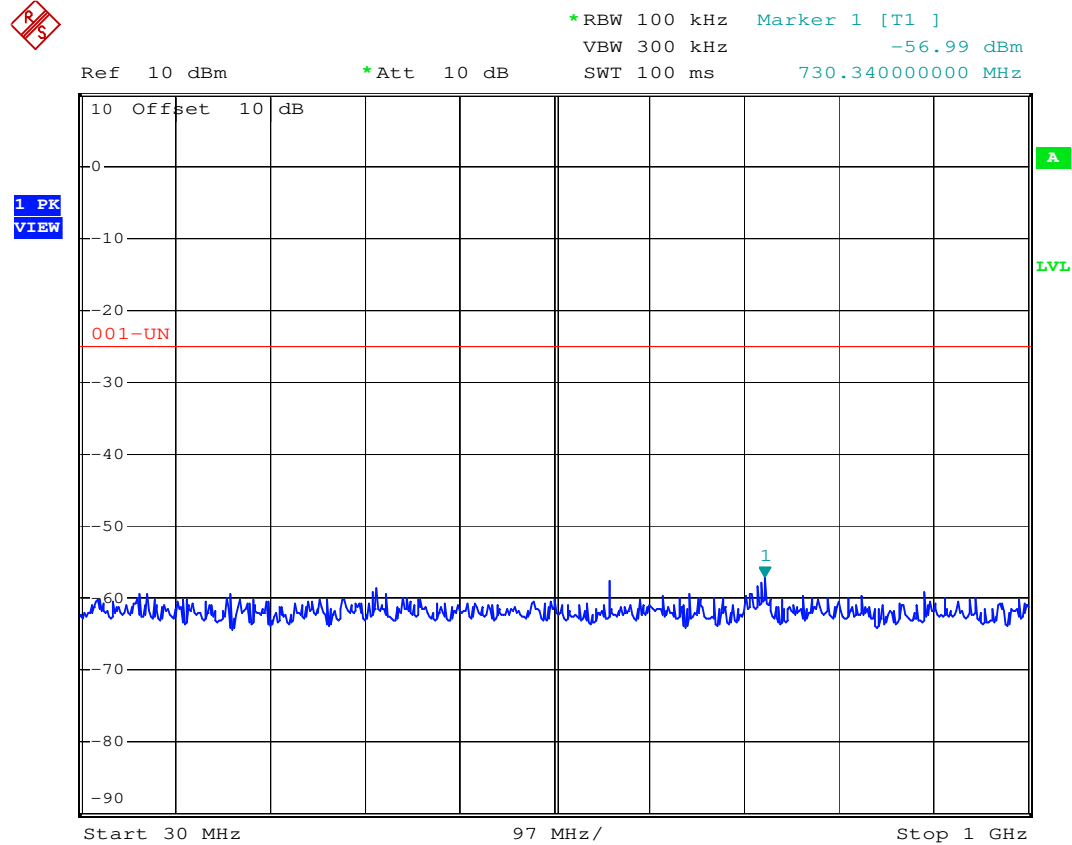

12. DUTY CYCLE

12.1 Standard Applicable

None. Reference only.

12.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/11/02	2018/11/01

12.3 Measurement Data

Test Date : May 18.2018 Temperature : 25 °C Humidity : 65 %

Duty Cycle Calculation



Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
802.11b	1.2	1.04	86.67	0.962	0.01
802.11g	0.38	0.2	52.63	5.000	1
802.11n HT-20 (ANT1)	0.36	0.19	52.78	5.263	1
802.11n HT-20 (ANT2)	0.37	0.2	54.05	5.000	1
802.11n HT-40 (ANT1)	0.29	0.12	41.38	8.333	1
802.11n HT-40 (ANT2)	0.29	0.12	41.38	8.333	1

Note:



1. VBW = 10 Hz, when the duty cycle is no less than 98%.
2. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is $>1/T$ where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Refer to the following page for data plots.



802.11b

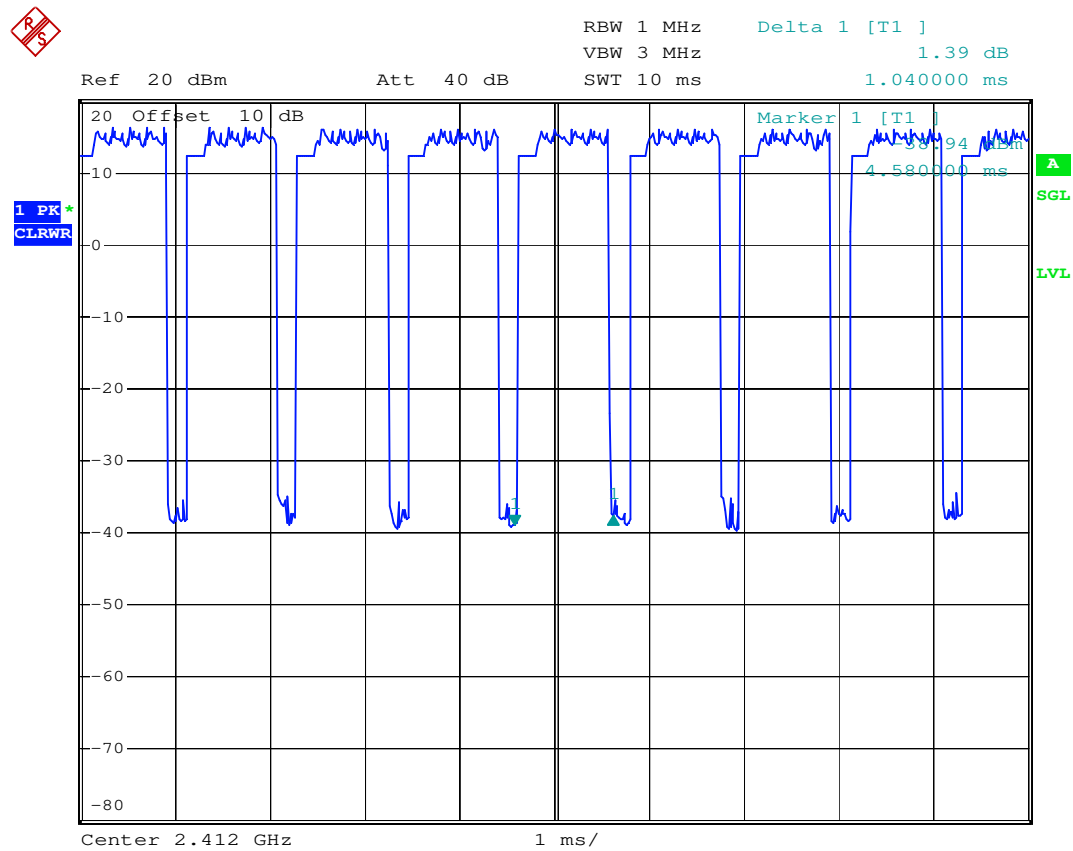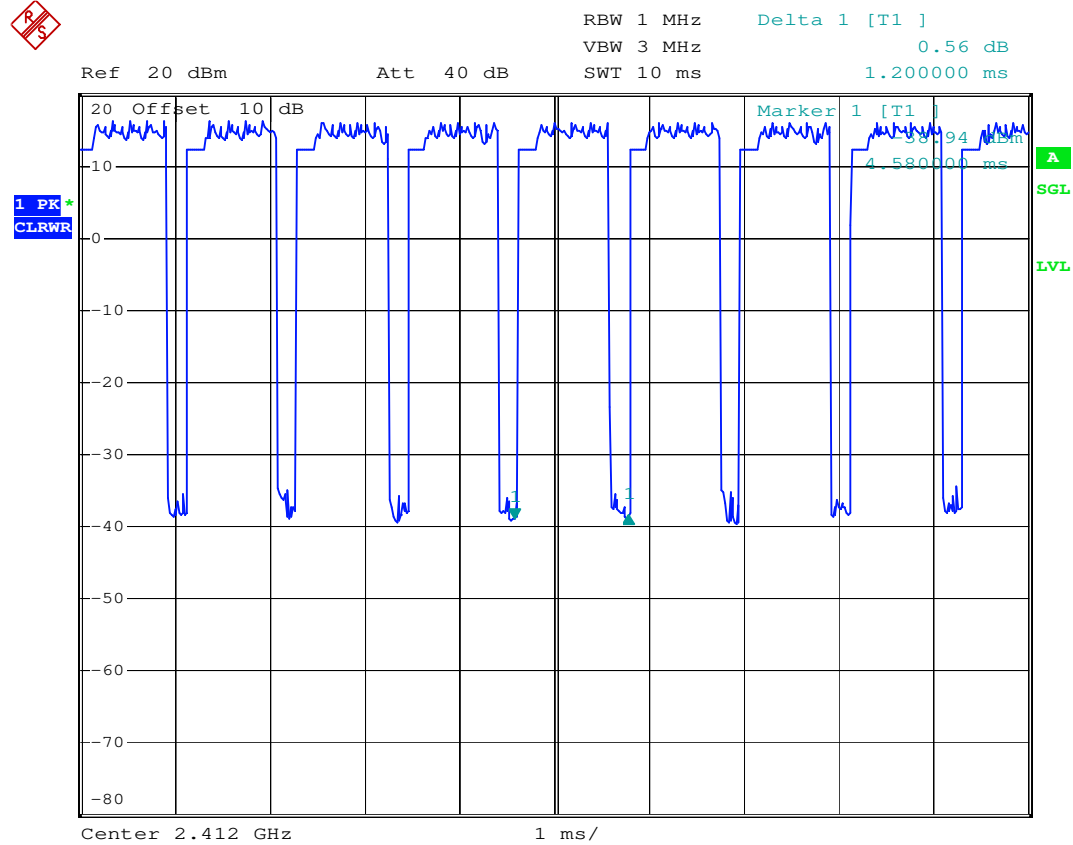



802.11g

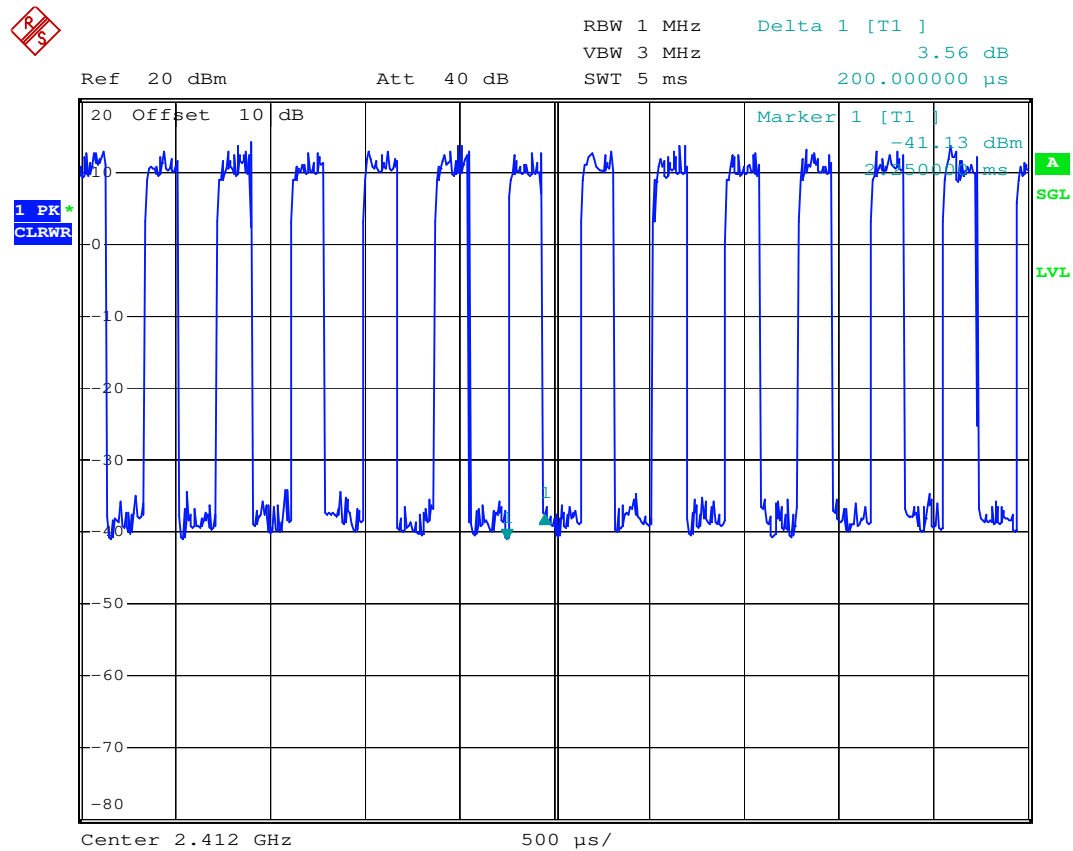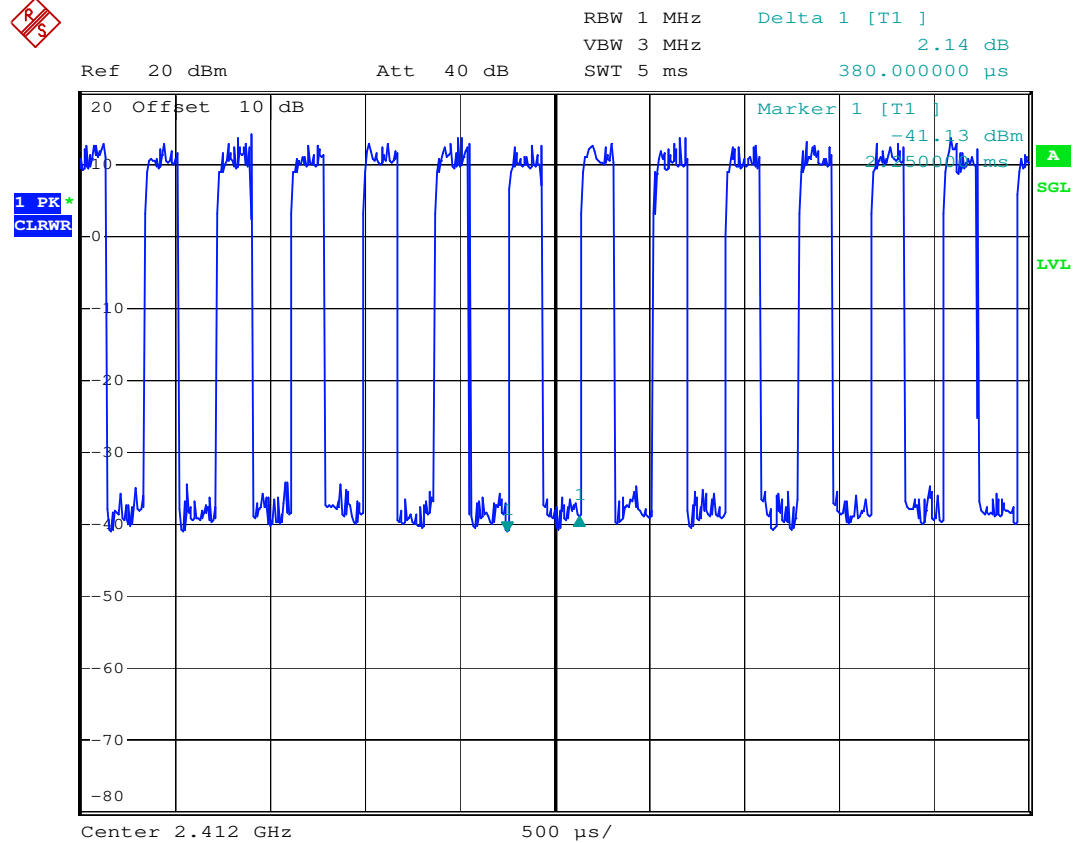



802.11n HT-20 (Antenna1)

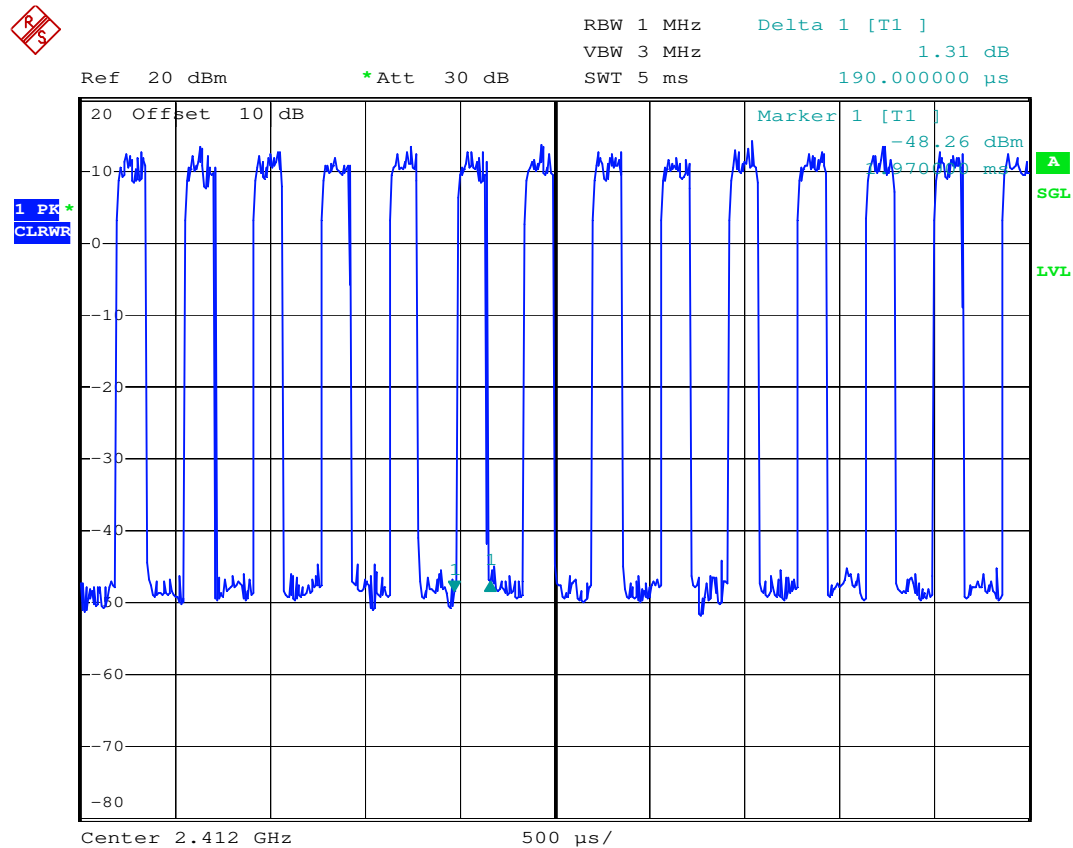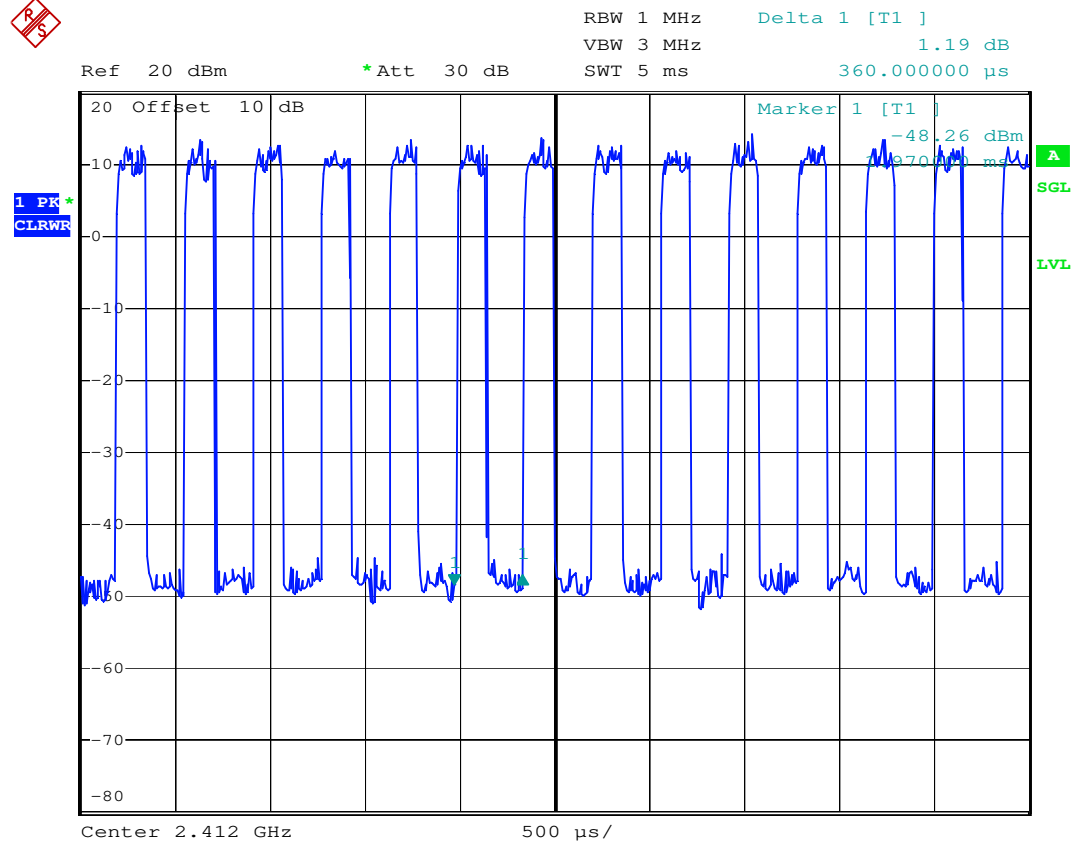


802.11n HT-20 (Antenna2)

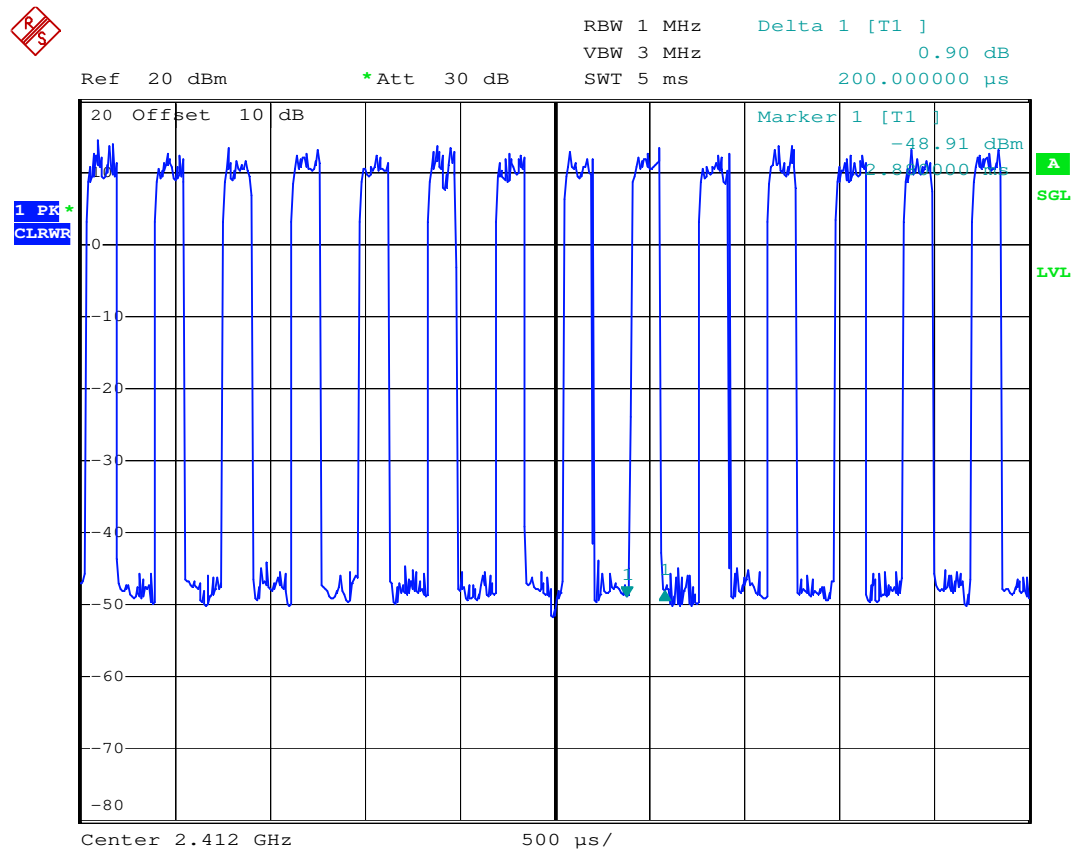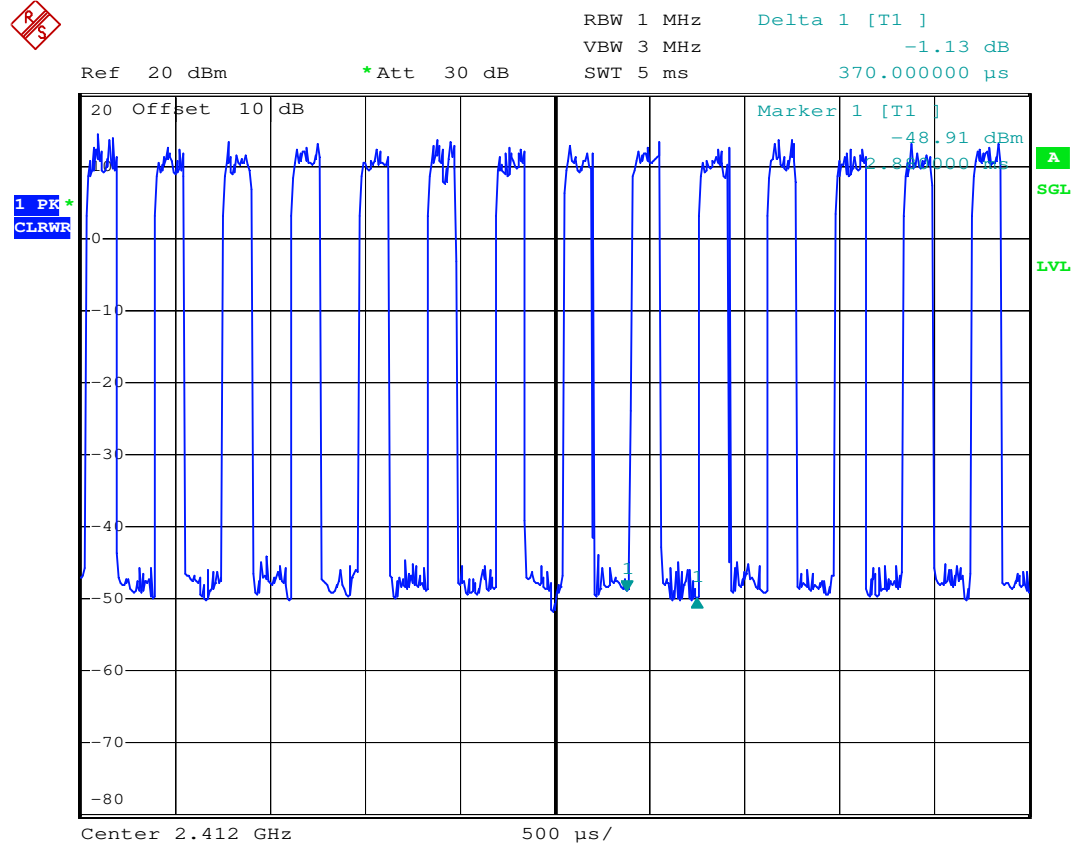

802.11n HT-40 (Antenna1)

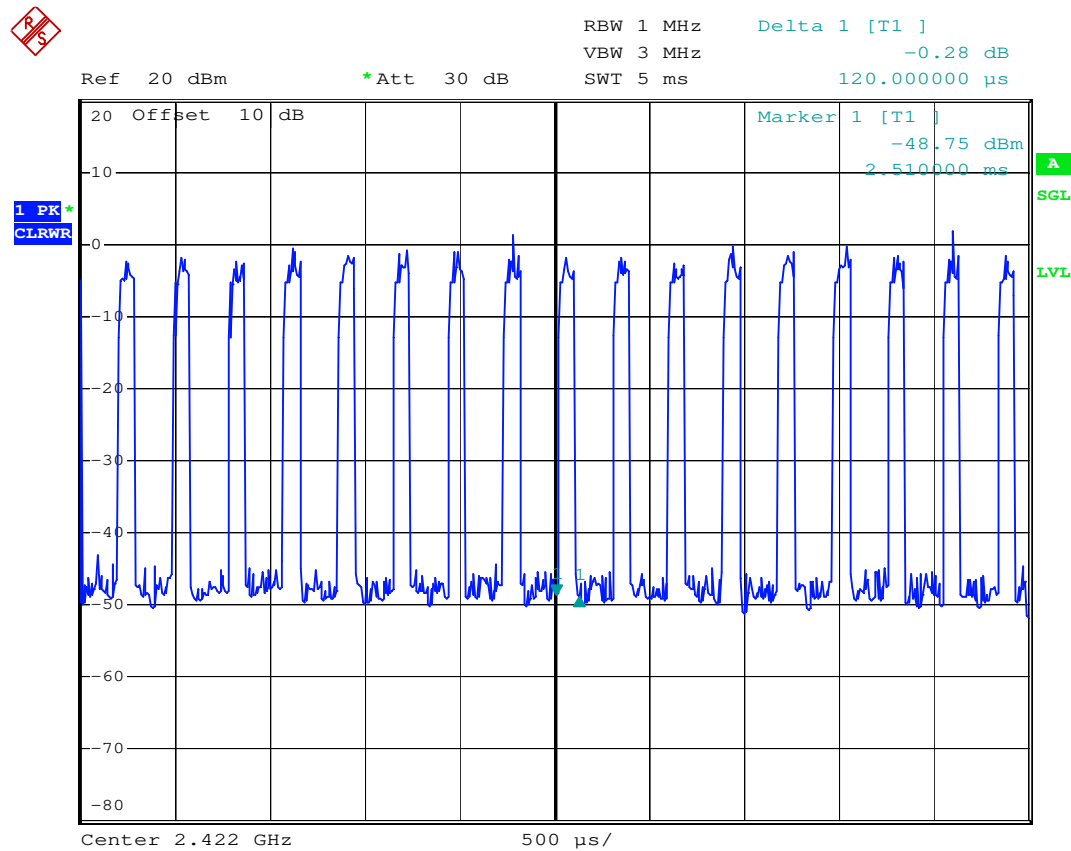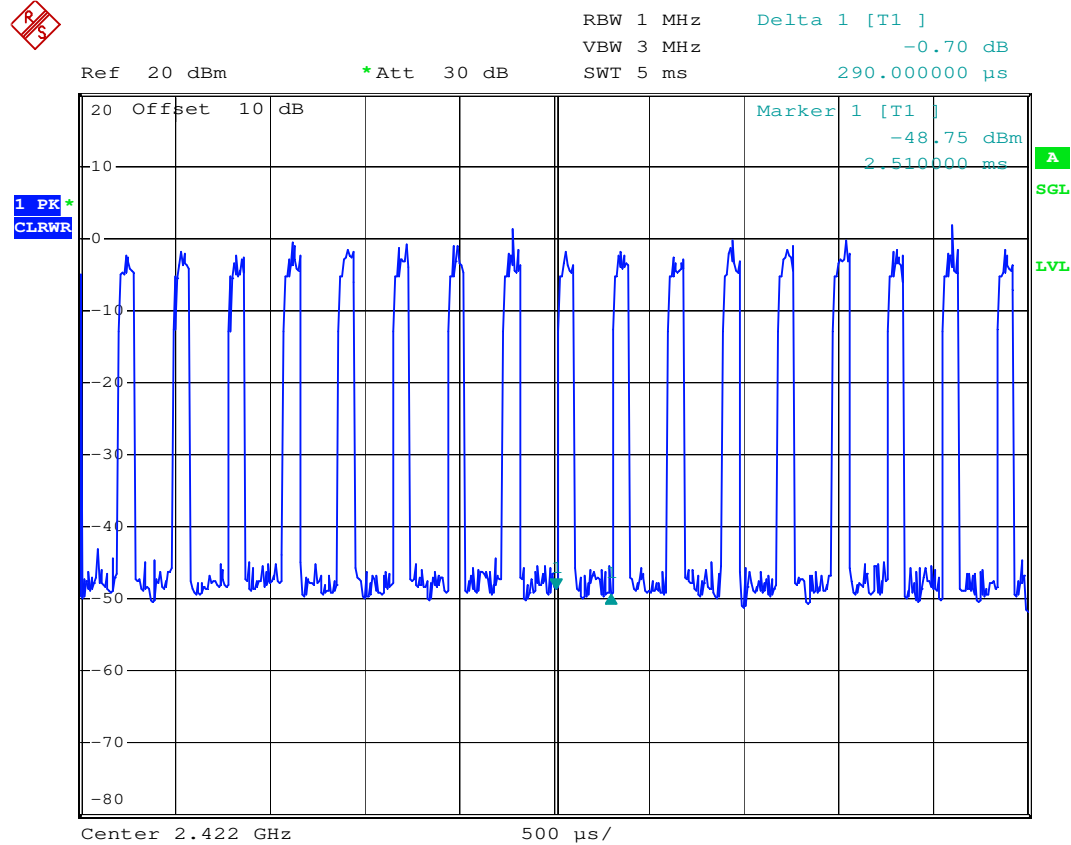



CONSTRUCTION PHOTOS OF EUT

(A) EUT (External view for LauncherPlus (Equipped with metal frame and USB Type A)

1.



2.



CONSTRUCTION PHOTOS OF EUT

3.



4.



CONSTRUCTION PHOTOS OF EUT

5.



6.



CONSTRUCTION PHOTOS OF EUT

7.




8.




CONSTRUCTION PHOTOS OF EUT

9.

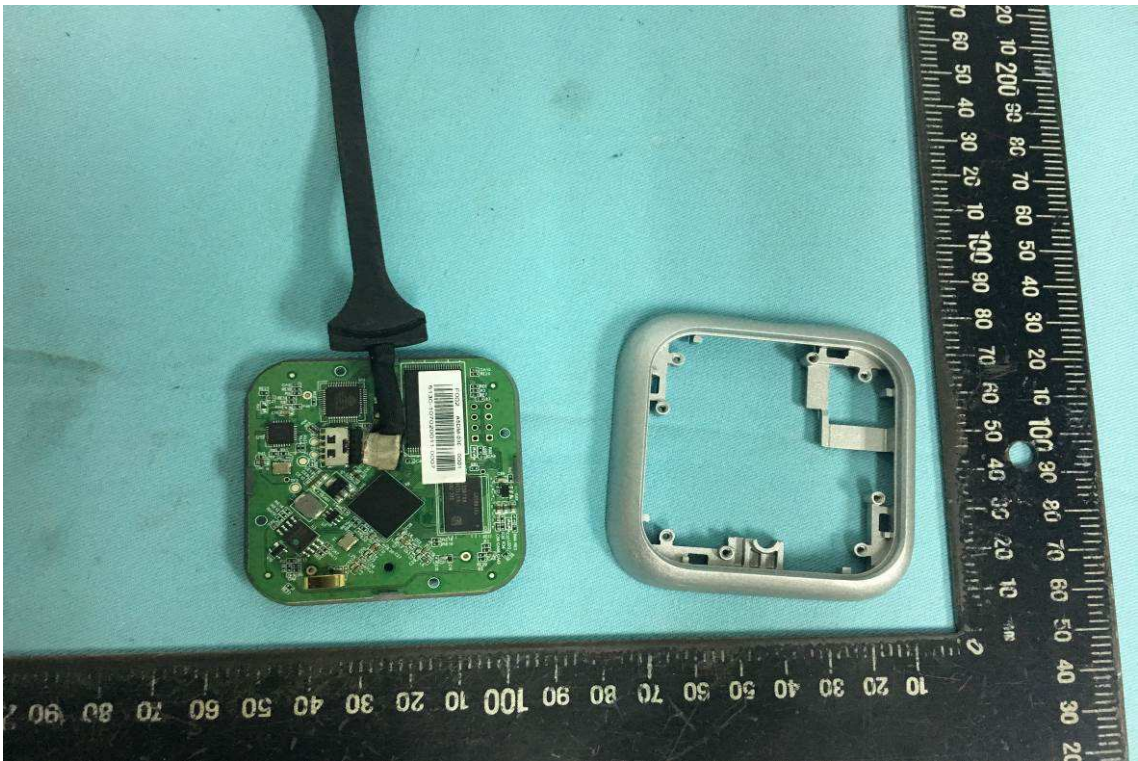


10.

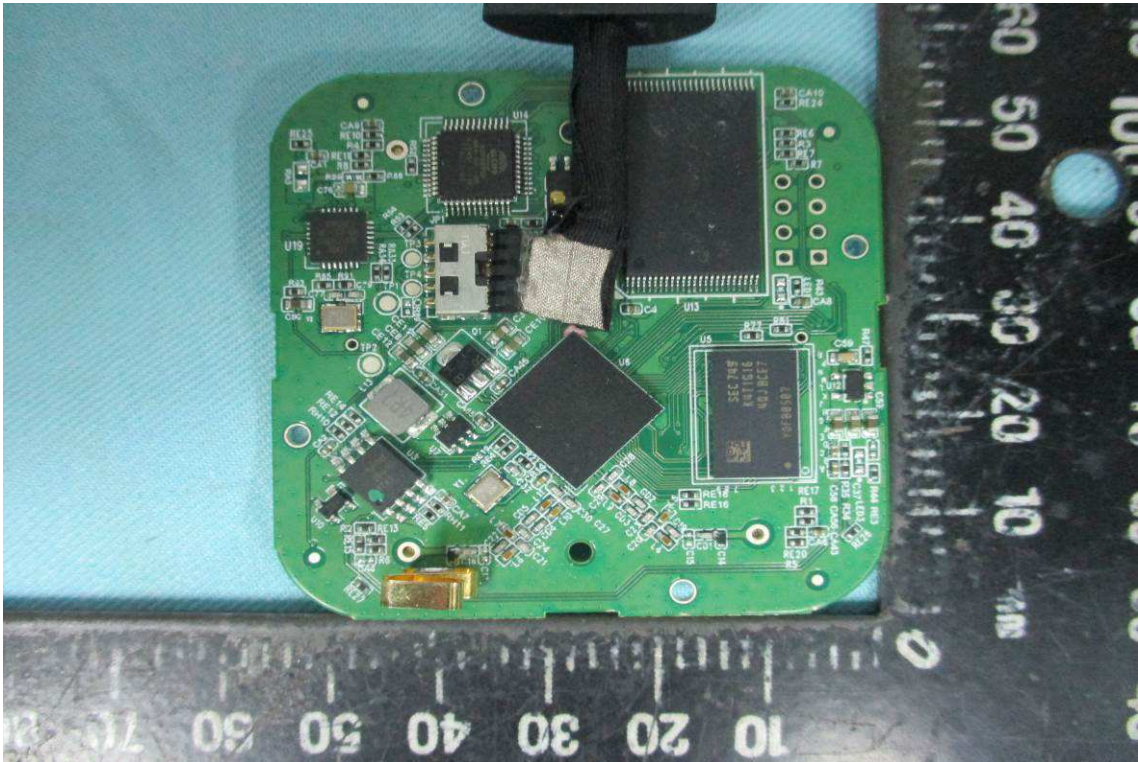


CONSTRUCTION PHOTOS OF EUT

11.

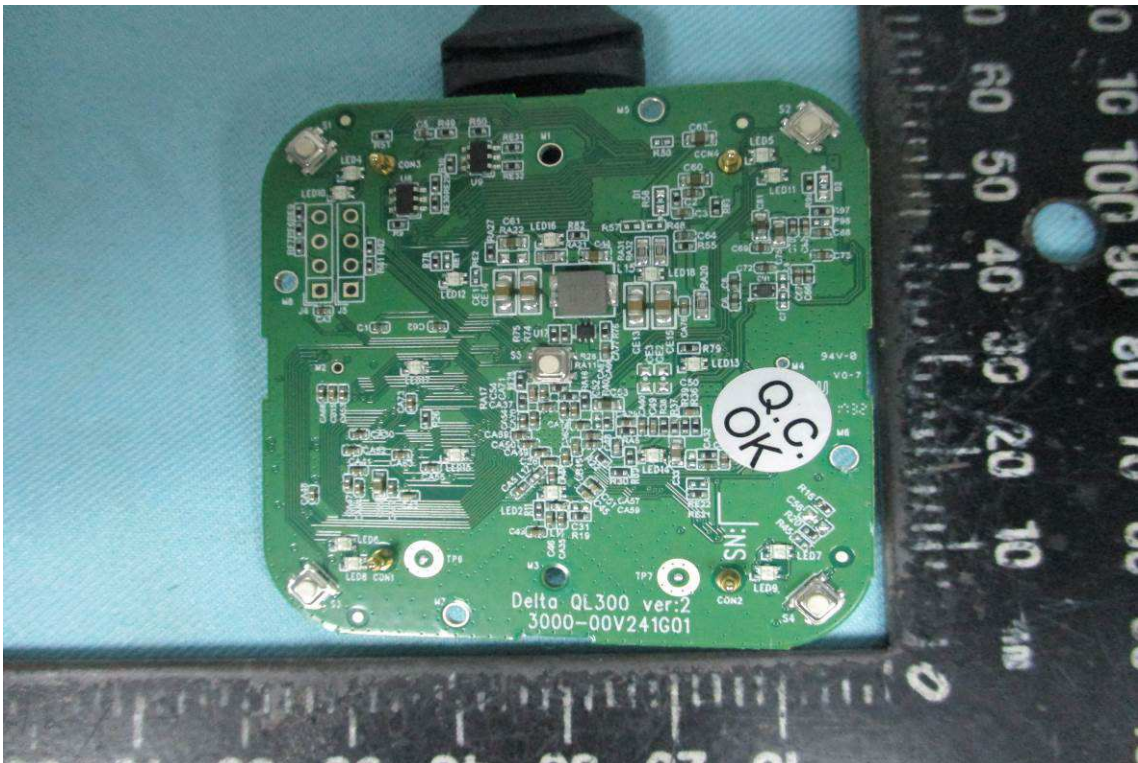

12.

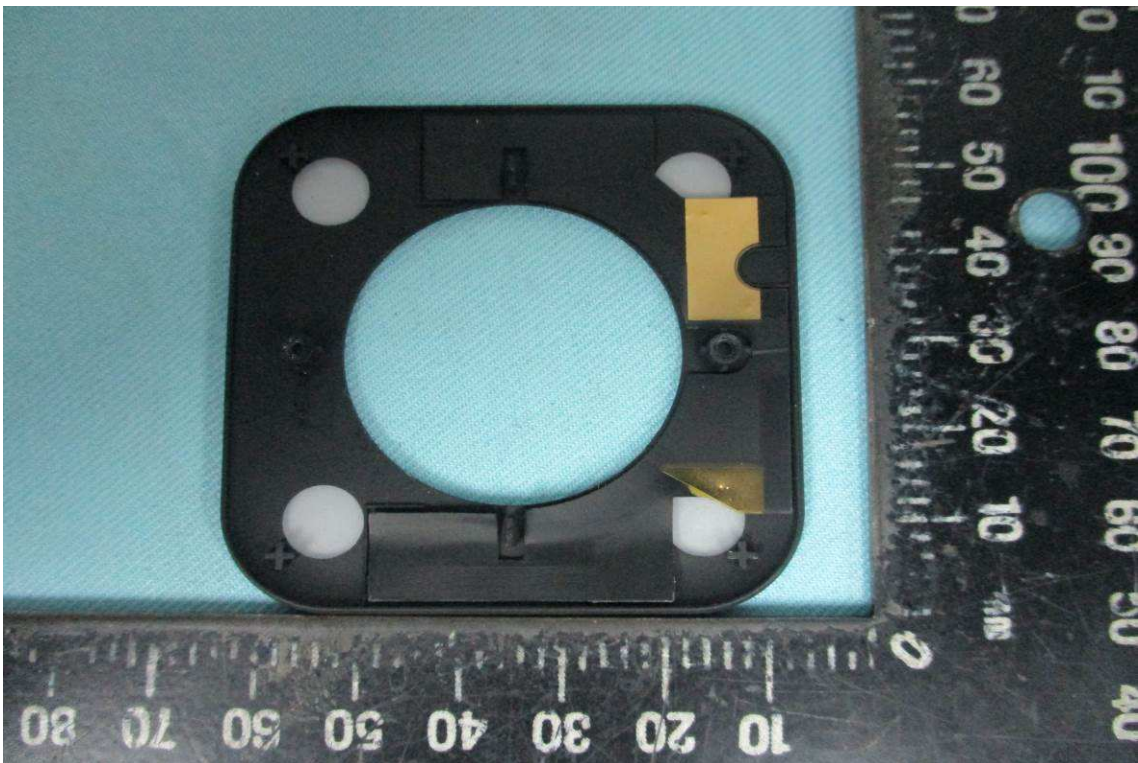

CONSTRUCTION PHOTOS OF EUT

B) EUT(External view for LauncherX (Equipped with plastic frame and USB Type A)

13.



14.




CONSTRUCTION PHOTOS OF EUT

15.



16.

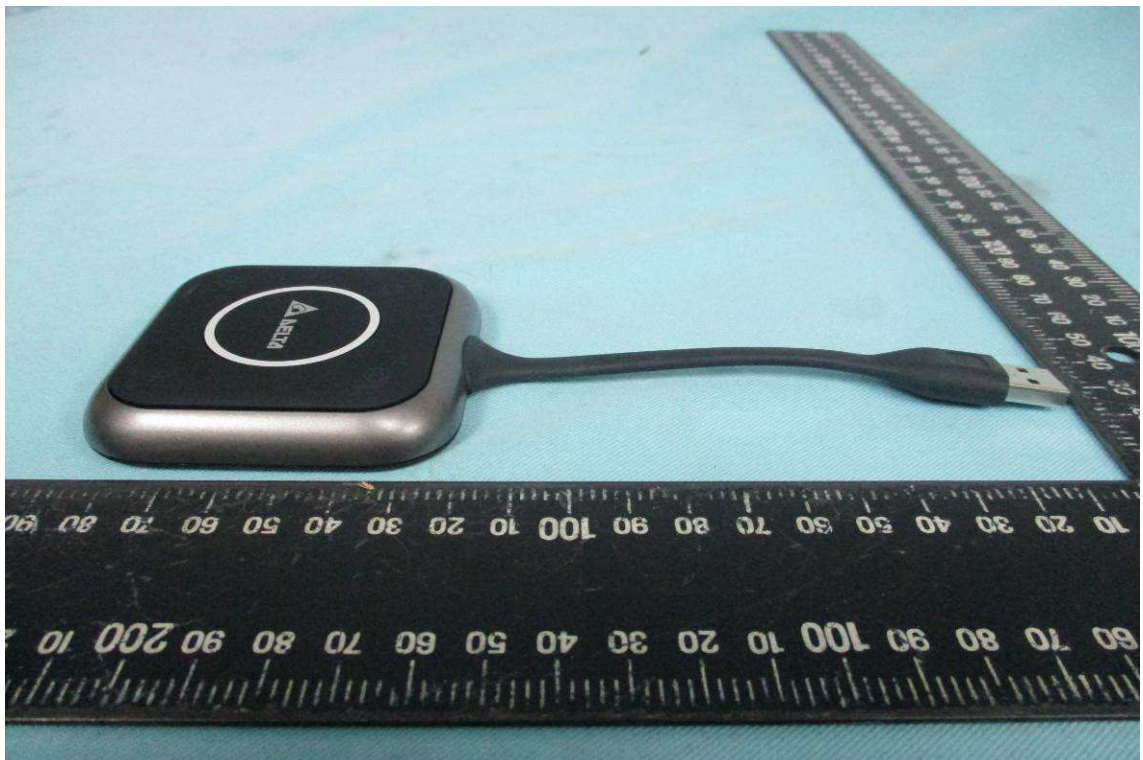

CONSTRUCTION PHOTOS OF EUT

17.



18.



CONSTRUCTION PHOTOS OF EUT

19.



20.




CONSTRUCTION PHOTOS OF EUT

21.




22.

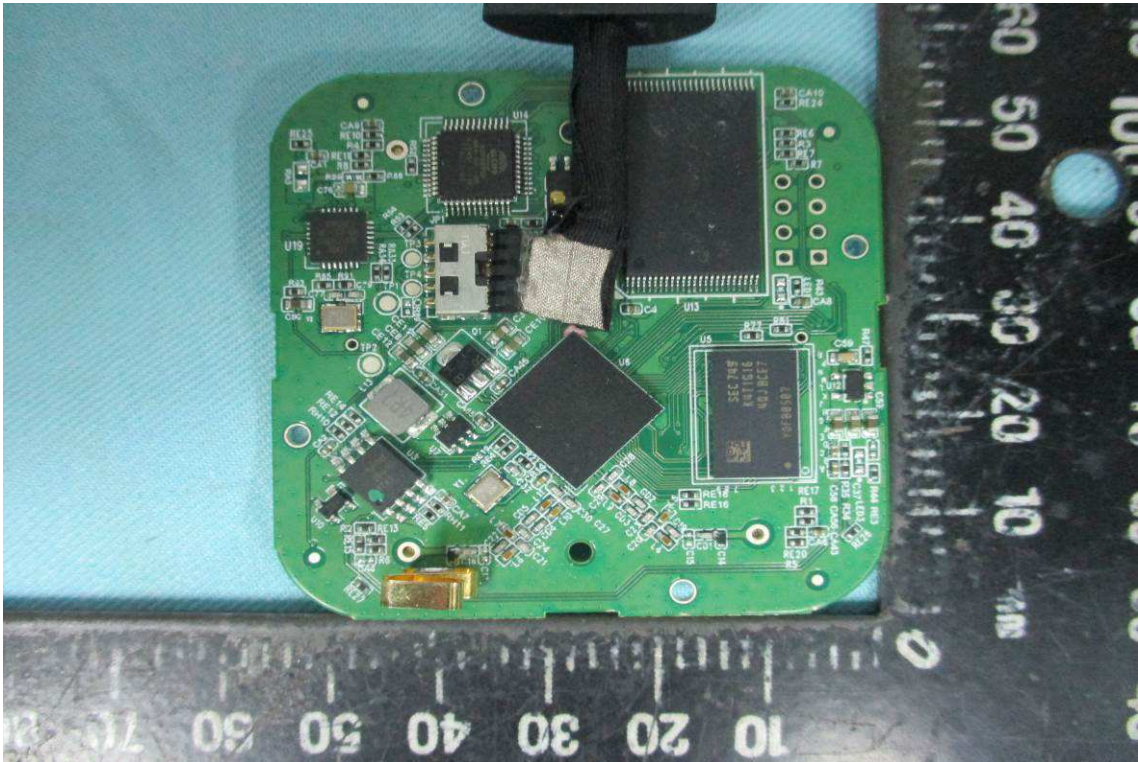


CONSTRUCTION PHOTOS OF EUT

23.

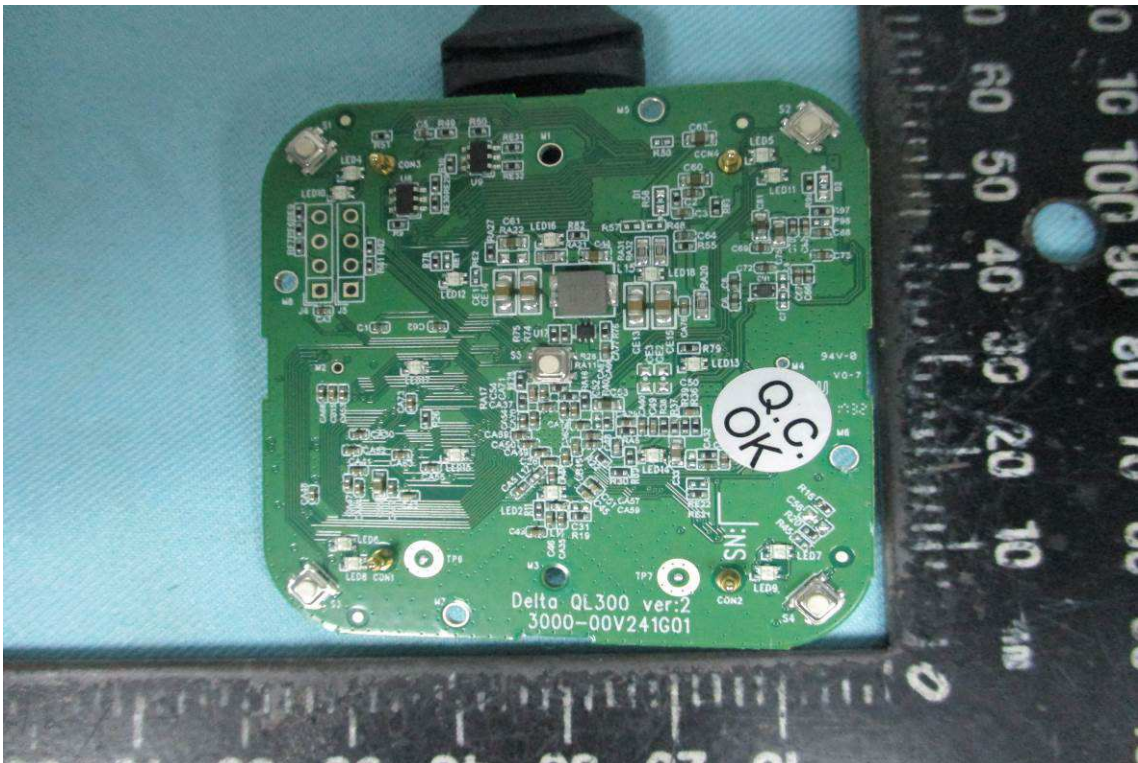


24.

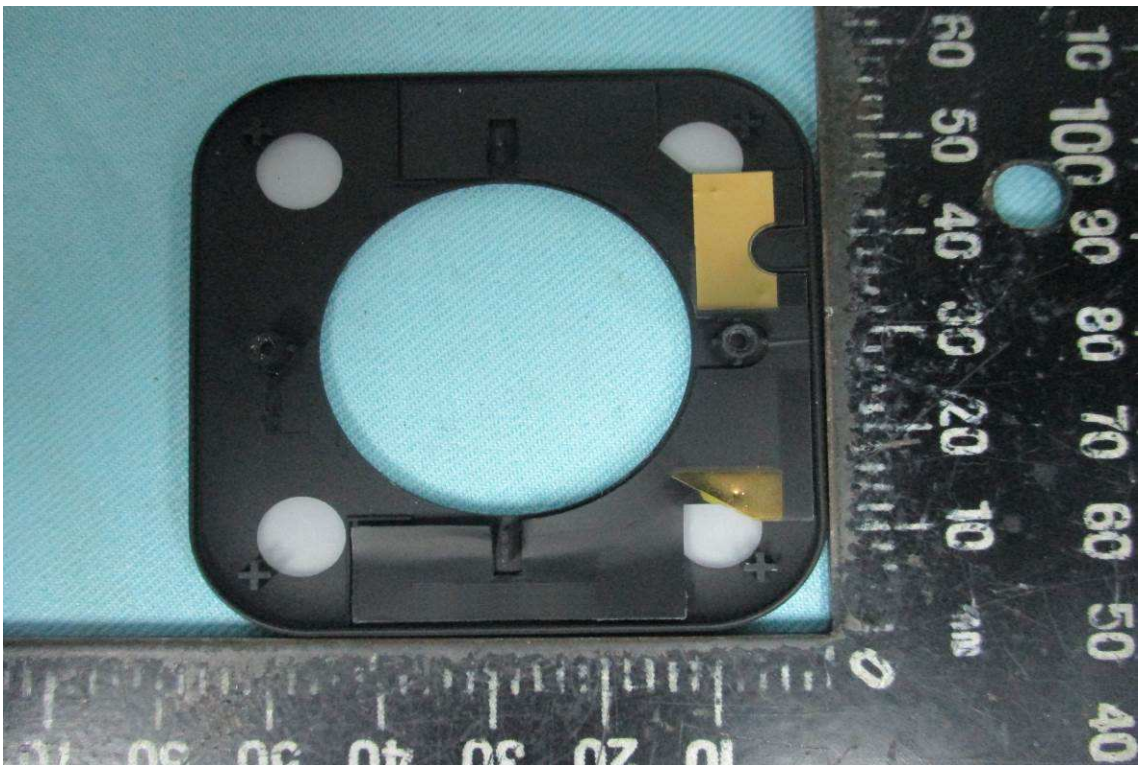


CONSTRUCTION PHOTOS OF EUT

25. Main Board - Bottom side (with flash IC)

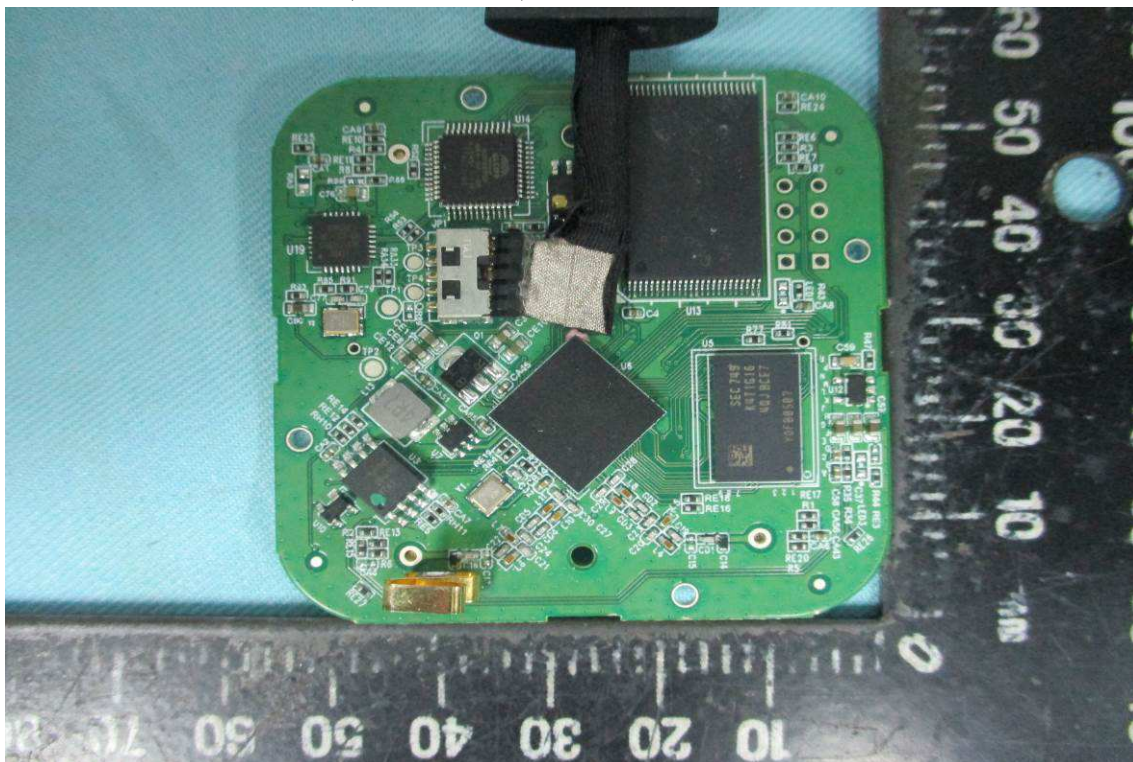

26. Main Board - Bottom side (without flash IC)

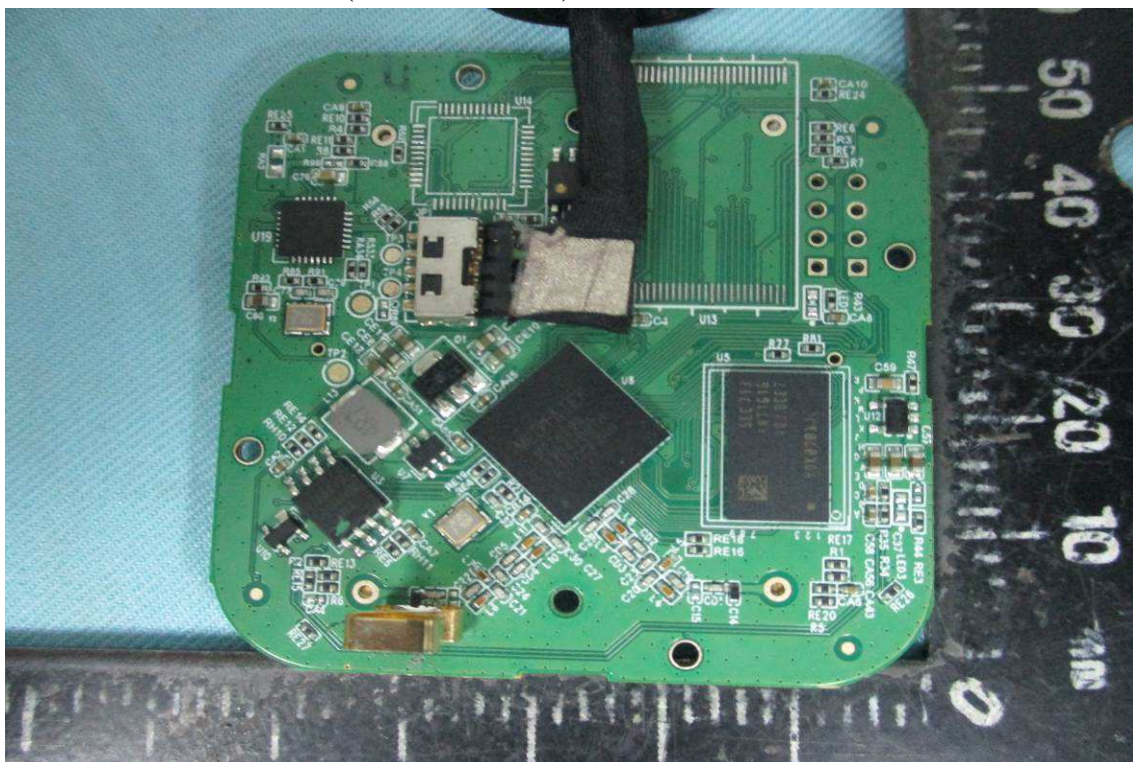

CONSTRUCTION PHOTOS OF EUT

27. Main Board - Top side

