

## FCC PART 15B, CLASS B TEST REPORT

For

**Sky Phone LLC**

1348 Washington Av. Suite 350, Miami Beach, Florida, United States

**FCC ID: 2ABOSELITE55M**

|                                                                                                                                                                                                                                                                                                                             |                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                                                                      | <b>Product Type:</b><br>4G smart phone |
| <b>Report Number:</b> RSZ170808004-00A                                                                                                                                                                                                                                                                                      |                                        |
| <b>Report Date:</b> 2017-08-28                                                                                                                                                                                                                                                                                              |                                        |
| <b>Reviewed By:</b> RF Engineer                                                                                                                                                                                                                                                                                             | Rocky Kang<br><i>Rocky Kang</i>        |
| <b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F., West Wing, Third Phase of Wanli Industrial<br>Building, Shihua Road, Futian Free Trade Zone,<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                        |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★". This report may contain data were produced under the subcontractor and shall be marked with an asterisk "△".

## **TABLE OF CONTENTS**

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                          | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 3         |
| OBJECTIVE .....                                          | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                       | 3         |
| TEST METHODOLOGY .....                                   | 3         |
| MEASUREMENT UNCERTAINTY .....                            | 3         |
| TEST FACILITY .....                                      | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                    | <b>5</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                  | 5         |
| EUT EXERCISE SOFTWARE .....                              | 5         |
| SPECIAL ACCESSORIES.....                                 | 5         |
| EQUIPMENT MODIFICATIONS .....                            | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                 | 5         |
| EXTERNAL I/O CABLE.....                                  | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                        | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                     | <b>7</b>  |
| <b>TEST EQUIPMENT LIST .....</b>                         | <b>8</b>  |
| <b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....</b>    | <b>9</b>  |
| APPLICABLE STANDARD .....                                | 9         |
| EUT SETUP .....                                          | 9         |
| EMI TEST RECEIVER SETUP.....                             | 9         |
| TEST PROCEDURE .....                                     | 9         |
| CORRECTED FACTOR & MARGIN CALCULATION .....              | 10        |
| TEST RESULTS SUMMARY .....                               | 10        |
| TEST DATA .....                                          | 10        |
| <b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS .....</b>   | <b>13</b> |
| APPLICABLE STANDARD .....                                | 13        |
| EUT SETUP .....                                          | 13        |
| EMI TEST RECEIVER SETUP.....                             | 14        |
| TEST PROCEDURE .....                                     | 14        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....           | 14        |
| TEST RESULTS SUMMARY .....                               | 14        |
| TEST DATA .....                                          | 15        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The Sky Phone LLC's product, model number: *Elite 5.5M (FCC ID: 2ABOSELITE55M)* or the "EUT" in this report was a *4G smart phone*, which was measured approximately: 15.2 cm (L) × 7.6 cm (W) × 0.78 cm (H), rated with input voltage: DC 3.8 V battery or DC 5V from adapter. The highest operating frequency is 2480 MHz.

Adapter Information:

Model: TPA-97050100UU

Input: AC 100-240V, 50/60Hz, 0.15A

Output: DC 5V, 1 A

*Notes: This series products model: Elite 5.5C, Elite 5.5B, Elite 5.5T and Elite 5.5M are identical; they have the same or similar appearance, structure, PCB, Material and function to the testing products, only named differently. Model Elite 5.5M was selected for fully testing, the detailed information can be referred to the attached declaration which was stated and guaranteed by the applicant.*

*\*All measurement and test data in this report was gathered from production sample serial number: 1701884 (Assigned by BACL). The EUT supplied by the applicant was received on 2017-08-08.*

### Objective

This test report is prepared on behalf of *Sky Phone LLC* in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 15.247 DTS and Part 22H/24E PCE submissions with FCC ID: 2ABOSELITE55M.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

| Parameter               | uncertainty |
|-------------------------|-------------|
| Conducted Emissions     | ±1.95dB     |
| All emissions, radiated | ±4.88dB     |

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP(Lab code: 200707-0), the FCC Designation No. CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT operation mode: Downloading (data transfer with computer)

### EUT Exercise Software

“BurnIn test v5.3” exercise software was used.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


| Manufacturer | Description   | Model       | Serial Number            |
|--------------|---------------|-------------|--------------------------|
| DELL         | PC            | VOSTRO 220S | 127BP2X                  |
| DELL         | LCD Monitor   | E178WFPC    | CN-OWY564-64180-7C4-2SQH |
| DELL         | Keyboard      | L100        | CNORH656658907BL05DC     |
| DELL         | Mouse         | MOC5UO      | G1900NKD                 |
| SAST         | Modem         | AEM-2100    | 0293                     |
| Kingston     | Micro SD card | 1 GB        | N/A                      |

## External I/O Cable

| Cable Description                               | Length (m) | From/Port | To            |
|-------------------------------------------------|------------|-----------|---------------|
| Un-Shielding Detachable USB Cable               | 1.5        | Host PC   | Mouse         |
| Un-Shielding Detachable Serial Cable            | 1.5        | Host PC   | Modem         |
| Un-Shielding Detachable K/B Cable               | 1.5        | Host PC   | Keyboard      |
| Un-Shielding Detachable VGA Cable               | 1.5        | Host PC   | LCD Monitor   |
| Shielding Detachable USB Cable With Magnet Ring | 1.0        | EUT       | Host PC       |
| Un-shielding Un-detachable DC Cable             | 1.0        | Modem     | Modem Adapter |

## Block Diagram of Test Setup

For conducted emission:

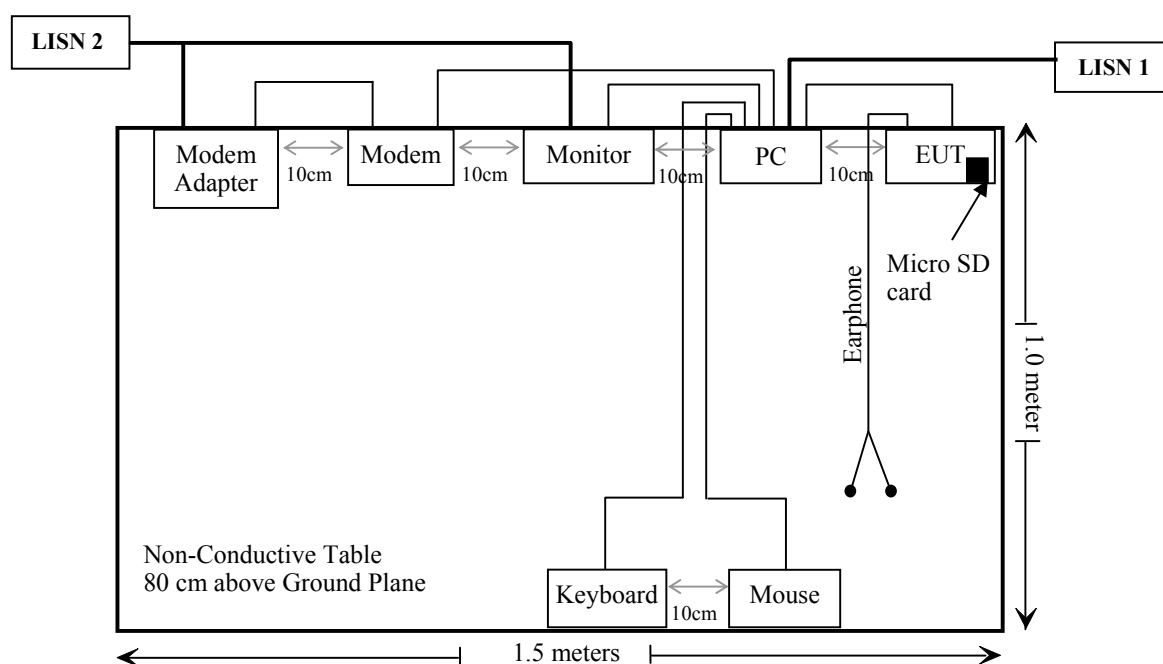

**SUMMARY OF TEST RESULTS**

| FCC Rules | Description of Test         | Results    |
|-----------|-----------------------------|------------|
| §15.107   | AC Line Conducted Emissions | Compliance |
| §15.109   | Radiated Spurious Emissions | Compliance |

**TEST EQUIPMENT LIST**

| Manufacturer                           | Description              | Model                 | Serial Number          | Calibration Date | Calibration Due Date |
|----------------------------------------|--------------------------|-----------------------|------------------------|------------------|----------------------|
| <b>AC Line Conducted Emission Test</b> |                          |                       |                        |                  |                      |
| Rohde & Schwarz                        | EMI Test Receiver        | ESCS30                | 100176                 | 2016-10-19       | 2017-10-19           |
| Rohde & Schwarz                        | LISN                     | ENV216                | 3560.6650.12-101613-Yb | 2016-12-07       | 2017-12-07           |
| Rohde & Schwarz                        | Transient Limiter        | ESH3Z2                | DE25985                | 2017-05-21       | 2017-11-19           |
| Rohde & Schwarz                        | CE Test software         | EMC 32                | V8.53.0                | NCR              | NCR                  |
| N/A                                    | Conducted Emission Cable | N/A                   | UF A210B-1-0720-504504 | 2017-05-12       | 2017-11-12           |
| <b>Radiated Emission Test</b>          |                          |                       |                        |                  |                      |
| Sunol Sciences                         | Horn Antenna             | DRH-118               | A052604                | 2014-12-29       | 2017-12-28           |
| Rohde & Schwarz                        | Signal Analyzer          | FSIQ26                | 8386001028             | 2017-04-24       | 2018-04-24           |
| Sunol Sciences                         | Bi-log Antenna           | JB1                   | A040904-2              | 2014-12-17       | 2017-12-16           |
| Mini                                   | Pre-amplifier            | ZVA-183-S+            | 5969001149             | 2017-02-14       | 2018-02-14           |
| HP                                     | Amplifier                | HP8447E               | 1937A01046             | 2017-05-21       | 2017-11-19           |
| Rohde & Schwarz                        | EMI Test Receiver        | ESCI                  | 101120                 | 2016-12-07       | 2017-12-07           |
| Ducommun technologies                  | RF Cable                 | UFA210A-1-4724-30050U | MFR64369 223410-001    | 2017-05-21       | 2017-11-19           |
| Ducommun technologies                  | RF Cable                 | 104PEA                | 218124002              | 2017-05-21       | 2017-11-19           |
| Ducommun technologies                  | RF Cable                 | RG-214                | 1                      | 2017-05-21       | 2017-11-19           |
| Ducommun technologies                  | RF Cable                 | RG-214                | 2                      | 2017-05-22       | 2017-11-22           |


\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

According to FCC §15.107

### EUT Setup

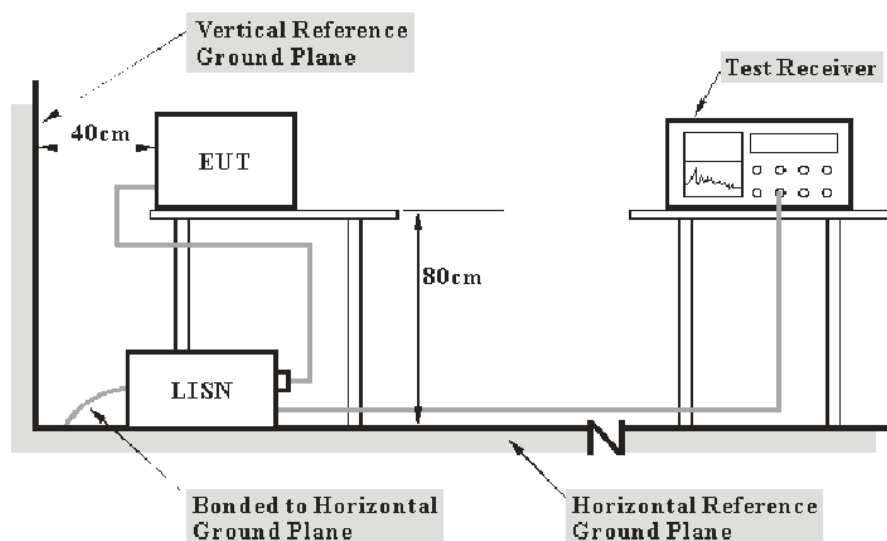

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the host PC was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL.,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 56 %      |
| ATM Pressure:      | 101.0 kPa |

*The testing was performed by Dylan Li on 2017-08-20.*

EUT Operation Mode: Downloading

AC 120V/60 Hz, Line


EMI Auto Test L

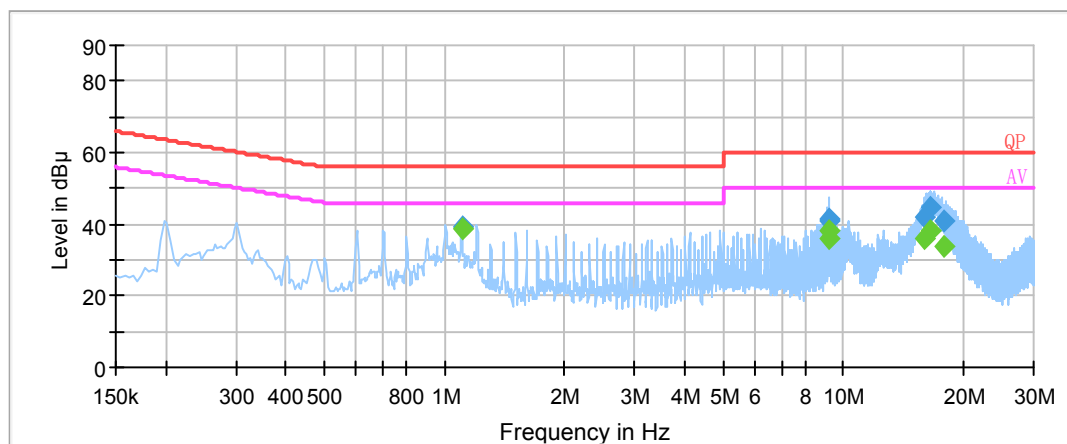

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 1.105410        | 39.0                       | 20.1                   | 56.0         | 17.0        | QP                    |
| 9.247250        | 41.0                       | 20.0                   | 60.0         | 19.0        | QP                    |
| 9.248750        | 41.7                       | 20.0                   | 60.0         | 18.3        | QP                    |
| 15.989630       | 42.2                       | 20.1                   | 60.0         | 17.8        | QP                    |
| 16.494590       | 44.7                       | 20.1                   | 60.0         | 15.3        | QP                    |
| 17.896470       | 40.8                       | 20.2                   | 60.0         | 19.2        | QP                    |
| 1.105410        | 38.6                       | 20.1                   | 46.0         | 7.5         | Ave.                  |
| 9.247250        | 35.8                       | 20.0                   | 50.0         | 14.2        | Ave.                  |
| 9.248750        | 38.4                       | 20.0                   | 50.0         | 11.6        | Ave.                  |
| 15.989630       | 36.0                       | 20.1                   | 50.0         | 14.0        | Ave.                  |
| 16.494590       | 38.3                       | 20.1                   | 50.0         | 11.7        | Ave.                  |
| 17.896470       | 33.6                       | 20.2                   | 50.0         | 16.4        | Ave.                  |

**AC 120V/60 Hz, Neutral**

EMI Auto Test N

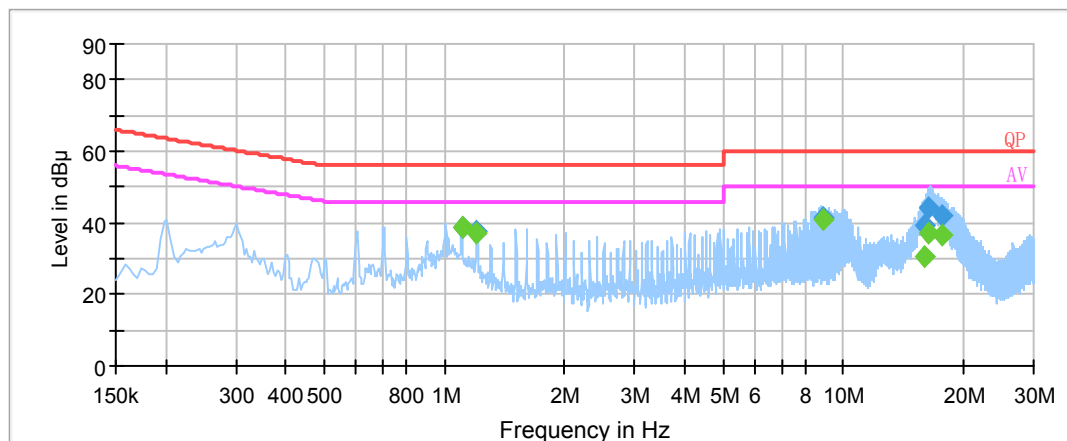

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 1.105410        | 38.9                       | 20.1                   | 56.0         | 17.1        | QP                    |
| 1.207910        | 37.5                       | 20.1                   | 56.0         | 18.5        | QP                    |
| 8.949250        | 41.4                       | 20.0                   | 60.0         | 18.6        | QP                    |
| 15.931950       | 39.5                       | 20.1                   | 60.0         | 20.5        | QP                    |
| 16.394530       | 44.1                       | 20.1                   | 60.0         | 15.9        | QP                    |
| 17.695030       | 42.2                       | 20.2                   | 60.0         | 17.8        | QP                    |
| 1.105410        | 38.6                       | 20.1                   | 46.0         | 7.5         | Ave.                  |
| 1.207910        | 37.3                       | 20.1                   | 46.0         | 8.7         | Ave.                  |
| 8.949250        | 40.9                       | 20.0                   | 50.0         | 9.1         | Ave.                  |
| 15.931950       | 30.3                       | 20.1                   | 50.0         | 19.7        | Ave.                  |
| 16.394530       | 37.2                       | 20.1                   | 50.0         | 12.8        | Ave.                  |
| 17.695030       | 36.6                       | 20.2                   | 50.0         | 13.4        | Ave.                  |

**Note:**

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude


## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.109

### EUT Setup

Below 1GHz:

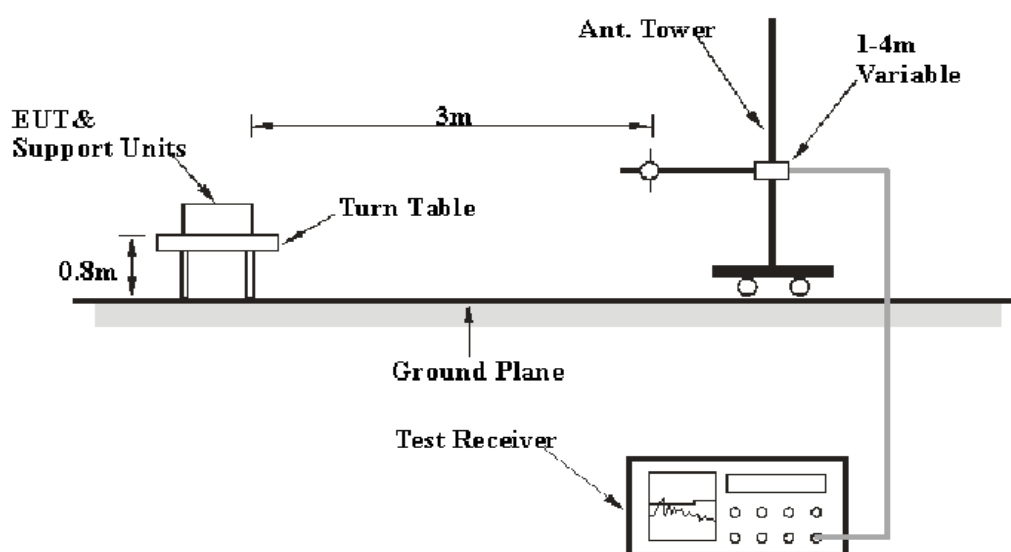

Above 1GHz:

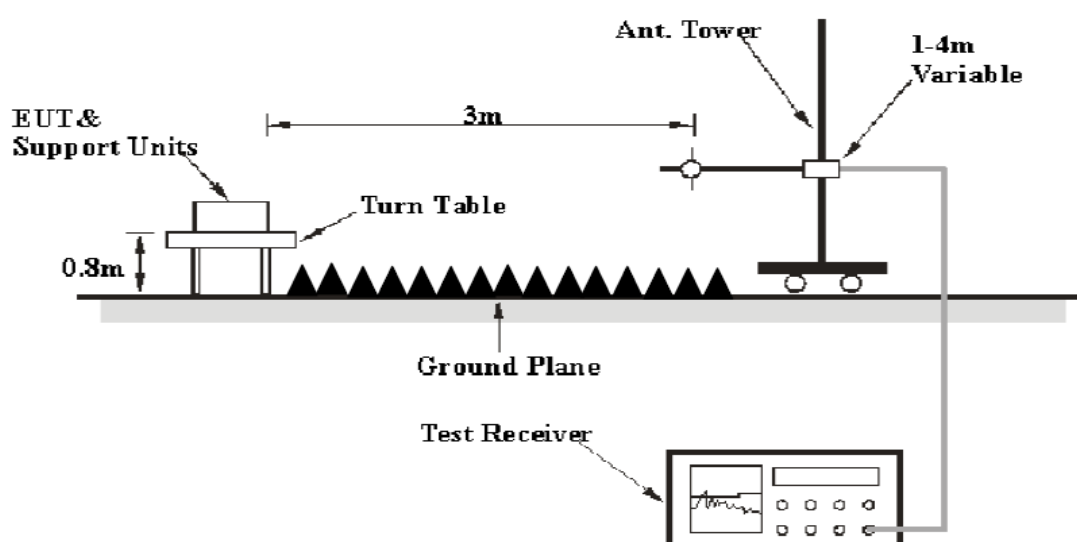

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to 12.4 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK       |
|                   | 1MHz    | 10 Hz     | /       | Ave.     |

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 56 %      |
| <b>ATM Pressure:</b>      | 101.0 kPa |

The testing was performed by Dylan Li on 2017-08-20.

EUT Operation Mode: Downloading

**30MHz – 12.4 GHz:**

| Frequency (MHz) | Receiver       |                       | Turntable Degree | Rx Antenna |               | Corrected Factor (dB/m) | Corrected Amplitude (dBuV/m) | FCC Part 15B   |             |
|-----------------|----------------|-----------------------|------------------|------------|---------------|-------------------------|------------------------------|----------------|-------------|
|                 | Reading (dBuV) | Detector (PK/QP/Ave.) |                  | Height (m) | Polar (H / V) |                         |                              | Limit (dBuV/m) | Margin (dB) |
| 31.49           | 32.16          | QP                    | 266.0            | 1.0        | V             | -0.7                    | 31.46                        | 40.00          | 8.54        |
| 38.83           | 31.83          | QP                    | 282.0            | 1.1        | V             | -5.3                    | 26.53                        | 40.00          | 13.47       |
| 306.81          | 40.59          | QP                    | 101.0            | 1.1        | H             | -2.8                    | 37.79                        | 46.00          | 8.21        |
| 549.11          | 38.37          | QP                    | 160.0            | 1.1        | V             | 4.9                     | 43.27                        | 46.00          | 2.73        |
| 589.82          | 37.35          | QP                    | 159.0            | 1.1        | V             | 3.8                     | 41.15                        | 46.00          | 4.85        |
| 601.85          | 35.6           | QP                    | 153.0            | 1.1        | V             | 3.5                     | 39.10                        | 46.00          | 6.90        |
| 1871.94         | 59.26          | PK                    | 307              | 1.0        | H             | -5.17                   | 54.09                        | 74             | 19.91       |
| 1871.94         | 31.05          | Ave.                  | 307              | 1.0        | H             | -5.17                   | 25.88                        | 54             | 28.12       |
| 1876.89         | 57.66          | PK                    | 242              | 1.7        | V             | -5.17                   | 52.49                        | 74             | 21.51       |
| 1876.89         | 30.68          | Ave.                  | 242              | 1.7        | V             | -5.17                   | 25.51                        | 54             | 28.49       |
| 3468.43         | 52.11          | PK                    | 186              | 1.4        | H             | 1.32                    | 53.43                        | 74             | 20.57       |
| 3468.43         | 30.52          | Ave.                  | 186              | 1.4        | H             | 1.32                    | 31.84                        | 54             | 22.16       |
| 3464.59         | 51.38          | PK                    | 355              | 2.4        | V             | 1.32                    | 52.70                        | 74             | 21.30       |
| 3464.59         | 29.78          | Ave.                  | 355              | 2.4        | V             | 1.32                    | 31.10                        | 54             | 22.90       |

Note:

- 1) Correction Factor=Antenna factor (RX) + cable loss – amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit - Corrected Amplitude

**\*\*\*\*\* END OF REPORT \*\*\*\*\***