



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics
Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : TB310FU
FCC ID : O57TB310FU
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Oct. 11, 2022 ~ Oct. 13, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	27
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements.....	33
4 LIST OF MEASURING EQUIPMENT	34
5 UNCERTAINTY OF EVALUATION	35
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR291508C	Rev. 01	Initial issue of report	Oct. 31, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.92 dB at 2483.56 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.33 dB at 0.708 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB310FU
FCC ID	O57TB310FU
HW Version	Lenovo Tablet TB310FU
SW Version	TB310FU_RF01_220917
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.82 dBm (0.1208 W) 802.11g : 25.63 dBm (0.3656 W) 802.11n HT20 : 25.10 dBm (0.3236 W)
99% Occupied Bandwidth	802.11b : 13.14 MHz 802.11g : 18.13 MHz 802.11n HT20 : 18.93 MHz
Antenna Type / Gain	PIFA Antenna type with gain -1.50 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS TH01-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

Test data subcontracted: conducted test case for RSE in section 3.5 of this report.

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH01-SZ	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link (2.4G) + USB Cable 2 (Charging from Adapter 2) + Earphone
Remark: For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable	

2.3 Connection Diagram of Test System

AC Conducted Emission:

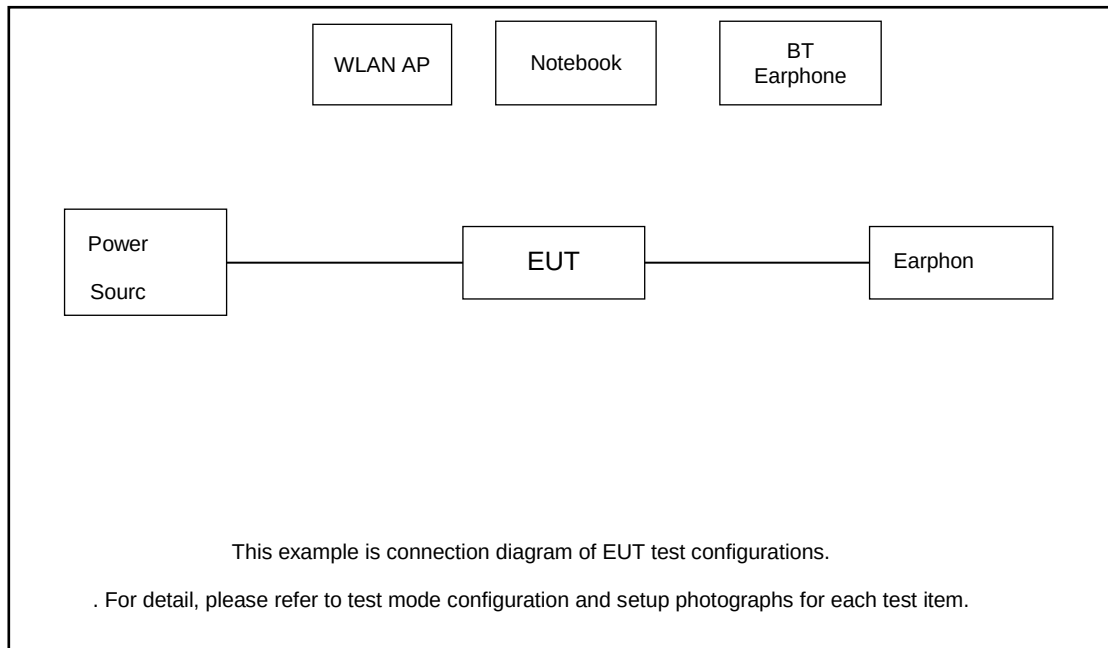

Radiated Emission:

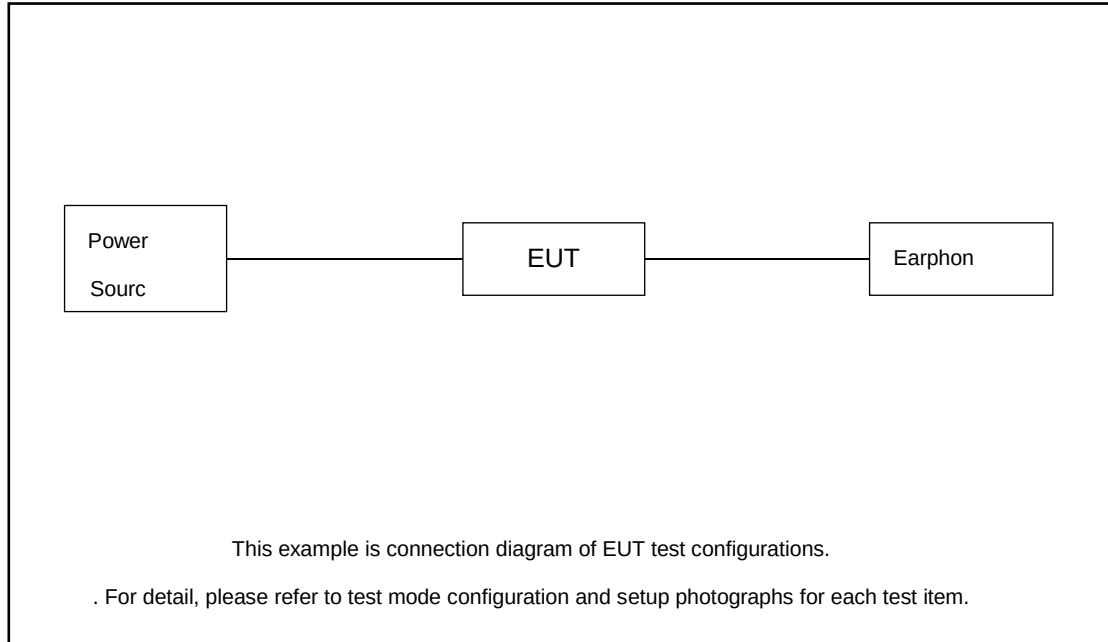

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Base Station	R&S	CBT32	N/A	N/A	Unshielded,1.8m
5.	Earphone	Moto	N/A	N/A	Un-Shielded, 1.0m	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss

Offset = RF cable loss

Following shows an offset computation example with cable loss 6.20dB

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} \\
 &= 6.20 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3*RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup

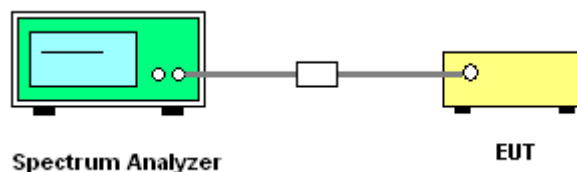



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

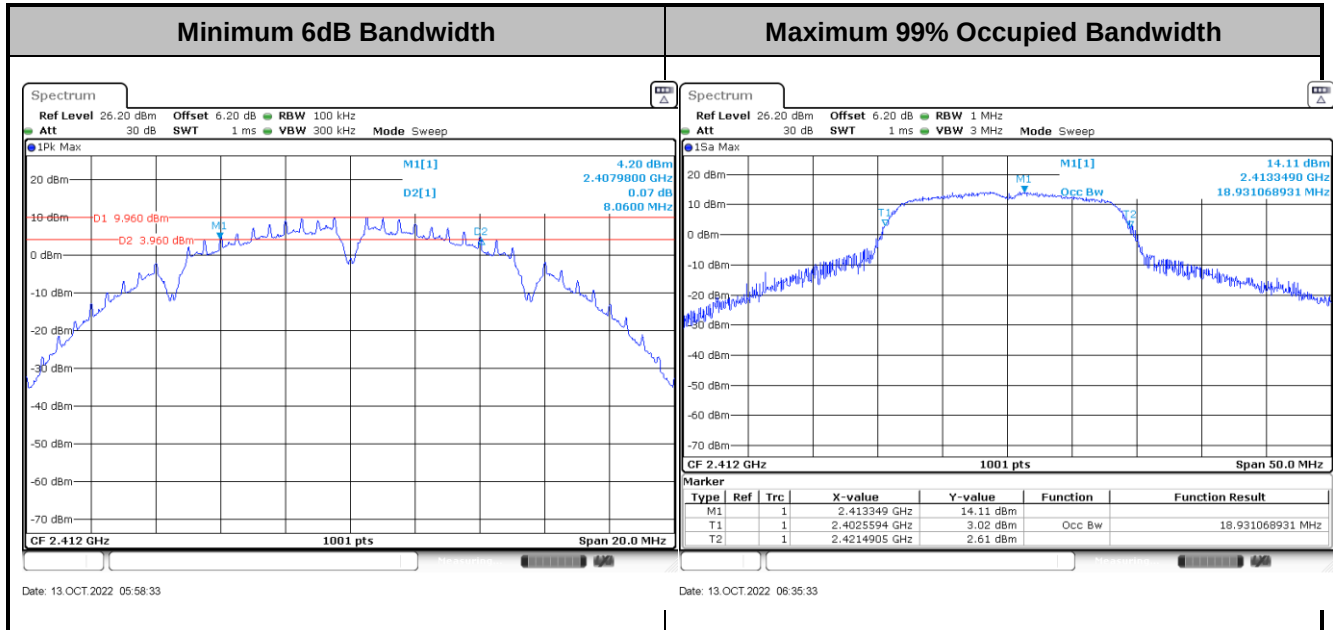

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

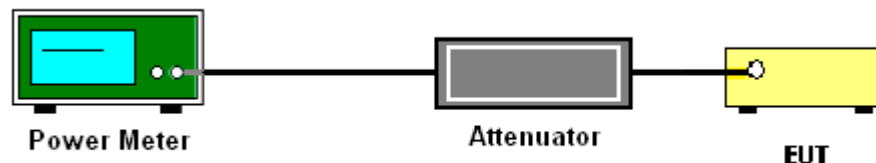

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

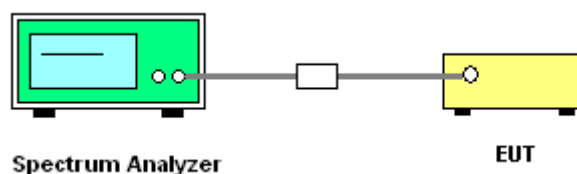

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

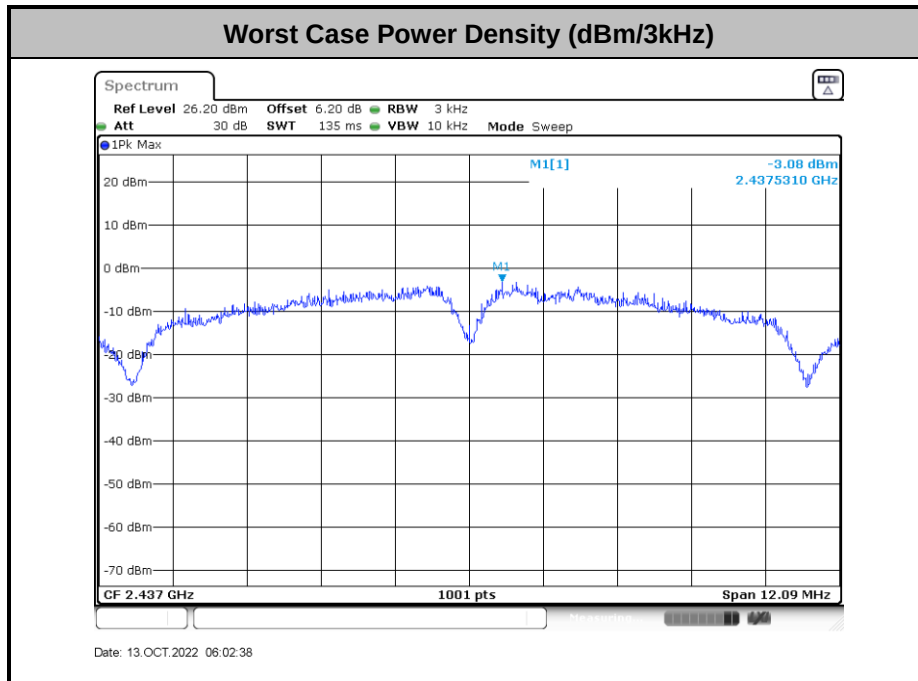

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

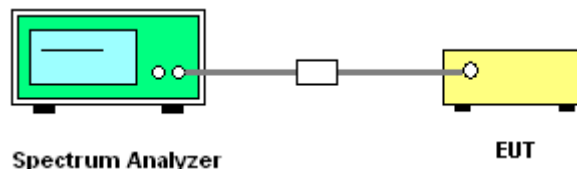




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Jacob Zhang	Temperature :	21~25°C
		Relative Humidity :	51~54%


Number of TX = 1, Ant. 1 (Measured)


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

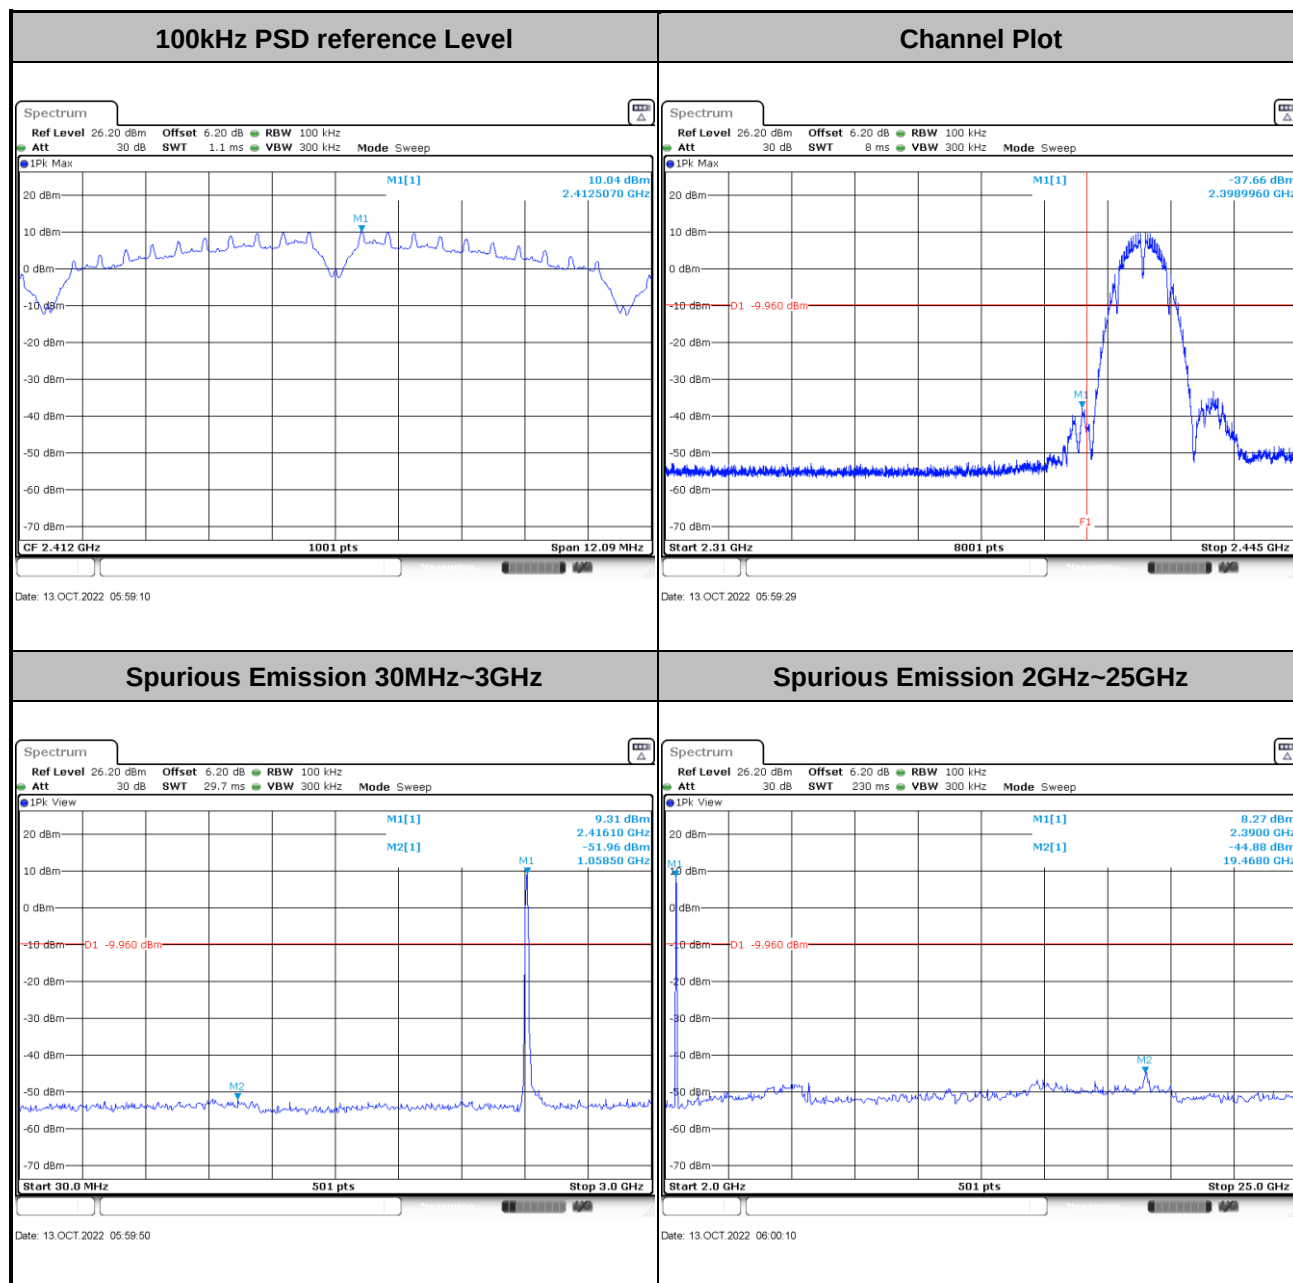



Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

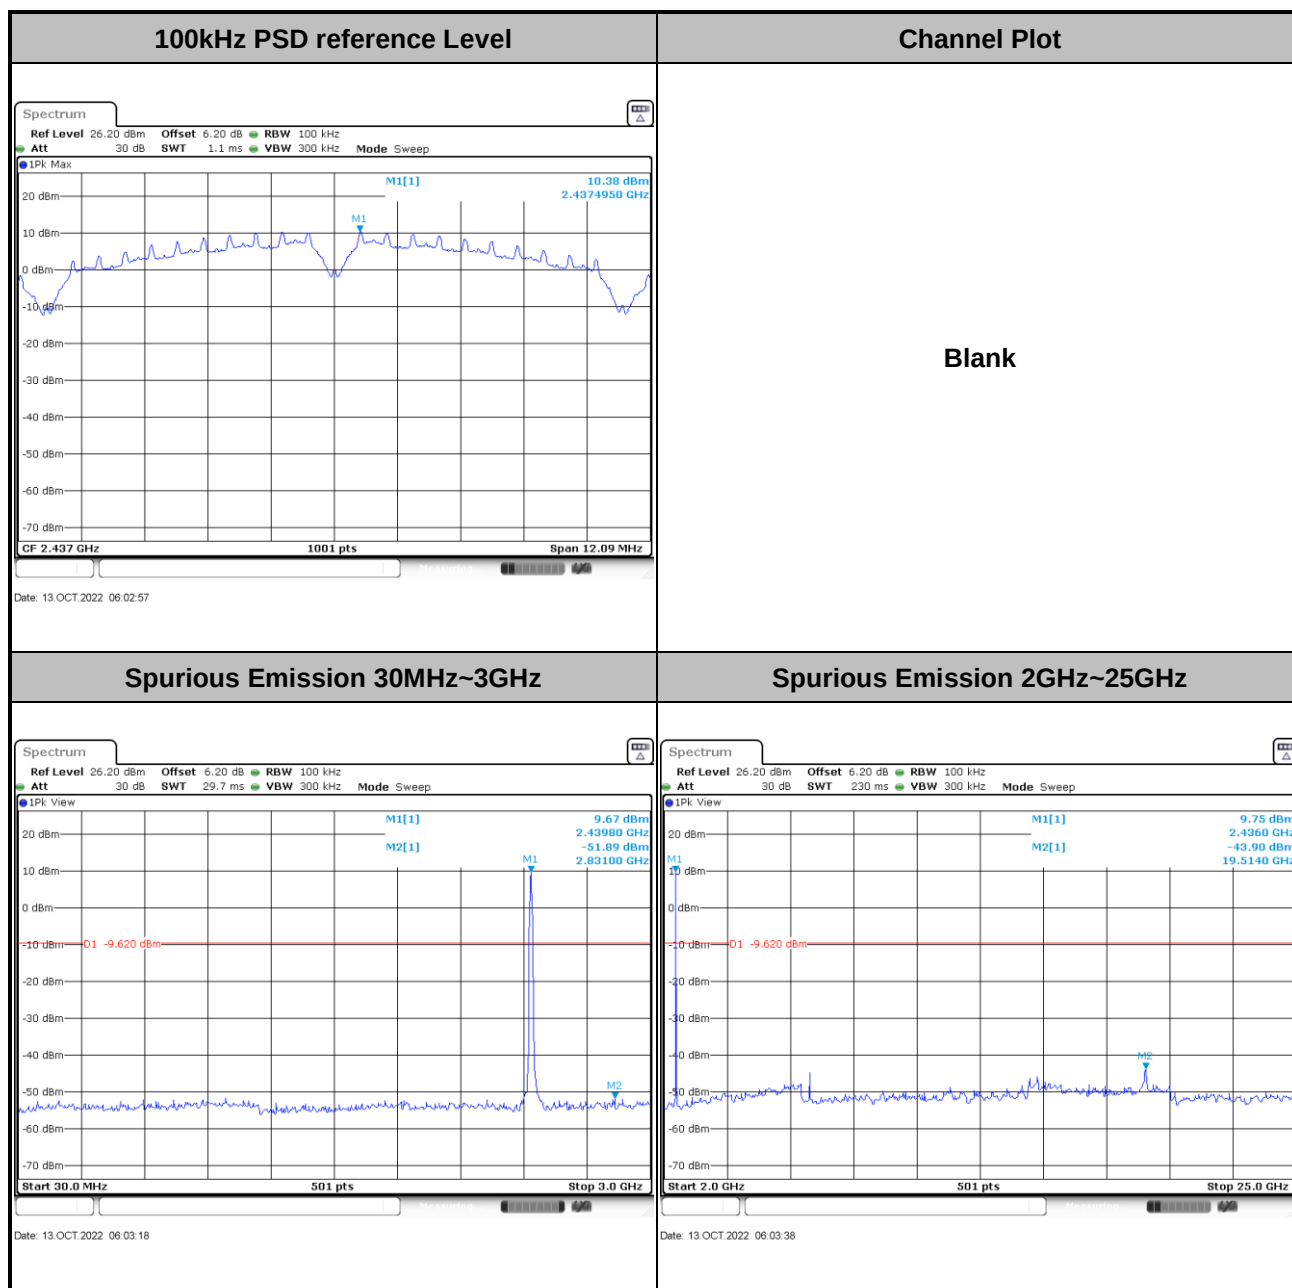


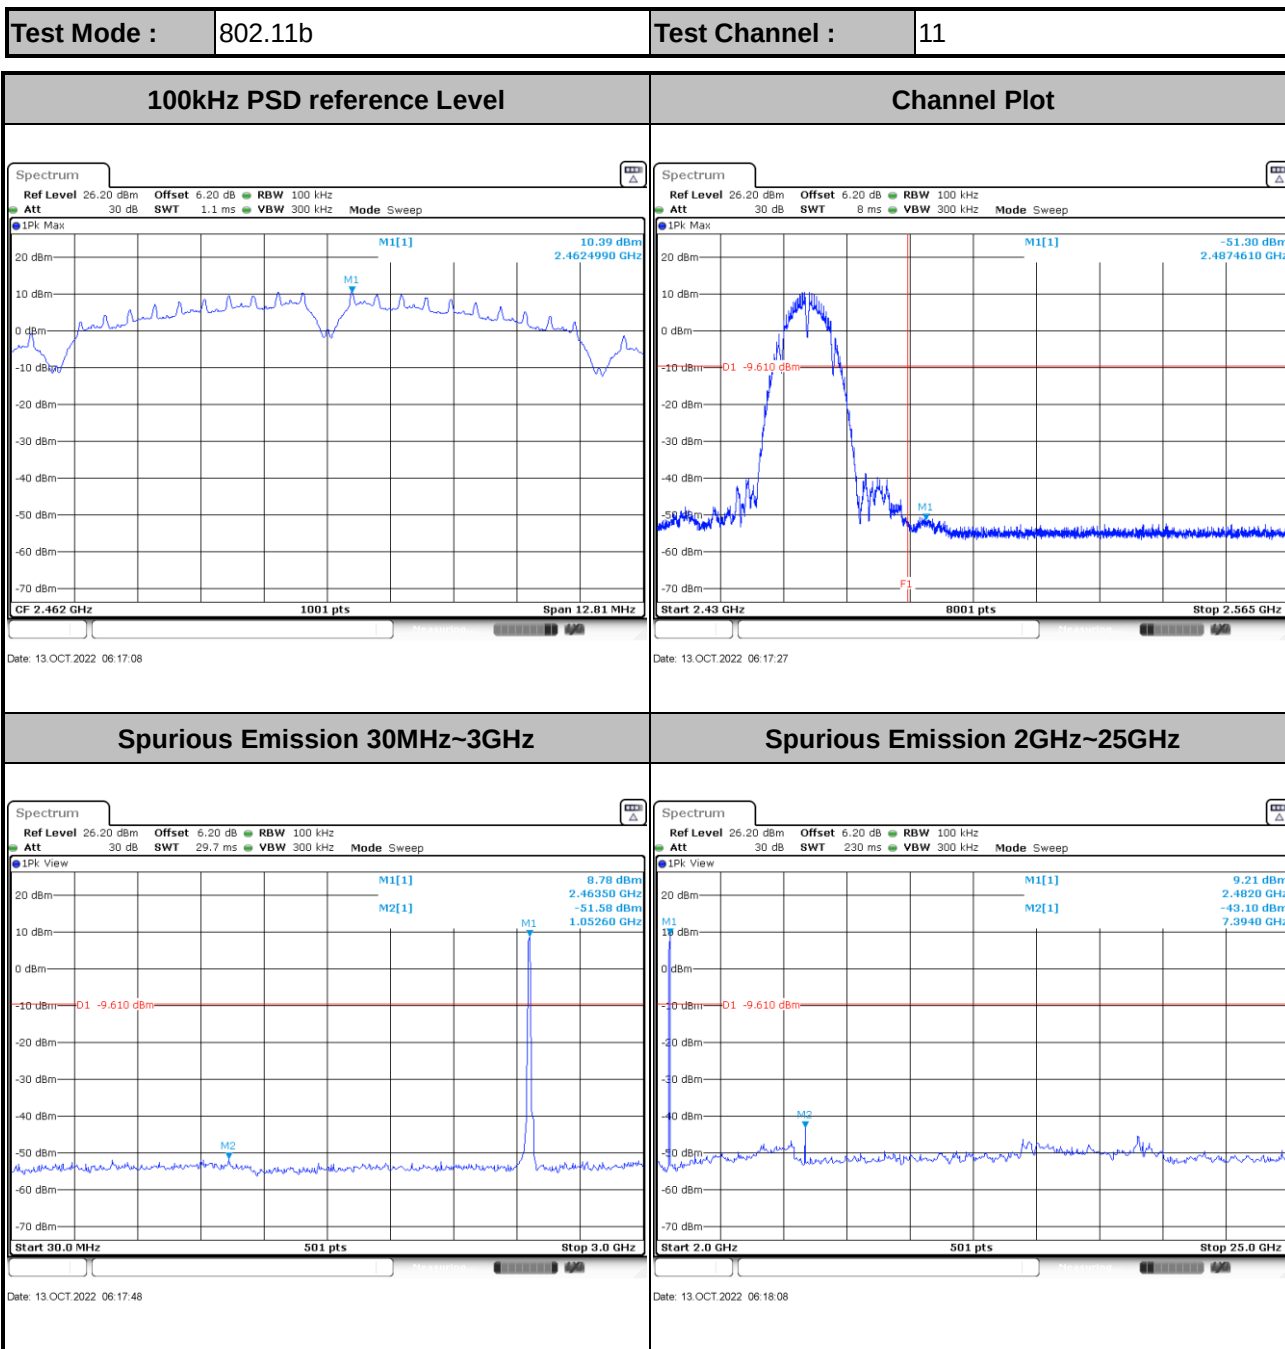




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

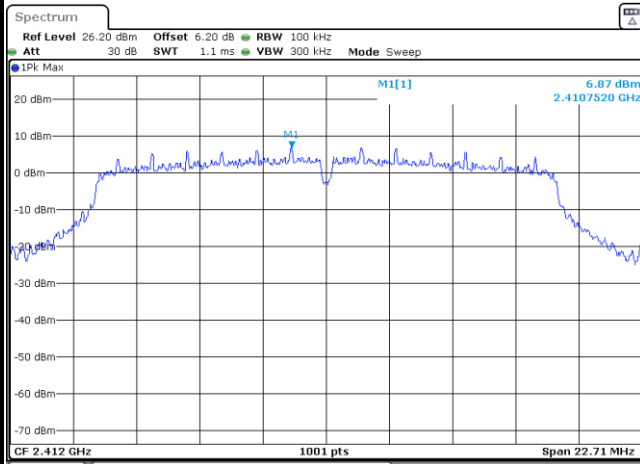


Channel Plot

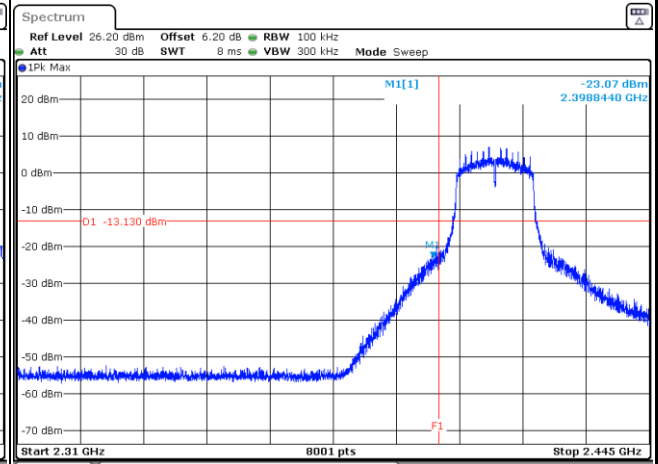

Spurious Emission 30MHz~3GHz

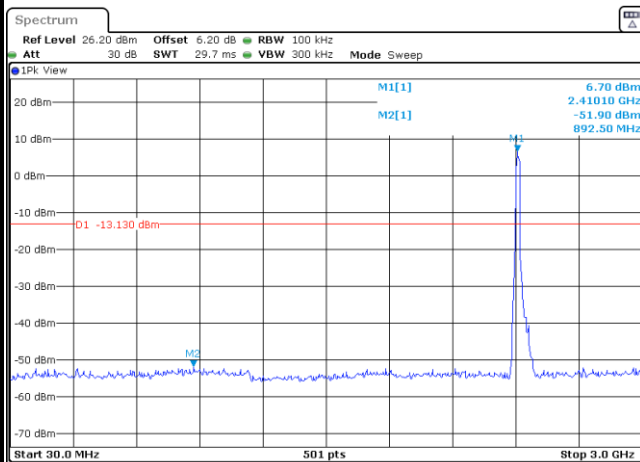


Spurious Emission 2GHz~25GHz

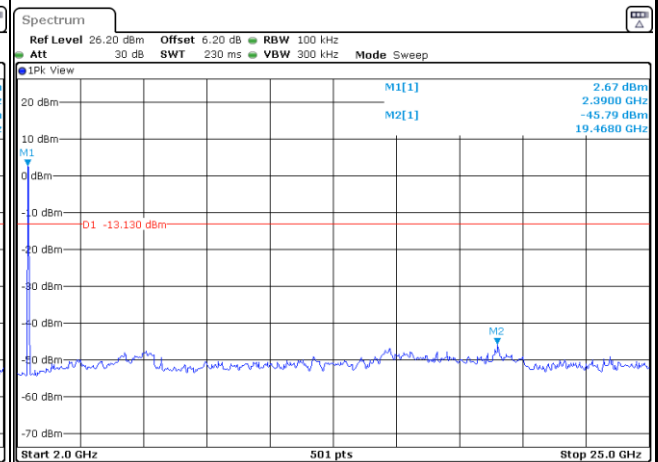




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

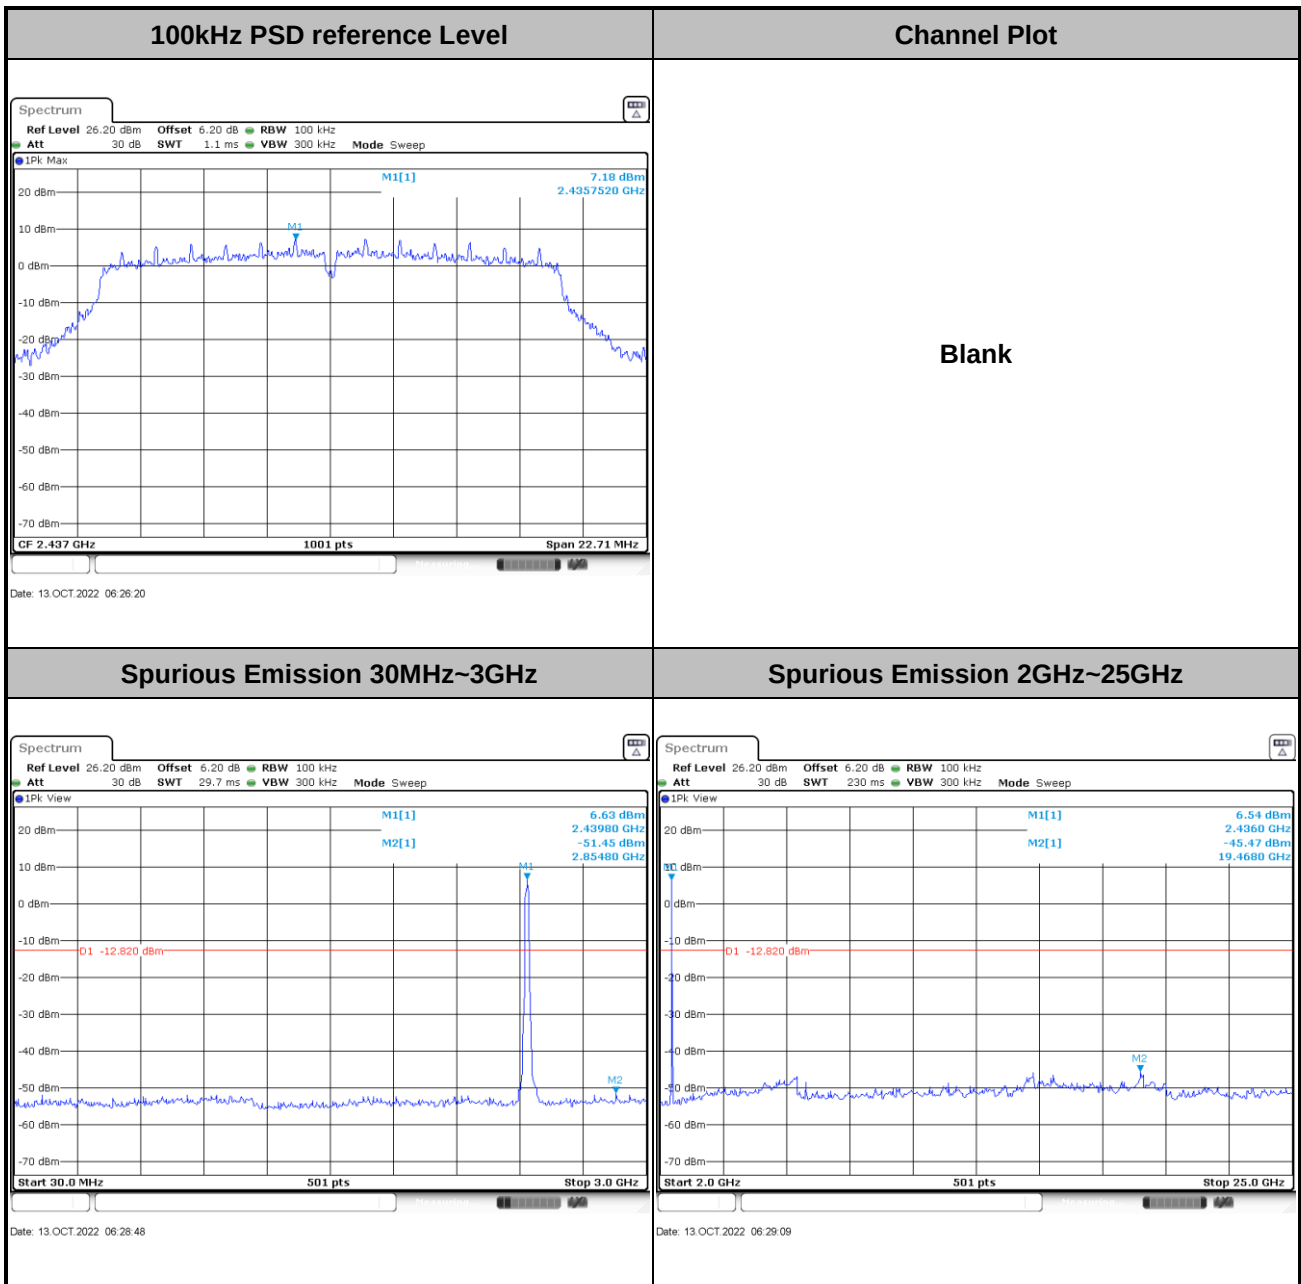




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

100kHz PSD reference Level

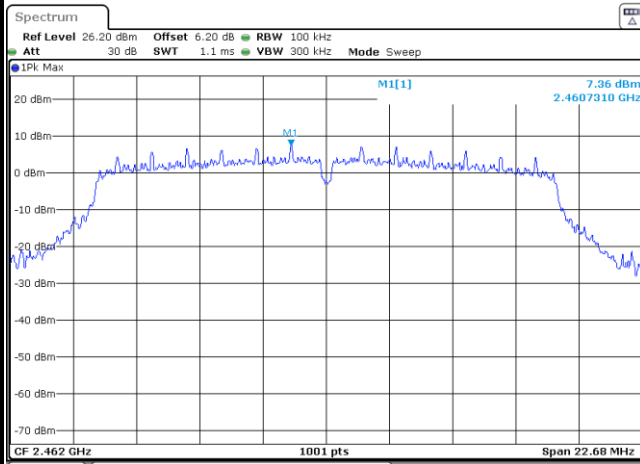


Date: 13 OCT 2022 06:30:34

Channel Plot

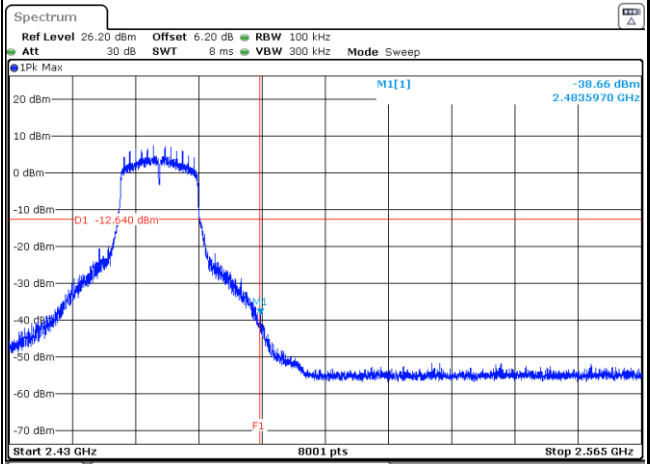


Date: 13 OCT 2022 06:30:53

Spurious Emission 30MHz~3GHz

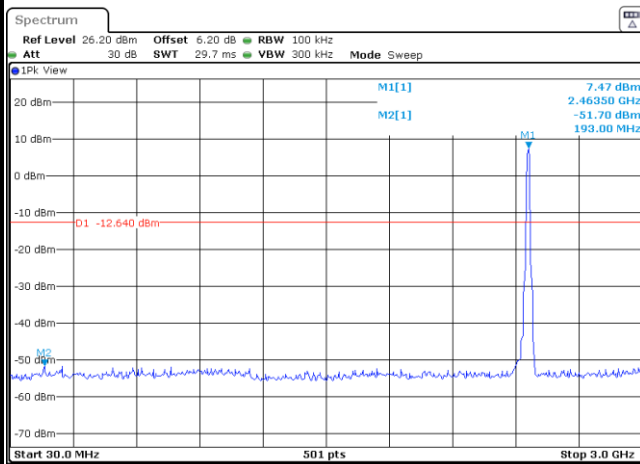

Date: 13 OCT 2022 06:31:14

Spurious Emission 2GHz~25GHz

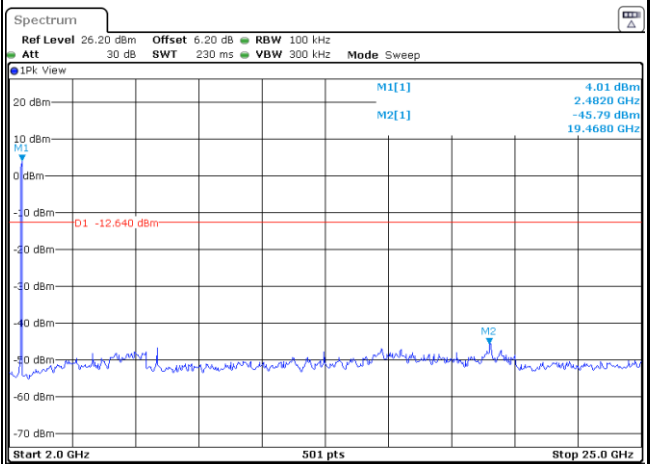


Date: 13 OCT 2022 06:31:34



Test Mode : 802.11n HT20


Test Channel : 01

100kHz PSD reference Level

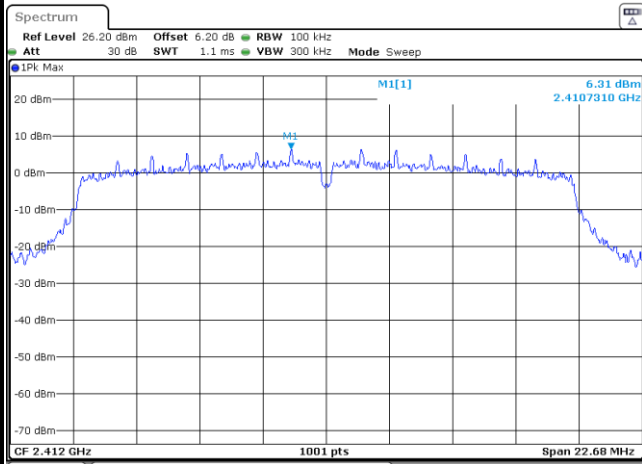


Date: 13.OCT.2022 06:34:25

Channel Plot

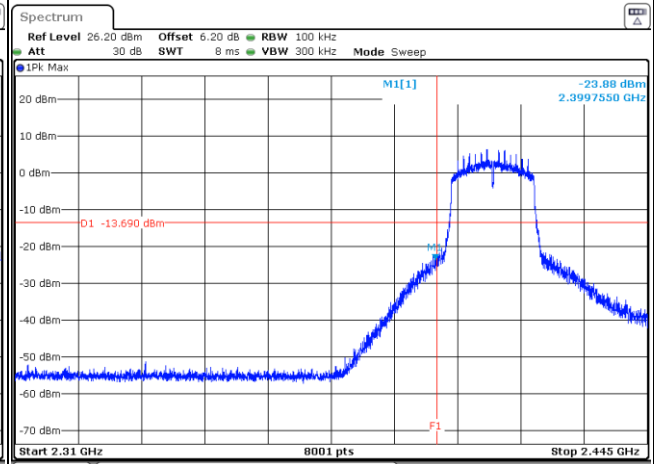


Date: 13.OCT.2022 06:34:44

Spurious Emission 30MHz~3GHz

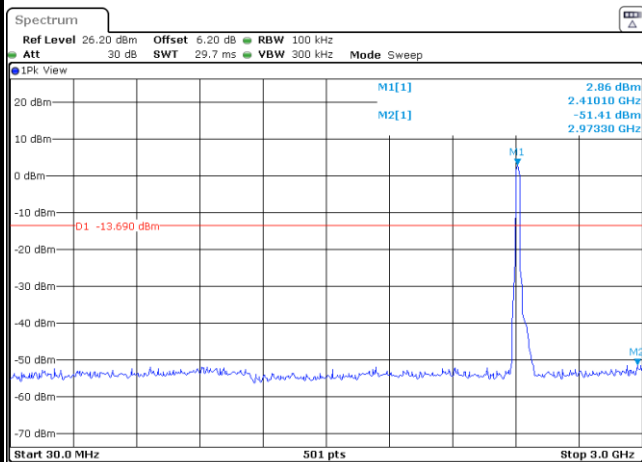

Date: 13.OCT.2022 06:35:04

Spurious Emission 2GHz~25GHz

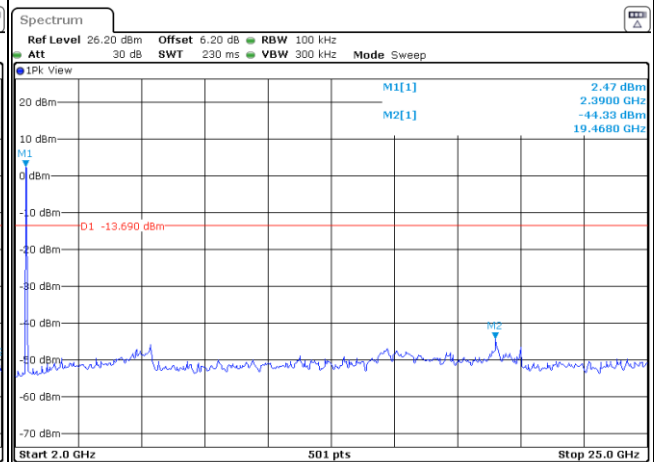


Date: 13.OCT.2022 06:35:24



Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----


100kHz PSD reference Level

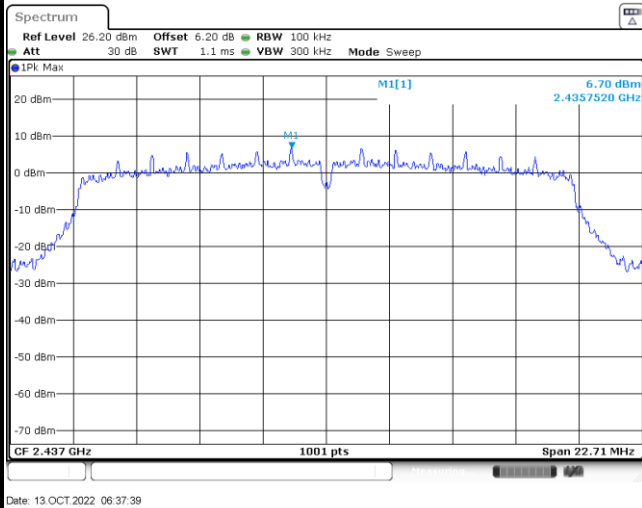


Channel Plot

Blank

Spurious Emission 30MHz~3GHz

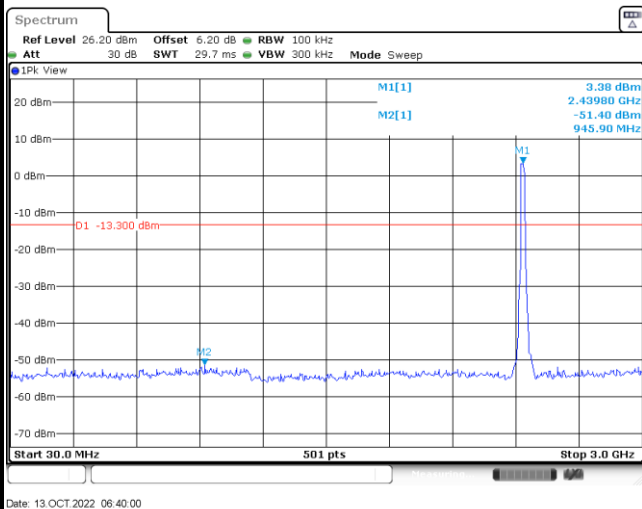

Spurious Emission 2GHz~25GHz

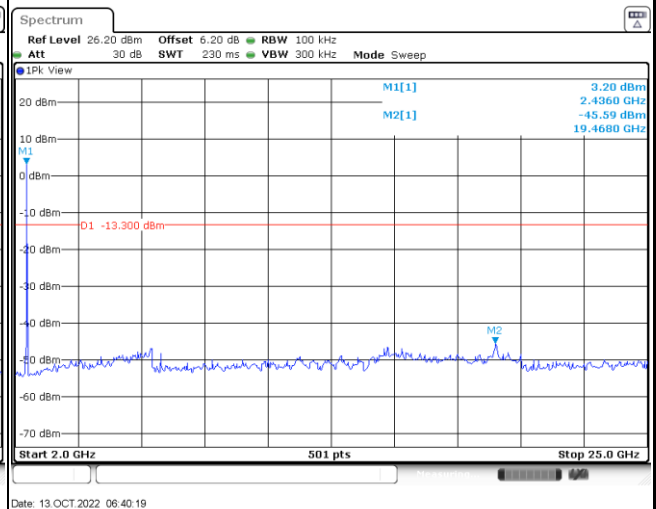




Test Mode : 802.11n HT20


Test Channel : 11

100kHz PSD reference Level

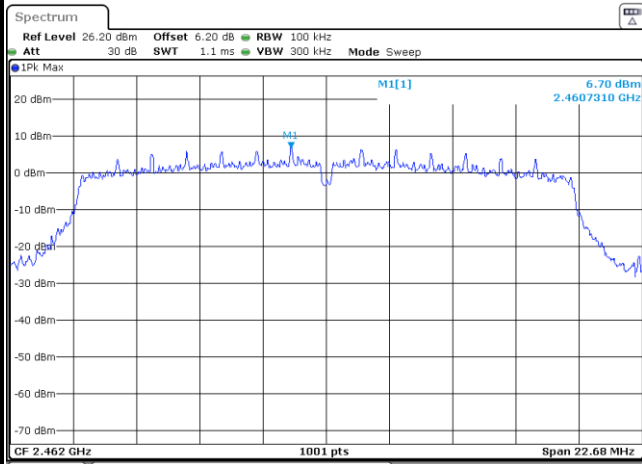


Date: 13.OCT.2022 06:41:42

Channel Plot

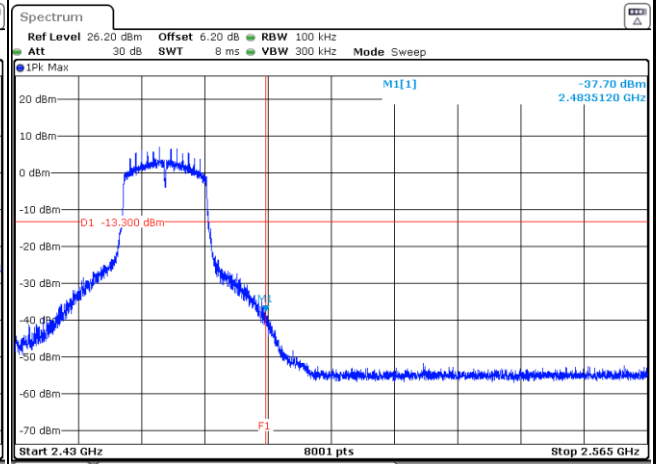


Date: 13.OCT.2022 06:42:01

Spurious Emission 30MHz~3GHz

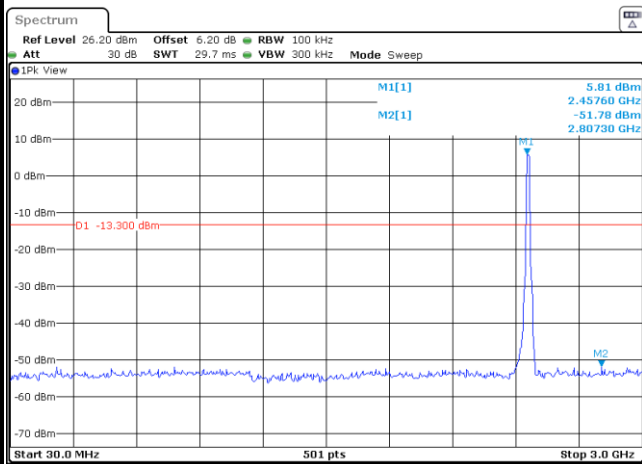

Date: 13.OCT.2022 06:42:22

Spurious Emission 2GHz~25GHz

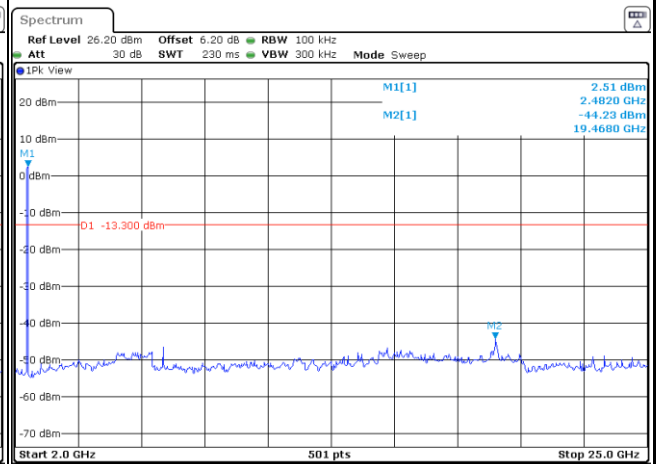

Date: 13.OCT.2022 06:42:42

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

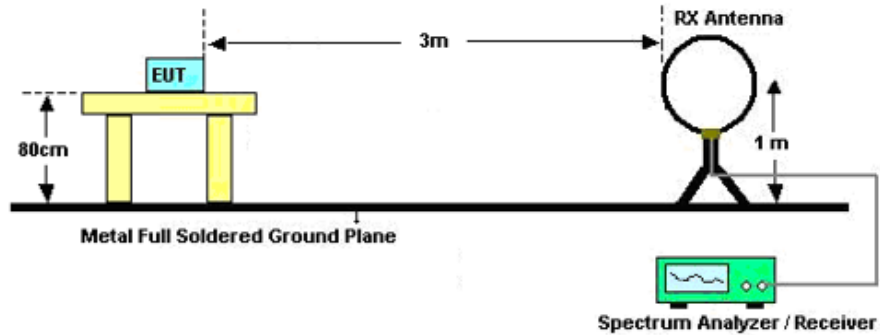

For radiated emissions from 30MHz to 1GHz

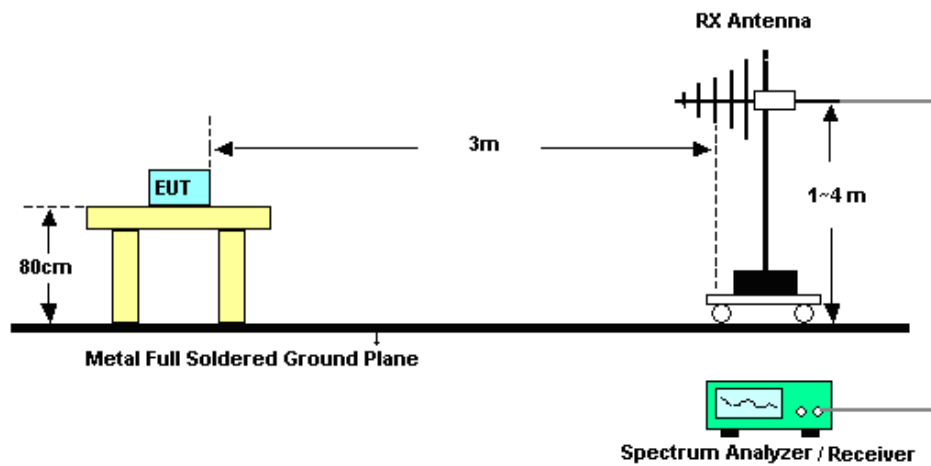

For radiated emissions above 1GHz

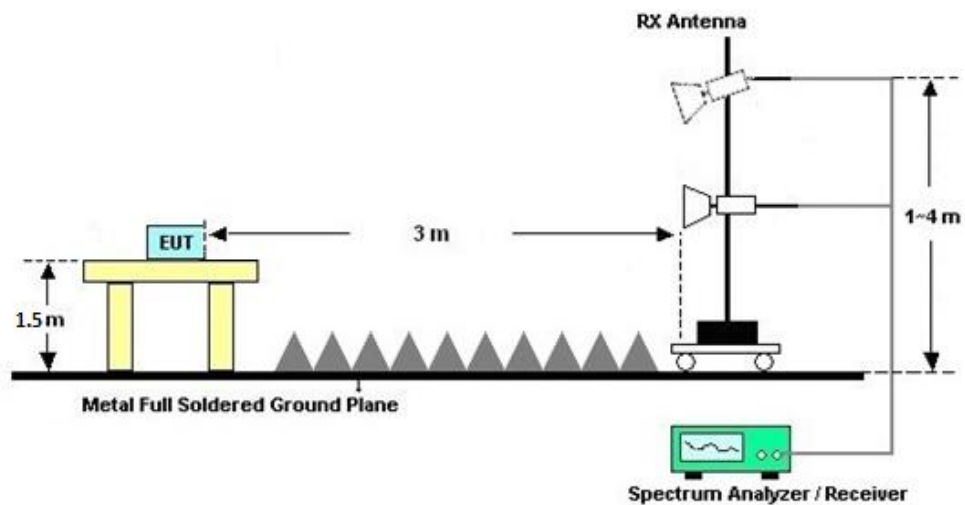

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

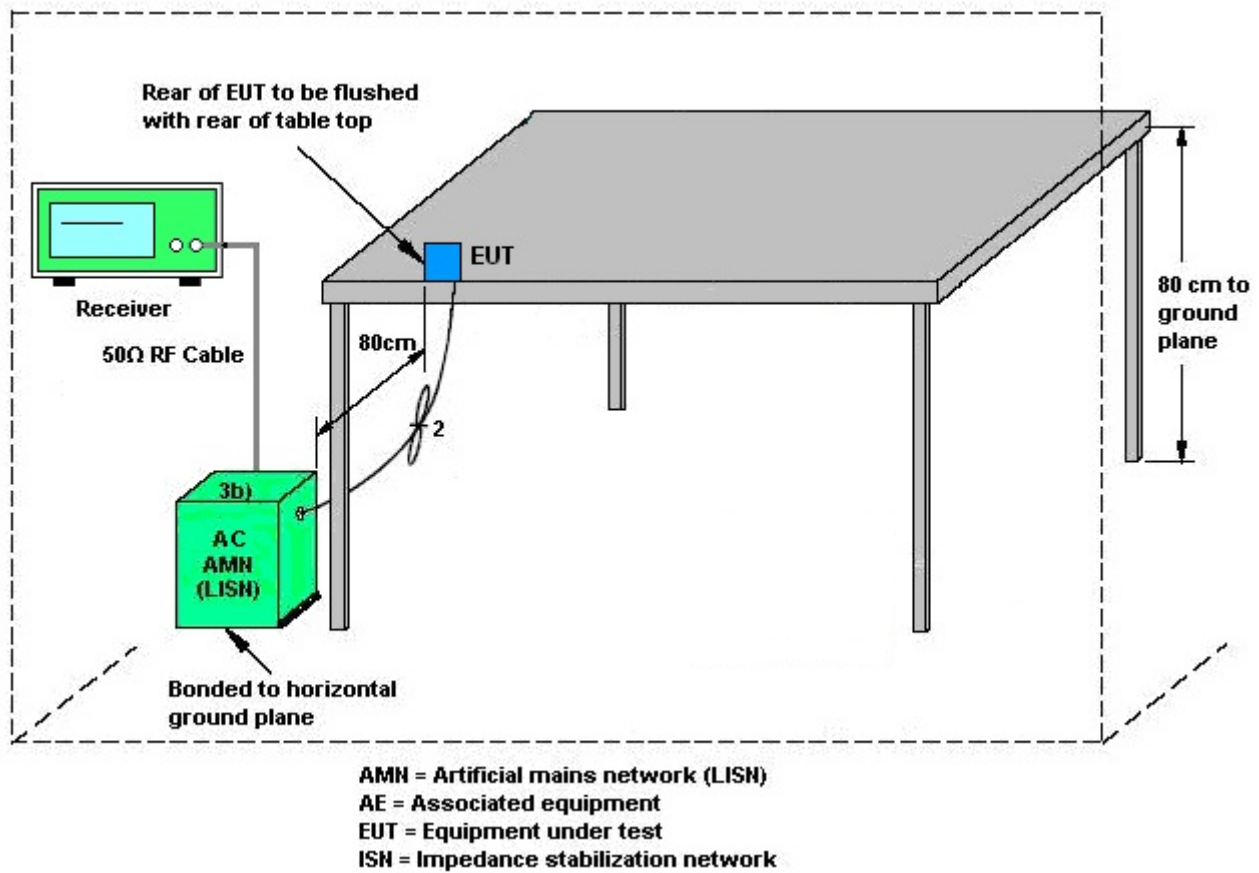

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Oct. 11, 2022~ Oct. 12, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Oct. 11, 2022~ Oct. 12, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Oct. 11, 2022~ Oct. 12, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec.27, 2021	Oct. 13, 2022	Dec.26, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Oct. 13, 2022	Jul.06, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Oct. 13, 2022	Jun. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Oct. 13, 2022	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Oct. 13, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr.10, 2022	Oct. 13, 2022	Apr.9 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Oct. 13, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct.22, 2021	Oct. 13, 2022	Oct.21, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct.22, 2021	Oct. 13, 2022	Oct.21, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06. 2022	Oct. 13, 2022	Jul. 05. 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Oct. 13, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 13, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 13, 2022	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May. 24, 2022	Oct. 11, 2022	May. 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Oct. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 13, 2022	Oct. 11, 2022	Oct. 12, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Oct. 11, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.46 dB
Conducted Emissions	± 0.48 dB
Occupied Channel Bandwidth	± 0.1 %
Conducted Power Spectral Density	± 0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.2dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2022/10/11~2022/10/12	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.14	8.06	0.50	Pass
11b	1Mbps	1	6	2437	13.04	8.06	0.50	Pass
11b	1Mbps	1	11	2462	13.14	8.54	0.50	Pass
11g	6Mbps	1	1	2412	18.13	15.14	0.50	Pass
11g	6Mbps	1	6	2437	17.78	15.14	0.50	Pass
11g	6Mbps	1	11	2462	17.78	15.12	0.50	Pass
HT20	MCS0	1	1	2412	18.93	15.12	0.50	Pass
HT20	MCS0	1	6	2437	18.58	15.14	0.50	Pass
HT20	MCS0	1	11	2462	18.73	15.12	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	20.68	30.00	-1.50	19.18	36.00	Pass
11b	1Mbps	1	6	2437	20.82	30.00	-1.50	19.32	36.00	Pass
11b	1Mbps	1	11	2462	20.72	30.00	-1.50	19.22	36.00	Pass
11g	6Mbps	1	1	2412	25.59	30.00	-1.50	24.09	36.00	Pass
11g	6Mbps	1	6	2437	25.63	30.00	-1.50	24.13	36.00	Pass
11g	6Mbps	1	11	2462	24.89	30.00	-1.50	23.39	36.00	Pass
HT20	MCS0	1	1	2412	25.10	30.00	-1.50	23.60	36.00	Pass
HT20	MCS0	1	6	2437	25.10	30.00	-1.50	23.60	36.00	Pass
HT20	MCS0	1	11	2462	24.43	30.00	-1.50	22.93	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	18.43
11b	1Mbps	1	6	2437	0.00	18.41
11b	1Mbps	1	11	2462	0.00	18.24
11g	6Mbps	1	1	2412	0.13	17.48
11g	6Mbps	1	6	2437	0.13	17.46
11g	6Mbps	1	11	2462	0.13	16.96
HT20	MCS0	1	1	2412	0.14	16.99
HT20	MCS0	1	6	2437	0.14	17.08
HT20	MCS0	1	11	2462	0.14	16.57


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-3.91	-1.50	8.00	Pass
11b	1Mbps	1	6	2437	-3.08	-1.50	8.00	Pass
11b	1Mbps	1	11	2462	-3.36	-1.50	8.00	Pass
11g	6Mbps	1	1	2412	-6.43	-1.50	8.00	Pass
11g	6Mbps	1	6	2437	-4.52	-1.50	8.00	Pass
11g	6Mbps	1	11	2462	-6.60	-1.50	8.00	Pass
HT20	MCS0	1	1	2412	-7.20	-1.50	8.00	Pass
HT20	MCS0	1	6	2437	-6.10	-1.50	8.00	Pass
HT20	MCS0	1	11	2462	-7.55	-1.50	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

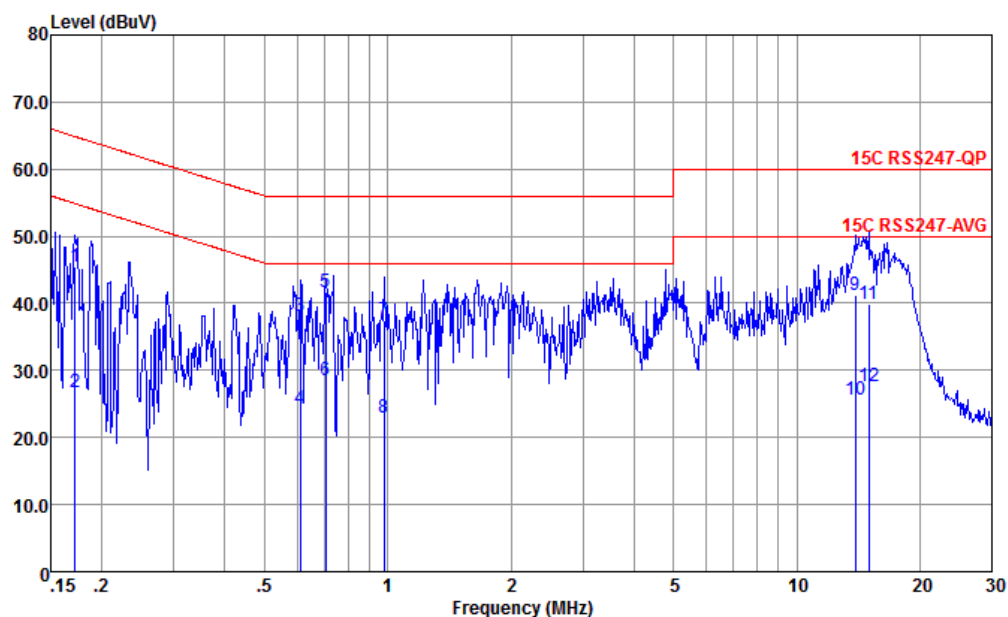


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.172	45.87	-19.29	64.86	35.09	0.05	10.43	QP
2	0.172	26.77	-28.09	54.86	16.29	0.05	10.43	Average
3	0.611	38.21	-17.79	56.00	28.10	-0.07	10.18	QP
4	0.611	24.31	-21.69	46.00	14.20	-0.07	10.18	Average
5 *	0.705	41.57	-14.43	56.00	31.50	-0.09	10.16	QP
6	0.705	28.57	-17.43	46.00	18.50	-0.09	10.16	Average
7	0.979	37.51	-18.49	56.00	27.50	-0.10	10.11	QP
8	0.979	22.91	-23.09	46.00	12.90	-0.10	10.11	Average
9	13.915	41.15	-18.85	60.00	30.20	-0.20	11.15	QP
10	13.915	25.55	-24.45	50.00	14.60	-0.20	11.15	Average
11	14.986	39.92	-20.08	60.00	28.90	-0.21	11.23	QP
12	14.986	27.62	-22.38	50.00	16.60	-0.21	11.23	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

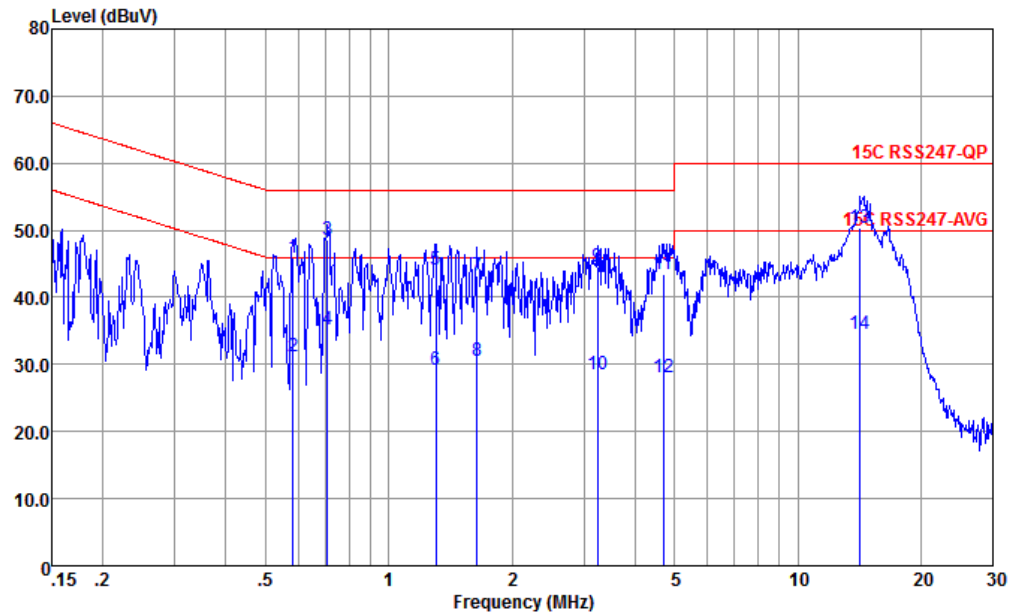

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.582	46.00	-10.00	56.00	35.89	-0.08	10.19	QP
2	0.582	31.30	-14.70	46.00	21.19	-0.08	10.19	Average
3 *	0.708	48.67	-7.33	56.00	38.60	-0.09	10.16	QP
4	0.708	35.27	-10.73	46.00	25.20	-0.09	10.16	Average
5	1.303	44.08	-11.92	56.00	34.10	-0.11	10.09	QP
6	1.303	29.28	-16.72	46.00	19.30	-0.11	10.09	Average
7	1.645	43.16	-12.84	56.00	33.21	-0.12	10.07	QP
8	1.645	30.56	-15.44	46.00	20.61	-0.12	10.07	Average
9	3.241	44.53	-11.47	56.00	34.60	-0.13	10.06	QP
10	3.241	28.53	-17.47	46.00	18.60	-0.13	10.06	Average
11	4.696	43.45	-12.55	56.00	33.50	-0.11	10.06	QP
12	4.696	28.15	-17.85	46.00	18.20	-0.11	10.06	Average
13	14.213	50.29	-9.71	60.00	39.30	-0.18	11.17	QP
14	14.213	34.49	-15.51	50.00	23.50	-0.18	11.17	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Zhao hui Liang	Temperature :	24~25°C
		Relative Humidity :	48~49%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
0		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2373	48.8	-25.2	74	41.73	32.22	7.55	32.7	100	359	P	H
		2387.49	38.96	-15.04	54	31.84	32.25	7.57	32.7	100	359	A	H
		2412	100.73	-	-	93.51	32.31	7.61	32.7	100	359	P	H
		2412	98.99	-	-	91.77	32.31	7.61	32.7	100	359	A	H
		2387.7	49.53	-24.47	74	42.41	32.25	7.57	32.7	290	78	P	V
		2387.595	39.07	-14.93	54	31.95	32.25	7.57	32.7	290	78	A	V
		2412	102.53	-	-	95.31	32.31	7.61	32.7	290	78	P	V
		2412	100.94	-	-	93.72	32.31	7.61	32.7	290	78	A	V
802.11b CH 06 2437MHz		2380.42	48.07	-25.93	74	40.97	32.24	7.56	32.7	100	360	P	H
		2389.94	37.36	-16.64	54	30.22	32.26	7.58	32.7	100	360	A	H
		2437	100.13	-	-	92.83	32.36	7.64	32.7	100	360	P	H
		2437	98.45	-	-	91.15	32.36	7.64	32.7	100	360	A	H
		2484.04	49.24	-24.76	74	41.78	32.46	7.7	32.7	100	360	P	H
		2484.04	38.04	-15.96	54	30.58	32.46	7.7	32.7	100	360	A	H
		2317	49.42	-24.58	74	42.54	32.1	7.48	32.7	276	102	P	V
		2384.76	37.38	-16.62	54	30.26	32.25	7.57	32.7	276	102	A	V
		2437	103.98	-	-	96.68	32.36	7.64	32.7	276	102	P	V
		2437	102.25	-	-	94.95	32.36	7.64	32.7	276	102	A	V
		2483.97	49.55	-24.45	74	42.09	32.46	7.7	32.7	276	102	P	V
		2483.97	38.61	-15.39	54	31.15	32.46	7.7	32.7	276	102	A	V



802.11b CH 11 2462MHz		2462	104.25	-	-	96.86	32.42	7.67	32.7	100	301	P	H
		2462	102.7	-	-	95.31	32.42	7.67	32.7	100	301	A	H
		2483.56	48.66	-25.34	74	41.2	32.46	7.7	32.7	100	301	P	H
		2483.52	39.69	-14.31	54	32.23	32.46	7.7	32.7	100	301	A	H
		2462	103.57	-	-	96.18	32.42	7.67	32.7	381	260	P	V
		2462	101.82	-	-	94.43	32.42	7.67	32.7	381	260	A	V
		2485.48	48.47	-25.53	74	41	32.47	7.7	32.7	381	260	P	V
		2483.52	40.34	-13.66	54	32.88	32.46	7.7	32.7	381	260	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 0	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	51.51	-22.49	74	57.9	34.83	10.92	52.14	145	230	P	H
		4824	46.85	-7.15	54	53.24	34.83	10.92	52.14	145	230	A	H
		4824	49.44	-24.56	74	55.83	34.83	10.92	52.14	352	189	P	V
		4824	44.07	-9.93	54	50.46	34.83	10.92	52.14	352	189	A	V
802.11b CH 06 2437MHz		4874	50.26	-23.74	74	56.51	34.85	11	52.1	100	228	P	H
		4874	46.22	-7.78	54	52.47	34.85	11	52.1	100	228	A	H
		7311	54.1	-19.9	74	56.18	36.32	13.39	51.79	290	205	P	H
		7311	49.27	-4.73	54	51.35	36.32	13.39	51.79	290	205	A	H
		4874	49.38	-24.62	74	55.63	34.85	11	52.1	366	184	P	V
		4874	44.26	-9.74	54	50.51	34.85	11	52.1	366	184	A	V
		7311	51.77	-22.23	74	53.85	36.32	13.39	51.79	264	326	P	V
		7311	45.53	-8.47	54	47.61	36.32	13.39	51.79	264	326	A	V
802.11b CH 11 2462MHz		4924	52.23	-21.77	74	58.34	34.87	11.08	52.06	100	297	P	H
		4924	49.12	-4.88	54	55.23	34.87	11.08	52.06	100	297	A	H
		7386	47.35	-26.65	74	49.51	36.35	13.19	51.7			P	H
		4924	49.8	-24.2	74	55.91	34.87	11.08	52.06	100	63	P	V
		7386	47.89	-26.11	74	50.05	36.35	13.19	51.7			P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 0	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.905	58.17	-15.83	74	51.03	32.26	7.58	32.7	100	298	P	H
		2389.905	44	-10	54	36.86	32.26	7.58	32.7	100	298	A	H
		2412	104.43	-	-	97.21	32.31	7.61	32.7	100	298	P	H
		2412	96.87	-	-	89.65	32.31	7.61	32.7	100	298	A	H
		2389.275	53.88	-20.12	74	46.74	32.26	7.58	32.7	351	245	P	V
		2389.905	42.4	-11.6	54	35.26	32.26	7.58	32.7	351	245	A	V
		2412	102.97	-	-	95.75	32.31	7.61	32.7	351	245	P	V
		2412	95.79	-	-	88.57	32.31	7.61	32.7	351	245	A	V
802.11g CH 06 2437MHz		2386.58	46.49	-27.51	74	39.37	32.25	7.57	32.7	100	299	P	H
		2389.94	36.51	-17.49	54	29.37	32.26	7.58	32.7	100	299	A	H
		2437	104.94	-	-	97.64	32.36	7.64	32.7	100	299	P	H
		2437	97.99	-	-	90.69	32.36	7.64	32.7	100	299	A	H
		2486.21	50.64	-23.36	74	43.17	32.47	7.7	32.7	100	299	P	H
		2484.88	40.59	-13.41	54	33.12	32.47	7.7	32.7	100	299	A	H
		2389.66	45.49	-28.51	74	38.35	32.26	7.58	32.7	351	267	P	V
		2387.84	35.73	-18.27	54	28.61	32.25	7.57	32.7	351	267	A	V
		2437	103.11	-	-	95.81	32.36	7.64	32.7	351	267	P	V
		2437	96.8	-	-	89.5	32.36	7.64	32.7	351	267	A	V
		2484.6	47.9	-26.1	74	40.43	32.47	7.7	32.7	351	267	P	V
		2485.93	38.79	-15.21	54	31.32	32.47	7.7	32.7	351	267	A	V



802.11g CH 11 2462MHz		2462	103.84	-	-	96.45	32.42	7.67	32.7	100	300	P	H
		2462	96.59	-	-	89.2	32.42	7.67	32.7	100	300	A	H
		2483.84	65.24	-8.76	74	57.78	32.46	7.7	32.7	100	300	P	H
		2483.52	49.63	-4.37	54	42.17	32.46	7.7	32.7	100	300	A	H
		2462	101.51	-	-	94.12	32.42	7.67	32.7	100	189	P	V
		2462	94.72	-	-	87.33	32.42	7.67	32.7	100	189	A	V
		2484.2	65.44	-8.56	74	57.97	32.47	7.7	32.7	100	189	P	V
		2483.68	49.88	-4.12	54	42.42	32.46	7.7	32.7	100	189	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 0	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	44.87	-29.13	74	51.26	34.83	10.92	52.14			P	H
		4824	45.29	-28.71	74	51.68	34.83	10.92	52.14			P	V
802.11g CH 06 2437MHz		4874	44.78	-29.22	74	51.03	34.85	11	52.1			P	H
		7311	47.62	-26.38	74	49.7	36.32	13.39	51.79			P	H
		4874	43.5	-30.5	74	49.75	34.85	11	52.1			P	V
		7311	47.58	-26.42	74	49.66	36.32	13.39	51.79			P	V
802.11g CH 11 2462MHz		4924	44.55	-29.45	74	50.66	34.87	11.08	52.06			P	H
		7386	47.61	-26.39	74	49.77	36.35	13.19	51.7			P	H
		4924	45.01	-28.99	74	51.12	34.87	11.08	52.06			P	V
		7386	46.89	-27.11	74	49.05	36.35	13.19	51.7			P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 0	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.59	61.54	-12.46	74	54.4	32.26	7.58	32.7	100	296	P	H
		2389.905	46.69	-7.31	54	39.55	32.26	7.58	32.7	100	296	A	H
		2412	104.08	-	-	96.86	32.31	7.61	32.7	100	296	P	H
		2412	96.89	-	-	89.67	32.31	7.61	32.7	100	296	A	H
		2389.38	56.95	-17.05	74	49.81	32.26	7.58	32.7	355	261	P	V
		2389.695	44.9	-9.1	54	37.76	32.26	7.58	32.7	355	261	A	V
		2412	102.32	-	-	95.1	32.31	7.61	32.7	355	261	P	V
		2412	95	-	-	87.78	32.31	7.61	32.7	355	261	A	V
802.11n HT20 CH 06 2437MHz		2387.56	47.16	-26.84	74	40.04	32.25	7.57	32.7	100	303	P	H
		2389.24	36.63	-17.37	54	29.49	32.26	7.58	32.7	100	303	A	H
		2437	104.77	-	-	97.47	32.36	7.64	32.7	100	303	P	H
		2437	97.84	-	-	90.54	32.36	7.64	32.7	100	303	A	H
		2485.93	51.13	-22.87	74	43.66	32.47	7.7	32.7	100	303	P	H
		2485.93	41.36	-12.64	54	33.89	32.47	7.7	32.7	100	303	A	H
		2362.08	46	-28	74	38.96	32.2	7.54	32.7	365	262	P	V
		2389.66	36	-18	54	28.86	32.26	7.58	32.7	365	262	A	V
		2437	103.17	-	-	95.87	32.36	7.64	32.7	365	262	P	V
		2437	95.58	-	-	88.28	32.36	7.64	32.7	365	262	A	V
		2483.9	50.53	-23.47	74	43.07	32.46	7.7	32.7	365	262	P	V
		2485.51	39.96	-14.04	54	32.49	32.47	7.7	32.7	365	262	A	V



802.11n HT20 CH 11 2462MHz		2462	101.55	-	-	94.16	32.42	7.67	32.7	100	307	P	H
		2462	94.23	-	-	86.84	32.42	7.67	32.7	100	307	A	H
		2484.12	66.81	-7.19	74	59.34	32.47	7.7	32.7	100	307	P	H
		2483.52	49.85	-4.15	54	42.39	32.46	7.7	32.7	100	307	A	H
		2462	101.26	-	-	93.87	32.42	7.67	32.7	100	187	P	V
		2462	94	-	-	86.61	32.42	7.67	32.7	100	187	A	V
		2483.64	69.83	-4.17	74	62.37	32.46	7.7	32.7	100	187	P	V
		2483.56	50.08	-3.92	54	42.62	32.46	7.7	32.7	100	187	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 0	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	45.56	-28.44	74	51.95	34.83	10.92	52.14			P	H
		4824	45.08	-28.92	74	51.47	34.83	10.92	52.14			P	V
802.11n HT20 CH 06 2437MHz		4874	46.74	-27.26	74	52.99	34.85	11	52.1			P	H
		7311	47.63	-26.37	74	49.71	36.32	13.39	51.79			P	H
		4874	44.37	-29.63	74	50.62	34.85	11	52.1			P	V
		7311	46.82	-27.18	74	48.9	36.32	13.39	51.79			P	V
802.11n HT20 CH 11 2462MHz		4924	44.75	-29.25	74	50.86	34.87	11.08	52.06			P	H
		7386	47.28	-26.72	74	49.44	36.35	13.19	51.7			P	H
		4924	44.67	-29.33	74	50.78	34.87	11.08	52.06			P	V
		7386	47.05	-26.95	74	49.21	36.35	13.19	51.7			P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n20 (LF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		55.22	18.62	-21.38	40	31.75	20.08	1.74	34.95			P	H
		165.8	24.73	-18.77	43.5	37.7	19.27	2.46	34.7			P	H
		266.68	27.72	-18.28	46	40.78	18.73	2.88	34.67			P	H
		562.53	25.8	-20.2	46	31.37	25.06	3.9	34.53			P	H
		756.53	30.15	-15.85	46	32.23	27.93	4.38	34.39			P	H
		933.07	31.6	-14.4	46	31.48	29.65	4.77	34.3			P	H
		50.37	27.43	-12.57	40	40.46	20.29	1.68	35			P	V
		82.38	27.19	-12.81	40	44.96	15.01	1.94	34.72			P	V
		162.89	26.71	-16.79	43.5	39.65	19.31	2.45	34.7			P	V
		350.1	21.43	-24.57	46	31.95	20.87	3.21	34.6			P	V
		522.76	25.01	-20.99	46	31.43	24.32	3.76	34.5			P	V
		806	29.33	-16.67	46	30.88	28.27	4.48	34.3			P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	96.96	1.388	0.720	1KHz
802.11n HT20	96.75	1.294	0.773	1KHz

802.11b

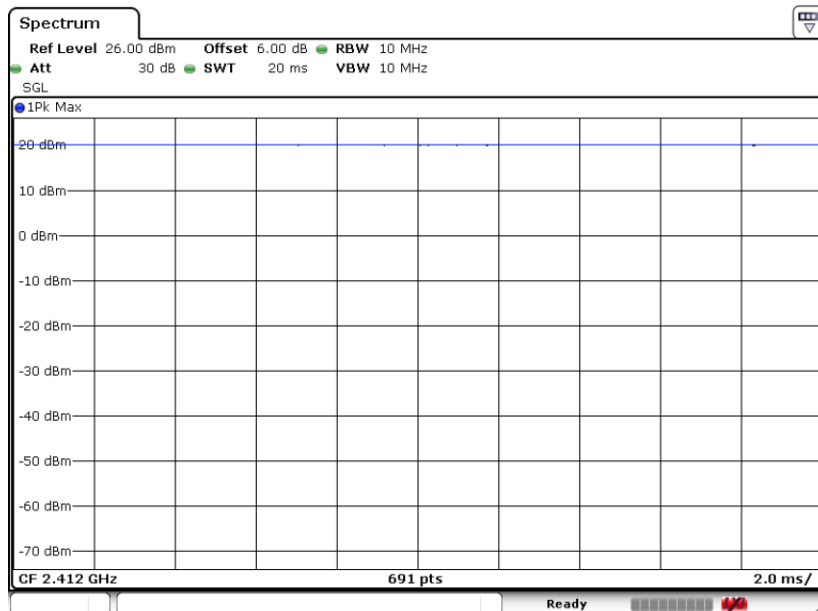



802.11g

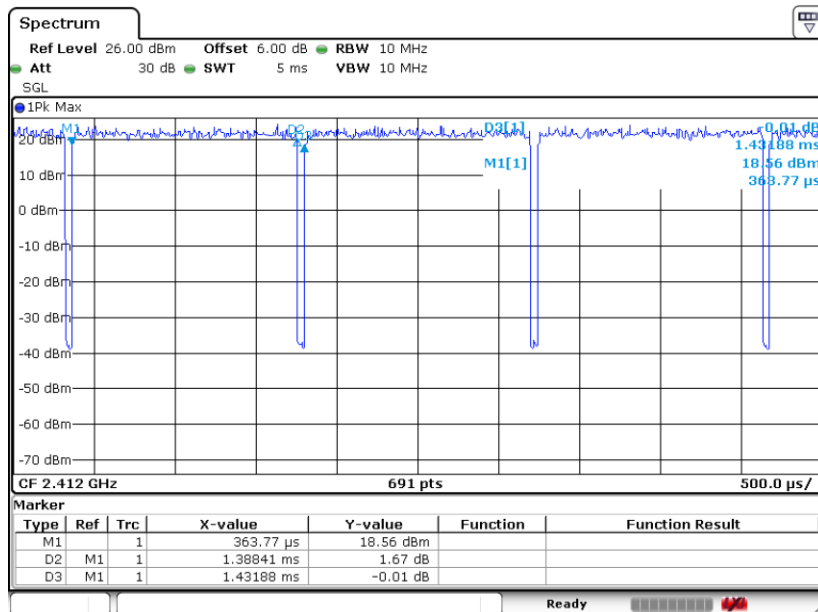

802.11n HT20

