

深圳市欧皇通讯科技有限公司

Shenzhen Ouhuang Communication Technology Co., Ltd.

Product specification

Customer: 三马

Material NO.:

Product: 防水式双铜管天线（型号：SM300）

Gauge lattice: The antenna length is 300.00mm, the copper tube size is $\phi 5.20 \times 22.00\text{mm}$, the coaxial line length is 270mm, with the first generation terminal, $\phi 1.37\text{mm}$, black, the copper tube is all covered with rubber heat shrink sleeve, and the two ends are sealed waterproof design.

Date: 2023-08-16

Customer confirmation/date

Add: 1001 Pingtaichang Science Park, Yongnan Industrial Zone, Gongming Street, Guangming District, Shenzhen

TEL: 0755-23713891 FAX: 0755-61193120

Directory

1. Overview of Specifications.....	3
2. Electrical property.....	3
2.1. Antenna band.....	3
2.2. Matching circuit.....	3
2.3. Impedance requirement.....	3
2.4. Passive test data.....	4
3. Antenna structure diagram.....	8

1.Overview of Specifications


The admission describes the WIFI antenna condition of Sanma double copper tube antenna, its frequency band is 2.4G/5GHz, the manufacturer is Shenzhen Ouhuang Communication Technology Co., LTD.

2.Electrical property

2.1 Antenna band

Transmit/Receive (Hz)	WIFI	
	2.4G~2.5G	5.1G~5.9G

2.2 Matching circuit

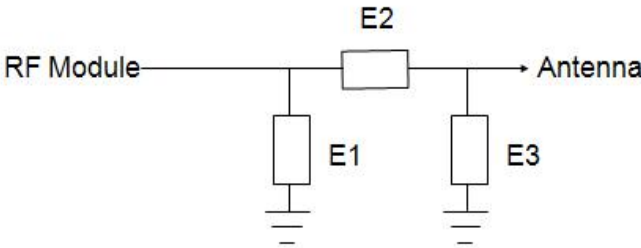

Element	Value
E1(0402)	Original match
E2(0402)	Original match
E3(0402)	Original match



2.3 Impedance requirement
50 ohm

2.4 Passive test data:

2.4G data:


Electrical Properties	
Frequency	2.4GHz-2.5GHz
Impedance	50 ohm Nominal
V. S. W. R	1: 1.17 Max
Return Loss	-21.81dB Max
Radiation	Omni-directional
Polarization	Linear, Vertical

VSWR&Return Loss&Smith Chart:

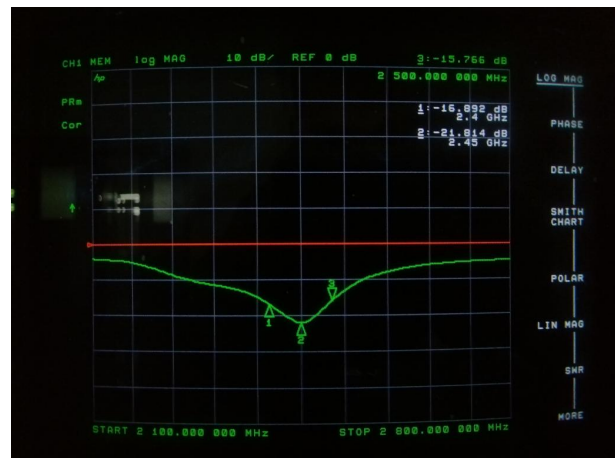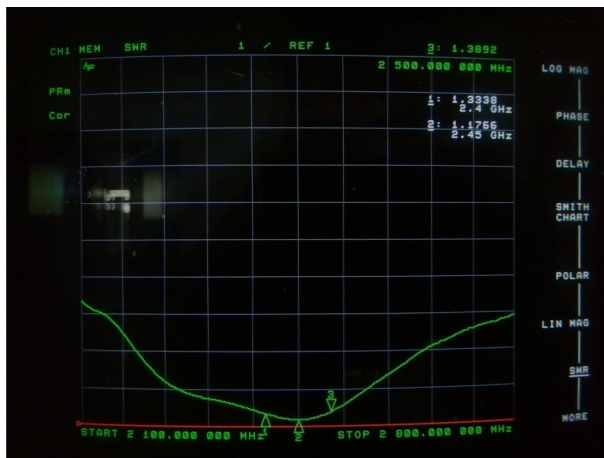

Efficiency, gain, directivity:



Passive Test For 2.4G-WIFI							
Freq	Effi	Gain	Gain	UHS	DHIS	Max	Min
(MHz)	(%)	(dBi)	(dBd)	(%)	(%)	(dB)	(dB)
2400	60.4	3.08	0.93	30.032	27.372	3.08	-21.13
2450	64.23	3.05	0.9	33.726	25.503	3.05	-15.95
2500	59.59	2.74	0.49	27.418	28.169	2.74	-17.83

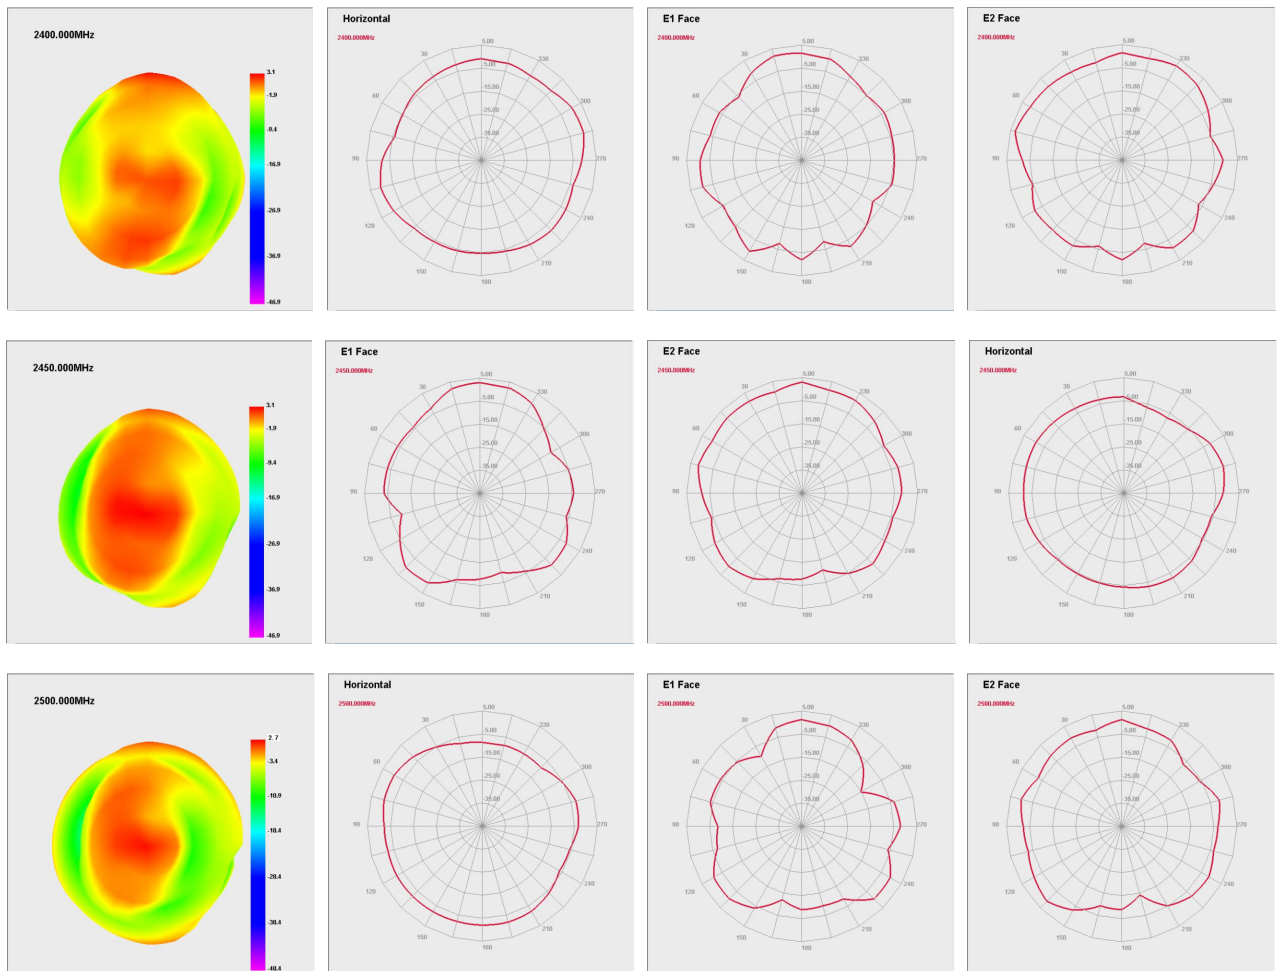

5G date:

Electrical Properties	
Frequency	5.1GHz-5.9GHz
Impedance	50 ohm Nominal
V. S. W. R	1: 1.10 Max
Return Loss	-25.67dB Max
Radiation	Omni-directional
Polarization	Linear, Vertical

VSWR&Return Loss&Smith Chart:

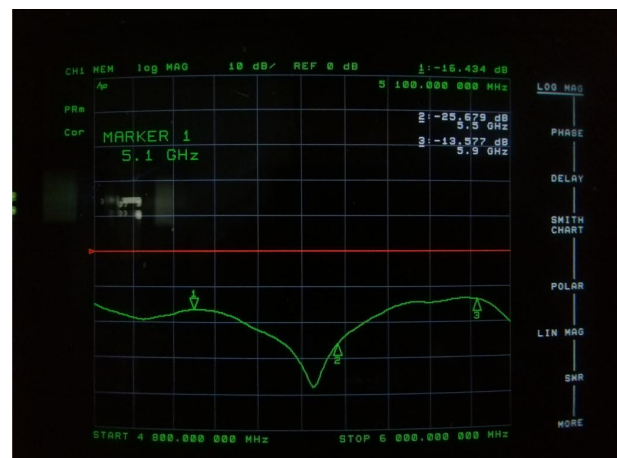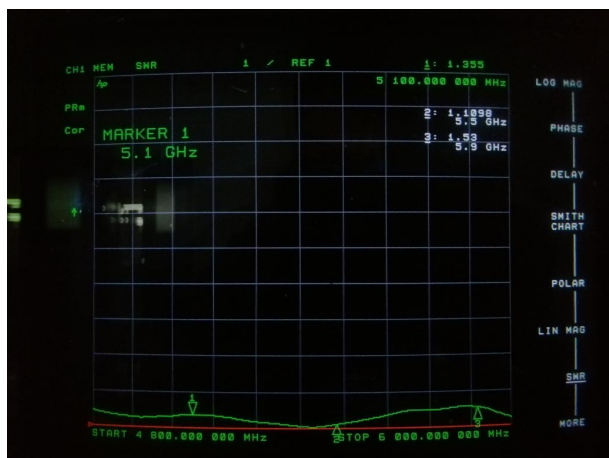

Efficiency, gain, directivity:

Passive Test For 5G-WIFI							
Freq	Effi	Gain	Gain	UHS	DHIS	Max	Min
(MHz)	(%)	(dBi)	(dBd)	(%)	(%)	(dB)	(dB)
5100	61.08	3.24	1.09	20.371	14.71	3.24	-21.17
5500	64.35	3.53	1.38	25.047	12.299	3.53	-16.21
5900	59.61	2.84	0.69	17.675	11.938	0.84	-21.5

