

FCC Test Report

FCC ID : 2AIHDMOD1

Equipment : Samsara MOD1

Model No. : 470-0003-01

Brand Name : Samsara

Applicant : SAMSARA NETWORKS INC

Address : 501 York St San Francisco California United

States 94110

Standard : 47 CFR FCC Part 15.247

Received Date : Nov. 18, 2016

Tested Date : Nov. 22 ~ Nov. 23, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Cher // Assistant Manager Gary Chang / Manager

TAF

Testing Laboratory

Report No.: FR6N1801 Page: 1 of 42



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	7
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	14
3.3	RF Output Power	
3.4	Power Spectral Density	18
3.5	Emissions in Restricted Frequency Bands	20
3.6	Emissions in non-restricted Frequency Bands	39
4	TEST LABORATORY INFORMATION	42



Release Record

Report No.	Version	Description	Issued Date
FR6N1801	Rev. 01	Initial issue	Dec. 14, 2016

Report No.: FR6N1801 Page : 3 of 42



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 18.622MHz 25.59 (Margin -24.41dB) - AV	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 50.37MHz	Pass
15.209	nadiated Effissions	36.18 (Margin -3.82dB) - PK	Fd55
15.247(b)(3)	Maximum Output Power	Power [dBm]: 19.84	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR6N1801 Page: 4 of 42



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz) Bluetooth Ch. Freq. (MHz) Channel Number Data Rate						
2400-2483.5 V4.0 LE 2402-2480 0-39 [40] 1 Mbps						
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.						

1.1.2 Antenna Details

Ant. No.	Туре	Connector	Connector Gain (dBi)	
1	PIFA	No	2.19	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	1.5Vdc from host
-------------------	------------------

1.1.4 Accessories

N/A

Report No.: FR6N1801 Page: 5 of 42



1.1.5 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

1.1.6 Test Tool and Duty Cycle

Test tool	nRFgo Studio, version: 1.21.2.10
Duty cycle of test signal (%)	64.52%
Duty Factor (dB)	1.90

1.1.7 Power Setting

Madulation Mada	Test Frequency (MHz)				
Modulation Mode	2402	2440	2480		
GFSK/1Mbps	Default	Default	Default		

Note: Measured output power values are listed in section 3.3.4

Report No.: FR6N1801 Page: 6 of 42




1.2 Local Support Equipment List

	Support Equipment List							
No.	Equipment	Signal cable / Length (m)						
1	Notebook	DELL	Latitude E6430	DoC				
2	DC Power Supply	GW INSTEK	GPC-6030D					
3	50Ω terminator							
4	Fixture							

Note: Fixture is provided by applicant.

1.3 Test Setup Chart

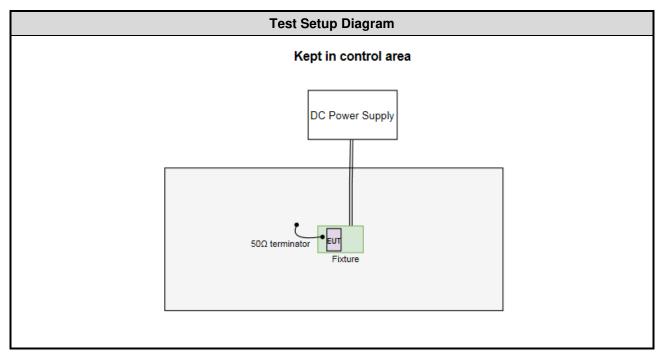

Note: The support notebook is disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Report No.: FR6N1801 Page: 7 of 42



1.4 Test Equipment List and Calibration Data

Test Item	Conducted Emission							
Test Site	Conduction room 1 /	Conduction room 1 / (CO01-WS)						
Instrument Manufacturer Model No. Serial No. Calibration Date Calibrat								
EMC Receiver	R&S	ESR-3	102052	Apr. 19, 2016	Apr. 18, 2017			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2015	Nov. 25, 2016			
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016			
Measurement Software AUDIX e3 6.120210k NA NA								
Note: Calibration Interval of instruments listed above is one year.								

Test Item	Radiated Emission						
Test Site	966 chamber1 / (03	CH01-WS)					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101498	Dec. 13, 2015	Dec. 12, 2016		
Receiver	R&S	ESR3	101657	Jan. 12, 2016	Jan. 11, 2017		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017		
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 16, 2015	Dec. 15, 2016		
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017		
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017		
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 10, 2015	Dec. 09, 2016		
Preamplifier	EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017		
Preamplifier	Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017		
Preamplifier	EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 10, 2015	Dec. 09, 2016		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 10, 2015	Dec. 09, 2016		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 10, 2015	Dec. 09, 2016		
LF cable 1M	EMC	EMCCFD400-NM-NM-1000	16052	Dec. 10, 2015	Dec. 09, 2016		
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 10, 2015	Dec. 09, 2016		
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 10, 2015	Dec. 09, 2016		
Measurement Software	AUDIX	e3	6.120210g	NA	NA		
Note: Calibration Inte	erval of instruments li	sted above is one year.					

Report No.: FR6N1801 Page: 8 of 42



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2016	Feb. 16, 2017
Power Meter	Anritsu	ML2495A	1241002	Oct. 06, 2016	Oct. 05, 2017
Power Sensor	Anritsu	MA2411B	1207366	Oct. 06, 2016	Oct. 05, 2017
DC POWER SOURCE	GW INSTEK	GPC-6030D	EM892433	Oct. 20, 2016	Oct. 19, 2017
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Inter	rval of instruments liste	d above is one year.		•	

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2013 FCC KDB 558074 D01 DTS Meas Guidance v03r05

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters	Uncertainty				
Bandwidth	±34.134 Hz				
Conducted power	±0.808 dB				
Power density	±0.463 dB				
Conducted emission	±2.670 dB				
AC conducted emission	±2.90 dB				
Radiated emission ≤ 1GHz	±3.66 dB				
Radiated emission > 1GHz	±5.63 dB				

Report No.: FR6N1801 Page: 9 of 42



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	19°C / 63%	Howard Huang
Radiated Emissions	03CH01-WS	22°C / 62%	Vincent Yeh
RF Conducted	TH01-WS	21°C / 65%	Brad Wu

FCC site registration No.: 181692IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2440	1Mbps	
Radiated Emissions ≤ 1GHz	BT LE	2440	1Mbps	
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	
Maximum Output Power				
6dB bandwidth	BT LE	2402, 2440, 2480	1Mbps	
Power spectral density				

NOTE:

Report No.: FR6N1801 Page: 10 of 42

^{1.} The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit					
Frequency Emission (MHz) Quasi-Peak Average					
0.15-0.5	66 - 56 *	56 - 46 *			
0.5-5	56	46			
5-30	60	50			
Note 1: * Decreases with the logarithm of the frequency.					

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

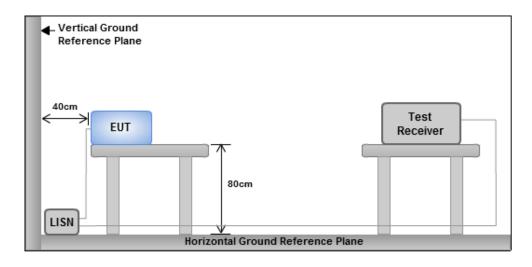


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR6N1801 Page: 11 of 42




3.1.4 Test Result of Conducted Emissions

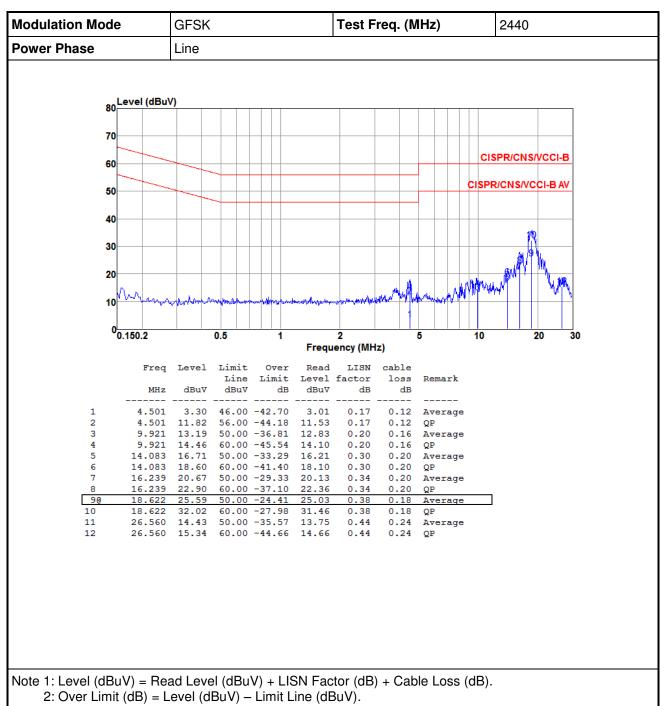

Report No.: FR6N1801 Page: 12 of 42



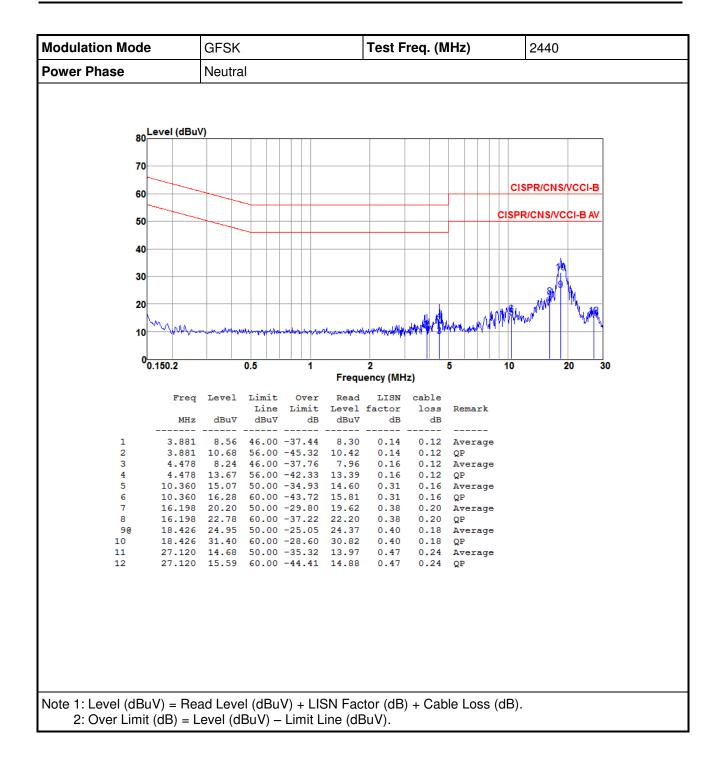

Report No.: FR6N1801 Page: 13 of 42



3.2 6dB and Occupied Bandwidth

3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures


6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set resolution bandwidth (RBW) = 30 kHz, Video bandwidth = 100 kHz.
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.2.3 Test Setup




Report No.: FR6N1801 Page: 14 of 42



3.2.4 Test Result of 6dB and Occupied Bandwidth

Mode	Freq. (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit of 6dB Bandwidth (kHz)
BT LE	2402	0.700	1.04	500
BT LE	2440	0.704	1.05	500
BT LE	2480	0.704	1.05	500

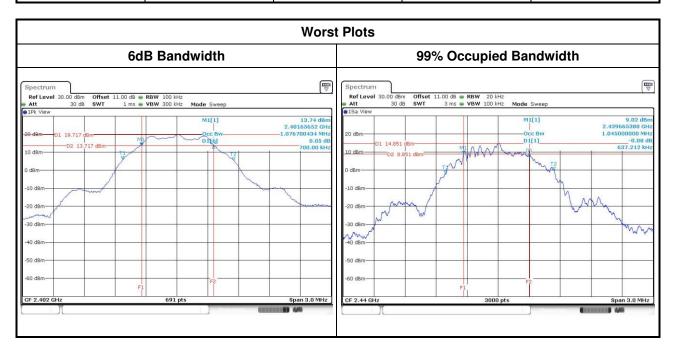

Report No.: FR6N1801 Page: 15 of 42



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

□ Spectrum analyzer

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Average Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR6N1801 Page: 16 of 42



3.3.4 Test Result of Maximum Output Power

		Peak Power			Antenna	EIRP	EIRP
Mode	Freq. (MHz)	Power (mW)	Power (dBm)	Limit (dBm)	gain (dBi)	(dBm)	Limit (dBm)
BT LE	2402	95.280	19.79	30	2.19	21.98	36
BT LE	2440	96.383	19.84	30	2.19	22.03	36
BT LE	2480	94.624	19.76	30	2.19	21.95	36

Mode	Freq. (MHz)	AV Power (mW)	AV Power (dBm)	Limit (dBm)
BT LE	2402	93.756	19.72	
BT LE	2440	94.624	19.76	
BT LE	2480	92.897	19.68	

Note: Average power is for reference only

Report No.: FR6N1801 Page: 17 of 42



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




Report No.: FR6N1801 Page: 18 of 42



3.4.4 Test Result of Power Spectral Density

Mode	Total Power Spectral lode Freq. (MHz) Density (dBm/3kHz)		Limit (dBm/3kHz)	
BT LE	2402	4.49	8	
BT LE	2440	4.43	8	
BT LE	2480	4.39	8	

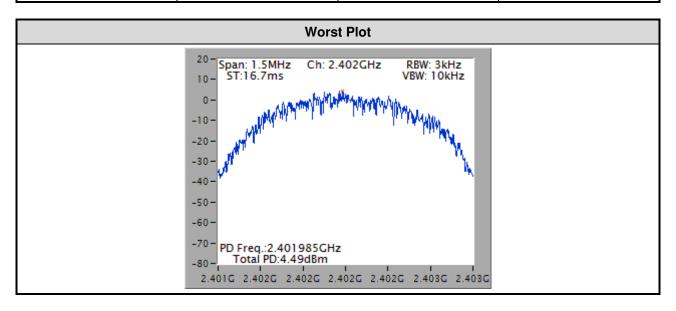

Report No.: FR6N1801 Page: 19 of 42



3.5 Emissions in Restricted Frequency Bands

3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit							
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300				
0.490~1.705	24000/F(kHz)	33.8 - 23	30				
1.705~30.0	30	29	30				
30~88	100	40	3				
88~216	150	43.5	3				
216~960	200	46	3				
Above 960	500	54	3				

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR6N1801 Page: 20 of 42




3.5.3 Test Setup

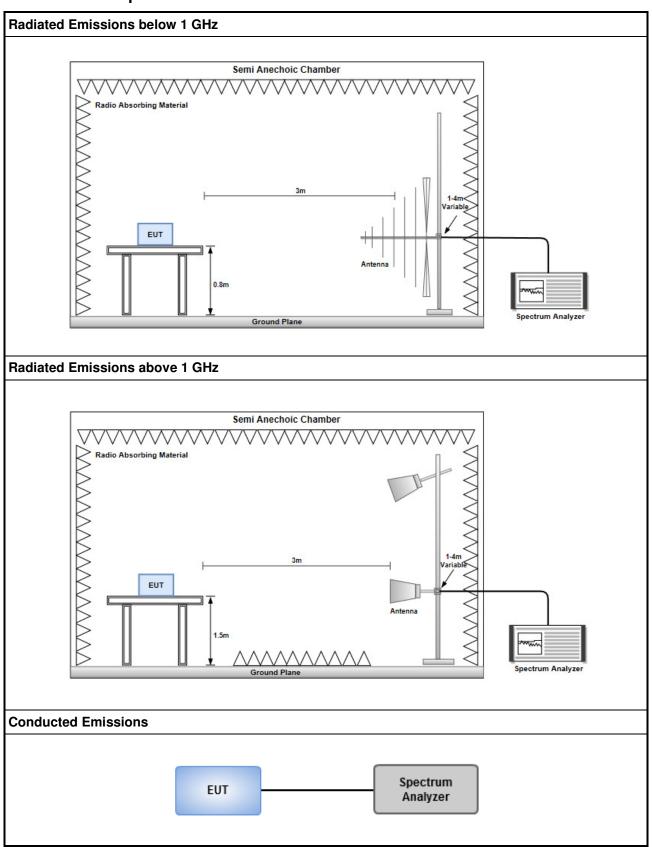

Report No.: FR6N1801 Page: 21 of 42



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

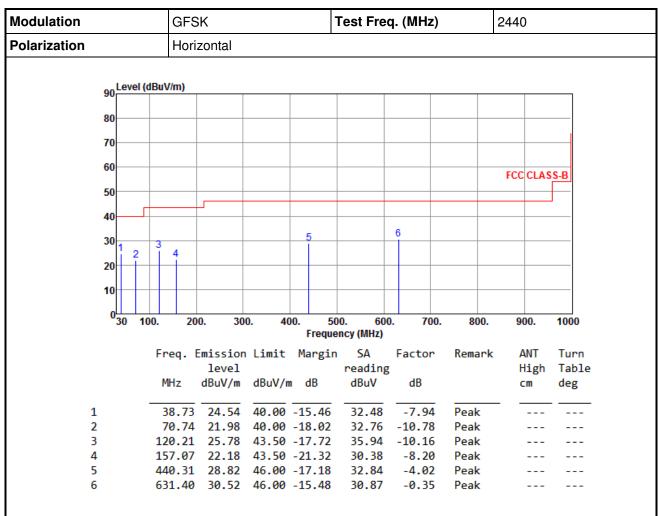

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR6N1801 Page: 22 of 42



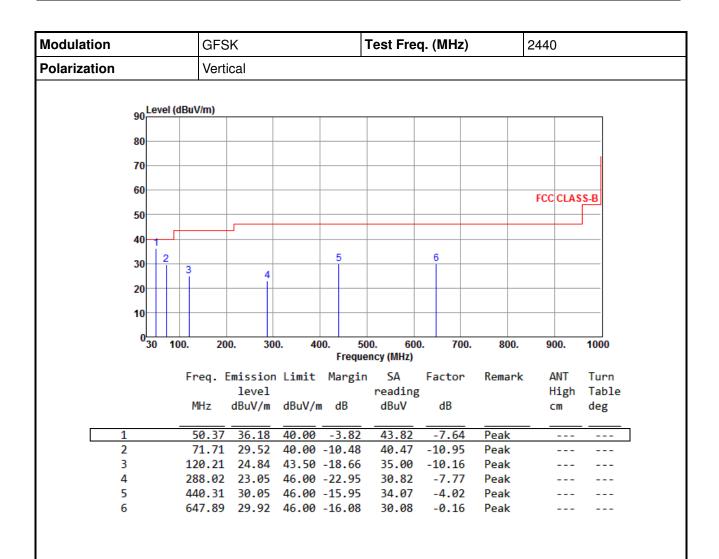

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR6N1801 Page: 23 of 42



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

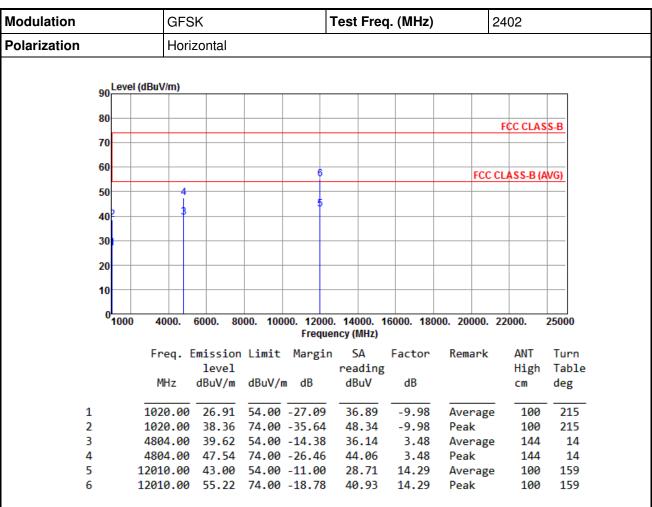

Note 1: Emission Level $(dBuV/m) = SA Reading (dBuV/m) + Factor^* (dB)$


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR6N1801 Page: 24 of 42



Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical		

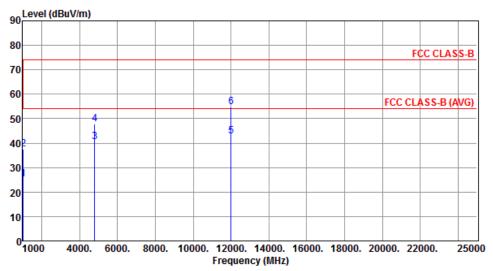


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
	4000 00			20.62					462
1	1020.00	25.37	54.00	-28.63	35.35	-9.98	Average	100	163
2	1020.00	37.66	74.00	-36.34	47.64	-9.98	Peak	100	163
3	4804.00	40.67	54.00	-13.33	37.19	3.48	Average	131	358
4	4804.00	47.91	74.00	-26.09	44.43	3.48	Peak	131	358
5	12010.00	42.81	54.00	-11.19	28.52	14.29	Average	100	43
6	12010.00	54.68	74.00	-19.32	40.39	14.29	Peak	100	43

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR6N1801 Page: 25 of 42



Modulation	GFSK	Test Freq. (MHz)	2440
Polarization	Horizontal		
90 Level (dBu	V/m)		

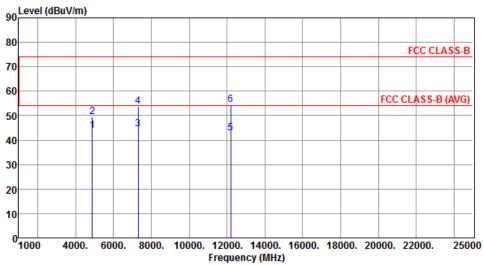


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4880.00	43.92	54.00	-10.08	40.21	3.71	Average	218	143
2	4880.00	49.60	74.00	-24.40	45.89	3.71	Peak	218	143
3	7320.00	44.39	54.00	-9.61	35.87	8.52	Average	100	163
4	7320.00	53.76	74.00	-20.24	45.24	8.52	Peak	100	163
5	12200.00	42.99	54.00	-11.01	28.50	14.49	Average	100	245
6	12200.00	54.49	74.00	-19.51	40.00	14.49	Peak	100	245

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR6N1801 Page: 26 of 42



Modulation	GFSK	Test Freq.	(MHz)	24	40		
Polarization	Vertical						
90 Level (dB	uV/m)						

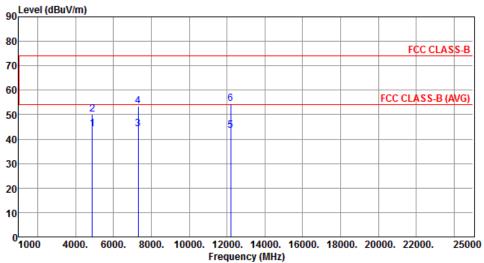


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4880.00	44.06	54.00	-9.94	40.35	3.71	Average	100	309
2	4880.00	50.11	74.00	-23.89	46.40	3.71	Peak	100	309
3	7320.00	44.17	54.00	-9.83	35.65	8.52	Average	280	251
4	7320.00	53.34	74.00	-20.66	44.82	8.52	Peak	280	251
5	12200.00	43.61	54.00	-10.39	29.12	14.49	Average	100	48
6	12200.00	54.57	74.00	-19.43	40.08	14.49	Peak	100	48

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR6N1801 Page: 27 of 42



Modulation			GFSK			Test	Freq.	(MHz)	24	80	
Polarization			Horizo	ntal							
	Leve	el (dBuV	/m)								
	10										
	0										

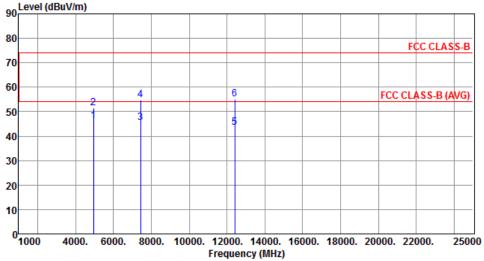


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	4960.00	46.12	54.00	-7.88	42.14	3.98	Average	100	284
2	4960.00	51.53	74.00	-22.47	47.55	3.98	Peak	100	284
3	7440.00	45.56	54.00	-8.44	36.92	8.64	Average	100	156
4	7440.00	54.73	74.00	-19.27	46.09	8.64	Peak	100	156
5	12400.00	43.40	54.00	-10.60	28.70	14.70	Average	100	223
6	12400.00	54.98	74.00	-19.02	40.28	14.70	Peak	100	223

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR6N1801 Page: 28 of 42



Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical		

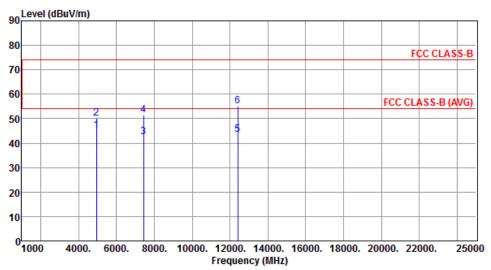

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	4960.00	45.26	54.00	-8.74	41.28	3.98	Average	100	312
2	4960.00	50.14	74.00	-23.86	46.16	3.98	Peak	100	312
3	7440.00	42.39	54.00	-11.61	33.75	8.64	Average	100	177
4	7440.00	51.57	74.00	-22.43	42.93	8.64	Peak	100	177
5	12400.00	43.44	54.00	-10.56	28.74	14.70	Average	100	58
6	12400.00	55.09	74.00	-18.91	40.39	14.70	Peak	100	58

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR6N1801 Page: 29 of 42



3.5.6 Transmitter Conducted Unwanted Emissions (Below 1 GHz)

	Transmitter Conducted Unwanted Emissions Results											
Test ch. Freq. (MHz)	Range (MHz)	Max Value (dBm)	Gain (dBi)	EIRP (dBm)	Limit* (dBm)	Margin (dB)						
2402	30-1000	-64.99	2.19	-62.80	-55.20	-7.60						
2440	30-1000	-73.45	2.19	-71.26	-55.20	-16.06						
2480	30-1000	-63.57	2.19	-61.38	-55.20	-6.18						


Note: Worst case of emission limit below 1GHz is selected to be limit.

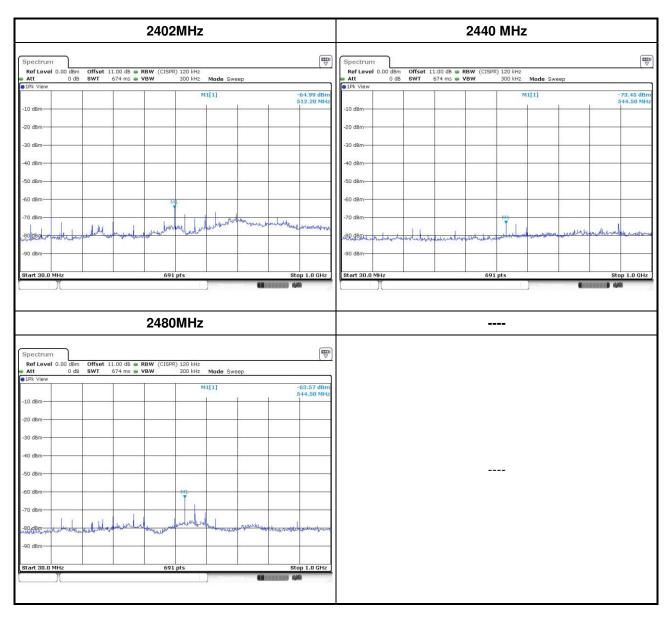

Report No.: FR6N1801 Page: 30 of 42



3.5.7 Transmitter Conducted Unwanted Emissions (Above 1GHz)

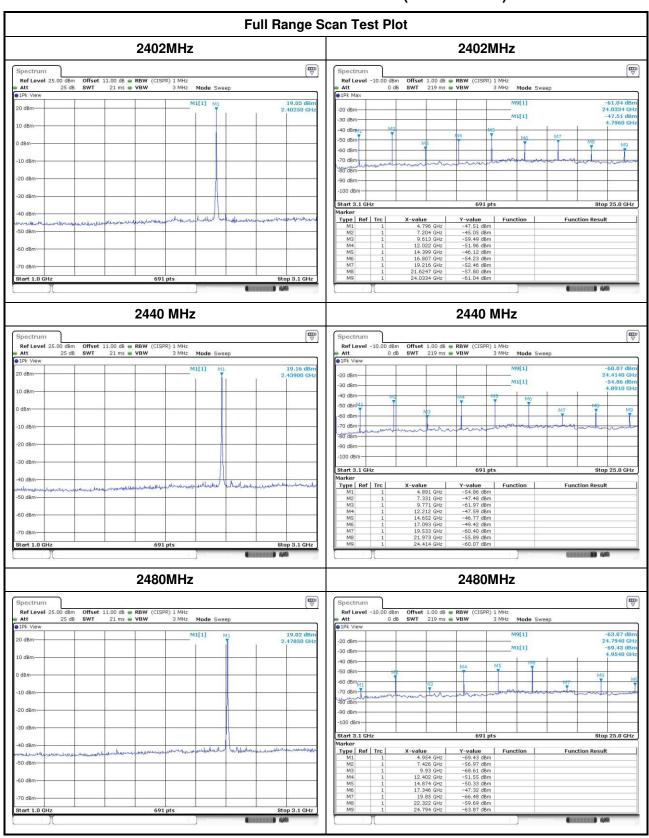


Report No.: FR6N1801 Page: 31 of 42




	Transmi	itter Conduct	ed Unwanted	l Emissions F	Results in Ba	nd Edge	
Test ch. Freq. (MHz)	Freq (MHz)	Measured Value (dBm)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Remark
2402	2389.71	-43.56	2.19	-41.37	-21.20	-20.17	PK
2402	2337.96	-50.91	2.19	-48.72	-41.20	-7.52	AV
	2311.79	-42.75	2.19	-40.56	-21.20	-19.36	PK
2440	2375.93	-49.88	2.19	-47.69	-41.20	-6.49	AV
2440	2488.41	-45.50	2.19	-43.31	-21.20	-22.11	PK
	2499.77	-57.92	2.19	-55.73	-41.20	-14.53	AV
	2483.50	-34.75*	2.19	-32.56	-21.20	-11.36	PK
2480	2483.58	-45.52	2.19	-43.33	-41.20	-2.13	AV
	2485.51	-24.99	2.19	-22.80	-21.20	-1.60	PK

Note1: The value is calculated by marker-delta method = 18.92dBm - 53.67dB = -34.75 dBm Note2: Average value of 2485.5MHz is lower than value of 2483.5MHz please refer to plot of p34

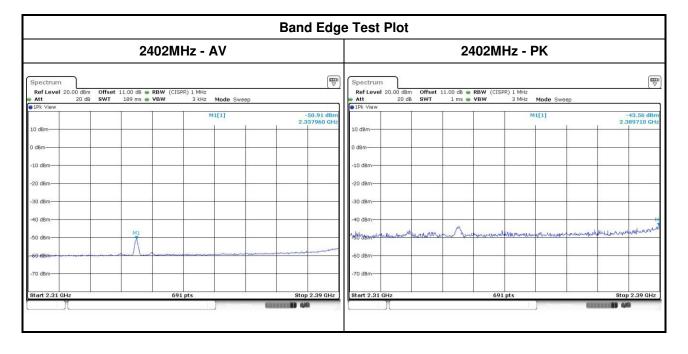


Report No.: FR6N1801 Page: 32 of 42



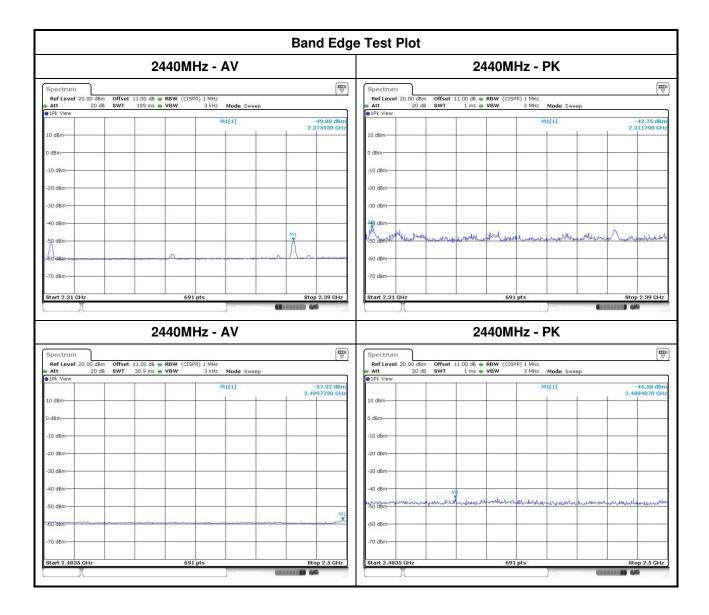

Report No.: FR6N1801 Page: 33 of 42




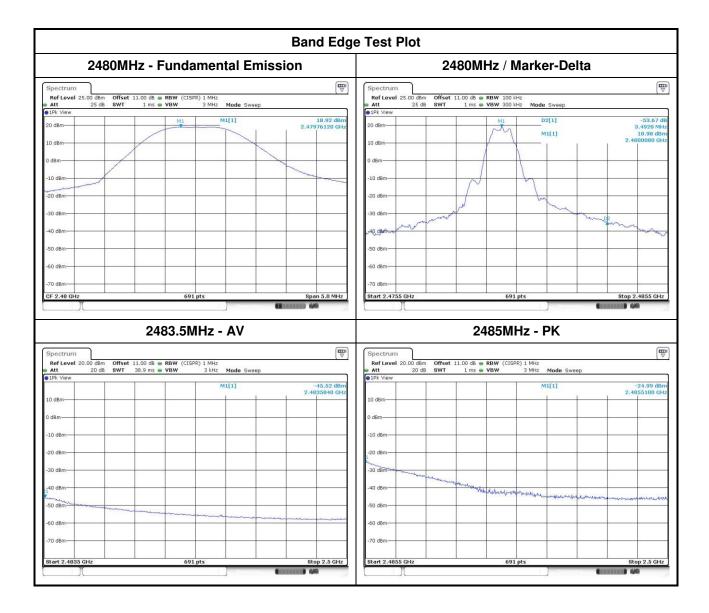

Report No.: FR6N1801 Page: 34 of 42




)2 MHz										
Frequency 2402 MHz										
chain0 (dBm)	Gain (dBi)	EIRP (dBm)	E-Field Limit (dBm)	E-Field Margin (dB)	Remark					
-48.84	2.19	-46.65	-21.20	-25.45	PK					
-50.48	2.19	-48.29	-21.20	-27.09	PK					
-52.43	2.19	-50.24	-21.20	-29.04	PK					
	-48.84 -50.48 -52.43	(dBm) (dBi) -48.84 2.19 -50.48 2.19	(dBm) (dBi) (dBm) -48.84 2.19 -46.65 -50.48 2.19 -48.29 -52.43 2.19 -50.24	chain0 (dBm) Gain (dBi) EIRP (dBm) Limit (dBm) -48.84 2.19 -46.65 -21.20 -50.48 2.19 -48.29 -21.20	Chain0 (dBm) Gain (dBi) EIRP (dBm) Limit (dBm) Margin (dB) -48.84 2.19 -46.65 -21.20 -25.45 -50.48 2.19 -48.29 -21.20 -27.09					

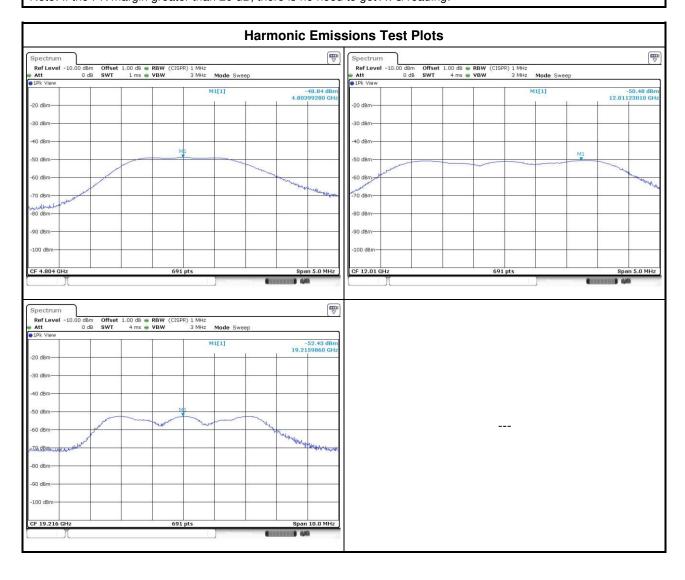

Report No.: FR6N1801 Page: 35 of 42



Trans	Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band										
Frequency	2440 MHz										
Freq (MHz)	chain0 (dBm)	Gain (dBi)	EIRP (dBm)	E-Field Limit (dBm)	E-Field Margin (dB)	Remark					
4880.00	-57.18	2.19	-54.99	-21.20	-33.79	PK					
7319.24	-48.07	2.19	-45.88	-21.20	-24.68	PK					
12198.73	-49.09	2.19	-46.90	-21.20	-25.70	PK					
19522.00	-60.20	2.19	-58.01	-21.20	-36.81	PK					

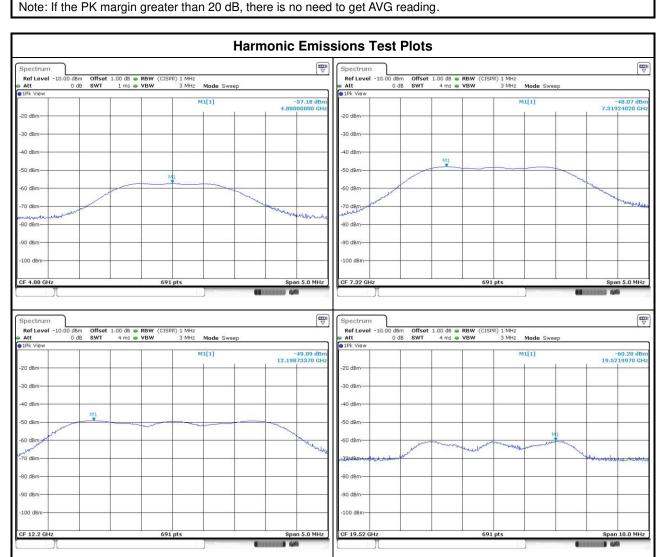


Report No.: FR6N1801 Page: 36 of 42



Transmitter Conducted Unwanted Emissions Results in Restricted Frequency Band						
Frequency	2480 MHz					
Freq (MHz)	chain0 (dBm)	Gain (dBi)	EIRP (dBm)	E-Field Limit (dBm)	E-Field Margin (dB)	Remark
4960.11	-68.07	2.19	-65.88	-21.20	-44.68	PK
7439.18	-56.09	2.19	-53.90	-21.20	-32.70	PK
12401.31	-51.27	2.19	-49.08	-21.20	-27.88	PK
19837.92	-64.97	2.19	-62.78	-21.20	-41.58	PK
22317.80	-59.12	2.19	-56.93	-21.20	-35.73	PK
Note: If the PK margin greater than 20 dB, there is no need to get AVG reading.						

Report No.: FR6N1801 Page: 37 of 42



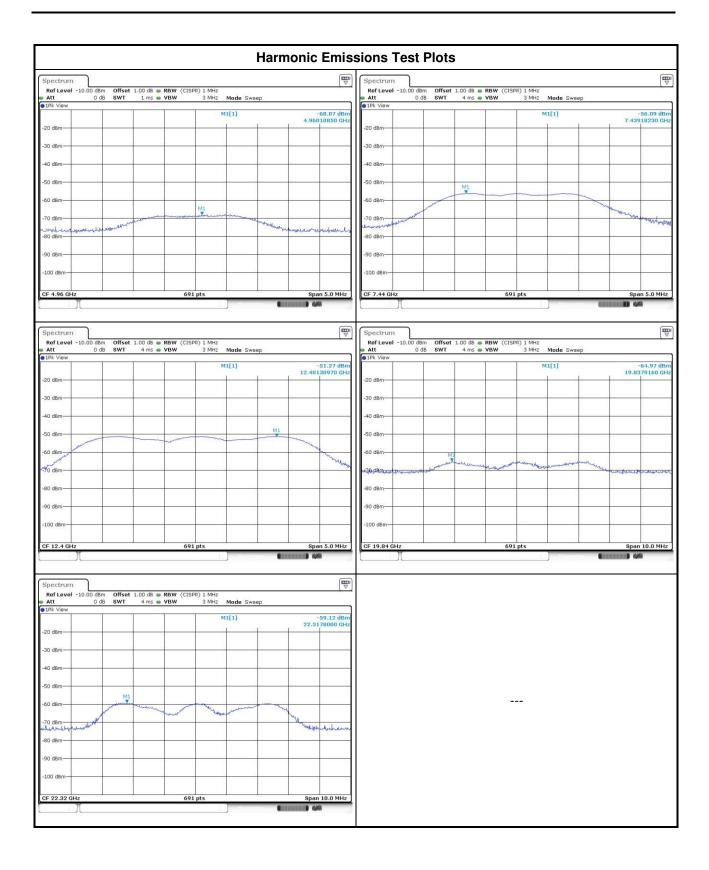

Report No.: FR6N1801 Page: 38 of 42



3.6 Emissions in non-restricted Frequency Bands

3.6.1 Emissions in non-restricted frequency bands limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.6.2 Test Procedures


Reference Level Measurement

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.6.3 Test Setup



Report No.: FR6N1801 Page: 39 of 42




3.6.4 Test Result of Emissions in non-restricted Frequency Bands

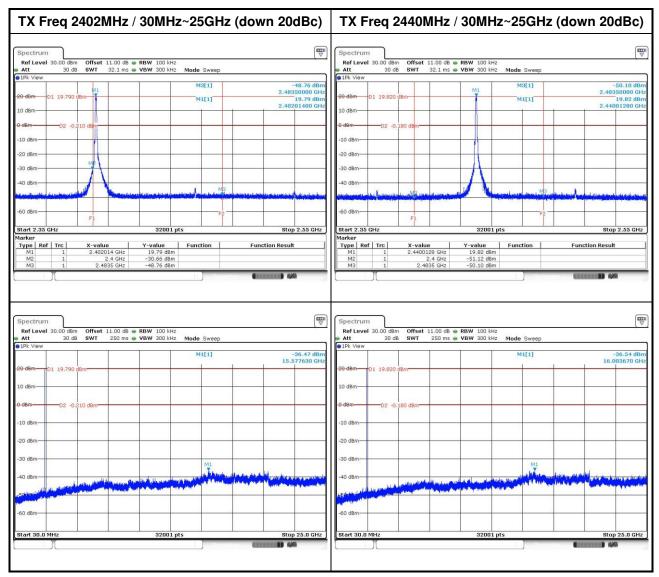

Report No.: FR6N1801 Page: 40 of 42



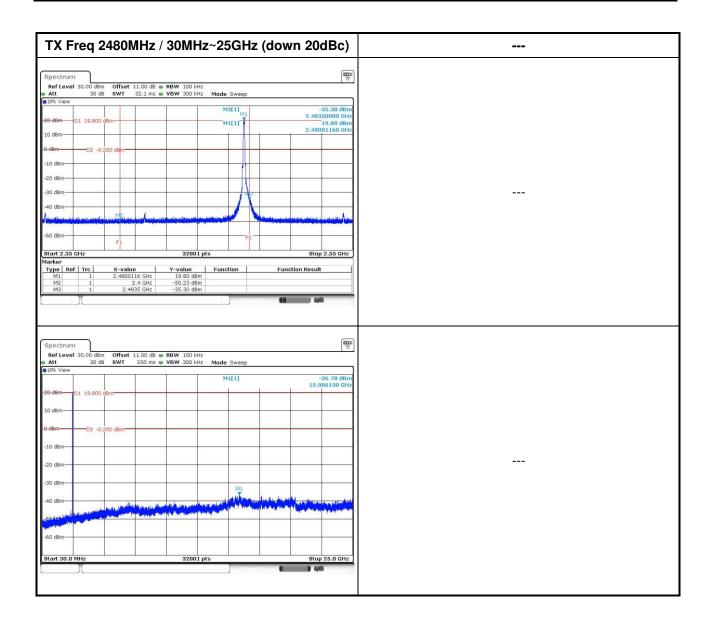

Report No.: FR6N1801 Page: 41 of 42



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR6N1801 Page: 42 of 42