

Report No.: RF191111E03-1

FCC ID: RRC4000XG

Test Model: C4000XG

Received Date: Nov. 11, 2019

Test Date: Nov. 12 to Dec. 02, 2019

Issued Date: Dec. 13, 2019

Applicant: Alpha Networks Inc.

Address: No.8 Li-shing 7th Rd., Science-based Industrial Park, Hsinchu, Taiwan,
R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	12
3.3 Duty Cycle of Test Signal	15
3.4 Description of Support Units	17
3.4.1 Configuration of System under Test	18
3.5 General Description of Applied Standard	19
4 Test Types and Results	20
4.1 Radiated Emission and Bandedge Measurement.....	20
4.1.1 Limits of Radiated Emission and Bandedge Measurement	20
4.1.2 Test Instruments	21
4.1.3 Test Procedure	24
4.1.4 Deviation from Test Standard	25
4.1.5 Test Setup.....	25
4.1.6 EUT Operating Condition	26
4.1.7 Test Results	27
4.2 Conducted Emission Measurement	47
4.2.1 Limits of Conducted Emission Measurement	47
4.2.2 Test Instruments	47
4.2.3 Test Procedure	48
4.2.4 Deviation from Test Standard	48
4.2.5 Test Setup.....	48
4.2.6 EUT Operating Condition	48
4.2.7 Test Results	49
4.3 Transmit Power Measurement	51
4.3.1 Limits of Transmit Power Measurement	51
4.3.2 Test Setup.....	51
4.3.3 Test Instruments	51
4.3.4 Test Procedure	51
4.3.5 Deviation from Test Standard	51
4.3.6 EUT Operating Condition	51
4.3.7 Test Result.....	52
4.4 Occupied Bandwidth Measurement	56
4.4.1 Test Setup.....	56
4.4.2 Test Instruments	56
4.4.3 Test Procedure	56
4.4.4 Test Results	57
4.5 Peak Power Spectral Density Measurement	63
4.5.1 Limits of Peak Power Spectral Density Measurement	63
4.5.2 Test Setup.....	63
4.5.3 Test Instruments	63
4.5.4 Test Procedure	63
4.5.5 Deviation from Test Standard	64
4.5.6 EUT Operating Condition	64
4.5.7 Test Results	65
4.6 Frequency Stability Measurement.....	71
4.6.1 Limits of Frequency Stability Measurement	71

4.6.2	Test Setup.....	71
4.6.3	Test Instruments	71
4.6.4	Test Procedure	71
4.6.5	Deviation from Test Standard	71
4.6.6	EUT Operating Condition	71
4.6.7	Test Results	72
4.7	6dB Bandwidth Measurement	73
4.7.1	Limits of 6dB Bandwidth Measurement	73
4.7.2	Test Setup.....	73
4.7.3	Test Instruments	73
4.7.4	Test Procedure	73
4.7.5	Deviation from Test Standard	73
4.7.6	EUT Operating Condition	73
4.7.7	Test Results	74
5	Pictures of Test Arrangements.....	76
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	77
	Appendix – Information of the Testing Laboratories	80

Release Control Record

Issue No.	Description	Date Issued
RF191111E03-1	Original release.	Dec. 13, 2019

1 Certificate of Conformity

Product: Wireless Gateway

Brand: CenturyLink

Test Model: C4000XG

Sample Status: ENGINEERING SAMPLE

Applicant: Alpha Networks Inc.

Test Date: Nov. 12 to Dec. 02, 2019

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Joyce Kuo , **Date:** Dec. 13, 2019
Joyce Kuo / Specialist

Approved by : Clark Lin , **Date:** Dec. 13, 2019
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -8.06dB at 0.15781MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.0 dB
	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Wireless Gateway
Brand	CenturyLink
Test Model	C4000XG
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2401.9Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Output Power	Non-Beamforming Mode: 2.4GHz: 965.166mW 5.18 ~ 5.24GHz: 928.785mW 5.745 ~ 5.825GHz: 959.035mW Beamforming Mode: 2.4GHz: 685.873mW 5.18 ~ 5.24GHz: 478.507mW 5.745 ~ 5.825GHz: 593.326mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	RJ45 Cable x2 (Brand: Nien-Yi/ Hunter, unshielded, 1.83m)

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied with a power adapter as following table:

No.	Brand	Model No.	Spec.	Plug
1	Asian Power Devices Inc	WA-48B12FU	AC Input: 100-240Vac, 1.5A, 50/60Hz DC Output: 12V, 4A DC Output Cable: 1.83m, Unshielded	US
2	LEADER ELECTRONICS INC.	ML48AY120400-A1	AC Input: 100-120Vac, 1.5A, 50/60Hz DC Output: 12V, 4A DC Output Cable: 1.83m, Unshielded	US

From the above adapters, the Emissions worse case was found in **Adapter 1**. Therefore only the test data of the mode was recorded in this report.

3. The antennas provided to the EUT, please refer to the following table:

1st source

Antenna NO.	Brand	Model	Antenna Type	Connector Type	Cable Length(mm)
2.4G-1	Hongbo	290-20433	PCB	i-pex(MHF)	295
2.4G-2	Hongbo	290-20434	PCB	i-pex(MHF)	340
2.4G-3	Hongbo	290-20435	PCB	i-pex(MHF)	220
2.4G-4	Hongbo	290-20436	PCB	i-pex(MHF)	240
5G-1	Hongbo	290-20437	PCB	i-pex(MHF)	125
5G-2	Hongbo	290-20438	PCB	i-pex(MHF)	220
5G-3	Hongbo	290-20439	PCB	i-pex(MHF)	240
5G-4	Hongbo	290-20440	PCB	i-pex(MHF)	175
*5G-5	Hongbo	290-20441	PCB	i-pex(MHF)	350

*Reserved for future permissive change. (Not evaluation for 5G-5 antenna)

2nd source

Antenna NO.	Brand	Model	Antenna Type	Connector Type	Cable Length(mm)
2.4G-1	Walsin	RFPCA351129IMAB401	PCB	i-pex(MHF)	295
2.4G-2	Walsin	RFPCA351134IMAB401	PCB	i-pex(MHF)	340
2.4G-3	Walsin	RFPCA351122IMAB401	PCB	i-pex(MHF)	220
2.4G-4	Walsin	RFPCA351124IMAB401	PCB	i-pex(MHF)	240
5G-1	Walsin	RFPCA201112IM5B401	PCB	i-pex(MHF)	125
5G-2	Walsin	RFPCA201122IM5B401	PCB	i-pex(MHF)	220
5G-3	Walsin	RFPCA201124IM5B401	PCB	i-pex(MHF)	240
5G-4	Walsin	RFPCA201117IM5B401	PCB	i-pex(MHF)	175
*5G-5	Walsin	RFPCA201135IM5B401	PCB	i-pex(MHF)	350

*Reserved for future permissive change. (Not evaluation for 5G-5 antenna)

From the above brand, brand: **Hongbo** was selected as representative model for the test and its data was recorded in this report.

4. The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Antenna Connector
2.4 ~ 2.5	7.4	PCB	i-pex(MHF)
5.15 ~ 5.25	9.1		
5.25 ~ 5.35	8.4		
5.47 ~ 5.725	8.3		
5.725 ~ 5.85	8.1		

Note: More detailed information, please refer to antenna specification.

5. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	1Tx Fixed Chain 3	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and non-beamforming mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n mode is the same as the 802.11ac or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (VHT80):

Channel	Frequency
42	5210 MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6Mb/s
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6Mb/s
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240 5745-5825	36 to 48 149 to 165	46	OFDMA	BPSK	MCS0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240 5745-5825	36 to 48 149 to 165	46	OFDMA	BPSK	MCS0

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.


Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6Mb/s
802.11ac (VHT20) (Output power only)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
802.11ac (VHT40) (Output power only)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11ac (VHT80) (Output power only)		42	42	OFDM	BPSK	MCS0
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6Mb/s
802.11ac (VHT20) (Output power only)		149 to 165	149, 157, 165	OFDM	BPSK	MCS0
802.11ac (VHT40) (Output power only)		151 to 159	151, 159	OFDM	BPSK	MCS0
802.11ac (VHT80) (Output power only)		155	155	OFDM	BPSK	MCS0
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	MCS0
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	MCS0
802.11ac (VHT80)		42	42	OFDM	BPSK	MCS0
802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	BPSK	MCS0
802.11ax (HE40)		38 to 46	38, 46	OFDMA	BPSK	MCS0
802.11ax (HE80)		42	42	OFDMA	BPSK	MCS0
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	MCS0
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	MCS0
802.11ac (VHT80)		155	155	OFDM	BPSK	MCS0
802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	BPSK	MCS0
802.11ax (HE40)		151 to 159	151, 159	OFDMA	BPSK	MCS0
802.11ax (HE80)		155	155	OFDMA	BPSK	MCS0

Test Condition:


Applicable To	Environmental Conditions	Input Power	Tested By
RE $\geq$ 1G	25deg. C, 69%RH	120Vac, 60Hz	Tom Yang
RE<1G	24deg. C, 65%RH	120Vac, 60Hz	Tom Yang
PLC	23deg. C, 76%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is 100 %, duty factor is not required.

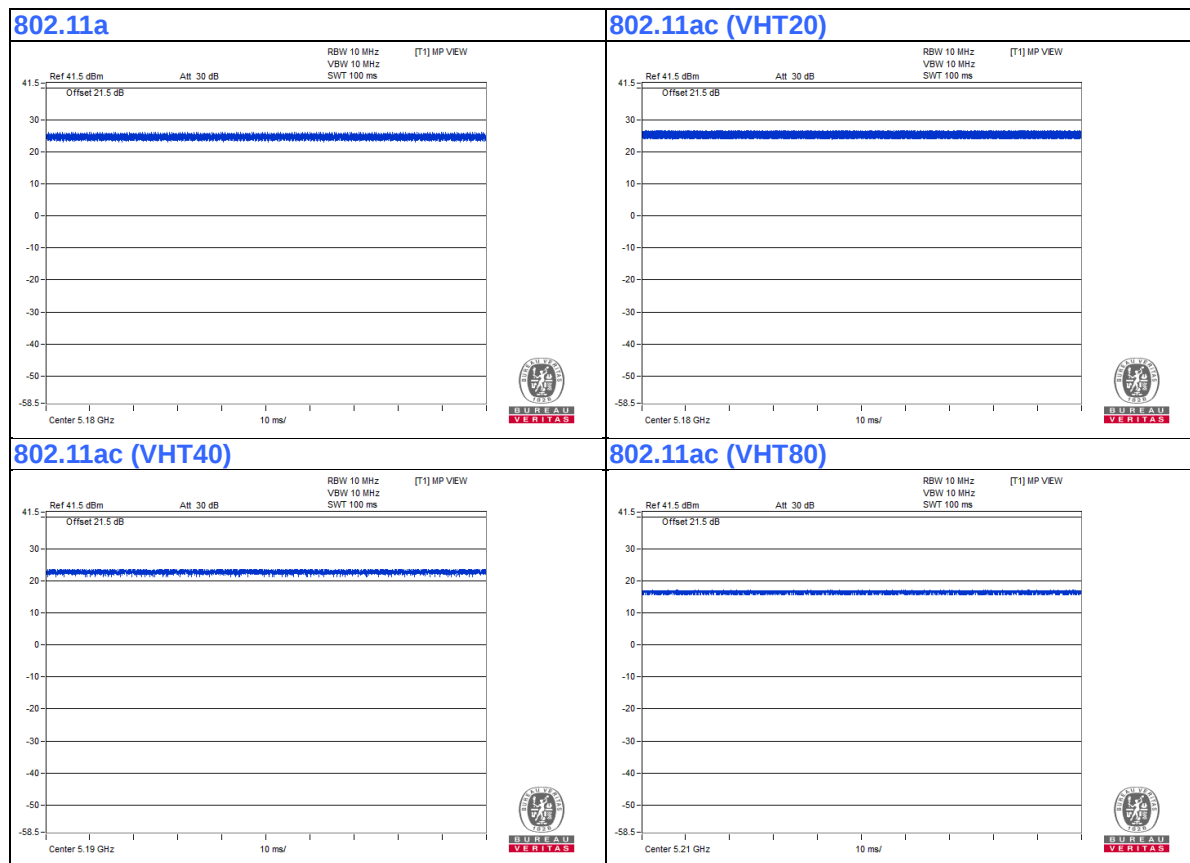


802.11ax (HE20)

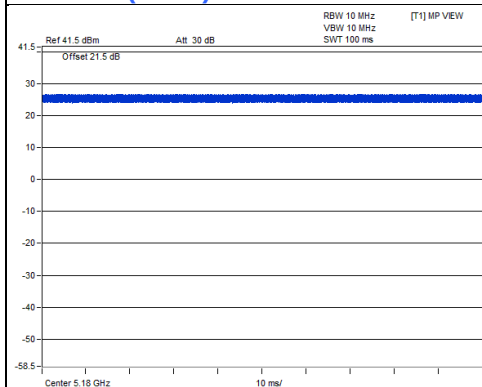

802.11ax (HE40)

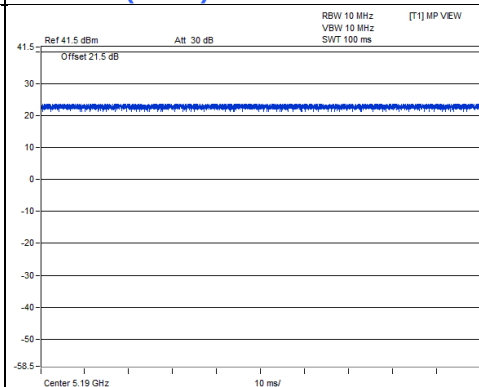

802.11ax (HE80)

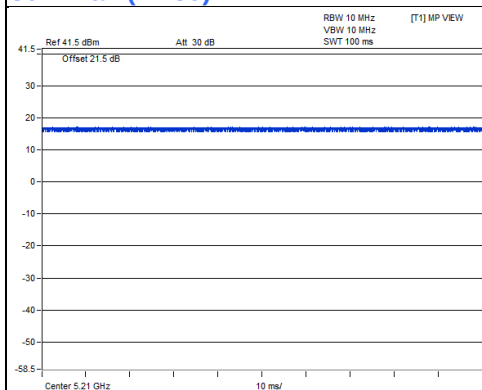

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	iPod	Apple	MC749TA/A	CC4DM9M8DFDM	NA	Provided by Lab
D.	Laptop	Lenovo	81A4	YD02YN7P	PD93165NGU	Provided by Lab
E.	OLT Switch	Alpha	NA	NA	NA	Supplied by client

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	USB Cable	1	0.1	Yes	0	Provided by Lab
4.	DC Cable	1	1.83	No	0	Supplied by client
5.	Fiber Cable	1	10	No	0	Provided by Lab
6.	RJ-45 Cable	1	1.8	No	0	Provided by Lab

3.4.1 Configuration of System under Test

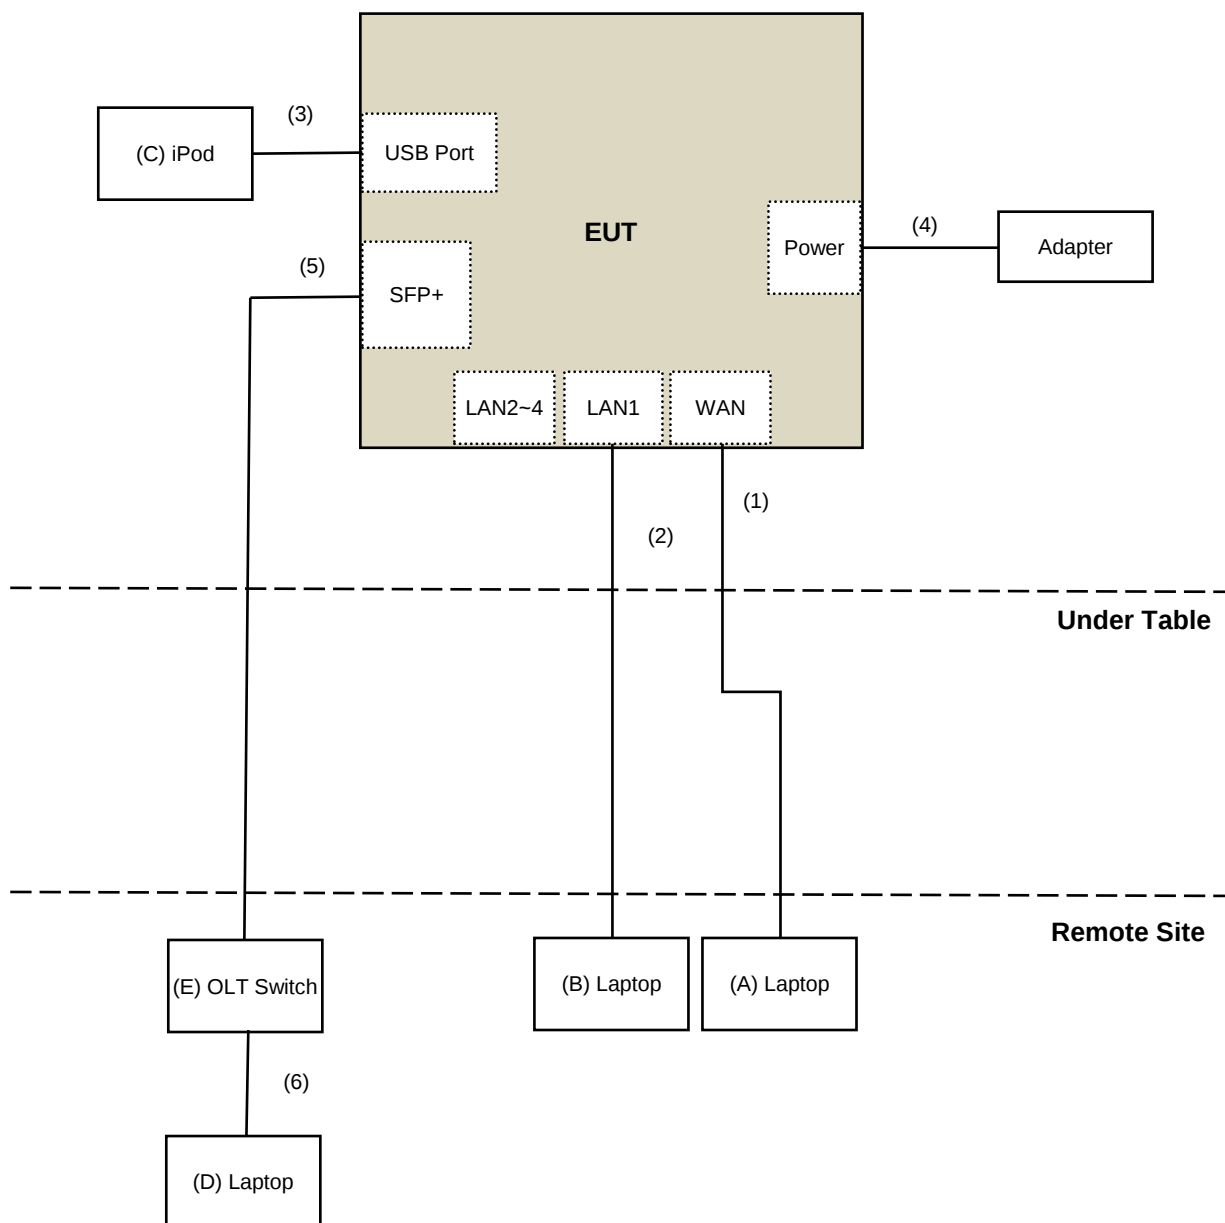

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test Standard:

FCC Part 15, Subpart E (15.407)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	☒ 15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
	☐ 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

For OOB test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 15, 2019	Aug. 14, 2020
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Nov. 29, 2019

For other test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 03, 2019	July 02, 2020
Pre-Amplifier EMCi	EMC001340	980142	May 30, 2019	May 29, 2020
Loop Antenna Electro-Metrics	EM-6879	264	Jan. 22, 2019	Jan. 21, 2020
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 23, 2019	Oct. 22, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-4-1	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-2	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-3	Mar. 19, 2019	Mar. 18, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCi	EMC12630SE	980385	Aug. 15, 2019	Aug. 14, 2020
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 03, 2019	May 02, 2020
Pre-Amplifier EMCi	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 09, 2019	Jan. 08, 2020
True RMS Clamp Meter FLUKE	325	31130711WS	May 21, 2019	May 20, 2020
Spectrum Analyzer R&S	FSV40	100964	June 04, 2019	June 03, 2020
Power meter Anritsu	ML2495A	1014008	May 13, 2019	May 12, 2020
Power sensor Anritsu	MA2411B	0917122	May 13, 2019	May 12, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Nov. 29 to Dec. 02, 2019

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

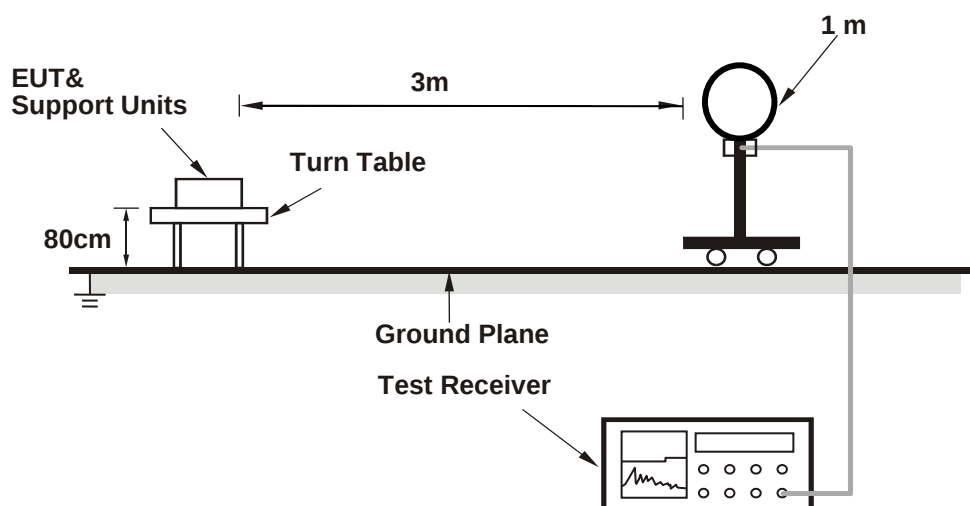

For Radiated emission 30MHz to 1GHz

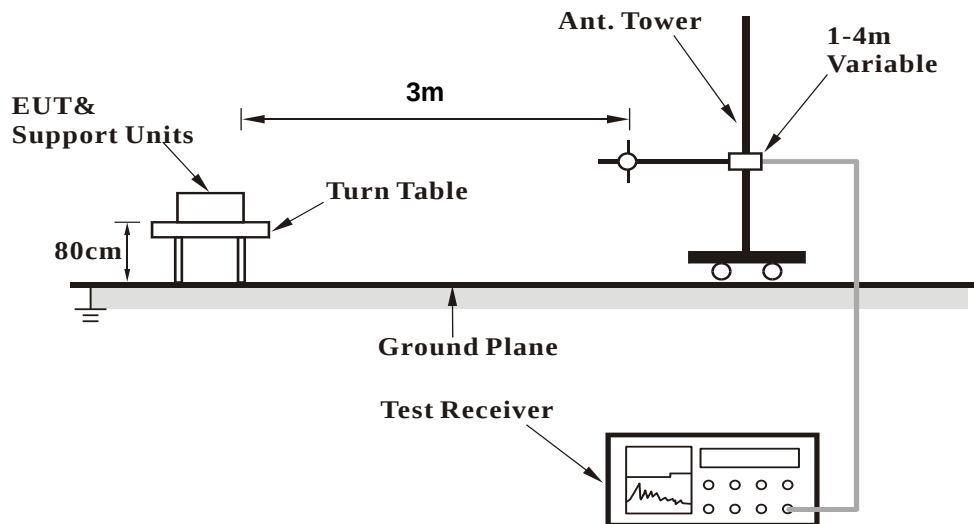

For Radiated emission above 1GHz

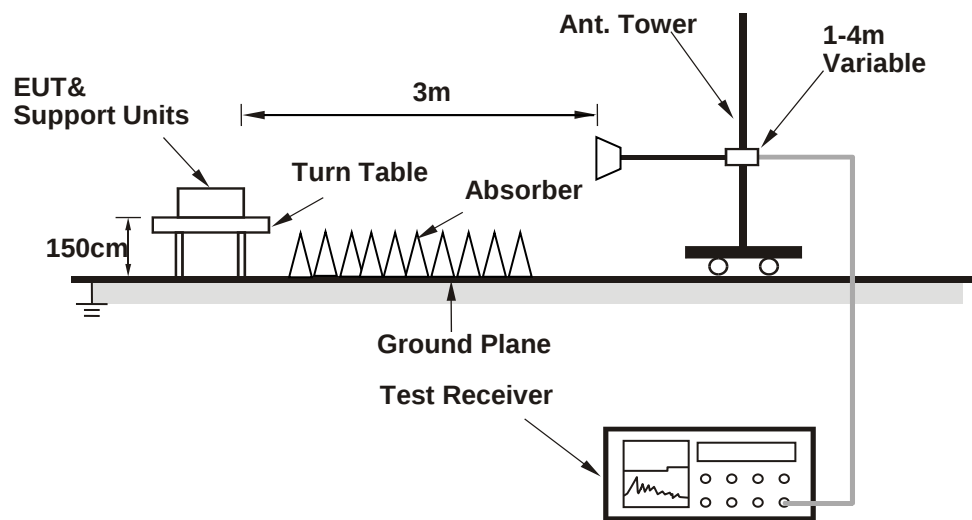

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (Intel DUT Ver.610.23) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	1.63 H	251	56.3	3.1
2	5150.00	46.8 AV	54.0	-7.2	1.63 H	251	43.7	3.1
3	*5180.00	111.9 PK			1.63 H	251	108.8	3.1
4	*5180.00	104.8 AV			1.63 H	251	101.7	3.1
5	#10360.00	53.2 PK	68.2	-15.0	1.53 H	341	40.3	12.9
6	15540.00	49.3 PK	74.0	-24.7	1.52 H	335	36.0	13.3
7	15540.00	37.3 AV	54.0	-16.7	1.52 H	335	24.0	13.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	1.76 V	227	63.7	3.1
2	5150.00	53.4 AV	54.0	-0.6	1.76 V	227	50.3	3.1
3	*5180.00	121.5 PK			1.76 V	227	118.4	3.1
4	*5180.00	113.3 AV			1.76 V	227	110.2	3.1
5	#10360.00	53.6 PK	68.2	-14.6	2.43 V	274	40.7	12.9
6	15540.00	50.1 PK	74.0	-23.9	2.13 V	122	36.8	13.3
7	15540.00	38.7 AV	54.0	-15.3	2.13 V	122	25.4	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.56 H	248	55.7	3.1
2	5150.00	45.9 AV	54.0	-8.1	1.56 H	248	42.8	3.1
3	*5200.00	118.3 PK			1.56 H	248	115.3	3.0
4	*5200.00	108.4 AV			1.56 H	248	105.4	3.0
5	5350.00	51.2 PK	74.0	-22.8	1.56 H	248	48.1	3.1
6	5350.00	39.7 AV	54.0	-14.3	1.56 H	248	36.6	3.1
7	#10400.00	52.9 PK	68.2	-15.3	1.11 H	73	39.8	13.1
8	15600.00	49.7 PK	74.0	-24.3	2.61 H	8	36.6	13.1
9	15600.00	37.1 AV	54.0	-16.9	2.61 H	8	24.0	13.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.66 V	227	64.2	3.1
2	5150.00	53.3 AV	54.0	-0.7	1.66 V	227	50.2	3.1
3	*5200.00	125.2 PK			1.66 V	227	122.2	3.0
4	*5200.00	116.9 AV			1.66 V	227	113.9	3.0
5	5350.00	57.9 PK	74.0	-16.1	1.66 V	227	54.8	3.1
6	5350.00	45.7 AV	54.0	-8.3	1.66 V	227	42.6	3.1
7	#10400.00	53.3 PK	68.2	-14.9	2.46 V	100	40.2	13.1
8	15600.00	50.5 PK	74.0	-23.5	2.60 V	257	37.4	13.1
9	15600.00	37.4 AV	54.0	-16.6	2.60 V	257	24.3	13.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.7 PK			1.60 H	257	115.8	2.9
2	*5240.00	109.3 AV			1.60 H	257	106.4	2.9
3	5350.00	54.6 PK	74.0	-19.4	1.60 H	257	51.5	3.1
4	5350.00	42.1 AV	54.0	-11.9	1.60 H	257	39.0	3.1
5	#10480.00	54.1 PK	68.2	-14.1	1.45 H	169	40.9	13.2
6	15720.00	49.5 PK	74.0	-24.5	1.52 H	144	36.8	12.7
7	15720.00	37.2 AV	54.0	-16.8	1.52 H	144	24.5	12.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	127.4 PK			1.72 V	226	124.5	2.9
2	*5240.00	118.2 AV			1.72 V	226	115.3	2.9
3	5350.00	60.7 PK	74.0	-13.3	1.72 V	226	57.6	3.1
4	5350.00	48.4 AV	54.0	-5.6	1.72 V	226	45.3	3.1
5	#10480.00	53.1 PK	68.2	-15.1	1.39 V	136	39.9	13.2
6	15720.00	49.9 PK	74.0	-24.1	1.11 V	107	37.2	12.7
7	15720.00	37.7 AV	54.0	-16.3	1.11 V	107	25.0	12.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.86	54.5 PK	68.2	-13.7	2.51 H	322	51.1	3.4
2	*5745.00	119.6 PK			2.51 H	322	116.0	3.6
3	*5745.00	110.4 AV			2.51 H	322	106.8	3.6
4	#5960.32	50.2 PK	68.2	-18.0	2.51 H	322	46.1	4.1
5	11490.00	54.8 PK	74.0	-19.2	2.66 H	191	41.1	13.7
6	11490.00	47.7 AV	54.0	-6.3	2.66 H	191	34.0	13.7
7	#17235.00	49.1 PK	68.2	-19.1	2.38 H	131	32.3	16.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.52	63.4 PK	68.2	-4.8	1.70 V	299	59.5	3.9
2	*5745.00	127.0 PK			1.70 V	299	123.4	3.6
3	*5745.00	117.6 AV			1.70 V	299	114.0	3.6
4	#5931.31	57.0 PK	68.2	-11.2	1.70 V	299	52.3	4.7
5	11490.00	53.1 PK	74.0	-20.9	2.16 V	186	39.4	13.7
6	11490.00	48.1 AV	54.0	-5.9	2.16 V	186	34.4	13.7
7	#17235.00	49.0 PK	68.2	-19.2	1.05 V	247	32.2	16.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.05	52.2 PK	68.2	-16.0	2.40 H	338	48.7	3.5
2	*5785.00	119.9 PK			2.40 H	338	116.2	3.7
3	*5785.00	101.2 AV			2.40 H	338	97.5	3.7
4	#5941.91	51.1 PK	68.2	-17.1	2.40 H	338	47.0	4.1
5	11570.00	54.9 PK	74.0	-19.1	2.33 H	310	41.4	13.5
6	11570.00	48.6 AV	54.0	-5.4	2.33 H	310	35.1	13.5
7	#17355.00	48.2 PK	68.2	-20.0	1.36 H	309	31.0	17.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.68	59.9 PK	68.2	-8.3	1.67 V	18	56.4	3.5
2	*5785.00	127.4 PK			1.67 V	18	123.7	3.7
3	*5785.00	118.4 AV			1.67 V	18	114.7	3.7
4	#5930.32	56.9 PK	68.2	-11.3	1.67 V	18	52.8	4.1
5	11570.00	54.1 PK	74.0	-19.9	1.42 V	115	40.6	13.5
6	11570.00	48.5 AV	54.0	-5.5	1.42 V	115	35.0	13.5
7	#17355.00	50.5 PK	68.2	-17.7	1.73 V	180	33.3	17.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5618.52	51.8 PK	68.2	-16.4	1.41 H	335	48.4	3.4
2	*5825.00	120.5 PK			1.41 H	335	116.5	4.0
3	*5825.00	111.9 AV			1.41 H	335	107.9	4.0
4	#5968.05	51.5 PK	68.2	-16.7	1.41 H	335	47.4	4.1
5	11650.00	54.4 PK	74.0	-19.6	1.64 H	114	41.1	13.3
6	11650.00	47.2 AV	54.0	-6.8	1.64 H	114	33.9	13.3
7	#17475.00	49.0 PK	68.2	-19.2	1.61 H	299	30.7	18.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5610.59	57.4 PK	68.2	-10.8	1.43 V	15	54.0	3.4
2	*5825.00	127.8 PK			1.43 V	15	123.8	4.0
3	*5825.00	118.2 AV			1.43 V	15	114.2	4.0
4	#5930.75	61.8 PK	68.2	-6.4	1.43 V	15	57.7	4.1
5	11650.00	54.1 PK	74.0	-19.9	1.36 V	351	40.8	13.3
6	11650.00	49.4 AV	54.0	-4.6	1.36 V	351	36.1	13.3
7	#17475.00	49.4 PK	68.2	-18.8	1.92 V	294	31.1	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.2 PK	74.0	-14.8	1.56 H	264	56.1	3.1
2	5150.00	46.4 AV	54.0	-7.6	1.56 H	264	43.3	3.1
3	*5180.00	111.6 PK			1.56 H	264	108.5	3.1
4	*5180.00	104.3 AV			1.56 H	264	101.2	3.1
5	#10360.00	54.6 PK	68.2	-13.6	1.62 H	204	41.7	12.9
6	15540.00	48.6 PK	74.0	-25.4	1.65 H	319	35.3	13.3
7	15540.00	36.6 AV	54.0	-17.4	1.65 H	319	23.3	13.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.9 PK	74.0	-10.1	2.25 V	31	60.8	3.1
2	5150.00	53.3 AV	54.0	-0.7	2.25 V	31	50.2	3.1
3	*5180.00	119.7 PK			2.25 V	31	116.6	3.1
4	*5180.00	111.3 AV			2.25 V	31	108.2	3.1
5	#10360.00	55.0 PK	68.2	-13.2	1.03 V	300	42.1	12.9
6	15540.00	51.0 PK	74.0	-23.0	2.22 V	178	37.7	13.3
7	15540.00	37.5 AV	54.0	-16.5	2.22 V	178	24.2	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.53 H	260	55.9	3.1
2	5150.00	46.3 AV	54.0	-7.7	1.53 H	260	43.2	3.1
3	*5200.00	118.9 PK			1.53 H	260	115.9	3.0
4	*5200.00	108.8 AV			1.53 H	260	105.8	3.0
5	5350.00	51.0 PK	74.0	-23.0	1.53 H	260	47.9	3.1
6	5350.00	39.5 AV	54.0	-14.5	1.53 H	260	36.4	3.1
7	#10400.00	54.4 PK	68.2	-13.8	2.44 H	88	41.3	13.1
8	15600.00	48.6 PK	74.0	-25.4	2.38 H	188	35.5	13.1
9	15600.00	36.4 AV	54.0	-17.6	2.38 H	188	23.3	13.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.8 PK	74.0	-8.2	1.61 V	28	62.7	3.1
2	5150.00	53.4 AV	54.0	-0.6	1.61 V	28	50.3	3.1
3	*5200.00	124.4 PK			1.61 V	28	121.4	3.0
4	*5200.00	116.5 AV			1.61 V	28	113.5	3.0
5	5350.00	59.1 PK	74.0	-14.9	1.61 V	28	56.0	3.1
6	5350.00	46.4 AV	54.0	-7.6	1.61 V	28	43.3	3.1
7	#10400.00	54.3 PK	68.2	-13.9	2.53 V	206	41.2	13.1
8	15600.00	50.3 PK	74.0	-23.7	1.69 V	58	37.2	13.1
9	15600.00	38.2 AV	54.0	-15.8	1.69 V	58	25.1	13.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	119.4 PK			1.65 H	254	116.5	2.9
2	*5240.00	108.2 AV			1.65 H	254	105.3	2.9
3	5350.00	54.8 PK	74.0	-19.2	1.65 H	254	51.7	3.1
4	5350.00	42.3 AV	54.0	-11.7	1.65 H	254	39.2	3.1
5	#10480.00	53.2 PK	68.2	-15.0	1.34 H	50	40.0	13.2
6	15720.00	49.7 PK	74.0	-24.3	1.33 H	34	37.0	12.7
7	15720.00	37.0 AV	54.0	-17.0	1.33 H	34	24.3	12.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	125.5 PK			1.51 V	223	122.6	2.9
2	*5240.00	116.0 AV			1.51 V	223	113.1	2.9
3	5350.00	60.9 PK	74.0	-13.1	1.51 V	223	57.8	3.1
4	5350.00	49.6 AV	54.0	-4.4	1.51 V	223	46.5	3.1
5	#10480.00	54.1 PK	68.2	-14.1	1.97 V	190	40.9	13.2
6	15720.00	49.5 PK	74.0	-24.5	1.26 V	50	36.8	12.7
7	15720.00	37.4 AV	54.0	-16.6	1.26 V	50	24.7	12.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.46	52.0 PK	68.2	-16.2	1.89 H	91	48.6	3.4
2	*5745.00	118.6 PK			1.89 H	91	115.0	3.6
3	*5745.00	107.5 AV			1.89 H	91	103.9	3.6
4	#5936.88	51.6 PK	68.2	-16.6	1.89 H	91	47.5	4.1
5	11490.00	54.8 PK	74.0	-19.2	1.01 H	174	41.1	13.7
6	11490.00	47.0 AV	54.0	-7.0	1.01 H	174	33.3	13.7
7	#17235.00	49.4 PK	68.2	-18.8	2.32 H	358	32.6	16.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5634.28	66.1 PK	68.2	-2.1	1.62 V	223	62.7	3.4
2	*5745.00	126.9 PK			1.62 V	223	123.3	3.6
3	*5745.00	117.8 AV			1.62 V	223	114.2	3.6
4	#5926.68	53.3 PK	68.2	-14.9	1.62 V	223	49.4	3.9
5	11490.00	54.6 PK	74.0	-19.4	2.17 V	262	40.9	13.7
6	11490.00	50.0 AV	54.0	-4.0	2.17 V	262	36.3	13.7
7	#17235.00	49.4 PK	68.2	-18.8	2.36 V	131	32.6	16.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5641.21	51.5 PK	68.2	-16.7	1.29 H	213	48.1	3.4
2	*5785.00	116.5 PK			1.29 H	213	112.8	3.7
3	*5785.00	109.4 AV			1.29 H	213	105.7	3.7
4	#5959.88	51.6 PK	68.2	-16.6	1.29 H	213	47.5	4.1
5	11570.00	53.6 PK	74.0	-20.4	1.78 H	228	40.1	13.5
6	11570.00	48.7 AV	54.0	-5.3	1.78 H	228	35.2	13.5
7	#17355.00	48.6 PK	68.2	-19.6	1.64 H	109	31.4	17.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.10	60.3 PK	68.2	-7.9	1.57 V	218	56.8	3.5
2	*5785.00	127.2 PK			1.57 V	218	123.5	3.7
3	*5785.00	118.1 AV			1.57 V	218	114.4	3.7
4	#5926.39	58.5 PK	68.2	-9.7	1.57 V	218	54.6	3.9
5	11570.00	54.0 PK	74.0	-20.0	1.36 V	326	40.5	13.5
6	11570.00	49.9 AV	54.0	-4.1	1.36 V	326	36.4	13.5
7	#17355.00	49.1 PK	68.2	-19.1	1.06 V	174	31.9	17.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5618.97	51.1 PK	68.2	-17.1	2.06 H	60	47.7	3.4
2	*5825.00	118.6 PK			2.06 H	60	114.6	4.0
3	*5825.00	105.6 AV			2.06 H	60	101.6	4.0
4	#5932.98	50.7 PK	68.2	-17.5	2.06 H	60	46.6	4.1
5	11650.00	53.8 PK	74.0	-20.2	2.29 H	79	40.5	13.3
6	11650.00	48.4 AV	54.0	-5.6	2.29 H	79	35.1	13.3
7	#17475.00	49.5 PK	68.2	-18.7	1.99 H	239	31.2	18.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.78	55.0 PK	68.2	-13.2	1.48 V	215	51.5	3.5
2	*5825.00	127.0 PK			1.48 V	215	123.0	4.0
3	*5825.00	118.0 AV			1.48 V	215	114.0	4.0
4	#5930.81	55.6 PK	68.2	-12.6	1.48 V	215	51.5	4.1
5	11650.00	54.4 PK	74.0	-19.6	1.84 V	355	41.1	13.3
6	11650.00	48.4 AV	54.0	-5.6	1.84 V	355	35.1	13.3
7	#17475.00	51.0 PK	68.2	-17.2	1.14 V	202	32.7	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.4 PK	74.0	-15.6	1.60 H	242	55.3	3.1
2	5150.00	45.3 AV	54.0	-8.7	1.60 H	242	42.2	3.1
3	*5190.00	114.9 PK			1.60 H	242	111.8	3.1
4	*5190.00	103.7 AV			1.60 H	242	100.6	3.1
5	#10380.00	54.8 PK	68.2	-13.4	1.18 H	226	41.8	13.0
6	15570.00	48.7 PK	74.0	-25.3	1.36 H	23	35.5	13.2
7	15570.00	36.8 AV	54.0	-17.2	1.36 H	23	23.6	13.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.4 PK	74.0	-8.6	1.72 V	220	62.3	3.1
2	5150.00	53.5 AV	54.0	-0.5	1.72 V	220	50.4	3.1
3	*5190.00	118.7 PK			1.72 V	220	115.6	3.1
4	*5190.00	110.9 AV			1.72 V	220	107.8	3.1
5	#10380.00	55.1 PK	68.2	-13.1	2.32 V	298	42.1	13.0
6	15570.00	51.0 PK	74.0	-23.0	2.25 V	340	37.8	13.2
7	15570.00	38.4 AV	54.0	-15.6	2.25 V	340	25.2	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	54.9 PK	74.0	-19.1	1.67 H	254	51.8	3.1
2	5150.00	42.5 AV	54.0	-11.5	1.67 H	254	39.4	3.1
3	*5230.00	111.4 PK			1.67 H	254	108.5	2.9
4	*5230.00	104.5 AV			1.67 H	254	101.6	2.9
5	5350.00	57.8 PK	74.0	-16.2	1.67 H	254	54.7	3.1
6	5350.00	45.7 AV	54.0	-8.3	1.67 H	254	42.6	3.1
7	#10460.00	53.8 PK	68.2	-14.4	1.90 H	11	40.6	13.2
8	15690.00	48.9 PK	74.0	-25.1	2.29 H	121	36.1	12.8
9	15690.00	36.9 AV	54.0	-17.1	2.29 H	121	24.1	12.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.8 PK	74.0	-12.2	1.62 V	251	58.7	3.1
2	5150.00	49.6 AV	54.0	-4.4	1.62 V	251	46.5	3.1
3	*5230.00	122.5 PK			1.62 V	251	119.6	2.9
4	*5230.00	114.3 AV			1.62 V	251	111.4	2.9
5	5350.00	67.4 PK	74.0	-6.6	1.62 V	251	64.3	3.1
6	5350.00	53.4 AV	54.0	-0.6	1.62 V	251	50.3	3.1
7	#10460.00	54.3 PK	68.2	-13.9	2.20 V	244	41.1	13.2
8	15690.00	49.9 PK	74.0	-24.1	2.32 V	86	37.1	12.8
9	15690.00	38.3 AV	54.0	-15.7	2.32 V	86	25.5	12.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.10	57.8 PK	68.2	-10.4	1.63 H	317	54.4	3.4
2	*5755.00	106.5 PK			1.63 H	317	102.9	3.6
3	*5755.00	102.6 AV			1.63 H	317	99.0	3.6
4	#5956.40	51.8 PK	68.2	-16.4	1.63 H	317	47.7	4.1
5	11510.00	53.1 PK	74.0	-20.9	2.07 H	38	39.5	13.6
6	11510.00	48.3 AV	54.0	-5.7	2.07 H	38	34.7	13.6
7	#17265.00	48.8 PK	68.2	-19.4	2.16 H	140	31.9	16.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.04	66.4 PK	68.2	-1.8	1.58 V	221	62.9	3.5
2	*5755.00	122.6 PK			1.58 V	221	119.0	3.6
3	*5755.00	112.6 AV			1.58 V	221	109.0	3.6
4	#5935.34	57.6 PK	68.2	-10.6	1.58 V	221	53.5	4.1
5	11510.00	53.9 PK	74.0	-20.1	1.54 V	345	40.3	13.6
6	11510.00	49.9 AV	54.0	-4.1	1.54 V	345	36.3	13.6
7	#17265.00	49.2 PK	68.2	-19.0	1.68 V	225	32.3	16.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5647.92	53.4 PK	68.2	-14.8	1.53 H	330	49.9	3.5
2	*5795.00	104.3 PK			1.53 H	330	100.6	3.7
3	*5795.00	99.5 AV			1.53 H	330	95.8	3.7
4	#5936.21	53.3 PK	68.2	-14.9	1.53 H	330	49.2	4.1
5	11590.00	54.2 PK	74.0	-19.8	2.45 H	323	40.6	13.6
6	11590.00	48.3 AV	54.0	-5.7	2.45 H	323	34.7	13.6
7	#17385.00	49.0 PK	68.2	-19.2	1.02 H	336	31.8	17.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5640.82	61.6 PK	68.2	-6.6	1.63 V	218	58.2	3.4
2	*5795.00	121.4 PK			1.63 V	218	117.7	3.7
3	*5795.00	113.0 AV			1.63 V	218	109.3	3.7
4	#5929.54	66.7 PK	68.2	-1.5	1.63 V	218	62.7	4.0
5	11590.00	54.0 PK	74.0	-20.0	2.17 V	68	40.4	13.6
6	11590.00	48.2 AV	54.0	-5.8	2.17 V	68	34.6	13.6
7	#17385.00	50.4 PK	68.2	-17.8	1.29 V	83	33.2	17.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.6 PK	74.0	-14.4	1.72 H	260	56.5	3.1
2	5150.00	47.1 AV	54.0	-6.9	1.72 H	260	44.0	3.1
3	*5210.00	110.3 PK			1.72 H	260	107.3	3.0
4	*5210.00	100.4 AV			1.72 H	260	97.4	3.0
5	5350.00	51.2 PK	74.0	-22.8	1.72 H	260	48.1	3.1
6	5350.00	39.3 AV	54.0	-14.7	1.72 H	260	36.2	3.1
7	#10420.00	54.5 PK	68.2	-13.7	1.35 H	150	41.3	13.2
8	15630.00	49.5 PK	74.0	-24.5	1.51 H	95	36.5	13.0
9	15630.00	37.7 AV	54.0	-16.3	1.51 H	95	24.7	13.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.8 PK	74.0	-11.2	1.65 V	28	59.7	3.1
2	5150.00	53.9 AV	54.0	-0.1	1.65 V	28	50.8	3.1
3	*5210.00	114.2 PK			1.65 V	28	111.2	3.0
4	*5210.00	105.7 AV			1.65 V	28	102.7	3.0
5	5350.00	55.0 PK	74.0	-19.0	1.65 V	28	51.9	3.1
6	5350.00	43.1 AV	54.0	-10.9	1.65 V	28	40.0	3.1
7	#10420.00	53.2 PK	68.2	-15.0	2.04 V	216	40.0	13.2
8	15630.00	49.9 PK	74.0	-24.1	2.69 V	267	36.9	13.0
9	15630.00	37.4 AV	54.0	-16.6	2.69 V	267	24.4	13.0

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.70	59.7 PK	68.2	-8.5	1.62 H	70	56.2	3.5
2	*5775.00	106.9 PK			1.62 H	70	103.2	3.7
3	*5775.00	99.4 AV			1.62 H	70	95.7	3.7
4	#5934.56	54.2 PK	68.2	-14.0	1.62 H	70	50.1	4.1
5	11550.00	54.7 PK	74.0	-19.3	2.38 H	148	41.1	13.6
6	11550.00	48.0 AV	54.0	-6.0	2.38 H	148	34.4	13.6
7	#17325.00	49.7 PK	68.2	-18.5	1.11 H	94	32.7	17.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5638.84	66.9 PK	68.2	-1.3	1.62 V	216	63.5	3.4
2	*5775.00	117.3 PK			1.62 V	216	113.6	3.7
3	*5775.00	109.2 AV			1.62 V	216	105.5	3.7
4	#5934.86	59.8 PK	68.2	-8.4	1.62 V	216	55.7	4.1
5	11550.00	54.9 PK	74.0	-19.1	1.15 V	7	41.3	13.6
6	11550.00	48.6 AV	54.0	-5.4	1.15 V	7	35.0	13.6
7	#17325.00	49.1 PK	68.2	-19.1	2.33 V	169	32.1	17.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:


802.11ax (HE40)

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.36	33.1 QP	40.0	-6.9	2.00 H	360	42.3	-9.2
2	92.08	33.7 QP	43.5	-9.8	2.00 H	99	47.1	-13.4
3	157.99	33.4 QP	43.5	-10.1	2.00 H	94	41.1	-7.7
4	203.00	32.2 QP	43.5	-11.3	1.00 H	81	43.1	-10.9
5	254.39	26.9 QP	46.0	-19.1	1.00 H	271	35.7	-8.8
6	327.45	29.7 QP	46.0	-16.3	1.00 H	120	35.8	-6.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

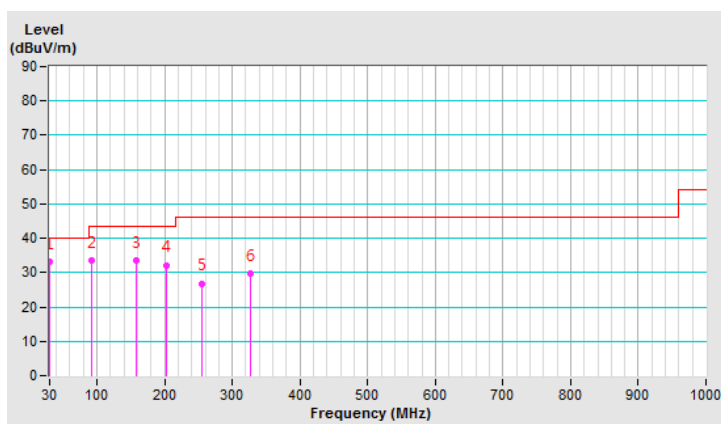


CHANNEL	TX Channel 46	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.52	36.8 QP	40.0	-3.2	1.00 V	18	44.7	-7.9
2	92.90	33.4 QP	43.5	-10.1	1.00 V	218	46.7	-13.3
3	145.67	30.9 QP	43.5	-12.6	1.00 V	245	38.7	-7.8
4	217.38	28.5 QP	46.0	-17.5	1.50 V	360	39.5	-11.0
5	320.54	27.4 QP	46.0	-18.6	1.00 V	215	33.6	-6.2
6	434.30	31.1 QP	46.0	-14.9	1.50 V	287	34.2	-3.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

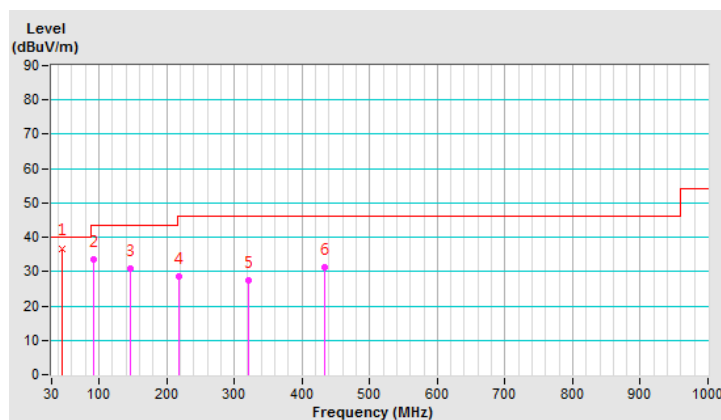

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: Dec. 02, 2019

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

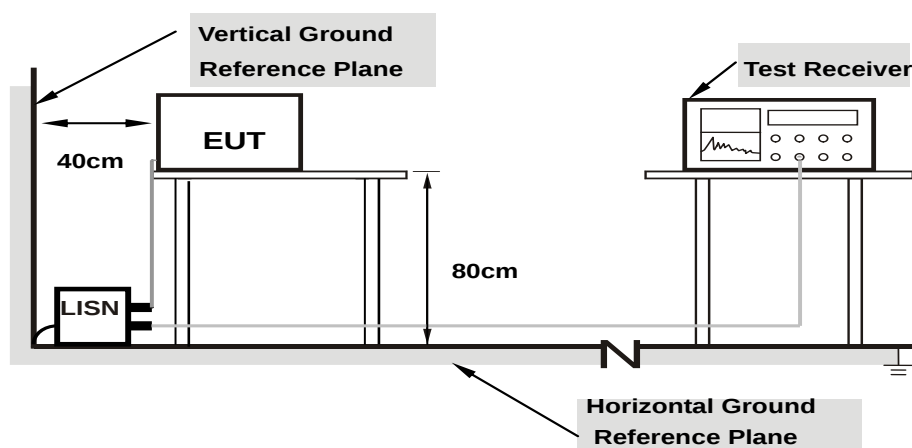

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	44.25	30.53	54.22	40.50	66.00	56.00	-11.78	-15.50
2	0.15781	9.97	47.55	33.16	57.52	43.13	65.58	55.58	-8.06	-12.45
3	0.17734	9.97	45.16	31.29	55.13	41.26	64.61	54.61	-9.48	-13.35
4	0.19687	9.97	37.59	24.87	47.56	34.84	63.74	53.74	-16.18	-18.90
5	0.29453	9.97	27.03	16.53	37.00	26.50	60.40	50.40	-23.40	-23.90
6	2.86719	10.11	18.23	8.41	28.34	18.52	56.00	46.00	-27.66	-27.48
7	21.12109	11.08	17.58	12.50	28.66	23.58	60.00	50.00	-31.34	-26.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

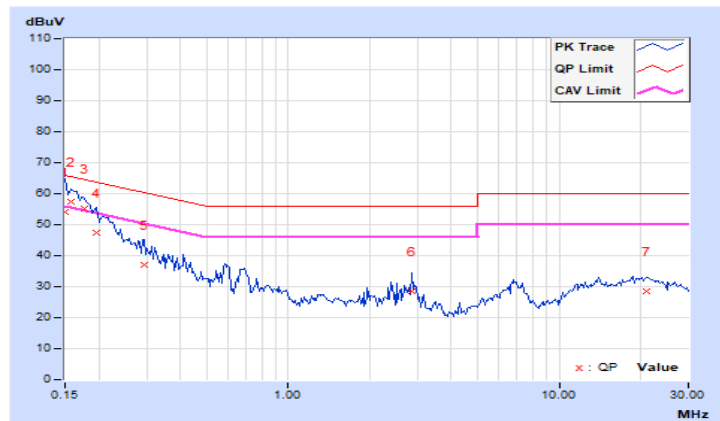


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.97	46.88	31.42	56.85	41.39	65.58	55.58	-8.73	-14.19
2	0.19297	9.97	38.02	24.44	47.99	34.41	63.91	53.91	-15.92	-19.50
3	0.22031	9.97	36.67	22.99	46.64	32.96	62.81	52.81	-16.17	-19.85
4	0.59141	9.99	19.37	10.37	29.36	20.36	56.00	46.00	-26.64	-25.64
5	2.85938	10.09	16.07	7.34	26.16	17.43	56.00	46.00	-29.84	-28.57
6	7.01953	10.27	14.34	8.92	24.61	19.19	60.00	50.00	-35.39	-30.81

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

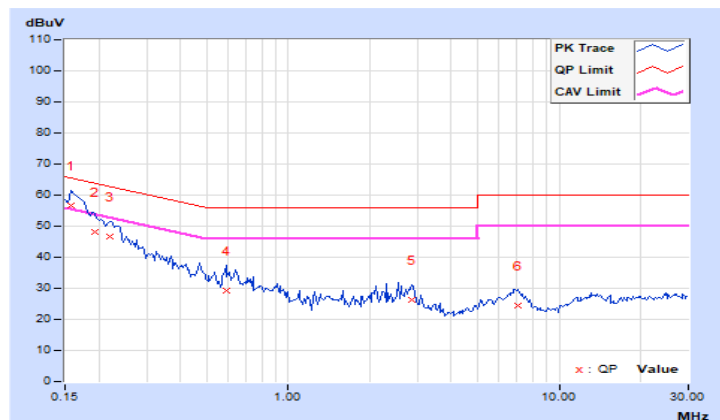

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Non-Beamforming Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	20.41	21.06	20.52	20.41	460.166	26.63	30.00	Pass
40	5200	20.74	21.13	20.36	21.03	483.703	26.85	30.00	Pass
48	5240	21.17	20.59	20.37	20.99	479.965	26.81	30.00	Pass
149	5745	23.96	23.54	23.40	23.62	923.75	29.66	30.00	Pass
157	5785	23.93	23.45	23.24	23.71	914.307	29.61	30.00	Pass
165	5825	23.98	23.51	23.39	23.91	938.733	29.73	30.00	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	20.16	20.49	19.63	20.74	426.107	26.30	30.00	Pass
40	5200	20.08	20.64	19.15	20.68	416.911	26.20	30.00	Pass
48	5240	20.76	20.54	19.39	20.76	438.384	26.42	30.00	Pass
149	5745	23.77	23.23	23.43	23.75	906.04	29.57	30.00	Pass
157	5785	23.79	23.37	23.37	23.69	907.756	29.58	30.00	Pass
165	5825	23.75	23.35	23.26	23.74	901.837	29.55	30.00	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	20.08	20.26	20.00	20.35	416.422	26.20	30.00	Pass
46	5230	23.80	23.51	23.07	23.14	873.102	29.41	30.00	Pass
151	5755	23.62	23.09	23.19	23.97	891.756	29.50	30.00	Pass
159	5795	24.01	22.94	23.21	23.60	887.055	29.48	30.00	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	18.30	18.08	18.06	18.18	261.616	24.18	30.00	Pass
155	5775	22.21	21.82	21.68	21.89	620.152	27.92	30.00	Pass

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	20.46	20.89	20.01	20.88	456.61	26.60	30.00	Pass
40	5200	20.28	20.94	19.40	20.89	440.665	26.44	30.00	Pass
48	5240	20.90	20.80	19.83	20.93	463.294	26.66	30.00	Pass
149	5745	23.97	23.53	23.68	23.96	957.115	29.81	30.00	Pass
157	5785	23.99	23.67	23.62	23.90	959.035	29.82	30.00	Pass
165	5825	23.95	23.65	23.51	23.95	952.753	29.79	30.00	Pass

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	20.39	20.48	20.23	20.66	442.934	26.46	30.00	Pass
46	5230	24.11	23.73	23.30	23.45	928.785	29.68	30.00	Pass
151	5755	23.93	23.31	23.42	24.28	949.164	29.77	30.00	Pass
159	5795	24.32	23.16	23.44	23.91	944.247	29.75	30.00	Pass

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	18.52	18.29	18.32	18.40	275.677	24.40	30.00	Pass
155	5775	22.43	22.03	21.94	22.11	653.443	28.15	30.00	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	20.16	20.49	19.63	20.74	426.107	26.30	26.90	Pass
40	5200	20.08	20.64	19.15	20.68	416.911	26.20	26.90	Pass
48	5240	20.76	20.54	19.39	20.76	438.384	26.42	26.90	Pass
149	5745	21.81	21.39	21.19	21.44	560.264	27.48	27.90	Pass
157	5785	21.65	21.17	21.21	21.41	547.623	27.38	27.90	Pass
165	5825	21.41	21.10	21.17	21.48	538.705	27.31	27.90	Pass

Note: 1. For U-NII-1: The directional gain = 9.1dBi > 6dBi, so the power limit shall be reduced to 30-(9.1-6) = 26.90dBm.
 2. For U-NII-3: The directional gain = 8.1dBi > 6dBi, so the power limit shall be reduced to 30-(8.1-6) = 27.90dBm.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	20.08	20.26	20.00	20.35	416.422	26.20	26.90	Pass
46	5230	21.00	20.60	20.25	20.21	451.587	26.55	26.90	Pass
151	5755	21.61	20.83	20.96	21.19	522.197	27.18	27.90	Pass
159	5795	21.30	21.01	21.26	21.31	529.946	27.24	27.90	Pass

Note: 1. For U-NII-1: The directional gain = 9.1dBi > 6dBi, so the power limit shall be reduced to 30-(9.1-6) = 26.90dBm.
 2. For U-NII-3: The directional gain = 8.1dBi > 6dBi, so the power limit shall be reduced to 30-(8.1-6) = 27.90dBm.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	18.30	18.08	18.06	18.18	261.616	24.18	26.90	Pass
155	5775	21.33	21.13	20.85	21.27	521.136	27.17	27.90	Pass

Note: 1. For U-NII-1: The directional gain = 9.1dBi > 6dBi, so the power limit shall be reduced to 30-(9.1-6) = 26.90dBm.
 2. For U-NII-3: The directional gain = 8.1dBi > 6dBi, so the power limit shall be reduced to 30-(8.1-6) = 27.90dBm.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	20.46	20.89	20.01	20.88	456.61	26.60	26.90	Pass
40	5200	20.28	20.94	19.40	20.89	440.665	26.44	26.90	Pass
48	5240	20.90	20.80	19.83	20.93	463.294	26.66	26.90	Pass
149	5745	22.03	21.63	21.47	21.70	593.326	27.73	27.90	Pass
157	5785	21.89	21.43	21.43	21.65	578.733	27.62	27.90	Pass
165	5825	21.67	21.33	21.39	21.73	569.381	27.55	27.90	Pass

Note: 1. For U-NII-1: The directional gain = 9.1dBi > 6dBi, so the power limit shall be reduced to $30-(9.1-6) = 26.90\text{dBm}$.
 2. For U-NII-3: The directional gain = 8.1dBi > 6dBi, so the power limit shall be reduced to $30-(8.1-6) = 27.90\text{dBm}$.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	20.39	20.48	20.23	20.66	442.934	26.46	26.90	Pass
46	5230	21.22	20.87	20.52	20.46	478.507	26.80	26.90	Pass
151	5755	21.85	21.09	21.18	21.43	551.853	27.42	27.90	Pass
159	5795	21.56	21.24	21.48	21.56	560.088	27.48	27.90	Pass

Note: 1. For U-NII-1: The directional gain = 9.1dBi > 6dBi, so the power limit shall be reduced to $30-(9.1-6) = 26.90\text{dBm}$.
 2. For U-NII-3: The directional gain = 8.1dBi > 6dBi, so the power limit shall be reduced to $30-(8.1-6) = 27.90\text{dBm}$.


802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	18.52	18.29	18.32	18.40	275.677	24.40	26.90	Pass
155	5775	21.55	21.37	21.13	21.53	551.928	27.42	27.90	Pass

Note: 1. For U-NII-1: The directional gain = 9.1dBi > 6dBi, so the power limit shall be reduced to $30-(9.1-6) = 26.90\text{dBm}$.
 2. For U-NII-3: The directional gain = 8.1dBi > 6dBi, so the power limit shall be reduced to $30-(8.1-6) = 27.90\text{dBm}$.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Test Results

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	16.80	16.80	16.80	16.80
40	5200	17.04	17.04	16.92	16.92
48	5240	17.04	16.92	17.04	17.04
149	5745	16.92	16.92	16.80	16.92
157	5785	17.16	17.16	17.04	17.16
165	5825	16.92	16.92	16.92	16.92

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	19.20	19.08	19.08	19.08
40	5200	19.68	19.20	19.08	19.20
48	5240	18.96	19.32	19.32	19.56
149	5745	19.20	19.08	19.20	22.44
157	5785	19.44	19.08	19.32	19.20
165	5825	19.44	19.08	19.20	19.32

802.11ax (HE40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
38	5190	38.40	38.88	38.64	39.12
46	5230	38.88	38.64	38.16	38.64
151	5755	39.12	38.40	38.16	38.60
159	5795	39.12	38.40	38.64	38.88

802.11ax (HE80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
42	5210	77.28	77.28	77.76	77.76
155	5775	77.28	77.28	77.28	77.28

Spectrum Plot of Max. Value


802.11a_Chain 0 / CH157

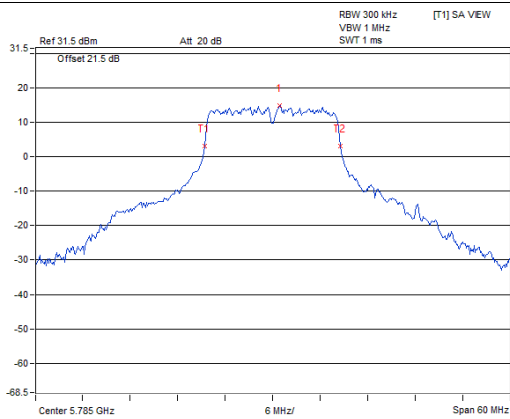


802.11ax (HE20)_Chain 3 / CH149

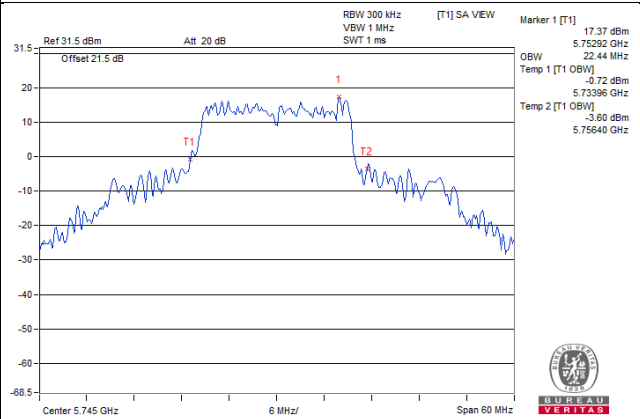

802.11ax (HE40)_Chain 0 / CH151

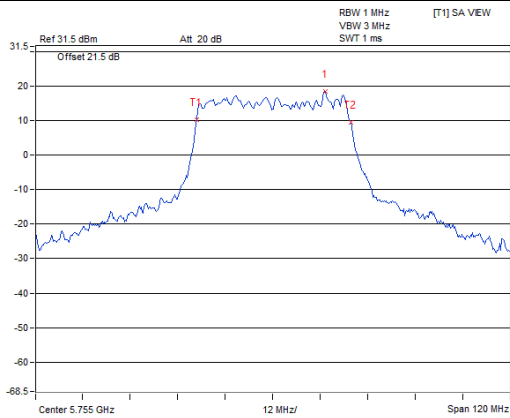


802.11ax (HE80)_Chain 2 / CH42

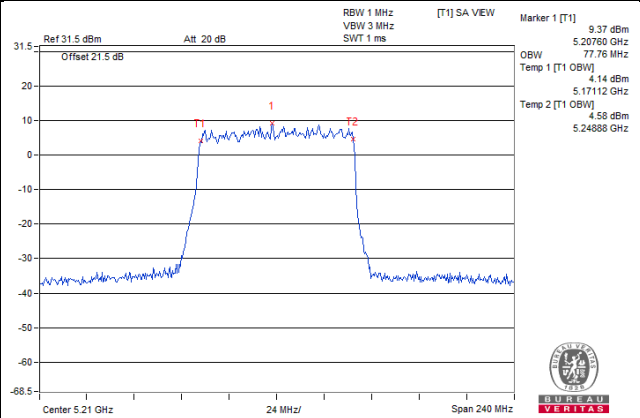


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11a_Chain 0 / CH48

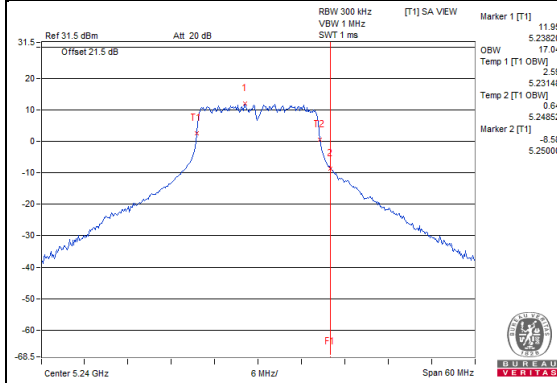


802.11a_Chain 1 / CH48

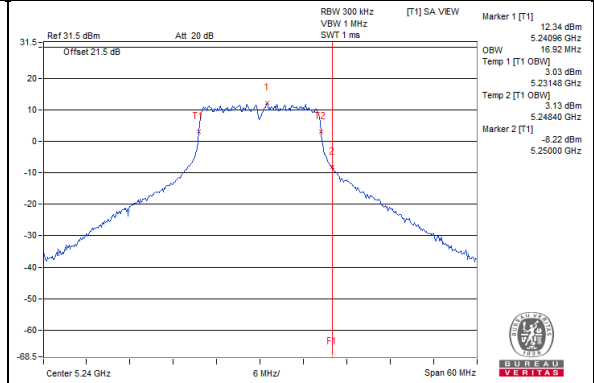


802.11a_Chain 2 / CH48

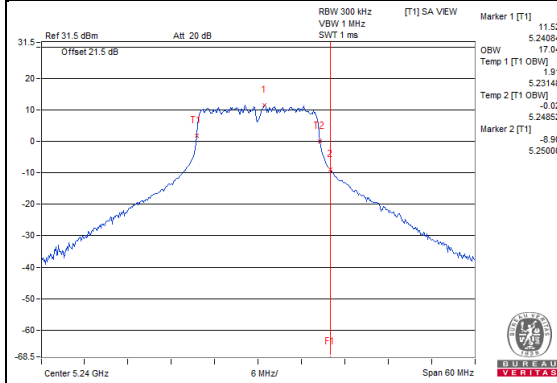


802.11a_Chain 3 / CH48

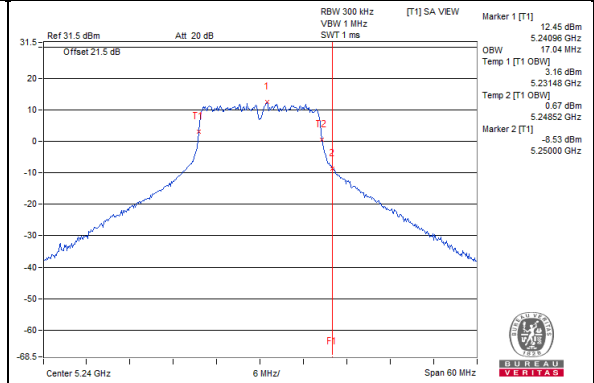


802.11ax (HE20)_Chain 0 / CH48

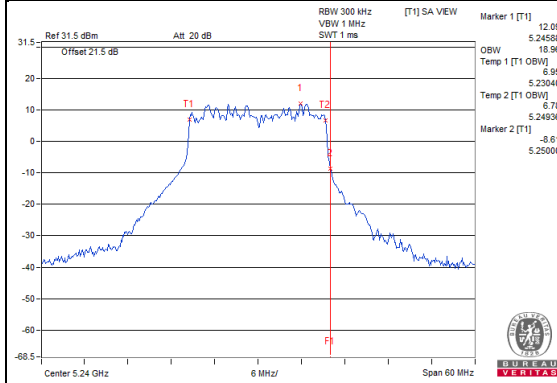


802.11ax (HE20)_Chain 1 / CH48

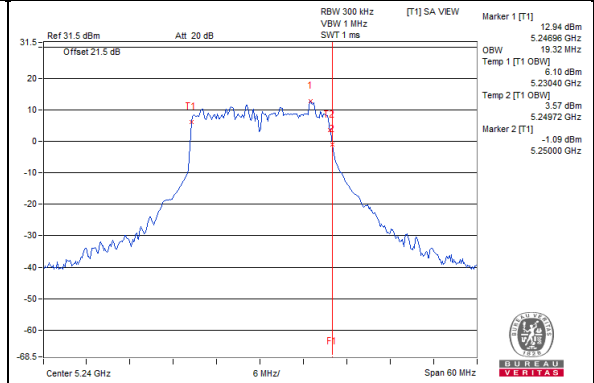

802.11ax (HE20)_Chain 2 / CH48

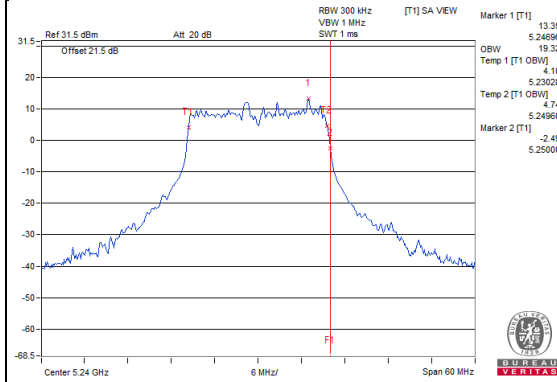


802.11ax (HE20)_Chain 3 / CH48

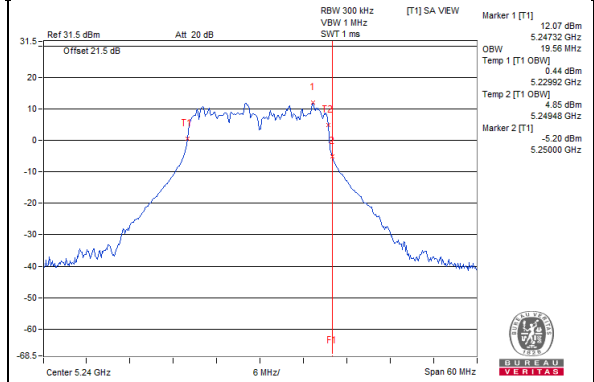


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11ax (HE40)_Chain 0 / CH46

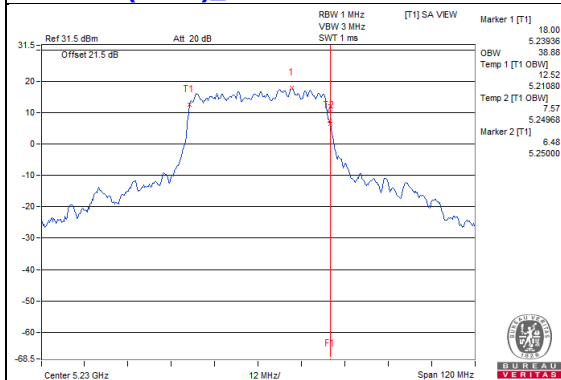


802.11ax (HE40)_Chain 1 / CH46

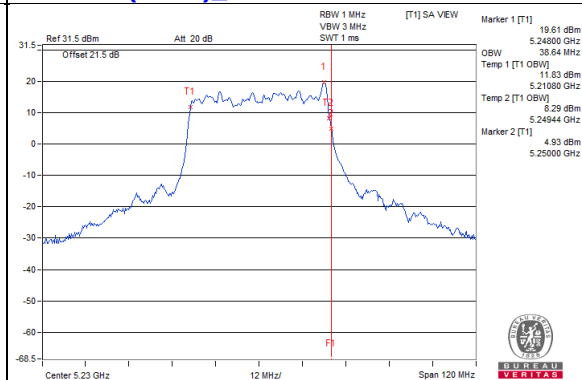


802.11ax (HE40)_Chain 2 / CH46

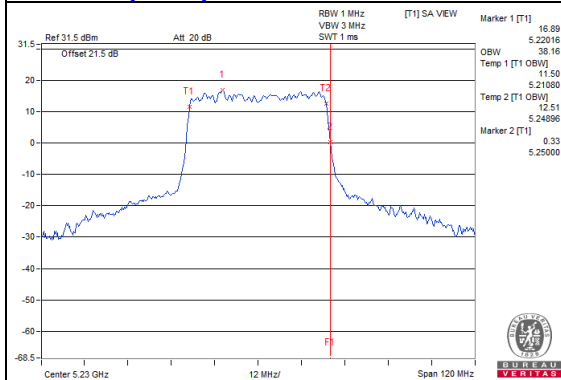


802.11ax (HE40)_Chain 3 / CH46

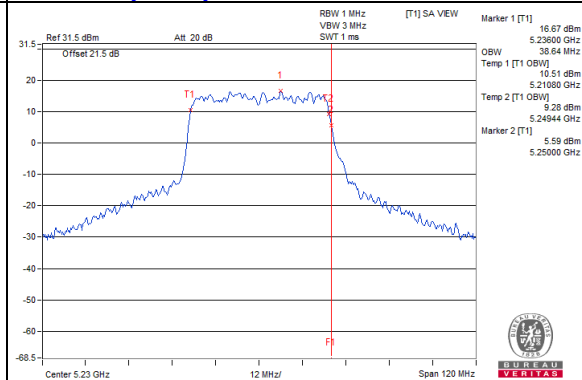


802.11ax (HE80)_Chain 0 / CH42

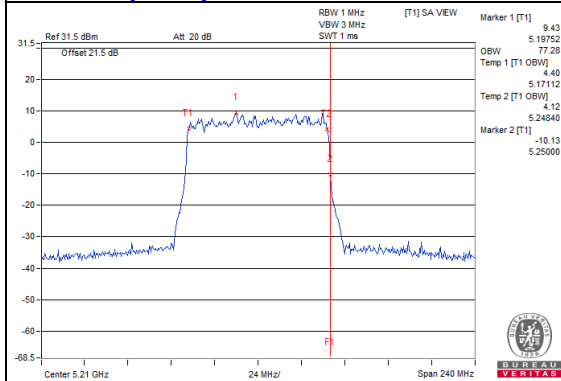


802.11ax (HE80)_Chain 1 / CH42

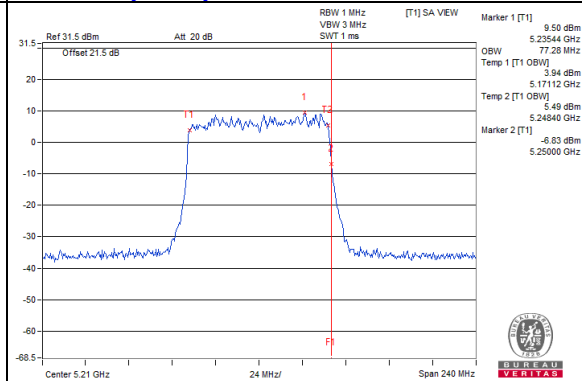

802.11ax (HE80)_Chain 2 / CH42

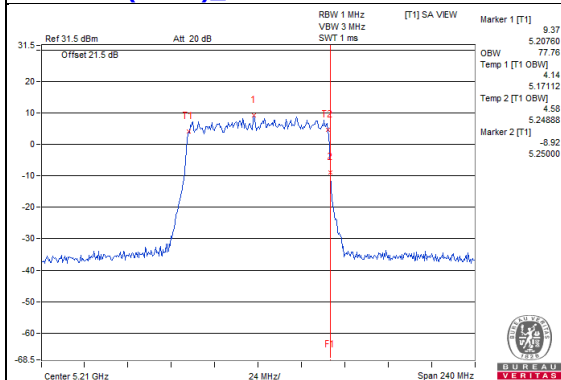


802.11ax (HE80)_Chain 3 / CH42

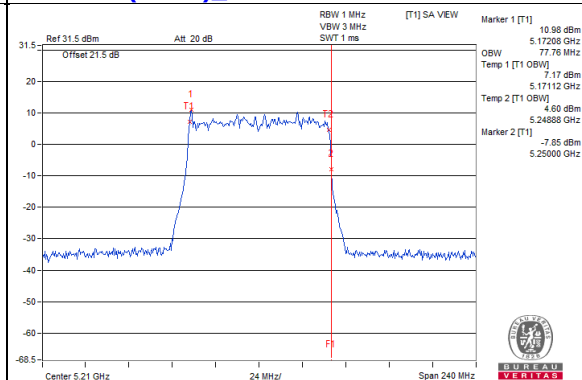


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11a_Chain 0 / CH149

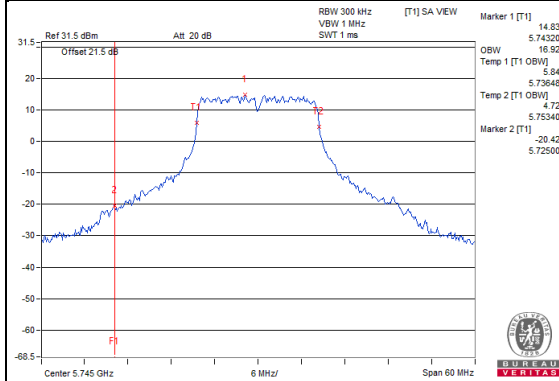


802.11a_Chain 1 / CH149

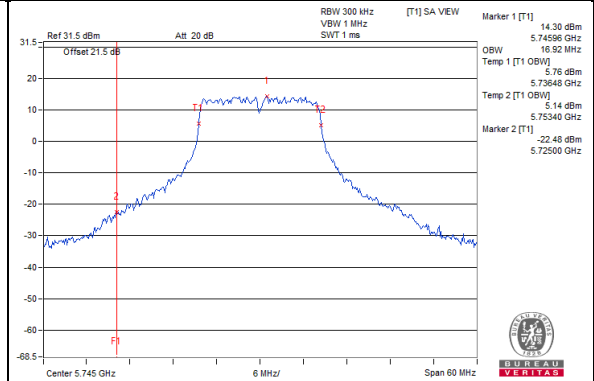


802.11a_Chain 2 / CH149

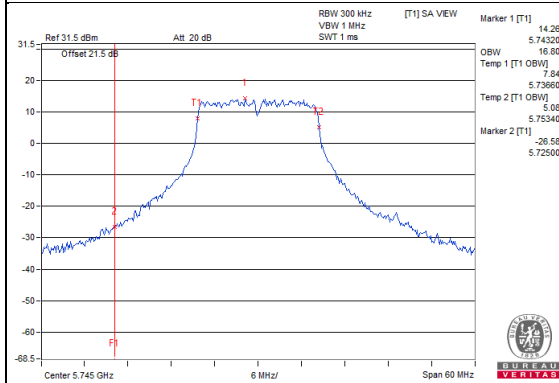


802.11a_Chain 3 / CH149

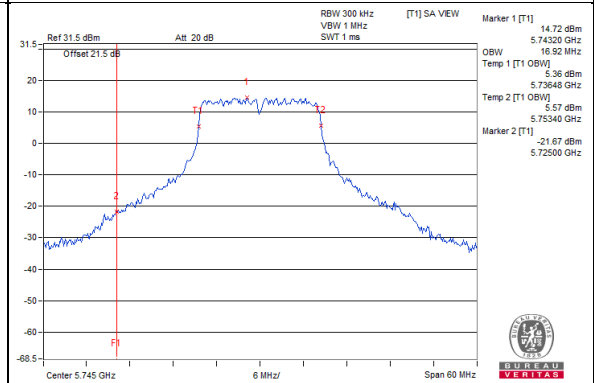


802.11ax (HE20)_Chain 0 / CH149

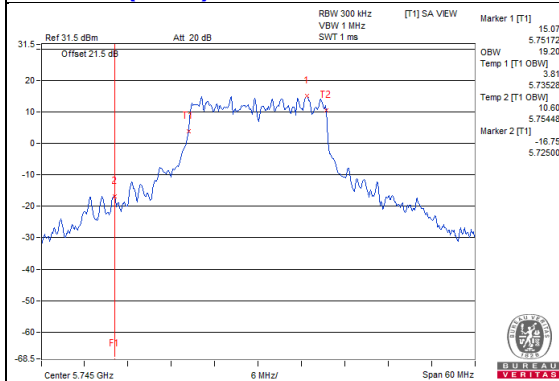


802.11ax (HE20)_Chain 1 / CH149

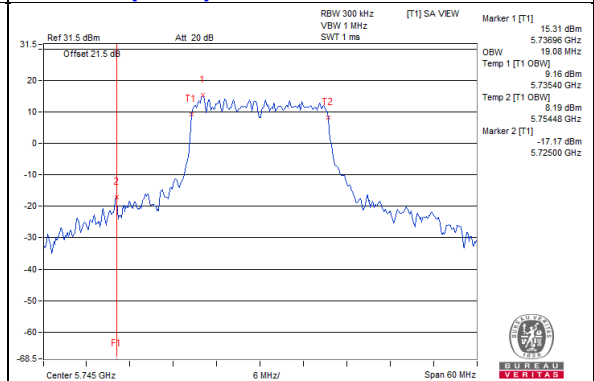

802.11ax (HE20)_Chain 2 / CH149

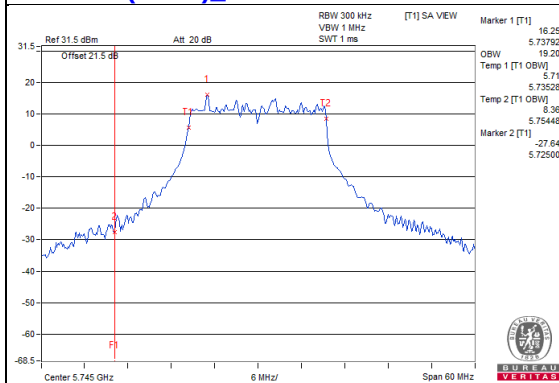


802.11ax (HE20)_Chain 3 / CH149

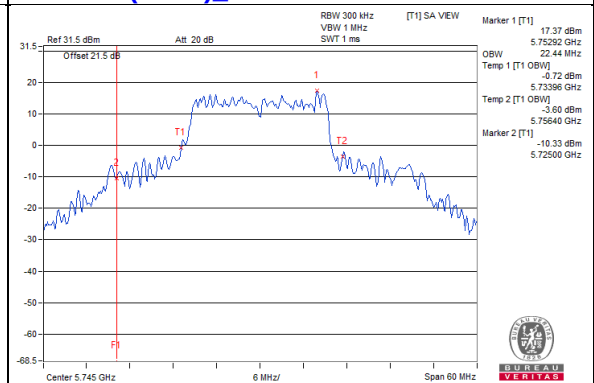


Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11ax (HE40)_Chain 0 / CH151

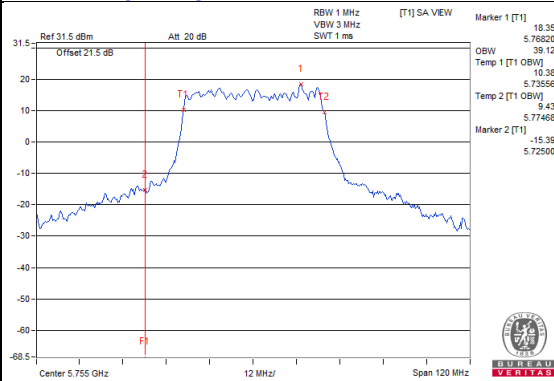


802.11ax (HE40)_Chain 1 / CH151

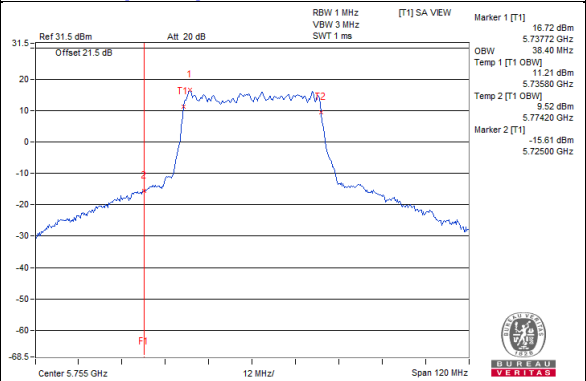


802.11ax (HE40)_Chain 2 / CH151

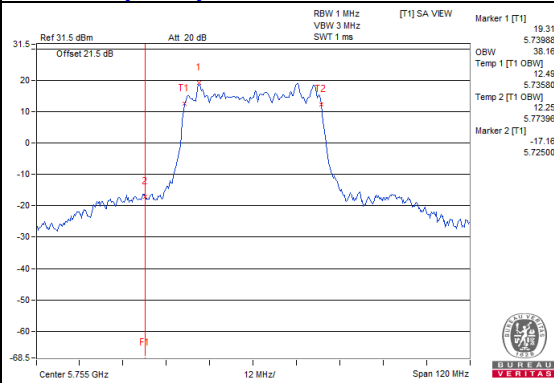


802.11ax (HE40)_Chain 3 / CH151

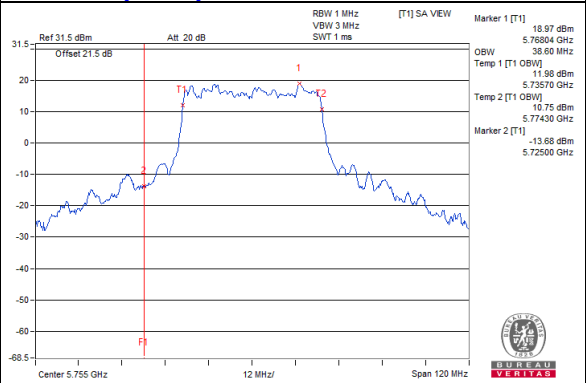


802.11ax (HE80)_Chain 0 / CH155

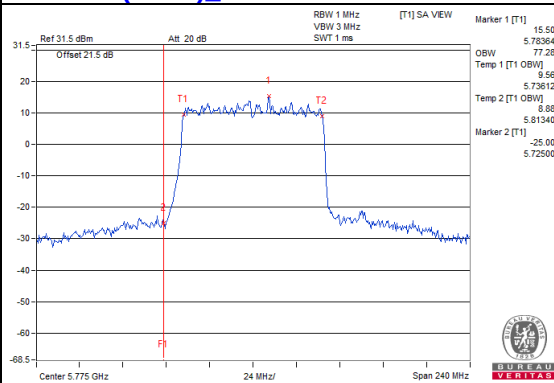


802.11ax (HE80)_Chain 1 / CH155

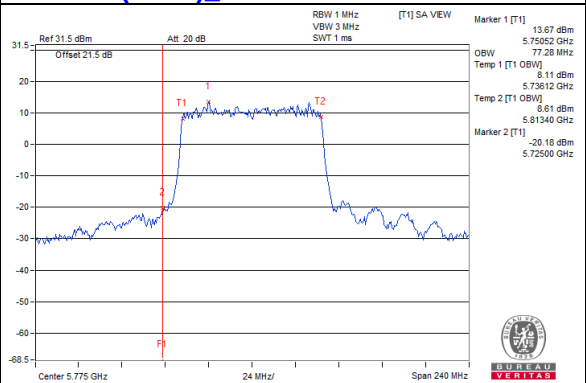

802.11ax (HE80)_Chain 2 / CH155

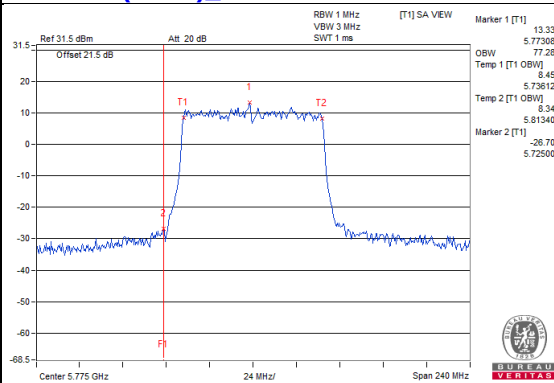

802.11ax (HE80)_Chain 3 / CH155

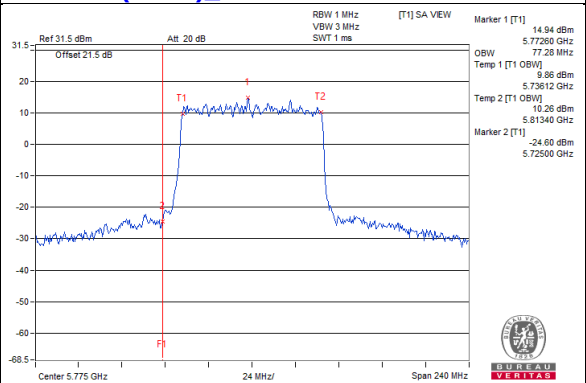


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For U-NII-1:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{ kHz}/300\text{ kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

For U-NII-1:

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
36	5180	6.97	7.90	7.16	7.75	13.48	13.90	Pass
40	5200	7.03	8.30	7.23	8.10	13.72	13.90	Pass
48	5240	7.99	8.02	7.52	7.61	13.81	13.90	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 9.1dBi > 6dBi , so the power density limit shall be reduced to $17-(9.1-6) = 13.90\text{dBm}$.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
36	5180	7.23	7.38	7.22	7.40	13.33	13.90	Pass
40	5200	6.92	8.54	6.69	7.41	13.47	13.90	Pass
48	5240	7.49	7.90	7.56	7.13	13.55	13.90	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 9.1dBi > 6dBi , so the power density limit shall be reduced to $17-(9.1-6) = 13.90\text{dBm}$.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
38	5190	4.01	4.00	3.64	4.21	9.99	13.90	Pass
46	5230	8.02	7.07	6.79	6.35	13.12	13.90	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 9.1dBi > 6dBi , so the power density limit shall be reduced to $17-(9.1-6) = 13.90\text{dBm}$.


802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
42	5210	-0.56	-1.58	-1.33	-0.03	5.19	13.90	Pass


- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = 9.1dBi > 6dBi , so the power density limit shall be reduced to $17-(9.1-6) = 13.90\text{dBm}$.

Spectrum Plot of Worst Value


802.11a_Chain 1 / CH40

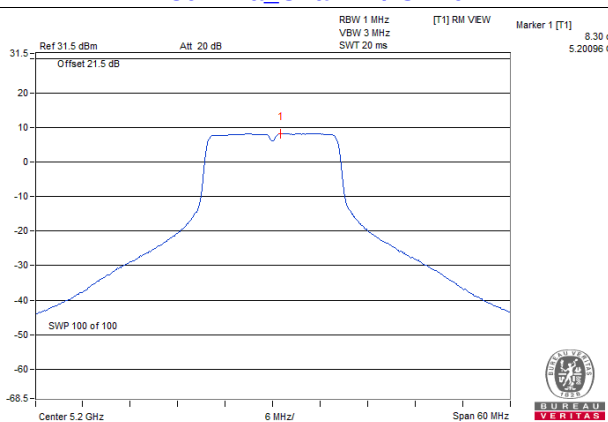


802.11ax (HE20)_Chain 1 / CH40

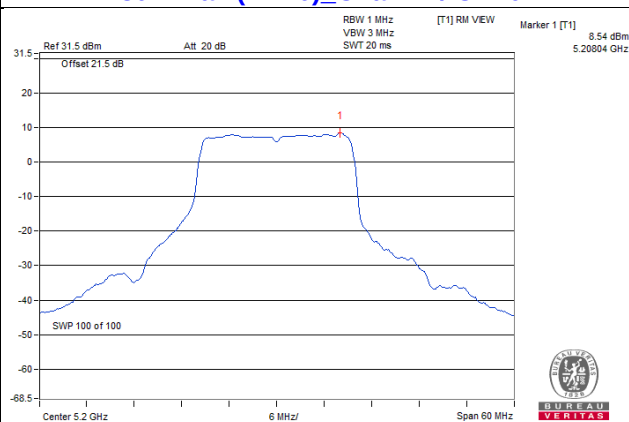

802.11ax (HE40)_Chain 0 / CH46

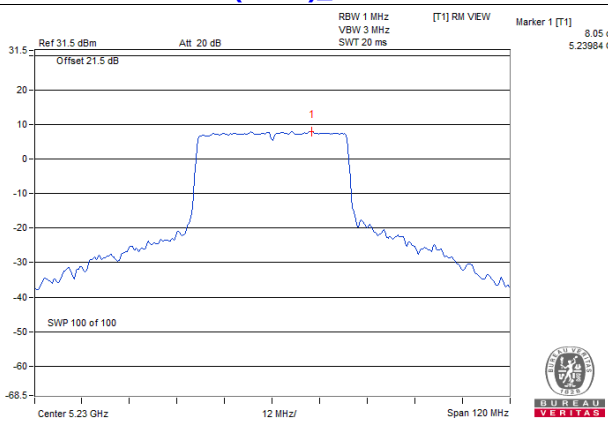

802.11ax (HE80)_Chain 3 / CH42

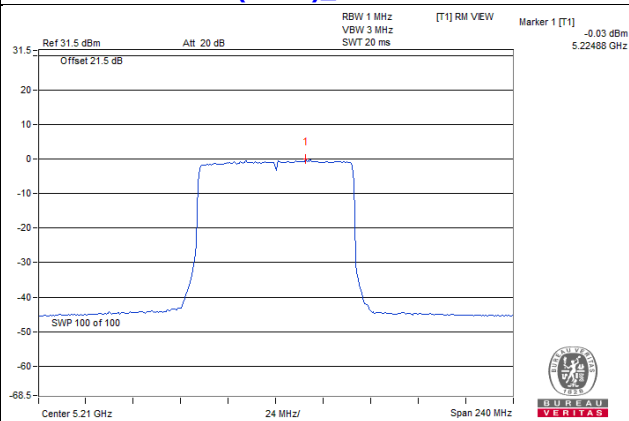

For U-NII-3:

802.11a

Chan.	Freq. (MHz)	PSD (dBm/300kHz)				Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3	mW/ 300kHz	dBm/ 300kHz			
149	5745	2.33	2.14	1.72	2.24	6.5077	8.13	10.35	27.90	Pass
157	5785	2.11	1.79	1.75	2.13	6.2649	7.97	10.19	27.90	Pass
165	5825	2.33	1.95	1.62	1.96	6.2992	7.99	10.21	27.90	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = 8.1dBi > 6dBi , so the power density limit shall be reduced to $30-(8.1-6) = 27.90\text{dBm}$.

802.11ax (HE20)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)				Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3	mW/ 300kHz	dBm/ 300kHz			
149	5745	3.05	3.45	2.87	5.04	9.3594	9.71	11.93	27.90	Pass
157	5785	3.10	3.21	2.88	3.07	8.1044	9.09	11.31	27.90	Pass
165	5825	3.20	2.49	3.19	2.67	7.7972	8.92	11.14	27.90	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = 8.1dBi > 6dBi , so the power density limit shall be reduced to $30-(8.1-6) = 27.90\text{dBm}$.

802.11ax (HE40)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)				Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3	mW/ 300kHz	dBm/ 300kHz			
151	5755	-1.03	-1.25	-1.10	1.00	3.5739	5.53	7.75	27.90	Pass
159	5795	-0.04	-0.63	-1.13	0.54	3.7591	5.75	7.97	27.90	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = 8.1dBi > 6dBi , so the power density limit shall be reduced to $30-(8.1-6) = 27.90\text{dBm}$.


802.11ax (HE80)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)				Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3	mW/ 300kHz	dBm/ 300kHz			
155	5775	-5.63	-5.64	-5.95	-5.36	1.0916	0.38	2.60	27.90	Pass


Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. Directional gain = 8.1dBi > 6dBi , so the power density limit shall be reduced to $30 - (8.1 - 6) = 27.90\text{dBm}$.

Spectrum Plot of Worst Value


802.11a_Chain 0 / CH149

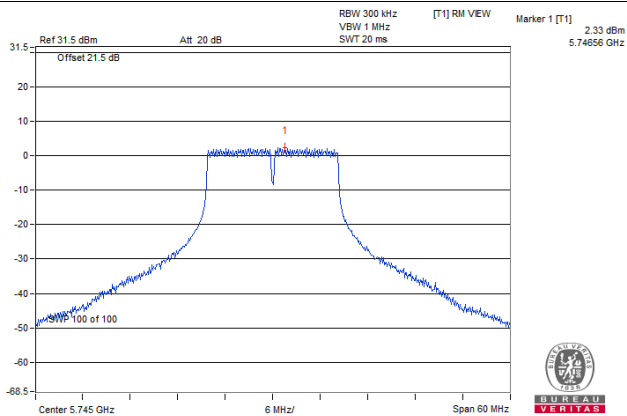


802.11ax (HE20)_Chain 3 / CH149

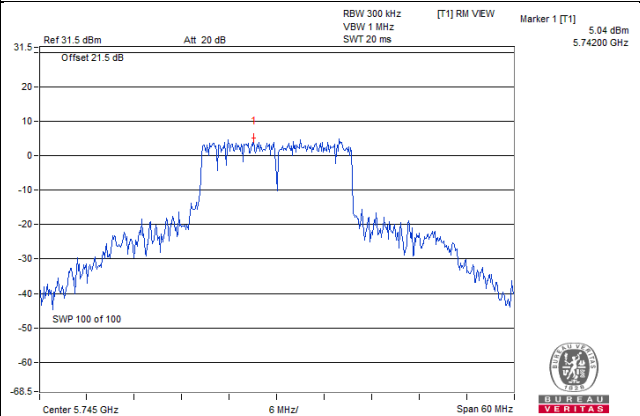

802.11ax (HE40)_Chain 3 / CH151

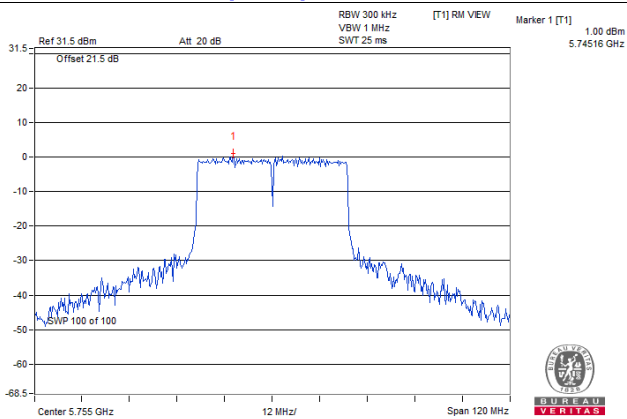

802.11ax (HE80)_Chain 3 / CH155

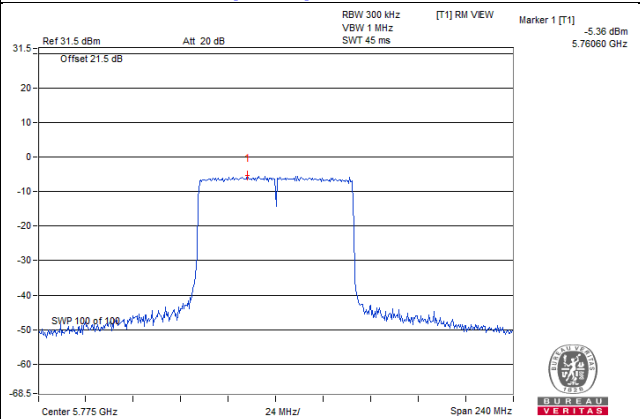


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

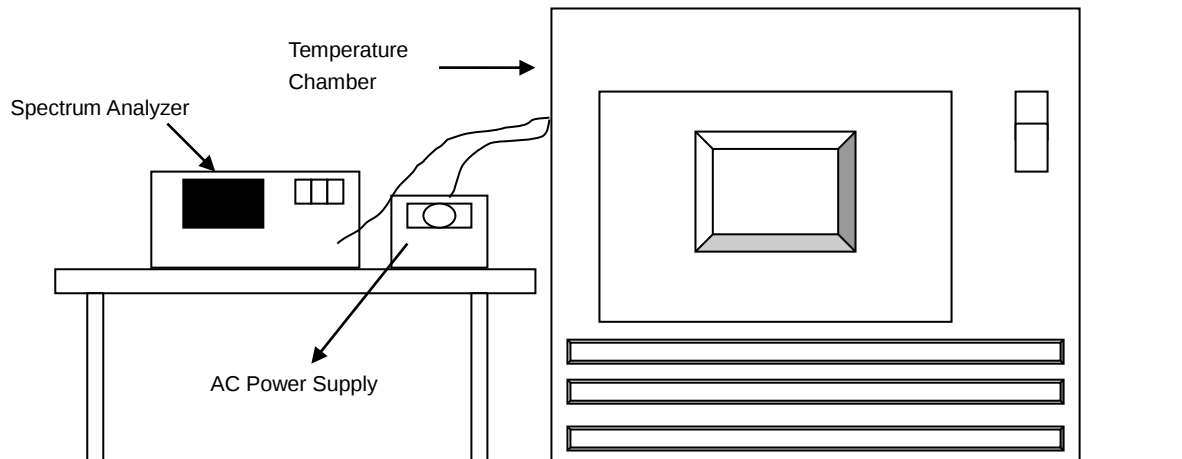

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
40	120	5179.9897	PASS	5179.9909	PASS	5179.9871	PASS	5179.9885	PASS
30	120	5180.0077	PASS	5180.0045	PASS	5180.0082	PASS	5180.0056	PASS
20	120	5179.999	PASS	5179.9992	PASS	5179.9986	PASS	5180.0023	PASS
10	120	5179.9847	PASS	5179.9846	PASS	5179.9837	PASS	5179.9834	PASS
0	120	5179.9827	PASS	5179.9818	PASS	5179.9813	PASS	5179.9811	PASS


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9986	PASS	5179.9997	PASS	5179.9982	PASS	5180.0021	PASS
	120	5179.999	PASS	5179.9992	PASS	5179.9986	PASS	5180.0023	PASS
	102	5179.9995	PASS	5180	PASS	5179.9989	PASS	5180.0028	PASS

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	16.60	16.59	16.60	16.60	0.5	Pass
157	5785	16.59	16.58	16.59	16.59	0.5	Pass
165	5825	16.61	16.60	16.60	16.59	0.5	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	19.16	19.13	19.11	19.12	0.5	Pass
157	5785	19.10	19.15	19.15	19.13	0.5	Pass
165	5825	19.06	19.17	19.13	19.17	0.5	Pass

802.11ax (HE40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	38.32	38.27	38.27	38.23	0.5	Pass
159	5795	38.24	38.25	38.28	38.21	0.5	Pass

802.11ax (HE80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	78.32	78.11	78.37	78.35	0.5	Pass

Spectrum Plot of Worst Value


802.11a_Chain 1 / CH157

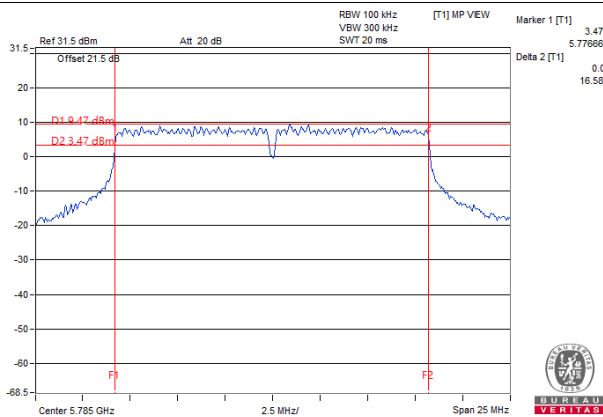


802.11ax (HE20)_Chain 0 / CH165

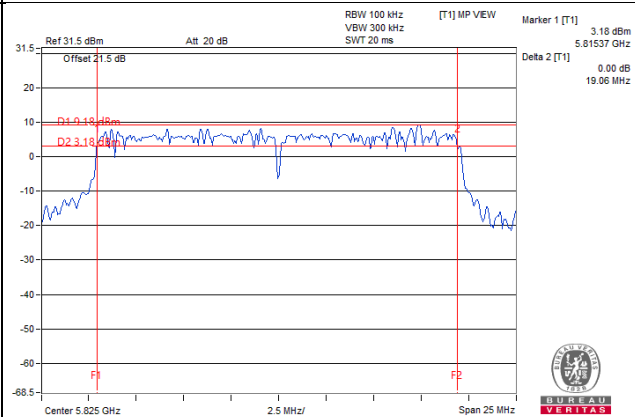

802.11ax (HE40)_Chain 3 / CH159

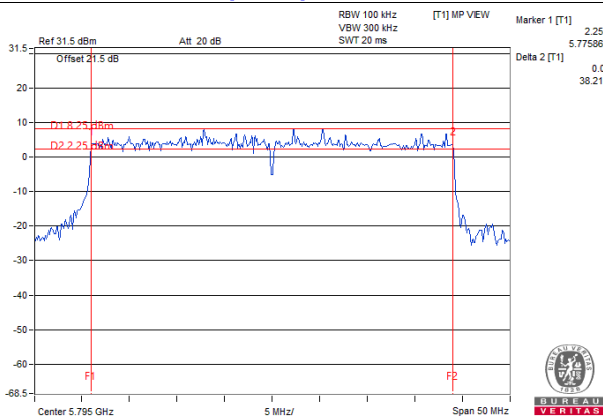

802.11ax (HE80)_Chain 1/ CH155

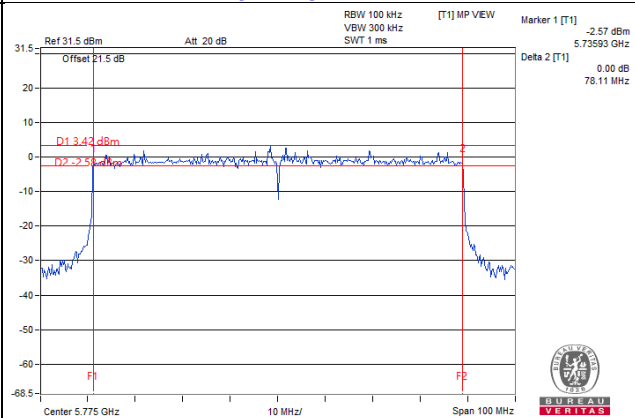

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

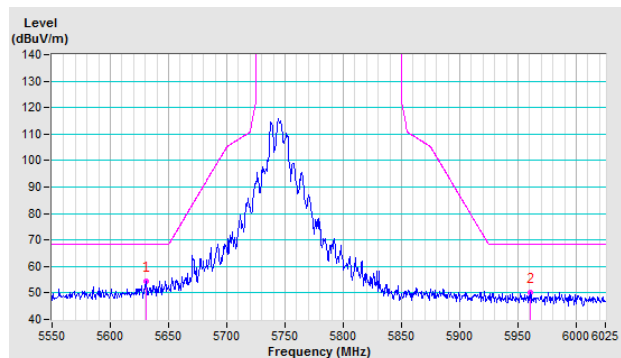


Vertical

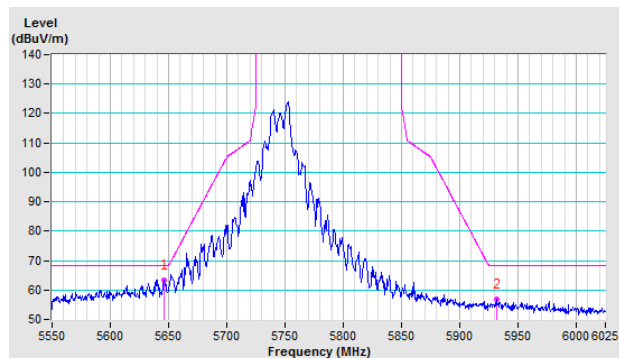


CH 157 5785 MHz

Horizontal

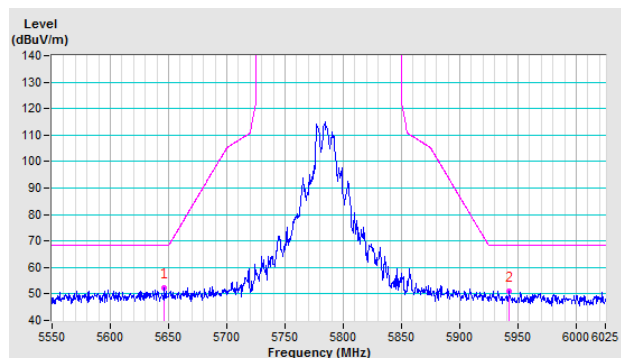


Vertical

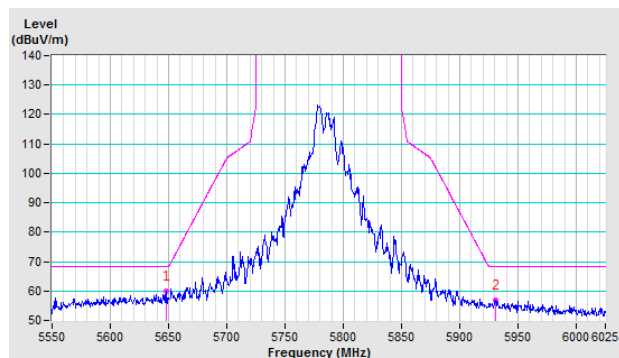


CH 165 5825 MHz

Horizontal

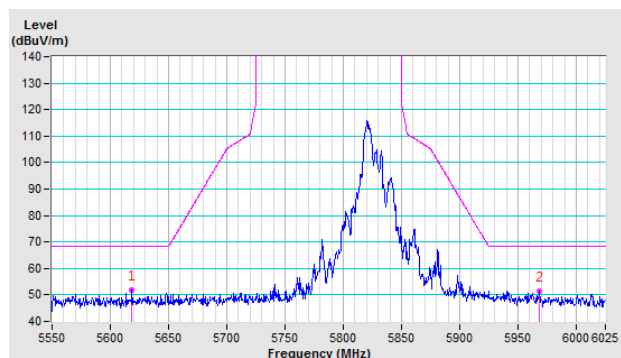


Vertical

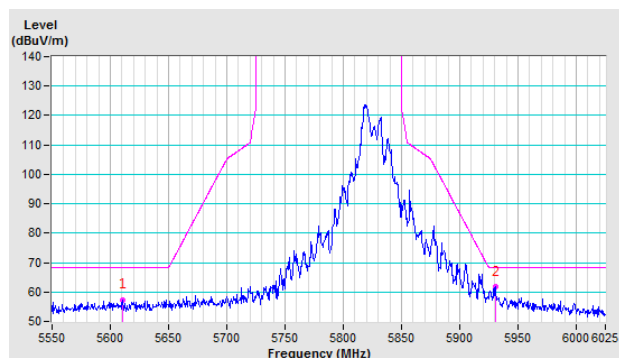


802.11ax (HE20)

CH 149 5745 MHz

Horizontal

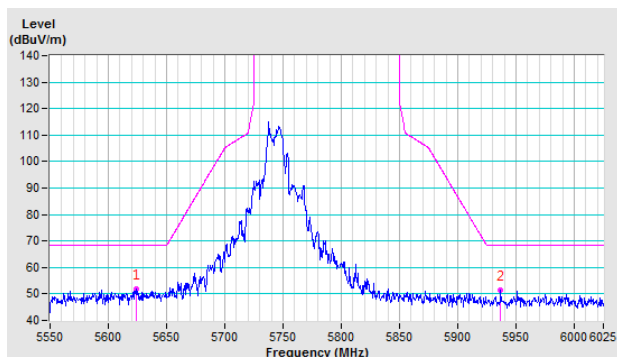


Vertical

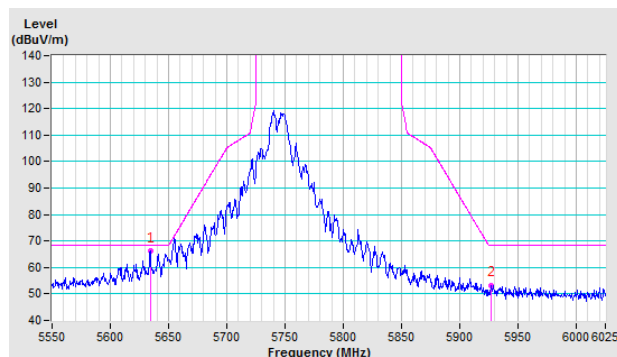


CH 157 5785 MHz

Horizontal

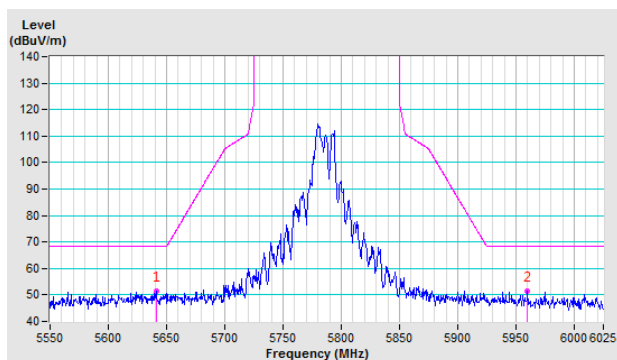


Vertical

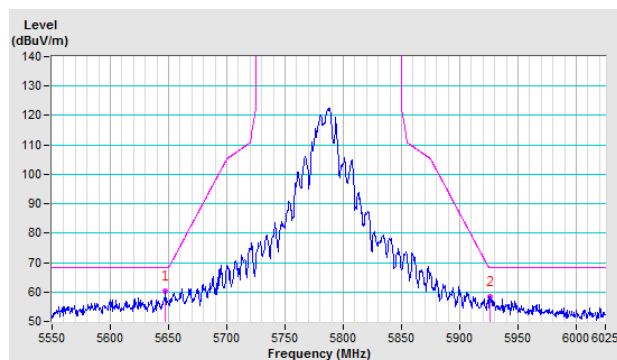


CH 165 5825 MHz

Horizontal

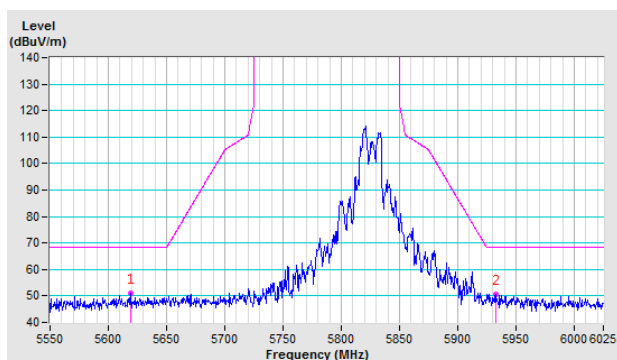


Vertical

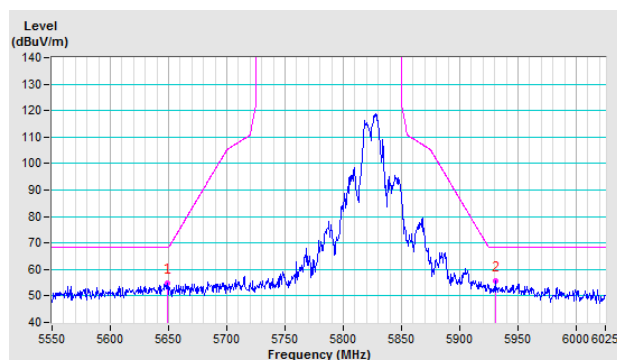


802.11ax (HE40)

CH 151 5755 MHz

Horizontal

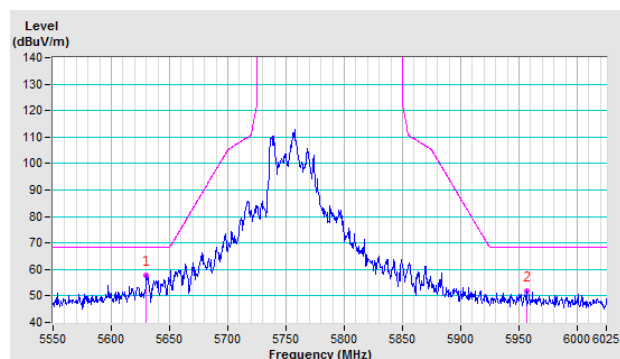


Vertical

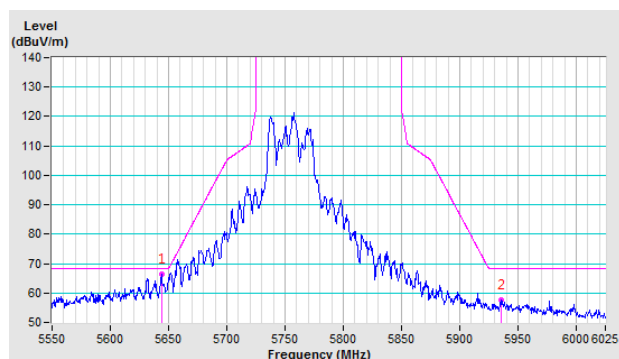


CH 159 5795 MHz

Horizontal

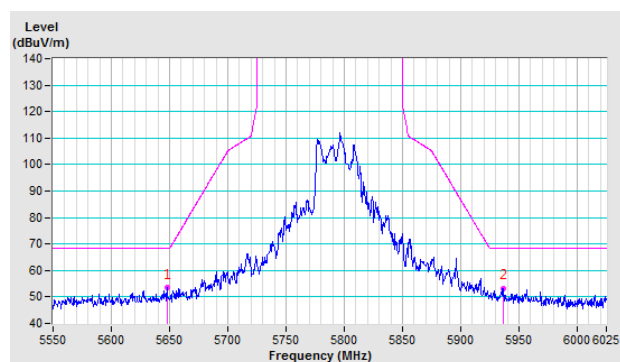


Vertical

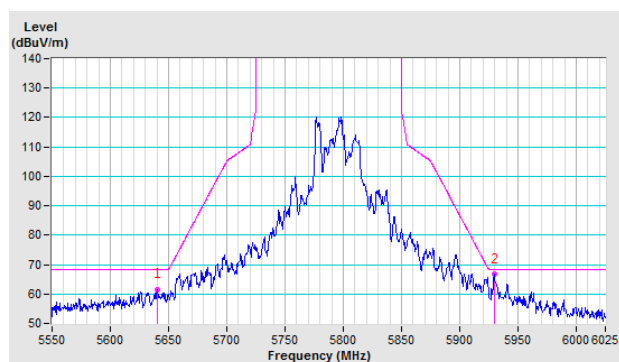


802.11ax (HE80)

CH 155 5775 MHz

Horizontal

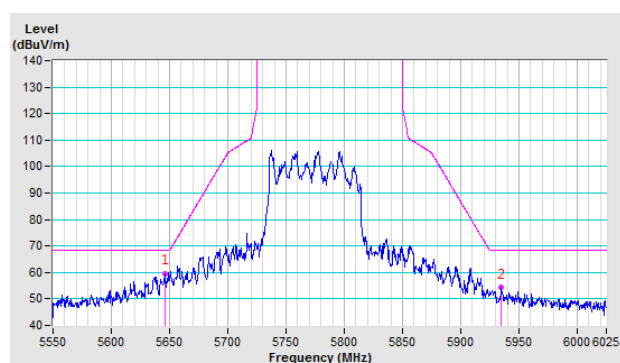

Vertical

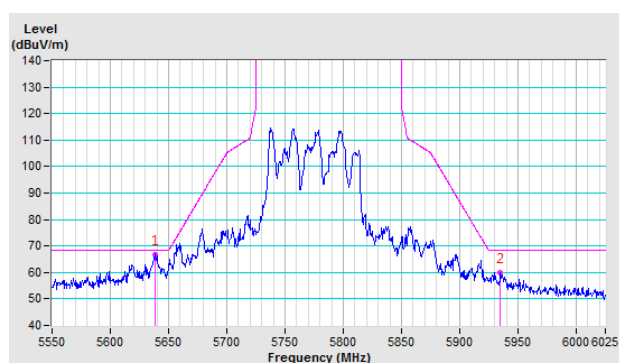

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---