

RF EXPOSURE Test Report

Product: Folding 3-in-1 wireless charger

Trade Mark: Leadingplus, Merkury

Model Number: WL95

FCC ID: 2APTY-QIS12

Prepared for

Leadingplus Electronic Co.,Ltd

Room 102, Building A2, Demei Industrial Center, Donghuan 2nd Road,
Longhua Street, Shenzhen, Guangdong, China.

Prepared by

Shenzhen HongBiao Certification& Testing Co., Ltd

Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan
Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen,
China

Tel.: +86-755-2998 9321 Fax.: +86-755-2998 5110

Website: <http://www.sz-hongbiao.com>

Table of Contents

1 GENERAL DESCRIPTION 5

1.1 DESCRIPTION OF EUT 5

1.2 TEST MODE..... 5

1.3 TEST SETUP 5

1.4 ANCILLARY EQUIPMENT 6

2 TEST FACILITIES AND ACCREDITATIONS 7

2.1 TEST LABORATORY 7

2.2 ENVIRONMENTAL CONDITIONS 7

2.3 MEASUREMENT UNCERTAINTY 7

2.4 TEST SOFTWARE 7

3 LIST OF TEST EQUIPMENT 8

4 RF EXPOSURE..... 9

4.1 MAXIMUM PERMISSIBLE EXPOSURE 9

4.1.1. *Limit* 9

4.1.2. *Test Setup*..... 9

4.1.3. *Test Result* 10

5 PHOTOGRAPHS OF THE TEST SETUP11

TEST RESULT CERTIFICATION

Applicant's Name..... : Leadingplus Electronic Co.,Ltd
Address : Room 102, Building A2, Demei Industrial Center, Donghuan 2nd
Road, Longhua Street, Shenzhen, Guangdong, China.
Manufacturer's Name : Leadingplus Electronic Co.,Ltd
Address : Room 102, Building A2, Demei Industrial Center, Donghuan 2nd
Road, Longhua Street, Shenzhen, Guangdong, China.

Product description

Product name : Folding 3-in-1 wireless charger
Model Number : WL95

Standards : FCC CFR 47 PART 1 , 1.1310

Test procedure..... : KDB 680106 D01 Wireless Power Transfer v04

This device described above has been tested by Shenzhen HongBiao Certification& Testing Co., Ltd and the test results show that the equipment under test (EUT) is in compliance with the EMC requirements. And it is applicable only to the tested sample identified in the report.

Date of Test..... :

Date (s) of performance of tests..... : Dec. 18, 2024~ Dec. 25, 2024

Test Result..... : **Pass**

Testing Engineer :

Zoe Su

(Z o e S u)

Technical Manager :

Ming Liu

(Ming Liu)

Authorized Signatory :

Leo Su

(L e o S u)

[illegible]

1 General Description

1.1 Description of EUT

Product name:	Folding 3-in-1 wireless charger
Model name:	WL95
Series Model:	MI-QIS12
Different of series model:	All the models are the same circuit and module, except the model No..
Operation frequency:	Phone : 115kHz–205kHz Airpods: 115kHz–205kHz iWatch: 321.2kHz
Operational mode:	Wireless charging
Modulation type:	ASK
Antenna type:	Coil Antenna
Antenna gain	0dBi
Input:	DC 5V/3A, 9V/3A
Battery:	N/A
Power supply:	Input: 5V/3A, 9V/3A Phone output: 5W/7.5W/10W/15W Airpods output: 5W Max iWatch output: 2.5W Max
Adapter information:	N/A

1.2 Test Mode

Pretest Test Mode	Description of Mode
1	Adapter+Wireless Output (Phone:5W+ Airpods:5W+iWatch:2.5W)
2	Adapter+Wireless Output (Phone:7.5W+ Airpods:5W+iWatch:2.5W)
3	Adapter+Wireless Output (Phone:10W+ Airpods:5W+iWatch:2.5W)
4	Adapter+Wireless Output (Phone:15W+ Airpods:5W+iWatch:2.5W)

1.3 Test Setup

See photographs of the test setup in the report for the actual setup and connections between EUT and support equipment.

1.4 Ancillary Equipment

Equipment	Model	S/N	Manufacturer
Adapter	CD289	35810	Ugreen Group Limited
Phone	LE2120	98d9b780	Shenzhen Oneplus Technology Co., Ltd
Airpods	A2031	H04F3NS0L X2Y	Apple Inc.
Watch	A2859	M69PQQ7J2 T	Apple Inc.

2 Test Facilities and Accreditations

2.1 Test Laboratory

Test Site	Shenzhen HongBiao Certification& Testing Co., Ltd
Test Site Location	Room 102, 201, Building 2, Yuanwanggu RFID Industrial Park, Tongguan Road, Tianliao Community, Yutang Street, Guangming District, Shenzhen, China
Telephone:	(86-755) 2998 9321
Fax:	(86-755) 2998 5110
FCC Registration No.:	CN1341
A2LA Certificate No.:	6765.01

2.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C~35°C
Relative Humidity:	20%~75%
Air Pressure:	98kPa~101kPa

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

The data and results quoted in this document are true and accurate values, and uncertainties are not involved in the calculations.

In addition, components and mass production processes that are similar to testing equipment may introduce additional deviations, and the manufacturer is solely responsible for the continued compliance of the equipment.

Measurement Frequency Range	U, (dB)	Note
RF frequency	2×10^{-5}	
E-field	± 2.5 dB	
H-field	± 4.2 dB	
Temperature	± 1 degree	
Humidity	± 5 %	

2.4 Test Software

Software name	Manufacturer	Model	Version
EHP200-TS	Narda	EHP-200A	Rel 1.95

3 List of Test Equipment

Item	Equipment No.	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	HB-E073	Electric and Magnetic Field Analyzer	Narda	EHP-200A	180ZX11013	2024-05-21	2025-05-20

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

4 RF Exposure

4.1 Maximum Permissible Exposure


4.1.1. Limit

Frequency range(MHz)	Electric field strength(V/m)	Magnetic field strength(A/m)	Power density(mW/cm2)	Averaging time(minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0 6	6
300-1500			f/300	6
1500-100000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100000			1	30

f = frequency in MHz * = Plane-wave equivalent power density

be tested.

4.1.2. Test Setup

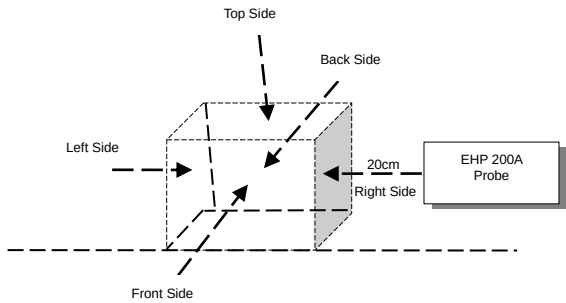

4.1.3. Test Result


Test condition: Mode 1 operating mode with client device (1 %, 50%, 99% battery status of client device)

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<1%	Top	20	4.2466	0.0554
<1%	Left	20	2.6285	0.0454
<1%	Right	20	2.5961	0.0518
<1%	Front	20	1.9157	0.0474
<1%	Back	20	1.9868	0.0501
Limit			614	1.63
Margin Limit (%)			0.69%	3.40%

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<50%	Top	20	4.2460	0.0547
<50%	Left	20	2.6278	0.0448
<50%	Right	20	2.5953	0.0512
<50%	Front	20	1.9151	0.0465
<50%	Back	20	1.9860	0.0495
Limit			614	1.63
Margin Limit (%)			0.69%	3.36%

Maximum permissible Exposure				
Battery levels	Test sides	Test distance(cm)	E –field(V/m)	H–field(A/m)
<99%	Top	20	4.2452	0.0540
<99%	Left	20	2.6271	0.0441
<99%	Right	20	2.5945	0.0405
<99%	Front	20	1.9144	0.0457
<99%	Back	20	1.9852	0.0486
Limit			614	1.63
Margin Limit (%)			0.69%	3.31%

5 Photographs of the Test Setup

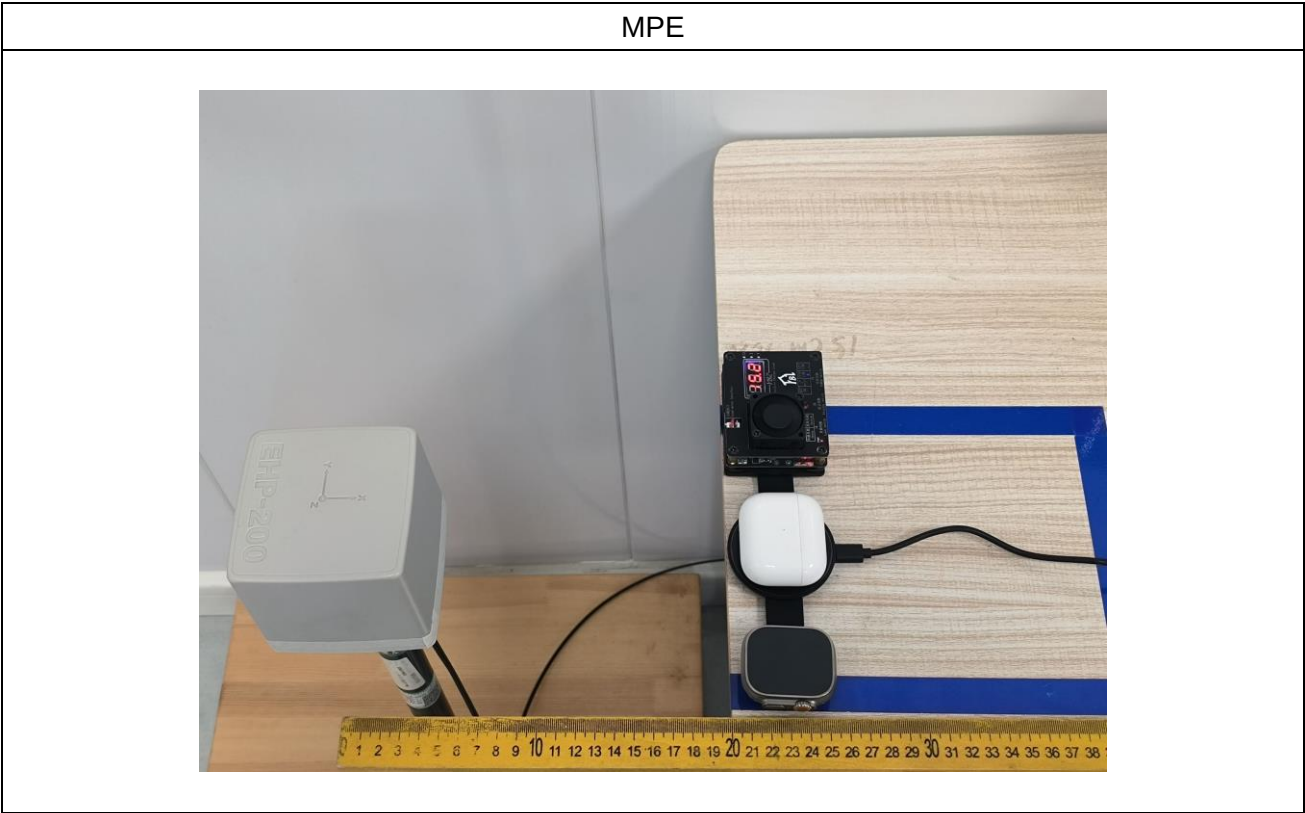

***** END OF REPORT *****