

PART NO.	-
Maker Code	-
DATE	2022. 09. 27
Page	1 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

Pre-APPROVAL SHEET

Customer : LGIT

Company : KEITECH

Product Name : PCB Antenna

Model : GEN3(90mm)

Customer P/N : -

Maker Code : -



Department	Investigation	Verification	Approval
Circuit		/	
Machine			
Safety			




PART NO.	—
Maker Code	—
DATE	2022. 09. 27
Page	2 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

► Contents ◀

1. Revision History of Product Specification	03 / 9
1.1 History List of Approval Sheet	03 / 9
2. Circuit Specification	04 / 9
2.1 Test Setting	04 / 9
2.1.1 Test Environment (Condition/Method)	04 / 9
2.2 Electrical Specification	05 / 9
2.2.1 Electrical Spec. of Piece (With VSWR)	06 / 9
2.2.2 Passive Gain & 3D Pattern	07 / 9
3. Mechanical Specification	08 / 9
3.1 Material Certificate	08 / 9
3.2 Assy Drawing	09 / 9

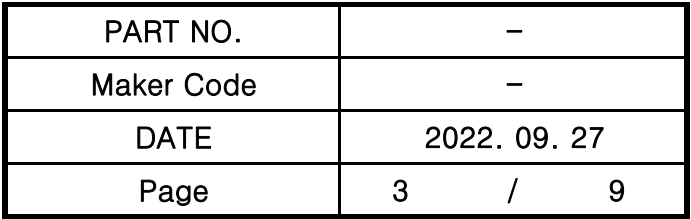

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

1.1 History List of Approval Sheet

[illegible]

PART NO.	–
Maker Code	–
DATE	2022. 09. 27
Page	4 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

2. Circuit Specification

2.1 Test Setting

2.1.1 Test Environment (Condition/Method)

① VSWR

Step 1. Connect ANT port with cable included adaptor to port1 of Network analyzer.

Step 2. Point out markers on network analyzer display at target frequencies.

Step 3. Inspect VSWR


② Radiation Pattern and Gain

Step 1. Calibrate chamber system for gain measurement using horn antenna.

At the same time set up software program for chamber system control.

Step 2. Change over from a horn antenna to measuring antenna on target positioner

Step 3. Start a software program for chamber system control & measuring.

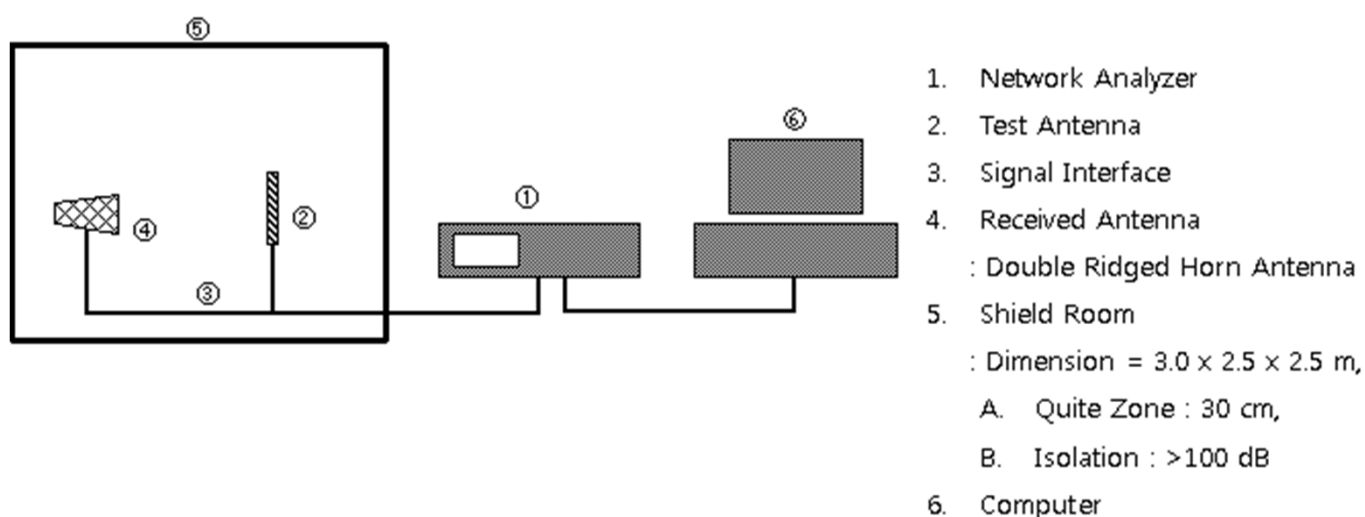



PART NO.	–
Maker Code	–
DATE	2022. 09. 27
Page	5 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A


2.2 Electrical Specification

GEN3(90mm)		
Frequency	2412MHz	2484MHz
VSWR	≤ 3.8	≤ 3.8
Peak Gain (dBi)	1.5	1.4
Directivity	Omni-directional	
Polarization	Linear	

PART NO.	—
Maker Code	—
DATE	2022. 09. 27
Page	6 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

2.2.1 Electrical Spec. of Piece (With VSWR)

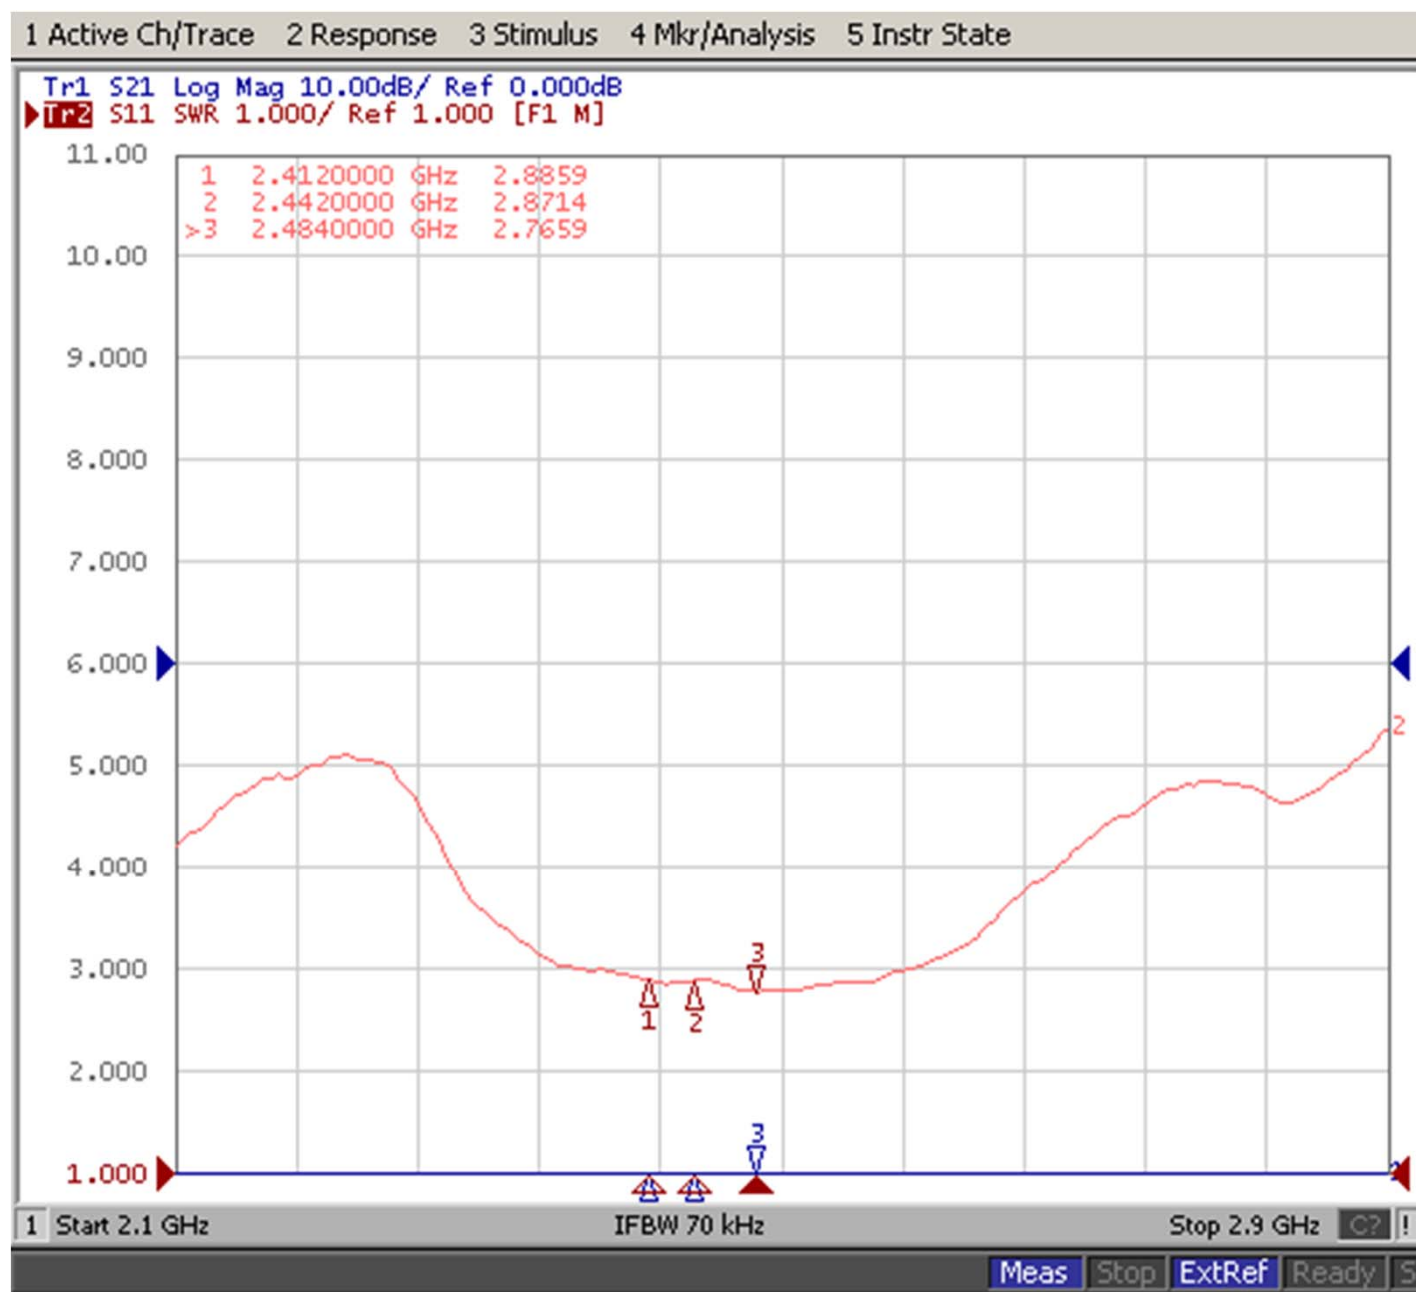


PART NO.	—
Maker Code	—
DATE	2022. 09. 27
Page	7 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

2.2.2 Passive Gain & 3D Pattern

2GHz_3D Pattern

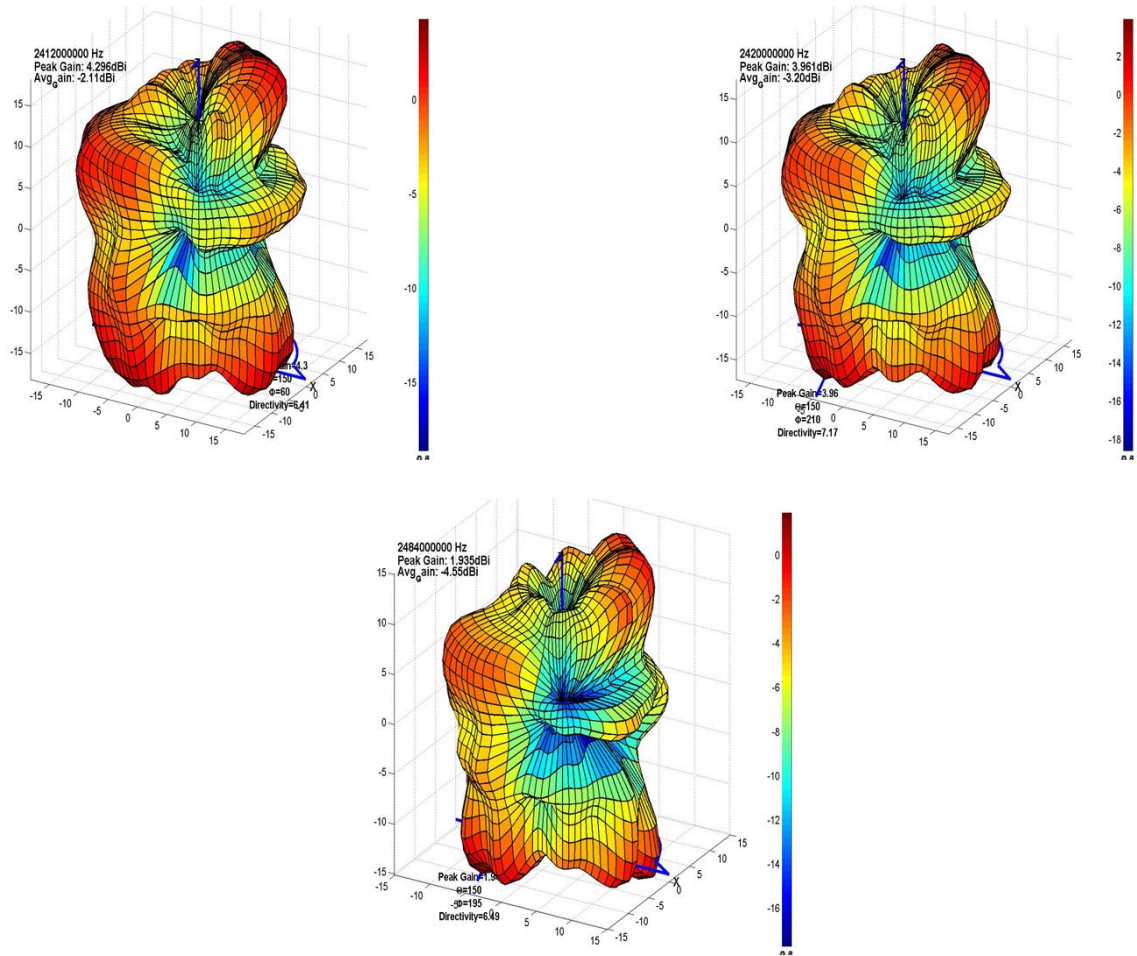

Passive Gain

Frequency	Efficiency	Average Gain			Max Gain			Max Position	Directivity
		Ver	Hor	Total	Ver	Hor	Total		
2,412,000,000 Hz	30.6 %	-11.5 dBi	-5.5 dBi	-4.6 dBi	-1.4 dBi	1.4 dBi	1.5 dBi	Theta150/Pie150	6.41 dB
2,420,000,000 Hz	30.4 %	-11.8 dBi	-5.4 dBi	-4.7 dBi	-1.5 dBi	1.3 dBi	1.5 dBi	Theta150/Pie300	7.17 dB
2,442,000,000 Hz	30.3 %	-11.9 dBi	-5.4 dBi	-4.9 dBi	-1.5 dBi	1.3 dBi	1.4 dBi	Theta150/Pie300	6.99 dB
2,462,000,000 Hz	30.2 %	-12.1 dBi	-5.3 dBi	-4.9 dBi	-1.6 dBi	1.2 dBi	1.4 dBi	Theta150/Pie285	6.77 dB
2,484,000,000 Hz	30.2 %	-12.2 dBi	-5.3 dBi	-5.0 dBi	-1.6 dBi	1.2 dBi	1.4 dBi	Theta150/Pie285	6.49 dB



PART NO.	–
Maker Code	–
DATE	2022. 09. 27
Page	8 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

3. Mechanical Specification

3.1 Material Certificate

Model		GEN3(90mm)				
Ant Type		PCB Antenna				
No	Part Name	Part No.	Raw Material (Plating Spec.)	Raw Material Company	Manufacture Company	Processing Company Representative
1	PCB	–	CTI-600, 1.6T / Green			
2	Cable	–	FEP/Copper /ø1.78X245mm			
3	SMA Conn (R/A)		Brass			
4	Tape		3M467MP			
5						

PART NO.	-
Maker Code	-
DATE	2022. 09. 27
Page	9 / 9

Model	Type	Rev.	KEITECH	IR
GEN3(90mm)	PCB Antenna		LGIT	A

3.2 Assy Drawing

CONFIDENTIAL



Prohibited the export information to a random Keitech industrial data.

ROHS

REVISION

IR First publication

DATE 2022.09.27

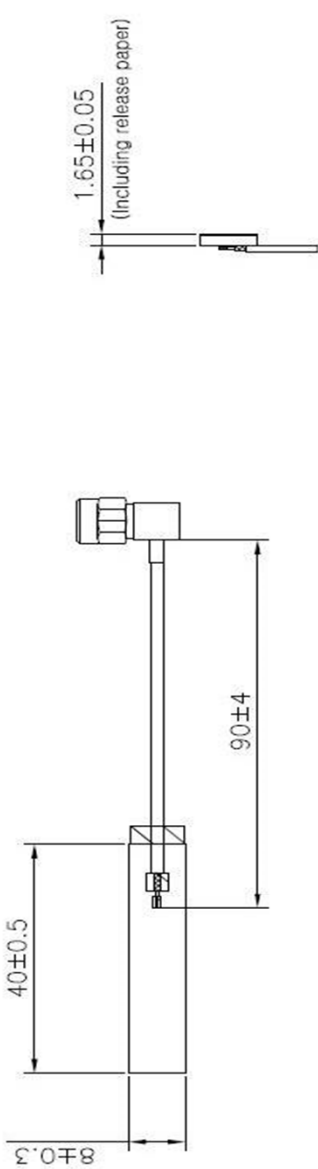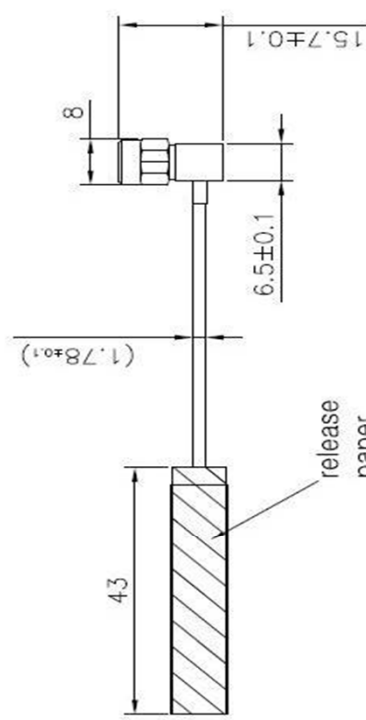Note

- Soldering : Pb free
- These dimensions inside of the square are CTQ points.
- PCB color : Green
- Silk printed : Model name / Date of manufacture (year, month, day)
- General tolerance : ±0.2
- All other matters shall be determined after consultation with designers.
- withstanding voltage : 600 V/m (apply to PCB CTI-600)
- Waterproof coating thickness : 200 μm ↑
- Adhesive tape temperature : Operating temperature -40°C ~ +149°C
Low Temperature storage -40°C
High Temperature storage +204°C

NO	PART NO	PART NAME	MATERIAL	QTY	FINISH/COLOR	REMARKS
2		CONNECTOR	SMA (male) Connector (R/A)	1		
		CABLE	RG-175 (ø1.78X30L)	1		
1		TAPE	3M 467MP, 130μm	1		
		PCB	CTI-600, 1.6T	1	Green	

Keitech.co.kr

UNIT	mm	INCH	GENERAL TOLERANCE	APPROVAL
THIRD ANGLE DIMENSION	0~6	±0.05	±0.10	±0.25
	6~18	±0.07	±0.15	±0.35
	18~50	±0.10	±0.20	±0.60
	50~120	±0.15	±0.30	±0.90
SCALE	120~250	±0.20	±0.50	±1.00
	250~500	±0.30	±1.50	±2.00