

OTA TEST REPORT

Application name: ERD

Address of application: No.390 Qingfeng RD, Qingxi TW, Dongguan, Guangdong, CHINA

Product name: SMA-2.4G Rubber antenna -178 brown - L110

Trademark: SHENZHEN FLY ELECTRONIC

Model No.: 3030-0004

Electric rating: /

Receive product date: 2024-11-12

Tested date: 2024-11-12--2024-11-13

Revised date: /

Prepared by: _____

Reviewed by: _____

Approved by: _____

Note:

1. The results of this report are valid only for the samples.
2. This report shall not be reproduced except in full without written approval of the laboratory. The test results presented in this report relate only to the tested items.


1.1 Summary:

No	Item	Reference standard	Result	Done
1	Active OTA TRP	CWG OTA Test Plan / YD/T 1484.1	/	☐
2	Active OTA TIS	CWG OTA Test Plan / YD/T 1484.1	/	☐
3	Passive OTA	IEEE Standard Test Procedures for antennas	NA	☒
4				
5				
Remark				

Note: WI-LA-XXXX is the LAB test Specification.

1.2 EUT PHOTO and TEST PHOTO:

EUT PHOTO:

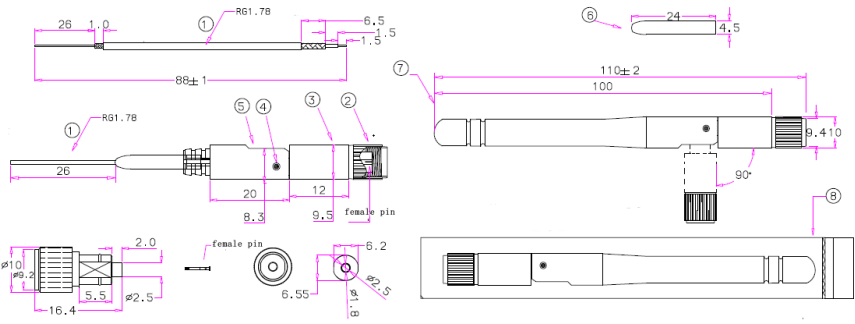Global picture	local picture	size picture
		

EUT TEST PHOTO:

Active OTA TEST	Passive TEST
	

1.3 Critical component list:

No	Component	Trade mark	Model No.	Technical parameters	Remark
1	antenna	SHENZHEN FLY	3030-0004	2400-2500MHz	/
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					

1.4 Test equipment list:

No	Equipment	Manufacture	Model No.	Serial No.	Calibration due date	Used
1	Shielding room	zhongkeguoji	5*5*3.7	AC3400	2022-01-13	☒
2	SISO RF BOX	zhongkeguoji	Z9908A-N03	Z9908A-N03	2022-01-13	☒
3	SISO High speed switch box	zhongkeguoji	Z9908A-N02	Z9908A-N02-24	2022-01-13	☒
4	24 antenna probe	zhongkeguoji	Z9810A	Z9810A-24	2022-01-13	☒
5	Comprehensive test instrument	Rohde & Schwarz	CMW500	CMW500	2022-01-13	☐
6	network analyzer	Rohde & Schwarz	ZNL	ZNL6	2022-01-13	☒
7	Communication antenna	zhongkeguoji	--	--	2022-01-13	☐
8	6dB attenuator	Shuxi tongxun	MTA2-6-18-4T	21091306	2022-01-13	☒
9	10dB attenuator	Shuxi tongxun	MTA2-10-18-4T	21091305	2022-01-13	☐

1.5 Test condition:

No	Project	Condition
1	Ambient condition	Ambient temperature: (22 ± 2) °C ; Relative humidity ≤ 75 %
2	Voltage	Nominal Voltage: +/- 2%
3	Frequency	Nominal Frequency: +/- 2%
4	THD	Total Harmonic Distortion: 5% max

Remark: Unless specified otherwise in the individual Methods, the tests shall be conducted under the above environmental conditions.

1.6 Test standard:

No	Standard No.	Description	Used
1	UL8750	Light Emitting Diode (LED) Equipment for Use in Lighting Products	☐
2	YD/T 1484.1	Measurement method for radiated RF power and receiver performance of wireless device. Part 1: General requirement	☐
3	CWG OTA Test Plan	Test Plan for RF Performance Evaluation of Wi-Fi® Mobile Converged Devices	☐
4	IEEE Standard Test Procedures for antennas	IEEE Standard Test Procedures for Antennas	☒
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			

1.7 Test sample(s) information:

Model No.	Input ☐ CC ☐ CV				Output ☐ CC ☐ CV		
	Voltage ☐ Vac ☐ Vdc	Frequency (Hz)	☐ Current (A) ☐ Power (W)	Power Factor	Voltage ☐ Vac ☐ Vdc	Frequency (Hz)	☐ Current (mA) ☐ Power (W)

1.8 Revision Summary:

Date	Project Handler	Section	Description of Change
		N/A	None

2.3 Passive OTA :

Reference standard: IEEE Standard Test Procedures for antennas;

Method:

The prototype (antenna) under test does not provide a signal source, but is fed by the network analyzer. The signal returns to the network analyzer through the antenna under test and the measuring antenna to form a test loop.

Tests were performed at 22 ± 2 °C ambient.

Take down the communication antenna, connect the cable with the antenna through the adapter (a 6dB attenuator is connected in the middle), place the antenna to be tested on the turntable, and align the phase center with the laser.

Requirements:

Bluetooth devices typically achieve an antenna gain in the range of -10 dBi to +10 dBi.

2.3, Passive OTA :

Reference standard: IEEE Standard Test Procedures for antennas;

Results:

Frequency(MHz)	2400	2420	2440
Gain(dBi)	2.537	2.69	2.87
Efficiency(%)	61.53%	63.48%	67.90%
AverageGain(dBi)	-0.84	-0.615	-0.292
Efficiency(dB)	-2.109	-1.973	-1.682
MaxGainSite	P 90°/ T 105°	P 75°/ T 105°	P 90°/ T 105°
Directivity(dBi)	4.646	4.664	4.552
TRP(dBm)	-2.109	-1.973	-1.682
RCPGain(dBi)	0	0	0
LCPGain(dBi)	0	0	0
Front Back Ratio(dB)	4.96	4.646	4.558
Axial Ratio(dB)	0	0	0
Upper hemisphere(%)	65.017	64.696	64.411
Roundness(dB)	2.878	2.698	2.627
Cross Polar Ratio(dB)	29.831	28.869	23.074
Roll Off Factor(dB)	10.555	11.19	12.173
3dB BeamWidth(Theta=90)	89	185	186
3dB BeamWidth(Phi=0)	57	55	56
3dB BeamWidth(Phi=90)	26	28	28

TEST LAB OF WAC LIGHTING (DONGGUAN) CO.LTD

Address: No.390 Qingfeng Rd, Qingxi Town, Dongguan City, Guangdong, China 523653

Tel: +86-769-87311200

Fax: +86-769-87311250

Form No.: CR-TE-035/C

AxialPositionGainTotal(dB)	-28.248	-30.343	-27.4
Upper Hem Efficiency (%)	40.01%	41.07%	43.73%
Lower Hem Efficiency (%)	21.53%	22.41%	24.16%
Efficiency ThetaPol (%)	58.85%	60.87%	65.23%
Efficiency PhiPol (%)	2.68%	2.62%	2.67%

Frequency(MHz)	2460	2480	2500
Gain(dBi)	2.76	2.841	2.794
Efficiency(%)	68.31%	71.01%	71.05%
AverageGain(dBi)	-0.26	-0.248	-0.273
Efficiency(dB)	-1.655	-1.487	-1.484
MaxGainSite	P 90° / T 105°	P 90° / T 105°	P 90° / T 105°
Directivity(dBi)	4.416	4.328	4.279
TRP(dBm)	-1.655	-1.487	-1.484
RCPGain(dBi)	0	0	0
LCPGain(dBi)	0	0	0
Front Back Ratio(dB)	4.568	4.061	4.043
Axial Ratio(dB)	0	0	0
Upper hemisphere(%)	64.023	63.323	62.901
Roundness(dB)	2.613	2.254	2.268
Cross Polar Ratio(dB)	21.499	21.751	21.72

TEST LAB OF WAC LIGHTING (DONGGUAN) CO.LTD





Address: No.390 Qingfeng Rd, Qingxi Town, Dongguan City, Guangdong, China 523653


Tel: +86-769-87311200

Fax: +86-769-87311250


Form No.: CR-TE-035/C

Roll Off Factor(dB)	12.343	12.729	12.721
3dB BeamWidth(Theta=90)	187	193	197
3dB BeamWidth(Phi=0)	54	54	52
3dB BeamWidth(Phi=90)	59	30	59
AxialPositionGainTotal(dB)	-25.318	-25.796	-26.216
Upper Hem Efficiency (%)	43.73%	44.96%	44.69%
Lower Hem Efficiency (%)	24.58%	26.04%	26.36%
Efficiency ThetaPol (%)	65.70%	68.34%	68.51%
Efficiency PhiPol (%)	2.61%	2.67%	2.54%


2400MHz 3D Front	2400MHz 3D Back
	
2420MHz 3D Front	2420MHz 3D Back
	
2440MHz 3D Front	2440MHz 3D Back




2460MHz 3D Front




2460MHz 3D Back




2480MHz 3D Front





2480MHz 3D Back




2500MHz 3D Front




2500MHz 3D Back




Gain:

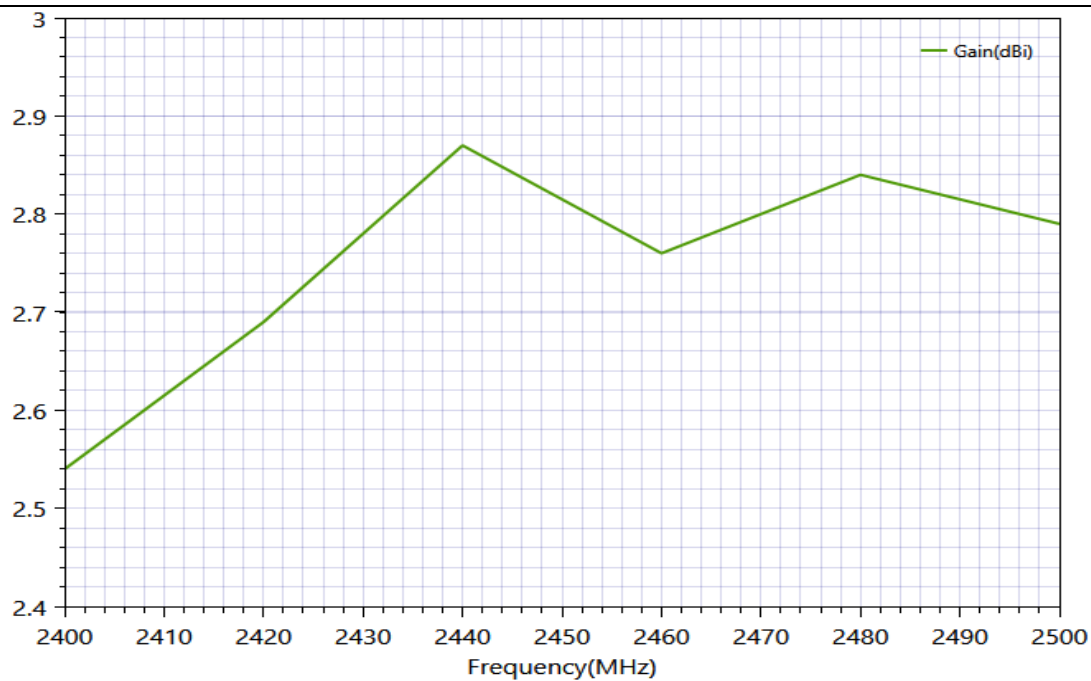

EfficPercentage:

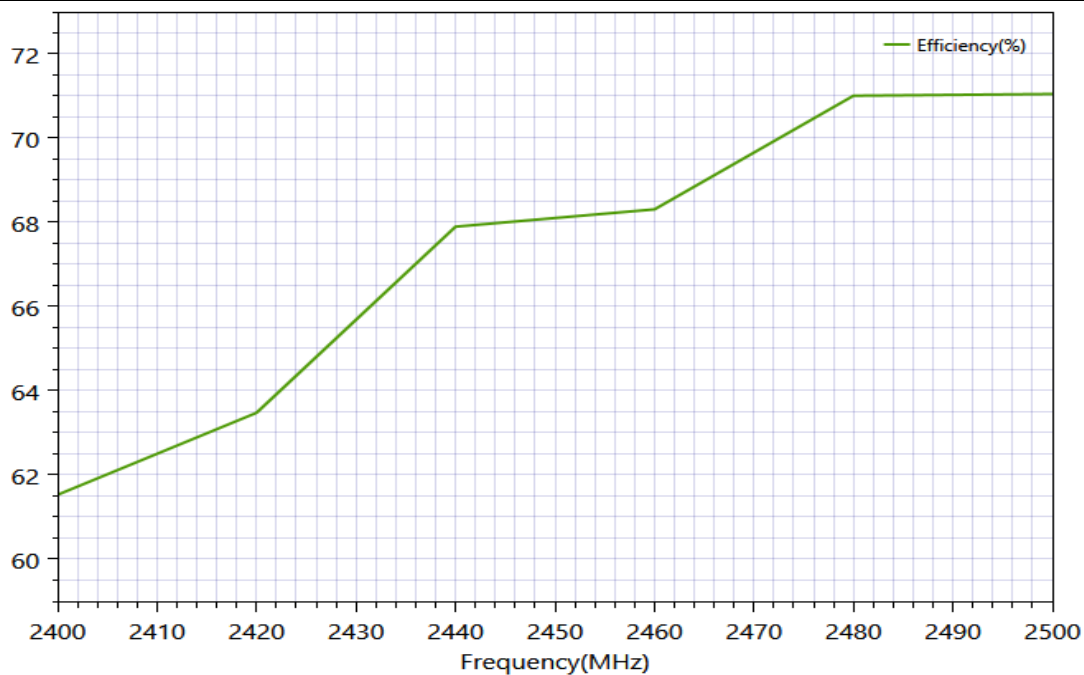

Impedance:

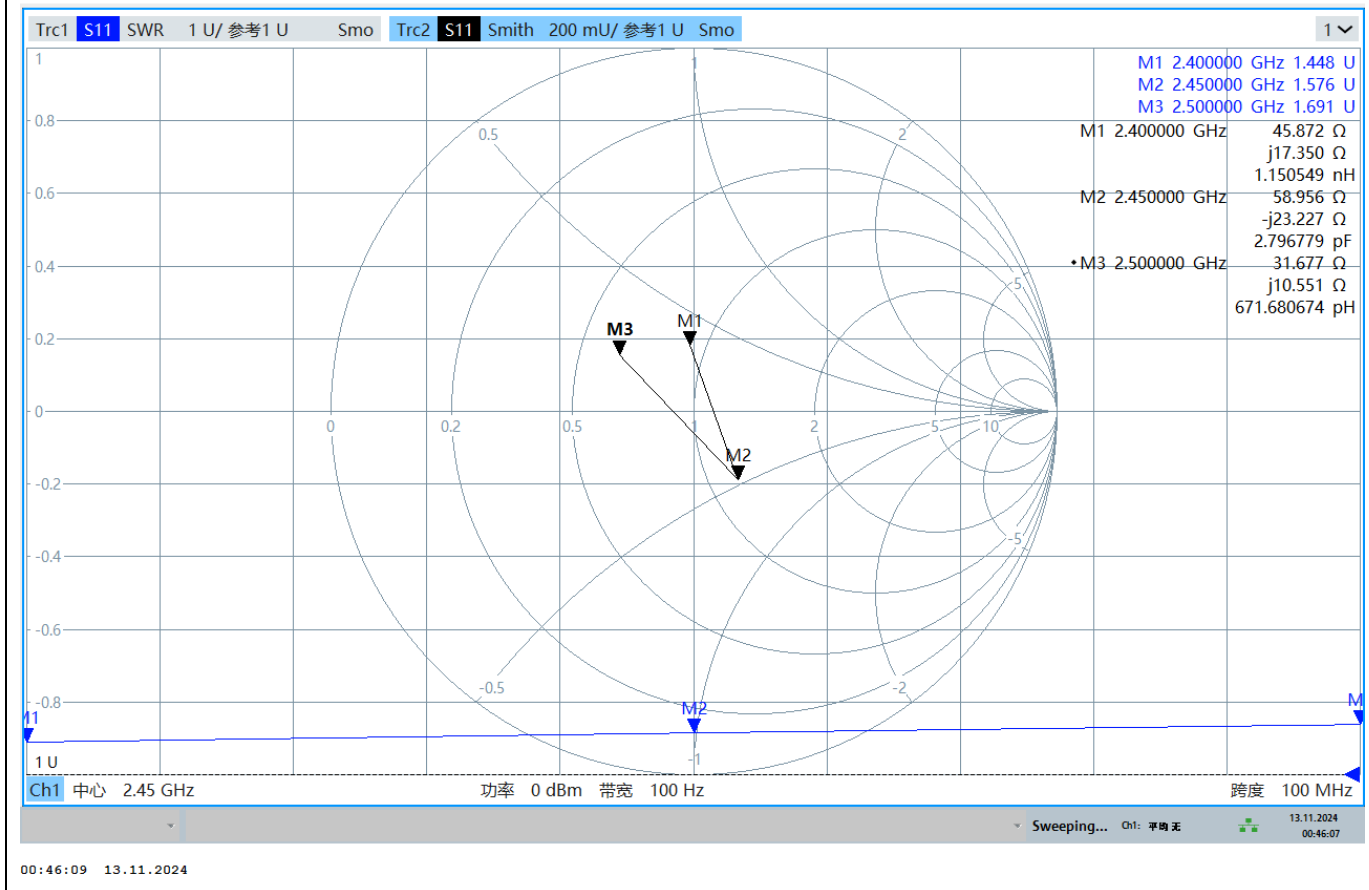

***** END OF THIS REPORT *****

TEST LAB OF WAC LIGHTING (DONGGUAN) CO.LTD

Address: No.390 Qingfeng Rd, Qingxi Town, Dongguan City, Guangdong, China 523653

Tel: +86-769-87311200

Fax: +86-769-87311250

Form No.: CR-TE-035/C