

		0.057	23.00	23.00		0.304	22.50	21.50	Right Cheek	0.057	0.241	0.298	0.147	0.172	0.094	0.119	0.051	0.445	0.417	0.521	0.443
		0.028	23.00	23.00		0.140	22.50	21.50	Right Tilt	0.028	0.111	0.139	0.152	0.206	0.111	0.092	0.036	0.291	0.231	0.381	0.286
DC_2A+n77A	Ant.4	0.171	24.50	18.50	Ant.8	0.107	22.50	21.50	Left Cheek	0.043	0.085	0.128	0.398	0.290	0.158	0.323	0.138	0.526	0.451	0.556	0.424
		0.073	24.50	18.50		0.050	22.50	21.50	Left Tilt	0.018	0.040	0.058	0.276	0.462	0.216	0.192	0.075	0.334	0.250	0.595	0.349
		0.661	24.50	18.50		0.304	22.50	21.50	Right Cheek	0.166	0.241	0.408	0.147	0.172	0.094	0.119	0.051	0.555	0.527	0.631	0.553
		0.172	24.50	18.50		0.140	22.50	21.50	Right Tilt	0.043	0.111	0.154	0.152	0.206	0.111	0.092	0.036	0.306	0.246	0.396	0.301
DC_2A+n77A	Ant.3	0.076	23.00	23.00	Ant.9	0.237	20.00	18.00	Left Cheek	0.076	0.150	0.226	0.398	0.290	0.158	0.323	0.138	0.624	0.549	0.654	0.522
		0.037	23.00	23.00		0.119	20.00	18.00	Left Tilt	0.037	0.075	0.112	0.276	0.462	0.216	0.192	0.075	0.388	0.304	0.649	0.403
		0.057	23.00	23.00		0.081	20.00	18.00	Right Cheek	0.057	0.051	0.108	0.147	0.172	0.094	0.119	0.051	0.255	0.227	0.331	0.253
		0.028	23.00	23.00		0.054	20.00	18.00	Right Tilt	0.028	0.034	0.062	0.152	0.206	0.111	0.092	0.036	0.214	0.154	0.304	0.209
DC_2A+n77A	Ant.4	0.171	24.50	18.50	Ant.9	0.237	20.00	18.00	Left Cheek	0.043	0.150	0.192	0.398	0.290	0.158	0.323	0.138	0.590	0.515	0.620	0.488
		0.073	24.50	18.50		0.119	20.00	18.00	Left Tilt	0.018	0.075	0.093	0.276	0.462	0.216	0.192	0.075	0.369	0.285	0.630	0.384
		0.661	24.50	18.50		0.081	20.00	18.00	Right Cheek	0.166	0.051	0.217	0.147	0.172	0.094	0.119	0.051	0.364	0.336	0.440	0.362
		0.172	24.50	18.50		0.054	20.00	18.00	Right Tilt	0.043	0.034	0.077	0.152	0.206	0.111	0.092	0.036	0.229	0.169	0.319	0.224
DC_2A+n78A	Ant.3	0.076	23.00	23.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.076	0.125	0.201	0.398	0.290	0.158	0.323	0.138	0.599	0.524	0.629	0.497
		0.037	23.00	23.00		0.186	16.00	14.50	Left Tilt	0.037	0.132	0.169	0.276	0.462	0.216	0.192	0.075	0.445	0.361	0.706	0.460
		0.057	23.00	23.00		0.551	16.00	14.50	Right Cheek	0.057	0.390	0.447	0.147	0.172	0.094	0.119	0.051	0.594	0.566	0.670	0.592
		0.028	23.00	23.00		0.539	16.00	14.50	Right Tilt	0.028	0.382	0.410	0.152	0.206	0.111	0.092	0.036	0.562	0.502	0.652	0.557
DC_2A+n78A	Ant.4	0.171	24.50	18.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.043	0.125	0.168	0.398	0.290	0.158	0.323	0.138	0.566	0.491	0.596	0.464
		0.073	24.50	18.50		0.186	16.00	14.50	Left Tilt	0.018	0.132	0.150	0.276	0.462	0.216	0.192	0.075	0.426	0.342	0.687	0.441
		0.661	24.50	18.50		0.551	16.00	14.50	Right Cheek	0.166	0.390	0.556	0.147	0.172	0.094	0.119	0.051	0.703	0.675	0.779	0.701
		0.172	24.50	18.50		0.539	16.00	14.50	Right Tilt	0.043	0.382	0.425	0.152	0.206	0.111	0.092	0.036	0.577	0.517	0.667	0.572
DC_2A+n78A	Ant.3	0.076	23.00	23.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.076	0.498	0.574	0.398	0.290	0.158	0.323	0.138	0.972	0.897	1.002	0.870
		0.037	23.00	23.00		0.758	14.00	12.50	Left Tilt	0.037	0.537	0.574	0.276	0.462	0.216	0.192	0.075	0.850	0.766	1.111	0.865
		0.057	23.00	23.00		0.358	14.00	12.50	Right Cheek	0.057	0.253	0.310	0.147	0.172	0.094	0.119	0.051	0.457	0.429	0.533	0.455
		0.028	23.00	23.00		0.477	14.00	12.50	Right Tilt	0.028	0.338	0.366	0.152	0.206	0.111	0.092	0.036	0.518	0.458	0.608	0.513
DC_2A+n78A	Ant.4	0.171	24.50	18.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.043	0.498	0.541	0.398	0.290	0.158	0.323	0.138	0.939	0.864	0.969	0.837
		0.073	24.50	18.50		0.758	14.00	12.50	Left Tilt	0.018	0.537	0.555	0.276	0.462	0.216	0.192	0.075	0.831	0.747	1.092	0.846
		0.661	24.50	18.50		0.358	14.00	12.50	Right Cheek	0.166	0.253	0.419	0.147	0.172	0.094	0.119	0.051	0.566	0.538	0.642	0.564
		0.172	24.50	18.50		0.477	14.00	12.50	Right Tilt	0.043	0.338	0.381	0.152	0.206	0.111	0.092	0.036	0.533	0.473	0.623	0.528
DC_2A+n78A	Ant.3	0.076	23.00	23.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.076	0.051	0.127	0.398	0.290	0.158	0.323	0.138	0.525	0.450	0.555	0.423
		0.037	23.00	23.00		0.035	21.50	21.00	Left Tilt	0.037	0.031	0.068	0.276	0.462	0.216	0.192	0.075	0.344	0.260	0.605	0.359
		0.057	23.00	23.00		0.170	21.50	21.00	Right Cheek	0.057	0.152	0.209	0.147	0.172	0.094	0.119	0.051	0.356	0.328	0.432	0.354
		0.028	23.00	23.00		0.075	21.50	21.00	Right Tilt	0.028	0.067	0.095	0.152	0.206	0.111	0.092	0.036	0.247	0.187	0.337	0.242
DC_2A+n78A	Ant.4	0.171	24.50	18.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.043	0.051	0.094	0.398	0.290	0.158	0.323	0.138	0.492	0.417	0.522	0.390
		0.073	24.50	18.50		0.035	21.50	21.00	Left Tilt	0.018	0.031	0.050	0.276	0.462	0.216	0.192	0.075	0.326	0.242	0.587	0.341
		0.661	24.50	18.50		0.170	21.50	21.00	Right Cheek	0.166	0.152	0.318	0.147	0.172	0.094	0.119	0.051	0.465	0.437	0.541	0.463
		0.172	24.50	18.50		0.075	21.50	21.00	Right Tilt	0.043	0.067	0.110	0.152	0.206	0.111	0.092	0.036	0.262	0.202	0.352	0.257
DC_2A+n78A	Ant.3	0.076	23.00	23.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.076	0.261	0.337	0.398	0.290	0.158	0.323	0.138	0.735	0.660	0.765	0.633
		0.037	23.00	23.00		0.127	16.00	16.00	Left Tilt	0.037	0.127	0.164	0.276	0.462	0.216	0.192	0.075	0.440	0.356	0.701	0.455
		0.057	23.00	23.00		0.079	16.00	16.00	Right Cheek	0.057	0.079	0.136	0.147	0.172	0.094	0.119	0.051	0.283	0.255	0.359	0.281
		0.028	23.00	23.00		0.060	16.00	16.00	Right Tilt	0.028	0.060	0.088	0.152	0.206	0.111	0.092	0.036	0.240	0.180	0.330	0.235
DC_2A+n78A	Ant.4	0.171	24.50	18.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.043	0.261	0.304	0.398	0.290	0.158	0.323	0.138	0.702	0.627	0.732	0.600

		0.073	24.50	18.50		0.127	16.00	16.00	Left Tilt	0.018	0.127	0.145	0.276	0.462	0.216	0.192	0.075	0.421	0.337	0.682	0.436
		0.661	24.50	18.50		0.079	16.00	16.00	Right Cheek	0.166	0.079	0.245	0.147	0.172	0.094	0.119	0.051	0.392	0.364	0.468	0.390
		0.172	24.50	18.50		0.060	16.00	16.00	Right Tilt	0.043	0.060	0.103	0.152	0.206	0.111	0.092	0.036	0.255	0.195	0.345	0.250
DC_4A+n78A	Ant.2	0.552	17.00	14.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.277	0.125	0.401	0.398	0.290	0.158	0.323	0.138	0.799	0.724	0.829	0.697
		0.635	17.00	14.00		0.186	16.00	14.50	Left Tilt	0.318	0.132	0.450	0.276	0.462	0.216	0.192	0.075	0.726	0.642	0.987	0.741
		0.943	17.00	14.00		0.551	16.00	14.50	Right Cheek	0.473	0.390	0.863	0.147	0.172	0.094	0.119	0.051	1.010	0.982	1.086	1.008
		0.765	17.00	14.00		0.539	16.00	14.50	Right Tilt	0.383	0.382	0.765	0.152	0.206	0.111	0.092	0.036	0.917	0.857	1.007	0.912
DC_4A+n78A	Ant.3	0.333	25.50	25.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.333	0.125	0.458	0.398	0.290	0.158	0.323	0.138	0.856	0.781	0.886	0.754
		0.083	25.50	25.50		0.186	16.00	14.50	Left Tilt	0.083	0.132	0.215	0.276	0.462	0.216	0.192	0.075	0.491	0.407	0.752	0.506
		0.264	25.50	25.50		0.551	16.00	14.50	Right Cheek	0.264	0.390	0.654	0.147	0.172	0.094	0.119	0.051	0.801	0.773	0.877	0.799
		0.066	25.50	25.50		0.539	16.00	14.50	Right Tilt	0.066	0.382	0.448	0.152	0.206	0.111	0.092	0.036	0.600	0.540	0.690	0.595
DC_4A+n78A	Ant.4	0.246	20.50	15.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.078	0.125	0.202	0.398	0.290	0.158	0.323	0.138	0.600	0.525	0.630	0.498
		0.116	20.50	15.50		0.186	16.00	14.50	Left Tilt	0.037	0.132	0.168	0.276	0.462	0.216	0.192	0.075	0.444	0.360	0.705	0.459
		0.946	20.50	15.50		0.551	16.00	14.50	Right Cheek	0.299	0.390	0.689	0.147	0.172	0.094	0.119	0.051	0.836	0.808	0.912	0.834
		0.283	20.50	15.50		0.539	16.00	14.50	Right Tilt	0.089	0.382	0.471	0.152	0.206	0.111	0.092	0.036	0.623	0.563	0.713	0.618
DC_4A+n78A	Ant.5	0.431	24.00	24.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.431	0.125	0.556	0.398	0.290	0.158	0.323	0.138	0.954	0.879	0.984	0.852
		0.100	24.00	24.00		0.186	16.00	14.50	Left Tilt	0.100	0.132	0.232	0.276	0.462	0.216	0.192	0.075	0.508	0.424	0.769	0.523
		0.216	24.00	24.00		0.551	16.00	14.50	Right Cheek	0.216	0.390	0.606	0.147	0.172	0.094	0.119	0.051	0.753	0.725	0.829	0.751
		0.043	24.00	24.00		0.539	16.00	14.50	Right Tilt	0.043	0.382	0.425	0.152	0.206	0.111	0.092	0.036	0.577	0.517	0.667	0.572
DC_4A+n78A	Ant.2	0.552	17.00	14.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.277	0.498	0.775	0.398	0.290	0.158	0.323	0.138	1.173	1.098	1.203	1.071
		0.635	17.00	14.00		0.758	14.00	12.50	Left Tilt	0.318	0.537	0.855	0.276	0.462	0.216	0.192	0.075	1.131	1.047	1.392	1.146
		0.943	17.00	14.00		0.358	14.00	12.50	Right Cheek	0.473	0.253	0.726	0.147	0.172	0.094	0.119	0.051	0.873	0.845	0.949	0.871
		0.765	17.00	14.00		0.477	14.00	12.50	Right Tilt	0.383	0.338	0.721	0.152	0.206	0.111	0.092	0.036	0.873	0.813	0.963	0.868
DC_4A+n78A	Ant.3	0.333	25.50	25.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.333	0.498	0.831	0.398	0.290	0.158	0.323	0.138	1.229	1.154	1.259	1.127
		0.083	25.50	25.50		0.758	14.00	12.50	Left Tilt	0.083	0.537	0.620	0.276	0.462	0.216	0.192	0.075	0.896	0.812	1.157	0.911
		0.264	25.50	25.50		0.358	14.00	12.50	Right Cheek	0.264	0.253	0.517	0.147	0.172	0.094	0.119	0.051	0.664	0.636	0.740	0.662
		0.066	25.50	25.50		0.477	14.00	12.50	Right Tilt	0.066	0.338	0.404	0.152	0.206	0.111	0.092	0.036	0.556	0.496	0.646	0.551
DC_4A+n78A	Ant.4	0.246	20.50	15.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.078	0.498	0.576	0.398	0.290	0.158	0.323	0.138	0.974	0.899	1.004	0.872
		0.116	20.50	15.50		0.758	14.00	12.50	Left Tilt	0.037	0.537	0.573	0.276	0.462	0.216	0.192	0.075	0.849	0.765	1.110	0.864
		0.946	20.50	15.50		0.358	14.00	12.50	Right Cheek	0.299	0.253	0.553	0.147	0.172	0.094	0.119	0.051	0.700	0.672	0.776	0.698
		0.283	20.50	15.50		0.477	14.00	12.50	Right Tilt	0.089	0.338	0.427	0.152	0.206	0.111	0.092	0.036	0.579	0.519	0.669	0.574
DC_4A+n78A	Ant.5	0.431	24.00	24.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.431	0.498	0.929	0.398	0.290	0.158	0.323	0.138	1.327	1.252	1.357	1.225
		0.100	24.00	24.00		0.758	14.00	12.50	Left Tilt	0.100	0.537	0.637	0.276	0.462	0.216	0.192	0.075	0.913	0.829	1.174	0.928
		0.216	24.00	24.00		0.358	14.00	12.50	Right Cheek	0.216	0.253	0.469	0.147	0.172	0.094	0.119	0.051	0.616	0.588	0.692	0.614
		0.043	24.00	24.00		0.477	14.00	12.50	Right Tilt	0.043	0.338	0.381	0.152	0.206	0.111	0.092	0.036	0.533	0.473	0.623	0.528
DC_4A+n78A	Ant.2	0.552	17.00	14.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.277	0.051	0.327	0.398	0.290	0.158	0.323	0.138	0.725	0.650	0.755	0.623
		0.635	17.00	14.00		0.035	21.50	21.00	Left Tilt	0.318	0.031	0.349	0.276	0.462	0.216	0.192	0.075	0.625	0.541	0.886	0.640
		0.943	17.00	14.00		0.170	21.50	21.00	Right Cheek	0.473	0.152	0.624	0.147	0.172	0.094	0.119	0.051	0.771	0.743	0.847	0.769
		0.765	17.00	14.00		0.075	21.50	21.00	Right Tilt	0.383	0.067	0.450	0.152	0.206	0.111	0.092	0.036	0.602	0.542	0.692	0.597
DC_4A+n78A	Ant.3	0.333	25.50	25.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.333	0.051	0.384	0.398	0.290	0.158	0.323	0.138	0.782	0.707	0.812	0.680
		0.083	25.50	25.50		0.035	21.50	21.00	Left Tilt	0.083	0.031	0.114	0.276	0.462	0.216	0.192	0.075	0.390	0.306	0.651	0.405
		0.264	25.50	25.50		0.170	21.50	21.00	Right Cheek	0.264	0.152	0.416	0.147	0.172	0.094	0.119	0.051	0.563	0.535	0.639	0.561
		0.066	25.50	25.50		0.075	21.50	21.00	Right Tilt	0.066	0.067	0.133	0.152	0.206	0.111	0.092	0.036	0.285	0.225	0.375	0.280

DC_4A+n78A	Ant.4	0.246	20.50	15.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.078	0.051	0.129	0.398	0.290	0.158	0.323	0.138	0.527	0.452	0.557	0.425
		0.116	20.50	15.50		0.035	21.50	21.00	Left Tilt	0.037	0.031	0.068	0.276	0.462	0.216	0.192	0.075	0.344	0.260	0.605	0.359
		0.946	20.50	15.50		0.170	21.50	21.00	Right Cheek	0.299	0.152	0.451	0.147	0.172	0.094	0.119	0.051	0.598	0.570	0.674	0.596
		0.283	20.50	15.50		0.075	21.50	21.00	Right Tilt	0.089	0.067	0.156	0.152	0.206	0.111	0.092	0.036	0.308	0.248	0.398	0.303
DC_4A+n78A	Ant.5	0.431	24.00	24.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.431	0.051	0.482	0.398	0.290	0.158	0.323	0.138	0.880	0.805	0.910	0.778
		0.100	24.00	24.00		0.035	21.50	21.00	Left Tilt	0.100	0.031	0.131	0.276	0.462	0.216	0.192	0.075	0.407	0.323	0.668	0.422
		0.216	24.00	24.00		0.170	21.50	21.00	Right Cheek	0.216	0.152	0.368	0.147	0.172	0.094	0.119	0.051	0.515	0.487	0.591	0.513
		0.043	24.00	24.00		0.075	21.50	21.00	Right Tilt	0.043	0.067	0.110	0.152	0.206	0.111	0.092	0.036	0.262	0.202	0.352	0.257
DC_4A+n78A	Ant.2	0.552	17.00	14.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.277	0.261	0.538	0.398	0.290	0.158	0.323	0.138	0.936	0.861	0.966	0.834
		0.635	17.00	14.00		0.127	16.00	16.00	Left Tilt	0.318	0.127	0.445	0.276	0.462	0.216	0.192	0.075	0.721	0.637	0.982	0.736
		0.943	17.00	14.00		0.079	16.00	16.00	Right Cheek	0.473	0.079	0.552	0.147	0.172	0.094	0.119	0.051	0.699	0.671	0.775	0.697
		0.765	17.00	14.00		0.060	16.00	16.00	Right Tilt	0.383	0.060	0.443	0.152	0.206	0.111	0.092	0.036	0.595	0.535	0.685	0.590
DC_4A+n78A	Ant.3	0.333	25.50	25.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.333	0.261	0.594	0.398	0.290	0.158	0.323	0.138	0.992	0.917	1.022	0.890
		0.083	25.50	25.50		0.127	16.00	16.00	Left Tilt	0.083	0.127	0.210	0.276	0.462	0.216	0.192	0.075	0.486	0.402	0.747	0.501
		0.264	25.50	25.50		0.079	16.00	16.00	Right Cheek	0.264	0.079	0.343	0.147	0.172	0.094	0.119	0.051	0.490	0.462	0.566	0.488
		0.066	25.50	25.50		0.060	16.00	16.00	Right Tilt	0.066	0.060	0.126	0.152	0.206	0.111	0.092	0.036	0.278	0.218	0.368	0.273
DC_4A+n78A	Ant.4	0.246	20.50	15.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.078	0.261	0.339	0.398	0.290	0.158	0.323	0.138	0.737	0.662	0.767	0.635
		0.116	20.50	15.50		0.127	16.00	16.00	Left Tilt	0.037	0.127	0.164	0.276	0.462	0.216	0.192	0.075	0.440	0.356	0.701	0.455
		0.946	20.50	15.50		0.079	16.00	16.00	Right Cheek	0.299	0.079	0.378	0.147	0.172	0.094	0.119	0.051	0.525	0.497	0.601	0.523
		0.283	20.50	15.50		0.060	16.00	16.00	Right Tilt	0.089	0.060	0.149	0.152	0.206	0.111	0.092	0.036	0.301	0.241	0.391	0.296
DC_4A+n78A	Ant.5	0.431	24.00	24.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.431	0.261	0.692	0.398	0.290	0.158	0.323	0.138	1.090	1.015	1.120	0.988
		0.100	24.00	24.00		0.127	16.00	16.00	Left Tilt	0.100	0.127	0.227	0.276	0.462	0.216	0.192	0.075	0.503	0.419	0.764	0.518
		0.216	24.00	24.00		0.079	16.00	16.00	Right Cheek	0.216	0.079	0.295	0.147	0.172	0.094	0.119	0.051	0.442	0.414	0.518	0.440
		0.043	24.00	24.00		0.060	16.00	16.00	Right Tilt	0.043	0.060	0.103	0.152	0.206	0.111	0.092	0.036	0.255	0.195	0.345	0.250
DC_5A+n78A	Ant.0	0.276	25.50	25.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.276	0.125	0.401	0.398	0.290	0.158	0.323	0.138	0.799	0.724	0.829	0.697
		0.162	25.50	25.50		0.186	16.00	14.50	Left Tilt	0.162	0.132	0.294	0.276	0.462	0.216	0.192	0.075	0.570	0.486	0.831	0.585
		0.212	25.50	25.50		0.551	16.00	14.50	Right Cheek	0.212	0.390	0.602	0.147	0.172	0.094	0.119	0.051	0.749	0.721	0.825	0.747
		0.128	25.50	25.50		0.539	16.00	14.50	Right Tilt	0.128	0.382	0.510	0.152	0.206	0.111	0.092	0.036	0.662	0.602	0.752	0.657
DC_5A+n78A	Ant.1	0.888	24.00	20.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.397	0.125	0.521	0.398	0.290	0.158	0.323	0.138	0.919	0.844	0.949	0.817
		0.085	24.00	20.50		0.186	16.00	14.50	Left Tilt	0.038	0.132	0.170	0.276	0.462	0.216	0.192	0.075	0.446	0.362	0.707	0.461
		0.454	24.00	20.50		0.551	16.00	14.50	Right Cheek	0.203	0.390	0.593	0.147	0.172	0.094	0.119	0.051	0.740	0.712	0.816	0.738
		0.076	24.00	20.50		0.539	16.00	14.50	Right Tilt	0.034	0.382	0.416	0.152	0.206	0.111	0.092	0.036	0.568	0.508	0.658	0.563
DC_5A+n78A	Ant.0	0.276	25.50	25.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.276	0.498	0.774	0.398	0.290	0.158	0.323	0.138	1.172	1.097	1.202	1.070
		0.162	25.50	25.50		0.758	14.00	12.50	Left Tilt	0.162	0.537	0.699	0.276	0.462	0.216	0.192	0.075	0.975	0.891	1.236	0.990
		0.212	25.50	25.50		0.358	14.00	12.50	Right Cheek	0.212	0.253	0.465	0.147	0.172	0.094	0.119	0.051	0.612	0.584	0.688	0.610
		0.128	25.50	25.50		0.477	14.00	12.50	Right Tilt	0.128	0.338	0.466	0.152	0.206	0.111	0.092	0.036	0.618	0.558	0.708	0.613
DC_5A+n78A	Ant.1	0.888	24.00	20.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.397	0.498	0.895	0.398	0.290	0.158	0.323	0.138	1.293	1.218	1.323	1.191
		0.085	24.00	20.50		0.758	14.00	12.50	Left Tilt	0.038	0.537	0.575	0.276	0.462	0.216	0.192	0.075	0.851	0.767	1.112	0.866
		0.454	24.00	20.50		0.358	14.00	12.50	Right Cheek	0.203	0.253	0.456	0.147	0.172	0.094	0.119	0.051	0.603	0.575	0.679	0.601
		0.076	24.00	20.50		0.477	14.00	12.50	Right Tilt	0.034	0.338	0.372	0.152	0.206	0.111	0.092	0.036	0.524	0.464	0.614	0.519
DC_5A+n78A	Ant.0	0.276	25.50	25.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.276	0.051	0.327	0.398	0.290	0.158	0.323	0.138	0.725	0.650	0.755	0.623
		0.162	25.50	25.50		0.035	21.50	21.00	Left Tilt	0.162	0.031	0.193	0.276	0.462	0.216	0.192	0.075	0.469	0.385	0.730	0.484
		0.212	25.50	25.50		0.170	21.50	21.00	Right Cheek	0.212	0.152	0.364	0.147	0.172	0.094	0.119	0.051	0.511	0.483	0.587	0.509

		0.128	25.50	25.50		0.075	21.50	21.00	Right Tilt	0.128	0.067	0.195	0.152	0.206	0.111	0.092	0.036	0.347	0.287	0.437	0.342
DC_5A+n78A	Ant.1	0.888	24.00	20.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.397	0.051	0.447	0.398	0.290	0.158	0.323	0.138	0.845	0.770	0.875	0.743
		0.085	24.00	20.50		0.035	21.50	21.00	Left Tilt	0.038	0.031	0.069	0.276	0.462	0.216	0.192	0.075	0.345	0.261	0.606	0.360
		0.454	24.00	20.50		0.170	21.50	21.00	Right Cheek	0.203	0.152	0.354	0.147	0.172	0.094	0.119	0.051	0.501	0.473	0.577	0.499
		0.076	24.00	20.50		0.075	21.50	21.00	Right Tilt	0.034	0.067	0.101	0.152	0.206	0.111	0.092	0.036	0.253	0.193	0.343	0.248
DC_5A+n78A	Ant.0	0.276	25.50	25.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.276	0.261	0.537	0.398	0.290	0.158	0.323	0.138	0.935	0.860	0.965	0.833
		0.162	25.50	25.50		0.127	16.00	16.00	Left Tilt	0.162	0.127	0.289	0.276	0.462	0.216	0.192	0.075	0.565	0.481	0.826	0.580
		0.212	25.50	25.50		0.079	16.00	16.00	Right Cheek	0.212	0.079	0.291	0.147	0.172	0.094	0.119	0.051	0.438	0.410	0.514	0.436
		0.128	25.50	25.50		0.060	16.00	16.00	Right Tilt	0.128	0.060	0.188	0.152	0.206	0.111	0.092	0.036	0.340	0.280	0.430	0.335
DC_5A+n78A	Ant.1	0.888	24.00	20.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.397	0.261	0.658	0.398	0.290	0.158	0.323	0.138	1.056	0.981	1.086	0.954
		0.085	24.00	20.50		0.127	16.00	16.00	Left Tilt	0.038	0.127	0.165	0.276	0.462	0.216	0.192	0.075	0.441	0.357	0.702	0.456
		0.454	24.00	20.50		0.079	16.00	16.00	Right Cheek	0.203	0.079	0.282	0.147	0.172	0.094	0.119	0.051	0.429	0.401	0.505	0.427
		0.076	24.00	20.50		0.060	16.00	16.00	Right Tilt	0.034	0.060	0.094	0.152	0.206	0.111	0.092	0.036	0.246	0.186	0.336	0.241
DC_7A+n78A	Ant.2	0.477	17.00	14.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.268	0.125	0.393	0.398	0.290	0.158	0.323	0.138	0.791	0.716	0.821	0.689
		0.455	17.00	14.50		0.186	16.00	14.50	Left Tilt	0.256	0.132	0.388	0.276	0.462	0.216	0.192	0.075	0.664	0.580	0.925	0.679
		1.077	17.00	14.50		0.551	16.00	14.50	Right Cheek	0.606	0.390	0.996	0.147	0.172	0.094	0.119	0.051	1.143	1.115	1.219	1.141
		0.794	17.00	14.50		0.539	16.00	14.50	Right Tilt	0.446	0.382	0.828	0.152	0.206	0.111	0.092	0.036	0.980	0.920	1.070	0.975
DC_7A+n78A	Ant.3	0.248	25.00	25.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.248	0.125	0.373	0.398	0.290	0.158	0.323	0.138	0.771	0.696	0.801	0.669
		0.148	25.00	25.00		0.186	16.00	14.50	Left Tilt	0.148	0.132	0.280	0.276	0.462	0.216	0.192	0.075	0.556	0.472	0.817	0.571
		0.211	25.00	25.00		0.551	16.00	14.50	Right Cheek	0.211	0.390	0.601	0.147	0.172	0.094	0.119	0.051	0.748	0.720	0.824	0.746
		0.123	25.00	25.00		0.539	16.00	14.50	Right Tilt	0.123	0.382	0.505	0.152	0.206	0.111	0.092	0.036	0.657	0.597	0.747	0.652
DC_7A+n78A	Ant.4	0.250	17.00	14.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.125	0.125	0.250	0.398	0.290	0.158	0.323	0.138	0.648	0.573	0.678	0.546
		0.175	17.00	14.00		0.186	16.00	14.50	Left Tilt	0.088	0.132	0.219	0.276	0.462	0.216	0.192	0.075	0.495	0.411	0.756	0.510
		0.798	17.00	14.00		0.551	16.00	14.50	Right Cheek	0.400	0.390	0.790	0.147	0.172	0.094	0.119	0.051	0.937	0.909	1.013	0.935
		0.369	17.00	14.00		0.539	16.00	14.50	Right Tilt	0.185	0.382	0.567	0.152	0.206	0.111	0.092	0.036	0.719	0.659	0.809	0.714
DC_7A+n78A	Ant.5	0.795	21.00	18.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.398	0.125	0.523	0.398	0.290	0.158	0.323	0.138	0.921	0.846	0.951	0.819
		0.310	21.00	18.00		0.186	16.00	14.50	Left Tilt	0.155	0.132	0.287	0.276	0.462	0.216	0.192	0.075	0.563	0.479	0.824	0.578
		0.669	21.00	18.00		0.551	16.00	14.50	Right Cheek	0.335	0.390	0.725	0.147	0.172	0.094	0.119	0.051	0.872	0.844	0.948	0.870
		0.151	21.00	18.00		0.539	16.00	14.50	Right Tilt	0.076	0.382	0.457	0.152	0.206	0.111	0.092	0.036	0.609	0.549	0.699	0.604
DC_7A+n78A	Ant.2	0.477	17.00	14.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.268	0.498	0.767	0.398	0.290	0.158	0.323	0.138	1.165	1.090	1.195	1.063
		0.455	17.00	14.50		0.758	14.00	12.50	Left Tilt	0.256	0.537	0.792	0.276	0.462	0.216	0.192	0.075	1.068	0.984	1.329	1.083
		1.077	17.00	14.50		0.358	14.00	12.50	Right Cheek	0.606	0.253	0.859	0.147	0.172	0.094	0.119	0.051	1.006	0.978	1.082	1.004
		0.794	17.00	14.50		0.477	14.00	12.50	Right Tilt	0.446	0.338	0.784	0.152	0.206	0.111	0.092	0.036	0.936	0.876	1.026	0.931
DC_7A+n78A	Ant.3	0.248	25.00	25.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.248	0.498	0.746	0.398	0.290	0.158	0.323	0.138	1.144	1.069	1.174	1.042
		0.148	25.00	25.00		0.758	14.00	12.50	Left Tilt	0.148	0.537	0.685	0.276	0.462	0.216	0.192	0.075	0.961	0.877	1.222	0.976
		0.211	25.00	25.00		0.358	14.00	12.50	Right Cheek	0.211	0.253	0.464	0.147	0.172	0.094	0.119	0.051	0.611	0.583	0.687	0.609
		0.123	25.00	25.00		0.477	14.00	12.50	Right Tilt	0.123	0.338	0.461	0.152	0.206	0.111	0.092	0.036	0.613	0.553	0.703	0.608
DC_7A+n78A	Ant.4	0.250	17.00	14.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.125	0.498	0.624	0.398	0.290	0.158	0.323	0.138	1.022	0.947	1.052	0.920
		0.175	17.00	14.00		0.758	14.00	12.50	Left Tilt	0.088	0.537	0.624	0.276	0.462	0.216	0.192	0.075	0.900	0.816	1.161	0.915
		0.798	17.00	14.00		0.358	14.00	12.50	Right Cheek	0.400	0.253	0.653	0.147	0.172	0.094	0.119	0.051	0.800	0.772	0.876	0.798
		0.369	17.00	14.00		0.477	14.00	12.50	Right Tilt	0.185	0.338	0.523	0.152	0.206	0.111	0.092	0.036	0.675	0.615	0.765	0.670
DC_7A+n78A	Ant.5	0.795	21.00	18.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.398	0.498	0.897	0.398	0.290	0.158	0.323	0.138	1.295	1.220	1.325	1.193
		0.310	21.00	18.00		0.758	14.00	12.50	Left Tilt	0.155	0.537	0.692	0.276	0.462	0.216	0.192	0.075	0.968	0.884	1.229	0.983

		0.669	21.00	18.00		0.358	14.00	12.50	Right Cheek	0.335	0.253	0.589	0.147	0.172	0.094	0.119	0.051	0.736	0.708	0.812	0.734
		0.151	21.00	18.00		0.477	14.00	12.50	Right Tilt	0.076	0.338	0.413	0.152	0.206	0.111	0.092	0.036	0.565	0.505	0.655	0.560
DC_7A+n78A	Ant.2	0.477	17.00	14.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.268	0.051	0.319	0.398	0.290	0.158	0.323	0.138	0.717	0.642	0.747	0.615
		0.455	17.00	14.50		0.035	21.50	21.00	Left Tilt	0.256	0.031	0.287	0.276	0.462	0.216	0.192	0.075	0.563	0.479	0.824	0.578
		1.077	17.00	14.50		0.170	21.50	21.00	Right Cheek	0.606	0.152	0.757	0.147	0.172	0.094	0.119	0.051	0.904	0.876	0.980	0.902
		0.794	17.00	14.50		0.075	21.50	21.00	Right Tilt	0.446	0.067	0.513	0.152	0.206	0.111	0.092	0.036	0.665	0.605	0.755	0.660
DC_7A+n78A	Ant.3	0.248	25.00	25.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.248	0.051	0.299	0.398	0.290	0.158	0.323	0.138	0.697	0.622	0.727	0.595
		0.148	25.00	25.00		0.035	21.50	21.00	Left Tilt	0.148	0.031	0.179	0.276	0.462	0.216	0.192	0.075	0.455	0.371	0.716	0.470
		0.211	25.00	25.00		0.170	21.50	21.00	Right Cheek	0.211	0.152	0.363	0.147	0.172	0.094	0.119	0.051	0.510	0.482	0.586	0.508
		0.123	25.00	25.00		0.075	21.50	21.00	Right Tilt	0.123	0.067	0.190	0.152	0.206	0.111	0.092	0.036	0.342	0.282	0.432	0.337
DC_7A+n78A	Ant.4	0.250	17.00	14.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.125	0.051	0.176	0.398	0.290	0.158	0.323	0.138	0.574	0.499	0.604	0.472
		0.175	17.00	14.00		0.035	21.50	21.00	Left Tilt	0.088	0.031	0.119	0.276	0.462	0.216	0.192	0.075	0.395	0.311	0.656	0.410
		0.798	17.00	14.00		0.170	21.50	21.00	Right Cheek	0.400	0.152	0.551	0.147	0.172	0.094	0.119	0.051	0.698	0.670	0.774	0.696
		0.369	17.00	14.00		0.075	21.50	21.00	Right Tilt	0.185	0.067	0.252	0.152	0.206	0.111	0.092	0.036	0.404	0.344	0.494	0.399
DC_7A+n78A	Ant.5	0.795	21.00	18.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.398	0.051	0.449	0.398	0.290	0.158	0.323	0.138	0.847	0.772	0.877	0.745
		0.310	21.00	18.00		0.035	21.50	21.00	Left Tilt	0.155	0.031	0.187	0.276	0.462	0.216	0.192	0.075	0.463	0.379	0.724	0.478
		0.669	21.00	18.00		0.170	21.50	21.00	Right Cheek	0.335	0.152	0.487	0.147	0.172	0.094	0.119	0.051	0.634	0.606	0.710	0.632
		0.151	21.00	18.00		0.075	21.50	21.00	Right Tilt	0.076	0.067	0.143	0.152	0.206	0.111	0.092	0.036	0.295	0.235	0.385	0.290
DC_7A+n78A	Ant.2	0.477	17.00	14.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.268	0.261	0.529	0.398	0.290	0.158	0.323	0.138	0.927	0.852	0.957	0.825
		0.455	17.00	14.50		0.127	16.00	16.00	Left Tilt	0.256	0.127	0.383	0.276	0.462	0.216	0.192	0.075	0.659	0.575	0.920	0.674
		1.077	17.00	14.50		0.079	16.00	16.00	Right Cheek	0.606	0.079	0.685	0.147	0.172	0.094	0.119	0.051	0.832	0.804	0.908	0.830
		0.794	17.00	14.50		0.060	16.00	16.00	Right Tilt	0.446	0.060	0.506	0.152	0.206	0.111	0.092	0.036	0.658	0.598	0.748	0.653
DC_7A+n78A	Ant.3	0.248	25.00	25.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.248	0.261	0.509	0.398	0.290	0.158	0.323	0.138	0.907	0.832	0.937	0.805
		0.148	25.00	25.00		0.127	16.00	16.00	Left Tilt	0.148	0.127	0.275	0.276	0.462	0.216	0.192	0.075	0.551	0.467	0.812	0.566
		0.211	25.00	25.00		0.079	16.00	16.00	Right Cheek	0.211	0.079	0.290	0.147	0.172	0.094	0.119	0.051	0.437	0.409	0.513	0.435
		0.123	25.00	25.00		0.060	16.00	16.00	Right Tilt	0.123	0.060	0.183	0.152	0.206	0.111	0.092	0.036	0.335	0.275	0.425	0.330
DC_7A+n78A	Ant.4	0.250	17.00	14.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.125	0.261	0.386	0.398	0.290	0.158	0.323	0.138	0.784	0.709	0.814	0.682
		0.175	17.00	14.00		0.127	16.00	16.00	Left Tilt	0.088	0.127	0.215	0.276	0.462	0.216	0.192	0.075	0.491	0.407	0.752	0.506
		0.798	17.00	14.00		0.079	16.00	16.00	Right Cheek	0.400	0.079	0.479	0.147	0.172	0.094	0.119	0.051	0.626	0.598	0.702	0.624
		0.369	17.00	14.00		0.060	16.00	16.00	Right Tilt	0.185	0.060	0.245	0.152	0.206	0.111	0.092	0.036	0.397	0.337	0.487	0.392
DC_7A+n78A	Ant.5	0.795	21.00	18.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.398	0.261	0.659	0.398	0.290	0.158	0.323	0.138	1.057	0.982	1.087	0.955
		0.310	21.00	18.00		0.127	16.00	16.00	Left Tilt	0.155	0.127	0.282	0.276	0.462	0.216	0.192	0.075	0.558	0.474	0.819	0.573
		0.669	21.00	18.00		0.079	16.00	16.00	Right Cheek	0.335	0.079	0.414	0.147	0.172	0.094	0.119	0.051	0.561	0.533	0.637	0.559
		0.151	21.00	18.00		0.060	16.00	16.00	Right Tilt	0.076	0.060	0.136	0.152	0.206	0.111	0.092	0.036	0.288	0.228	0.378	0.283
DC_26A+n78A	Ant.0	0.259	25.50	25.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.259	0.125	0.384	0.398	0.290	0.158	0.323	0.138	0.782	0.707	0.812	0.680
		0.154	25.50	25.50		0.186	16.00	14.50	Left Tilt	0.154	0.132	0.286	0.276	0.462	0.216	0.192	0.075	0.562	0.478	0.823	0.577
		0.199	25.50	25.50		0.551	16.00	14.50	Right Cheek	0.199	0.390	0.589	0.147	0.172	0.094	0.119	0.051	0.736	0.708	0.812	0.734
		0.122	25.50	25.50		0.539	16.00	14.50	Right Tilt	0.122	0.382	0.504	0.152	0.206	0.111	0.092	0.036	0.656	0.596	0.746	0.651
DC_26A+n78A	Ant.1	1.075	25.00	20.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.381	0.125	0.506	0.398	0.290	0.158	0.323	0.138	0.904	0.829	0.934	0.802
		0.125	25.00	20.50		0.186	16.00	14.50	Left Tilt	0.044	0.132	0.176	0.276	0.462	0.216	0.192	0.075	0.452	0.368	0.713	0.467
		0.603	25.00	20.50		0.551	16.00	14.50	Right Cheek	0.214	0.390	0.604	0.147	0.172	0.094	0.119	0.051	0.751	0.723	0.827	0.749
		0.105	25.00	20.50		0.539	16.00	14.50	Right Tilt	0.037	0.382	0.419	0.152	0.206	0.111	0.092	0.036	0.571	0.511	0.661	0.566
DC_26A+n78A	Ant.0	0.259	25.50	25.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.259	0.498	0.757	0.398	0.290	0.158	0.323	0.138	1.155	1.080	1.185	1.053

		0.154	25.50	25.50		0.758	14.00	12.50	Left Tilt	0.154	0.537	0.691	0.276	0.462	0.216	0.192	0.075	0.967	0.883	1.228	0.982
		0.199	25.50	25.50		0.358	14.00	12.50	Right Cheek	0.199	0.253	0.452	0.147	0.172	0.094	0.119	0.051	0.599	0.571	0.675	0.597
		0.122	25.50	25.50		0.477	14.00	12.50	Right Tilt	0.122	0.338	0.460	0.152	0.206	0.111	0.092	0.036	0.612	0.552	0.702	0.607
DC_26A+n78A	Ant.1	1.075	25.00	20.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.381	0.498	0.880	0.398	0.290	0.158	0.323	0.138	1.278	1.203	1.308	1.176
		0.125	25.00	20.50		0.758	14.00	12.50	Left Tilt	0.044	0.537	0.581	0.276	0.462	0.216	0.192	0.075	0.857	0.773	1.118	0.872
		0.603	25.00	20.50		0.358	14.00	12.50	Right Cheek	0.214	0.253	0.467	0.147	0.172	0.094	0.119	0.051	0.614	0.586	0.690	0.612
		0.105	25.00	20.50		0.477	14.00	12.50	Right Tilt	0.037	0.338	0.375	0.152	0.206	0.111	0.092	0.036	0.527	0.467	0.617	0.522
DC_26A+n78A	Ant.0	0.259	25.50	25.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.259	0.051	0.310	0.398	0.290	0.158	0.323	0.138	0.708	0.633	0.738	0.606
		0.154	25.50	25.50		0.035	21.50	21.00	Left Tilt	0.154	0.031	0.185	0.276	0.462	0.216	0.192	0.075	0.461	0.377	0.722	0.476
		0.199	25.50	25.50		0.170	21.50	21.00	Right Cheek	0.199	0.152	0.351	0.147	0.172	0.094	0.119	0.051	0.498	0.470	0.574	0.496
		0.122	25.50	25.50		0.075	21.50	21.00	Right Tilt	0.122	0.067	0.189	0.152	0.206	0.111	0.092	0.036	0.341	0.281	0.431	0.336
DC_26A+n78A	Ant.1	1.075	25.00	20.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.381	0.051	0.432	0.398	0.290	0.158	0.323	0.138	0.830	0.755	0.860	0.728
		0.125	25.00	20.50		0.035	21.50	21.00	Left Tilt	0.044	0.031	0.076	0.276	0.462	0.216	0.192	0.075	0.352	0.268	0.613	0.367
		0.603	25.00	20.50		0.170	21.50	21.00	Right Cheek	0.214	0.152	0.365	0.147	0.172	0.094	0.119	0.051	0.512	0.484	0.588	0.510
		0.105	25.00	20.50		0.075	21.50	21.00	Right Tilt	0.037	0.067	0.104	0.152	0.206	0.111	0.092	0.036	0.256	0.196	0.346	0.251
DC_26A+n78A	Ant.0	0.259	25.50	25.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.259	0.261	0.520	0.398	0.290	0.158	0.323	0.138	0.918	0.843	0.948	0.816
		0.154	25.50	25.50		0.127	16.00	16.00	Left Tilt	0.154	0.127	0.281	0.276	0.462	0.216	0.192	0.075	0.557	0.473	0.818	0.572
		0.199	25.50	25.50		0.079	16.00	16.00	Right Cheek	0.199	0.079	0.278	0.147	0.172	0.094	0.119	0.051	0.425	0.397	0.501	0.423
		0.122	25.50	25.50		0.060	16.00	16.00	Right Tilt	0.122	0.060	0.182	0.152	0.206	0.111	0.092	0.036	0.334	0.274	0.424	0.329
DC_26A+n78A	Ant.1	1.075	25.00	20.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.381	0.261	0.642	0.398	0.290	0.158	0.323	0.138	1.040	0.965	1.070	0.938
		0.125	25.00	20.50		0.127	16.00	16.00	Left Tilt	0.044	0.127	0.171	0.276	0.462	0.216	0.192	0.075	0.447	0.363	0.708	0.462
		0.603	25.00	20.50		0.079	16.00	16.00	Right Cheek	0.214	0.079	0.293	0.147	0.172	0.094	0.119	0.051	0.440	0.412	0.516	0.438
		0.105	25.00	20.50		0.060	16.00	16.00	Right Tilt	0.037	0.060	0.097	0.152	0.206	0.111	0.092	0.036	0.249	0.189	0.339	0.244
DC_66A+n78A	Ant.2	0.518	17.50	14.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.231	0.125	0.356	0.398	0.290	0.158	0.323	0.138	0.754	0.679	0.784	0.652
		0.581	17.50	14.00		0.186	16.00	14.50	Left Tilt	0.260	0.132	0.391	0.276	0.462	0.216	0.192	0.075	0.667	0.583	0.928	0.682
		0.872	17.50	14.00		0.551	16.00	14.50	Right Cheek	0.390	0.390	0.780	0.147	0.172	0.094	0.119	0.051	0.927	0.899	1.003	0.925
		0.719	17.50	14.00		0.539	16.00	14.50	Right Tilt	0.321	0.382	0.703	0.152	0.206	0.111	0.092	0.036	0.855	0.795	0.945	0.850
DC_66A+n78A	Ant.3	0.329	25.50	25.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.329	0.125	0.454	0.398	0.290	0.158	0.323	0.138	0.852	0.777	0.882	0.750
		0.111	25.50	25.50		0.186	16.00	14.50	Left Tilt	0.111	0.132	0.243	0.276	0.462	0.216	0.192	0.075	0.519	0.435	0.780	0.534
		0.260	25.50	25.50		0.551	16.00	14.50	Right Cheek	0.260	0.390	0.650	0.147	0.172	0.094	0.119	0.051	0.797	0.769	0.873	0.795
		0.088	25.50	25.50		0.539	16.00	14.50	Right Tilt	0.088	0.382	0.470	0.152	0.206	0.111	0.092	0.036	0.622	0.562	0.712	0.617
DC_66A+n78A	Ant.4	0.304	20.00	15.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.108	0.125	0.232	0.398	0.290	0.158	0.323	0.138	0.630	0.555	0.660	0.528
		0.140	20.00	15.50		0.186	16.00	14.50	Left Tilt	0.050	0.132	0.181	0.276	0.462	0.216	0.192	0.075	0.457	0.373	0.718	0.472
		0.999	20.00	15.50		0.551	16.00	14.50	Right Cheek	0.354	0.390	0.745	0.147	0.172	0.094	0.119	0.051	0.892	0.864	0.968	0.890
		0.347	20.00	15.50		0.539	16.00	14.50	Right Tilt	0.123	0.382	0.505	0.152	0.206	0.111	0.092	0.036	0.657	0.597	0.747	0.652
DC_66A+n78A	Ant.5	0.440	24.00	24.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.440	0.125	0.565	0.398	0.290	0.158	0.323	0.138	0.963	0.888	0.993	0.861
		0.103	24.00	24.00		0.186	16.00	14.50	Left Tilt	0.103	0.132	0.235	0.276	0.462	0.216	0.192	0.075	0.511	0.427	0.772	0.526
		0.221	24.00	24.00		0.551	16.00	14.50	Right Cheek	0.221	0.390	0.611	0.147	0.172	0.094	0.119	0.051	0.758	0.730	0.834	0.756
		0.045	24.00	24.00		0.539	16.00	14.50	Right Tilt	0.045	0.382	0.427	0.152	0.206	0.111	0.092	0.036	0.579	0.519	0.669	0.574
DC_66A+n78A	Ant.2	0.518	17.50	14.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.231	0.498	0.730	0.398	0.290	0.158	0.323	0.138	1.128	1.053	1.158	1.026
		0.581	17.50	14.00		0.758	14.00	12.50	Left Tilt	0.260	0.537	0.796	0.276	0.462	0.216	0.192	0.075	1.072	0.988	1.333	1.087
		0.872	17.50	14.00		0.358	14.00	12.50	Right Cheek	0.390	0.253	0.643	0.147	0.172	0.094	0.119	0.051	0.790	0.762	0.866	0.788
		0.719	17.50	14.00		0.477	14.00	12.50	Right Tilt	0.321	0.338	0.659	0.152	0.206	0.111	0.092	0.036	0.811	0.751	0.901	0.806

DC_66A+n78A	Ant.3	0.329	25.50	25.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.329	0.498	0.827	0.398	0.290	0.158	0.323	0.138	1.225	1.150	1.255	1.123
		0.111	25.50	25.50		0.758	14.00	12.50	Left Tilt	0.111	0.537	0.648	0.276	0.462	0.216	0.192	0.075	0.924	0.840	1.185	0.939
		0.260	25.50	25.50		0.358	14.00	12.50	Right Cheek	0.260	0.253	0.513	0.147	0.172	0.094	0.119	0.051	0.660	0.632	0.736	0.658
		0.088	25.50	25.50		0.477	14.00	12.50	Right Tilt	0.088	0.338	0.426	0.152	0.206	0.111	0.092	0.036	0.578	0.518	0.668	0.573
DC_66A+n78A	Ant.4	0.304	20.00	15.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.108	0.498	0.606	0.398	0.290	0.158	0.323	0.138	1.004	0.929	1.034	0.902
		0.140	20.00	15.50		0.758	14.00	12.50	Left Tilt	0.050	0.537	0.586	0.276	0.462	0.216	0.192	0.075	0.862	0.778	1.123	0.877
		0.999	20.00	15.50		0.358	14.00	12.50	Right Cheek	0.354	0.253	0.608	0.147	0.172	0.094	0.119	0.051	0.755	0.727	0.831	0.753
		0.347	20.00	15.50		0.477	14.00	12.50	Right Tilt	0.123	0.338	0.461	0.152	0.206	0.111	0.092	0.036	0.613	0.553	0.703	0.608
DC_66A+n78A	Ant.5	0.440	24.00	24.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.440	0.498	0.938	0.398	0.290	0.158	0.323	0.138	1.336	1.261	1.366	1.234
		0.103	24.00	24.00		0.758	14.00	12.50	Left Tilt	0.103	0.537	0.640	0.276	0.462	0.216	0.192	0.075	0.916	0.832	1.177	0.931
		0.221	24.00	24.00		0.358	14.00	12.50	Right Cheek	0.221	0.253	0.474	0.147	0.172	0.094	0.119	0.051	0.621	0.593	0.697	0.619
		0.045	24.00	24.00		0.477	14.00	12.50	Right Tilt	0.045	0.338	0.383	0.152	0.206	0.111	0.092	0.036	0.535	0.475	0.625	0.530
DC_66A+n78A	Ant.2	0.518	17.50	14.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.231	0.051	0.282	0.398	0.290	0.158	0.323	0.138	0.680	0.605	0.710	0.578
		0.581	17.50	14.00		0.035	21.50	21.00	Left Tilt	0.260	0.031	0.291	0.276	0.462	0.216	0.192	0.075	0.567	0.483	0.828	0.582
		0.872	17.50	14.00		0.170	21.50	21.00	Right Cheek	0.390	0.152	0.541	0.147	0.172	0.094	0.119	0.051	0.688	0.660	0.764	0.686
		0.719	17.50	14.00		0.075	21.50	21.00	Right Tilt	0.321	0.067	0.388	0.152	0.206	0.111	0.092	0.036	0.540	0.480	0.630	0.535
DC_66A+n78A	Ant.3	0.329	25.50	25.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.329	0.051	0.380	0.398	0.290	0.158	0.323	0.138	0.778	0.703	0.808	0.676
		0.111	25.50	25.50		0.035	21.50	21.00	Left Tilt	0.111	0.031	0.142	0.276	0.462	0.216	0.192	0.075	0.418	0.334	0.679	0.433
		0.260	25.50	25.50		0.170	21.50	21.00	Right Cheek	0.260	0.152	0.412	0.147	0.172	0.094	0.119	0.051	0.559	0.531	0.635	0.557
		0.088	25.50	25.50		0.075	21.50	21.00	Right Tilt	0.088	0.067	0.155	0.152	0.206	0.111	0.092	0.036	0.307	0.247	0.397	0.302
DC_66A+n78A	Ant.4	0.304	20.00	15.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.108	0.051	0.159	0.398	0.290	0.158	0.323	0.138	0.557	0.482	0.587	0.455
		0.140	20.00	15.50		0.035	21.50	21.00	Left Tilt	0.050	0.031	0.081	0.276	0.462	0.216	0.192	0.075	0.357	0.273	0.618	0.372
		0.999	20.00	15.50		0.170	21.50	21.00	Right Cheek	0.354	0.152	0.506	0.147	0.172	0.094	0.119	0.051	0.653	0.625	0.729	0.651
		0.347	20.00	15.50		0.075	21.50	21.00	Right Tilt	0.123	0.067	0.190	0.152	0.206	0.111	0.092	0.036	0.342	0.282	0.432	0.337
DC_66A+n78A	Ant.5	0.440	24.00	24.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.440	0.051	0.491	0.398	0.290	0.158	0.323	0.138	0.889	0.814	0.919	0.787
		0.103	24.00	24.00		0.035	21.50	21.00	Left Tilt	0.103	0.031	0.134	0.276	0.462	0.216	0.192	0.075	0.410	0.326	0.671	0.425
		0.221	24.00	24.00		0.170	21.50	21.00	Right Cheek	0.221	0.152	0.373	0.147	0.172	0.094	0.119	0.051	0.520	0.492	0.596	0.518
		0.045	24.00	24.00		0.075	21.50	21.00	Right Tilt	0.045	0.067	0.112	0.152	0.206	0.111	0.092	0.036	0.264	0.204	0.354	0.259
DC_66A+n78A	Ant.2	0.518	17.50	14.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.231	0.261	0.492	0.398	0.290	0.158	0.323	0.138	0.890	0.815	0.920	0.788
		0.581	17.50	14.00		0.127	16.00	16.00	Left Tilt	0.260	0.127	0.387	0.276	0.462	0.216	0.192	0.075	0.663	0.579	0.924	0.678
		0.872	17.50	14.00		0.079	16.00	16.00	Right Cheek	0.390	0.079	0.469	0.147	0.172	0.094	0.119	0.051	0.616	0.588	0.692	0.614
		0.719	17.50	14.00		0.060	16.00	16.00	Right Tilt	0.321	0.060	0.381	0.152	0.206	0.111	0.092	0.036	0.533	0.473	0.623	0.528
DC_66A+n78A	Ant.3	0.329	25.50	25.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.329	0.261	0.590	0.398	0.290	0.158	0.323	0.138	0.988	0.913	1.018	0.886
		0.111	25.50	25.50		0.127	16.00	16.00	Left Tilt	0.111	0.127	0.238	0.276	0.462	0.216	0.192	0.075	0.514	0.430	0.775	0.529
		0.260	25.50	25.50		0.079	16.00	16.00	Right Cheek	0.260	0.079	0.339	0.147	0.172	0.094	0.119	0.051	0.486	0.458	0.562	0.484
		0.088	25.50	25.50		0.060	16.00	16.00	Right Tilt	0.088	0.060	0.148	0.152	0.206	0.111	0.092	0.036	0.300	0.240	0.390	0.295
DC_66A+n78A	Ant.4	0.304	20.00	15.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.108	0.261	0.369	0.398	0.290	0.158	0.323	0.138	0.767	0.692	0.797	0.665
		0.140	20.00	15.50		0.127	16.00	16.00	Left Tilt	0.050	0.127	0.177	0.276	0.462	0.216	0.192	0.075	0.453	0.369	0.714	0.468
		0.999	20.00	15.50		0.079	16.00	16.00	Right Cheek	0.354	0.079	0.433	0.147	0.172	0.094	0.119	0.051	0.580	0.552	0.656	0.578
		0.347	20.00	15.50		0.060	16.00	16.00	Right Tilt	0.123	0.060	0.183	0.152	0.206	0.111	0.092	0.036	0.335	0.275	0.425	0.330
DC_66A+n78A	Ant.5	0.440	24.00	24.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.440	0.261	0.701	0.398	0.290	0.158	0.323	0.138	1.099	1.024	1.129	0.997
		0.103	24.00	24.00		0.127	16.00	16.00	Left Tilt	0.103	0.127	0.230	0.276	0.462	0.216	0.192	0.075	0.506	0.422	0.767	0.521
		0.221	24.00	24.00		0.079	16.00	16.00	Right Cheek	0.221	0.079	0.300	0.147	0.172	0.094	0.119	0.051	0.447	0.419	0.523	0.445

		0.045	24.00	24.00		0.060	16.00	16.00	Right Tilt	0.045	0.060	0.105	0.152	0.206	0.111	0.092	0.036	0.257	0.197	0.347	0.252
DC_38A+n78A	Ant.2	0.471	18.50	14.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.188	0.125	0.312	0.398	0.290	0.158	0.323	0.138	0.710	0.635	0.740	0.608
		0.451	18.50	14.50		0.186	16.00	14.50	Left Tilt	0.180	0.132	0.311	0.276	0.462	0.216	0.192	0.075	0.587	0.503	0.848	0.602
		0.960	18.50	14.50		0.551	16.00	14.50	Right Cheek	0.382	0.390	0.772	0.147	0.172	0.094	0.119	0.051	0.919	0.891	0.995	0.917
		0.822	18.50	14.50		0.539	16.00	14.50	Right Tilt	0.327	0.382	0.709	0.152	0.206	0.111	0.092	0.036	0.861	0.801	0.951	0.856
DC_38A+n78A	Ant.3	0.110	24.00	24.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.110	0.125	0.235	0.398	0.290	0.158	0.323	0.138	0.633	0.558	0.663	0.531
		0.052	24.00	24.00		0.186	16.00	14.50	Left Tilt	0.052	0.132	0.184	0.276	0.462	0.216	0.192	0.075	0.460	0.376	0.721	0.475
		0.101	24.00	24.00		0.551	16.00	14.50	Right Cheek	0.101	0.390	0.491	0.147	0.172	0.094	0.119	0.051	0.638	0.610	0.714	0.636
		0.049	24.00	24.00		0.539	16.00	14.50	Right Tilt	0.049	0.382	0.431	0.152	0.206	0.111	0.092	0.036	0.583	0.523	0.673	0.578
DC_38A+n78A	Ant.4	0.169	19.00	15.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.075	0.125	0.200	0.398	0.290	0.158	0.323	0.138	0.598	0.523	0.628	0.496
		0.095	19.00	15.50		0.186	16.00	14.50	Left Tilt	0.042	0.132	0.174	0.276	0.462	0.216	0.192	0.075	0.450	0.366	0.711	0.465
		0.572	19.00	15.50		0.551	16.00	14.50	Right Cheek	0.256	0.390	0.646	0.147	0.172	0.094	0.119	0.051	0.793	0.765	0.869	0.791
		0.178	19.00	15.50		0.539	16.00	14.50	Right Tilt	0.080	0.382	0.461	0.152	0.206	0.111	0.092	0.036	0.613	0.553	0.703	0.608
DC_38A+n78A	Ant.5	0.499	22.00	19.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.250	0.125	0.375	0.398	0.290	0.158	0.323	0.138	0.773	0.698	0.803	0.671
		0.172	22.00	19.00		0.186	16.00	14.50	Left Tilt	0.086	0.132	0.218	0.276	0.462	0.216	0.192	0.075	0.494	0.410	0.755	0.509
		0.419	22.00	19.00		0.551	16.00	14.50	Right Cheek	0.210	0.390	0.600	0.147	0.172	0.094	0.119	0.051	0.747	0.719	0.823	0.745
		0.093	22.00	19.00		0.539	16.00	14.50	Right Tilt	0.047	0.382	0.428	0.152	0.206	0.111	0.092	0.036	0.580	0.520	0.670	0.575
DC_38A+n78A	Ant.2	0.471	18.50	14.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.188	0.498	0.686	0.398	0.290	0.158	0.323	0.138	1.084	1.009	1.114	0.982
		0.451	18.50	14.50		0.758	14.00	12.50	Left Tilt	0.180	0.537	0.716	0.276	0.462	0.216	0.192	0.075	0.992	0.908	1.253	1.007
		0.960	18.50	14.50		0.358	14.00	12.50	Right Cheek	0.382	0.253	0.636	0.147	0.172	0.094	0.119	0.051	0.783	0.755	0.859	0.781
		0.822	18.50	14.50		0.477	14.00	12.50	Right Tilt	0.327	0.338	0.665	0.152	0.206	0.111	0.092	0.036	0.817	0.757	0.907	0.812
DC_38A+n78A	Ant.3	0.110	24.00	24.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.110	0.498	0.608	0.398	0.290	0.158	0.323	0.138	1.006	0.931	1.036	0.904
		0.052	24.00	24.00		0.758	14.00	12.50	Left Tilt	0.052	0.537	0.589	0.276	0.462	0.216	0.192	0.075	0.865	0.781	1.126	0.880
		0.101	24.00	24.00		0.358	14.00	12.50	Right Cheek	0.101	0.253	0.354	0.147	0.172	0.094	0.119	0.051	0.501	0.473	0.577	0.499
		0.049	24.00	24.00		0.477	14.00	12.50	Right Tilt	0.049	0.338	0.387	0.152	0.206	0.111	0.092	0.036	0.539	0.479	0.629	0.534
DC_38A+n78A	Ant.4	0.169	19.00	15.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.075	0.498	0.574	0.398	0.290	0.158	0.323	0.138	0.972	0.897	1.002	0.870
		0.095	19.00	15.50		0.758	14.00	12.50	Left Tilt	0.042	0.537	0.579	0.276	0.462	0.216	0.192	0.075	0.855	0.771	1.116	0.870
		0.572	19.00	15.50		0.358	14.00	12.50	Right Cheek	0.256	0.253	0.509	0.147	0.172	0.094	0.119	0.051	0.656	0.628	0.732	0.654
		0.178	19.00	15.50		0.477	14.00	12.50	Right Tilt	0.080	0.338	0.417	0.152	0.206	0.111	0.092	0.036	0.569	0.509	0.659	0.564
DC_38A+n78A	Ant.5	0.499	22.00	19.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.250	0.498	0.748	0.398	0.290	0.158	0.323	0.138	1.146	1.071	1.176	1.044
		0.172	22.00	19.00		0.758	14.00	12.50	Left Tilt	0.086	0.537	0.623	0.276	0.462	0.216	0.192	0.075	0.899	0.815	1.160	0.914
		0.419	22.00	19.00		0.358	14.00	12.50	Right Cheek	0.210	0.253	0.463	0.147	0.172	0.094	0.119	0.051	0.610	0.582	0.686	0.608
		0.093	22.00	19.00		0.477	14.00	12.50	Right Tilt	0.047	0.338	0.384	0.152	0.206	0.111	0.092	0.036	0.536	0.476	0.626	0.531
DC_38A+n78A	Ant.2	0.471	18.50	14.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.188	0.051	0.238	0.398	0.290	0.158	0.323	0.138	0.636	0.561	0.666	0.534
		0.451	18.50	14.50		0.035	21.50	21.00	Left Tilt	0.180	0.031	0.211	0.276	0.462	0.216	0.192	0.075	0.487	0.403	0.748	0.502
		0.960	18.50	14.50		0.170	21.50	21.00	Right Cheek	0.382	0.152	0.534	0.147	0.172	0.094	0.119	0.051	0.681	0.653	0.757	0.679
		0.822	18.50	14.50		0.075	21.50	21.00	Right Tilt	0.327	0.067	0.394	0.152	0.206	0.111	0.092	0.036	0.546	0.486	0.636	0.541
DC_38A+n78A	Ant.3	0.110	24.00	24.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.110	0.051	0.161	0.398	0.290	0.158	0.323	0.138	0.559	0.484	0.589	0.457
		0.052	24.00	24.00		0.035	21.50	21.00	Left Tilt	0.052	0.031	0.083	0.276	0.462	0.216	0.192	0.075	0.359	0.275	0.620	0.374
		0.101	24.00	24.00		0.170	21.50	21.00	Right Cheek	0.101	0.152	0.253	0.147	0.172	0.094	0.119	0.051	0.400	0.372	0.476	0.398
		0.049	24.00	24.00		0.075	21.50	21.00	Right Tilt	0.049	0.067	0.116	0.152	0.206	0.111	0.092	0.036	0.268	0.208	0.358	0.263
DC_38A+n78A	Ant.4	0.169	19.00	15.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.075	0.051	0.126	0.398	0.290	0.158	0.323	0.138	0.524	0.449	0.554	0.422
		0.095	19.00	15.50		0.035	21.50	21.00	Left Tilt	0.042	0.031	0.074	0.276	0.462	0.216	0.192	0.075	0.350	0.266	0.611	0.365

		0.572	19.00	15.50		0.170	21.50	21.00	Right Cheek	0.256	0.152	0.407	0.147	0.172	0.094	0.119	0.051	0.554	0.526	0.630	0.552
		0.178	19.00	15.50		0.075	21.50	21.00	Right Tilt	0.080	0.067	0.146	0.152	0.206	0.111	0.092	0.036	0.298	0.238	0.388	0.293
DC_38A+n78A	Ant.5	0.499	22.00	19.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.250	0.051	0.301	0.398	0.290	0.158	0.323	0.138	0.699	0.624	0.729	0.597
		0.172	22.00	19.00		0.035	21.50	21.00	Left Tilt	0.086	0.031	0.117	0.276	0.462	0.216	0.192	0.075	0.393	0.309	0.654	0.408
		0.419	22.00	19.00		0.170	21.50	21.00	Right Cheek	0.210	0.152	0.362	0.147	0.172	0.094	0.119	0.051	0.509	0.481	0.585	0.507
		0.093	22.00	19.00		0.075	21.50	21.00	Right Tilt	0.047	0.067	0.113	0.152	0.206	0.111	0.092	0.036	0.265	0.205	0.355	0.260
DC_38A+n78A	Ant.2	0.471	18.50	14.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.188	0.261	0.449	0.398	0.290	0.158	0.323	0.138	0.847	0.772	0.877	0.745
		0.451	18.50	14.50		0.127	16.00	16.00	Left Tilt	0.180	0.127	0.307	0.276	0.462	0.216	0.192	0.075	0.583	0.499	0.844	0.598
		0.960	18.50	14.50		0.079	16.00	16.00	Right Cheek	0.382	0.079	0.461	0.147	0.172	0.094	0.119	0.051	0.608	0.580	0.684	0.606
		0.822	18.50	14.50		0.060	16.00	16.00	Right Tilt	0.327	0.060	0.387	0.152	0.206	0.111	0.092	0.036	0.539	0.479	0.629	0.534
DC_38A+n78A	Ant.3	0.110	24.00	24.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.110	0.261	0.371	0.398	0.290	0.158	0.323	0.138	0.769	0.694	0.799	0.667
		0.052	24.00	24.00		0.127	16.00	16.00	Left Tilt	0.052	0.127	0.179	0.276	0.462	0.216	0.192	0.075	0.455	0.371	0.716	0.470
		0.101	24.00	24.00		0.079	16.00	16.00	Right Cheek	0.101	0.079	0.180	0.147	0.172	0.094	0.119	0.051	0.327	0.299	0.403	0.325
		0.049	24.00	24.00		0.060	16.00	16.00	Right Tilt	0.049	0.060	0.109	0.152	0.206	0.111	0.092	0.036	0.261	0.201	0.351	0.256
DC_38A+n78A	Ant.4	0.169	19.00	15.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.075	0.261	0.336	0.398	0.290	0.158	0.323	0.138	0.734	0.659	0.764	0.632
		0.095	19.00	15.50		0.127	16.00	16.00	Left Tilt	0.042	0.127	0.169	0.276	0.462	0.216	0.192	0.075	0.445	0.361	0.706	0.460
		0.572	19.00	15.50		0.079	16.00	16.00	Right Cheek	0.256	0.079	0.335	0.147	0.172	0.094	0.119	0.051	0.482	0.454	0.558	0.480
		0.178	19.00	15.50		0.060	16.00	16.00	Right Tilt	0.080	0.060	0.140	0.152	0.206	0.111	0.092	0.036	0.292	0.232	0.382	0.287
DC_38A+n78A	Ant.5	0.499	22.00	19.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.250	0.261	0.511	0.398	0.290	0.158	0.323	0.138	0.909	0.834	0.939	0.807
		0.172	22.00	19.00		0.127	16.00	16.00	Left Tilt	0.086	0.127	0.213	0.276	0.462	0.216	0.192	0.075	0.489	0.405	0.750	0.504
		0.419	22.00	19.00		0.079	16.00	16.00	Right Cheek	0.210	0.079	0.289	0.147	0.172	0.094	0.119	0.051	0.436	0.408	0.512	0.434
		0.093	22.00	19.00		0.060	16.00	16.00	Right Tilt	0.047	0.060	0.107	0.152	0.206	0.111	0.092	0.036	0.259	0.199	0.349	0.254
DC_41A+n78A	Ant.2	0.300	19.00	14.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.095	0.125	0.219	0.398	0.290	0.158	0.323	0.138	0.617	0.542	0.647	0.515
		0.511	19.00	14.00		0.186	16.00	14.50	Left Tilt	0.162	0.132	0.293	0.276	0.462	0.216	0.192	0.075	0.569	0.485	0.830	0.584
		0.972	19.00	14.00		0.551	16.00	14.50	Right Cheek	0.307	0.390	0.697	0.147	0.172	0.094	0.119	0.051	0.844	0.816	0.920	0.842
		0.687	19.00	14.00		0.539	16.00	14.50	Right Tilt	0.217	0.382	0.599	0.152	0.206	0.111	0.092	0.036	0.751	0.691	0.841	0.746
DC_41A+n78A	Ant.3	0.090	24.50	24.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.090	0.125	0.215	0.398	0.290	0.158	0.323	0.138	0.613	0.538	0.643	0.511
		0.072	24.50	24.50		0.186	16.00	14.50	Left Tilt	0.072	0.132	0.204	0.276	0.462	0.216	0.192	0.075	0.480	0.396	0.741	0.495
		0.079	24.50	24.50		0.551	16.00	14.50	Right Cheek	0.079	0.390	0.469	0.147	0.172	0.094	0.119	0.051	0.616	0.588	0.692	0.614
		0.053	24.50	24.50		0.539	16.00	14.50	Right Tilt	0.053	0.382	0.435	0.152	0.206	0.111	0.092	0.036	0.587	0.527	0.677	0.582
DC_41A+n78A	Ant.4	0.182	19.00	15.50	Ant.6	0.176	16.00	14.50	Left Cheek	0.081	0.125	0.206	0.398	0.290	0.158	0.323	0.138	0.604	0.529	0.634	0.502
		0.116	19.00	15.50		0.186	16.00	14.50	Left Tilt	0.052	0.132	0.183	0.276	0.462	0.216	0.192	0.075	0.459	0.375	0.720	0.474
		0.577	19.00	15.50		0.551	16.00	14.50	Right Cheek	0.258	0.390	0.648	0.147	0.172	0.094	0.119	0.051	0.795	0.767	0.871	0.793
		0.182	19.00	15.50		0.539	16.00	14.50	Right Tilt	0.081	0.382	0.463	0.152	0.206	0.111	0.092	0.036	0.615	0.555	0.705	0.610
DC_41A+n78A	Ant.5	0.382	22.00	19.00	Ant.6	0.176	16.00	14.50	Left Cheek	0.191	0.125	0.316	0.398	0.290	0.158	0.323	0.138	0.714	0.639	0.744	0.612
		0.131	22.00	19.00		0.186	16.00	14.50	Left Tilt	0.066	0.132	0.197	0.276	0.462	0.216	0.192	0.075	0.473	0.389	0.734	0.488
		0.556	22.00	19.00		0.551	16.00	14.50	Right Cheek	0.279	0.390	0.669	0.147	0.172	0.094	0.119	0.051	0.816	0.788	0.892	0.814
		0.084	22.00	19.00		0.539	16.00	14.50	Right Tilt	0.042	0.382	0.424	0.152	0.206	0.111	0.092	0.036	0.576	0.516	0.666	0.571
DC_41A+n78A	Ant.2	0.300	19.00	14.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.095	0.498	0.593	0.398	0.290	0.158	0.323	0.138	0.991	0.916	1.021	0.889
		0.511	19.00	14.00		0.758	14.00	12.50	Left Tilt	0.162	0.537	0.698	0.276	0.462	0.216	0.192	0.075	0.974	0.890	1.235	0.989
		0.972	19.00	14.00		0.358	14.00	12.50	Right Cheek	0.307	0.253	0.561	0.147	0.172	0.094	0.119	0.051	0.708	0.680	0.784	0.706
		0.687	19.00	14.00		0.477	14.00	12.50	Right Tilt	0.217	0.338	0.555	0.152	0.206	0.111	0.092	0.036	0.707	0.647	0.797	0.702
DC_41A+n78A	Ant.3	0.090	24.50	24.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.090	0.498	0.588	0.398	0.290	0.158	0.323	0.138	0.986	0.911	1.016	0.884

		0.072	24.50	24.50		0.758	14.00	12.50	Left Tilt	0.072	0.537	0.609	0.276	0.462	0.216	0.192	0.075	0.885	0.801	1.146	0.900
		0.079	24.50	24.50		0.358	14.00	12.50	Right Cheek	0.079	0.253	0.332	0.147	0.172	0.094	0.119	0.051	0.479	0.451	0.555	0.477
		0.053	24.50	24.50		0.477	14.00	12.50	Right Tilt	0.053	0.338	0.391	0.152	0.206	0.111	0.092	0.036	0.543	0.483	0.633	0.538
DC_41A+n78A	Ant.4	0.182	19.00	15.50	Ant.7	0.704	14.00	12.50	Left Cheek	0.081	0.498	0.580	0.398	0.290	0.158	0.323	0.138	0.978	0.903	1.008	0.876
		0.116	19.00	15.50		0.758	14.00	12.50	Left Tilt	0.052	0.537	0.588	0.276	0.462	0.216	0.192	0.075	0.864	0.780	1.125	0.879
		0.577	19.00	15.50		0.358	14.00	12.50	Right Cheek	0.258	0.253	0.511	0.147	0.172	0.094	0.119	0.051	0.658	0.630	0.734	0.656
		0.182	19.00	15.50		0.477	14.00	12.50	Right Tilt	0.081	0.338	0.419	0.152	0.206	0.111	0.092	0.036	0.571	0.511	0.661	0.566
DC_41A+n78A	Ant.5	0.382	22.00	19.00	Ant.7	0.704	14.00	12.50	Left Cheek	0.191	0.498	0.690	0.398	0.290	0.158	0.323	0.138	1.088	1.013	1.118	0.986
		0.131	22.00	19.00		0.758	14.00	12.50	Left Tilt	0.066	0.537	0.602	0.276	0.462	0.216	0.192	0.075	0.878	0.794	1.139	0.893
		0.556	22.00	19.00		0.358	14.00	12.50	Right Cheek	0.279	0.253	0.532	0.147	0.172	0.094	0.119	0.051	0.679	0.651	0.755	0.677
		0.084	22.00	19.00		0.477	14.00	12.50	Right Tilt	0.042	0.338	0.380	0.152	0.206	0.111	0.092	0.036	0.532	0.472	0.622	0.527
DC_41A+n78A	Ant.2	0.300	19.00	14.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.095	0.051	0.146	0.398	0.290	0.158	0.323	0.138	0.544	0.469	0.574	0.442
		0.511	19.00	14.00		0.035	21.50	21.00	Left Tilt	0.162	0.031	0.193	0.276	0.462	0.216	0.192	0.075	0.469	0.385	0.730	0.484
		0.972	19.00	14.00		0.170	21.50	21.00	Right Cheek	0.307	0.152	0.459	0.147	0.172	0.094	0.119	0.051	0.606	0.578	0.682	0.604
		0.687	19.00	14.00		0.075	21.50	21.00	Right Tilt	0.217	0.067	0.284	0.152	0.206	0.111	0.092	0.036	0.436	0.376	0.526	0.431
DC_41A+n78A	Ant.3	0.090	24.50	24.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.090	0.051	0.141	0.398	0.290	0.158	0.323	0.138	0.539	0.464	0.569	0.437
		0.072	24.50	24.50		0.035	21.50	21.00	Left Tilt	0.072	0.031	0.103	0.276	0.462	0.216	0.192	0.075	0.379	0.295	0.640	0.394
		0.079	24.50	24.50		0.170	21.50	21.00	Right Cheek	0.079	0.152	0.231	0.147	0.172	0.094	0.119	0.051	0.378	0.350	0.454	0.376
		0.053	24.50	24.50		0.075	21.50	21.00	Right Tilt	0.053	0.067	0.120	0.152	0.206	0.111	0.092	0.036	0.272	0.212	0.362	0.267
DC_41A+n78A	Ant.4	0.182	19.00	15.50	Ant.8	0.057	21.50	21.00	Left Cheek	0.081	0.051	0.132	0.398	0.290	0.158	0.323	0.138	0.530	0.455	0.560	0.428
		0.116	19.00	15.50		0.035	21.50	21.00	Left Tilt	0.052	0.031	0.083	0.276	0.462	0.216	0.192	0.075	0.359	0.275	0.620	0.374
		0.577	19.00	15.50		0.170	21.50	21.00	Right Cheek	0.258	0.152	0.409	0.147	0.172	0.094	0.119	0.051	0.556	0.528	0.632	0.554
		0.182	19.00	15.50		0.075	21.50	21.00	Right Tilt	0.081	0.067	0.148	0.152	0.206	0.111	0.092	0.036	0.300	0.240	0.390	0.295
DC_41A+n78A	Ant.5	0.382	22.00	19.00	Ant.8	0.057	21.50	21.00	Left Cheek	0.191	0.051	0.242	0.398	0.290	0.158	0.323	0.138	0.640	0.565	0.670	0.538
		0.131	22.00	19.00		0.035	21.50	21.00	Left Tilt	0.066	0.031	0.097	0.276	0.462	0.216	0.192	0.075	0.373	0.289	0.634	0.388
		0.556	22.00	19.00		0.170	21.50	21.00	Right Cheek	0.279	0.152	0.430	0.147	0.172	0.094	0.119	0.051	0.577	0.549	0.653	0.575
		0.084	22.00	19.00		0.075	21.50	21.00	Right Tilt	0.042	0.067	0.109	0.152	0.206	0.111	0.092	0.036	0.261	0.201	0.351	0.256
DC_41A+n78A	Ant.2	0.300	19.00	14.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.095	0.261	0.356	0.398	0.290	0.158	0.323	0.138	0.754	0.679	0.784	0.652
		0.511	19.00	14.00		0.127	16.00	16.00	Left Tilt	0.162	0.127	0.289	0.276	0.462	0.216	0.192	0.075	0.565	0.481	0.826	0.580
		0.972	19.00	14.00		0.079	16.00	16.00	Right Cheek	0.307	0.079	0.386	0.147	0.172	0.094	0.119	0.051	0.533	0.505	0.609	0.531
		0.687	19.00	14.00		0.060	16.00	16.00	Right Tilt	0.217	0.060	0.277	0.152	0.206	0.111	0.092	0.036	0.429	0.369	0.519	0.424
DC_41A+n78A	Ant.3	0.090	24.50	24.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.090	0.261	0.351	0.398	0.290	0.158	0.323	0.138	0.749	0.674	0.779	0.647
		0.072	24.50	24.50		0.127	16.00	16.00	Left Tilt	0.072	0.127	0.199	0.276	0.462	0.216	0.192	0.075	0.475	0.391	0.736	0.490
		0.079	24.50	24.50		0.079	16.00	16.00	Right Cheek	0.079	0.079	0.158	0.147	0.172	0.094	0.119	0.051	0.305	0.277	0.381	0.303
		0.053	24.50	24.50		0.060	16.00	16.00	Right Tilt	0.053	0.060	0.113	0.152	0.206	0.111	0.092	0.036	0.265	0.205	0.355	0.260
DC_41A+n78A	Ant.4	0.182	19.00	15.50	Ant.9	0.261	16.00	16.00	Left Cheek	0.081	0.261	0.342	0.398	0.290	0.158	0.323	0.138	0.740	0.665	0.770	0.638
		0.116	19.00	15.50		0.127	16.00	16.00	Left Tilt	0.052	0.127	0.179	0.276	0.462	0.216	0.192	0.075	0.455	0.371	0.716	0.470
		0.577	19.00	15.50		0.079	16.00	16.00	Right Cheek	0.258	0.079	0.337	0.147	0.172	0.094	0.119	0.051	0.484	0.456	0.560	0.482
		0.182	19.00	15.50		0.060	16.00	16.00	Right Tilt	0.081	0.060	0.141	0.152	0.206	0.111	0.092	0.036	0.293	0.233	0.383	0.288
DC_41A+n78A	Ant.5	0.382	22.00	19.00	Ant.9	0.261	16.00	16.00	Left Cheek	0.191	0.261	0.452	0.398	0.290	0.158	0.323	0.138	0.850	0.775	0.880	0.748
		0.131	22.00	19.00		0.127	16.00	16.00	Left Tilt	0.066	0.127	0.193	0.276	0.462	0.216	0.192	0.075	0.469	0.385	0.730	0.484
		0.556	22.00	19.00		0.079	16.00	16.00	Right Cheek	0.279	0.079	0.358	0.147	0.172	0.094	0.119	0.051	0.505	0.477	0.581	0.503
		0.084	22.00	19.00		0.060	16.00	16.00	Right Tilt	0.042	0.060	0.102	0.152	0.206	0.111	0.092	0.036	0.254	0.194	0.344	0.249

Note:

1: The simultaneous transmission combinations of the multiple antennas contain combinations of two antennas, so only the worst simultaneous transmission combinations was shown in this table.

2: The highest Summed 1g SAR is 1.392 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

13.2.10 Body-Worn Simultaneous Transmission SAR Evaluation for ENDC and WLAN and BT

Band	LTE Antenna	4G		ENDC	NR Antenna	SA		ENDC	Position	Stand alone SAR								SUM SAR			
		LTE SAR	LTE Max Power	LTE Max Power		NR SAR	NR Max Power	NR Max Power		LTE SAR	NR SAR	1	2	3	4	5	6	1+2	1+5	1+3+6	1+4+6
				DSI2				DSI2				ENDC (LTE+NR)	2.4GWIFI Max.	5GWIFI Max.	6GWIFI Max.	Bluetooth Max.	Bluetooth Max.				
												DSI2	Level4	Level4	Level4	LowPower1	LowPower2				
DC_7A+n5A	Ant.2	0.460	25.50	23.50	Ant.0	0.186	25.50	25.50	Front Side 15mm	0.290	0.186	0.476	0.036	0.045	0.022	0.016	0.016	0.512	0.492	0.537	0.514
		0.654	25.50	23.50		0.254	25.50	25.50	Back Side 15mm	0.413	0.254	0.667	0.055	0.084	0.036	0.092	0.092	0.722	0.759	0.843	0.795
DC_7A+n5A	Ant.3	0.197	21.00	19.00	Ant.0	0.186	25.50	25.50	Front Side 15mm	0.124	0.186	0.310	0.036	0.045	0.022	0.016	0.016	0.346	0.326	0.371	0.348
		0.255	21.00	19.00		0.254	25.50	25.50	Back Side 15mm	0.161	0.254	0.415	0.055	0.084	0.036	0.092	0.092	0.470	0.507	0.591	0.543
DC_7A+n5A	Ant.4	0.083	18.00	18.00	Ant.0	0.186	25.50	25.50	Front Side 15mm	0.083	0.186	0.269	0.036	0.045	0.022	0.016	0.016	0.305	0.285	0.330	0.307
		0.130	18.00	18.00		0.254	25.50	25.50	Back Side 15mm	0.130	0.254	0.384	0.055	0.084	0.036	0.092	0.092	0.439	0.476	0.560	0.512
DC_7A+n5A	Ant.5	0.076	20.00	16.00	Ant.0	0.186	25.50	25.50	Front Side 15mm	0.030	0.186	0.216	0.036	0.045	0.022	0.016	0.016	0.252	0.232	0.277	0.254
		0.128	20.00	16.00		0.254	25.50	25.50	Back Side 15mm	0.051	0.254	0.305	0.055	0.084	0.036	0.092	0.092	0.360	0.397	0.481	0.433
DC_7A+n5A	Ant.2	0.460	25.50	23.50	Ant.1	0.272	25.50	23.00	Front Side 15mm	0.290	0.153	0.443	0.036	0.045	0.022	0.016	0.016	0.479	0.459	0.504	0.481
		0.654	25.50	23.50		0.319	25.50	23.00	Back Side 15mm	0.413	0.179	0.592	0.055	0.084	0.036	0.092	0.092	0.647	0.684	0.768	0.720
DC_7A+n5A	Ant.3	0.197	21.00	19.00	Ant.1	0.272	25.50	23.00	Front Side 15mm	0.124	0.153	0.277	0.036	0.045	0.022	0.016	0.016	0.313	0.293	0.338	0.315
		0.255	21.00	19.00		0.319	25.50	23.00	Back Side 15mm	0.161	0.179	0.340	0.055	0.084	0.036	0.092	0.092	0.395	0.432	0.516	0.468
DC_7A+n5A	Ant.4	0.083	18.00	18.00	Ant.1	0.272	25.50	23.00	Front Side 15mm	0.083	0.153	0.236	0.036	0.045	0.022	0.016	0.016	0.272	0.252	0.297	0.274
		0.130	18.00	18.00		0.319	25.50	23.00	Back Side 15mm	0.130	0.179	0.309	0.055	0.084	0.036	0.092	0.092	0.364	0.401	0.485	0.437
DC_7A+n5A	Ant.5	0.076	20.00	16.00	Ant.1	0.272	25.50	23.00	Front Side 15mm	0.030	0.153	0.183	0.036	0.045	0.022	0.016	0.016	0.219	0.199	0.244	0.221
		0.128	20.00	16.00		0.319	25.50	23.00	Back Side 15mm	0.051	0.179	0.230	0.055	0.084	0.036	0.092	0.092	0.285	0.322	0.406	0.358
DC_4A+n7A	Ant.3	0.177	22.00	19.50	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.100	0.409	0.509	0.036	0.045	0.022	0.016	0.016	0.545	0.525	0.570	0.547
		0.231	22.00	19.50		0.736	25.50	24.50	Back Side 15mm	0.130	0.585	0.715	0.055	0.084	0.036	0.092	0.092	0.770	0.807	0.891	0.843
DC_4A+n7A	Ant.4	0.156	22.50	20.00	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.088	0.409	0.497	0.036	0.045	0.022	0.016	0.016	0.533	0.513	0.558	0.535
		0.183	22.50	20.00		0.736	25.50	24.50	Back Side 15mm	0.103	0.585	0.688	0.055	0.084	0.036	0.092	0.092	0.743	0.780	0.864	0.816
DC_4A+n7A	Ant.5	0.067	24.00	24.00	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.067	0.409	0.476	0.036	0.045	0.022	0.016	0.016	0.512	0.492	0.537	0.514
		0.106	24.00	24.00		0.736	25.50	24.50	Back Side 15mm	0.106	0.585	0.691	0.055	0.084	0.036	0.092	0.092	0.746	0.783	0.867	0.819
DC_4A+n7A	Ant.2	0.798	25.50	24.50	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.634	0.116	0.750	0.036	0.045	0.022	0.016	0.016	0.786	0.766	0.811	0.788
		1.080	25.50	24.50		0.216	21.00	19.50	Back Side 15mm	0.858	0.153	1.011	0.055	0.084	0.036	0.092	0.092	1.066	1.103	1.187	1.139
DC_4A+n7A	Ant.4	0.156	22.50	20.00	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.088	0.116	0.204	0.036	0.045	0.022	0.016	0.016	0.240	0.220	0.265	0.242
		0.183	22.50	20.00		0.216	21.00	19.50	Back Side 15mm	0.103	0.153	0.256	0.055	0.084	0.036	0.092	0.092	0.311	0.348	0.432	0.384
DC_4A+n7A	Ant.5	0.067	24.00	24.00	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.067	0.116	0.183	0.036	0.045	0.022	0.016	0.016	0.219	0.199	0.244	0.221
		0.106	24.00	24.00		0.216	21.00	19.50	Back Side 15mm	0.106	0.153	0.259	0.055	0.084	0.036	0.092	0.092	0.314	0.351	0.435	0.387
DC_4A+n7A	Ant.2	0.798	25.50	24.50	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.634	0.220	0.854	0.036	0.045	0.022	0.016	0.016	0.890	0.870	0.915	0.892
		1.080	25.50	24.50		0.347	18.50	18.50	Back Side 15mm	0.858	0.347	1.205	0.055	0.084	0.036	0.092	0.092	1.260	1.297	1.381	1.333
DC_4A+n7A	Ant.3	0.177	22.00	19.50	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.100	0.220	0.320	0.036	0.045	0.022	0.016	0.016	0.356	0.336	0.381	0.358
		0.231	22.00	19.50		0.347	18.50	18.50	Back Side 15mm	0.130	0.347	0.477	0.055	0.084	0.036	0.092	0.092	0.532	0.569	0.653	0.605
DC_4A+n7A	Ant.5	0.067	24.00	24.00	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.067	0.220	0.287	0.036	0.045	0.022	0.016	0.016	0.323	0.303	0.348	0.325
		0.106	24.00	24.00		0.347	18.50	18.50	Back Side 15mm	0.106	0.347	0.453	0.055	0.084	0.036	0.092	0.092	0.508	0.545	0.629	0.581
DC_4A+n7A	Ant.2	0.798	25.50	24.50	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.634	0.074	0.708	0.036	0.045	0.022	0.016	0.016	0.744	0.724	0.769	0.746

		1.080	25.50	24.50		0.110	21.50	21.50	Back Side 15mm	0.858	0.110	0.968	0.055	0.084	0.036	0.092	0.092	1.023	1.060	1.144	1.096
DC_4A+n7A	Ant.3	0.177	22.00	19.50	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.100	0.074	0.174	0.036	0.045	0.022	0.016	0.016	0.210	0.190	0.235	0.212
		0.231	22.00	19.50		0.110	21.50	21.50	Back Side 15mm	0.130	0.110	0.240	0.055	0.084	0.036	0.092	0.092	0.295	0.332	0.416	0.368
DC_4A+n7A	Ant.4	0.156	22.50	20.00	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.088	0.074	0.162	0.036	0.045	0.022	0.016	0.016	0.198	0.178	0.223	0.200
		0.183	22.50	20.00		0.110	21.50	21.50	Back Side 15mm	0.103	0.110	0.213	0.055	0.084	0.036	0.092	0.092	0.268	0.305	0.389	0.341
DC_5A+n7A	Ant.0	0.209	25.50	24.50	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.166	0.409	0.575	0.036	0.045	0.022	0.016	0.016	0.611	0.591	0.636	0.613
		0.259	25.50	24.50		0.736	25.50	24.50	Back Side 15mm	0.206	0.585	0.790	0.055	0.084	0.036	0.092	0.092	0.845	0.882	0.966	0.918
DC_5A+n7A	Ant.1	0.181	25.00	23.50	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.128	0.409	0.537	0.036	0.045	0.022	0.016	0.016	0.573	0.553	0.598	0.575
		0.200	25.00	23.50		0.736	25.50	24.50	Back Side 15mm	0.142	0.585	0.726	0.055	0.084	0.036	0.092	0.092	0.781	0.818	0.902	0.854
DC_5A+n7A	Ant.0	0.209	25.50	24.50	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.166	0.116	0.282	0.036	0.045	0.022	0.016	0.016	0.318	0.298	0.343	0.320
		0.259	25.50	24.50		0.216	21.00	19.50	Back Side 15mm	0.206	0.153	0.359	0.055	0.084	0.036	0.092	0.092	0.414	0.451	0.535	0.487
DC_5A+n7A	Ant.1	0.181	25.00	23.50	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.128	0.116	0.244	0.036	0.045	0.022	0.016	0.016	0.280	0.260	0.305	0.282
		0.200	25.00	23.50		0.216	21.00	19.50	Back Side 15mm	0.142	0.153	0.295	0.055	0.084	0.036	0.092	0.092	0.350	0.387	0.471	0.423
DC_5A+n7A	Ant.0	0.209	25.50	24.50	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.166	0.220	0.386	0.036	0.045	0.022	0.016	0.016	0.422	0.402	0.447	0.424
		0.259	25.50	24.50		0.347	18.50	18.50	Back Side 15mm	0.206	0.347	0.553	0.055	0.084	0.036	0.092	0.092	0.608	0.645	0.729	0.681
DC_5A+n7A	Ant.1	0.181	25.00	23.50	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.128	0.220	0.348	0.036	0.045	0.022	0.016	0.016	0.384	0.364	0.409	0.386
		0.200	25.00	23.50		0.347	18.50	18.50	Back Side 15mm	0.142	0.347	0.489	0.055	0.084	0.036	0.092	0.092	0.544	0.581	0.665	0.617
DC_5A+n7A	Ant.0	0.209	25.50	24.50	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.166	0.074	0.240	0.036	0.045	0.022	0.016	0.016	0.276	0.256	0.301	0.278
		0.259	25.50	24.50		0.110	21.50	21.50	Back Side 15mm	0.206	0.110	0.316	0.055	0.084	0.036	0.092	0.092	0.371	0.408	0.492	0.444
DC_5A+n7A	Ant.1	0.181	25.00	23.50	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.128	0.074	0.202	0.036	0.045	0.022	0.016	0.016	0.238	0.218	0.263	0.240
		0.200	25.00	23.50		0.110	21.50	21.50	Back Side 15mm	0.142	0.110	0.252	0.055	0.084	0.036	0.092	0.092	0.307	0.344	0.428	0.380
DC_66A+n7A	Ant.3	0.196	22.00	19.50	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.110	0.409	0.519	0.036	0.045	0.022	0.016	0.016	0.555	0.535	0.580	0.557
		0.258	22.00	19.50		0.736	25.50	24.50	Back Side 15mm	0.145	0.585	0.730	0.055	0.084	0.036	0.092	0.092	0.785	0.822	0.906	0.858
DC_66A+n7A	Ant.4	0.179	22.50	20.00	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.101	0.409	0.510	0.036	0.045	0.022	0.016	0.016	0.546	0.526	0.571	0.548
		0.235	22.50	20.00		0.736	25.50	24.50	Back Side 15mm	0.132	0.585	0.717	0.055	0.084	0.036	0.092	0.092	0.772	0.809	0.893	0.845
DC_66A+n7A	Ant.5	0.064	24.00	24.00	Ant.2	0.515	25.50	24.50	Front Side 15mm	0.064	0.409	0.473	0.036	0.045	0.022	0.016	0.016	0.509	0.489	0.534	0.511
		0.101	24.00	24.00		0.736	25.50	24.50	Back Side 15mm	0.101	0.585	0.686	0.055	0.084	0.036	0.092	0.092	0.741	0.778	0.862	0.814
DC_66A+n7A	Ant.2	0.695	25.50	24.50	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.552	0.116	0.668	0.036	0.045	0.022	0.016	0.016	0.704	0.684	0.729	0.706
		0.874	25.50	24.50		0.216	21.00	19.50	Back Side 15mm	0.694	0.153	0.847	0.055	0.084	0.036	0.092	0.092	0.902	0.939	1.023	0.975
DC_66A+n7A	Ant.4	0.179	22.50	20.00	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.101	0.116	0.217	0.036	0.045	0.022	0.016	0.016	0.253	0.233	0.278	0.255
		0.235	22.50	20.00		0.216	21.00	19.50	Back Side 15mm	0.132	0.153	0.285	0.055	0.084	0.036	0.092	0.092	0.340	0.377	0.461	0.413
DC_66A+n7A	Ant.5	0.064	24.00	24.00	Ant.3	0.164	21.00	19.50	Front Side 15mm	0.064	0.116	0.180	0.036	0.045	0.022	0.016	0.016	0.216	0.196	0.241	0.218
		0.101	24.00	24.00		0.216	21.00	19.50	Back Side 15mm	0.101	0.153	0.254	0.055	0.084	0.036	0.092	0.092	0.309	0.346	0.430	0.382
DC_66A+n7A	Ant.2	0.695	25.50	24.50	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.552	0.220	0.772	0.036	0.045	0.022	0.016	0.016	0.808	0.788	0.833	0.810
		0.874	25.50	24.50		0.347	18.50	18.50	Back Side 15mm	0.694	0.347	1.041	0.055	0.084	0.036	0.092	0.092	1.096	1.133	1.217	1.169
DC_66A+n7A	Ant.3	0.196	22.00	19.50	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.110	0.220	0.330	0.036	0.045	0.022	0.016	0.016	0.366	0.346	0.391	0.368
		0.258	22.00	19.50		0.347	18.50	18.50	Back Side 15mm	0.145	0.347	0.492	0.055	0.084	0.036	0.092	0.092	0.547	0.584	0.668	0.620
DC_66A+n7A	Ant.5	0.064	24.00	24.00	Ant.4	0.220	18.50	18.50	Front Side 15mm	0.064	0.220	0.284	0.036	0.045	0.022	0.016	0.016	0.320	0.300	0.345	0.322
		0.101	24.00	24.00		0.347	18.50	18.50	Back Side 15mm	0.101	0.347	0.448	0.055	0.084	0.036	0.092	0.092	0.503	0.540	0.624	0.576
DC_66A+n7A	Ant.2	0.695	25.50	24.50	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.552	0.074	0.626	0.036	0.045	0.022	0.016	0.016	0.662	0.642	0.687	0.664
		0.874	25.50	24.50		0.110	21.50	21.50	Back Side 15mm	0.694	0.110	0.804	0.055	0.084	0.036	0.092	0.092	0.859	0.896	0.980	0.932
DC_66A+n7A	Ant.3	0.196	22.00	19.50	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.110	0.074	0.184	0.036	0.045	0.022	0.016	0.016	0.220	0.200	0.245	0.222
		0.258	22.00	19.50		0.110	21.50	21.50	Back Side 15mm	0.145	0.110	0.255	0.055	0.084	0.036	0.092	0.092	0.310	0.347	0.431	0.383

DC_66A+n7A	Ant.4	0.179	22.50	20.00	Ant.5	0.074	21.50	21.50	Front Side 15mm	0.101	0.074	0.175	0.036	0.045	0.022	0.016	0.016	0.211	0.191	0.236	0.213
		0.235	22.50	20.00		0.110	21.50	21.50	Back Side 15mm	0.132	0.110	0.242	0.055	0.084	0.036	0.092	0.092	0.297	0.334	0.418	0.370
DC_2A+n66A	Ant.3	0.143	22.00	20.00	Ant.2	0.255	25.50	25.50	Front Side 15mm	0.090	0.255	0.345	0.036	0.045	0.022	0.016	0.016	0.381	0.361	0.406	0.383
		0.203	22.00	20.00		0.349	25.50	25.50	Back Side 15mm	0.128	0.349	0.477	0.055	0.084	0.036	0.092	0.092	0.532	0.569	0.653	0.605
DC_2A+n66A	Ant.4	0.079	24.50	23.50	Ant.2	0.255	25.50	25.50	Front Side 15mm	0.063	0.255	0.318	0.036	0.045	0.022	0.016	0.016	0.354	0.334	0.379	0.356
		0.101	24.50	23.50		0.349	25.50	25.50	Back Side 15mm	0.080	0.349	0.429	0.055	0.084	0.036	0.092	0.092	0.484	0.521	0.605	0.557
DC_2A+n66A	Ant.3	0.143	22.00	20.00	Ant.5	0.022	23.00	23.00	Front Side 15mm	0.090	0.022	0.112	0.036	0.045	0.022	0.016	0.016	0.148	0.128	0.173	0.150
		0.203	22.00	20.00		0.061	23.00	23.00	Back Side 15mm	0.128	0.061	0.189	0.055	0.084	0.036	0.092	0.092	0.244	0.281	0.365	0.317
DC_2A+n66A	Ant.4	0.079	24.50	23.50	Ant.5	0.022	23.00	23.00	Front Side 15mm	0.063	0.022	0.085	0.036	0.045	0.022	0.016	0.016	0.121	0.101	0.146	0.123
		0.101	24.50	23.50		0.061	23.00	23.00	Back Side 15mm	0.080	0.061	0.141	0.055	0.084	0.036	0.092	0.092	0.196	0.233	0.317	0.269
DC_5A+n66A	Ant.0	0.209	25.50	24.50	Ant.2	0.255	25.50	25.50	Front Side 15mm	0.166	0.255	0.421	0.036	0.045	0.022	0.016	0.016	0.457	0.437	0.482	0.459
		0.259	25.50	24.50		0.349	25.50	25.50	Back Side 15mm	0.206	0.349	0.555	0.055	0.084	0.036	0.092	0.092	0.610	0.647	0.731	0.683
DC_5A+n66A	Ant.1	0.181	25.00	23.50	Ant.2	0.255	25.50	25.50	Front Side 15mm	0.128	0.255	0.383	0.036	0.045	0.022	0.016	0.016	0.419	0.399	0.444	0.421
		0.200	25.00	23.50		0.349	25.50	25.50	Back Side 15mm	0.142	0.349	0.491	0.055	0.084	0.036	0.092	0.092	0.546	0.583	0.667	0.619
DC_5A+n66A	Ant.0	0.209	25.50	24.50	Ant.3	0.235	24.00	19.50	Front Side 15mm	0.166	0.083	0.249	0.036	0.045	0.022	0.016	0.016	0.285	0.265	0.310	0.287
		0.259	25.50	24.50		0.344	24.00	19.50	Back Side 15mm	0.206	0.122	0.328	0.055	0.084	0.036	0.092	0.092	0.383	0.420	0.504	0.456
DC_5A+n66A	Ant.1	0.181	25.00	23.50	Ant.3	0.235	24.00	19.50	Front Side 15mm	0.128	0.083	0.212	0.036	0.045	0.022	0.016	0.016	0.248	0.228	0.273	0.250
		0.200	25.00	23.50		0.344	24.00	19.50	Back Side 15mm	0.142	0.122	0.264	0.055	0.084	0.036	0.092	0.092	0.319	0.356	0.440	0.392
DC_5A+n66A	Ant.0	0.209	25.50	24.50	Ant.4	0.099	22.00	21.50	Front Side 15mm	0.166	0.088	0.254	0.036	0.045	0.022	0.016	0.016	0.290	0.270	0.315	0.292
		0.259	25.50	24.50		0.133	22.00	21.50	Back Side 15mm	0.206	0.119	0.324	0.055	0.084	0.036	0.092	0.092	0.379	0.416	0.500	0.452
DC_5A+n66A	Ant.1	0.181	25.00	23.50	Ant.4	0.099	22.00	21.50	Front Side 15mm	0.128	0.088	0.216	0.036	0.045	0.022	0.016	0.016	0.252	0.232	0.277	0.254
		0.200	25.00	23.50		0.133	22.00	21.50	Back Side 15mm	0.142	0.119	0.260	0.055	0.084	0.036	0.092	0.092	0.315	0.352	0.436	0.388
DC_5A+n66A	Ant.0	0.209	25.50	24.50	Ant.5	0.022	23.00	23.00	Front Side 15mm	0.166	0.022	0.188	0.036	0.045	0.022	0.016	0.016	0.224	0.204	0.249	0.226
		0.259	25.50	24.50		0.061	23.00	23.00	Back Side 15mm	0.206	0.061	0.267	0.055	0.084	0.036	0.092	0.092	0.322	0.359	0.443	0.395
DC_5A+n66A	Ant.1	0.181	25.00	23.50	Ant.5	0.022	23.00	23.00	Front Side 15mm	0.128	0.022	0.150	0.036	0.045	0.022	0.016	0.016	0.186	0.166	0.211	0.188
		0.200	25.00	23.50		0.061	23.00	23.00	Back Side 15mm	0.142	0.061	0.203	0.055	0.084	0.036	0.092	0.092	0.258	0.295	0.379	0.331
DC_7A+n66A	Ant.3	0.197	21.00	19.00	Ant.2	0.255	25.50	25.50	Front Side 15mm	0.124	0.255	0.379	0.036	0.045	0.022	0.016	0.016	0.415	0.395	0.440	0.417
		0.255	21.00	19.00		0.349	25.50	25.50	Back Side 15mm	0.161	0.349	0.510	0.055	0.084	0.036	0.092	0.092	0.565	0.602	0.686	0.638
DC_7A+n66A	Ant.4	0.083	18.00	18.00	Ant.2	0.255	25.50	25.50	Front Side 15mm	0.083	0.255	0.338	0.036	0.045	0.022	0.016	0.016	0.374	0.354	0.399	0.376
		0.130	18.00	18.00		0.349	25.50	25.50	Back Side 15mm	0.130	0.349	0.479	0.055	0.084	0.036	0.092	0.092	0.534	0.571	0.655	0.607
DC_7A+n66A	Ant.5	0.076	20.00	16.00	Ant.2	0.255	25.50	25.50	Front Side 15mm	0.030	0.255	0.285	0.036	0.045	0.022	0.016	0.016	0.321	0.301	0.346	0.323
		0.128	20.00	16.00		0.349	25.50	25.50	Back Side 15mm	0.051	0.349	0.400	0.055	0.084	0.036	0.092	0.092	0.455	0.492	0.576	0.528
DC_7A+n66A	Ant.2	0.460	25.50	23.50	Ant.3	0.235	24.00	19.50	Front Side 15mm	0.290	0.083	0.374	0.036	0.045	0.022	0.016	0.016	0.410	0.390	0.435	0.412
		0.654	25.50	23.50		0.344	24.00	19.50	Back Side 15mm	0.413	0.122	0.535	0.055	0.084	0.036	0.092	0.092	0.590	0.627	0.711	0.663
DC_7A+n66A	Ant.4	0.083	18.00	18.00	Ant.3	0.235	24.00	19.50	Front Side 15mm	0.083	0.083	0.166	0.036	0.045	0.022	0.016	0.016	0.202	0.182	0.227	0.204
		0.130	18.00	18.00		0.344	24.00	19.50	Back Side 15mm	0.130	0.122	0.252	0.055	0.084	0.036	0.092	0.092	0.307	0.344	0.428	0.380
DC_7A+n66A	Ant.5	0.076	20.00	16.00	Ant.3	0.235	24.00	19.50	Front Side 15mm	0.030	0.083	0.114	0.036	0.045	0.022	0.016	0.016	0.150	0.130	0.175	0.152
		0.128	20.00	16.00		0.344	24.00	19.50	Back Side 15mm	0.051	0.122	0.173	0.055	0.084	0.036	0.092	0.092	0.228	0.265	0.349	0.301
DC_7A+n66A	Ant.2	0.460	25.50	23.50	Ant.4	0.099	22.00	21.50	Front Side 15mm	0.290	0.088	0.378	0.036	0.045	0.022	0.016	0.016	0.414	0.394	0.439	0.416
		0.654	25.50	23.50		0.133	22.00	21.50	Back Side 15mm	0.413	0.119	0.531	0.055	0.084	0.036	0.092	0.092	0.586	0.623	0.707	0.659
DC_7A+n66A	Ant.3	0.197	21.00	19.00	Ant.4	0.099	22.00	21.50	Front Side 15mm	0.124	0.088	0.213	0.036	0.045	0.022	0.016	0.016	0.249	0.229	0.274	0.251
		0.255	21.00	19.00		0.133	22.00	21.50	Back Side 15mm	0.161	0.119	0.279	0.055	0.084	0.036	0.092	0.092	0.334	0.371	0.455	0.407
DC_7A+n66A	Ant.5	0.076	20.00	16.00	Ant.4	0.099	22.00	21.50	Front Side 15mm	0.030	0.088	0.118	0.036	0.045	0.022	0.016	0.016	0.154	0.134	0.179	0.156

		0.128	20.00	16.00		0.133	22.00	21.50	Back Side 15mm	0.051	0.119	0.169	0.055	0.084	0.036	0.092	0.092	0.224	0.261	0.345	0.297
DC_7A+n66A	Ant.2	0.460	25.50	23.50	Ant.5	0.022	23.00	23.00	Front Side 15mm	0.290	0.022	0.312	0.036	0.045	0.022	0.016	0.016	0.348	0.328	0.373	0.350
		0.654	25.50	23.50		0.061	23.00	23.00	Back Side 15mm	0.413	0.061	0.474	0.055	0.084	0.036	0.092	0.092	0.529	0.566	0.650	0.602
DC_7A+n66A	Ant.3	0.197	21.00	19.00	Ant.5	0.022	23.00	23.00	Front Side 15mm	0.124	0.022	0.146	0.036	0.045	0.022	0.016	0.016	0.182	0.162	0.207	0.184
		0.255	21.00	19.00		0.061	23.00	23.00	Back Side 15mm	0.161	0.061	0.222	0.055	0.084	0.036	0.092	0.092	0.277	0.314	0.398	0.350
DC_7A+n66A	Ant.4	0.083	18.00	18.00	Ant.5	0.022	23.00	23.00	Front Side 15mm	0.083	0.022	0.105	0.036	0.045	0.022	0.016	0.016	0.141	0.121	0.166	0.143
		0.130	18.00	18.00		0.061	23.00	23.00	Back Side 15mm	0.130	0.061	0.191	0.055	0.084	0.036	0.092	0.092	0.246	0.283	0.367	0.319
DC_4A+n38A	Ant.3	0.177	22.00	19.50	Ant.2	0.388	25.00	23.00	Front Side 15mm	0.100	0.245	0.344	0.036	0.045	0.022	0.016	0.016	0.380	0.360	0.405	0.382
		0.231	22.00	19.50		0.550	25.00	23.00	Back Side 15mm	0.130	0.347	0.477	0.055	0.084	0.036	0.092	0.092	0.532	0.569	0.653	0.605
DC_4A+n38A	Ant.4	0.156	22.50	20.00	Ant.2	0.388	25.00	23.00	Front Side 15mm	0.088	0.245	0.333	0.036	0.045	0.022	0.016	0.016	0.369	0.349	0.394	0.371
		0.183	22.50	20.00		0.550	25.00	23.00	Back Side 15mm	0.103	0.347	0.450	0.055	0.084	0.036	0.092	0.092	0.505	0.542	0.626	0.578
DC_4A+n38A	Ant.5	0.067	24.00	24.00	Ant.2	0.388	25.00	23.00	Front Side 15mm	0.067	0.245	0.312	0.036	0.045	0.022	0.016	0.016	0.348	0.328	0.373	0.350
		0.106	24.00	24.00		0.550	25.00	23.00	Back Side 15mm	0.106	0.347	0.453	0.055	0.084	0.036	0.092	0.092	0.508	0.545	0.629	0.581
DC_4A+n38A	Ant.2	0.798	25.50	24.50	Ant.3	0.128	22.50	19.50	Front Side 15mm	0.634	0.064	0.698	0.036	0.045	0.022	0.016	0.016	0.734	0.714	0.759	0.736
		1.080	25.50	24.50		0.161	22.50	19.50	Back Side 15mm	0.858	0.081	0.939	0.055	0.084	0.036	0.092	0.092	0.994	1.031	1.115	1.067
DC_4A+n38A	Ant.4	0.156	22.50	20.00	Ant.3	0.128	22.50	19.50	Front Side 15mm	0.088	0.064	0.152	0.036	0.045	0.022	0.016	0.016	0.188	0.168	0.213	0.190
		0.183	22.50	20.00		0.161	22.50	19.50	Back Side 15mm	0.103	0.081	0.184	0.055	0.084	0.036	0.092	0.092	0.239	0.276	0.360	0.312
DC_4A+n38A	Ant.5	0.067	24.00	24.00	Ant.3	0.128	22.50	19.50	Front Side 15mm	0.067	0.064	0.131	0.036	0.045	0.022	0.016	0.016	0.167	0.147	0.192	0.169
		0.106	24.00	24.00		0.161	22.50	19.50	Back Side 15mm	0.106	0.081	0.187	0.055	0.084	0.036	0.092	0.092	0.242	0.279	0.363	0.315
DC_4A+n38A	Ant.2	0.798	25.50	24.50	Ant.4	0.076	19.50	19.50	Front Side 15mm	0.634	0.076	0.710	0.036	0.045	0.022	0.016	0.016	0.746	0.726	0.771	0.748
		1.080	25.50	24.50		0.125	19.50	19.50	Back Side 15mm	0.858	0.125	0.983	0.055	0.084	0.036	0.092	0.092	1.038	1.075	1.159	1.111
DC_4A+n38A	Ant.3	0.177	22.00	19.50	Ant.4	0.076	19.50	19.50	Front Side 15mm	0.100	0.076	0.176	0.036	0.045	0.022	0.016	0.016	0.212	0.192	0.237	0.214
		0.231	22.00	19.50		0.125	19.50	19.50	Back Side 15mm	0.130	0.125	0.255	0.055	0.084	0.036	0.092	0.092	0.310	0.347	0.431	0.383
DC_4A+n38A	Ant.5	0.067	24.00	24.00	Ant.4	0.076	19.50	19.50	Front Side 15mm	0.067	0.076	0.143	0.036	0.045	0.022	0.016	0.016	0.179	0.159	0.204	0.181
		0.106	24.00	24.00		0.125	19.50	19.50	Back Side 15mm	0.106	0.125	0.231	0.055	0.084	0.036	0.092	0.092	0.286	0.323	0.407	0.359
DC_4A+n38A	Ant.2	0.798	25.50	24.50	Ant.5	0.059	21.00	20.00	Front Side 15mm	0.634	0.047	0.681	0.036	0.045	0.022	0.016	0.016	0.717	0.697	0.742	0.719
		1.080	25.50	24.50		0.095	21.00	20.00	Back Side 15mm	0.858	0.075	0.933	0.055	0.084	0.036	0.092	0.092	0.988	1.025	1.109	1.061
DC_4A+n38A	Ant.3	0.177	22.00	19.50	Ant.5	0.059	21.00	20.00	Front Side 15mm	0.100	0.047	0.146	0.036	0.045	0.022	0.016	0.016	0.182	0.162	0.207	0.184
		0.231	22.00	19.50		0.095	21.00	20.00	Back Side 15mm	0.130	0.075	0.205	0.055	0.084	0.036	0.092	0.092	0.260	0.297	0.381	0.333
DC_4A+n38A	Ant.4	0.156	22.50	20.00	Ant.5	0.059	21.00	20.00	Front Side 15mm	0.088	0.047	0.135	0.036	0.045	0.022	0.016	0.016	0.171	0.151	0.196	0.173
		0.183	22.50	20.00		0.095	21.00	20.00	Back Side 15mm	0.103	0.075	0.178	0.055	0.084	0.036	0.092	0.092	0.233	0.270	0.354	0.306
DC_66A+n38A	Ant.3	0.196	22.00	19.50	Ant.2	0.388	25.00	23.00	Front Side 15mm	0.110	0.245	0.355	0.036	0.045	0.022	0.016	0.016	0.391	0.371	0.416	0.393
		0.258	22.00	19.50		0.550	25.00	23.00	Back Side 15mm	0.145	0.347	0.492	0.055	0.084	0.036	0.092	0.092	0.547	0.584	0.668	0.620
DC_66A+n38A	Ant.4	0.179	22.50	20.00	Ant.2	0.388	25.00	23.00	Front Side 15mm	0.101	0.245	0.345	0.036	0.045	0.022	0.016	0.016	0.381	0.361	0.406	0.383
		0.235	22.50	20.00		0.550	25.00	23.00	Back Side 15mm	0.132	0.347	0.479	0.055	0.084	0.036	0.092	0.092	0.534	0.571	0.655	0.607
DC_66A+n38A	Ant.5	0.064	24.00	24.00	Ant.2	0.388	25.00	23.00	Front Side 15mm	0.064	0.245	0.309	0.036	0.045	0.022	0.016	0.016	0.345	0.325	0.370	0.347
		0.101	24.00	24.00		0.550	25.00	23.00	Back Side 15mm	0.101	0.347	0.448	0.055	0.084	0.036	0.092	0.092	0.503	0.540	0.624	0.576
DC_66A+n38A	Ant.2	0.695	25.50	24.50	Ant.3	0.128	22.50	19.50	Front Side 15mm	0.552	0.064	0.616	0.036	0.045	0.022	0.016	0.016	0.652	0.632	0.677	0.654
		0.874	25.50	24.50		0.161	22.50	19.50	Back Side 15mm	0.694	0.081	0.775	0.055	0.084	0.036	0.092	0.092	0.830	0.867	0.951	0.903
DC_66A+n38A	Ant.4	0.179	22.50	20.00	Ant.3	0.128	22.50	19.50	Front Side 15mm	0.101	0.064	0.165	0.036	0.045	0.022	0.016	0.016	0.201	0.181	0.226	0.203
		0.235	22.50	20.00		0.161	22.50	19.50	Back Side 15mm	0.132	0.081	0.213	0.055	0.084	0.036	0.092	0.092	0.268	0.305	0.389	0.341
DC_66A+n38A	Ant.5	0.064	24.00	24.00	Ant.3	0.128	22.50	19.50	Front Side 15mm	0.064	0.064	0.128	0.036	0.045	0.022	0.016	0.016	0.164	0.144	0.189	0.166
		0.101	24.00	24.00		0.161	22.50	19.50	Back Side 15mm	0.101	0.081	0.182	0.055	0.084	0.036	0.092	0.092	0.237	0.274	0.358	0.310

DC_66A+n38A	Ant.2	0.695	25.50	24.50	Ant.4	0.076	19.50	19.50	Front Side 15mm	0.552	0.076	0.628	0.036	0.045	0.022	0.016	0.016	0.664	0.644	0.689	0.666
		0.874	25.50	24.50		0.125	19.50	19.50	Back Side 15mm	0.694	0.125	0.819	0.055	0.084	0.036	0.092	0.092	0.874	0.911	0.995	0.947
DC_66A+n38A	Ant.3	0.196	22.00	19.50	Ant.4	0.076	19.50	19.50	Front Side 15mm	0.110	0.076	0.186	0.036	0.045	0.022	0.016	0.016	0.222	0.202	0.247	0.224
		0.258	22.00	19.50		0.125	19.50	19.50	Back Side 15mm	0.145	0.125	0.270	0.055	0.084	0.036	0.092	0.092	0.325	0.362	0.446	0.398
DC_66A+n38A	Ant.5	0.064	24.00	24.00	Ant.4	0.076	19.50	19.50	Front Side 15mm	0.064	0.076	0.140	0.036	0.045	0.022	0.016	0.016	0.176	0.156	0.201	0.178
		0.101	24.00	24.00		0.125	19.50	19.50	Back Side 15mm	0.101	0.125	0.226	0.055	0.084	0.036	0.092	0.092	0.281	0.318	0.402	0.354
DC_66A+n38A	Ant.2	0.695	25.50	24.50	Ant.5	0.059	21.00	20.00	Front Side 15mm	0.552	0.047	0.599	0.036	0.045	0.022	0.016	0.016	0.635	0.615	0.660	0.637
		0.874	25.50	24.50		0.095	21.00	20.00	Back Side 15mm	0.694	0.075	0.770	0.055	0.084	0.036	0.092	0.092	0.825	0.862	0.946	0.898
DC_66A+n38A	Ant.3	0.196	22.00	19.50	Ant.5	0.059	21.00	20.00	Front Side 15mm	0.110	0.047	0.157	0.036	0.045	0.022	0.016	0.016	0.193	0.173	0.218	0.195
		0.258	22.00	19.50		0.095	21.00	20.00	Back Side 15mm	0.145	0.075	0.221	0.055	0.084	0.036	0.092	0.092	0.276	0.313	0.397	0.349
DC_66A+n38A	Ant.4	0.179	22.50	20.00	Ant.5	0.059	21.00	20.00	Front Side 15mm	0.101	0.047	0.148	0.036	0.045	0.022	0.016	0.016	0.184	0.164	0.209	0.186
		0.235	22.50	20.00		0.095	21.00	20.00	Back Side 15mm	0.132	0.075	0.208	0.055	0.084	0.036	0.092	0.092	0.263	0.300	0.384	0.336
DC_4A+n41A	Ant.3	0.177	22.00	19.50	Ant.2	0.295	25.50	23.50	Front Side 15mm	0.100	0.186	0.286	0.036	0.045	0.022	0.016	0.016	0.322	0.302	0.347	0.324
		0.231	22.00	19.50		0.471	25.50	23.50	Back Side 15mm	0.130	0.297	0.427	0.055	0.084	0.036	0.092	0.092	0.482	0.519	0.603	0.555
DC_4A+n41A	Ant.4	0.156	22.50	20.00	Ant.2	0.295	25.50	23.50	Front Side 15mm	0.088	0.186	0.274	0.036	0.045	0.022	0.016	0.016	0.310	0.290	0.335	0.312
		0.183	22.50	20.00		0.471	25.50	23.50	Back Side 15mm	0.103	0.297	0.400	0.055	0.084	0.036	0.092	0.092	0.455	0.492	0.576	0.528
DC_4A+n41A	Ant.5	0.067	24.00	24.00	Ant.2	0.295	25.50	23.50	Front Side 15mm	0.067	0.186	0.253	0.036	0.045	0.022	0.016	0.016	0.289	0.269	0.314	0.291
		0.106	24.00	24.00		0.471	25.50	23.50	Back Side 15mm	0.106	0.297	0.403	0.055	0.084	0.036	0.092	0.092	0.458	0.495	0.579	0.531
DC_4A+n41A	Ant.2	0.798	25.50	24.50	Ant.3	0.130	21.50	19.50	Front Side 15mm	0.634	0.082	0.716	0.036	0.045	0.022	0.016	0.016	0.752	0.732	0.777	0.754
		1.080	25.50	24.50		0.163	21.50	19.50	Back Side 15mm	0.858	0.103	0.961	0.055	0.084	0.036	0.092	0.092	1.016	1.053	1.137	1.089
DC_4A+n41A	Ant.4	0.156	22.50	20.00	Ant.3	0.130	21.50	19.50	Front Side 15mm	0.088	0.082	0.170	0.036	0.045	0.022	0.016	0.016	0.206	0.186	0.231	0.208
		0.183	22.50	20.00		0.163	21.50	19.50	Back Side 15mm	0.103	0.103	0.206	0.055	0.084	0.036	0.092	0.092	0.261	0.298	0.382	0.334
DC_4A+n41A	Ant.5	0.067	24.00	24.00	Ant.3	0.130	21.50	19.50	Front Side 15mm	0.067	0.082	0.149	0.036	0.045	0.022	0.016	0.016	0.185	0.165	0.210	0.187
		0.106	24.00	24.00		0.163	21.50	19.50	Back Side 15mm	0.106	0.103	0.209	0.055	0.084	0.036	0.092	0.092	0.264	0.301	0.385	0.337
DC_4A+n41A	Ant.2	0.798	25.50	24.50	Ant.4	0.083	21.00	20.50	Front Side 15mm	0.634	0.074	0.708	0.036	0.045	0.022	0.016	0.016	0.744	0.724	0.769	0.746
		1.080	25.50	24.50		0.141	21.00	20.50	Back Side 15mm	0.858	0.126	0.984	0.055	0.084	0.036	0.092	0.092	1.039	1.076	1.160	1.112
DC_4A+n41A	Ant.3	0.177	22.00	19.50	Ant.4	0.083	21.00	20.50	Front Side 15mm	0.100	0.074	0.174	0.036	0.045	0.022	0.016	0.016	0.210	0.190	0.235	0.212
		0.231	22.00	19.50		0.141	21.00	20.50	Back Side 15mm	0.130	0.126	0.256	0.055	0.084	0.036	0.092	0.092	0.311	0.348	0.432	0.384
DC_4A+n41A	Ant.5	0.067	24.00	24.00	Ant.4	0.083	21.00	20.50	Front Side 15mm	0.067	0.074	0.141	0.036	0.045	0.022	0.016	0.016	0.177	0.157	0.202	0.179
		0.106	24.00	24.00		0.141	21.00	20.50	Back Side 15mm	0.106	0.126	0.232	0.055	0.084	0.036	0.092	0.092	0.287	0.324	0.408	0.360
DC_4A+n41A	Ant.2	0.798	25.50	24.50	Ant.5	0.055	21.00	20.00	Front Side 15mm	0.634	0.044	0.678	0.036	0.045	0.022	0.016	0.016	0.714	0.694	0.739	0.716
		1.080	25.50	24.50		0.083	21.00	20.00	Back Side 15mm	0.858	0.066	0.924	0.055	0.084	0.036	0.092	0.092	0.979	1.016	1.100	1.052
DC_4A+n41A	Ant.3	0.177	22.00	19.50	Ant.5	0.055	21.00	20.00	Front Side 15mm	0.100	0.044	0.143	0.036	0.045	0.022	0.016	0.016	0.179	0.159	0.204	0.181
		0.231	22.00	19.50		0.083	21.00	20.00	Back Side 15mm	0.130	0.066	0.196	0.055	0.084	0.036	0.092	0.092	0.251	0.288	0.372	0.324
DC_4A+n41A	Ant.4	0.156	22.50	20.00	Ant.5	0.055	21.00	20.00	Front Side 15mm	0.088	0.044	0.131	0.036	0.045	0.022	0.016	0.016	0.167	0.147	0.192	0.169
		0.183	22.50	20.00		0.083	21.00	20.00	Back Side 15mm	0.103	0.066	0.169	0.055	0.084	0.036	0.092	0.092	0.224	0.261	0.345	0.297
DC_66A+n41A	Ant.3	0.196	22.00	19.50	Ant.2	0.295	25.50	23.50	Front Side 15mm	0.110	0.186	0.296	0.036	0.045	0.022	0.016	0.016	0.332	0.312	0.357	0.334
		0.258	22.00	19.50		0.471	25.50	23.50	Back Side 15mm	0.145	0.297	0.442	0.055	0.084	0.036	0.092	0.092	0.497	0.534	0.618	0.570
DC_66A+n41A	Ant.4	0.179	22.50	20.00	Ant.2	0.295	25.50	23.50	Front Side 15mm	0.101	0.186	0.287	0.036	0.045	0.022	0.016	0.016	0.323	0.303	0.348	0.325
		0.235	22.50	20.00		0.471	25.50	23.50	Back Side 15mm	0.132	0.297	0.429	0.055	0.084	0.036	0.092	0.092	0.484	0.521	0.605	0.557
DC_66A+n41A	Ant.5	0.064	24.00	24.00	Ant.2	0.295	25.50	23.50	Front Side 15mm	0.064	0.186	0.250	0.036	0.045	0.022	0.016	0.016	0.286	0.266	0.311	0.288
		0.101	24.00	24.00		0.471	25.50	23.50	Back Side 15mm	0.101	0.297	0.398	0.055	0.084	0.036	0.092	0.092	0.453	0.490	0.574	0.526
DC_66A+n41A	Ant.2	0.695	25.50	24.50	Ant.3	0.130	21.50	19.50	Front Side 15mm	0.552	0.082	0.634	0.036	0.045	0.022	0.016	0.016	0.670	0.650	0.695	0.672

		0.874	25.50	24.50		0.163	21.50	19.50	Back Side 15mm	0.694	0.103	0.797	0.055	0.084	0.036	0.092	0.092	0.852	0.889	0.973	0.925
DC_66A+n41A	Ant.4	0.179	22.50	20.00	Ant.3	0.130	21.50	19.50	Front Side 15mm	0.101	0.082	0.183	0.036	0.045	0.022	0.016	0.016	0.219	0.199	0.244	0.221
		0.235	22.50	20.00		0.163	21.50	19.50	Back Side 15mm	0.132	0.103	0.235	0.055	0.084	0.036	0.092	0.092	0.290	0.327	0.411	0.363
DC_66A+n41A	Ant.5	0.064	24.00	24.00	Ant.3	0.130	21.50	19.50	Front Side 15mm	0.064	0.082	0.146	0.036	0.045	0.022	0.016	0.016	0.182	0.162	0.207	0.184
		0.101	24.00	24.00		0.163	21.50	19.50	Back Side 15mm	0.101	0.103	0.204	0.055	0.084	0.036	0.092	0.092	0.259	0.296	0.380	0.332
DC_66A+n41A	Ant.2	0.695	25.50	24.50	Ant.4	0.083	21.00	20.50	Front Side 15mm	0.552	0.074	0.626	0.036	0.045	0.022	0.016	0.016	0.662	0.642	0.687	0.664
		0.874	25.50	24.50		0.141	21.00	20.50	Back Side 15mm	0.694	0.126	0.820	0.055	0.084	0.036	0.092	0.092	0.875	0.912	0.996	0.948
DC_66A+n41A	Ant.3	0.196	22.00	19.50	Ant.4	0.083	21.00	20.50	Front Side 15mm	0.110	0.074	0.184	0.036	0.045	0.022	0.016	0.016	0.220	0.200	0.245	0.222
		0.258	22.00	19.50		0.141	21.00	20.50	Back Side 15mm	0.145	0.126	0.271	0.055	0.084	0.036	0.092	0.092	0.326	0.363	0.447	0.399
DC_66A+n41A	Ant.5	0.064	24.00	24.00	Ant.4	0.083	21.00	20.50	Front Side 15mm	0.064	0.074	0.138	0.036	0.045	0.022	0.016	0.016	0.174	0.154	0.199	0.176
		0.101	24.00	24.00		0.141	21.00	20.50	Back Side 15mm	0.101	0.126	0.227	0.055	0.084	0.036	0.092	0.092	0.282	0.319	0.403	0.355
DC_66A+n41A	Ant.2	0.695	25.50	24.50	Ant.5	0.055	21.00	20.00	Front Side 15mm	0.552	0.044	0.596	0.036	0.045	0.022	0.016	0.016	0.632	0.612	0.657	0.634
		0.874	25.50	24.50		0.083	21.00	20.00	Back Side 15mm	0.694	0.066	0.760	0.055	0.084	0.036	0.092	0.092	0.815	0.852	0.936	0.888
DC_66A+n41A	Ant.3	0.196	22.00	19.50	Ant.5	0.055	21.00	20.00	Front Side 15mm	0.110	0.044	0.154	0.036	0.045	0.022	0.016	0.016	0.190	0.170	0.215	0.192
		0.258	22.00	19.50		0.083	21.00	20.00	Back Side 15mm	0.145	0.066	0.211	0.055	0.084	0.036	0.092	0.092	0.266	0.303	0.387	0.339
DC_66A+n41A	Ant.4	0.179	22.50	20.00	Ant.5	0.055	21.00	20.00	Front Side 15mm	0.101	0.044	0.144	0.036	0.045	0.022	0.016	0.016	0.180	0.160	0.205	0.182
		0.235	22.50	20.00		0.083	21.00	20.00	Back Side 15mm	0.132	0.066	0.198	0.055	0.084	0.036	0.092	0.092	0.253	0.290	0.374	0.326
DC_2A+n77A	Ant.3	0.143	22.00	20.00	Ant.6	0.095	20.00	17.50	Front Side 15mm	0.090	0.053	0.144	0.036	0.045	0.022	0.016	0.016	0.180	0.160	0.205	0.182
		0.203	22.00	20.00		0.153	20.00	17.50	Back Side 15mm	0.128	0.086	0.214	0.055	0.084	0.036	0.092	0.092	0.269	0.306	0.390	0.342
DC_2A+n77A	Ant.4	0.079	24.50	23.50	Ant.6	0.095	20.00	17.50	Front Side 15mm	0.063	0.053	0.116	0.036	0.045	0.022	0.016	0.016	0.152	0.132	0.177	0.154
		0.101	24.50	23.50		0.153	20.00	17.50	Back Side 15mm	0.080	0.086	0.166	0.055	0.084	0.036	0.092	0.092	0.221	0.258	0.342	0.294
DC_2A+n77A	Ant.3	0.143	22.00	20.00	Ant.7	0.647	24.50	19.50	Front Side 15mm	0.090	0.205	0.295	0.036	0.045	0.022	0.016	0.016	0.331	0.311	0.356	0.333
		0.203	22.00	20.00		0.671	24.50	19.50	Back Side 15mm	0.128	0.212	0.340	0.055	0.084	0.036	0.092	0.092	0.395	0.432	0.516	0.468
DC_2A+n77A	Ant.4	0.079	24.50	23.50	Ant.7	0.647	24.50	19.50	Front Side 15mm	0.063	0.205	0.267	0.036	0.045	0.022	0.016	0.016	0.303	0.283	0.328	0.305
		0.101	24.50	23.50		0.671	24.50	19.50	Back Side 15mm	0.080	0.212	0.292	0.055	0.084	0.036	0.092	0.092	0.347	0.384	0.468	0.420
DC_2A+n77A	Ant.3	0.143	22.00	20.00	Ant.8	0.040	20.00	20.00	Front Side 15mm	0.090	0.040	0.130	0.036	0.045	0.022	0.016	0.016	0.166	0.146	0.191	0.168
		0.203	22.00	20.00		0.113	20.00	20.00	Back Side 15mm	0.128	0.113	0.241	0.055	0.084	0.036	0.092	0.092	0.296	0.333	0.417	0.369
DC_2A+n77A	Ant.4	0.079	24.50	23.50	Ant.8	0.040	20.00	20.00	Front Side 15mm	0.063	0.040	0.103	0.036	0.045	0.022	0.016	0.016	0.139	0.119	0.164	0.141
		0.101	24.50	23.50		0.113	20.00	20.00	Back Side 15mm	0.080	0.113	0.193	0.055	0.084	0.036	0.092	0.092	0.248	0.285	0.369	0.321
DC_2A+n77A	Ant.3	0.143	22.00	20.00	Ant.9	0.076	21.50	20.00	Front Side 15mm	0.090	0.054	0.144	0.036	0.045	0.022	0.016	0.016	0.180	0.160	0.205	0.182
		0.203	22.00	20.00		0.116	21.50	20.00	Back Side 15mm	0.128	0.082	0.210	0.055	0.084	0.036	0.092	0.092	0.265	0.302	0.386	0.338
DC_2A+n77A	Ant.4	0.079	24.50	23.50	Ant.9	0.076	21.50	20.00	Front Side 15mm	0.063	0.054	0.117	0.036	0.045	0.022	0.016	0.016	0.153	0.133	0.178	0.155
		0.101	24.50	23.50		0.116	21.50	20.00	Back Side 15mm	0.080	0.082	0.162	0.055	0.084	0.036	0.092	0.092	0.217	0.254	0.338	0.290
DC_2A+n78A	Ant.3	0.143	22.00	20.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.090	0.076	0.167	0.036	0.045	0.022	0.016	0.016	0.203	0.183	0.228	0.205
		0.203	22.00	20.00		0.169	19.00	17.50	Back Side 15mm	0.128	0.120	0.248	0.055	0.084	0.036	0.092	0.092	0.303	0.340	0.424	0.376
DC_2A+n78A	Ant.4	0.079	24.50	23.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.063	0.076	0.139	0.036	0.045	0.022	0.016	0.016	0.175	0.155	0.200	0.177
		0.101	24.50	23.50		0.169	19.00	17.50	Back Side 15mm	0.080	0.120	0.200	0.055	0.084	0.036	0.092	0.092	0.255	0.292	0.376	0.328
DC_2A+n78A	Ant.3	0.143	22.00	20.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.090	0.211	0.301	0.036	0.045	0.022	0.016	0.016	0.337	0.317	0.362	0.339
		0.203	22.00	20.00		0.520	24.50	19.50	Back Side 15mm	0.128	0.164	0.293	0.055	0.084	0.036	0.092	0.092	0.348	0.385	0.469	0.421
DC_2A+n78A	Ant.4	0.079	24.50	23.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.063	0.211	0.274	0.036	0.045	0.022	0.016	0.016	0.310	0.290	0.335	0.312
		0.101	24.50	23.50		0.520	24.50	19.50	Back Side 15mm	0.080	0.164	0.245	0.055	0.084	0.036	0.092	0.092	0.300	0.337	0.421	0.373
DC_2A+n78A	Ant.3	0.143	22.00	20.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.090	0.025	0.115	0.036	0.045	0.022	0.016	0.016	0.151	0.131	0.176	0.153
		0.203	22.00	20.00		0.089	20.00	20.00	Back Side 15mm	0.128	0.089	0.217	0.055	0.084	0.036	0.092	0.092	0.272	0.309	0.393	0.345

DC_2A+n78A	Ant.4	0.079	24.50	23.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.063	0.025	0.088	0.036	0.045	0.022	0.016	0.016	0.124	0.104	0.149	0.126
		0.101	24.50	23.50		0.089	20.00	20.00	Back Side 15mm	0.080	0.089	0.169	0.055	0.084	0.036	0.092	0.092	0.224	0.261	0.345	0.297
DC_2A+n78A	Ant.3	0.143	22.00	20.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.090	0.137	0.227	0.036	0.045	0.022	0.016	0.016	0.263	0.243	0.288	0.265
		0.203	22.00	20.00		0.067	18.50	18.50	Back Side 15mm	0.128	0.067	0.195	0.055	0.084	0.036	0.092	0.092	0.250	0.287	0.371	0.323
DC_2A+n78A	Ant.4	0.079	24.50	23.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.063	0.137	0.200	0.036	0.045	0.022	0.016	0.016	0.236	0.216	0.261	0.238
		0.101	24.50	23.50		0.067	18.50	18.50	Back Side 15mm	0.080	0.067	0.147	0.055	0.084	0.036	0.092	0.092	0.202	0.239	0.323	0.275
DC_4A+n78A	Ant.2	0.798	25.50	24.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.634	0.076	0.710	0.036	0.045	0.022	0.016	0.016	0.746	0.726	0.771	0.748
		1.080	25.50	24.50		0.169	19.00	17.50	Back Side 15mm	0.858	0.120	0.978	0.055	0.084	0.036	0.092	0.092	1.033	1.070	1.154	1.106
DC_4A+n78A	Ant.3	0.177	22.00	19.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.100	0.076	0.176	0.036	0.045	0.022	0.016	0.016	0.212	0.192	0.237	0.214
		0.231	22.00	19.50		0.169	19.00	17.50	Back Side 15mm	0.130	0.120	0.250	0.055	0.084	0.036	0.092	0.092	0.305	0.342	0.426	0.378
DC_4A+n78A	Ant.4	0.156	22.50	20.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.088	0.076	0.164	0.036	0.045	0.022	0.016	0.016	0.200	0.180	0.225	0.202
		0.183	22.50	20.00		0.169	19.00	17.50	Back Side 15mm	0.103	0.120	0.223	0.055	0.084	0.036	0.092	0.092	0.278	0.315	0.399	0.351
DC_4A+n78A	Ant.5	0.067	24.00	24.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.067	0.076	0.143	0.036	0.045	0.022	0.016	0.016	0.179	0.159	0.204	0.181
		0.106	24.00	24.00		0.169	19.00	17.50	Back Side 15mm	0.106	0.120	0.226	0.055	0.084	0.036	0.092	0.092	0.281	0.318	0.402	0.354
DC_4A+n78A	Ant.2	0.798	25.50	24.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.634	0.211	0.845	0.036	0.045	0.022	0.016	0.016	0.881	0.861	0.906	0.883
		1.080	25.50	24.50		0.520	24.50	19.50	Back Side 15mm	0.858	0.164	1.022	0.055	0.084	0.036	0.092	0.092	1.077	1.114	1.198	1.150
DC_4A+n78A	Ant.3	0.177	22.00	19.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.100	0.211	0.310	0.036	0.045	0.022	0.016	0.016	0.346	0.326	0.371	0.348
		0.231	22.00	19.50		0.520	24.50	19.50	Back Side 15mm	0.130	0.164	0.294	0.055	0.084	0.036	0.092	0.092	0.349	0.386	0.470	0.422
DC_4A+n78A	Ant.4	0.156	22.50	20.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.088	0.211	0.299	0.036	0.045	0.022	0.016	0.016	0.335	0.315	0.360	0.337
		0.183	22.50	20.00		0.520	24.50	19.50	Back Side 15mm	0.103	0.164	0.267	0.055	0.084	0.036	0.092	0.092	0.322	0.359	0.443	0.395
DC_4A+n78A	Ant.5	0.067	24.00	24.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.067	0.211	0.278	0.036	0.045	0.022	0.016	0.016	0.314	0.294	0.339	0.316
		0.106	24.00	24.00		0.520	24.50	19.50	Back Side 15mm	0.106	0.164	0.270	0.055	0.084	0.036	0.092	0.092	0.325	0.362	0.446	0.398
DC_4A+n78A	Ant.2	0.798	25.50	24.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.634	0.025	0.659	0.036	0.045	0.022	0.016	0.016	0.695	0.675	0.720	0.697
		1.080	25.50	24.50		0.089	20.00	20.00	Back Side 15mm	0.858	0.089	0.947	0.055	0.084	0.036	0.092	0.092	1.002	1.039	1.123	1.075
DC_4A+n78A	Ant.3	0.177	22.00	19.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.100	0.025	0.125	0.036	0.045	0.022	0.016	0.016	0.161	0.141	0.186	0.163
		0.231	22.00	19.50		0.089	20.00	20.00	Back Side 15mm	0.130	0.089	0.219	0.055	0.084	0.036	0.092	0.092	0.274	0.311	0.395	0.347
DC_4A+n78A	Ant.4	0.156	22.50	20.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.088	0.025	0.113	0.036	0.045	0.022	0.016	0.016	0.149	0.129	0.174	0.151
		0.183	22.50	20.00		0.089	20.00	20.00	Back Side 15mm	0.103	0.089	0.192	0.055	0.084	0.036	0.092	0.092	0.247	0.284	0.368	0.320
DC_4A+n78A	Ant.5	0.067	24.00	24.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.067	0.025	0.092	0.036	0.045	0.022	0.016	0.016	0.128	0.108	0.153	0.130
		0.106	24.00	24.00		0.089	20.00	20.00	Back Side 15mm	0.106	0.089	0.195	0.055	0.084	0.036	0.092	0.092	0.250	0.287	0.371	0.323
DC_4A+n78A	Ant.2	0.798	25.50	24.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.634	0.137	0.771	0.036	0.045	0.022	0.016	0.016	0.807	0.787	0.832	0.809
		1.080	25.50	24.50		0.067	18.50	18.50	Back Side 15mm	0.858	0.067	0.925	0.055	0.084	0.036	0.092	0.092	0.980	1.017	1.101	1.053
DC_4A+n78A	Ant.3	0.177	22.00	19.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.100	0.137	0.237	0.036	0.045	0.022	0.016	0.016	0.273	0.253	0.298	0.275
		0.231	22.00	19.50		0.067	18.50	18.50	Back Side 15mm	0.130	0.067	0.197	0.055	0.084	0.036	0.092	0.092	0.252	0.289	0.373	0.325
DC_4A+n78A	Ant.4	0.156	22.50	20.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.088	0.137	0.225	0.036	0.045	0.022	0.016	0.016	0.261	0.241	0.286	0.263
		0.183	22.50	20.00		0.067	18.50	18.50	Back Side 15mm	0.103	0.067	0.170	0.055	0.084	0.036	0.092	0.092	0.225	0.262	0.346	0.298
DC_4A+n78A	Ant.5	0.067	24.00	24.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.067	0.137	0.204	0.036	0.045	0.022	0.016	0.016	0.240	0.220	0.265	0.242
		0.106	24.00	24.00		0.067	18.50	18.50	Back Side 15mm	0.106	0.067	0.173	0.055	0.084	0.036	0.092	0.092	0.228	0.265	0.349	0.301
DC_5A+n78A	Ant.0	0.209	25.50	24.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.166	0.076	0.242	0.036	0.045	0.022	0.016	0.016	0.278	0.258	0.303	0.280
		0.259	25.50	24.50		0.169	19.00	17.50	Back Side 15mm	0.206	0.120	0.325	0.055	0.084	0.036	0.092	0.092	0.380	0.417	0.501	0.453
DC_5A+n78A	Ant.1	0.181	25.00	23.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.128	0.076	0.205	0.036	0.045	0.022	0.016	0.016	0.241	0.221	0.266	0.243
		0.200	25.00	23.50		0.169	19.00	17.50	Back Side 15mm	0.142	0.120	0.261	0.055	0.084	0.036	0.092	0.092	0.316	0.353	0.437	0.389
DC_5A+n78A	Ant.0	0.209	25.50	24.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.166	0.211	0.377	0.036	0.045	0.022	0.016	0.016	0.413	0.393	0.438	0.415

		0.259	25.50	24.50		0.520	24.50	19.50	Back Side 15mm	0.206	0.164	0.370	0.055	0.084	0.036	0.092	0.092	0.425	0.462	0.546	0.498
DC_5A+n78A	Ant.1	0.181	25.00	23.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.128	0.211	0.339	0.036	0.045	0.022	0.016	0.016	0.375	0.355	0.400	0.377
		0.200	25.00	23.50		0.520	24.50	19.50	Back Side 15mm	0.142	0.164	0.306	0.055	0.084	0.036	0.092	0.092	0.361	0.398	0.482	0.434
DC_5A+n78A	Ant.0	0.209	25.50	24.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.166	0.025	0.191	0.036	0.045	0.022	0.016	0.016	0.227	0.207	0.252	0.229
		0.259	25.50	24.50		0.089	20.00	20.00	Back Side 15mm	0.206	0.089	0.295	0.055	0.084	0.036	0.092	0.092	0.350	0.387	0.471	0.423
DC_5A+n78A	Ant.1	0.181	25.00	23.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.128	0.025	0.153	0.036	0.045	0.022	0.016	0.016	0.189	0.169	0.214	0.191
		0.200	25.00	23.50		0.089	20.00	20.00	Back Side 15mm	0.142	0.089	0.231	0.055	0.084	0.036	0.092	0.092	0.286	0.323	0.407	0.359
DC_5A+n78A	Ant.0	0.209	25.50	24.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.166	0.137	0.303	0.036	0.045	0.022	0.016	0.016	0.339	0.319	0.364	0.341
		0.259	25.50	24.50		0.067	18.50	18.50	Back Side 15mm	0.206	0.067	0.273	0.055	0.084	0.036	0.092	0.092	0.328	0.365	0.449	0.401
DC_5A+n78A	Ant.1	0.181	25.00	23.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.128	0.137	0.265	0.036	0.045	0.022	0.016	0.016	0.301	0.281	0.326	0.303
		0.200	25.00	23.50		0.067	18.50	18.50	Back Side 15mm	0.142	0.067	0.209	0.055	0.084	0.036	0.092	0.092	0.264	0.301	0.385	0.337
DC_7A+n78A	Ant.2	0.460	25.50	23.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.290	0.076	0.367	0.036	0.045	0.022	0.016	0.016	0.403	0.383	0.428	0.405
		0.654	25.50	23.50		0.169	19.00	17.50	Back Side 15mm	0.413	0.120	0.532	0.055	0.084	0.036	0.092	0.092	0.587	0.624	0.708	0.660
DC_7A+n78A	Ant.3	0.197	21.00	19.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.124	0.076	0.201	0.036	0.045	0.022	0.016	0.016	0.237	0.217	0.262	0.239
		0.255	21.00	19.00		0.169	19.00	17.50	Back Side 15mm	0.161	0.120	0.281	0.055	0.084	0.036	0.092	0.092	0.336	0.373	0.457	0.409
DC_7A+n78A	Ant.4	0.083	18.00	18.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.083	0.076	0.159	0.036	0.045	0.022	0.016	0.016	0.195	0.175	0.220	0.197
		0.130	18.00	18.00		0.169	19.00	17.50	Back Side 15mm	0.130	0.120	0.250	0.055	0.084	0.036	0.092	0.092	0.305	0.342	0.426	0.378
DC_7A+n78A	Ant.5	0.076	20.00	16.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.030	0.076	0.107	0.036	0.045	0.022	0.016	0.016	0.143	0.123	0.168	0.145
		0.128	20.00	16.00		0.169	19.00	17.50	Back Side 15mm	0.051	0.120	0.171	0.055	0.084	0.036	0.092	0.092	0.226	0.263	0.347	0.299
DC_7A+n78A	Ant.2	0.460	25.50	23.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.290	0.211	0.501	0.036	0.045	0.022	0.016	0.016	0.537	0.517	0.562	0.539
		0.654	25.50	23.50		0.520	24.50	19.50	Back Side 15mm	0.413	0.164	0.577	0.055	0.084	0.036	0.092	0.092	0.632	0.669	0.753	0.705
DC_7A+n78A	Ant.3	0.197	21.00	19.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.124	0.211	0.335	0.036	0.045	0.022	0.016	0.016	0.371	0.351	0.396	0.373
		0.255	21.00	19.00		0.520	24.50	19.50	Back Side 15mm	0.161	0.164	0.325	0.055	0.084	0.036	0.092	0.092	0.380	0.417	0.501	0.453
DC_7A+n78A	Ant.4	0.083	18.00	18.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.083	0.211	0.294	0.036	0.045	0.022	0.016	0.016	0.330	0.310	0.355	0.332
		0.130	18.00	18.00		0.520	24.50	19.50	Back Side 15mm	0.130	0.164	0.294	0.055	0.084	0.036	0.092	0.092	0.349	0.386	0.470	0.422
DC_7A+n78A	Ant.5	0.076	20.00	16.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.030	0.211	0.241	0.036	0.045	0.022	0.016	0.016	0.277	0.257	0.302	0.279
		0.128	20.00	16.00		0.520	24.50	19.50	Back Side 15mm	0.051	0.164	0.215	0.055	0.084	0.036	0.092	0.092	0.270	0.307	0.391	0.343
DC_7A+n78A	Ant.2	0.460	25.50	23.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.290	0.025	0.315	0.036	0.045	0.022	0.016	0.016	0.351	0.331	0.376	0.353
		0.654	25.50	23.50		0.089	20.00	20.00	Back Side 15mm	0.413	0.089	0.502	0.055	0.084	0.036	0.092	0.092	0.557	0.594	0.678	0.630
DC_7A+n78A	Ant.3	0.197	21.00	19.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.124	0.025	0.149	0.036	0.045	0.022	0.016	0.016	0.185	0.165	0.210	0.187
		0.255	21.00	19.00		0.089	20.00	20.00	Back Side 15mm	0.161	0.089	0.250	0.055	0.084	0.036	0.092	0.092	0.305	0.342	0.426	0.378
DC_7A+n78A	Ant.4	0.083	18.00	18.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.083	0.025	0.108	0.036	0.045	0.022	0.016	0.016	0.144	0.124	0.169	0.146
		0.130	18.00	18.00		0.089	20.00	20.00	Back Side 15mm	0.130	0.089	0.219	0.055	0.084	0.036	0.092	0.092	0.274	0.311	0.395	0.347
DC_7A+n78A	Ant.5	0.076	20.00	16.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.030	0.025	0.055	0.036	0.045	0.022	0.016	0.016	0.091	0.071	0.116	0.093
		0.128	20.00	16.00		0.089	20.00	20.00	Back Side 15mm	0.051	0.089	0.140	0.055	0.084	0.036	0.092	0.092	0.195	0.232	0.316	0.268
DC_7A+n78A	Ant.2	0.460	25.50	23.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.290	0.137	0.427	0.036	0.045	0.022	0.016	0.016	0.463	0.443	0.488	0.465
		0.654	25.50	23.50		0.067	18.50	18.50	Back Side 15mm	0.413	0.067	0.480	0.055	0.084	0.036	0.092	0.092	0.535	0.572	0.656	0.608
DC_7A+n78A	Ant.3	0.197	21.00	19.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.124	0.137	0.261	0.036	0.045	0.022	0.016	0.016	0.297	0.277	0.322	0.299
		0.255	21.00	19.00		0.067	18.50	18.50	Back Side 15mm	0.161	0.067	0.228	0.055	0.084	0.036	0.092	0.092	0.283	0.320	0.404	0.356
DC_7A+n78A	Ant.4	0.083	18.00	18.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.083	0.137	0.220	0.036	0.045	0.022	0.016	0.016	0.256	0.236	0.281	0.258
		0.130	18.00	18.00		0.067	18.50	18.50	Back Side 15mm	0.130	0.067	0.197	0.055	0.084	0.036	0.092	0.092	0.252	0.289	0.373	0.325
DC_7A+n78A	Ant.5	0.076	20.00	16.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.030	0.137	0.167	0.036	0.045	0.022	0.016	0.016	0.203	0.183	0.228	0.205
		0.128	20.00	16.00		0.067	18.50	18.50	Back Side 15mm	0.051	0.067	0.118	0.055	0.084	0.036	0.092	0.092	0.173	0.210	0.294	0.246

DC_26A+n78A	Ant.0	0.214	25.50	25.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.214	0.076	0.290	0.036	0.045	0.022	0.016	0.016	0.326	0.306	0.351	0.328
		0.252	25.50	25.50		0.169	19.00	17.50	Back Side 15mm	0.252	0.120	0.372	0.055	0.084	0.036	0.092	0.092	0.427	0.464	0.548	0.500
DC_26A+n78A	Ant.1	0.231	25.50	23.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.146	0.076	0.222	0.036	0.045	0.022	0.016	0.016	0.258	0.238	0.283	0.260
		0.253	25.50	23.50		0.169	19.00	17.50	Back Side 15mm	0.160	0.120	0.279	0.055	0.084	0.036	0.092	0.092	0.334	0.371	0.455	0.407
DC_26A+n78A	Ant.0	0.214	25.50	25.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.214	0.211	0.425	0.036	0.045	0.022	0.016	0.016	0.461	0.441	0.486	0.463
		0.252	25.50	25.50		0.520	24.50	19.50	Back Side 15mm	0.252	0.164	0.416	0.055	0.084	0.036	0.092	0.092	0.471	0.508	0.592	0.544
DC_26A+n78A	Ant.1	0.231	25.50	23.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.146	0.211	0.357	0.036	0.045	0.022	0.016	0.016	0.393	0.373	0.418	0.395
		0.253	25.50	23.50		0.520	24.50	19.50	Back Side 15mm	0.160	0.164	0.324	0.055	0.084	0.036	0.092	0.092	0.379	0.416	0.500	0.452
DC_26A+n78A	Ant.0	0.214	25.50	25.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.214	0.025	0.239	0.036	0.045	0.022	0.016	0.016	0.275	0.255	0.300	0.277
		0.252	25.50	25.50		0.089	20.00	20.00	Back Side 15mm	0.252	0.089	0.341	0.055	0.084	0.036	0.092	0.092	0.396	0.433	0.517	0.469
DC_26A+n78A	Ant.1	0.231	25.50	23.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.146	0.025	0.171	0.036	0.045	0.022	0.016	0.016	0.207	0.187	0.232	0.209
		0.253	25.50	23.50		0.089	20.00	20.00	Back Side 15mm	0.160	0.089	0.249	0.055	0.084	0.036	0.092	0.092	0.304	0.341	0.425	0.377
DC_26A+n78A	Ant.0	0.214	25.50	25.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.214	0.137	0.351	0.036	0.045	0.022	0.016	0.016	0.387	0.367	0.412	0.389
		0.252	25.50	25.50		0.067	18.50	18.50	Back Side 15mm	0.252	0.067	0.319	0.055	0.084	0.036	0.092	0.092	0.374	0.411	0.495	0.447
DC_26A+n78A	Ant.1	0.231	25.50	23.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.146	0.137	0.283	0.036	0.045	0.022	0.016	0.016	0.319	0.299	0.344	0.321
		0.253	25.50	23.50		0.067	18.50	18.50	Back Side 15mm	0.160	0.067	0.227	0.055	0.084	0.036	0.092	0.092	0.282	0.319	0.403	0.355
DC_66A+n78A	Ant.2	0.695	25.50	24.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.552	0.076	0.629	0.036	0.045	0.022	0.016	0.016	0.665	0.645	0.690	0.667
		0.874	25.50	24.50		0.169	19.00	17.50	Back Side 15mm	0.694	0.120	0.814	0.055	0.084	0.036	0.092	0.092	0.869	0.906	0.990	0.942
DC_66A+n78A	Ant.3	0.196	22.00	19.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.110	0.076	0.187	0.036	0.045	0.022	0.016	0.016	0.223	0.203	0.248	0.225
		0.258	22.00	19.50		0.169	19.00	17.50	Back Side 15mm	0.145	0.120	0.265	0.055	0.084	0.036	0.092	0.092	0.320	0.357	0.441	0.393
DC_66A+n78A	Ant.4	0.179	22.50	20.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.101	0.076	0.177	0.036	0.045	0.022	0.016	0.016	0.213	0.193	0.238	0.215
		0.235	22.50	20.00		0.169	19.00	17.50	Back Side 15mm	0.132	0.120	0.252	0.055	0.084	0.036	0.092	0.092	0.307	0.344	0.428	0.380
DC_66A+n78A	Ant.5	0.064	24.00	24.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.064	0.076	0.140	0.036	0.045	0.022	0.016	0.016	0.176	0.156	0.201	0.178
		0.101	24.00	24.00		0.169	19.00	17.50	Back Side 15mm	0.101	0.120	0.221	0.055	0.084	0.036	0.092	0.092	0.276	0.313	0.397	0.349
DC_66A+n78A	Ant.2	0.695	25.50	24.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.552	0.211	0.763	0.036	0.045	0.022	0.016	0.016	0.799	0.779	0.824	0.801
		0.874	25.50	24.50		0.520	24.50	19.50	Back Side 15mm	0.694	0.164	0.859	0.055	0.084	0.036	0.092	0.092	0.914	0.951	1.035	0.987
DC_66A+n78A	Ant.3	0.196	22.00	19.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.110	0.211	0.321	0.036	0.045	0.022	0.016	0.016	0.357	0.337	0.382	0.359
		0.258	22.00	19.50		0.520	24.50	19.50	Back Side 15mm	0.145	0.164	0.310	0.055	0.084	0.036	0.092	0.092	0.365	0.402	0.486	0.438
DC_66A+n78A	Ant.4	0.179	22.50	20.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.101	0.211	0.312	0.036	0.045	0.022	0.016	0.016	0.348	0.328	0.373	0.350
		0.235	22.50	20.00		0.520	24.50	19.50	Back Side 15mm	0.132	0.164	0.297	0.055	0.084	0.036	0.092	0.092	0.352	0.389	0.473	0.425
DC_66A+n78A	Ant.5	0.064	24.00	24.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.064	0.211	0.275	0.036	0.045	0.022	0.016	0.016	0.311	0.291	0.336	0.313
		0.101	24.00	24.00		0.520	24.50	19.50	Back Side 15mm	0.101	0.164	0.265	0.055	0.084	0.036	0.092	0.092	0.320	0.357	0.441	0.393
DC_66A+n78A	Ant.2	0.695	25.50	24.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.552	0.025	0.577	0.036	0.045	0.022	0.016	0.016	0.613	0.593	0.638	0.615
		0.874	25.50	24.50		0.089	20.00	20.00	Back Side 15mm	0.694	0.089	0.783	0.055	0.084	0.036	0.092	0.092	0.838	0.875	0.959	0.911
DC_66A+n78A	Ant.3	0.196	22.00	19.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.110	0.025	0.135	0.036	0.045	0.022	0.016	0.016	0.171	0.151	0.196	0.173
		0.258	22.00	19.50		0.089	20.00	20.00	Back Side 15mm	0.145	0.089	0.234	0.055	0.084	0.036	0.092	0.092	0.289	0.326	0.410	0.362
DC_66A+n78A	Ant.4	0.179	22.50	20.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.101	0.025	0.126	0.036	0.045	0.022	0.016	0.016	0.162	0.142	0.187	0.164
		0.235	22.50	20.00		0.089	20.00	20.00	Back Side 15mm	0.132	0.089	0.221	0.055	0.084	0.036	0.092	0.092	0.276	0.313	0.397	0.349
DC_66A+n78A	Ant.5	0.064	24.00	24.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.064	0.025	0.089	0.036	0.045	0.022	0.016	0.016	0.125	0.105	0.150	0.127
		0.101	24.00	24.00		0.089	20.00	20.00	Back Side 15mm	0.101	0.089	0.190	0.055	0.084	0.036	0.092	0.092	0.245	0.282	0.366	0.318
DC_66A+n78A	Ant.2	0.695	25.50	24.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.552	0.137	0.689	0.036	0.045	0.022	0.016	0.016	0.725	0.705	0.750	0.727
		0.874	25.50	24.50		0.067	18.50	18.50	Back Side 15mm	0.694	0.067	0.761	0.055	0.084	0.036	0.092	0.092	0.816	0.853	0.937	0.889
DC_66A+n78A	Ant.3	0.196	22.00	19.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.110	0.137	0.247	0.036	0.045	0.022	0.016	0.016	0.283	0.263	0.308	0.285

		0.258	22.00	19.50		0.067	18.50	18.50	Back Side 15mm	0.145	0.067	0.212	0.055	0.084	0.036	0.092	0.092	0.267	0.304	0.388	0.340
DC_66A+n78A	Ant.4	0.179	22.50	20.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.101	0.137	0.238	0.036	0.045	0.022	0.016	0.016	0.274	0.254	0.299	0.276
		0.235	22.50	20.00		0.067	18.50	18.50	Back Side 15mm	0.132	0.067	0.199	0.055	0.084	0.036	0.092	0.092	0.254	0.291	0.375	0.327
DC_66A+n78A	Ant.5	0.064	24.00	24.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.064	0.137	0.201	0.036	0.045	0.022	0.016	0.016	0.237	0.217	0.262	0.239
		0.101	24.00	24.00		0.067	18.50	18.50	Back Side 15mm	0.101	0.067	0.168	0.055	0.084	0.036	0.092	0.092	0.223	0.260	0.344	0.296
DC_38A+n78A	Ant.2	0.366	25.50	25.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.366	0.076	0.442	0.036	0.045	0.022	0.016	0.016	0.478	0.458	0.503	0.480
		0.569	25.50	25.50		0.169	19.00	17.50	Back Side 15mm	0.569	0.120	0.689	0.055	0.084	0.036	0.092	0.092	0.744	0.781	0.865	0.817
DC_38A+n78A	Ant.3	0.200	23.00	23.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.200	0.076	0.276	0.036	0.045	0.022	0.016	0.016	0.312	0.292	0.337	0.314
		0.246	23.00	23.00		0.169	19.00	17.50	Back Side 15mm	0.246	0.120	0.366	0.055	0.084	0.036	0.092	0.092	0.421	0.458	0.542	0.494
DC_38A+n78A	Ant.4	0.064	21.00	21.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.064	0.076	0.140	0.036	0.045	0.022	0.016	0.016	0.176	0.156	0.201	0.178
		0.106	21.00	21.00		0.169	19.00	17.50	Back Side 15mm	0.106	0.120	0.226	0.055	0.084	0.036	0.092	0.092	0.281	0.318	0.402	0.354
DC_38A+n78A	Ant.5	0.029	22.00	18.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.012	0.076	0.088	0.036	0.045	0.022	0.016	0.016	0.124	0.104	0.149	0.126
		0.072	22.00	18.00		0.169	19.00	17.50	Back Side 15mm	0.029	0.120	0.148	0.055	0.084	0.036	0.092	0.092	0.203	0.240	0.324	0.276
DC_38A+n78A	Ant.2	0.366	25.50	25.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.366	0.211	0.577	0.036	0.045	0.022	0.016	0.016	0.613	0.593	0.638	0.615
		0.569	25.50	25.50		0.520	24.50	19.50	Back Side 15mm	0.569	0.164	0.733	0.055	0.084	0.036	0.092	0.092	0.788	0.825	0.909	0.861
DC_38A+n78A	Ant.3	0.200	23.00	23.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.200	0.211	0.411	0.036	0.045	0.022	0.016	0.016	0.447	0.427	0.472	0.449
		0.246	23.00	23.00		0.520	24.50	19.50	Back Side 15mm	0.246	0.164	0.410	0.055	0.084	0.036	0.092	0.092	0.465	0.502	0.586	0.538
DC_38A+n78A	Ant.4	0.064	21.00	21.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.064	0.211	0.275	0.036	0.045	0.022	0.016	0.016	0.311	0.291	0.336	0.313
		0.106	21.00	21.00		0.520	24.50	19.50	Back Side 15mm	0.106	0.164	0.270	0.055	0.084	0.036	0.092	0.092	0.325	0.362	0.446	0.398
DC_38A+n78A	Ant.5	0.029	22.00	18.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.012	0.211	0.222	0.036	0.045	0.022	0.016	0.016	0.258	0.238	0.283	0.260
		0.072	22.00	18.00		0.520	24.50	19.50	Back Side 15mm	0.029	0.164	0.193	0.055	0.084	0.036	0.092	0.092	0.248	0.285	0.369	0.321
DC_38A+n78A	Ant.2	0.366	25.50	25.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.366	0.025	0.391	0.036	0.045	0.022	0.016	0.016	0.427	0.407	0.452	0.429
		0.569	25.50	25.50		0.089	20.00	20.00	Back Side 15mm	0.569	0.089	0.658	0.055	0.084	0.036	0.092	0.092	0.713	0.750	0.834	0.786
DC_38A+n78A	Ant.3	0.200	23.00	23.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.200	0.025	0.225	0.036	0.045	0.022	0.016	0.016	0.261	0.241	0.286	0.263
		0.246	23.00	23.00		0.089	20.00	20.00	Back Side 15mm	0.246	0.089	0.335	0.055	0.084	0.036	0.092	0.092	0.390	0.427	0.511	0.463
DC_38A+n78A	Ant.4	0.064	21.00	21.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.064	0.025	0.089	0.036	0.045	0.022	0.016	0.016	0.125	0.105	0.150	0.127
		0.106	21.00	21.00		0.089	20.00	20.00	Back Side 15mm	0.106	0.089	0.195	0.055	0.084	0.036	0.092	0.092	0.250	0.287	0.371	0.323
DC_38A+n78A	Ant.5	0.029	22.00	18.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.012	0.025	0.037	0.036	0.045	0.022	0.016	0.016	0.073	0.053	0.098	0.075
		0.072	22.00	18.00		0.089	20.00	20.00	Back Side 15mm	0.029	0.089	0.118	0.055	0.084	0.036	0.092	0.092	0.173	0.210	0.294	0.246
DC_38A+n78A	Ant.2	0.366	25.50	25.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.366	0.137	0.503	0.036	0.045	0.022	0.016	0.016	0.539	0.519	0.564	0.541
		0.569	25.50	25.50		0.067	18.50	18.50	Back Side 15mm	0.569	0.067	0.636	0.055	0.084	0.036	0.092	0.092	0.691	0.728	0.812	0.764
DC_38A+n78A	Ant.3	0.200	23.00	23.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.200	0.137	0.337	0.036	0.045	0.022	0.016	0.016	0.373	0.353	0.398	0.375
		0.246	23.00	23.00		0.067	18.50	18.50	Back Side 15mm	0.246	0.067	0.313	0.055	0.084	0.036	0.092	0.092	0.368	0.405	0.489	0.441
DC_38A+n78A	Ant.4	0.064	21.00	21.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.064	0.137	0.201	0.036	0.045	0.022	0.016	0.016	0.237	0.217	0.262	0.239
		0.106	21.00	21.00		0.067	18.50	18.50	Back Side 15mm	0.106	0.067	0.173	0.055	0.084	0.036	0.092	0.092	0.228	0.265	0.349	0.301
DC_38A+n78A	Ant.5	0.029	22.00	18.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.012	0.137	0.149	0.036	0.045	0.022	0.016	0.016	0.185	0.165	0.210	0.187
		0.072	22.00	18.00		0.067	18.50	18.50	Back Side 15mm	0.029	0.067	0.096	0.055	0.084	0.036	0.092	0.092	0.151	0.188	0.272	0.224
DC_41A+n78A	Ant.2	0.377	25.00	25.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.377	0.076	0.453	0.036	0.045	0.022	0.016	0.016	0.489	0.469	0.514	0.491
		0.522	25.00	25.00		0.169	19.00	17.50	Back Side 15mm	0.522	0.120	0.642	0.055	0.084	0.036	0.092	0.092	0.697	0.734	0.818	0.770
DC_41A+n78A	Ant.3	0.157	22.50	22.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.157	0.076	0.233	0.036	0.045	0.022	0.016	0.016	0.269	0.249	0.294	0.271
		0.225	22.50	22.50		0.169	19.00	17.50	Back Side 15mm	0.225	0.120	0.345	0.055	0.084	0.036	0.092	0.092	0.400	0.437	0.521	0.473
DC_41A+n78A	Ant.4	0.099	21.50	21.50	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.099	0.076	0.175	0.036	0.045	0.022	0.016	0.016	0.211	0.191	0.236	0.213
		0.146	21.50	21.50		0.169	19.00	17.50	Back Side 15mm	0.146	0.120	0.266	0.055	0.084	0.036	0.092	0.092	0.321	0.358	0.442	0.394

DC_41A+n78A	Ant.5	0.043	22.00	18.00	Ant.6	0.108	19.00	17.50	Front Side 15mm	0.017	0.076	0.094	0.036	0.045	0.022	0.016	0.016	0.130	0.110	0.155	0.132
		0.085	22.00	18.00		0.169	19.00	17.50	Back Side 15mm	0.034	0.120	0.153	0.055	0.084	0.036	0.092	0.092	0.208	0.245	0.329	0.281
DC_41A+n78A	Ant.2	0.377	25.00	25.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.377	0.211	0.588	0.036	0.045	0.022	0.016	0.016	0.624	0.604	0.649	0.626
		0.522	25.00	25.00		0.520	24.50	19.50	Back Side 15mm	0.522	0.164	0.686	0.055	0.084	0.036	0.092	0.092	0.741	0.778	0.862	0.814
DC_41A+n78A	Ant.3	0.157	22.50	22.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.157	0.211	0.368	0.036	0.045	0.022	0.016	0.016	0.404	0.384	0.429	0.406
		0.225	22.50	22.50		0.520	24.50	19.50	Back Side 15mm	0.225	0.164	0.389	0.055	0.084	0.036	0.092	0.092	0.444	0.481	0.565	0.517
DC_41A+n78A	Ant.4	0.099	21.50	21.50	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.099	0.211	0.310	0.036	0.045	0.022	0.016	0.016	0.346	0.326	0.371	0.348
		0.146	21.50	21.50		0.520	24.50	19.50	Back Side 15mm	0.146	0.164	0.310	0.055	0.084	0.036	0.092	0.092	0.365	0.402	0.486	0.438
DC_41A+n78A	Ant.5	0.043	22.00	18.00	Ant.7	0.667	24.50	19.50	Front Side 15mm	0.017	0.211	0.228	0.036	0.045	0.022	0.016	0.016	0.264	0.244	0.289	0.266
		0.085	22.00	18.00		0.520	24.50	19.50	Back Side 15mm	0.034	0.164	0.198	0.055	0.084	0.036	0.092	0.092	0.253	0.290	0.374	0.326
DC_41A+n78A	Ant.2	0.377	25.00	25.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.377	0.025	0.402	0.036	0.045	0.022	0.016	0.016	0.438	0.418	0.463	0.440
		0.522	25.00	25.00		0.089	20.00	20.00	Back Side 15mm	0.522	0.089	0.611	0.055	0.084	0.036	0.092	0.092	0.666	0.703	0.787	0.739
DC_41A+n78A	Ant.3	0.157	22.50	22.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.157	0.025	0.182	0.036	0.045	0.022	0.016	0.016	0.218	0.198	0.243	0.220
		0.225	22.50	22.50		0.089	20.00	20.00	Back Side 15mm	0.225	0.089	0.314	0.055	0.084	0.036	0.092	0.092	0.369	0.406	0.490	0.442
DC_41A+n78A	Ant.4	0.099	21.50	21.50	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.099	0.025	0.124	0.036	0.045	0.022	0.016	0.016	0.160	0.140	0.185	0.162
		0.146	21.50	21.50		0.089	20.00	20.00	Back Side 15mm	0.146	0.089	0.235	0.055	0.084	0.036	0.092	0.092	0.290	0.327	0.411	0.363
DC_41A+n78A	Ant.5	0.043	22.00	18.00	Ant.8	0.025	20.00	20.00	Front Side 15mm	0.017	0.025	0.042	0.036	0.045	0.022	0.016	0.016	0.078	0.058	0.103	0.080
		0.085	22.00	18.00		0.089	20.00	20.00	Back Side 15mm	0.034	0.089	0.123	0.055	0.084	0.036	0.092	0.092	0.178	0.215	0.299	0.251
DC_41A+n78A	Ant.2	0.377	25.00	25.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.377	0.137	0.514	0.036	0.045	0.022	0.016	0.016	0.550	0.530	0.575	0.552
		0.522	25.00	25.00		0.067	18.50	18.50	Back Side 15mm	0.522	0.067	0.589	0.055	0.084	0.036	0.092	0.092	0.644	0.681	0.765	0.717
DC_41A+n78A	Ant.3	0.157	22.50	22.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.157	0.137	0.294	0.036	0.045	0.022	0.016	0.016	0.330	0.310	0.355	0.332
		0.225	22.50	22.50		0.067	18.50	18.50	Back Side 15mm	0.225	0.067	0.292	0.055	0.084	0.036	0.092	0.092	0.347	0.384	0.468	0.420
DC_41A+n78A	Ant.4	0.099	21.50	21.50	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.099	0.137	0.236	0.036	0.045	0.022	0.016	0.016	0.272	0.252	0.297	0.274
		0.146	21.50	21.50		0.067	18.50	18.50	Back Side 15mm	0.146	0.067	0.213	0.055	0.084	0.036	0.092	0.092	0.268	0.305	0.389	0.341
DC_41A+n78A	Ant.5	0.043	22.00	18.00	Ant.9	0.137	18.50	18.50	Front Side 15mm	0.017	0.137	0.154	0.036	0.045	0.022	0.016	0.016	0.190	0.170	0.215	0.192
		0.085	22.00	18.00		0.067	18.50	18.50	Back Side 15mm	0.034	0.067	0.101	0.055	0.084	0.036	0.092	0.092	0.156	0.193	0.277	0.229
Note:																					
1: The simultaneous transmission combinations of the multiple antennas contain combinations of two antennas, so only the worst simultaneous transmission combinations was shown in this table.																					
2: The highest Summed 1g SAR is 1.381 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.																					

13.2.11 Hotspot Simultaneous Transmission SAR Evaluation for ENDC and WLAN and BT

Band	LTE Antenna	4G		ENDC	NR Antenna	SA		ENDC	Position	Stand alone SAR						SUM SAR			
		LTE SAR	LTE Max Power	LTE Max Power		NR SAR	NR Max Power	NR Max Power		LTE SAR	NR SAR	1	2	3	4	5	1+2	1+4	1+3+5
								ENDC (LTE+NR)				2.4GWIFI Max.	5GWIFI Max.	Bluetooth Max.	Bluetooth Max.				
				DSI5								DSI5	Level4	Level4	LowPower1	LowPower2			
DC_7A+n5A	Ant.2	0.127	17.00	14.50	Ant.0	0.429	25.50	25.50	Front Side 10mm	0.071	0.429	0.500	0.172	0.062	0.055	0.023	0.672	0.555	0.585
		0.202	17.00	14.50		0.496	25.50	25.50	Back Side 10mm	0.114	0.496	0.610	0.248	0.141	0.085	0.034	0.858	0.695	0.785
		0.063	17.00	14.50		0.189	25.50	25.50	Left Edge 10mm	0.035	0.189	0.224	0.000	0.000	0.000	0.000	0.224	0.224	0.224
		0.000	17.00	14.50		0.288	25.50	25.50	Right Edge 10mm	0.000	0.288	0.288	0.335	0.087	0.141	0.053	0.623	0.429	0.428
		0.169	17.00	14.50		0.000	25.50	25.50	Top Edge 10mm	0.095	0.000	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.000	17.00	14.50		0.407	25.50	25.50	Bottom Edge 10mm	0.000	0.407	0.407	0.000	0.000	0.000	0.000	0.407	0.407	0.407
DC_7A+n5A	Ant.3	0.380	21.00	19.00	Ant.0	0.429	25.50	25.50	Front Side 10mm	0.240	0.429	0.669	0.172	0.062	0.055	0.023	0.841	0.724	0.754
		0.463	21.00	19.00		0.496	25.50	25.50	Back Side 10mm	0.292	0.496	0.788	0.248	0.141	0.085	0.034	1.036	0.873	0.963
		0.000	21.00	19.00		0.189	25.50	25.50	Left Edge 10mm	0.000	0.189	0.189	0.000	0.000	0.000	0.000	0.189	0.189	0.189
		0.051	21.00	19.00		0.288	25.50	25.50	Right Edge 10mm	0.032	0.288	0.320	0.335	0.087	0.141	0.053	0.655	0.461	0.460
		0.000	21.00	19.00		0.000	25.50	25.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.461	21.00	19.00		0.407	25.50	25.50	Bottom Edge 10mm	0.291	0.407	0.698	0.000	0.000	0.000	0.000	0.698	0.698	0.698
DC_7A+n5A	Ant.4	0.145	17.00	14.00	Ant.0	0.429	25.50	25.50	Front Side 10mm	0.073	0.429	0.502	0.172	0.062	0.055	0.023	0.674	0.557	0.587
		0.239	17.00	14.00		0.496	25.50	25.50	Back Side 10mm	0.120	0.496	0.616	0.248	0.141	0.085	0.034	0.864	0.701	0.791
		0.261	17.00	14.00		0.189	25.50	25.50	Left Edge 10mm	0.131	0.189	0.320	0.000	0.000	0.000	0.000	0.320	0.320	0.320
		0.000	17.00	14.00		0.288	25.50	25.50	Right Edge 10mm	0.000	0.288	0.288	0.335	0.087	0.141	0.053	0.623	0.429	0.428
		0.066	17.00	14.00		0.000	25.50	25.50	Top Edge 10mm	0.033	0.000	0.033	0.141	0.225	0.047	0.018	0.174	0.080	0.276
		0.000	17.00	14.00		0.407	25.50	25.50	Bottom Edge 10mm	0.000	0.407	0.407	0.000	0.000	0.000	0.000	0.407	0.407	0.407
DC_7A+n5A	Ant.5	0.164	20.00	16.00	Ant.0	0.429	25.50	25.50	Front Side 10mm	0.065	0.429	0.494	0.172	0.062	0.055	0.023	0.666	0.549	0.579
		0.331	20.00	16.00		0.496	25.50	25.50	Back Side 10mm	0.132	0.496	0.628	0.248	0.141	0.085	0.034	0.876	0.713	0.803
		0.000	20.00	16.00		0.189	25.50	25.50	Left Edge 10mm	0.000	0.189	0.189	0.000	0.000	0.000	0.000	0.189	0.189	0.189
		0.408	20.00	16.00		0.288	25.50	25.50	Right Edge 10mm	0.162	0.288	0.450	0.335	0.087	0.141	0.053	0.785	0.591	0.590
		0.000	20.00	16.00		0.000	25.50	25.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	20.00	16.00		0.407	25.50	25.50	Bottom Edge 10mm	0.000	0.407	0.407	0.000	0.000	0.000	0.000	0.407	0.407	0.407
DC_7A+n5A	Ant.2	0.127	17.00	14.50	Ant.1	0.476	24.00	22.00	Front Side 10mm	0.071	0.300	0.372	0.172	0.062	0.055	0.023	0.544	0.427	0.457
		0.202	17.00	14.50		0.528	24.00	22.00	Back Side 10mm	0.114	0.333	0.447	0.248	0.141	0.085	0.034	0.695	0.532	0.622
		0.063	17.00	14.50		0.626	24.00	22.00	Left Edge 10mm	0.035	0.395	0.430	0.000	0.000	0.000	0.000	0.430	0.430	0.430
		0.000	17.00	14.50		0.000	24.00	22.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.169	17.00	14.50		0.012	24.00	22.00	Top Edge 10mm	0.095	0.008	0.103	0.141	0.225	0.047	0.018	0.244	0.150	0.346
		0.000	17.00	14.50		0.000	24.00	22.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n5A	Ant.3	0.380	21.00	19.00	Ant.1	0.476	24.00	22.00	Front Side 10mm	0.240	0.300	0.540	0.172	0.062	0.055	0.023	0.712	0.595	0.625
		0.463	21.00	19.00		0.528	24.00	22.00	Back Side 10mm	0.292	0.333	0.625	0.248	0.141	0.085	0.034	0.873	0.710	0.800
		0.000	21.00	19.00		0.626	24.00	22.00	Left Edge 10mm	0.000	0.395	0.395	0.000	0.000	0.000	0.000	0.395	0.395	0.395
		0.051	21.00	19.00		0.000	24.00	22.00	Right Edge 10mm	0.032	0.000	0.032	0.335	0.087	0.141	0.053	0.367	0.173	0.172
		0.000	21.00	19.00		0.012	24.00	22.00	Top Edge 10mm	0.000	0.008	0.008	0.141	0.225	0.047	0.018	0.149	0.055	0.251
		0.461	21.00	19.00		0.000	24.00	22.00	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291

DC_7A+n5A	Ant.4	0.145	17.00	14.00	Ant.1	0.476	24.00	22.00	Front Side 10mm	0.073	0.300	0.373	0.172	0.062	0.055	0.023	0.545	0.428	0.458
		0.239	17.00	14.00		0.528	24.00	22.00	Back Side 10mm	0.120	0.333	0.453	0.248	0.141	0.085	0.034	0.701	0.538	0.628
		0.261	17.00	14.00		0.626	24.00	22.00	Left Edge 10mm	0.131	0.395	0.526	0.000	0.000	0.000	0.000	0.526	0.526	0.526
		0.000	17.00	14.00		0.000	24.00	22.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.066	17.00	14.00		0.012	24.00	22.00	Top Edge 10mm	0.033	0.008	0.041	0.141	0.225	0.047	0.018	0.182	0.088	0.284
		0.000	17.00	14.00		0.000	24.00	22.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n7A	Ant.3	0.306	22.00	19.50	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.172	0.059	0.231	0.172	0.062	0.055	0.023	0.403	0.286	0.316
		0.436	22.00	19.50		0.158	17.00	15.50	Back Side 10mm	0.245	0.112	0.357	0.248	0.141	0.085	0.034	0.605	0.442	0.532
		0.000	22.00	19.50		0.035	17.00	15.50	Left Edge 10mm	0.000	0.025	0.025	0.000	0.000	0.000	0.000	0.025	0.025	0.025
		0.111	22.00	19.50		0.000	17.00	15.50	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.106	17.00	15.50	Top Edge 10mm	0.000	0.075	0.075	0.141	0.225	0.047	0.018	0.216	0.122	0.318
		0.633	22.00	19.50		0.000	17.00	15.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n7A	Ant.4	0.209	20.50	15.50	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.066	0.059	0.125	0.172	0.062	0.055	0.023	0.297	0.180	0.210
		0.259	20.50	15.50		0.158	17.00	15.50	Back Side 10mm	0.082	0.112	0.194	0.248	0.141	0.085	0.034	0.442	0.279	0.369
		0.414	20.50	15.50		0.035	17.00	15.50	Left Edge 10mm	0.131	0.025	0.156	0.000	0.000	0.000	0.000	0.156	0.156	0.156
		0.000	20.50	15.50		0.000	17.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.042	20.50	15.50		0.106	17.00	15.50	Top Edge 10mm	0.013	0.075	0.088	0.141	0.225	0.047	0.018	0.229	0.135	0.331
		0.000	20.50	15.50		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n7A	Ant.5	0.143	24.00	24.00	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.143	0.059	0.202	0.172	0.062	0.055	0.023	0.374	0.257	0.287
		0.225	24.00	24.00		0.158	17.00	15.50	Back Side 10mm	0.225	0.112	0.337	0.248	0.141	0.085	0.034	0.585	0.422	0.512
		0.000	24.00	24.00		0.035	17.00	15.50	Left Edge 10mm	0.000	0.025	0.025	0.000	0.000	0.000	0.000	0.025	0.025	0.025
		0.321	24.00	24.00		0.000	17.00	15.50	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.106	17.00	15.50	Top Edge 10mm	0.000	0.075	0.075	0.141	0.225	0.047	0.018	0.216	0.122	0.318
		0.000	24.00	24.00		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n7A	Ant.2	0.164	17.00	14.00	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.082	0.205	0.287	0.172	0.062	0.055	0.023	0.459	0.342	0.372
		0.235	17.00	14.00		0.360	21.00	19.50	Back Side 10mm	0.118	0.255	0.373	0.248	0.141	0.085	0.034	0.621	0.458	0.548
		0.063	17.00	14.00		0.000	21.00	19.50	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.055	21.00	19.50	Right Edge 10mm	0.000	0.039	0.039	0.335	0.087	0.141	0.053	0.374	0.180	0.179
		0.303	17.00	14.00		0.000	21.00	19.50	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.600	21.00	19.50	Bottom Edge 10mm	0.000	0.425	0.425	0.000	0.000	0.000	0.000	0.425	0.425	0.425
DC_4A+n7A	Ant.4	0.209	20.50	15.50	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.066	0.205	0.271	0.172	0.062	0.055	0.023	0.443	0.326	0.356
		0.259	20.50	15.50		0.360	21.00	19.50	Back Side 10mm	0.082	0.255	0.337	0.248	0.141	0.085	0.034	0.585	0.422	0.512
		0.414	20.50	15.50		0.000	21.00	19.50	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.055	21.00	19.50	Right Edge 10mm	0.000	0.039	0.039	0.335	0.087	0.141	0.053	0.374	0.180	0.179
		0.042	20.50	15.50		0.000	21.00	19.50	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.600	21.00	19.50	Bottom Edge 10mm	0.000	0.425	0.425	0.000	0.000	0.000	0.000	0.425	0.425	0.425
DC_4A+n7A	Ant.5	0.143	24.00	24.00	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.143	0.205	0.348	0.172	0.062	0.055	0.023	0.520	0.403	0.433
		0.225	24.00	24.00		0.360	21.00	19.50	Back Side 10mm	0.225	0.255	0.480	0.248	0.141	0.085	0.034	0.728	0.565	0.655
		0.000	24.00	24.00		0.000	21.00	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.321	24.00	24.00		0.055	21.00	19.50	Right Edge 10mm	0.321	0.039	0.360	0.335	0.087	0.141	0.053	0.695	0.501	0.500
		0.000	24.00	24.00		0.000	21.00	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.600	21.00	19.50	Bottom Edge 10mm	0.000	0.425	0.425	0.000	0.000	0.000	0.000	0.425	0.425	0.425
DC_4A+n7A	Ant.2	0.164	17.00	14.00	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.082	0.133	0.215	0.172	0.062	0.055	0.023	0.387	0.270	0.300

		0.235	17.00	14.00		0.355	16.50	14.50	Back Side 10mm	0.118	0.224	0.342	0.248	0.141	0.085	0.034	0.590	0.427	0.517
		0.063	17.00	14.00		0.368	16.50	14.50	Left Edge 10mm	0.032	0.232	0.264	0.000	0.000	0.000	0.000	0.264	0.264	0.264
		0.000	17.00	14.00		0.000	16.50	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.303	17.00	14.00		0.151	16.50	14.50	Top Edge 10mm	0.152	0.095	0.247	0.141	0.225	0.047	0.018	0.388	0.294	0.490
		0.000	17.00	14.00		0.000	16.50	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n7A	Ant.3	0.306	22.00	19.50	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.172	0.133	0.305	0.172	0.062	0.055	0.023	0.477	0.360	0.390
		0.436	22.00	19.50		0.355	16.50	14.50	Back Side 10mm	0.245	0.224	0.469	0.248	0.141	0.085	0.034	0.717	0.554	0.644
		0.000	22.00	19.50		0.368	16.50	14.50	Left Edge 10mm	0.000	0.232	0.232	0.000	0.000	0.000	0.000	0.232	0.232	0.232
		0.111	22.00	19.50		0.000	16.50	14.50	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.151	16.50	14.50	Top Edge 10mm	0.000	0.095	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.633	22.00	19.50		0.000	16.50	14.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n7A	Ant.5	0.143	24.00	24.00	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.143	0.133	0.276	0.172	0.062	0.055	0.023	0.448	0.331	0.361
		0.225	24.00	24.00		0.355	16.50	14.50	Back Side 10mm	0.225	0.224	0.449	0.248	0.141	0.085	0.034	0.697	0.534	0.624
		0.000	24.00	24.00		0.368	16.50	14.50	Left Edge 10mm	0.000	0.232	0.232	0.000	0.000	0.000	0.000	0.232	0.232	0.232
		0.321	24.00	24.00		0.000	16.50	14.50	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.151	16.50	14.50	Top Edge 10mm	0.000	0.095	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.000	24.00	24.00		0.000	16.50	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n7A	Ant.2	0.164	17.00	14.00	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.082	0.119	0.201	0.172	0.062	0.055	0.023	0.373	0.256	0.286
		0.235	17.00	14.00		0.370	21.50	19.00	Back Side 10mm	0.118	0.208	0.326	0.248	0.141	0.085	0.034	0.574	0.411	0.501
		0.063	17.00	14.00		0.000	21.50	19.00	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.475	21.50	19.00	Right Edge 10mm	0.000	0.267	0.267	0.335	0.087	0.141	0.053	0.602	0.408	0.407
		0.303	17.00	14.00		0.000	21.50	19.00	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.000	21.50	19.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n7A	Ant.3	0.306	22.00	19.50	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.172	0.119	0.291	0.172	0.062	0.055	0.023	0.463	0.346	0.376
		0.436	22.00	19.50		0.370	21.50	19.00	Back Side 10mm	0.245	0.208	0.453	0.248	0.141	0.085	0.034	0.701	0.538	0.628
		0.000	22.00	19.50		0.000	21.50	19.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.111	22.00	19.50		0.475	21.50	19.00	Right Edge 10mm	0.062	0.267	0.330	0.335	0.087	0.141	0.053	0.665	0.471	0.470
		0.000	22.00	19.50		0.000	21.50	19.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.633	22.00	19.50		0.000	21.50	19.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n7A	Ant.4	0.209	20.50	15.50	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.066	0.119	0.185	0.172	0.062	0.055	0.023	0.357	0.240	0.270
		0.259	20.50	15.50		0.370	21.50	19.00	Back Side 10mm	0.082	0.208	0.290	0.248	0.141	0.085	0.034	0.538	0.375	0.465
		0.414	20.50	15.50		0.000	21.50	19.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.475	21.50	19.00	Right Edge 10mm	0.000	0.267	0.267	0.335	0.087	0.141	0.053	0.602	0.408	0.407
		0.042	20.50	15.50		0.000	21.50	19.00	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.000	21.50	19.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n7A	Ant.0	0.336	25.50	24.50	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.267	0.059	0.326	0.172	0.062	0.055	0.023	0.498	0.381	0.411
		0.487	25.50	24.50		0.158	17.00	15.50	Back Side 10mm	0.387	0.112	0.499	0.248	0.141	0.085	0.034	0.747	0.584	0.674
		0.209	25.50	24.50		0.035	17.00	15.50	Left Edge 10mm	0.166	0.025	0.191	0.000	0.000	0.000	0.000	0.191	0.191	0.191
		0.158	25.50	24.50		0.000	17.00	15.50	Right Edge 10mm	0.126	0.000	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.000	25.50	24.50		0.106	17.00	15.50	Top Edge 10mm	0.000	0.075	0.075	0.141	0.225	0.047	0.018	0.216	0.122	0.318
		0.257	25.50	24.50		0.000	17.00	15.50	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n7A	Ant.1	0.578	24.00	20.50	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.258	0.059	0.317	0.172	0.062	0.055	0.023	0.489	0.372	0.402
		0.655	24.00	20.50		0.158	17.00	15.50	Back Side 10mm	0.293	0.112	0.404	0.248	0.141	0.085	0.034	0.652	0.489	0.579

		0.923	24.00	20.50		0.035	17.00	15.50	Left Edge 10mm	0.412	0.025	0.437	0.000	0.000	0.000	0.000	0.437	0.437	0.437
		0.000	24.00	20.50		0.000	17.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.003	24.00	20.50		0.106	17.00	15.50	Top Edge 10mm	0.001	0.075	0.076	0.141	0.225	0.047	0.018	0.217	0.123	0.319
		0.000	24.00	20.50		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n7A	Ant.0	0.336	25.50	24.50	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.267	0.205	0.471	0.172	0.062	0.055	0.023	0.643	0.526	0.556
		0.487	25.50	24.50		0.360	21.00	19.50	Back Side 10mm	0.387	0.255	0.642	0.248	0.141	0.085	0.034	0.890	0.727	0.817
		0.209	25.50	24.50		0.000	21.00	19.50	Left Edge 10mm	0.166	0.000	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.158	25.50	24.50		0.055	21.00	19.50	Right Edge 10mm	0.126	0.039	0.164	0.335	0.087	0.141	0.053	0.499	0.305	0.304
		0.000	25.50	24.50		0.000	21.00	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.257	25.50	24.50		0.600	21.00	19.50	Bottom Edge 10mm	0.204	0.425	0.629	0.000	0.000	0.000	0.000	0.629	0.629	0.629
DC_5A+n7A	Ant.1	0.578	24.00	20.50	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.258	0.205	0.463	0.172	0.062	0.055	0.023	0.635	0.518	0.548
		0.655	24.00	20.50		0.360	21.00	19.50	Back Side 10mm	0.293	0.255	0.547	0.248	0.141	0.085	0.034	0.795	0.632	0.722
		0.923	24.00	20.50		0.000	21.00	19.50	Left Edge 10mm	0.412	0.000	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.000	24.00	20.50		0.055	21.00	19.50	Right Edge 10mm	0.000	0.039	0.039	0.335	0.087	0.141	0.053	0.374	0.180	0.179
		0.003	24.00	20.50		0.000	21.00	19.50	Top Edge 10mm	0.001	0.000	0.001	0.141	0.225	0.047	0.018	0.142	0.048	0.244
		0.000	24.00	20.50		0.600	21.00	19.50	Bottom Edge 10mm	0.000	0.425	0.425	0.000	0.000	0.000	0.000	0.425	0.425	0.425
DC_5A+n7A	Ant.0	0.336	25.50	24.50	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.267	0.133	0.400	0.172	0.062	0.055	0.023	0.572	0.455	0.485
		0.487	25.50	24.50		0.355	16.50	14.50	Back Side 10mm	0.387	0.224	0.611	0.248	0.141	0.085	0.034	0.859	0.696	0.786
		0.209	25.50	24.50		0.368	16.50	14.50	Left Edge 10mm	0.166	0.232	0.398	0.000	0.000	0.000	0.000	0.398	0.398	0.398
		0.158	25.50	24.50		0.000	16.50	14.50	Right Edge 10mm	0.126	0.000	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.000	25.50	24.50		0.151	16.50	14.50	Top Edge 10mm	0.000	0.095	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.257	25.50	24.50		0.000	16.50	14.50	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n7A	Ant.1	0.578	24.00	20.50	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.258	0.133	0.391	0.172	0.062	0.055	0.023	0.563	0.446	0.476
		0.655	24.00	20.50		0.355	16.50	14.50	Back Side 10mm	0.293	0.224	0.517	0.248	0.141	0.085	0.034	0.765	0.602	0.692
		0.923	24.00	20.50		0.368	16.50	14.50	Left Edge 10mm	0.412	0.232	0.644	0.000	0.000	0.000	0.000	0.644	0.644	0.644
		0.000	24.00	20.50		0.000	16.50	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.003	24.00	20.50		0.151	16.50	14.50	Top Edge 10mm	0.001	0.095	0.097	0.141	0.225	0.047	0.018	0.238	0.144	0.340
		0.000	24.00	20.50		0.000	16.50	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n7A	Ant.0	0.336	25.50	24.50	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.267	0.119	0.386	0.172	0.062	0.055	0.023	0.558	0.441	0.471
		0.487	25.50	24.50		0.370	21.50	19.00	Back Side 10mm	0.387	0.208	0.595	0.248	0.141	0.085	0.034	0.843	0.680	0.770
		0.209	25.50	24.50		0.000	21.50	19.00	Left Edge 10mm	0.166	0.000	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.158	25.50	24.50		0.475	21.50	19.00	Right Edge 10mm	0.126	0.267	0.393	0.335	0.087	0.141	0.053	0.728	0.534	0.533
		0.000	25.50	24.50		0.000	21.50	19.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.257	25.50	24.50		0.000	21.50	19.00	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n7A	Ant.1	0.578	24.00	20.50	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.258	0.119	0.377	0.172	0.062	0.055	0.023	0.549	0.432	0.462
		0.655	24.00	20.50		0.370	21.50	19.00	Back Side 10mm	0.293	0.208	0.501	0.248	0.141	0.085	0.034	0.749	0.586	0.676
		0.923	24.00	20.50		0.000	21.50	19.00	Left Edge 10mm	0.412	0.000	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.000	24.00	20.50		0.475	21.50	19.00	Right Edge 10mm	0.000	0.267	0.267	0.335	0.087	0.141	0.053	0.602	0.408	0.407
		0.003	24.00	20.50		0.000	21.50	19.00	Top Edge 10mm	0.001	0.000	0.001	0.141	0.225	0.047	0.018	0.142	0.048	0.244
		0.000	24.00	20.50		0.000	21.50	19.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n7A	Ant.3	0.372	22.00	19.50	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.209	0.059	0.268	0.172	0.062	0.055	0.023	0.440	0.323	0.353
		0.498	22.00	19.50		0.158	17.00	15.50	Back Side 10mm	0.280	0.112	0.392	0.248	0.141	0.085	0.034	0.640	0.477	0.567
		0.000	22.00	19.50		0.035	17.00	15.50	Left Edge 10mm	0.000	0.025	0.025	0.000	0.000	0.000	0.000	0.025	0.025	0.025

		0.129	22.00	19.50		0.000	17.00	15.50	Right Edge 10mm	0.073	0.000	0.073	0.335	0.087	0.141	0.053	0.408	0.214	0.213
		0.000	22.00	19.50		0.106	17.00	15.50	Top Edge 10mm	0.000	0.075	0.075	0.141	0.225	0.047	0.018	0.216	0.122	0.318
		0.677	22.00	19.50		0.000	17.00	15.50	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n7A	Ant.4	0.234	20.00	15.50	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.083	0.059	0.142	0.172	0.062	0.055	0.023	0.314	0.197	0.227
		0.324	20.00	15.50		0.158	17.00	15.50	Back Side 10mm	0.115	0.112	0.227	0.248	0.141	0.085	0.034	0.475	0.312	0.402
		0.502	20.00	15.50		0.035	17.00	15.50	Left Edge 10mm	0.178	0.025	0.203	0.000	0.000	0.000	0.000	0.203	0.203	0.203
		0.000	20.00	15.50		0.000	17.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.050	20.00	15.50		0.106	17.00	15.50	Top Edge 10mm	0.018	0.075	0.093	0.141	0.225	0.047	0.018	0.234	0.140	0.336
		0.000	20.00	15.50		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n7A	Ant.5	0.130	24.00	24.00	Ant.2	0.083	17.00	15.50	Front Side 10mm	0.130	0.059	0.189	0.172	0.062	0.055	0.023	0.361	0.244	0.274
		0.226	24.00	24.00		0.158	17.00	15.50	Back Side 10mm	0.226	0.112	0.338	0.248	0.141	0.085	0.034	0.586	0.423	0.513
		0.000	24.00	24.00		0.035	17.00	15.50	Left Edge 10mm	0.000	0.025	0.025	0.000	0.000	0.000	0.000	0.025	0.025	0.025
		0.299	24.00	24.00		0.000	17.00	15.50	Right Edge 10mm	0.299	0.000	0.299	0.335	0.087	0.141	0.053	0.634	0.440	0.439
		0.000	24.00	24.00		0.106	17.00	15.50	Top Edge 10mm	0.000	0.075	0.075	0.141	0.225	0.047	0.018	0.216	0.122	0.318
		0.000	24.00	24.00		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n7A	Ant.2	0.302	17.50	14.00	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.135	0.205	0.339	0.172	0.062	0.055	0.023	0.511	0.394	0.424
		0.074	17.50	14.00		0.360	21.00	19.50	Back Side 10mm	0.033	0.255	0.288	0.248	0.141	0.085	0.034	0.536	0.373	0.463
		0.395	17.50	14.00		0.000	21.00	19.50	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.055	21.00	19.50	Right Edge 10mm	0.000	0.039	0.039	0.335	0.087	0.141	0.053	0.374	0.180	0.179
		0.214	17.50	14.00		0.000	21.00	19.50	Top Edge 10mm	0.096	0.000	0.096	0.141	0.225	0.047	0.018	0.237	0.143	0.339
		0.000	17.50	14.00		0.600	21.00	19.50	Bottom Edge 10mm	0.000	0.425	0.425	0.000	0.000	0.000	0.000	0.425	0.425	0.425
DC_66A+n7A	Ant.4	0.234	20.00	15.50	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.083	0.205	0.288	0.172	0.062	0.055	0.023	0.460	0.343	0.373
		0.324	20.00	15.50		0.360	21.00	19.50	Back Side 10mm	0.115	0.255	0.370	0.248	0.141	0.085	0.034	0.618	0.455	0.545
		0.502	20.00	15.50		0.000	21.00	19.50	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.055	21.00	19.50	Right Edge 10mm	0.000	0.039	0.039	0.335	0.087	0.141	0.053	0.374	0.180	0.179
		0.050	20.00	15.50		0.000	21.00	19.50	Top Edge 10mm	0.018	0.000	0.018	0.141	0.225	0.047	0.018	0.159	0.065	0.261
		0.000	20.00	15.50		0.600	21.00	19.50	Bottom Edge 10mm	0.000	0.425	0.425	0.000	0.000	0.000	0.000	0.425	0.425	0.425
DC_66A+n7A	Ant.5	0.130	24.00	24.00	Ant.3	0.289	21.00	19.50	Front Side 10mm	0.130	0.205	0.335	0.172	0.062	0.055	0.023	0.507	0.390	0.420
		0.226	24.00	24.00		0.360	21.00	19.50	Back Side 10mm	0.226	0.255	0.481	0.248	0.141	0.085	0.034	0.729	0.566	0.656
		0.000	24.00	24.00		0.000	21.00	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.299	24.00	24.00		0.055	21.00	19.50	Right Edge 10mm	0.299	0.039	0.338	0.335	0.087	0.141	0.053	0.673	0.479	0.478
		0.000	24.00	24.00		0.000	21.00	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.600	21.00	19.50	Bottom Edge 10mm	0.000	0.425	0.425	0.000	0.000	0.000	0.000	0.425	0.425	0.425
DC_66A+n7A	Ant.2	0.302	17.50	14.00	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.135	0.133	0.268	0.172	0.062	0.055	0.023	0.440	0.323	0.353
		0.074	17.50	14.00		0.355	16.50	14.50	Back Side 10mm	0.033	0.224	0.257	0.248	0.141	0.085	0.034	0.505	0.342	0.432
		0.395	17.50	14.00		0.368	16.50	14.50	Left Edge 10mm	0.176	0.232	0.409	0.000	0.000	0.000	0.000	0.409	0.409	0.409
		0.000	17.50	14.00		0.000	16.50	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.214	17.50	14.00		0.151	16.50	14.50	Top Edge 10mm	0.096	0.095	0.191	0.141	0.225	0.047	0.018	0.332	0.238	0.434
		0.000	17.50	14.00		0.000	16.50	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n7A	Ant.3	0.372	22.00	19.50	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.209	0.133	0.342	0.172	0.062	0.055	0.023	0.514	0.397	0.427
		0.498	22.00	19.50		0.355	16.50	14.50	Back Side 10mm	0.280	0.224	0.504	0.248	0.141	0.085	0.034	0.752	0.589	0.679
		0.000	22.00	19.50		0.368	16.50	14.50	Left Edge 10mm	0.000	0.232	0.232	0.000	0.000	0.000	0.000	0.232	0.232	0.232
		0.129	22.00	19.50		0.000	16.50	14.50	Right Edge 10mm	0.073	0.000	0.073	0.335	0.087	0.141	0.053	0.408	0.214	0.213

		0.000	22.00	19.50		0.151	16.50	14.50	Top Edge 10mm	0.000	0.095	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.677	22.00	19.50		0.000	16.50	14.50	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n7A	Ant.5	0.130	24.00	24.00	Ant.4	0.211	16.50	14.50	Front Side 10mm	0.130	0.133	0.263	0.172	0.062	0.055	0.023	0.435	0.318	0.348
		0.226	24.00	24.00		0.355	16.50	14.50	Back Side 10mm	0.226	0.224	0.450	0.248	0.141	0.085	0.034	0.698	0.535	0.625
		0.000	24.00	24.00		0.368	16.50	14.50	Left Edge 10mm	0.000	0.232	0.232	0.000	0.000	0.000	0.000	0.232	0.232	0.232
		0.299	24.00	24.00		0.000	16.50	14.50	Right Edge 10mm	0.299	0.000	0.299	0.335	0.087	0.141	0.053	0.634	0.440	0.439
		0.000	24.00	24.00		0.151	16.50	14.50	Top Edge 10mm	0.000	0.095	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.000	24.00	24.00		0.000	16.50	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n7A	Ant.2	0.302	17.50	14.00	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.135	0.119	0.254	0.172	0.062	0.055	0.023	0.426	0.309	0.339
		0.074	17.50	14.00		0.370	21.50	19.00	Back Side 10mm	0.033	0.208	0.241	0.248	0.141	0.085	0.034	0.489	0.326	0.416
		0.395	17.50	14.00		0.000	21.50	19.00	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.475	21.50	19.00	Right Edge 10mm	0.000	0.267	0.267	0.335	0.087	0.141	0.053	0.602	0.408	0.407
		0.214	17.50	14.00		0.000	21.50	19.00	Top Edge 10mm	0.096	0.000	0.096	0.141	0.225	0.047	0.018	0.237	0.143	0.339
		0.000	17.50	14.00		0.000	21.50	19.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n7A	Ant.3	0.372	22.00	19.50	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.209	0.119	0.328	0.172	0.062	0.055	0.023	0.500	0.383	0.413
		0.498	22.00	19.50		0.370	21.50	19.00	Back Side 10mm	0.280	0.208	0.488	0.248	0.141	0.085	0.034	0.736	0.573	0.663
		0.000	22.00	19.50		0.000	21.50	19.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.129	22.00	19.50		0.475	21.50	19.00	Right Edge 10mm	0.073	0.267	0.340	0.335	0.087	0.141	0.053	0.675	0.481	0.480
		0.000	22.00	19.50		0.000	21.50	19.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.677	22.00	19.50		0.000	21.50	19.00	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n7A	Ant.4	0.234	20.00	15.50	Ant.5	0.211	21.50	19.00	Front Side 10mm	0.083	0.119	0.202	0.172	0.062	0.055	0.023	0.374	0.257	0.287
		0.324	20.00	15.50		0.370	21.50	19.00	Back Side 10mm	0.115	0.208	0.323	0.248	0.141	0.085	0.034	0.571	0.408	0.498
		0.502	20.00	15.50		0.000	21.50	19.00	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.475	21.50	19.00	Right Edge 10mm	0.000	0.267	0.267	0.335	0.087	0.141	0.053	0.602	0.408	0.407
		0.050	20.00	15.50		0.000	21.50	19.00	Top Edge 10mm	0.018	0.000	0.018	0.141	0.225	0.047	0.018	0.159	0.065	0.261
		0.000	20.00	15.50		0.000	21.50	19.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n66A	Ant.3	0.168	22.00	20.00	Ant.2	0.176	18.00	15.50	Front Side 10mm	0.106	0.099	0.205	0.172	0.062	0.055	0.023	0.377	0.260	0.290
		0.264	22.00	20.00		0.252	18.00	15.50	Back Side 10mm	0.167	0.142	0.308	0.248	0.141	0.085	0.034	0.556	0.393	0.483
		0.000	22.00	20.00		0.092	18.00	15.50	Left Edge 10mm	0.000	0.052	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.059	22.00	20.00		0.000	18.00	15.50	Right Edge 10mm	0.037	0.000	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.000	22.00	20.00		0.345	18.00	15.50	Top Edge 10mm	0.000	0.194	0.194	0.141	0.225	0.047	0.018	0.335	0.241	0.437
		0.462	22.00	20.00		0.000	18.00	15.50	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n66A	Ant.4	0.105	24.50	18.50	Ant.2	0.176	18.00	15.50	Front Side 10mm	0.026	0.099	0.125	0.172	0.062	0.055	0.023	0.297	0.180	0.210
		0.130	24.50	18.50		0.252	18.00	15.50	Back Side 10mm	0.033	0.142	0.174	0.248	0.141	0.085	0.034	0.422	0.259	0.349
		0.209	24.50	18.50		0.092	18.00	15.50	Left Edge 10mm	0.052	0.052	0.104	0.000	0.000	0.000	0.000	0.104	0.104	0.104
		0.000	24.50	18.50		0.000	18.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.022	24.50	18.50		0.345	18.00	15.50	Top Edge 10mm	0.006	0.194	0.200	0.141	0.225	0.047	0.018	0.341	0.247	0.443
		0.000	24.50	18.50		0.000	18.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n66A	Ant.3	0.168	22.00	20.00	Ant.5	0.085	23.00	23.00	Front Side 10mm	0.106	0.085	0.191	0.172	0.062	0.055	0.023	0.363	0.246	0.276
		0.264	22.00	20.00		0.138	23.00	23.00	Back Side 10mm	0.167	0.138	0.305	0.248	0.141	0.085	0.034	0.553	0.390	0.480
		0.000	22.00	20.00		0.000	23.00	23.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.059	22.00	20.00		0.183	23.00	23.00	Right Edge 10mm	0.037	0.183	0.220	0.335	0.087	0.141	0.053	0.555	0.361	0.360
		0.000	22.00	20.00		0.000	23.00	23.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243

		0.462	22.00	20.00		0.000	23.00	23.00	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n66A	Ant.4	0.105	24.50	18.50	Ant.5	0.085	23.00	23.00	Front Side 10mm	0.026	0.085	0.111	0.172	0.062	0.055	0.023	0.283	0.166	0.196
		0.130	24.50	18.50		0.138	23.00	23.00	Back Side 10mm	0.033	0.138	0.171	0.248	0.141	0.085	0.034	0.419	0.256	0.346
		0.209	24.50	18.50		0.000	23.00	23.00	Left Edge 10mm	0.052	0.000	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.000	24.50	18.50		0.183	23.00	23.00	Right Edge 10mm	0.000	0.183	0.183	0.335	0.087	0.141	0.053	0.518	0.324	0.323
		0.022	24.50	18.50		0.000	23.00	23.00	Top Edge 10mm	0.006	0.000	0.006	0.141	0.225	0.047	0.018	0.147	0.053	0.249
		0.000	24.50	18.50		0.000	23.00	23.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n66A	Ant.0	0.336	25.50	24.50	Ant.2	0.176	18.00	15.50	Front Side 10mm	0.267	0.099	0.366	0.172	0.062	0.055	0.023	0.538	0.421	0.451
		0.487	25.50	24.50		0.252	18.00	15.50	Back Side 10mm	0.387	0.142	0.529	0.248	0.141	0.085	0.034	0.777	0.614	0.704
		0.209	25.50	24.50		0.092	18.00	15.50	Left Edge 10mm	0.166	0.052	0.218	0.000	0.000	0.000	0.000	0.218	0.218	0.218
		0.158	25.50	24.50		0.000	18.00	15.50	Right Edge 10mm	0.126	0.000	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.000	25.50	24.50		0.345	18.00	15.50	Top Edge 10mm	0.000	0.194	0.194	0.141	0.225	0.047	0.018	0.335	0.241	0.437
		0.257	25.50	24.50		0.000	18.00	15.50	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n66A	Ant.1	0.578	24.00	20.50	Ant.2	0.176	18.00	15.50	Front Side 10mm	0.258	0.099	0.357	0.172	0.062	0.055	0.023	0.529	0.412	0.442
		0.655	24.00	20.50		0.252	18.00	15.50	Back Side 10mm	0.293	0.142	0.434	0.248	0.141	0.085	0.034	0.682	0.519	0.609
		0.923	24.00	20.50		0.092	18.00	15.50	Left Edge 10mm	0.412	0.052	0.464	0.000	0.000	0.000	0.000	0.464	0.464	0.464
		0.000	24.00	20.50		0.000	18.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.003	24.00	20.50		0.345	18.00	15.50	Top Edge 10mm	0.001	0.194	0.195	0.141	0.225	0.047	0.018	0.336	0.242	0.438
		0.000	24.00	20.50		0.000	18.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n66A	Ant.0	0.336	25.50	24.50	Ant.3	0.304	21.00	19.50	Front Side 10mm	0.267	0.215	0.482	0.172	0.062	0.055	0.023	0.654	0.537	0.567
		0.487	25.50	24.50		0.363	21.00	19.50	Back Side 10mm	0.387	0.257	0.644	0.248	0.141	0.085	0.034	0.892	0.729	0.819
		0.209	25.50	24.50		0.000	21.00	19.50	Left Edge 10mm	0.166	0.000	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.158	25.50	24.50		0.155	21.00	19.50	Right Edge 10mm	0.126	0.110	0.235	0.335	0.087	0.141	0.053	0.570	0.376	0.375
		0.000	25.50	24.50		0.583	21.00	19.50	Top Edge 10mm	0.000	0.413	0.413	0.141	0.225	0.047	0.018	0.554	0.460	0.656
		0.257	25.50	24.50		0.000	21.00	19.50	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n66A	Ant.1	0.578	24.00	20.50	Ant.3	0.304	21.00	19.50	Front Side 10mm	0.258	0.215	0.473	0.172	0.062	0.055	0.023	0.645	0.528	0.558
		0.655	24.00	20.50		0.363	21.00	19.50	Back Side 10mm	0.293	0.257	0.550	0.248	0.141	0.085	0.034	0.798	0.635	0.725
		0.923	24.00	20.50		0.000	21.00	19.50	Left Edge 10mm	0.412	0.000	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.000	24.00	20.50		0.155	21.00	19.50	Right Edge 10mm	0.000	0.110	0.110	0.335	0.087	0.141	0.053	0.445	0.251	0.250
		0.003	24.00	20.50		0.583	21.00	19.50	Top Edge 10mm	0.001	0.413	0.414	0.141	0.225	0.047	0.018	0.555	0.461	0.657
		0.000	24.00	20.50		0.000	21.00	19.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n66A	Ant.0	0.336	25.50	24.50	Ant.4	0.103	18.00	16.50	Front Side 10mm	0.267	0.073	0.340	0.172	0.062	0.055	0.023	0.512	0.395	0.425
		0.487	25.50	24.50		0.131	18.00	16.50	Back Side 10mm	0.387	0.093	0.480	0.248	0.141	0.085	0.034	0.728	0.565	0.655
		0.209	25.50	24.50		0.210	18.00	16.50	Left Edge 10mm	0.166	0.149	0.315	0.000	0.000	0.000	0.000	0.315	0.315	0.315
		0.158	25.50	24.50		0.000	18.00	16.50	Right Edge 10mm	0.126	0.000	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.000	25.50	24.50		0.041	18.00	16.50	Top Edge 10mm	0.000	0.029	0.029	0.141	0.225	0.047	0.018	0.170	0.076	0.272
		0.257	25.50	24.50		0.000	18.00	16.50	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n66A	Ant.1	0.578	24.00	20.50	Ant.4	0.103	18.00	16.50	Front Side 10mm	0.258	0.073	0.331	0.172	0.062	0.055	0.023	0.503	0.386	0.416
		0.655	24.00	20.50		0.131	18.00	16.50	Back Side 10mm	0.293	0.093	0.385	0.248	0.141	0.085	0.034	0.633	0.470	0.560
		0.923	24.00	20.50		0.210	18.00	16.50	Left Edge 10mm	0.412	0.149	0.561	0.000	0.000	0.000	0.000	0.561	0.561	0.561
		0.000	24.00	20.50		0.000	18.00	16.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.003	24.00	20.50		0.041	18.00	16.50	Top Edge 10mm	0.001	0.029	0.030	0.141	0.225	0.047	0.018	0.171	0.077	0.273
		0.000	24.00	20.50		0.000	18.00	16.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

DC_5A+n66A	Ant.0	0.336	25.50	24.50	Ant.5	0.085	23.00	23.00	Front Side 10mm	0.267	0.085	0.352	0.172	0.062	0.055	0.023	0.524	0.407	0.437
		0.487	25.50	24.50		0.138	23.00	23.00	Back Side 10mm	0.387	0.138	0.525	0.248	0.141	0.085	0.034	0.773	0.610	0.700
		0.209	25.50	24.50		0.000	23.00	23.00	Left Edge 10mm	0.166	0.000	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.158	25.50	24.50		0.183	23.00	23.00	Right Edge 10mm	0.126	0.183	0.309	0.335	0.087	0.141	0.053	0.644	0.450	0.449
		0.000	25.50	24.50		0.000	23.00	23.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.257	25.50	24.50		0.000	23.00	23.00	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n66A	Ant.1	0.578	24.00	20.50	Ant.5	0.085	23.00	23.00	Front Side 10mm	0.258	0.085	0.343	0.172	0.062	0.055	0.023	0.515	0.398	0.428
		0.655	24.00	20.50		0.138	23.00	23.00	Back Side 10mm	0.293	0.138	0.431	0.248	0.141	0.085	0.034	0.679	0.516	0.606
		0.923	24.00	20.50		0.000	23.00	23.00	Left Edge 10mm	0.412	0.000	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.000	24.00	20.50		0.183	23.00	23.00	Right Edge 10mm	0.000	0.183	0.183	0.335	0.087	0.141	0.053	0.518	0.324	0.323
		0.003	24.00	20.50		0.000	23.00	23.00	Top Edge 10mm	0.001	0.000	0.001	0.141	0.225	0.047	0.018	0.142	0.048	0.244
		0.000	24.00	20.50		0.000	23.00	23.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.3	0.380	21.00	19.00	Ant.2	0.176	18.00	15.50	Front Side 10mm	0.240	0.099	0.339	0.172	0.062	0.055	0.023	0.511	0.394	0.424
		0.463	21.00	19.00		0.252	18.00	15.50	Back Side 10mm	0.292	0.142	0.434	0.248	0.141	0.085	0.034	0.682	0.519	0.609
		0.000	21.00	19.00		0.092	18.00	15.50	Left Edge 10mm	0.000	0.052	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.051	21.00	19.00		0.000	18.00	15.50	Right Edge 10mm	0.032	0.000	0.032	0.335	0.087	0.141	0.053	0.367	0.173	0.172
		0.000	21.00	19.00		0.345	18.00	15.50	Top Edge 10mm	0.000	0.194	0.194	0.141	0.225	0.047	0.018	0.335	0.241	0.437
		0.461	21.00	19.00		0.000	18.00	15.50	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
DC_7A+n66A	Ant.4	0.145	17.00	14.00	Ant.2	0.176	18.00	15.50	Front Side 10mm	0.073	0.099	0.172	0.172	0.062	0.055	0.023	0.344	0.227	0.257
		0.239	17.00	14.00		0.252	18.00	15.50	Back Side 10mm	0.120	0.142	0.261	0.248	0.141	0.085	0.034	0.509	0.346	0.436
		0.261	17.00	14.00		0.092	18.00	15.50	Left Edge 10mm	0.131	0.052	0.183	0.000	0.000	0.000	0.000	0.183	0.183	0.183
		0.000	17.00	14.00		0.000	18.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.066	17.00	14.00		0.345	18.00	15.50	Top Edge 10mm	0.033	0.194	0.227	0.141	0.225	0.047	0.018	0.368	0.274	0.470
		0.000	17.00	14.00		0.000	18.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.5	0.164	20.00	16.00	Ant.2	0.176	18.00	15.50	Front Side 10mm	0.065	0.099	0.164	0.172	0.062	0.055	0.023	0.336	0.219	0.249
		0.331	20.00	16.00		0.252	18.00	15.50	Back Side 10mm	0.132	0.142	0.273	0.248	0.141	0.085	0.034	0.521	0.358	0.448
		0.000	20.00	16.00		0.092	18.00	15.50	Left Edge 10mm	0.000	0.052	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.408	20.00	16.00		0.000	18.00	15.50	Right Edge 10mm	0.162	0.000	0.162	0.335	0.087	0.141	0.053	0.497	0.303	0.302
		0.000	20.00	16.00		0.345	18.00	15.50	Top Edge 10mm	0.000	0.194	0.194	0.141	0.225	0.047	0.018	0.335	0.241	0.437
		0.000	20.00	16.00		0.000	18.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.2	0.127	17.00	14.50	Ant.3	0.304	21.00	19.50	Front Side 10mm	0.071	0.215	0.287	0.172	0.062	0.055	0.023	0.459	0.342	0.372
		0.202	17.00	14.50		0.363	21.00	19.50	Back Side 10mm	0.114	0.257	0.371	0.248	0.141	0.085	0.034	0.619	0.456	0.546
		0.063	17.00	14.50		0.000	21.00	19.50	Left Edge 10mm	0.035	0.000	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.000	17.00	14.50		0.155	21.00	19.50	Right Edge 10mm	0.000	0.110	0.110	0.335	0.087	0.141	0.053	0.445	0.251	0.250
		0.169	17.00	14.50		0.583	21.00	19.50	Top Edge 10mm	0.095	0.413	0.508	0.141	0.225	0.047	0.018	0.649	0.555	0.751
		0.000	17.00	14.50		0.000	21.00	19.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.4	0.145	17.00	14.00	Ant.3	0.304	21.00	19.50	Front Side 10mm	0.073	0.215	0.288	0.172	0.062	0.055	0.023	0.460	0.343	0.373
		0.239	17.00	14.00		0.363	21.00	19.50	Back Side 10mm	0.120	0.257	0.377	0.248	0.141	0.085	0.034	0.625	0.462	0.552
		0.261	17.00	14.00		0.000	21.00	19.50	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	17.00	14.00		0.155	21.00	19.50	Right Edge 10mm	0.000	0.110	0.110	0.335	0.087	0.141	0.053	0.445	0.251	0.250
		0.066	17.00	14.00		0.583	21.00	19.50	Top Edge 10mm	0.033	0.413	0.446	0.141	0.225	0.047	0.018	0.587	0.493	0.689
		0.000	17.00	14.00		0.000	21.00	19.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.5	0.164	20.00	16.00	Ant.3	0.304	21.00	19.50	Front Side 10mm	0.065	0.215	0.281	0.172	0.062	0.055	0.023	0.453	0.336	0.366

		0.331	20.00	16.00		0.363	21.00	19.50	Back Side 10mm	0.132	0.257	0.389	0.248	0.141	0.085	0.034	0.637	0.474	0.564
		0.000	20.00	16.00		0.000	21.00	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.408	20.00	16.00		0.155	21.00	19.50	Right Edge 10mm	0.162	0.110	0.272	0.335	0.087	0.141	0.053	0.607	0.413	0.412
		0.000	20.00	16.00		0.583	21.00	19.50	Top Edge 10mm	0.000	0.413	0.413	0.141	0.225	0.047	0.018	0.554	0.460	0.656
		0.000	20.00	16.00		0.000	21.00	19.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.2	0.127	17.00	14.50	Ant.4	0.103	18.00	16.50	Front Side 10mm	0.071	0.073	0.144	0.172	0.062	0.055	0.023	0.316	0.199	0.229
		0.202	17.00	14.50		0.131	18.00	16.50	Back Side 10mm	0.114	0.093	0.206	0.248	0.141	0.085	0.034	0.454	0.291	0.381
		0.063	17.00	14.50		0.210	18.00	16.50	Left Edge 10mm	0.035	0.149	0.184	0.000	0.000	0.000	0.000	0.184	0.184	0.184
		0.000	17.00	14.50		0.000	18.00	16.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.169	17.00	14.50		0.041	18.00	16.50	Top Edge 10mm	0.095	0.029	0.124	0.141	0.225	0.047	0.018	0.265	0.171	0.367
		0.000	17.00	14.50		0.000	18.00	16.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.3	0.380	21.00	19.00	Ant.4	0.103	18.00	16.50	Front Side 10mm	0.240	0.073	0.313	0.172	0.062	0.055	0.023	0.485	0.368	0.398
		0.463	21.00	19.00		0.131	18.00	16.50	Back Side 10mm	0.292	0.093	0.385	0.248	0.141	0.085	0.034	0.633	0.470	0.560
		0.000	21.00	19.00		0.210	18.00	16.50	Left Edge 10mm	0.000	0.149	0.149	0.000	0.000	0.000	0.000	0.149	0.149	0.149
		0.051	21.00	19.00		0.000	18.00	16.50	Right Edge 10mm	0.032	0.000	0.032	0.335	0.087	0.141	0.053	0.367	0.173	0.172
		0.000	21.00	19.00		0.041	18.00	16.50	Top Edge 10mm	0.000	0.029	0.029	0.141	0.225	0.047	0.018	0.170	0.076	0.272
		0.461	21.00	19.00		0.000	18.00	16.50	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
DC_7A+n66A	Ant.5	0.164	20.00	16.00	Ant.4	0.103	18.00	16.50	Front Side 10mm	0.065	0.073	0.138	0.172	0.062	0.055	0.023	0.310	0.193	0.223
		0.331	20.00	16.00		0.131	18.00	16.50	Back Side 10mm	0.132	0.093	0.225	0.248	0.141	0.085	0.034	0.473	0.310	0.400
		0.000	20.00	16.00		0.210	18.00	16.50	Left Edge 10mm	0.000	0.149	0.149	0.000	0.000	0.000	0.000	0.149	0.149	0.149
		0.408	20.00	16.00		0.000	18.00	16.50	Right Edge 10mm	0.162	0.000	0.162	0.335	0.087	0.141	0.053	0.497	0.303	0.302
		0.000	20.00	16.00		0.041	18.00	16.50	Top Edge 10mm	0.000	0.029	0.029	0.141	0.225	0.047	0.018	0.170	0.076	0.272
		0.000	20.00	16.00		0.000	18.00	16.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.2	0.127	17.00	14.50	Ant.5	0.085	23.00	23.00	Front Side 10mm	0.071	0.085	0.156	0.172	0.062	0.055	0.023	0.328	0.211	0.241
		0.202	17.00	14.50		0.138	23.00	23.00	Back Side 10mm	0.114	0.138	0.252	0.248	0.141	0.085	0.034	0.500	0.337	0.427
		0.063	17.00	14.50		0.000	23.00	23.00	Left Edge 10mm	0.035	0.000	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.000	17.00	14.50		0.183	23.00	23.00	Right Edge 10mm	0.000	0.183	0.183	0.335	0.087	0.141	0.053	0.518	0.324	0.323
		0.169	17.00	14.50		0.000	23.00	23.00	Top Edge 10mm	0.095	0.000	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.000	17.00	14.50		0.000	23.00	23.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n66A	Ant.3	0.380	21.00	19.00	Ant.5	0.085	23.00	23.00	Front Side 10mm	0.240	0.085	0.325	0.172	0.062	0.055	0.023	0.497	0.380	0.410
		0.463	21.00	19.00		0.138	23.00	23.00	Back Side 10mm	0.292	0.138	0.430	0.248	0.141	0.085	0.034	0.678	0.515	0.605
		0.000	21.00	19.00		0.000	23.00	23.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.051	21.00	19.00		0.183	23.00	23.00	Right Edge 10mm	0.032	0.183	0.215	0.335	0.087	0.141	0.053	0.550	0.356	0.355
		0.000	21.00	19.00		0.000	23.00	23.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.461	21.00	19.00		0.000	23.00	23.00	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
DC_7A+n66A	Ant.4	0.145	17.00	14.00	Ant.5	0.085	23.00	23.00	Front Side 10mm	0.073	0.085	0.158	0.172	0.062	0.055	0.023	0.330	0.213	0.243
		0.239	17.00	14.00		0.138	23.00	23.00	Back Side 10mm	0.120	0.138	0.258	0.248	0.141	0.085	0.034	0.506	0.343	0.433
		0.261	17.00	14.00		0.000	23.00	23.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	17.00	14.00		0.183	23.00	23.00	Right Edge 10mm	0.000	0.183	0.183	0.335	0.087	0.141	0.053	0.518	0.324	0.323
		0.066	17.00	14.00		0.000	23.00	23.00	Top Edge 10mm	0.033	0.000	0.033	0.141	0.225	0.047	0.018	0.174	0.080	0.276
		0.000	17.00	14.00		0.000	23.00	23.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n38A	Ant.3	0.306	22.00	19.50	Ant.2	0.098	16.50	15.00	Front Side 10mm	0.172	0.069	0.241	0.172	0.062	0.055	0.023	0.413	0.296	0.326
		0.436	22.00	19.50		0.155	16.50	15.00	Back Side 10mm	0.245	0.110	0.355	0.248	0.141	0.085	0.034	0.603	0.440	0.530

		0.000	22.00	19.50		0.048	16.50	15.00	Left Edge 10mm	0.000	0.034	0.034	0.000	0.000	0.000	0.000	0.034	0.034	0.034
		0.111	22.00	19.50		0.000	16.50	15.00	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.164	16.50	15.00	Top Edge 10mm	0.000	0.116	0.116	0.141	0.225	0.047	0.018	0.257	0.163	0.359
		0.633	22.00	19.50		0.000	16.50	15.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n38A	Ant.4	0.209	20.50	15.50	Ant.2	0.098	16.50	15.00	Front Side 10mm	0.066	0.069	0.135	0.172	0.062	0.055	0.023	0.307	0.190	0.220
		0.259	20.50	15.50		0.155	16.50	15.00	Back Side 10mm	0.082	0.110	0.192	0.248	0.141	0.085	0.034	0.440	0.277	0.367
		0.414	20.50	15.50		0.048	16.50	15.00	Left Edge 10mm	0.131	0.034	0.165	0.000	0.000	0.000	0.000	0.165	0.165	0.165
		0.000	20.50	15.50		0.000	16.50	15.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.042	20.50	15.50		0.164	16.50	15.00	Top Edge 10mm	0.013	0.116	0.129	0.141	0.225	0.047	0.018	0.270	0.176	0.372
		0.000	20.50	15.50		0.000	16.50	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n38A	Ant.5	0.143	24.00	24.00	Ant.2	0.098	16.50	15.00	Front Side 10mm	0.143	0.069	0.212	0.172	0.062	0.055	0.023	0.384	0.267	0.297
		0.225	24.00	24.00		0.155	16.50	15.00	Back Side 10mm	0.225	0.110	0.335	0.248	0.141	0.085	0.034	0.583	0.420	0.510
		0.000	24.00	24.00		0.048	16.50	15.00	Left Edge 10mm	0.000	0.034	0.034	0.000	0.000	0.000	0.000	0.034	0.034	0.034
		0.321	24.00	24.00		0.000	16.50	15.00	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.164	16.50	15.00	Top Edge 10mm	0.000	0.116	0.116	0.141	0.225	0.047	0.018	0.257	0.163	0.359
		0.000	24.00	24.00		0.000	16.50	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n38A	Ant.2	0.164	17.00	14.00	Ant.3	0.180	22.50	19.50	Front Side 10mm	0.082	0.090	0.172	0.172	0.062	0.055	0.023	0.344	0.227	0.257
		0.235	17.00	14.00		0.247	22.50	19.50	Back Side 10mm	0.118	0.124	0.242	0.248	0.141	0.085	0.034	0.490	0.327	0.417
		0.063	17.00	14.00		0.000	22.50	19.50	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.087	22.50	19.50	Right Edge 10mm	0.000	0.044	0.044	0.335	0.087	0.141	0.053	0.379	0.185	0.184
		0.303	17.00	14.00		0.000	22.50	19.50	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.544	22.50	19.50	Bottom Edge 10mm	0.000	0.273	0.273	0.000	0.000	0.000	0.000	0.273	0.273	0.273
DC_4A+n38A	Ant.4	0.209	20.50	15.50	Ant.3	0.180	22.50	19.50	Front Side 10mm	0.066	0.090	0.156	0.172	0.062	0.055	0.023	0.328	0.211	0.241
		0.259	20.50	15.50		0.247	22.50	19.50	Back Side 10mm	0.082	0.124	0.206	0.248	0.141	0.085	0.034	0.454	0.291	0.381
		0.414	20.50	15.50		0.000	22.50	19.50	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.087	22.50	19.50	Right Edge 10mm	0.000	0.044	0.044	0.335	0.087	0.141	0.053	0.379	0.185	0.184
		0.042	20.50	15.50		0.000	22.50	19.50	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.544	22.50	19.50	Bottom Edge 10mm	0.000	0.273	0.273	0.000	0.000	0.000	0.000	0.273	0.273	0.273
DC_4A+n38A	Ant.5	0.143	24.00	24.00	Ant.3	0.180	22.50	19.50	Front Side 10mm	0.143	0.090	0.233	0.172	0.062	0.055	0.023	0.405	0.288	0.318
		0.225	24.00	24.00		0.247	22.50	19.50	Back Side 10mm	0.225	0.124	0.349	0.248	0.141	0.085	0.034	0.597	0.434	0.524
		0.000	24.00	24.00		0.000	22.50	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.321	24.00	24.00		0.087	22.50	19.50	Right Edge 10mm	0.321	0.044	0.365	0.335	0.087	0.141	0.053	0.700	0.506	0.505
		0.000	24.00	24.00		0.000	22.50	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.544	22.50	19.50	Bottom Edge 10mm	0.000	0.273	0.273	0.000	0.000	0.000	0.000	0.273	0.273	0.273
DC_4A+n38A	Ant.2	0.164	17.00	14.00	Ant.4	0.091	17.00	15.50	Front Side 10mm	0.082	0.064	0.147	0.172	0.062	0.055	0.023	0.319	0.202	0.232
		0.235	17.00	14.00		0.161	17.00	15.50	Back Side 10mm	0.118	0.114	0.232	0.248	0.141	0.085	0.034	0.480	0.317	0.407
		0.063	17.00	14.00		0.191	17.00	15.50	Left Edge 10mm	0.032	0.135	0.167	0.000	0.000	0.000	0.000	0.167	0.167	0.167
		0.000	17.00	14.00		0.000	17.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.303	17.00	14.00		0.055	17.00	15.50	Top Edge 10mm	0.152	0.039	0.191	0.141	0.225	0.047	0.018	0.332	0.238	0.434
		0.000	17.00	14.00		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n38A	Ant.3	0.306	22.00	19.50	Ant.4	0.091	17.00	15.50	Front Side 10mm	0.172	0.064	0.236	0.172	0.062	0.055	0.023	0.408	0.291	0.321
		0.436	22.00	19.50		0.161	17.00	15.50	Back Side 10mm	0.245	0.114	0.359	0.248	0.141	0.085	0.034	0.607	0.444	0.534
		0.000	22.00	19.50		0.191	17.00	15.50	Left Edge 10mm	0.000	0.135	0.135	0.000	0.000	0.000	0.000	0.135	0.135	0.135

		0.111	22.00	19.50		0.000	17.00	15.50	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.055	17.00	15.50	Top Edge 10mm	0.000	0.039	0.039	0.141	0.225	0.047	0.018	0.180	0.086	0.282
		0.633	22.00	19.50		0.000	17.00	15.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n38A	Ant.5	0.143	24.00	24.00	Ant.4	0.091	17.00	15.50	Front Side 10mm	0.143	0.064	0.207	0.172	0.062	0.055	0.023	0.379	0.262	0.292
		0.225	24.00	24.00		0.161	17.00	15.50	Back Side 10mm	0.225	0.114	0.339	0.248	0.141	0.085	0.034	0.587	0.424	0.514
		0.000	24.00	24.00		0.191	17.00	15.50	Left Edge 10mm	0.000	0.135	0.135	0.000	0.000	0.000	0.000	0.135	0.135	0.135
		0.321	24.00	24.00		0.000	17.00	15.50	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.055	17.00	15.50	Top Edge 10mm	0.000	0.039	0.039	0.141	0.225	0.047	0.018	0.180	0.086	0.282
		0.000	24.00	24.00		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n38A	Ant.2	0.164	17.00	14.00	Ant.5	0.106	21.00	18.00	Front Side 10mm	0.082	0.053	0.135	0.172	0.062	0.055	0.023	0.307	0.190	0.220
		0.235	17.00	14.00		0.186	21.00	18.00	Back Side 10mm	0.118	0.093	0.211	0.248	0.141	0.085	0.034	0.459	0.296	0.386
		0.063	17.00	14.00		0.000	21.00	18.00	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.288	21.00	18.00	Right Edge 10mm	0.000	0.144	0.144	0.335	0.087	0.141	0.053	0.479	0.285	0.284
		0.303	17.00	14.00		0.000	21.00	18.00	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.000	21.00	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n38A	Ant.3	0.306	22.00	19.50	Ant.5	0.106	21.00	18.00	Front Side 10mm	0.172	0.053	0.225	0.172	0.062	0.055	0.023	0.397	0.280	0.310
		0.436	22.00	19.50		0.186	21.00	18.00	Back Side 10mm	0.245	0.093	0.338	0.248	0.141	0.085	0.034	0.586	0.423	0.513
		0.000	22.00	19.50		0.000	21.00	18.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.111	22.00	19.50		0.288	21.00	18.00	Right Edge 10mm	0.062	0.144	0.207	0.335	0.087	0.141	0.053	0.542	0.348	0.347
		0.000	22.00	19.50		0.000	21.00	18.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.633	22.00	19.50		0.000	21.00	18.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n38A	Ant.4	0.209	20.50	15.50	Ant.5	0.106	21.00	18.00	Front Side 10mm	0.066	0.053	0.119	0.172	0.062	0.055	0.023	0.291	0.174	0.204
		0.259	20.50	15.50		0.186	21.00	18.00	Back Side 10mm	0.082	0.093	0.175	0.248	0.141	0.085	0.034	0.423	0.260	0.350
		0.414	20.50	15.50		0.000	21.00	18.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.288	21.00	18.00	Right Edge 10mm	0.000	0.144	0.144	0.335	0.087	0.141	0.053	0.479	0.285	0.284
		0.042	20.50	15.50		0.000	21.00	18.00	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.000	21.00	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n38A	Ant.3	0.372	22.00	19.50	Ant.2	0.098	16.50	15.00	Front Side 10mm	0.209	0.069	0.279	0.172	0.062	0.055	0.023	0.451	0.334	0.364
		0.498	22.00	19.50		0.155	16.50	15.00	Back Side 10mm	0.280	0.110	0.390	0.248	0.141	0.085	0.034	0.638	0.475	0.565
		0.000	22.00	19.50		0.048	16.50	15.00	Left Edge 10mm	0.000	0.034	0.034	0.000	0.000	0.000	0.000	0.034	0.034	0.034
		0.129	22.00	19.50		0.000	16.50	15.00	Right Edge 10mm	0.073	0.000	0.073	0.335	0.087	0.141	0.053	0.408	0.214	0.213
		0.000	22.00	19.50		0.164	16.50	15.00	Top Edge 10mm	0.000	0.116	0.116	0.141	0.225	0.047	0.018	0.257	0.163	0.359
		0.677	22.00	19.50		0.000	16.50	15.00	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n38A	Ant.4	0.234	20.00	15.50	Ant.2	0.098	16.50	15.00	Front Side 10mm	0.083	0.069	0.152	0.172	0.062	0.055	0.023	0.324	0.207	0.237
		0.324	20.00	15.50		0.155	16.50	15.00	Back Side 10mm	0.115	0.110	0.225	0.248	0.141	0.085	0.034	0.473	0.310	0.400
		0.502	20.00	15.50		0.048	16.50	15.00	Left Edge 10mm	0.178	0.034	0.212	0.000	0.000	0.000	0.000	0.212	0.212	0.212
		0.000	20.00	15.50		0.000	16.50	15.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.050	20.00	15.50		0.164	16.50	15.00	Top Edge 10mm	0.018	0.116	0.134	0.141	0.225	0.047	0.018	0.275	0.181	0.377
		0.000	20.00	15.50		0.000	16.50	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n38A	Ant.5	0.130	24.00	24.00	Ant.2	0.098	16.50	15.00	Front Side 10mm	0.130	0.069	0.199	0.172	0.062	0.055	0.023	0.371	0.254	0.284
		0.226	24.00	24.00		0.155	16.50	15.00	Back Side 10mm	0.226	0.110	0.336	0.248	0.141	0.085	0.034	0.584	0.421	0.511
		0.000	24.00	24.00		0.048	16.50	15.00	Left Edge 10mm	0.000	0.034	0.034	0.000	0.000	0.000	0.000	0.034	0.034	0.034
		0.299	24.00	24.00		0.000	16.50	15.00	Right Edge 10mm	0.299	0.000	0.299	0.335	0.087	0.141	0.053	0.634	0.440	0.439

		0.000	24.00	24.00		0.164	16.50	15.00	Top Edge 10mm	0.000	0.116	0.116	0.141	0.225	0.047	0.018	0.257	0.163	0.359
		0.000	24.00	24.00		0.000	16.50	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n38A	Ant.2	0.302	17.50	14.00	Ant.3	0.180	22.50	19.50	Front Side 10mm	0.135	0.090	0.225	0.172	0.062	0.055	0.023	0.397	0.280	0.310
		0.074	17.50	14.00		0.247	22.50	19.50	Back Side 10mm	0.033	0.124	0.157	0.248	0.141	0.085	0.034	0.405	0.242	0.332
		0.395	17.50	14.00		0.000	22.50	19.50	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.087	22.50	19.50	Right Edge 10mm	0.000	0.044	0.044	0.335	0.087	0.141	0.053	0.379	0.185	0.184
		0.214	17.50	14.00		0.000	22.50	19.50	Top Edge 10mm	0.096	0.000	0.096	0.141	0.225	0.047	0.018	0.237	0.143	0.339
		0.000	17.50	14.00		0.544	22.50	19.50	Bottom Edge 10mm	0.000	0.273	0.273	0.000	0.000	0.000	0.000	0.273	0.273	0.273
DC_66A+n38A	Ant.4	0.234	20.00	15.50	Ant.3	0.180	22.50	19.50	Front Side 10mm	0.083	0.090	0.173	0.172	0.062	0.055	0.023	0.345	0.228	0.258
		0.324	20.00	15.50		0.247	22.50	19.50	Back Side 10mm	0.115	0.124	0.239	0.248	0.141	0.085	0.034	0.487	0.324	0.414
		0.502	20.00	15.50		0.000	22.50	19.50	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.087	22.50	19.50	Right Edge 10mm	0.000	0.044	0.044	0.335	0.087	0.141	0.053	0.379	0.185	0.184
		0.050	20.00	15.50		0.000	22.50	19.50	Top Edge 10mm	0.018	0.000	0.018	0.141	0.225	0.047	0.018	0.159	0.065	0.261
		0.000	20.00	15.50		0.544	22.50	19.50	Bottom Edge 10mm	0.000	0.273	0.273	0.000	0.000	0.000	0.000	0.273	0.273	0.273
DC_66A+n38A	Ant.5	0.130	24.00	24.00	Ant.3	0.180	22.50	19.50	Front Side 10mm	0.130	0.090	0.220	0.172	0.062	0.055	0.023	0.392	0.275	0.305
		0.226	24.00	24.00		0.247	22.50	19.50	Back Side 10mm	0.226	0.124	0.350	0.248	0.141	0.085	0.034	0.598	0.435	0.525
		0.000	24.00	24.00		0.000	22.50	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.299	24.00	24.00		0.087	22.50	19.50	Right Edge 10mm	0.299	0.044	0.343	0.335	0.087	0.141	0.053	0.678	0.484	0.483
		0.000	24.00	24.00		0.000	22.50	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.544	22.50	19.50	Bottom Edge 10mm	0.000	0.273	0.273	0.000	0.000	0.000	0.000	0.273	0.273	0.273
DC_66A+n38A	Ant.2	0.302	17.50	14.00	Ant.4	0.091	17.00	15.50	Front Side 10mm	0.135	0.064	0.199	0.172	0.062	0.055	0.023	0.371	0.254	0.284
		0.074	17.50	14.00		0.161	17.00	15.50	Back Side 10mm	0.033	0.114	0.147	0.248	0.141	0.085	0.034	0.395	0.232	0.322
		0.395	17.50	14.00		0.191	17.00	15.50	Left Edge 10mm	0.176	0.135	0.312	0.000	0.000	0.000	0.000	0.312	0.312	0.312
		0.000	17.50	14.00		0.000	17.00	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.214	17.50	14.00		0.055	17.00	15.50	Top Edge 10mm	0.096	0.039	0.135	0.141	0.225	0.047	0.018	0.276	0.182	0.378
		0.000	17.50	14.00		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n38A	Ant.3	0.372	22.00	19.50	Ant.4	0.091	17.00	15.50	Front Side 10mm	0.209	0.064	0.274	0.172	0.062	0.055	0.023	0.446	0.329	0.359
		0.498	22.00	19.50		0.161	17.00	15.50	Back Side 10mm	0.280	0.114	0.394	0.248	0.141	0.085	0.034	0.642	0.479	0.569
		0.000	22.00	19.50		0.191	17.00	15.50	Left Edge 10mm	0.000	0.135	0.135	0.000	0.000	0.000	0.000	0.135	0.135	0.135
		0.129	22.00	19.50		0.000	17.00	15.50	Right Edge 10mm	0.073	0.000	0.073	0.335	0.087	0.141	0.053	0.408	0.214	0.213
		0.000	22.00	19.50		0.055	17.00	15.50	Top Edge 10mm	0.000	0.039	0.039	0.141	0.225	0.047	0.018	0.180	0.086	0.282
		0.677	22.00	19.50		0.000	17.00	15.50	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n38A	Ant.5	0.130	24.00	24.00	Ant.4	0.091	17.00	15.50	Front Side 10mm	0.130	0.064	0.194	0.172	0.062	0.055	0.023	0.366	0.249	0.279
		0.226	24.00	24.00		0.161	17.00	15.50	Back Side 10mm	0.226	0.114	0.340	0.248	0.141	0.085	0.034	0.588	0.425	0.515
		0.000	24.00	24.00		0.191	17.00	15.50	Left Edge 10mm	0.000	0.135	0.135	0.000	0.000	0.000	0.000	0.135	0.135	0.135
		0.299	24.00	24.00		0.000	17.00	15.50	Right Edge 10mm	0.299	0.000	0.299	0.335	0.087	0.141	0.053	0.634	0.440	0.439
		0.000	24.00	24.00		0.055	17.00	15.50	Top Edge 10mm	0.000	0.039	0.039	0.141	0.225	0.047	0.018	0.180	0.086	0.282
		0.000	24.00	24.00		0.000	17.00	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n38A	Ant.2	0.302	17.50	14.00	Ant.5	0.106	21.00	18.00	Front Side 10mm	0.135	0.053	0.188	0.172	0.062	0.055	0.023	0.360	0.243	0.273
		0.074	17.50	14.00		0.186	21.00	18.00	Back Side 10mm	0.033	0.093	0.126	0.248	0.141	0.085	0.034	0.374	0.211	0.301
		0.395	17.50	14.00		0.000	21.00	18.00	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.288	21.00	18.00	Right Edge 10mm	0.000	0.144	0.144	0.335	0.087	0.141	0.053	0.479	0.285	0.284
		0.214	17.50	14.00		0.000	21.00	18.00	Top Edge 10mm	0.096	0.000	0.096	0.141	0.225	0.047	0.018	0.237	0.143	0.339

		0.000	17.50	14.00		0.000	21.00	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n38A	Ant.3	0.372	22.00	19.50	Ant.5	0.106	21.00	18.00	Front Side 10mm	0.209	0.053	0.262	0.172	0.062	0.055	0.023	0.434	0.317	0.347
		0.498	22.00	19.50		0.186	21.00	18.00	Back Side 10mm	0.280	0.093	0.373	0.248	0.141	0.085	0.034	0.621	0.458	0.548
		0.000	22.00	19.50		0.000	21.00	18.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.129	22.00	19.50		0.288	21.00	18.00	Right Edge 10mm	0.073	0.144	0.217	0.335	0.087	0.141	0.053	0.552	0.358	0.357
		0.000	22.00	19.50		0.000	21.00	18.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.677	22.00	19.50		0.000	21.00	18.00	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n38A	Ant.4	0.234	20.00	15.50	Ant.5	0.106	21.00	18.00	Front Side 10mm	0.083	0.053	0.136	0.172	0.062	0.055	0.023	0.308	0.191	0.221
		0.324	20.00	15.50		0.186	21.00	18.00	Back Side 10mm	0.115	0.093	0.208	0.248	0.141	0.085	0.034	0.456	0.293	0.383
		0.502	20.00	15.50		0.000	21.00	18.00	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.288	21.00	18.00	Right Edge 10mm	0.000	0.144	0.144	0.335	0.087	0.141	0.053	0.479	0.285	0.284
		0.050	20.00	15.50		0.000	21.00	18.00	Top Edge 10mm	0.018	0.000	0.018	0.141	0.225	0.047	0.018	0.159	0.065	0.261
		0.000	20.00	15.50		0.000	21.00	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n41A	Ant.3	0.306	22.00	19.50	Ant.2	0.101	17.00	15.00	Front Side 10mm	0.172	0.064	0.236	0.172	0.062	0.055	0.023	0.408	0.291	0.321
		0.436	22.00	19.50		0.154	17.00	15.00	Back Side 10mm	0.245	0.097	0.342	0.248	0.141	0.085	0.034	0.590	0.427	0.517
		0.000	22.00	19.50		0.000	17.00	15.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.111	22.00	19.50		0.032	17.00	15.00	Right Edge 10mm	0.062	0.020	0.083	0.335	0.087	0.141	0.053	0.418	0.224	0.223
		0.000	22.00	19.50		0.168	17.00	15.00	Top Edge 10mm	0.000	0.106	0.106	0.141	0.225	0.047	0.018	0.247	0.153	0.349
		0.633	22.00	19.50		0.000	17.00	15.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n41A	Ant.4	0.209	20.50	15.50	Ant.2	0.101	17.00	15.00	Front Side 10mm	0.066	0.064	0.130	0.172	0.062	0.055	0.023	0.302	0.185	0.215
		0.259	20.50	15.50		0.154	17.00	15.00	Back Side 10mm	0.082	0.097	0.179	0.248	0.141	0.085	0.034	0.427	0.264	0.354
		0.414	20.50	15.50		0.000	17.00	15.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.032	17.00	15.00	Right Edge 10mm	0.000	0.020	0.020	0.335	0.087	0.141	0.053	0.355	0.161	0.160
		0.042	20.50	15.50		0.168	17.00	15.00	Top Edge 10mm	0.013	0.106	0.119	0.141	0.225	0.047	0.018	0.260	0.166	0.362
		0.000	20.50	15.50		0.000	17.00	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n41A	Ant.5	0.143	24.00	24.00	Ant.2	0.101	17.00	15.00	Front Side 10mm	0.143	0.064	0.207	0.172	0.062	0.055	0.023	0.379	0.262	0.292
		0.225	24.00	24.00		0.154	17.00	15.00	Back Side 10mm	0.225	0.097	0.322	0.248	0.141	0.085	0.034	0.570	0.407	0.497
		0.000	24.00	24.00		0.000	17.00	15.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.321	24.00	24.00		0.032	17.00	15.00	Right Edge 10mm	0.321	0.020	0.341	0.335	0.087	0.141	0.053	0.676	0.482	0.481
		0.000	24.00	24.00		0.168	17.00	15.00	Top Edge 10mm	0.000	0.106	0.106	0.141	0.225	0.047	0.018	0.247	0.153	0.349
		0.000	24.00	24.00		0.000	17.00	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n41A	Ant.2	0.164	17.00	14.00	Ant.3	0.313	21.50	19.50	Front Side 10mm	0.082	0.197	0.280	0.172	0.062	0.055	0.023	0.452	0.335	0.365
		0.235	17.00	14.00		0.436	21.50	19.50	Back Side 10mm	0.118	0.275	0.393	0.248	0.141	0.085	0.034	0.641	0.478	0.568
		0.063	17.00	14.00		0.000	21.50	19.50	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.087	21.50	19.50	Right Edge 10mm	0.000	0.055	0.055	0.335	0.087	0.141	0.053	0.390	0.196	0.195
		0.303	17.00	14.00		0.000	21.50	19.50	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.755	21.50	19.50	Bottom Edge 10mm	0.000	0.476	0.476	0.000	0.000	0.000	0.000	0.476	0.476	0.476
DC_4A+n41A	Ant.4	0.209	20.50	15.50	Ant.3	0.313	21.50	19.50	Front Side 10mm	0.066	0.197	0.264	0.172	0.062	0.055	0.023	0.436	0.319	0.349
		0.259	20.50	15.50		0.436	21.50	19.50	Back Side 10mm	0.082	0.275	0.357	0.248	0.141	0.085	0.034	0.605	0.442	0.532
		0.414	20.50	15.50		0.000	21.50	19.50	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.087	21.50	19.50	Right Edge 10mm	0.000	0.055	0.055	0.335	0.087	0.141	0.053	0.390	0.196	0.195
		0.042	20.50	15.50		0.000	21.50	19.50	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.755	21.50	19.50	Bottom Edge 10mm	0.000	0.476	0.476	0.000	0.000	0.000	0.000	0.476	0.476	0.476

DC_4A+n41A	Ant.5	0.143	24.00	24.00	Ant.3	0.313	21.50	19.50	Front Side 10mm	0.143	0.197	0.340	0.172	0.062	0.055	0.023	0.512	0.395	0.425
		0.225	24.00	24.00		0.436	21.50	19.50	Back Side 10mm	0.225	0.275	0.500	0.248	0.141	0.085	0.034	0.748	0.585	0.675
		0.000	24.00	24.00		0.000	21.50	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.321	24.00	24.00		0.087	21.50	19.50	Right Edge 10mm	0.321	0.055	0.376	0.335	0.087	0.141	0.053	0.711	0.517	0.516
		0.000	24.00	24.00		0.000	21.50	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.755	21.50	19.50	Bottom Edge 10mm	0.000	0.476	0.476	0.000	0.000	0.000	0.000	0.476	0.476	0.476
DC_4A+n41A	Ant.2	0.164	17.00	14.00	Ant.4	0.066	17.00	14.50	Front Side 10mm	0.082	0.037	0.119	0.172	0.062	0.055	0.023	0.291	0.174	0.204
		0.235	17.00	14.00		0.121	17.00	14.50	Back Side 10mm	0.118	0.068	0.186	0.248	0.141	0.085	0.034	0.434	0.271	0.361
		0.063	17.00	14.00		0.142	17.00	14.50	Left Edge 10mm	0.032	0.080	0.111	0.000	0.000	0.000	0.000	0.111	0.111	0.111
		0.000	17.00	14.00		0.000	17.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.303	17.00	14.00		0.044	17.00	14.50	Top Edge 10mm	0.152	0.025	0.177	0.141	0.225	0.047	0.018	0.318	0.224	0.420
		0.000	17.00	14.00		0.000	17.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n41A	Ant.3	0.306	22.00	19.50	Ant.4	0.066	17.00	14.50	Front Side 10mm	0.172	0.037	0.209	0.172	0.062	0.055	0.023	0.381	0.264	0.294
		0.436	22.00	19.50		0.121	17.00	14.50	Back Side 10mm	0.245	0.068	0.313	0.248	0.141	0.085	0.034	0.561	0.398	0.488
		0.000	22.00	19.50		0.142	17.00	14.50	Left Edge 10mm	0.000	0.080	0.080	0.000	0.000	0.000	0.000	0.080	0.080	0.080
		0.111	22.00	19.50		0.000	17.00	14.50	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.044	17.00	14.50	Top Edge 10mm	0.000	0.025	0.025	0.141	0.225	0.047	0.018	0.166	0.072	0.268
		0.633	22.00	19.50		0.000	17.00	14.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n41A	Ant.5	0.143	24.00	24.00	Ant.4	0.066	17.00	14.50	Front Side 10mm	0.143	0.037	0.180	0.172	0.062	0.055	0.023	0.352	0.235	0.265
		0.225	24.00	24.00		0.121	17.00	14.50	Back Side 10mm	0.225	0.068	0.293	0.248	0.141	0.085	0.034	0.541	0.378	0.468
		0.000	24.00	24.00		0.142	17.00	14.50	Left Edge 10mm	0.000	0.080	0.080	0.000	0.000	0.000	0.000	0.080	0.080	0.080
		0.321	24.00	24.00		0.000	17.00	14.50	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.044	17.00	14.50	Top Edge 10mm	0.000	0.025	0.025	0.141	0.225	0.047	0.018	0.166	0.072	0.268
		0.000	24.00	24.00		0.000	17.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n41A	Ant.2	0.164	17.00	14.00	Ant.5	0.093	22.50	18.00	Front Side 10mm	0.082	0.033	0.115	0.172	0.062	0.055	0.023	0.287	0.170	0.200
		0.235	17.00	14.00		0.174	22.50	18.00	Back Side 10mm	0.118	0.062	0.180	0.248	0.141	0.085	0.034	0.428	0.265	0.355
		0.063	17.00	14.00		0.000	22.50	18.00	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.251	22.50	18.00	Right Edge 10mm	0.000	0.089	0.089	0.335	0.087	0.141	0.053	0.424	0.230	0.229
		0.303	17.00	14.00		0.000	22.50	18.00	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.000	22.50	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n41A	Ant.3	0.306	22.00	19.50	Ant.5	0.093	22.50	18.00	Front Side 10mm	0.172	0.033	0.205	0.172	0.062	0.055	0.023	0.377	0.260	0.290
		0.436	22.00	19.50		0.174	22.50	18.00	Back Side 10mm	0.245	0.062	0.307	0.248	0.141	0.085	0.034	0.555	0.392	0.482
		0.000	22.00	19.50		0.000	22.50	18.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.111	22.00	19.50		0.251	22.50	18.00	Right Edge 10mm	0.062	0.089	0.151	0.335	0.087	0.141	0.053	0.486	0.292	0.291
		0.000	22.00	19.50		0.000	22.50	18.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.633	22.00	19.50		0.000	22.50	18.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n41A	Ant.4	0.209	20.50	15.50	Ant.5	0.093	22.50	18.00	Front Side 10mm	0.066	0.033	0.099	0.172	0.062	0.055	0.023	0.271	0.154	0.184
		0.259	20.50	15.50		0.174	22.50	18.00	Back Side 10mm	0.082	0.062	0.144	0.248	0.141	0.085	0.034	0.392	0.229	0.319
		0.414	20.50	15.50		0.000	22.50	18.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.251	22.50	18.00	Right Edge 10mm	0.000	0.089	0.089	0.335	0.087	0.141	0.053	0.424	0.230	0.229
		0.042	20.50	15.50		0.000	22.50	18.00	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.000	22.50	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n41A	Ant.3	0.372	22.00	19.50	Ant.2	0.101	17.00	15.00	Front Side 10mm	0.209	0.064	0.273	0.172	0.062	0.055	0.023	0.445	0.328	0.358

		0.498	22.00	19.50		0.154	17.00	15.00	Back Side 10mm	0.280	0.097	0.377	0.248	0.141	0.085	0.034	0.625	0.462	0.552
		0.000	22.00	19.50		0.000	17.00	15.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.129	22.00	19.50		0.032	17.00	15.00	Right Edge 10mm	0.073	0.020	0.093	0.335	0.087	0.141	0.053	0.428	0.234	0.233
		0.000	22.00	19.50		0.168	17.00	15.00	Top Edge 10mm	0.000	0.106	0.106	0.141	0.225	0.047	0.018	0.247	0.153	0.349
		0.677	22.00	19.50		0.000	17.00	15.00	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n41A	Ant.4	0.234	20.00	15.50	Ant.2	0.101	17.00	15.00	Front Side 10mm	0.083	0.064	0.147	0.172	0.062	0.055	0.023	0.319	0.202	0.232
		0.324	20.00	15.50		0.154	17.00	15.00	Back Side 10mm	0.115	0.097	0.212	0.248	0.141	0.085	0.034	0.460	0.297	0.387
		0.502	20.00	15.50		0.000	17.00	15.00	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.032	17.00	15.00	Right Edge 10mm	0.000	0.020	0.020	0.335	0.087	0.141	0.053	0.355	0.161	0.160
		0.050	20.00	15.50		0.168	17.00	15.00	Top Edge 10mm	0.018	0.106	0.124	0.141	0.225	0.047	0.018	0.265	0.171	0.367
		0.000	20.00	15.50		0.000	17.00	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n41A	Ant.5	0.130	24.00	24.00	Ant.2	0.101	17.00	15.00	Front Side 10mm	0.130	0.064	0.194	0.172	0.062	0.055	0.023	0.366	0.249	0.279
		0.226	24.00	24.00		0.154	17.00	15.00	Back Side 10mm	0.226	0.097	0.323	0.248	0.141	0.085	0.034	0.571	0.408	0.498
		0.000	24.00	24.00		0.000	17.00	15.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.299	24.00	24.00		0.032	17.00	15.00	Right Edge 10mm	0.299	0.020	0.319	0.335	0.087	0.141	0.053	0.654	0.460	0.459
		0.000	24.00	24.00		0.168	17.00	15.00	Top Edge 10mm	0.000	0.106	0.106	0.141	0.225	0.047	0.018	0.247	0.153	0.349
		0.000	24.00	24.00		0.000	17.00	15.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n41A	Ant.2	0.302	17.50	14.00	Ant.3	0.313	21.50	19.50	Front Side 10mm	0.135	0.197	0.332	0.172	0.062	0.055	0.023	0.504	0.387	0.417
		0.074	17.50	14.00		0.436	21.50	19.50	Back Side 10mm	0.033	0.275	0.308	0.248	0.141	0.085	0.034	0.556	0.393	0.483
		0.395	17.50	14.00		0.000	21.50	19.50	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.087	21.50	19.50	Right Edge 10mm	0.000	0.055	0.055	0.335	0.087	0.141	0.053	0.390	0.196	0.195
		0.214	17.50	14.00		0.000	21.50	19.50	Top Edge 10mm	0.096	0.000	0.096	0.141	0.225	0.047	0.018	0.237	0.143	0.339
		0.000	17.50	14.00		0.755	21.50	19.50	Bottom Edge 10mm	0.000	0.476	0.476	0.000	0.000	0.000	0.000	0.476	0.476	0.476
DC_66A+n41A	Ant.4	0.234	20.00	15.50	Ant.3	0.313	21.50	19.50	Front Side 10mm	0.083	0.197	0.281	0.172	0.062	0.055	0.023	0.453	0.336	0.366
		0.324	20.00	15.50		0.436	21.50	19.50	Back Side 10mm	0.115	0.275	0.390	0.248	0.141	0.085	0.034	0.638	0.475	0.565
		0.502	20.00	15.50		0.000	21.50	19.50	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.087	21.50	19.50	Right Edge 10mm	0.000	0.055	0.055	0.335	0.087	0.141	0.053	0.390	0.196	0.195
		0.050	20.00	15.50		0.000	21.50	19.50	Top Edge 10mm	0.018	0.000	0.018	0.141	0.225	0.047	0.018	0.159	0.065	0.261
		0.000	20.00	15.50		0.755	21.50	19.50	Bottom Edge 10mm	0.000	0.476	0.476	0.000	0.000	0.000	0.000	0.476	0.476	0.476
DC_66A+n41A	Ant.5	0.130	24.00	24.00	Ant.3	0.313	21.50	19.50	Front Side 10mm	0.130	0.197	0.327	0.172	0.062	0.055	0.023	0.499	0.382	0.412
		0.226	24.00	24.00		0.436	21.50	19.50	Back Side 10mm	0.226	0.275	0.501	0.248	0.141	0.085	0.034	0.749	0.586	0.676
		0.000	24.00	24.00		0.000	21.50	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.299	24.00	24.00		0.087	21.50	19.50	Right Edge 10mm	0.299	0.055	0.354	0.335	0.087	0.141	0.053	0.689	0.495	0.494
		0.000	24.00	24.00		0.000	21.50	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.755	21.50	19.50	Bottom Edge 10mm	0.000	0.476	0.476	0.000	0.000	0.000	0.000	0.476	0.476	0.476
DC_66A+n41A	Ant.2	0.302	17.50	14.00	Ant.4	0.066	17.00	14.50	Front Side 10mm	0.135	0.037	0.172	0.172	0.062	0.055	0.023	0.344	0.227	0.257
		0.074	17.50	14.00		0.121	17.00	14.50	Back Side 10mm	0.033	0.068	0.101	0.248	0.141	0.085	0.034	0.349	0.186	0.276
		0.395	17.50	14.00		0.142	17.00	14.50	Left Edge 10mm	0.176	0.080	0.256	0.000	0.000	0.000	0.000	0.256	0.256	0.256
		0.000	17.50	14.00		0.000	17.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.214	17.50	14.00		0.044	17.00	14.50	Top Edge 10mm	0.096	0.025	0.120	0.141	0.225	0.047	0.018	0.261	0.167	0.363
		0.000	17.50	14.00		0.000	17.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n41A	Ant.3	0.372	22.00	19.50	Ant.4	0.066	17.00	14.50	Front Side 10mm	0.209	0.037	0.246	0.172	0.062	0.055	0.023	0.418	0.301	0.331
		0.498	22.00	19.50		0.121	17.00	14.50	Back Side 10mm	0.280	0.068	0.348	0.248	0.141	0.085	0.034	0.596	0.433	0.523

		0.000	22.00	19.50		0.142	17.00	14.50	Left Edge 10mm	0.000	0.080	0.080	0.000	0.000	0.000	0.000	0.080	0.080	0.080
		0.129	22.00	19.50		0.000	17.00	14.50	Right Edge 10mm	0.073	0.000	0.073	0.335	0.087	0.141	0.053	0.408	0.214	0.213
		0.000	22.00	19.50		0.044	17.00	14.50	Top Edge 10mm	0.000	0.025	0.025	0.141	0.225	0.047	0.018	0.166	0.072	0.268
		0.677	22.00	19.50		0.000	17.00	14.50	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n41A	Ant.5	0.130	24.00	24.00	Ant.4	0.066	17.00	14.50	Front Side 10mm	0.130	0.037	0.167	0.172	0.062	0.055	0.023	0.339	0.222	0.252
		0.226	24.00	24.00		0.121	17.00	14.50	Back Side 10mm	0.226	0.068	0.294	0.248	0.141	0.085	0.034	0.542	0.379	0.469
		0.000	24.00	24.00		0.142	17.00	14.50	Left Edge 10mm	0.000	0.080	0.080	0.000	0.000	0.000	0.000	0.080	0.080	0.080
		0.299	24.00	24.00		0.000	17.00	14.50	Right Edge 10mm	0.299	0.000	0.299	0.335	0.087	0.141	0.053	0.634	0.440	0.439
		0.000	24.00	24.00		0.044	17.00	14.50	Top Edge 10mm	0.000	0.025	0.025	0.141	0.225	0.047	0.018	0.166	0.072	0.268
		0.000	24.00	24.00		0.000	17.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n41A	Ant.2	0.302	17.50	14.00	Ant.5	0.093	22.50	18.00	Front Side 10mm	0.135	0.033	0.168	0.172	0.062	0.055	0.023	0.340	0.223	0.253
		0.074	17.50	14.00		0.174	22.50	18.00	Back Side 10mm	0.033	0.062	0.095	0.248	0.141	0.085	0.034	0.343	0.180	0.270
		0.395	17.50	14.00		0.000	22.50	18.00	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.251	22.50	18.00	Right Edge 10mm	0.000	0.089	0.089	0.335	0.087	0.141	0.053	0.424	0.230	0.229
		0.214	17.50	14.00		0.000	22.50	18.00	Top Edge 10mm	0.096	0.000	0.096	0.141	0.225	0.047	0.018	0.237	0.143	0.339
		0.000	17.50	14.00		0.000	22.50	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n41A	Ant.3	0.372	22.00	19.50	Ant.5	0.093	22.50	18.00	Front Side 10mm	0.209	0.033	0.242	0.172	0.062	0.055	0.023	0.414	0.297	0.327
		0.498	22.00	19.50		0.174	22.50	18.00	Back Side 10mm	0.280	0.062	0.342	0.248	0.141	0.085	0.034	0.590	0.427	0.517
		0.000	22.00	19.50		0.000	22.50	18.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.129	22.00	19.50		0.251	22.50	18.00	Right Edge 10mm	0.073	0.089	0.162	0.335	0.087	0.141	0.053	0.497	0.303	0.302
		0.000	22.00	19.50		0.000	22.50	18.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.677	22.00	19.50		0.000	22.50	18.00	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n41A	Ant.4	0.234	20.00	15.50	Ant.5	0.093	22.50	18.00	Front Side 10mm	0.083	0.033	0.116	0.172	0.062	0.055	0.023	0.288	0.171	0.201
		0.324	20.00	15.50		0.174	22.50	18.00	Back Side 10mm	0.115	0.062	0.177	0.248	0.141	0.085	0.034	0.425	0.262	0.352
		0.502	20.00	15.50		0.000	22.50	18.00	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.251	22.50	18.00	Right Edge 10mm	0.000	0.089	0.089	0.335	0.087	0.141	0.053	0.424	0.230	0.229
		0.050	20.00	15.50		0.000	22.50	18.00	Top Edge 10mm	0.018	0.000	0.018	0.141	0.225	0.047	0.018	0.159	0.065	0.261
		0.000	20.00	15.50		0.000	22.50	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n77A	Ant.3	0.168	22.00	20.00	Ant.6	0.102	17.50	14.50	Front Side 10mm	0.106	0.051	0.157	0.172	0.062	0.055	0.023	0.329	0.212	0.242
		0.264	22.00	20.00		0.204	17.50	14.50	Back Side 10mm	0.167	0.102	0.269	0.248	0.141	0.085	0.034	0.517	0.354	0.444
		0.000	22.00	20.00		0.169	17.50	14.50	Left Edge 10mm	0.000	0.085	0.085	0.000	0.000	0.000	0.000	0.085	0.085	0.085
		0.059	22.00	20.00		0.000	17.50	14.50	Right Edge 10mm	0.037	0.000	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.000	22.00	20.00		0.175	17.50	14.50	Top Edge 10mm	0.000	0.088	0.088	0.141	0.225	0.047	0.018	0.229	0.135	0.331
		0.462	22.00	20.00		0.000	17.50	14.50	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n77A	Ant.4	0.105	24.50	18.50	Ant.6	0.102	17.50	14.50	Front Side 10mm	0.026	0.051	0.077	0.172	0.062	0.055	0.023	0.249	0.132	0.162
		0.130	24.50	18.50		0.204	17.50	14.50	Back Side 10mm	0.033	0.102	0.135	0.248	0.141	0.085	0.034	0.383	0.220	0.310
		0.209	24.50	18.50		0.169	17.50	14.50	Left Edge 10mm	0.052	0.085	0.137	0.000	0.000	0.000	0.000	0.137	0.137	0.137
		0.000	24.50	18.50		0.000	17.50	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.022	24.50	18.50		0.175	17.50	14.50	Top Edge 10mm	0.006	0.088	0.093	0.141	0.225	0.047	0.018	0.234	0.140	0.336
		0.000	24.50	18.50		0.000	17.50	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n77A	Ant.3	0.168	22.00	20.00	Ant.7	0.129	14.00	13.50	Front Side 10mm	0.106	0.115	0.221	0.172	0.062	0.055	0.023	0.393	0.276	0.306
		0.264	22.00	20.00		0.117	14.00	13.50	Back Side 10mm	0.167	0.104	0.271	0.248	0.141	0.085	0.034	0.519	0.356	0.446
		0.000	22.00	20.00		0.000	14.00	13.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

		0.059	22.00	20.00		0.041	14.00	13.50	Right Edge 10mm	0.037	0.037	0.074	0.335	0.087	0.141	0.053	0.409	0.215	0.214
		0.000	22.00	20.00		0.310	14.00	13.50	Top Edge 10mm	0.000	0.276	0.276	0.141	0.225	0.047	0.018	0.417	0.323	0.519
		0.462	22.00	20.00		0.000	14.00	13.50	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n77A	Ant.4	0.105	24.50	18.50	Ant.7	0.129	14.00	13.50	Front Side 10mm	0.026	0.115	0.141	0.172	0.062	0.055	0.023	0.313	0.196	0.226
		0.130	24.50	18.50		0.117	14.00	13.50	Back Side 10mm	0.033	0.104	0.137	0.248	0.141	0.085	0.034	0.385	0.222	0.312
		0.209	24.50	18.50		0.000	14.00	13.50	Left Edge 10mm	0.052	0.000	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.000	24.50	18.50		0.041	14.00	13.50	Right Edge 10mm	0.000	0.037	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.022	24.50	18.50		0.310	14.00	13.50	Top Edge 10mm	0.006	0.276	0.282	0.141	0.225	0.047	0.018	0.423	0.329	0.525
		0.000	24.50	18.50		0.000	14.00	13.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n77A	Ant.3	0.168	22.00	20.00	Ant.8	0.083	20.00	20.00	Front Side 10mm	0.106	0.083	0.189	0.172	0.062	0.055	0.023	0.361	0.244	0.274
		0.264	22.00	20.00		0.306	20.00	20.00	Back Side 10mm	0.167	0.306	0.473	0.248	0.141	0.085	0.034	0.721	0.558	0.648
		0.000	22.00	20.00		0.116	20.00	20.00	Left Edge 10mm	0.000	0.116	0.116	0.000	0.000	0.000	0.000	0.116	0.116	0.116
		0.059	22.00	20.00		0.000	20.00	20.00	Right Edge 10mm	0.037	0.000	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.000	22.00	20.00		0.064	20.00	20.00	Top Edge 10mm	0.000	0.064	0.064	0.141	0.225	0.047	0.018	0.205	0.111	0.307
		0.462	22.00	20.00		0.000	20.00	20.00	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n77A	Ant.4	0.105	24.50	18.50	Ant.8	0.083	20.00	20.00	Front Side 10mm	0.026	0.083	0.109	0.172	0.062	0.055	0.023	0.281	0.164	0.194
		0.130	24.50	18.50		0.306	20.00	20.00	Back Side 10mm	0.033	0.306	0.339	0.248	0.141	0.085	0.034	0.587	0.424	0.514
		0.209	24.50	18.50		0.116	20.00	20.00	Left Edge 10mm	0.052	0.116	0.168	0.000	0.000	0.000	0.000	0.168	0.168	0.168
		0.000	24.50	18.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.022	24.50	18.50		0.064	20.00	20.00	Top Edge 10mm	0.006	0.064	0.070	0.141	0.225	0.047	0.018	0.211	0.117	0.313
		0.000	24.50	18.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n77A	Ant.3	0.168	22.00	20.00	Ant.9	0.116	20.00	18.00	Front Side 10mm	0.106	0.073	0.179	0.172	0.062	0.055	0.023	0.351	0.234	0.264
		0.264	22.00	20.00		0.166	20.00	18.00	Back Side 10mm	0.167	0.105	0.271	0.248	0.141	0.085	0.034	0.519	0.356	0.446
		0.000	22.00	20.00		0.000	20.00	18.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.059	22.00	20.00		0.169	20.00	18.00	Right Edge 10mm	0.037	0.107	0.144	0.335	0.087	0.141	0.053	0.479	0.285	0.284
		0.000	22.00	20.00		0.127	20.00	18.00	Top Edge 10mm	0.000	0.080	0.080	0.141	0.225	0.047	0.018	0.221	0.127	0.323
		0.462	22.00	20.00		0.000	20.00	18.00	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n77A	Ant.4	0.105	24.50	18.50	Ant.9	0.116	20.00	18.00	Front Side 10mm	0.026	0.073	0.100	0.172	0.062	0.055	0.023	0.272	0.155	0.185
		0.130	24.50	18.50		0.166	20.00	18.00	Back Side 10mm	0.033	0.105	0.137	0.248	0.141	0.085	0.034	0.385	0.222	0.312
		0.209	24.50	18.50		0.000	20.00	18.00	Left Edge 10mm	0.052	0.000	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.000	24.50	18.50		0.169	20.00	18.00	Right Edge 10mm	0.000	0.107	0.107	0.335	0.087	0.141	0.053	0.442	0.248	0.247
		0.022	24.50	18.50		0.127	20.00	18.00	Top Edge 10mm	0.006	0.080	0.086	0.141	0.225	0.047	0.018	0.227	0.133	0.329
		0.000	24.50	18.50		0.000	20.00	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n78A	Ant.3	0.168	22.00	20.00	Ant.6	0.102	17.50	14.50	Front Side 10mm	0.106	0.051	0.157	0.172	0.062	0.055	0.023	0.329	0.212	0.242
		0.264	22.00	20.00		0.204	17.50	14.50	Back Side 10mm	0.167	0.102	0.269	0.248	0.141	0.085	0.034	0.517	0.354	0.444
		0.000	22.00	20.00		0.169	17.50	14.50	Left Edge 10mm	0.000	0.085	0.085	0.000	0.000	0.000	0.000	0.085	0.085	0.085
		0.059	22.00	20.00		0.000	17.50	14.50	Right Edge 10mm	0.037	0.000	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.000	22.00	20.00		0.175	17.50	14.50	Top Edge 10mm	0.000	0.088	0.088	0.141	0.225	0.047	0.018	0.229	0.135	0.331
		0.462	22.00	20.00		0.000	17.50	14.50	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n78A	Ant.4	0.105	24.50	18.50	Ant.6	0.102	17.50	14.50	Front Side 10mm	0.026	0.051	0.077	0.172	0.062	0.055	0.023	0.249	0.132	0.162
		0.130	24.50	18.50		0.204	17.50	14.50	Back Side 10mm	0.033	0.102	0.135	0.248	0.141	0.085	0.034	0.383	0.220	0.310
		0.209	24.50	18.50		0.169	17.50	14.50	Left Edge 10mm	0.052	0.085	0.137	0.000	0.000	0.000	0.000	0.137	0.137	0.137
		0.000	24.50	18.50		0.000	17.50	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140

		0.022	24.50	18.50		0.175	17.50	14.50	Top Edge 10mm	0.006	0.088	0.093	0.141	0.225	0.047	0.018	0.234	0.140	0.336
		0.000	24.50	18.50		0.000	17.50	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n78A	Ant.3	0.168	22.00	20.00	Ant.7	0.129	14.00	13.50	Front Side 10mm	0.106	0.115	0.221	0.172	0.062	0.055	0.023	0.393	0.276	0.306
		0.264	22.00	20.00		0.117	14.00	13.50	Back Side 10mm	0.167	0.104	0.271	0.248	0.141	0.085	0.034	0.519	0.356	0.446
		0.000	22.00	20.00		0.000	14.00	13.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.059	22.00	20.00		0.041	14.00	13.50	Right Edge 10mm	0.037	0.037	0.074	0.335	0.087	0.141	0.053	0.409	0.215	0.214
		0.000	22.00	20.00		0.310	14.00	13.50	Top Edge 10mm	0.000	0.276	0.276	0.141	0.225	0.047	0.018	0.417	0.323	0.519
		0.462	22.00	20.00		0.000	14.00	13.50	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n78A	Ant.4	0.105	24.50	18.50	Ant.7	0.129	14.00	13.50	Front Side 10mm	0.026	0.115	0.141	0.172	0.062	0.055	0.023	0.313	0.196	0.226
		0.130	24.50	18.50		0.117	14.00	13.50	Back Side 10mm	0.033	0.104	0.137	0.248	0.141	0.085	0.034	0.385	0.222	0.312
		0.209	24.50	18.50		0.000	14.00	13.50	Left Edge 10mm	0.052	0.000	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.000	24.50	18.50		0.041	14.00	13.50	Right Edge 10mm	0.000	0.037	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.022	24.50	18.50		0.310	14.00	13.50	Top Edge 10mm	0.006	0.276	0.282	0.141	0.225	0.047	0.018	0.423	0.329	0.525
		0.000	24.50	18.50		0.000	14.00	13.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n78A	Ant.3	0.168	22.00	20.00	Ant.8	0.083	20.00	20.00	Front Side 10mm	0.106	0.083	0.189	0.172	0.062	0.055	0.023	0.361	0.244	0.274
		0.264	22.00	20.00		0.306	20.00	20.00	Back Side 10mm	0.167	0.306	0.473	0.248	0.141	0.085	0.034	0.721	0.558	0.648
		0.000	22.00	20.00		0.116	20.00	20.00	Left Edge 10mm	0.000	0.116	0.116	0.000	0.000	0.000	0.000	0.116	0.116	0.116
		0.059	22.00	20.00		0.000	20.00	20.00	Right Edge 10mm	0.037	0.000	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.000	22.00	20.00		0.064	20.00	20.00	Top Edge 10mm	0.000	0.064	0.064	0.141	0.225	0.047	0.018	0.205	0.111	0.307
		0.462	22.00	20.00		0.000	20.00	20.00	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n78A	Ant.4	0.105	24.50	18.50	Ant.8	0.083	20.00	20.00	Front Side 10mm	0.026	0.083	0.109	0.172	0.062	0.055	0.023	0.281	0.164	0.194
		0.130	24.50	18.50		0.306	20.00	20.00	Back Side 10mm	0.033	0.306	0.339	0.248	0.141	0.085	0.034	0.587	0.424	0.514
		0.209	24.50	18.50		0.116	20.00	20.00	Left Edge 10mm	0.052	0.116	0.168	0.000	0.000	0.000	0.000	0.168	0.168	0.168
		0.000	24.50	18.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.022	24.50	18.50		0.064	20.00	20.00	Top Edge 10mm	0.006	0.064	0.070	0.141	0.225	0.047	0.018	0.211	0.117	0.313
		0.000	24.50	18.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_2A+n78A	Ant.3	0.168	22.00	20.00	Ant.9	0.116	20.00	18.00	Front Side 10mm	0.106	0.073	0.179	0.172	0.062	0.055	0.023	0.351	0.234	0.264
		0.264	22.00	20.00		0.166	20.00	18.00	Back Side 10mm	0.167	0.105	0.271	0.248	0.141	0.085	0.034	0.519	0.356	0.446
		0.000	22.00	20.00		0.000	20.00	18.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.059	22.00	20.00		0.169	20.00	18.00	Right Edge 10mm	0.037	0.107	0.144	0.335	0.087	0.141	0.053	0.479	0.285	0.284
		0.000	22.00	20.00		0.127	20.00	18.00	Top Edge 10mm	0.000	0.080	0.080	0.141	0.225	0.047	0.018	0.221	0.127	0.323
		0.462	22.00	20.00		0.000	20.00	18.00	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
DC_2A+n78A	Ant.4	0.105	24.50	18.50	Ant.9	0.116	20.00	18.00	Front Side 10mm	0.026	0.073	0.100	0.172	0.062	0.055	0.023	0.272	0.155	0.185
		0.130	24.50	18.50		0.166	20.00	18.00	Back Side 10mm	0.033	0.105	0.137	0.248	0.141	0.085	0.034	0.385	0.222	0.312
		0.209	24.50	18.50		0.000	20.00	18.00	Left Edge 10mm	0.052	0.000	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.000	24.50	18.50		0.169	20.00	18.00	Right Edge 10mm	0.000	0.107	0.107	0.335	0.087	0.141	0.053	0.442	0.248	0.247
		0.022	24.50	18.50		0.127	20.00	18.00	Top Edge 10mm	0.006	0.080	0.086	0.141	0.225	0.047	0.018	0.227	0.133	0.329
		0.000	24.50	18.50		0.000	20.00	18.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.2	0.164	17.00	14.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.082	0.053	0.135	0.172	0.062	0.055	0.023	0.307	0.190	0.220
		0.235	17.00	14.00		0.147	16.00	14.50	Back Side 10mm	0.118	0.104	0.222	0.248	0.141	0.085	0.034	0.470	0.307	0.397
		0.063	17.00	14.00		0.112	16.00	14.50	Left Edge 10mm	0.032	0.079	0.111	0.000	0.000	0.000	0.000	0.111	0.111	0.111
		0.000	17.00	14.00		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.303	17.00	14.00		0.139	16.00	14.50	Top Edge 10mm	0.152	0.098	0.250	0.141	0.225	0.047	0.018	0.391	0.297	0.493

		0.000	17.00	14.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.3	0.306	22.00	19.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.172	0.053	0.225	0.172	0.062	0.055	0.023	0.397	0.280	0.310
		0.436	22.00	19.50		0.147	16.00	14.50	Back Side 10mm	0.245	0.104	0.349	0.248	0.141	0.085	0.034	0.597	0.434	0.524
		0.000	22.00	19.50		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.111	22.00	19.50		0.000	16.00	14.50	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.633	22.00	19.50		0.000	16.00	14.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n78A	Ant.4	0.209	20.50	15.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.066	0.053	0.119	0.172	0.062	0.055	0.023	0.291	0.174	0.204
		0.259	20.50	15.50		0.147	16.00	14.50	Back Side 10mm	0.082	0.104	0.186	0.248	0.141	0.085	0.034	0.434	0.271	0.361
		0.414	20.50	15.50		0.112	16.00	14.50	Left Edge 10mm	0.131	0.079	0.210	0.000	0.000	0.000	0.000	0.210	0.210	0.210
		0.000	20.50	15.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.042	20.50	15.50		0.139	16.00	14.50	Top Edge 10mm	0.013	0.098	0.112	0.141	0.225	0.047	0.018	0.253	0.159	0.355
		0.000	20.50	15.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.5	0.143	24.00	24.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.143	0.053	0.196	0.172	0.062	0.055	0.023	0.368	0.251	0.281
		0.225	24.00	24.00		0.147	16.00	14.50	Back Side 10mm	0.225	0.104	0.329	0.248	0.141	0.085	0.034	0.577	0.414	0.504
		0.000	24.00	24.00		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.321	24.00	24.00		0.000	16.00	14.50	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.000	24.00	24.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.2	0.164	17.00	14.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.082	0.069	0.152	0.172	0.062	0.055	0.023	0.324	0.207	0.237
		0.235	17.00	14.00		0.084	14.00	12.50	Back Side 10mm	0.118	0.059	0.177	0.248	0.141	0.085	0.034	0.425	0.262	0.352
		0.063	17.00	14.00		0.000	14.00	12.50	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.303	17.00	14.00		0.251	14.00	12.50	Top Edge 10mm	0.152	0.178	0.330	0.141	0.225	0.047	0.018	0.471	0.377	0.573
		0.000	17.00	14.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.3	0.306	22.00	19.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.172	0.069	0.241	0.172	0.062	0.055	0.023	0.413	0.296	0.326
		0.436	22.00	19.50		0.084	14.00	12.50	Back Side 10mm	0.245	0.059	0.305	0.248	0.141	0.085	0.034	0.553	0.390	0.480
		0.000	22.00	19.50		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.111	22.00	19.50		0.036	14.00	12.50	Right Edge 10mm	0.062	0.025	0.088	0.335	0.087	0.141	0.053	0.423	0.229	0.228
		0.000	22.00	19.50		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.633	22.00	19.50		0.000	14.00	12.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n78A	Ant.4	0.209	20.50	15.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.066	0.069	0.135	0.172	0.062	0.055	0.023	0.307	0.190	0.220
		0.259	20.50	15.50		0.084	14.00	12.50	Back Side 10mm	0.082	0.059	0.141	0.248	0.141	0.085	0.034	0.389	0.226	0.316
		0.414	20.50	15.50		0.000	14.00	12.50	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.042	20.50	15.50		0.251	14.00	12.50	Top Edge 10mm	0.013	0.178	0.191	0.141	0.225	0.047	0.018	0.332	0.238	0.434
		0.000	20.50	15.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.5	0.143	24.00	24.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.143	0.069	0.212	0.172	0.062	0.055	0.023	0.384	0.267	0.297
		0.225	24.00	24.00		0.084	14.00	12.50	Back Side 10mm	0.225	0.059	0.284	0.248	0.141	0.085	0.034	0.532	0.369	0.459
		0.000	24.00	24.00		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.321	24.00	24.00		0.036	14.00	12.50	Right Edge 10mm	0.321	0.025	0.346	0.335	0.087	0.141	0.053	0.681	0.487	0.486
		0.000	24.00	24.00		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.000	24.00	24.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

DC_4A+n78A	Ant.2	0.164	17.00	14.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.082	0.095	0.177	0.172	0.062	0.055	0.023	0.349	0.232	0.262
		0.235	17.00	14.00		0.564	20.00	20.00	Back Side 10mm	0.118	0.564	0.682	0.248	0.141	0.085	0.034	0.930	0.767	0.857
		0.063	17.00	14.00		0.205	20.00	20.00	Left Edge 10mm	0.032	0.205	0.237	0.000	0.000	0.000	0.000	0.237	0.237	0.237
		0.000	17.00	14.00		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.303	17.00	14.00		0.126	20.00	20.00	Top Edge 10mm	0.152	0.126	0.278	0.141	0.225	0.047	0.018	0.419	0.325	0.521
		0.000	17.00	14.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.3	0.306	22.00	19.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.172	0.095	0.267	0.172	0.062	0.055	0.023	0.439	0.322	0.352
		0.436	22.00	19.50		0.564	20.00	20.00	Back Side 10mm	0.245	0.564	0.809	0.248	0.141	0.085	0.034	1.057	0.894	0.984
		0.000	22.00	19.50		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.111	22.00	19.50		0.000	20.00	20.00	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.633	22.00	19.50		0.000	20.00	20.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n78A	Ant.4	0.209	20.50	15.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.066	0.095	0.161	0.172	0.062	0.055	0.023	0.333	0.216	0.246
		0.259	20.50	15.50		0.564	20.00	20.00	Back Side 10mm	0.082	0.564	0.646	0.248	0.141	0.085	0.034	0.894	0.731	0.821
		0.414	20.50	15.50		0.205	20.00	20.00	Left Edge 10mm	0.131	0.205	0.336	0.000	0.000	0.000	0.000	0.336	0.336	0.336
		0.000	20.50	15.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.042	20.50	15.50		0.126	20.00	20.00	Top Edge 10mm	0.013	0.126	0.139	0.141	0.225	0.047	0.018	0.280	0.186	0.382
		0.000	20.50	15.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.5	0.143	24.00	24.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.143	0.095	0.238	0.172	0.062	0.055	0.023	0.410	0.293	0.323
		0.225	24.00	24.00		0.564	20.00	20.00	Back Side 10mm	0.225	0.564	0.789	0.248	0.141	0.085	0.034	1.037	0.874	0.964
		0.000	24.00	24.00		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.321	24.00	24.00		0.000	20.00	20.00	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.000	24.00	24.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.2	0.164	17.00	14.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.082	0.168	0.250	0.172	0.062	0.055	0.023	0.422	0.305	0.335
		0.235	17.00	14.00		0.293	16.00	16.00	Back Side 10mm	0.118	0.293	0.411	0.248	0.141	0.085	0.034	0.659	0.496	0.586
		0.063	17.00	14.00		0.000	16.00	16.00	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.303	17.00	14.00		0.121	16.00	16.00	Top Edge 10mm	0.152	0.121	0.273	0.141	0.225	0.047	0.018	0.414	0.320	0.516
		0.000	17.00	14.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.3	0.306	22.00	19.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.172	0.168	0.340	0.172	0.062	0.055	0.023	0.512	0.395	0.425
		0.436	22.00	19.50		0.293	16.00	16.00	Back Side 10mm	0.245	0.293	0.538	0.248	0.141	0.085	0.034	0.786	0.623	0.713
		0.000	22.00	19.50		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.111	22.00	19.50		0.280	16.00	16.00	Right Edge 10mm	0.062	0.280	0.342	0.335	0.087	0.141	0.053	0.677	0.483	0.482
		0.000	22.00	19.50		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.633	22.00	19.50		0.000	16.00	16.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
DC_4A+n78A	Ant.4	0.209	20.50	15.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.066	0.168	0.234	0.172	0.062	0.055	0.023	0.406	0.289	0.319
		0.259	20.50	15.50		0.293	16.00	16.00	Back Side 10mm	0.082	0.293	0.375	0.248	0.141	0.085	0.034	0.623	0.460	0.550
		0.414	20.50	15.50		0.000	16.00	16.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.042	20.50	15.50		0.121	16.00	16.00	Top Edge 10mm	0.013	0.121	0.134	0.141	0.225	0.047	0.018	0.275	0.181	0.377
		0.000	20.50	15.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_4A+n78A	Ant.5	0.143	24.00	24.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.143	0.168	0.311	0.172	0.062	0.055	0.023	0.483	0.366	0.396

		0.225	24.00	24.00		0.293	16.00	16.00	Back Side 10mm	0.225	0.293	0.518	0.248	0.141	0.085	0.034	0.766	0.603	0.693
		0.000	24.00	24.00		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.321	24.00	24.00		0.280	16.00	16.00	Right Edge 10mm	0.321	0.280	0.601	0.335	0.087	0.141	0.053	0.936	0.742	0.741
		0.000	24.00	24.00		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.000	24.00	24.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n78A	Ant.0	0.336	25.50	24.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.267	0.053	0.320	0.172	0.062	0.055	0.023	0.492	0.375	0.405
		0.487	25.50	24.50		0.147	16.00	14.50	Back Side 10mm	0.387	0.104	0.491	0.248	0.141	0.085	0.034	0.739	0.576	0.666
		0.209	25.50	24.50		0.112	16.00	14.50	Left Edge 10mm	0.166	0.079	0.245	0.000	0.000	0.000	0.000	0.245	0.245	0.245
		0.158	25.50	24.50		0.000	16.00	14.50	Right Edge 10mm	0.126	0.000	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.000	25.50	24.50		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.257	25.50	24.50		0.000	16.00	14.50	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n78A	Ant.1	0.578	24.00	20.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.258	0.053	0.311	0.172	0.062	0.055	0.023	0.483	0.366	0.396
		0.655	24.00	20.50		0.147	16.00	14.50	Back Side 10mm	0.293	0.104	0.397	0.248	0.141	0.085	0.034	0.645	0.482	0.572
		0.923	24.00	20.50		0.112	16.00	14.50	Left Edge 10mm	0.412	0.079	0.492	0.000	0.000	0.000	0.000	0.492	0.492	0.492
		0.000	24.00	20.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.003	24.00	20.50		0.139	16.00	14.50	Top Edge 10mm	0.001	0.098	0.100	0.141	0.225	0.047	0.018	0.241	0.147	0.343
		0.000	24.00	20.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n78A	Ant.0	0.336	25.50	24.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.267	0.069	0.336	0.172	0.062	0.055	0.023	0.508	0.391	0.421
		0.487	25.50	24.50		0.084	14.00	12.50	Back Side 10mm	0.387	0.059	0.446	0.248	0.141	0.085	0.034	0.694	0.531	0.621
		0.209	25.50	24.50		0.000	14.00	12.50	Left Edge 10mm	0.166	0.000	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.158	25.50	24.50		0.036	14.00	12.50	Right Edge 10mm	0.126	0.025	0.151	0.335	0.087	0.141	0.053	0.486	0.292	0.291
		0.000	25.50	24.50		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.257	25.50	24.50		0.000	14.00	12.50	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n78A	Ant.1	0.578	24.00	20.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.258	0.069	0.328	0.172	0.062	0.055	0.023	0.500	0.383	0.413
		0.655	24.00	20.50		0.084	14.00	12.50	Back Side 10mm	0.293	0.059	0.352	0.248	0.141	0.085	0.034	0.600	0.437	0.527
		0.923	24.00	20.50		0.000	14.00	12.50	Left Edge 10mm	0.412	0.000	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.000	24.00	20.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.003	24.00	20.50		0.251	14.00	12.50	Top Edge 10mm	0.001	0.178	0.179	0.141	0.225	0.047	0.018	0.320	0.226	0.422
		0.000	24.00	20.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n78A	Ant.0	0.336	25.50	24.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.267	0.095	0.362	0.172	0.062	0.055	0.023	0.534	0.417	0.447
		0.487	25.50	24.50		0.564	20.00	20.00	Back Side 10mm	0.387	0.564	0.951	0.248	0.141	0.085	0.034	1.199	1.036	1.126
		0.209	25.50	24.50		0.205	20.00	20.00	Left Edge 10mm	0.166	0.205	0.371	0.000	0.000	0.000	0.000	0.371	0.371	0.371
		0.158	25.50	24.50		0.000	20.00	20.00	Right Edge 10mm	0.126	0.000	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.000	25.50	24.50		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.257	25.50	24.50		0.000	20.00	20.00	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n78A	Ant.1	0.578	24.00	20.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.258	0.095	0.353	0.172	0.062	0.055	0.023	0.525	0.408	0.438
		0.655	24.00	20.50		0.564	20.00	20.00	Back Side 10mm	0.293	0.564	0.857	0.248	0.141	0.085	0.034	1.105	0.942	1.032
		0.923	24.00	20.50		0.205	20.00	20.00	Left Edge 10mm	0.412	0.205	0.617	0.000	0.000	0.000	0.000	0.617	0.617	0.617
		0.000	24.00	20.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.003	24.00	20.50		0.126	20.00	20.00	Top Edge 10mm	0.001	0.126	0.127	0.141	0.225	0.047	0.018	0.268	0.174	0.370
		0.000	24.00	20.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_5A+n78A	Ant.0	0.336	25.50	24.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.267	0.168	0.435	0.172	0.062	0.055	0.023	0.607	0.490	0.520
		0.487	25.50	24.50		0.293	16.00	16.00	Back Side 10mm	0.387	0.293	0.680	0.248	0.141	0.085	0.034	0.928	0.765	0.855

		0.209	25.50	24.50		0.000	16.00	16.00	Left Edge 10mm	0.166	0.000	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.158	25.50	24.50		0.280	16.00	16.00	Right Edge 10mm	0.126	0.280	0.406	0.335	0.087	0.141	0.053	0.741	0.547	0.546
		0.000	25.50	24.50		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.257	25.50	24.50		0.000	16.00	16.00	Bottom Edge 10mm	0.204	0.000	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
DC_5A+n78A	Ant.1	0.578	24.00	20.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.258	0.168	0.426	0.172	0.062	0.055	0.023	0.598	0.481	0.511
		0.655	24.00	20.50		0.293	16.00	16.00	Back Side 10mm	0.293	0.293	0.586	0.248	0.141	0.085	0.034	0.834	0.671	0.761
		0.923	24.00	20.50		0.000	16.00	16.00	Left Edge 10mm	0.412	0.000	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.000	24.00	20.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.003	24.00	20.50		0.121	16.00	16.00	Top Edge 10mm	0.001	0.121	0.122	0.141	0.225	0.047	0.018	0.263	0.169	0.365
		0.000	24.00	20.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.2	0.127	17.00	14.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.071	0.053	0.125	0.172	0.062	0.055	0.023	0.297	0.180	0.210
		0.202	17.00	14.50		0.147	16.00	14.50	Back Side 10mm	0.114	0.104	0.218	0.248	0.141	0.085	0.034	0.466	0.303	0.393
		0.063	17.00	14.50		0.112	16.00	14.50	Left Edge 10mm	0.035	0.079	0.115	0.000	0.000	0.000	0.000	0.115	0.115	0.115
		0.000	17.00	14.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.169	17.00	14.50		0.139	16.00	14.50	Top Edge 10mm	0.095	0.098	0.193	0.141	0.225	0.047	0.018	0.334	0.240	0.436
		0.000	17.00	14.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.3	0.380	21.00	19.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.240	0.053	0.293	0.172	0.062	0.055	0.023	0.465	0.348	0.378
		0.463	21.00	19.00		0.147	16.00	14.50	Back Side 10mm	0.292	0.104	0.396	0.248	0.141	0.085	0.034	0.644	0.481	0.571
		0.000	21.00	19.00		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.051	21.00	19.00		0.000	16.00	14.50	Right Edge 10mm	0.032	0.000	0.032	0.335	0.087	0.141	0.053	0.367	0.173	0.172
		0.000	21.00	19.00		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.461	21.00	19.00		0.000	16.00	14.50	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
DC_7A+n78A	Ant.4	0.145	17.00	14.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.073	0.053	0.126	0.172	0.062	0.055	0.023	0.298	0.181	0.211
		0.239	17.00	14.00		0.147	16.00	14.50	Back Side 10mm	0.120	0.104	0.224	0.248	0.141	0.085	0.034	0.472	0.309	0.399
		0.261	17.00	14.00		0.112	16.00	14.50	Left Edge 10mm	0.131	0.079	0.210	0.000	0.000	0.000	0.000	0.210	0.210	0.210
		0.000	17.00	14.00		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.066	17.00	14.00		0.139	16.00	14.50	Top Edge 10mm	0.033	0.098	0.131	0.141	0.225	0.047	0.018	0.272	0.178	0.374
		0.000	17.00	14.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.5	0.164	20.00	16.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.065	0.053	0.118	0.172	0.062	0.055	0.023	0.290	0.173	0.203
		0.331	20.00	16.00		0.147	16.00	14.50	Back Side 10mm	0.132	0.104	0.236	0.248	0.141	0.085	0.034	0.484	0.321	0.411
		0.000	20.00	16.00		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.408	20.00	16.00		0.000	16.00	14.50	Right Edge 10mm	0.162	0.000	0.162	0.335	0.087	0.141	0.053	0.497	0.303	0.302
		0.000	20.00	16.00		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.000	20.00	16.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.2	0.127	17.00	14.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.071	0.069	0.141	0.172	0.062	0.055	0.023	0.313	0.196	0.226
		0.202	17.00	14.50		0.084	14.00	12.50	Back Side 10mm	0.114	0.059	0.173	0.248	0.141	0.085	0.034	0.421	0.258	0.348
		0.063	17.00	14.50		0.000	14.00	12.50	Left Edge 10mm	0.035	0.000	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.000	17.00	14.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.169	17.00	14.50		0.251	14.00	12.50	Top Edge 10mm	0.095	0.178	0.273	0.141	0.225	0.047	0.018	0.414	0.320	0.516
		0.000	17.00	14.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.3	0.380	21.00	19.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.240	0.069	0.309	0.172	0.062	0.055	0.023	0.481	0.364	0.394
		0.463	21.00	19.00		0.084	14.00	12.50	Back Side 10mm	0.292	0.059	0.352	0.248	0.141	0.085	0.034	0.600	0.437	0.527
		0.000	21.00	19.00		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

		0.051	21.00	19.00		0.036	14.00	12.50	Right Edge 10mm	0.032	0.025	0.058	0.335	0.087	0.141	0.053	0.393	0.199	0.198
		0.000	21.00	19.00		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.461	21.00	19.00		0.000	14.00	12.50	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
DC_7A+n78A	Ant.4	0.145	17.00	14.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.073	0.069	0.142	0.172	0.062	0.055	0.023	0.314	0.197	0.227
		0.239	17.00	14.00		0.084	14.00	12.50	Back Side 10mm	0.120	0.059	0.179	0.248	0.141	0.085	0.034	0.427	0.264	0.354
		0.261	17.00	14.00		0.000	14.00	12.50	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	17.00	14.00		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.066	17.00	14.00		0.251	14.00	12.50	Top Edge 10mm	0.033	0.178	0.211	0.141	0.225	0.047	0.018	0.352	0.258	0.454
		0.000	17.00	14.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.5	0.164	20.00	16.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.065	0.069	0.135	0.172	0.062	0.055	0.023	0.307	0.190	0.220
		0.331	20.00	16.00		0.084	14.00	12.50	Back Side 10mm	0.132	0.059	0.191	0.248	0.141	0.085	0.034	0.439	0.276	0.366
		0.000	20.00	16.00		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.408	20.00	16.00		0.036	14.00	12.50	Right Edge 10mm	0.162	0.025	0.188	0.335	0.087	0.141	0.053	0.523	0.329	0.328
		0.000	20.00	16.00		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.000	20.00	16.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.2	0.127	17.00	14.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.071	0.095	0.166	0.172	0.062	0.055	0.023	0.338	0.221	0.251
		0.202	17.00	14.50		0.564	20.00	20.00	Back Side 10mm	0.114	0.564	0.678	0.248	0.141	0.085	0.034	0.926	0.763	0.853
		0.063	17.00	14.50		0.205	20.00	20.00	Left Edge 10mm	0.035	0.205	0.240	0.000	0.000	0.000	0.000	0.240	0.240	0.240
		0.000	17.00	14.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.169	17.00	14.50		0.126	20.00	20.00	Top Edge 10mm	0.095	0.126	0.221	0.141	0.225	0.047	0.018	0.362	0.268	0.464
		0.000	17.00	14.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.3	0.380	21.00	19.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.240	0.095	0.335	0.172	0.062	0.055	0.023	0.507	0.390	0.420
		0.463	21.00	19.00		0.564	20.00	20.00	Back Side 10mm	0.292	0.564	0.856	0.248	0.141	0.085	0.034	1.104	0.941	1.031
		0.000	21.00	19.00		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.051	21.00	19.00		0.000	20.00	20.00	Right Edge 10mm	0.032	0.000	0.032	0.335	0.087	0.141	0.053	0.367	0.173	0.172
		0.000	21.00	19.00		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.461	21.00	19.00		0.000	20.00	20.00	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
DC_7A+n78A	Ant.4	0.145	17.00	14.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.073	0.095	0.168	0.172	0.062	0.055	0.023	0.340	0.223	0.253
		0.239	17.00	14.00		0.564	20.00	20.00	Back Side 10mm	0.120	0.564	0.684	0.248	0.141	0.085	0.034	0.932	0.769	0.859
		0.261	17.00	14.00		0.205	20.00	20.00	Left Edge 10mm	0.131	0.205	0.336	0.000	0.000	0.000	0.000	0.336	0.336	0.336
		0.000	17.00	14.00		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.066	17.00	14.00		0.126	20.00	20.00	Top Edge 10mm	0.033	0.126	0.159	0.141	0.225	0.047	0.018	0.300	0.206	0.402
		0.000	17.00	14.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.5	0.164	20.00	16.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.065	0.095	0.160	0.172	0.062	0.055	0.023	0.332	0.215	0.245
		0.331	20.00	16.00		0.564	20.00	20.00	Back Side 10mm	0.132	0.564	0.696	0.248	0.141	0.085	0.034	0.944	0.781	0.871
		0.000	20.00	16.00		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.408	20.00	16.00		0.000	20.00	20.00	Right Edge 10mm	0.162	0.000	0.162	0.335	0.087	0.141	0.053	0.497	0.303	0.302
		0.000	20.00	16.00		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.000	20.00	16.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.2	0.127	17.00	14.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.071	0.168	0.239	0.172	0.062	0.055	0.023	0.411	0.294	0.324
		0.202	17.00	14.50		0.293	16.00	16.00	Back Side 10mm	0.114	0.293	0.407	0.248	0.141	0.085	0.034	0.655	0.492	0.582
		0.063	17.00	14.50		0.000	16.00	16.00	Left Edge 10mm	0.035	0.000	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.000	17.00	14.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420

		0.169	17.00	14.50		0.121	16.00	16.00	Top Edge 10mm	0.095	0.121	0.216	0.141	0.225	0.047	0.018	0.357	0.263	0.459
		0.000	17.00	14.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.3	0.380	21.00	19.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.240	0.168	0.408	0.172	0.062	0.055	0.023	0.580	0.463	0.493
		0.463	21.00	19.00		0.293	16.00	16.00	Back Side 10mm	0.292	0.293	0.585	0.248	0.141	0.085	0.034	0.833	0.670	0.760
		0.000	21.00	19.00		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.051	21.00	19.00		0.280	16.00	16.00	Right Edge 10mm	0.032	0.280	0.312	0.335	0.087	0.141	0.053	0.647	0.453	0.452
		0.000	21.00	19.00		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.461	21.00	19.00		0.000	16.00	16.00	Bottom Edge 10mm	0.291	0.000	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
DC_7A+n78A	Ant.4	0.145	17.00	14.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.073	0.168	0.241	0.172	0.062	0.055	0.023	0.413	0.296	0.326
		0.239	17.00	14.00		0.293	16.00	16.00	Back Side 10mm	0.120	0.293	0.413	0.248	0.141	0.085	0.034	0.661	0.498	0.588
		0.261	17.00	14.00		0.000	16.00	16.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	17.00	14.00		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.066	17.00	14.00		0.121	16.00	16.00	Top Edge 10mm	0.033	0.121	0.154	0.141	0.225	0.047	0.018	0.295	0.201	0.397
		0.000	17.00	14.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_7A+n78A	Ant.5	0.164	20.00	16.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.065	0.168	0.233	0.172	0.062	0.055	0.023	0.405	0.288	0.318
		0.331	20.00	16.00		0.293	16.00	16.00	Back Side 10mm	0.132	0.293	0.425	0.248	0.141	0.085	0.034	0.673	0.510	0.600
		0.000	20.00	16.00		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.408	20.00	16.00		0.280	16.00	16.00	Right Edge 10mm	0.162	0.280	0.442	0.335	0.087	0.141	0.053	0.777	0.583	0.582
		0.000	20.00	16.00		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.000	20.00	16.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_26A+n78A	Ant.0	0.337	25.50	25.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.337	0.053	0.390	0.172	0.062	0.055	0.023	0.562	0.445	0.475
		0.492	25.50	25.50		0.147	16.00	14.50	Back Side 10mm	0.492	0.104	0.596	0.248	0.141	0.085	0.034	0.844	0.681	0.771
		0.213	25.50	25.50		0.112	16.00	14.50	Left Edge 10mm	0.213	0.079	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
		0.167	25.50	25.50		0.000	16.00	14.50	Right Edge 10mm	0.167	0.000	0.167	0.335	0.087	0.141	0.053	0.502	0.308	0.307
		0.000	25.50	25.50		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.245	25.50	25.50		0.000	16.00	14.50	Bottom Edge 10mm	0.245	0.000	0.245	0.000	0.000	0.000	0.000	0.245	0.245	0.245
DC_26A+n78A	Ant.1	0.395	25.00	20.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.140	0.053	0.193	0.172	0.062	0.055	0.023	0.365	0.248	0.278
		0.437	25.00	20.50		0.147	16.00	14.50	Back Side 10mm	0.155	0.104	0.259	0.248	0.141	0.085	0.034	0.507	0.344	0.434
		0.650	25.00	20.50		0.112	16.00	14.50	Left Edge 10mm	0.231	0.079	0.310	0.000	0.000	0.000	0.000	0.310	0.310	0.310
		0.000	25.00	20.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.004	25.00	20.50		0.139	16.00	14.50	Top Edge 10mm	0.001	0.098	0.100	0.141	0.225	0.047	0.018	0.241	0.147	0.343
		0.000	25.00	20.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_26A+n78A	Ant.0	0.337	25.50	25.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.337	0.069	0.406	0.172	0.062	0.055	0.023	0.578	0.461	0.491
		0.492	25.50	25.50		0.084	14.00	12.50	Back Side 10mm	0.492	0.059	0.551	0.248	0.141	0.085	0.034	0.799	0.636	0.726
		0.213	25.50	25.50		0.000	14.00	12.50	Left Edge 10mm	0.213	0.000	0.213	0.000	0.000	0.000	0.000	0.213	0.213	0.213
		0.167	25.50	25.50		0.036	14.00	12.50	Right Edge 10mm	0.167	0.025	0.192	0.335	0.087	0.141	0.053	0.527	0.333	0.332
		0.000	25.50	25.50		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.245	25.50	25.50		0.000	14.00	12.50	Bottom Edge 10mm	0.245	0.000	0.245	0.000	0.000	0.000	0.000	0.245	0.245	0.245
DC_26A+n78A	Ant.1	0.395	25.00	20.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.140	0.069	0.210	0.172	0.062	0.055	0.023	0.382	0.265	0.295
		0.437	25.00	20.50		0.084	14.00	12.50	Back Side 10mm	0.155	0.059	0.215	0.248	0.141	0.085	0.034	0.463	0.300	0.390
		0.650	25.00	20.50		0.000	14.00	12.50	Left Edge 10mm	0.231	0.000	0.231	0.000	0.000	0.000	0.000	0.231	0.231	0.231
		0.000	25.00	20.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.004	25.00	20.50		0.251	14.00	12.50	Top Edge 10mm	0.001	0.178	0.179	0.141	0.225	0.047	0.018	0.320	0.226	0.422

		0.000	25.00	20.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_26A+n78A	Ant.0	0.337	25.50	25.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.337	0.095	0.432	0.172	0.062	0.055	0.023	0.604	0.487	0.517
		0.492	25.50	25.50		0.564	20.00	20.00	Back Side 10mm	0.492	0.564	1.056	0.248	0.141	0.085	0.034	1.304	1.141	1.231
		0.213	25.50	25.50		0.205	20.00	20.00	Left Edge 10mm	0.213	0.205	0.418	0.000	0.000	0.000	0.000	0.418	0.418	0.418
		0.167	25.50	25.50		0.000	20.00	20.00	Right Edge 10mm	0.167	0.000	0.167	0.335	0.087	0.141	0.053	0.502	0.308	0.307
		0.000	25.50	25.50		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.245	25.50	25.50		0.000	20.00	20.00	Bottom Edge 10mm	0.245	0.000	0.245	0.000	0.000	0.000	0.000	0.245	0.245	0.245
DC_26A+n78A	Ant.1	0.395	25.00	20.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.140	0.095	0.235	0.172	0.062	0.055	0.023	0.407	0.290	0.320
		0.437	25.00	20.50		0.564	20.00	20.00	Back Side 10mm	0.155	0.564	0.719	0.248	0.141	0.085	0.034	0.967	0.804	0.894
		0.650	25.00	20.50		0.205	20.00	20.00	Left Edge 10mm	0.231	0.205	0.436	0.000	0.000	0.000	0.000	0.436	0.436	0.436
		0.000	25.00	20.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.004	25.00	20.50		0.126	20.00	20.00	Top Edge 10mm	0.001	0.126	0.127	0.141	0.225	0.047	0.018	0.268	0.174	0.370
		0.000	25.00	20.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_26A+n78A	Ant.0	0.337	25.50	25.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.337	0.168	0.505	0.172	0.062	0.055	0.023	0.677	0.560	0.590
		0.492	25.50	25.50		0.293	16.00	16.00	Back Side 10mm	0.492	0.293	0.785	0.248	0.141	0.085	0.034	1.033	0.870	0.960
		0.213	25.50	25.50		0.000	16.00	16.00	Left Edge 10mm	0.213	0.000	0.213	0.000	0.000	0.000	0.000	0.213	0.213	0.213
		0.167	25.50	25.50		0.280	16.00	16.00	Right Edge 10mm	0.167	0.280	0.447	0.335	0.087	0.141	0.053	0.782	0.588	0.587
		0.000	25.50	25.50		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.245	25.50	25.50		0.000	16.00	16.00	Bottom Edge 10mm	0.245	0.000	0.245	0.000	0.000	0.000	0.000	0.245	0.245	0.245
DC_26A+n78A	Ant.1	0.395	25.00	20.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.140	0.168	0.308	0.172	0.062	0.055	0.023	0.480	0.363	0.393
		0.437	25.00	20.50		0.293	16.00	16.00	Back Side 10mm	0.155	0.293	0.448	0.248	0.141	0.085	0.034	0.696	0.533	0.623
		0.650	25.00	20.50		0.000	16.00	16.00	Left Edge 10mm	0.231	0.000	0.231	0.000	0.000	0.000	0.000	0.231	0.231	0.231
		0.000	25.00	20.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.004	25.00	20.50		0.121	16.00	16.00	Top Edge 10mm	0.001	0.121	0.122	0.141	0.225	0.047	0.018	0.263	0.169	0.365
		0.000	25.00	20.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.2	0.302	17.50	14.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.135	0.053	0.188	0.172	0.062	0.055	0.023	0.360	0.243	0.273
		0.074	17.50	14.00		0.147	16.00	14.50	Back Side 10mm	0.033	0.104	0.137	0.248	0.141	0.085	0.034	0.385	0.222	0.312
		0.395	17.50	14.00		0.112	16.00	14.50	Left Edge 10mm	0.176	0.079	0.256	0.000	0.000	0.000	0.000	0.256	0.256	0.256
		0.000	17.50	14.00		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.214	17.50	14.00		0.139	16.00	14.50	Top Edge 10mm	0.096	0.098	0.194	0.141	0.225	0.047	0.018	0.335	0.241	0.437
		0.000	17.50	14.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.3	0.372	22.00	19.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.209	0.053	0.262	0.172	0.062	0.055	0.023	0.434	0.317	0.347
		0.498	22.00	19.50		0.147	16.00	14.50	Back Side 10mm	0.280	0.104	0.384	0.248	0.141	0.085	0.034	0.632	0.469	0.559
		0.000	22.00	19.50		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.129	22.00	19.50		0.000	16.00	14.50	Right Edge 10mm	0.073	0.000	0.073	0.335	0.087	0.141	0.053	0.408	0.214	0.213
		0.000	22.00	19.50		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.677	22.00	19.50		0.000	16.00	14.50	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n78A	Ant.4	0.234	20.00	15.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.083	0.053	0.136	0.172	0.062	0.055	0.023	0.308	0.191	0.221
		0.324	20.00	15.50		0.147	16.00	14.50	Back Side 10mm	0.115	0.104	0.219	0.248	0.141	0.085	0.034	0.467	0.304	0.394
		0.502	20.00	15.50		0.112	16.00	14.50	Left Edge 10mm	0.178	0.079	0.257	0.000	0.000	0.000	0.000	0.257	0.257	0.257
		0.000	20.00	15.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.050	20.00	15.50		0.139	16.00	14.50	Top Edge 10mm	0.018	0.098	0.116	0.141	0.225	0.047	0.018	0.257	0.163	0.359
		0.000	20.00	15.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

DC_66A+n78A	Ant.5	0.130	24.00	24.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.130	0.053	0.183	0.172	0.062	0.055	0.023	0.355	0.238	0.268
		0.226	24.00	24.00		0.147	16.00	14.50	Back Side 10mm	0.226	0.104	0.330	0.248	0.141	0.085	0.034	0.578	0.415	0.505
		0.000	24.00	24.00		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.299	24.00	24.00		0.000	16.00	14.50	Right Edge 10mm	0.299	0.000	0.299	0.335	0.087	0.141	0.053	0.634	0.440	0.439
		0.000	24.00	24.00		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.000	24.00	24.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.2	0.302	17.50	14.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.135	0.069	0.204	0.172	0.062	0.055	0.023	0.376	0.259	0.289
		0.074	17.50	14.00		0.084	14.00	12.50	Back Side 10mm	0.033	0.059	0.093	0.248	0.141	0.085	0.034	0.341	0.178	0.268
		0.395	17.50	14.00		0.000	14.00	12.50	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.214	17.50	14.00		0.251	14.00	12.50	Top Edge 10mm	0.096	0.178	0.273	0.141	0.225	0.047	0.018	0.414	0.320	0.516
		0.000	17.50	14.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.3	0.372	22.00	19.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.209	0.069	0.279	0.172	0.062	0.055	0.023	0.451	0.334	0.364
		0.498	22.00	19.50		0.084	14.00	12.50	Back Side 10mm	0.280	0.059	0.340	0.248	0.141	0.085	0.034	0.588	0.425	0.515
		0.000	22.00	19.50		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.129	22.00	19.50		0.036	14.00	12.50	Right Edge 10mm	0.073	0.025	0.098	0.335	0.087	0.141	0.053	0.433	0.239	0.238
		0.000	22.00	19.50		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.677	22.00	19.50		0.000	14.00	12.50	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n78A	Ant.4	0.234	20.00	15.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.083	0.069	0.152	0.172	0.062	0.055	0.023	0.324	0.207	0.237
		0.324	20.00	15.50		0.084	14.00	12.50	Back Side 10mm	0.115	0.059	0.174	0.248	0.141	0.085	0.034	0.422	0.259	0.349
		0.502	20.00	15.50		0.000	14.00	12.50	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.050	20.00	15.50		0.251	14.00	12.50	Top Edge 10mm	0.018	0.178	0.195	0.141	0.225	0.047	0.018	0.336	0.242	0.438
		0.000	20.00	15.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.5	0.130	24.00	24.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.130	0.069	0.199	0.172	0.062	0.055	0.023	0.371	0.254	0.284
		0.226	24.00	24.00		0.084	14.00	12.50	Back Side 10mm	0.226	0.059	0.285	0.248	0.141	0.085	0.034	0.533	0.370	0.460
		0.000	24.00	24.00		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.299	24.00	24.00		0.036	14.00	12.50	Right Edge 10mm	0.299	0.025	0.324	0.335	0.087	0.141	0.053	0.659	0.465	0.464
		0.000	24.00	24.00		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.000	24.00	24.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.2	0.302	17.50	14.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.135	0.095	0.230	0.172	0.062	0.055	0.023	0.402	0.285	0.315
		0.074	17.50	14.00		0.564	20.00	20.00	Back Side 10mm	0.033	0.564	0.597	0.248	0.141	0.085	0.034	0.845	0.682	0.772
		0.395	17.50	14.00		0.205	20.00	20.00	Left Edge 10mm	0.176	0.205	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
		0.000	17.50	14.00		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.214	17.50	14.00		0.126	20.00	20.00	Top Edge 10mm	0.096	0.126	0.222	0.141	0.225	0.047	0.018	0.363	0.269	0.465
		0.000	17.50	14.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.3	0.372	22.00	19.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.209	0.095	0.304	0.172	0.062	0.055	0.023	0.476	0.359	0.389
		0.498	22.00	19.50		0.564	20.00	20.00	Back Side 10mm	0.280	0.564	0.844	0.248	0.141	0.085	0.034	1.092	0.929	1.019
		0.000	22.00	19.50		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.129	22.00	19.50		0.000	20.00	20.00	Right Edge 10mm	0.073	0.000	0.073	0.335	0.087	0.141	0.053	0.408	0.214	0.213
		0.000	22.00	19.50		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.677	22.00	19.50		0.000	20.00	20.00	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n78A	Ant.4	0.234	20.00	15.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.083	0.095	0.178	0.172	0.062	0.055	0.023	0.350	0.233	0.263

		0.324	20.00	15.50		0.564	20.00	20.00	Back Side 10mm	0.115	0.564	0.679	0.248	0.141	0.085	0.034	0.927	0.764	0.854
		0.502	20.00	15.50		0.205	20.00	20.00	Left Edge 10mm	0.178	0.205	0.383	0.000	0.000	0.000	0.000	0.383	0.383	0.383
		0.000	20.00	15.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.050	20.00	15.50		0.126	20.00	20.00	Top Edge 10mm	0.018	0.126	0.144	0.141	0.225	0.047	0.018	0.285	0.191	0.387
		0.000	20.00	15.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.5	0.130	24.00	24.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.130	0.095	0.225	0.172	0.062	0.055	0.023	0.397	0.280	0.310
		0.226	24.00	24.00		0.564	20.00	20.00	Back Side 10mm	0.226	0.564	0.790	0.248	0.141	0.085	0.034	1.038	0.875	0.965
		0.000	24.00	24.00		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.299	24.00	24.00		0.000	20.00	20.00	Right Edge 10mm	0.299	0.000	0.299	0.335	0.087	0.141	0.053	0.634	0.440	0.439
		0.000	24.00	24.00		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.000	24.00	24.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.2	0.302	17.50	14.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.135	0.168	0.303	0.172	0.062	0.055	0.023	0.475	0.358	0.388
		0.074	17.50	14.00		0.293	16.00	16.00	Back Side 10mm	0.033	0.293	0.326	0.248	0.141	0.085	0.034	0.574	0.411	0.501
		0.395	17.50	14.00		0.000	16.00	16.00	Left Edge 10mm	0.176	0.000	0.176	0.000	0.000	0.000	0.000	0.176	0.176	0.176
		0.000	17.50	14.00		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.214	17.50	14.00		0.121	16.00	16.00	Top Edge 10mm	0.096	0.121	0.217	0.141	0.225	0.047	0.018	0.358	0.264	0.460
		0.000	17.50	14.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.3	0.372	22.00	19.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.209	0.168	0.377	0.172	0.062	0.055	0.023	0.549	0.432	0.462
		0.498	22.00	19.50		0.293	16.00	16.00	Back Side 10mm	0.280	0.293	0.573	0.248	0.141	0.085	0.034	0.821	0.658	0.748
		0.000	22.00	19.50		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.129	22.00	19.50		0.280	16.00	16.00	Right Edge 10mm	0.073	0.280	0.353	0.335	0.087	0.141	0.053	0.688	0.494	0.493
		0.000	22.00	19.50		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.677	22.00	19.50		0.000	16.00	16.00	Bottom Edge 10mm	0.381	0.000	0.381	0.000	0.000	0.000	0.000	0.381	0.381	0.381
DC_66A+n78A	Ant.4	0.234	20.00	15.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.083	0.168	0.251	0.172	0.062	0.055	0.023	0.423	0.306	0.336
		0.324	20.00	15.50		0.293	16.00	16.00	Back Side 10mm	0.115	0.293	0.408	0.248	0.141	0.085	0.034	0.656	0.493	0.583
		0.502	20.00	15.50		0.000	16.00	16.00	Left Edge 10mm	0.178	0.000	0.178	0.000	0.000	0.000	0.000	0.178	0.178	0.178
		0.000	20.00	15.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.050	20.00	15.50		0.121	16.00	16.00	Top Edge 10mm	0.018	0.121	0.139	0.141	0.225	0.047	0.018	0.280	0.186	0.382
		0.000	20.00	15.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_66A+n78A	Ant.5	0.130	24.00	24.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.130	0.168	0.298	0.172	0.062	0.055	0.023	0.470	0.353	0.383
		0.226	24.00	24.00		0.293	16.00	16.00	Back Side 10mm	0.226	0.293	0.519	0.248	0.141	0.085	0.034	0.767	0.604	0.694
		0.000	24.00	24.00		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.299	24.00	24.00		0.280	16.00	16.00	Right Edge 10mm	0.299	0.280	0.579	0.335	0.087	0.141	0.053	0.914	0.720	0.719
		0.000	24.00	24.00		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.000	24.00	24.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.2	0.103	18.50	14.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.041	0.053	0.094	0.172	0.062	0.055	0.023	0.266	0.149	0.179
		0.159	18.50	14.50		0.147	16.00	14.50	Back Side 10mm	0.063	0.104	0.167	0.248	0.141	0.085	0.034	0.415	0.252	0.342
		0.089	18.50	14.50		0.112	16.00	14.50	Left Edge 10mm	0.035	0.079	0.115	0.000	0.000	0.000	0.000	0.115	0.115	0.115
		0.000	18.50	14.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.182	18.50	14.50		0.139	16.00	14.50	Top Edge 10mm	0.072	0.098	0.171	0.141	0.225	0.047	0.018	0.312	0.218	0.414
		0.000	18.50	14.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.3	0.411	23.00	23.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.411	0.053	0.464	0.172	0.062	0.055	0.023	0.636	0.519	0.549
		0.496	23.00	23.00		0.147	16.00	14.50	Back Side 10mm	0.496	0.104	0.600	0.248	0.141	0.085	0.034	0.848	0.685	0.775

		0.000	23.00	23.00		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.154	23.00	23.00		0.000	16.00	14.50	Right Edge 10mm	0.154	0.000	0.154	0.335	0.087	0.141	0.053	0.489	0.295	0.294
		0.000	23.00	23.00		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.664	23.00	23.00		0.000	16.00	14.50	Bottom Edge 10mm	0.664	0.000	0.664	0.000	0.000	0.000	0.000	0.664	0.664	0.664
DC_38A+n78A	Ant.4	0.088	19.00	15.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.039	0.053	0.092	0.172	0.062	0.055	0.023	0.264	0.147	0.177
		0.144	19.00	15.50		0.147	16.00	14.50	Back Side 10mm	0.064	0.104	0.168	0.248	0.141	0.085	0.034	0.416	0.253	0.343
		0.007	19.00	15.50		0.112	16.00	14.50	Left Edge 10mm	0.003	0.079	0.082	0.000	0.000	0.000	0.000	0.082	0.082	0.082
		0.000	19.00	15.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.048	19.00	15.50		0.139	16.00	14.50	Top Edge 10mm	0.021	0.098	0.120	0.141	0.225	0.047	0.018	0.261	0.167	0.363
		0.000	19.00	15.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.5	0.083	22.00	18.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.033	0.053	0.086	0.172	0.062	0.055	0.023	0.258	0.141	0.171
		0.149	22.00	18.00		0.147	16.00	14.50	Back Side 10mm	0.059	0.104	0.163	0.248	0.141	0.085	0.034	0.411	0.248	0.338
		0.000	22.00	18.00		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.250	22.00	18.00		0.000	16.00	14.50	Right Edge 10mm	0.100	0.000	0.100	0.335	0.087	0.141	0.053	0.435	0.241	0.240
		0.000	22.00	18.00		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.000	22.00	18.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.2	0.103	18.50	14.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.041	0.069	0.110	0.172	0.062	0.055	0.023	0.282	0.165	0.195
		0.159	18.50	14.50		0.084	14.00	12.50	Back Side 10mm	0.063	0.059	0.123	0.248	0.141	0.085	0.034	0.371	0.208	0.298
		0.089	18.50	14.50		0.000	14.00	12.50	Left Edge 10mm	0.035	0.000	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.000	18.50	14.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.182	18.50	14.50		0.251	14.00	12.50	Top Edge 10mm	0.072	0.178	0.250	0.141	0.225	0.047	0.018	0.391	0.297	0.493
		0.000	18.50	14.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.3	0.411	23.00	23.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.411	0.069	0.480	0.172	0.062	0.055	0.023	0.652	0.535	0.565
		0.496	23.00	23.00		0.084	14.00	12.50	Back Side 10mm	0.496	0.059	0.555	0.248	0.141	0.085	0.034	0.803	0.640	0.730
		0.000	23.00	23.00		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.154	23.00	23.00		0.036	14.00	12.50	Right Edge 10mm	0.154	0.025	0.179	0.335	0.087	0.141	0.053	0.514	0.320	0.319
		0.000	23.00	23.00		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.664	23.00	23.00		0.000	14.00	12.50	Bottom Edge 10mm	0.664	0.000	0.664	0.000	0.000	0.000	0.000	0.664	0.664	0.664
DC_38A+n78A	Ant.4	0.088	19.00	15.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.039	0.069	0.109	0.172	0.062	0.055	0.023	0.281	0.164	0.194
		0.144	19.00	15.50		0.084	14.00	12.50	Back Side 10mm	0.064	0.059	0.124	0.248	0.141	0.085	0.034	0.372	0.209	0.299
		0.007	19.00	15.50		0.000	14.00	12.50	Left Edge 10mm	0.003	0.000	0.003	0.000	0.000	0.000	0.000	0.003	0.003	0.003
		0.000	19.00	15.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.048	19.00	15.50		0.251	14.00	12.50	Top Edge 10mm	0.021	0.178	0.199	0.141	0.225	0.047	0.018	0.340	0.246	0.442
		0.000	19.00	15.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.5	0.083	22.00	18.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.033	0.069	0.102	0.172	0.062	0.055	0.023	0.274	0.157	0.187
		0.149	22.00	18.00		0.084	14.00	12.50	Back Side 10mm	0.059	0.059	0.119	0.248	0.141	0.085	0.034	0.367	0.204	0.294
		0.000	22.00	18.00		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.250	22.00	18.00		0.036	14.00	12.50	Right Edge 10mm	0.100	0.025	0.125	0.335	0.087	0.141	0.053	0.460	0.266	0.265
		0.000	22.00	18.00		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.000	22.00	18.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.2	0.103	18.50	14.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.041	0.095	0.136	0.172	0.062	0.055	0.023	0.308	0.191	0.221
		0.159	18.50	14.50		0.564	20.00	20.00	Back Side 10mm	0.063	0.564	0.627	0.248	0.141	0.085	0.034	0.875	0.712	0.802
		0.089	18.50	14.50		0.205	20.00	20.00	Left Edge 10mm	0.035	0.205	0.240	0.000	0.000	0.000	0.000	0.240	0.240	0.240

		0.000	18.50	14.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.182	18.50	14.50		0.126	20.00	20.00	Top Edge 10mm	0.072	0.126	0.198	0.141	0.225	0.047	0.018	0.339	0.245	0.441
		0.000	18.50	14.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.3	0.411	23.00	23.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.411	0.095	0.506	0.172	0.062	0.055	0.023	0.678	0.561	0.591
		0.496	23.00	23.00		0.564	20.00	20.00	Back Side 10mm	0.496	0.564	1.060	0.248	0.141	0.085	0.034	1.308	1.145	1.235
		0.000	23.00	23.00		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.154	23.00	23.00		0.000	20.00	20.00	Right Edge 10mm	0.154	0.000	0.154	0.335	0.087	0.141	0.053	0.489	0.295	0.294
		0.000	23.00	23.00		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.664	23.00	23.00		0.000	20.00	20.00	Bottom Edge 10mm	0.664	0.000	0.664	0.000	0.000	0.000	0.000	0.664	0.664	0.664
DC_38A+n78A	Ant.4	0.088	19.00	15.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.039	0.095	0.134	0.172	0.062	0.055	0.023	0.306	0.189	0.219
		0.144	19.00	15.50		0.564	20.00	20.00	Back Side 10mm	0.064	0.564	0.628	0.248	0.141	0.085	0.034	0.876	0.713	0.803
		0.007	19.00	15.50		0.205	20.00	20.00	Left Edge 10mm	0.003	0.205	0.208	0.000	0.000	0.000	0.000	0.208	0.208	0.208
		0.000	19.00	15.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.048	19.00	15.50		0.126	20.00	20.00	Top Edge 10mm	0.021	0.126	0.147	0.141	0.225	0.047	0.018	0.288	0.194	0.390
		0.000	19.00	15.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.5	0.083	22.00	18.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.033	0.095	0.128	0.172	0.062	0.055	0.023	0.300	0.183	0.213
		0.149	22.00	18.00		0.564	20.00	20.00	Back Side 10mm	0.059	0.564	0.623	0.248	0.141	0.085	0.034	0.871	0.708	0.798
		0.000	22.00	18.00		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.250	22.00	18.00		0.000	20.00	20.00	Right Edge 10mm	0.100	0.000	0.100	0.335	0.087	0.141	0.053	0.435	0.241	0.240
		0.000	22.00	18.00		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.000	22.00	18.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.2	0.103	18.50	14.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.041	0.168	0.209	0.172	0.062	0.055	0.023	0.381	0.264	0.294
		0.159	18.50	14.50		0.293	16.00	16.00	Back Side 10mm	0.063	0.293	0.356	0.248	0.141	0.085	0.034	0.604	0.441	0.531
		0.089	18.50	14.50		0.000	16.00	16.00	Left Edge 10mm	0.035	0.000	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.000	18.50	14.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.182	18.50	14.50		0.121	16.00	16.00	Top Edge 10mm	0.072	0.121	0.193	0.141	0.225	0.047	0.018	0.334	0.240	0.436
		0.000	18.50	14.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.3	0.411	23.00	23.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.411	0.168	0.579	0.172	0.062	0.055	0.023	0.751	0.634	0.664
		0.496	23.00	23.00		0.293	16.00	16.00	Back Side 10mm	0.496	0.293	0.789	0.248	0.141	0.085	0.034	1.037	0.874	0.964
		0.000	23.00	23.00		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.154	23.00	23.00		0.280	16.00	16.00	Right Edge 10mm	0.154	0.280	0.434	0.335	0.087	0.141	0.053	0.769	0.575	0.574
		0.000	23.00	23.00		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.664	23.00	23.00		0.000	16.00	16.00	Bottom Edge 10mm	0.664	0.000	0.664	0.000	0.000	0.000	0.000	0.664	0.664	0.664
DC_38A+n78A	Ant.4	0.088	19.00	15.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.039	0.168	0.207	0.172	0.062	0.055	0.023	0.379	0.262	0.292
		0.144	19.00	15.50		0.293	16.00	16.00	Back Side 10mm	0.064	0.293	0.357	0.248	0.141	0.085	0.034	0.605	0.442	0.532
		0.007	19.00	15.50		0.000	16.00	16.00	Left Edge 10mm	0.003	0.000	0.003	0.000	0.000	0.000	0.000	0.003	0.003	0.003
		0.000	19.00	15.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.048	19.00	15.50		0.121	16.00	16.00	Top Edge 10mm	0.021	0.121	0.142	0.141	0.225	0.047	0.018	0.283	0.189	0.385
		0.000	19.00	15.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_38A+n78A	Ant.5	0.083	22.00	18.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.033	0.168	0.201	0.172	0.062	0.055	0.023	0.373	0.256	0.286
		0.149	22.00	18.00		0.293	16.00	16.00	Back Side 10mm	0.059	0.293	0.352	0.248	0.141	0.085	0.034	0.600	0.437	0.527
		0.000	22.00	18.00		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.250	22.00	18.00		0.280	16.00	16.00	Right Edge 10mm	0.100	0.280	0.380	0.335	0.087	0.141	0.053	0.715	0.521	0.520

		0.000	22.00	18.00		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.000	22.00	18.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.2	0.167	19.00	14.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.053	0.053	0.106	0.172	0.062	0.055	0.023	0.278	0.161	0.191
		0.201	19.00	14.00		0.147	16.00	14.50	Back Side 10mm	0.064	0.104	0.168	0.248	0.141	0.085	0.034	0.416	0.253	0.343
		0.130	19.00	14.00		0.112	16.00	14.50	Left Edge 10mm	0.041	0.079	0.120	0.000	0.000	0.000	0.000	0.120	0.120	0.120
		0.000	19.00	14.00		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.195	19.00	14.00		0.139	16.00	14.50	Top Edge 10mm	0.062	0.098	0.160	0.141	0.225	0.047	0.018	0.301	0.207	0.403
		0.000	19.00	14.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.3	0.446	22.50	22.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.446	0.053	0.499	0.172	0.062	0.055	0.023	0.671	0.554	0.584
		0.552	22.50	22.50		0.147	16.00	14.50	Back Side 10mm	0.552	0.104	0.656	0.248	0.141	0.085	0.034	0.904	0.741	0.831
		0.000	22.50	22.50		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.194	22.50	22.50		0.000	16.00	14.50	Right Edge 10mm	0.194	0.000	0.194	0.335	0.087	0.141	0.053	0.529	0.335	0.334
		0.000	22.50	22.50		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.599	22.50	22.50		0.000	16.00	14.50	Bottom Edge 10mm	0.599	0.000	0.599	0.000	0.000	0.000	0.000	0.599	0.599	0.599
DC_41A+n78A	Ant.4	0.111	19.00	15.50	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.050	0.053	0.103	0.172	0.062	0.055	0.023	0.275	0.158	0.188
		0.182	19.00	15.50		0.147	16.00	14.50	Back Side 10mm	0.081	0.104	0.185	0.248	0.141	0.085	0.034	0.433	0.270	0.360
		0.213	19.00	15.50		0.112	16.00	14.50	Left Edge 10mm	0.095	0.079	0.174	0.000	0.000	0.000	0.000	0.174	0.174	0.174
		0.000	19.00	15.50		0.000	16.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.056	19.00	15.50		0.139	16.00	14.50	Top Edge 10mm	0.025	0.098	0.123	0.141	0.225	0.047	0.018	0.264	0.170	0.366
		0.000	19.00	15.50		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.5	0.093	22.00	18.00	Ant.6	0.075	16.00	14.50	Front Side 10mm	0.037	0.053	0.090	0.172	0.062	0.055	0.023	0.262	0.145	0.175
		0.173	22.00	18.00		0.147	16.00	14.50	Back Side 10mm	0.069	0.104	0.173	0.248	0.141	0.085	0.034	0.421	0.258	0.348
		0.000	22.00	18.00		0.112	16.00	14.50	Left Edge 10mm	0.000	0.079	0.079	0.000	0.000	0.000	0.000	0.079	0.079	0.079
		0.258	22.00	18.00		0.000	16.00	14.50	Right Edge 10mm	0.103	0.000	0.103	0.335	0.087	0.141	0.053	0.438	0.244	0.243
		0.000	22.00	18.00		0.139	16.00	14.50	Top Edge 10mm	0.000	0.098	0.098	0.141	0.225	0.047	0.018	0.239	0.145	0.341
		0.000	22.00	18.00		0.000	16.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.2	0.167	19.00	14.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.053	0.069	0.122	0.172	0.062	0.055	0.023	0.294	0.177	0.207
		0.201	19.00	14.00		0.084	14.00	12.50	Back Side 10mm	0.064	0.059	0.123	0.248	0.141	0.085	0.034	0.371	0.208	0.298
		0.130	19.00	14.00		0.000	14.00	12.50	Left Edge 10mm	0.041	0.000	0.041	0.000	0.000	0.000	0.000	0.041	0.041	0.041
		0.000	19.00	14.00		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.195	19.00	14.00		0.251	14.00	12.50	Top Edge 10mm	0.062	0.178	0.239	0.141	0.225	0.047	0.018	0.380	0.286	0.482
		0.000	19.00	14.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.3	0.446	22.50	22.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.446	0.069	0.515	0.172	0.062	0.055	0.023	0.687	0.570	0.600
		0.552	22.50	22.50		0.084	14.00	12.50	Back Side 10mm	0.552	0.059	0.611	0.248	0.141	0.085	0.034	0.859	0.696	0.786
		0.000	22.50	22.50		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.194	22.50	22.50		0.036	14.00	12.50	Right Edge 10mm	0.194	0.025	0.219	0.335	0.087	0.141	0.053	0.554	0.360	0.359
		0.000	22.50	22.50		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.599	22.50	22.50		0.000	14.00	12.50	Bottom Edge 10mm	0.599	0.000	0.599	0.000	0.000	0.000	0.000	0.599	0.599	0.599
DC_41A+n78A	Ant.4	0.111	19.00	15.50	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.050	0.069	0.119	0.172	0.062	0.055	0.023	0.291	0.174	0.204
		0.182	19.00	15.50		0.084	14.00	12.50	Back Side 10mm	0.081	0.059	0.141	0.248	0.141	0.085	0.034	0.389	0.226	0.316
		0.213	19.00	15.50		0.000	14.00	12.50	Left Edge 10mm	0.095	0.000	0.095	0.000	0.000	0.000	0.000	0.095	0.095	0.095
		0.000	19.00	15.50		0.036	14.00	12.50	Right Edge 10mm	0.000	0.025	0.025	0.335	0.087	0.141	0.053	0.360	0.166	0.165
		0.056	19.00	15.50		0.251	14.00	12.50	Top Edge 10mm	0.025	0.178	0.203	0.141	0.225	0.047	0.018	0.344	0.250	0.446

		0.000	19.00	15.50		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.5	0.093	22.00	18.00	Ant.7	0.098	14.00	12.50	Front Side 10mm	0.037	0.069	0.106	0.172	0.062	0.055	0.023	0.278	0.161	0.191
		0.173	22.00	18.00		0.084	14.00	12.50	Back Side 10mm	0.069	0.059	0.128	0.248	0.141	0.085	0.034	0.376	0.213	0.303
		0.000	22.00	18.00		0.000	14.00	12.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.258	22.00	18.00		0.036	14.00	12.50	Right Edge 10mm	0.103	0.025	0.128	0.335	0.087	0.141	0.053	0.463	0.269	0.268
		0.000	22.00	18.00		0.251	14.00	12.50	Top Edge 10mm	0.000	0.178	0.178	0.141	0.225	0.047	0.018	0.319	0.225	0.421
		0.000	22.00	18.00		0.000	14.00	12.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.2	0.167	19.00	14.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.053	0.095	0.148	0.172	0.062	0.055	0.023	0.320	0.203	0.233
		0.201	19.00	14.00		0.564	20.00	20.00	Back Side 10mm	0.064	0.564	0.628	0.248	0.141	0.085	0.034	0.876	0.713	0.803
		0.130	19.00	14.00		0.205	20.00	20.00	Left Edge 10mm	0.041	0.205	0.246	0.000	0.000	0.000	0.000	0.246	0.246	0.246
		0.000	19.00	14.00		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.195	19.00	14.00		0.126	20.00	20.00	Top Edge 10mm	0.062	0.126	0.188	0.141	0.225	0.047	0.018	0.329	0.235	0.431
		0.000	19.00	14.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.3	0.446	22.50	22.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.446	0.095	0.541	0.172	0.062	0.055	0.023	0.713	0.596	0.626
		0.552	22.50	22.50		0.564	20.00	20.00	Back Side 10mm	0.552	0.564	1.116	0.248	0.141	0.085	0.034	1.364	1.201	1.291
		0.000	22.50	22.50		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.194	22.50	22.50		0.000	20.00	20.00	Right Edge 10mm	0.194	0.000	0.194	0.335	0.087	0.141	0.053	0.529	0.335	0.334
		0.000	22.50	22.50		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.599	22.50	22.50		0.000	20.00	20.00	Bottom Edge 10mm	0.599	0.000	0.599	0.000	0.000	0.000	0.000	0.599	0.599	0.599
DC_41A+n78A	Ant.4	0.111	19.00	15.50	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.050	0.095	0.145	0.172	0.062	0.055	0.023	0.317	0.200	0.230
		0.182	19.00	15.50		0.564	20.00	20.00	Back Side 10mm	0.081	0.564	0.645	0.248	0.141	0.085	0.034	0.893	0.730	0.820
		0.213	19.00	15.50		0.205	20.00	20.00	Left Edge 10mm	0.095	0.205	0.300	0.000	0.000	0.000	0.000	0.300	0.300	0.300
		0.000	19.00	15.50		0.000	20.00	20.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.056	19.00	15.50		0.126	20.00	20.00	Top Edge 10mm	0.025	0.126	0.151	0.141	0.225	0.047	0.018	0.292	0.198	0.394
		0.000	19.00	15.50		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.5	0.093	22.00	18.00	Ant.8	0.095	20.00	20.00	Front Side 10mm	0.037	0.095	0.132	0.172	0.062	0.055	0.023	0.304	0.187	0.217
		0.173	22.00	18.00		0.564	20.00	20.00	Back Side 10mm	0.069	0.564	0.633	0.248	0.141	0.085	0.034	0.881	0.718	0.808
		0.000	22.00	18.00		0.205	20.00	20.00	Left Edge 10mm	0.000	0.205	0.205	0.000	0.000	0.000	0.000	0.205	0.205	0.205
		0.258	22.00	18.00		0.000	20.00	20.00	Right Edge 10mm	0.103	0.000	0.103	0.335	0.087	0.141	0.053	0.438	0.244	0.243
		0.000	22.00	18.00		0.126	20.00	20.00	Top Edge 10mm	0.000	0.126	0.126	0.141	0.225	0.047	0.018	0.267	0.173	0.369
		0.000	22.00	18.00		0.000	20.00	20.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.2	0.167	19.00	14.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.053	0.168	0.221	0.172	0.062	0.055	0.023	0.393	0.276	0.306
		0.201	19.00	14.00		0.293	16.00	16.00	Back Side 10mm	0.064	0.293	0.357	0.248	0.141	0.085	0.034	0.605	0.442	0.532
		0.130	19.00	14.00		0.000	16.00	16.00	Left Edge 10mm	0.041	0.000	0.041	0.000	0.000	0.000	0.000	0.041	0.041	0.041
		0.000	19.00	14.00		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.195	19.00	14.00		0.121	16.00	16.00	Top Edge 10mm	0.062	0.121	0.183	0.141	0.225	0.047	0.018	0.324	0.230	0.426
		0.000	19.00	14.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.3	0.446	22.50	22.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.446	0.168	0.614	0.172	0.062	0.055	0.023	0.786	0.669	0.699
		0.552	22.50	22.50		0.293	16.00	16.00	Back Side 10mm	0.552	0.293	0.845	0.248	0.141	0.085	0.034	1.093	0.930	1.020
		0.000	22.50	22.50		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.194	22.50	22.50		0.280	16.00	16.00	Right Edge 10mm	0.194	0.280	0.474	0.335	0.087	0.141	0.053	0.809	0.615	0.614
		0.000	22.50	22.50		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.599	22.50	22.50		0.000	16.00	16.00	Bottom Edge 10mm	0.599	0.000	0.599	0.000	0.000	0.000	0.000	0.599	0.599	0.599

DC_41A+n78A	Ant.4	0.111	19.00	15.50	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.050	0.168	0.218	0.172	0.062	0.055	0.023	0.390	0.273	0.303
		0.182	19.00	15.50		0.293	16.00	16.00	Back Side 10mm	0.081	0.293	0.374	0.248	0.141	0.085	0.034	0.622	0.459	0.549
		0.213	19.00	15.50		0.000	16.00	16.00	Left Edge 10mm	0.095	0.000	0.095	0.000	0.000	0.000	0.000	0.095	0.095	0.095
		0.000	19.00	15.50		0.280	16.00	16.00	Right Edge 10mm	0.000	0.280	0.280	0.335	0.087	0.141	0.053	0.615	0.421	0.420
		0.056	19.00	15.50		0.121	16.00	16.00	Top Edge 10mm	0.025	0.121	0.146	0.141	0.225	0.047	0.018	0.287	0.193	0.389
		0.000	19.00	15.50		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
DC_41A+n78A	Ant.5	0.093	22.00	18.00	Ant.9	0.168	16.00	16.00	Front Side 10mm	0.037	0.168	0.205	0.172	0.062	0.055	0.023	0.377	0.260	0.290
		0.173	22.00	18.00		0.293	16.00	16.00	Back Side 10mm	0.069	0.293	0.362	0.248	0.141	0.085	0.034	0.610	0.447	0.537
		0.000	22.00	18.00		0.000	16.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.258	22.00	18.00		0.280	16.00	16.00	Right Edge 10mm	0.103	0.280	0.383	0.335	0.087	0.141	0.053	0.718	0.524	0.523
		0.000	22.00	18.00		0.121	16.00	16.00	Top Edge 10mm	0.000	0.121	0.121	0.141	0.225	0.047	0.018	0.262	0.168	0.364
		0.000	22.00	18.00		0.000	16.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Note:																			
1: The simultaneous transmission combinations of the multiple antennas contain combinations of two antennas, so only the worst simultaneous transmission combinations was shown in this table.																			
2: The highest Summed 1g SAR is 1,364 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.																			

13.2.12 Head Simultaneous Transmission SAR Evaluation for UL_CA and WLAN and BT

Band	LTE Antenna	4G Band1		UL_CA	NR Antenna	4G Band2		UL_CA	Position	Stand alone SAR								SUM SAR			
		LTE SAR	LTE Max Power	LTE		LTE SAR	LTE Max Power	LTE SAR		LTE SAR	1	2	3	4	5	6	1+2	1+5	1+3+6	1+4+6	
				Max							LTE CA	2.4GWIFI	5GWIFI	6GWIFI	Bluetooth	Bluetooth					
				Power							(Band1+Band2)	Max.	Max.	Max.	Max.	Max.					
				DSI1							DSI1	DSI1	Level2	Level2	Level2	LowPower1					LowPower2
CA_2A_4A	Ant.3	0.076	23.00	23.00	Ant.2	0.552	17.00	14.00	Left Cheek	0.076	0.277	0.353	0.398	0.290	0.158	0.323	0.138	0.751	0.676	0.781	0.649
		0.037	23.00	23.00		0.635	17.00	14.00	Left Tilt	0.037	0.318	0.355	0.276	0.462	0.216	0.192	0.075	0.631	0.547	0.892	0.646
		0.057	23.00	23.00		0.943	17.00	14.00	Right Cheek	0.057	0.473	0.530	0.147	0.172	0.094	0.119	0.051	0.677	0.649	0.753	0.675
		0.028	23.00	23.00		0.765	17.00	14.00	Right Tilt	0.028	0.383	0.411	0.152	0.206	0.111	0.092	0.036	0.563	0.503	0.653	0.558
CA_2A_4A	Ant.4	0.171	24.50	18.50	Ant.2	0.552	17.00	14.00	Left Cheek	0.043	0.277	0.320	0.398	0.290	0.158	0.323	0.138	0.718	0.643	0.748	0.616
		0.073	24.50	18.50		0.635	17.00	14.00	Left Tilt	0.018	0.318	0.337	0.276	0.462	0.216	0.192	0.075	0.613	0.529	0.874	0.628
		0.661	24.50	18.50		0.943	17.00	14.00	Right Cheek	0.166	0.473	0.639	0.147	0.172	0.094	0.119	0.051	0.786	0.758	0.862	0.784
		0.172	24.50	18.50		0.765	17.00	14.00	Right Tilt	0.043	0.383	0.427	0.152	0.206	0.111	0.092	0.036	0.579	0.519	0.669	0.574
CA_2A_4A	Ant.5	0.260	21.50	21.50	Ant.2	0.552	17.00	14.00	Left Cheek	0.260	0.277	0.537	0.398	0.290	0.158	0.323	0.138	0.935	0.860	0.965	0.833
		0.061	21.50	21.50		0.635	17.00	14.00	Left Tilt	0.061	0.318	0.379	0.276	0.462	0.216	0.192	0.075	0.655	0.571	0.916	0.670
		0.132	21.50	21.50		0.943	17.00	14.00	Right Cheek	0.132	0.473	0.605	0.147	0.172	0.094	0.119	0.051	0.752	0.724	0.828	0.750
		0.029	21.50	21.50		0.765	17.00	14.00	Right Tilt	0.029	0.383	0.412	0.152	0.206	0.111	0.092	0.036	0.564	0.504	0.654	0.559
CA_2A_4A	Ant.2	0.599	19.50	15.50	Ant.3	0.333	25.50	25.50	Left Cheek	0.238	0.333	0.571	0.398	0.290	0.158	0.323	0.138	0.969	0.894	0.999	0.867
		0.735	19.50	15.50		0.083	25.50	25.50	Left Tilt	0.293	0.083	0.376	0.276	0.462	0.216	0.192	0.075	0.652	0.568	0.913	0.667
		1.005	19.50	15.50		0.264	25.50	25.50	Right Cheek	0.400	0.264	0.664	0.147	0.172	0.094	0.119	0.051	0.811	0.783	0.887	0.809
		0.798	19.50	15.50		0.066	25.50	25.50	Right Tilt	0.318	0.066	0.384	0.152	0.206	0.111	0.092	0.036	0.536	0.476	0.626	0.531
CA_2A_4A	Ant.4	0.171	24.50	18.50	Ant.3	0.333	25.50	25.50	Left Cheek	0.043	0.333	0.376	0.398	0.290	0.158	0.323	0.138	0.774	0.699	0.804	0.672
		0.073	24.50	18.50		0.083	25.50	25.50	Left Tilt	0.018	0.083	0.101	0.276	0.462	0.216	0.192	0.075	0.377	0.293	0.638	0.392
		0.661	24.50	18.50		0.264	25.50	25.50	Right Cheek	0.166	0.264	0.430	0.147	0.172	0.094	0.119	0.051	0.577	0.549	0.653	0.575
		0.172	24.50	18.50		0.066	25.50	25.50	Right Tilt	0.043	0.066	0.109	0.152	0.206	0.111	0.092	0.036	0.261	0.201	0.351	0.256
CA_2A_4A	Ant.5	0.260	21.50	21.50	Ant.3	0.333	25.50	25.50	Left Cheek	0.260	0.333	0.593	0.398	0.290	0.158	0.323	0.138	0.991	0.916	1.021	0.889
		0.061	21.50	21.50		0.083	25.50	25.50	Left Tilt	0.061	0.083	0.144	0.276	0.462	0.216	0.192	0.075	0.420	0.336	0.681	0.435
		0.132	21.50	21.50		0.264	25.50	25.50	Right Cheek	0.132	0.264	0.396	0.147	0.172	0.094	0.119	0.051	0.543	0.515	0.619	0.541
		0.029	21.50	21.50		0.066	25.50	25.50	Right Tilt	0.029	0.066	0.095	0.152	0.206	0.111	0.092	0.036	0.247	0.187	0.337	0.242
CA_2A_4A	Ant.2	0.599	19.50	15.50	Ant.4	0.246	20.50	15.50	Left Cheek	0.238	0.078	0.316	0.398	0.290	0.158	0.323	0.138	0.714	0.639	0.744	0.612
		0.735	19.50	15.50		0.116	20.50	15.50	Left Tilt	0.293	0.037	0.329	0.276	0.462	0.216	0.192	0.075	0.605	0.521	0.866	0.620
		1.005	19.50	15.50		0.946	20.50	15.50	Right Cheek	0.400	0.299	0.699	0.147	0.172	0.094	0.119	0.051	0.846	0.818	0.922	0.844
		0.798	19.50	15.50		0.283	20.50	15.50	Right Tilt	0.318	0.089	0.407	0.152	0.206	0.111	0.092	0.036	0.559	0.499	0.649	0.554
CA_2A_4A	Ant.3	0.076	23.00	23.00	Ant.4	0.246	20.50	15.50	Left Cheek	0.076	0.078	0.154	0.398	0.290	0.158	0.323	0.138	0.552	0.477	0.582	0.450
		0.037	23.00	23.00		0.116	20.50	15.50	Left Tilt	0.037	0.037	0.074	0.276	0.462	0.216	0.192	0.075	0.350	0.266	0.611	0.365
		0.057	23.00	23.00		0.946	20.50	15.50	Right Cheek	0.057	0.299	0.356	0.147	0.172	0.094	0.119	0.051	0.503	0.475	0.579	0.501
		0.028	23.00	23.00		0.283	20.50	15.50	Right Tilt	0.028	0.089	0.117	0.152	0.206	0.111	0.092	0.036	0.269	0.209	0.359	0.264
CA_2A_4A	Ant.5	0.260	21.50	21.50	Ant.4	0.246	20.50	15.50	Left Cheek	0.260	0.078	0.338	0.398	0.290	0.158	0.323	0.138	0.736	0.661	0.766	0.634
		0.061	21.50	21.50		0.116	20.50	15.50	Left Tilt	0.061	0.037	0.098	0.276	0.462	0.216	0.192	0.075	0.374	0.290	0.635	0.389
		0.132	21.50	21.50		0.946	20.50	15.50	Right Cheek	0.132	0.299	0.431	0.147	0.172	0.094	0.119	0.051	0.578	0.550	0.654	0.576
		0.029	21.50	21.50		0.283	20.50	15.50	Right Tilt	0.029	0.089	0.118	0.152	0.206	0.111	0.092	0.036	0.270	0.210	0.360	0.265

CA_2A_4A	Ant.2	0.599	19.50	15.50	Ant.5	0.431	24.00	24.00	Left Cheek	0.238	0.431	0.669	0.398	0.290	0.158	0.323	0.138	1.067	0.992	1.097	0.965
		0.735	19.50	15.50		0.100	24.00	24.00	Left Tilt	0.293	0.100	0.393	0.276	0.462	0.216	0.192	0.075	0.669	0.585	0.930	0.684
		1.005	19.50	15.50		0.216	24.00	24.00	Right Cheek	0.400	0.216	0.616	0.147	0.172	0.094	0.119	0.051	0.763	0.735	0.839	0.761
		0.798	19.50	15.50		0.043	24.00	24.00	Right Tilt	0.318	0.043	0.361	0.152	0.206	0.111	0.092	0.036	0.513	0.453	0.603	0.508
CA_2A_4A	Ant.3	0.076	23.00	23.00	Ant.5	0.431	24.00	24.00	Left Cheek	0.076	0.431	0.507	0.398	0.290	0.158	0.323	0.138	0.905	0.830	0.935	0.803
		0.037	23.00	23.00		0.100	24.00	24.00	Left Tilt	0.037	0.100	0.137	0.276	0.462	0.216	0.192	0.075	0.413	0.329	0.674	0.428
		0.057	23.00	23.00		0.216	24.00	24.00	Right Cheek	0.057	0.216	0.273	0.147	0.172	0.094	0.119	0.051	0.420	0.392	0.496	0.418
		0.028	23.00	23.00		0.043	24.00	24.00	Right Tilt	0.028	0.043	0.071	0.152	0.206	0.111	0.092	0.036	0.223	0.163	0.313	0.218
CA_2A_4A	Ant.4	0.171	24.50	18.50	Ant.5	0.431	24.00	24.00	Left Cheek	0.043	0.431	0.474	0.398	0.290	0.158	0.323	0.138	0.872	0.797	0.902	0.770
		0.073	24.50	18.50		0.100	24.00	24.00	Left Tilt	0.018	0.100	0.118	0.276	0.462	0.216	0.192	0.075	0.394	0.310	0.655	0.409
		0.661	24.50	18.50		0.216	24.00	24.00	Right Cheek	0.166	0.216	0.382	0.147	0.172	0.094	0.119	0.051	0.529	0.501	0.605	0.527
		0.172	24.50	18.50		0.043	24.00	24.00	Right Tilt	0.043	0.043	0.086	0.152	0.206	0.111	0.092	0.036	0.238	0.178	0.328	0.233
CA_4A_5A	Ant.2	0.552	17.00	14.00	Ant.0	0.276	25.50	25.50	Left Cheek	0.277	0.276	0.553	0.398	0.290	0.158	0.323	0.138	0.951	0.876	0.981	0.849
		0.635	17.00	14.00		0.162	25.50	25.50	Left Tilt	0.318	0.162	0.480	0.276	0.462	0.216	0.192	0.075	0.756	0.672	1.017	0.771
		0.943	17.00	14.00		0.212	25.50	25.50	Right Cheek	0.473	0.212	0.685	0.147	0.172	0.094	0.119	0.051	0.832	0.804	0.908	0.830
		0.765	17.00	14.00		0.128	25.50	25.50	Right Tilt	0.383	0.128	0.511	0.152	0.206	0.111	0.092	0.036	0.663	0.603	0.753	0.658
CA_4A_5A	Ant.2	0.552	17.00	14.00	Ant.1	0.888	24.00	20.50	Left Cheek	0.277	0.397	0.673	0.398	0.290	0.158	0.323	0.138	1.071	0.996	1.101	0.969
		0.635	17.00	14.00		0.085	24.00	20.50	Left Tilt	0.318	0.038	0.356	0.276	0.462	0.216	0.192	0.075	0.632	0.548	0.893	0.647
		0.943	17.00	14.00		0.454	24.00	20.50	Right Cheek	0.473	0.203	0.675	0.147	0.172	0.094	0.119	0.051	0.822	0.794	0.898	0.820
		0.765	17.00	14.00		0.076	24.00	20.50	Right Tilt	0.383	0.034	0.417	0.152	0.206	0.111	0.092	0.036	0.569	0.509	0.659	0.564
CA_4A_5A	Ant.3	0.333	25.50	25.50	Ant.0	0.276	25.50	25.50	Left Cheek	0.333	0.276	0.609	0.398	0.290	0.158	0.323	0.138	1.007	0.932	1.037	0.905
		0.083	25.50	25.50		0.162	25.50	25.50	Left Tilt	0.083	0.162	0.245	0.276	0.462	0.216	0.192	0.075	0.521	0.437	0.782	0.536
		0.264	25.50	25.50		0.212	25.50	25.50	Right Cheek	0.264	0.212	0.476	0.147	0.172	0.094	0.119	0.051	0.623	0.595	0.699	0.621
		0.066	25.50	25.50		0.128	25.50	25.50	Right Tilt	0.066	0.128	0.194	0.152	0.206	0.111	0.092	0.036	0.346	0.286	0.436	0.341
CA_4A_5A	Ant.3	0.333	25.50	25.50	Ant.1	0.888	24.00	20.50	Left Cheek	0.333	0.397	0.730	0.398	0.290	0.158	0.323	0.138	1.128	1.053	1.158	1.026
		0.083	25.50	25.50		0.085	24.00	20.50	Left Tilt	0.083	0.038	0.121	0.276	0.462	0.216	0.192	0.075	0.397	0.313	0.658	0.412
		0.264	25.50	25.50		0.454	24.00	20.50	Right Cheek	0.264	0.203	0.467	0.147	0.172	0.094	0.119	0.051	0.614	0.586	0.690	0.612
		0.066	25.50	25.50		0.076	24.00	20.50	Right Tilt	0.066	0.034	0.100	0.152	0.206	0.111	0.092	0.036	0.252	0.192	0.342	0.247
CA_4A_5A	Ant.4	0.246	20.50	15.50	Ant.0	0.276	25.50	25.50	Left Cheek	0.078	0.276	0.354	0.398	0.290	0.158	0.323	0.138	0.752	0.677	0.782	0.650
		0.116	20.50	15.50		0.162	25.50	25.50	Left Tilt	0.037	0.162	0.199	0.276	0.462	0.216	0.192	0.075	0.475	0.391	0.736	0.490
		0.946	20.50	15.50		0.212	25.50	25.50	Right Cheek	0.299	0.212	0.511	0.147	0.172	0.094	0.119	0.051	0.658	0.630	0.734	0.656
		0.283	20.50	15.50		0.128	25.50	25.50	Right Tilt	0.089	0.128	0.217	0.152	0.206	0.111	0.092	0.036	0.369	0.309	0.459	0.364
CA_4A_5A	Ant.4	0.246	20.50	15.50	Ant.1	0.888	24.00	20.50	Left Cheek	0.078	0.397	0.474	0.398	0.290	0.158	0.323	0.138	0.872	0.797	0.902	0.770
		0.116	20.50	15.50		0.085	24.00	20.50	Left Tilt	0.037	0.038	0.075	0.276	0.462	0.216	0.192	0.075	0.351	0.267	0.612	0.366
		0.946	20.50	15.50		0.454	24.00	20.50	Right Cheek	0.299	0.203	0.502	0.147	0.172	0.094	0.119	0.051	0.649	0.621	0.725	0.647
		0.283	20.50	15.50		0.076	24.00	20.50	Right Tilt	0.089	0.034	0.123	0.152	0.206	0.111	0.092	0.036	0.275	0.215	0.365	0.270
CA_4A_5A	Ant.5	0.431	24.00	24.00	Ant.0	0.276	25.50	25.50	Left Cheek	0.431	0.276	0.707	0.398	0.290	0.158	0.323	0.138	1.105	1.030	1.135	1.003
		0.100	24.00	24.00		0.162	25.50	25.50	Left Tilt	0.100	0.162	0.262	0.276	0.462	0.216	0.192	0.075	0.538	0.454	0.799	0.553
		0.216	24.00	24.00		0.212	25.50	25.50	Right Cheek	0.216	0.212	0.428	0.147	0.172	0.094	0.119	0.051	0.575	0.547	0.651	0.573
		0.043	24.00	24.00		0.128	25.50	25.50	Right Tilt	0.043	0.128	0.171	0.152	0.206	0.111	0.092	0.036	0.323	0.263	0.413	0.318
CA_4A_5A	Ant.5	0.431	24.00	24.00	Ant.1	0.888	24.00	20.50	Left Cheek	0.431	0.397	0.828	0.398	0.290	0.158	0.323	0.138	1.226	1.151	1.256	1.124
		0.100	24.00	24.00		0.085	24.00	20.50	Left Tilt	0.100	0.038	0.138	0.276	0.462	0.216	0.192	0.075	0.414	0.330	0.675	0.429
		0.216	24.00	24.00		0.454	24.00	20.50	Right Cheek	0.216	0.203	0.419	0.147	0.172	0.094	0.119	0.051	0.566	0.538	0.642	0.564

		0.043	24.00	24.00		0.076	24.00	20.50	Right Tilt	0.043	0.034	0.077	0.152	0.206	0.111	0.092	0.036	0.229	0.169	0.319	0.224
CA_4A_7A	Ant.3	0.333	25.50	25.50	Ant.2	0.477	17.00	14.50	Left Cheek	0.333	0.268	0.601	0.398	0.290	0.158	0.323	0.138	0.999	0.924	1.029	0.897
		0.083	25.50	25.50		0.455	17.00	14.50	Left Tilt	0.083	0.256	0.339	0.276	0.462	0.216	0.192	0.075	0.615	0.531	0.876	0.630
		0.264	25.50	25.50		1.077	17.00	14.50	Right Cheek	0.264	0.606	0.870	0.147	0.172	0.094	0.119	0.051	1.017	0.989	1.093	1.015
		0.066	25.50	25.50		0.794	17.00	14.50	Right Tilt	0.066	0.446	0.512	0.152	0.206	0.111	0.092	0.036	0.664	0.604	0.754	0.659
CA_4A_7A	Ant.4	0.246	20.50	15.50	Ant.2	0.477	17.00	14.50	Left Cheek	0.078	0.268	0.346	0.398	0.290	0.158	0.323	0.138	0.744	0.669	0.774	0.642
		0.116	20.50	15.50		0.455	17.00	14.50	Left Tilt	0.037	0.256	0.293	0.276	0.462	0.216	0.192	0.075	0.569	0.485	0.830	0.584
		0.946	20.50	15.50		1.077	17.00	14.50	Right Cheek	0.299	0.606	0.905	0.147	0.172	0.094	0.119	0.051	1.052	1.024	1.128	1.050
		0.283	20.50	15.50		0.794	17.00	14.50	Right Tilt	0.089	0.446	0.536	0.152	0.206	0.111	0.092	0.036	0.688	0.628	0.778	0.683
CA_4A_7A	Ant.5	0.431	24.00	24.00	Ant.2	0.477	17.00	14.50	Left Cheek	0.431	0.268	0.699	0.398	0.290	0.158	0.323	0.138	1.097	1.022	1.127	0.995
		0.100	24.00	24.00		0.455	17.00	14.50	Left Tilt	0.100	0.256	0.356	0.276	0.462	0.216	0.192	0.075	0.632	0.548	0.893	0.647
		0.216	24.00	24.00		1.077	17.00	14.50	Right Cheek	0.216	0.606	0.822	0.147	0.172	0.094	0.119	0.051	0.969	0.941	1.045	0.967
		0.043	24.00	24.00		0.794	17.00	14.50	Right Tilt	0.043	0.446	0.489	0.152	0.206	0.111	0.092	0.036	0.641	0.581	0.731	0.636
CA_4A_7A	Ant.2	0.552	17.00	14.00	Ant.3	0.248	25.00	25.00	Left Cheek	0.277	0.248	0.525	0.398	0.290	0.158	0.323	0.138	0.923	0.848	0.953	0.821
		0.635	17.00	14.00		0.148	25.00	25.00	Left Tilt	0.318	0.148	0.466	0.276	0.462	0.216	0.192	0.075	0.742	0.658	1.003	0.757
		0.943	17.00	14.00		0.211	25.00	25.00	Right Cheek	0.473	0.211	0.684	0.147	0.172	0.094	0.119	0.051	0.831	0.803	0.907	0.829
		0.765	17.00	14.00		0.123	25.00	25.00	Right Tilt	0.383	0.123	0.506	0.152	0.206	0.111	0.092	0.036	0.658	0.598	0.748	0.653
CA_4A_7A	Ant.4	0.246	20.50	15.50	Ant.3	0.248	25.00	25.00	Left Cheek	0.078	0.248	0.326	0.398	0.290	0.158	0.323	0.138	0.724	0.649	0.754	0.622
		0.116	20.50	15.50		0.148	25.00	25.00	Left Tilt	0.037	0.148	0.185	0.276	0.462	0.216	0.192	0.075	0.461	0.377	0.722	0.476
		0.946	20.50	15.50		0.211	25.00	25.00	Right Cheek	0.299	0.211	0.510	0.147	0.172	0.094	0.119	0.051	0.657	0.629	0.733	0.655
		0.283	20.50	15.50		0.123	25.00	25.00	Right Tilt	0.089	0.123	0.212	0.152	0.206	0.111	0.092	0.036	0.364	0.304	0.454	0.359
CA_4A_7A	Ant.5	0.431	24.00	24.00	Ant.3	0.248	25.00	25.00	Left Cheek	0.431	0.248	0.679	0.398	0.290	0.158	0.323	0.138	1.077	1.002	1.107	0.975
		0.100	24.00	24.00		0.148	25.00	25.00	Left Tilt	0.100	0.148	0.248	0.276	0.462	0.216	0.192	0.075	0.524	0.440	0.785	0.539
		0.216	24.00	24.00		0.211	25.00	25.00	Right Cheek	0.216	0.211	0.427	0.147	0.172	0.094	0.119	0.051	0.574	0.546	0.650	0.572
		0.043	24.00	24.00		0.123	25.00	25.00	Right Tilt	0.043	0.123	0.166	0.152	0.206	0.111	0.092	0.036	0.318	0.258	0.408	0.313
CA_4A_7A	Ant.2	0.552	17.00	14.00	Ant.4	0.250	17.00	14.00	Left Cheek	0.277	0.125	0.402	0.398	0.290	0.158	0.323	0.138	0.800	0.725	0.830	0.698
		0.635	17.00	14.00		0.175	17.00	14.00	Left Tilt	0.318	0.088	0.406	0.276	0.462	0.216	0.192	0.075	0.682	0.598	0.943	0.697
		0.943	17.00	14.00		0.798	17.00	14.00	Right Cheek	0.473	0.400	0.873	0.147	0.172	0.094	0.119	0.051	1.020	0.992	1.096	1.018
		0.765	17.00	14.00		0.369	17.00	14.00	Right Tilt	0.383	0.185	0.568	0.152	0.206	0.111	0.092	0.036	0.720	0.660	0.810	0.715
CA_4A_7A	Ant.3	0.333	25.50	25.50	Ant.4	0.250	17.00	14.00	Left Cheek	0.333	0.125	0.458	0.398	0.290	0.158	0.323	0.138	0.856	0.781	0.886	0.754
		0.083	25.50	25.50		0.175	17.00	14.00	Left Tilt	0.083	0.088	0.171	0.276	0.462	0.216	0.192	0.075	0.447	0.363	0.708	0.462
		0.264	25.50	25.50		0.798	17.00	14.00	Right Cheek	0.264	0.400	0.664	0.147	0.172	0.094	0.119	0.051	0.811	0.783	0.887	0.809
		0.066	25.50	25.50		0.369	17.00	14.00	Right Tilt	0.066	0.185	0.251	0.152	0.206	0.111	0.092	0.036	0.403	0.343	0.493	0.398
CA_4A_7A	Ant.5	0.431	24.00	24.00	Ant.4	0.250	17.00	14.00	Left Cheek	0.431	0.125	0.556	0.398	0.290	0.158	0.323	0.138	0.954	0.879	0.984	0.852
		0.100	24.00	24.00		0.175	17.00	14.00	Left Tilt	0.100	0.088	0.188	0.276	0.462	0.216	0.192	0.075	0.464	0.380	0.725	0.479
		0.216	24.00	24.00		0.798	17.00	14.00	Right Cheek	0.216	0.400	0.616	0.147	0.172	0.094	0.119	0.051	0.763	0.735	0.839	0.761
		0.043	24.00	24.00		0.369	17.00	14.00	Right Tilt	0.043	0.185	0.228	0.152	0.206	0.111	0.092	0.036	0.380	0.320	0.470	0.375
CA_4A_7A	Ant.2	0.552	17.00	14.00	Ant.5	0.795	21.00	18.00	Left Cheek	0.277	0.398	0.675	0.398	0.290	0.158	0.323	0.138	1.073	0.998	1.103	0.971
		0.635	17.00	14.00		0.310	21.00	18.00	Left Tilt	0.318	0.155	0.474	0.276	0.462	0.216	0.192	0.075	0.750	0.666	1.011	0.765
		0.943	17.00	14.00		0.669	21.00	18.00	Right Cheek	0.473	0.335	0.808	0.147	0.172	0.094	0.119	0.051	0.955	0.927	1.031	0.953
		0.765	17.00	14.00		0.151	21.00	18.00	Right Tilt	0.383	0.076	0.459	0.152	0.206	0.111	0.092	0.036	0.611	0.551	0.701	0.606
CA_4A_7A	Ant.3	0.333	25.50	25.50	Ant.5	0.795	21.00	18.00	Left Cheek	0.333	0.398	0.731	0.398	0.290	0.158	0.323	0.138	1.129	1.054	1.159	1.027
		0.083	25.50	25.50		0.310	21.00	18.00	Left Tilt	0.083	0.155	0.238	0.276	0.462	0.216	0.192	0.075	0.514	0.430	0.775	0.529

		0.264	25.50	25.50		0.669	21.00	18.00	Right Cheek	0.264	0.335	0.599	0.147	0.172	0.094	0.119	0.051	0.746	0.718	0.822	0.744
		0.066	25.50	25.50		0.151	21.00	18.00	Right Tilt	0.066	0.076	0.142	0.152	0.206	0.111	0.092	0.036	0.294	0.234	0.384	0.289
CA_4A_7A	Ant.4	0.246	20.50	15.50	Ant.5	0.795	21.00	18.00	Left Cheek	0.078	0.398	0.476	0.398	0.290	0.158	0.323	0.138	0.874	0.799	0.904	0.772
		0.116	20.50	15.50		0.310	21.00	18.00	Left Tilt	0.037	0.155	0.192	0.276	0.462	0.216	0.192	0.075	0.468	0.384	0.729	0.483
		0.946	20.50	15.50		0.669	21.00	18.00	Right Cheek	0.299	0.335	0.634	0.147	0.172	0.094	0.119	0.051	0.781	0.753	0.857	0.779
		0.283	20.50	15.50		0.151	21.00	18.00	Right Tilt	0.089	0.076	0.165	0.152	0.206	0.111	0.092	0.036	0.317	0.257	0.407	0.312

Note:

1: The simultaneous transmission combinations of the multiple antennas contain combinations of two antennas, so only the worst simultaneous transmission combinations was shown in this table.

2: The highest Summed 1g SAR is 1.256 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

13.2.13 Body-Worn Simultaneous Transmission SAR Evaluation for UL_CA and WLAN and BT

Band	LTE Antenna	4G Band1		UL_CA	NR Antenna	4G Band2		UL_CA	Position	Stand alone SAR								SUM SAR			
		LTE SAR	LTE Max Power	LTE Max Power		LTE SAR	LTE Max Power	LTE Max Power		LTE Band 1 SAR	LTE Band2 SAR	1	2	3	4	5	6	1+2	1+5	1+3+6	1+4+6
				DSI2				DSI2				LTE CA (Band1 +Band2)	2.4GWIFI Max.	5GWIFI Max.	6GWIFI Max.	Bluetooth Max.	Bluetooth Max.				
												DSI2	Level4	Level4	Level4	LowPower1	LowPower2				
CA_2A_4A	Ant.3	0.143	22.00	20.00	Ant.2	0.798	25.50	24.50	Front Side 15mm	0.090	0.634	0.724	0.036	0.045	0.022	0.016	0.016	0.760	0.740	0.785	0.762
		0.203	22.00	20.00		1.080	25.50	24.50	Back Side 15mm	0.128	0.858	0.986	0.055	0.084	0.036	0.092	0.092	1.041	1.078	1.162	1.114
CA_2A_4A	Ant.4	0.079	24.50	23.50	Ant.2	0.798	25.50	24.50	Front Side 15mm	0.063	0.634	0.697	0.036	0.045	0.022	0.016	0.016	0.733	0.713	0.758	0.735
		0.101	24.50	23.50		1.080	25.50	24.50	Back Side 15mm	0.080	0.858	0.938	0.055	0.084	0.036	0.092	0.092	0.993	1.030	1.114	1.066
CA_2A_4A	Ant.5	0.042	21.50	21.50	Ant.2	0.798	25.50	24.50	Front Side 15mm	0.042	0.634	0.676	0.036	0.045	0.022	0.016	0.016	0.712	0.692	0.737	0.714
		0.064	21.50	21.50		1.080	25.50	24.50	Back Side 15mm	0.064	0.858	0.922	0.055	0.084	0.036	0.092	0.092	0.977	1.014	1.098	1.050
CA_2A_4A	Ant.2	0.309	23.50	23.50	Ant.3	0.177	22.00	19.50	Front Side 15mm	0.309	0.100	0.409	0.036	0.045	0.022	0.016	0.016	0.445	0.425	0.470	0.447
		0.395	23.50	23.50		0.231	22.00	19.50	Back Side 15mm	0.395	0.130	0.525	0.055	0.084	0.036	0.092	0.092	0.580	0.617	0.701	0.653
CA_2A_4A	Ant.4	0.079	24.50	23.50	Ant.3	0.177	22.00	19.50	Front Side 15mm	0.063	0.100	0.162	0.036	0.045	0.022	0.016	0.016	0.198	0.178	0.223	0.200
		0.101	24.50	23.50		0.231	22.00	19.50	Back Side 15mm	0.080	0.130	0.210	0.055	0.084	0.036	0.092	0.092	0.265	0.302	0.386	0.338
CA_2A_4A	Ant.5	0.042	21.50	21.50	Ant.3	0.177	22.00	19.50	Front Side 15mm	0.042	0.100	0.142	0.036	0.045	0.022	0.016	0.016	0.178	0.158	0.203	0.180
		0.064	21.50	21.50		0.231	22.00	19.50	Back Side 15mm	0.064	0.130	0.194	0.055	0.084	0.036	0.092	0.092	0.249	0.286	0.370	0.322
CA_2A_4A	Ant.2	0.309	23.50	23.50	Ant.4	0.156	22.50	20.00	Front Side 15mm	0.309	0.088	0.397	0.036	0.045	0.022	0.016	0.016	0.433	0.413	0.458	0.435
		0.395	23.50	23.50		0.183	22.50	20.00	Back Side 15mm	0.395	0.103	0.498	0.055	0.084	0.036	0.092	0.092	0.553	0.590	0.674	0.626
CA_2A_4A	Ant.3	0.143	22.00	20.00	Ant.4	0.156	22.50	20.00	Front Side 15mm	0.090	0.088	0.178	0.036	0.045	0.022	0.016	0.016	0.214	0.194	0.239	0.216
		0.203	22.00	20.00		0.183	22.50	20.00	Back Side 15mm	0.128	0.103	0.231	0.055	0.084	0.036	0.092	0.092	0.286	0.323	0.407	0.359
CA_2A_4A	Ant.5	0.042	21.50	21.50	Ant.4	0.156	22.50	20.00	Front Side 15mm	0.042	0.088	0.130	0.036	0.045	0.022	0.016	0.016	0.166	0.146	0.191	0.168
		0.064	21.50	21.50		0.183	22.50	20.00	Back Side 15mm	0.064	0.103	0.167	0.055	0.084	0.036	0.092	0.092	0.222	0.259	0.343	0.295
CA_2A_4A	Ant.2	0.309	23.50	23.50	Ant.5	0.067	24.00	24.00	Front Side 15mm	0.309	0.067	0.376	0.036	0.045	0.022	0.016	0.016	0.412	0.392	0.437	0.414
		0.395	23.50	23.50		0.106	24.00	24.00	Back Side 15mm	0.395	0.106	0.501	0.055	0.084	0.036	0.092	0.092	0.556	0.593	0.677	0.629
CA_2A_4A	Ant.3	0.143	22.00	20.00	Ant.5	0.067	24.00	24.00	Front Side 15mm	0.090	0.067	0.157	0.036	0.045	0.022	0.016	0.016	0.193	0.173	0.218	0.195
		0.203	22.00	20.00		0.106	24.00	24.00	Back Side 15mm	0.128	0.106	0.234	0.055	0.084	0.036	0.092	0.092	0.289	0.326	0.410	0.362
CA_2A_4A	Ant.4	0.079	24.50	23.50	Ant.5	0.067	24.00	24.00	Front Side 15mm	0.063	0.067	0.130	0.036	0.045	0.022	0.016	0.016	0.166	0.146	0.191	0.168
		0.101	24.50	23.50		0.106	24.00	24.00	Back Side 15mm	0.080	0.106	0.186	0.055	0.084	0.036	0.092	0.092	0.241	0.278	0.362	0.314
CA_4A_5A	Ant.2	0.798	25.50	24.50	Ant.0	0.209	25.50	24.50	Front Side 15mm	0.634	0.166	0.800	0.036	0.045	0.022	0.016	0.016	0.836	0.816	0.861	0.838
		1.080	25.50	24.50		0.259	25.50	24.50	Back Side 15mm	0.858	0.206	1.064	0.055	0.084	0.036	0.092	0.092	1.119	1.156	1.240	1.192
CA_4A_5A	Ant.2	0.798	25.50	24.50	Ant.1	0.181	25.00	23.50	Front Side 15mm	0.634	0.128	0.762	0.036	0.045	0.022	0.016	0.016	0.798	0.778	0.823	0.800
		1.080	25.50	24.50		0.200	25.00	23.50	Back Side 15mm	0.858	0.142	0.999	0.055	0.084	0.036	0.092	0.092	1.054	1.091	1.175	1.127
CA_4A_5A	Ant.3	0.177	22.00	19.50	Ant.0	0.209	25.50	24.50	Front Side 15mm	0.100	0.166	0.266	0.036	0.045	0.022	0.016	0.016	0.302	0.282	0.327	0.304
		0.231	22.00	19.50		0.259	25.50	24.50	Back Side 15mm	0.130	0.206	0.336	0.055	0.084	0.036	0.092	0.092	0.391	0.428	0.512	0.464
CA_4A_5A	Ant.3	0.177	22.00	19.50	Ant.1	0.181	25.00	23.50	Front Side 15mm	0.100	0.128	0.228	0.036	0.045	0.022	0.016	0.016	0.264	0.244	0.289	0.266
		0.231	22.00	19.50		0.200	25.00	23.50	Back Side 15mm	0.130	0.142	0.271	0.055	0.084	0.036	0.092	0.092	0.326	0.363	0.447	0.399
CA_4A_5A	Ant.4	0.156	22.50	20.00	Ant.0	0.209	25.50	24.50	Front Side 15mm	0.088	0.166	0.254	0.036	0.045	0.022	0.016	0.016	0.290	0.270	0.315	0.292
		0.183	22.50	20.00		0.259	25.50	24.50	Back Side 15mm	0.103	0.206	0.309	0.055	0.084	0.036	0.092	0.092	0.364	0.401	0.485	0.437

CA_4A_5A	Ant.4	0.156	22.50	20.00	Ant.1	0.181	25.00	23.50	Front Side 15mm	0.088	0.128	0.216	0.036	0.045	0.022	0.016	0.016	0.252	0.232	0.277	0.254
		0.183	22.50	20.00		0.200	25.00	23.50	Back Side 15mm	0.103	0.142	0.244	0.055	0.084	0.036	0.092	0.092	0.299	0.336	0.420	0.372
CA_4A_5A	Ant.5	0.067	24.00	24.00	Ant.0	0.209	25.50	24.50	Front Side 15mm	0.067	0.166	0.233	0.036	0.045	0.022	0.016	0.016	0.269	0.249	0.294	0.271
		0.106	24.00	24.00		0.259	25.50	24.50	Back Side 15mm	0.106	0.206	0.312	0.055	0.084	0.036	0.092	0.092	0.367	0.404	0.488	0.440
CA_4A_5A	Ant.5	0.067	24.00	24.00	Ant.1	0.181	25.00	23.50	Front Side 15mm	0.067	0.128	0.195	0.036	0.045	0.022	0.016	0.016	0.231	0.211	0.256	0.233
		0.106	24.00	24.00		0.200	25.00	23.50	Back Side 15mm	0.106	0.142	0.248	0.055	0.084	0.036	0.092	0.092	0.303	0.340	0.424	0.376
CA_4A_7A	Ant.3	0.177	22.00	19.50	Ant.2	0.460	25.50	23.50	Front Side 15mm	0.100	0.290	0.390	0.036	0.045	0.022	0.016	0.016	0.426	0.406	0.451	0.428
		0.231	22.00	19.50		0.654	25.50	23.50	Back Side 15mm	0.130	0.413	0.543	0.055	0.084	0.036	0.092	0.092	0.598	0.635	0.719	0.671
CA_4A_7A	Ant.4	0.156	22.50	20.00	Ant.2	0.460	25.50	23.50	Front Side 15mm	0.088	0.290	0.378	0.036	0.045	0.022	0.016	0.016	0.414	0.394	0.439	0.416
		0.183	22.50	20.00		0.654	25.50	23.50	Back Side 15mm	0.103	0.413	0.516	0.055	0.084	0.036	0.092	0.092	0.571	0.608	0.692	0.644
CA_4A_7A	Ant.5	0.067	24.00	24.00	Ant.2	0.460	25.50	23.50	Front Side 15mm	0.067	0.290	0.357	0.036	0.045	0.022	0.016	0.016	0.393	0.373	0.418	0.395
		0.106	24.00	24.00		0.654	25.50	23.50	Back Side 15mm	0.106	0.413	0.519	0.055	0.084	0.036	0.092	0.092	0.574	0.611	0.695	0.647
CA_4A_7A	Ant.2	0.798	25.50	24.50	Ant.3	0.197	21.00	19.00	Front Side 15mm	0.634	0.124	0.758	0.036	0.045	0.022	0.016	0.016	0.794	0.774	0.819	0.796
		1.080	25.50	24.50		0.255	21.00	19.00	Back Side 15mm	0.858	0.161	1.019	0.055	0.084	0.036	0.092	0.092	1.074	1.111	1.195	1.147
CA_4A_7A	Ant.4	0.156	22.50	20.00	Ant.3	0.197	21.00	19.00	Front Side 15mm	0.088	0.124	0.212	0.036	0.045	0.022	0.016	0.016	0.248	0.228	0.273	0.250
		0.183	22.50	20.00		0.255	21.00	19.00	Back Side 15mm	0.103	0.161	0.264	0.055	0.084	0.036	0.092	0.092	0.319	0.356	0.440	0.392
CA_4A_7A	Ant.5	0.067	24.00	24.00	Ant.3	0.197	21.00	19.00	Front Side 15mm	0.067	0.124	0.191	0.036	0.045	0.022	0.016	0.016	0.227	0.207	0.252	0.229
		0.106	24.00	24.00		0.255	21.00	19.00	Back Side 15mm	0.106	0.161	0.267	0.055	0.084	0.036	0.092	0.092	0.322	0.359	0.443	0.395
CA_4A_7A	Ant.2	0.798	25.50	24.50	Ant.4	0.083	18.00	18.00	Front Side 15mm	0.634	0.083	0.717	0.036	0.045	0.022	0.016	0.016	0.753	0.733	0.778	0.755
		1.080	25.50	24.50		0.130	18.00	18.00	Back Side 15mm	0.858	0.130	0.988	0.055	0.084	0.036	0.092	0.092	1.043	1.080	1.164	1.116
CA_4A_7A	Ant.3	0.177	22.00	19.50	Ant.4	0.083	18.00	18.00	Front Side 15mm	0.100	0.083	0.183	0.036	0.045	0.022	0.016	0.016	0.219	0.199	0.244	0.221
		0.231	22.00	19.50		0.130	18.00	18.00	Back Side 15mm	0.130	0.130	0.260	0.055	0.084	0.036	0.092	0.092	0.315	0.352	0.436	0.388
CA_4A_7A	Ant.5	0.067	24.00	24.00	Ant.4	0.083	18.00	18.00	Front Side 15mm	0.067	0.083	0.150	0.036	0.045	0.022	0.016	0.016	0.186	0.166	0.211	0.188
		0.106	24.00	24.00		0.130	18.00	18.00	Back Side 15mm	0.106	0.130	0.236	0.055	0.084	0.036	0.092	0.092	0.291	0.328	0.412	0.364
CA_4A_7A	Ant.2	0.798	25.50	24.50	Ant.5	0.076	20.00	16.00	Front Side 15mm	0.634	0.030	0.664	0.036	0.045	0.022	0.016	0.016	0.700	0.680	0.725	0.702
		1.080	25.50	24.50		0.128	20.00	16.00	Back Side 15mm	0.858	0.051	0.909	0.055	0.084	0.036	0.092	0.092	0.964	1.001	1.085	1.037
CA_4A_7A	Ant.3	0.177	22.00	19.50	Ant.5	0.076	20.00	16.00	Front Side 15mm	0.100	0.030	0.130	0.036	0.045	0.022	0.016	0.016	0.166	0.146	0.191	0.168
		0.231	22.00	19.50		0.128	20.00	16.00	Back Side 15mm	0.130	0.051	0.181	0.055	0.084	0.036	0.092	0.092	0.236	0.273	0.357	0.309
CA_4A_7A	Ant.4	0.156	22.50	20.00	Ant.5	0.076	20.00	16.00	Front Side 15mm	0.088	0.030	0.118	0.036	0.045	0.022	0.016	0.016	0.154	0.134	0.179	0.156
		0.183	22.50	20.00		0.128	20.00	16.00	Back Side 15mm	0.103	0.051	0.154	0.055	0.084	0.036	0.092	0.092	0.209	0.246	0.330	0.282

Note:

1: The simultaneous transmission combinations of the multiple antennas contain combinations of two antennas, so only the worst simultaneous transmission combinations was shown in this table.

2: The highest Summed 1g SAR is 1.240 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.

13.2.14 Hotspot Simultaneous Transmission SAR Evaluation for UL_CA and WLAN and BT

Band	LTE Antenna	4G Band1		UL_CA	NR Antenna	4G Band2		UL_CA	Position	Stand alone SAR							SUM SAR		
		LTE SAR	LTE Max Power	LTE Max Power		LTE SAR	LTE Max Power	LTE Max Power		LTE SAR	LTE SAR	1	2	3	4	5			
												LTE CA	2.4GWIFI	5GWIFI	Bluetooth	Bluetooth			
												(Band1+Band2)	Max.	Max.	Max.	Max.	1+2	1+4	1+3+5
DSI5	DSI5	DSI5	Level4	Level4	LowPower1	LowPower2													
CA_2A_4A	Ant.3	0.168	22.00	20.00	Ant.2	0.164	17.00	14.00	Front Side 10mm	0.106	0.082	0.188	0.172	0.062	0.055	0.023	0.360	0.243	0.273
		0.264	22.00	20.00		0.235	17.00	14.00	Back Side 10mm	0.167	0.118	0.284	0.248	0.141	0.085	0.034	0.532	0.369	0.459
		0.000	22.00	20.00		0.063	17.00	14.00	Left Edge 10mm	0.000	0.032	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.059	22.00	20.00		0.000	17.00	14.00	Right Edge 10mm	0.037	0.000	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.000	22.00	20.00		0.303	17.00	14.00	Top Edge 10mm	0.000	0.152	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.462	22.00	20.00		0.000	17.00	14.00	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
CA_2A_4A	Ant.4	0.105	24.50	18.50	Ant.2	0.164	17.00	14.00	Front Side 10mm	0.026	0.082	0.109	0.172	0.062	0.055	0.023	0.281	0.164	0.194
		0.130	24.50	18.50		0.235	17.00	14.00	Back Side 10mm	0.033	0.118	0.150	0.248	0.141	0.085	0.034	0.398	0.235	0.325
		0.209	24.50	18.50		0.063	17.00	14.00	Left Edge 10mm	0.052	0.032	0.084	0.000	0.000	0.000	0.000	0.084	0.084	0.084
		0.000	24.50	18.50		0.000	17.00	14.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.022	24.50	18.50		0.303	17.00	14.00	Top Edge 10mm	0.006	0.152	0.157	0.141	0.225	0.047	0.018	0.298	0.204	0.400
		0.000	24.50	18.50		0.000	17.00	14.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_2A_4A	Ant.5	0.102	21.50	21.50	Ant.2	0.164	17.00	14.00	Front Side 10mm	0.102	0.082	0.184	0.172	0.062	0.055	0.023	0.356	0.239	0.269
		0.167	21.50	21.50		0.235	17.00	14.00	Back Side 10mm	0.167	0.118	0.285	0.248	0.141	0.085	0.034	0.533	0.370	0.460
		0.000	21.50	21.50		0.063	17.00	14.00	Left Edge 10mm	0.000	0.032	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.225	21.50	21.50		0.000	17.00	14.00	Right Edge 10mm	0.225	0.000	0.225	0.335	0.087	0.141	0.053	0.560	0.366	0.365
		0.000	21.50	21.50		0.303	17.00	14.00	Top Edge 10mm	0.000	0.152	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	21.50	21.50		0.000	17.00	14.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_2A_4A	Ant.2	0.186	19.50	15.50	Ant.3	0.306	22.00	19.50	Front Side 10mm	0.074	0.172	0.246	0.172	0.062	0.055	0.023	0.418	0.301	0.331
		0.254	19.50	15.50		0.436	22.00	19.50	Back Side 10mm	0.101	0.245	0.346	0.248	0.141	0.085	0.034	0.594	0.431	0.521
		0.074	19.50	15.50		0.000	22.00	19.50	Left Edge 10mm	0.029	0.000	0.029	0.000	0.000	0.000	0.000	0.029	0.029	0.029
		0.000	19.50	15.50		0.111	22.00	19.50	Right Edge 10mm	0.000	0.062	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.355	19.50	15.50		0.000	22.00	19.50	Top Edge 10mm	0.141	0.000	0.141	0.141	0.225	0.047	0.018	0.282	0.188	0.384
		0.000	19.50	15.50		0.633	22.00	19.50	Bottom Edge 10mm	0.000	0.356	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
CA_2A_4A	Ant.4	0.105	24.50	18.50	Ant.3	0.306	22.00	19.50	Front Side 10mm	0.026	0.172	0.198	0.172	0.062	0.055	0.023	0.370	0.253	0.283
		0.130	24.50	18.50		0.436	22.00	19.50	Back Side 10mm	0.033	0.245	0.278	0.248	0.141	0.085	0.034	0.526	0.363	0.453
		0.209	24.50	18.50		0.000	22.00	19.50	Left Edge 10mm	0.052	0.000	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.000	24.50	18.50		0.111	22.00	19.50	Right Edge 10mm	0.000	0.062	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.022	24.50	18.50		0.000	22.00	19.50	Top Edge 10mm	0.006	0.000	0.006	0.141	0.225	0.047	0.018	0.147	0.053	0.249
		0.000	24.50	18.50		0.633	22.00	19.50	Bottom Edge 10mm	0.000	0.356	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
CA_2A_4A	Ant.5	0.102	21.50	21.50	Ant.3	0.306	22.00	19.50	Front Side 10mm	0.102	0.172	0.274	0.172	0.062	0.055	0.023	0.446	0.329	0.359
		0.167	21.50	21.50		0.436	22.00	19.50	Back Side 10mm	0.167	0.245	0.412	0.248	0.141	0.085	0.034	0.660	0.497	0.587
		0.000	21.50	21.50		0.000	22.00	19.50	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.225	21.50	21.50		0.111	22.00	19.50	Right Edge 10mm	0.225	0.062	0.287	0.335	0.087	0.141	0.053	0.622	0.428	0.427
		0.000	21.50	21.50		0.000	22.00	19.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	21.50	21.50		0.633	22.00	19.50	Bottom Edge 10mm	0.000	0.356	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356

CA_2A_4A	Ant.2	0.186	19.50	15.50	Ant.4	0.209	20.50	15.50	Front Side 10mm	0.074	0.066	0.140	0.172	0.062	0.055	0.023	0.312	0.195	0.225
		0.254	19.50	15.50		0.259	20.50	15.50	Back Side 10mm	0.101	0.082	0.183	0.248	0.141	0.085	0.034	0.431	0.268	0.358
		0.074	19.50	15.50		0.414	20.50	15.50	Left Edge 10mm	0.029	0.131	0.160	0.000	0.000	0.000	0.000	0.160	0.160	0.160
		0.000	19.50	15.50		0.000	20.50	15.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.355	19.50	15.50		0.042	20.50	15.50	Top Edge 10mm	0.141	0.013	0.155	0.141	0.225	0.047	0.018	0.296	0.202	0.398
		0.000	19.50	15.50		0.000	20.50	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_2A_4A	Ant.3	0.168	22.00	20.00	Ant.4	0.209	20.50	15.50	Front Side 10mm	0.106	0.066	0.172	0.172	0.062	0.055	0.023	0.344	0.227	0.257
		0.264	22.00	20.00		0.259	20.50	15.50	Back Side 10mm	0.167	0.082	0.248	0.248	0.141	0.085	0.034	0.496	0.333	0.423
		0.000	22.00	20.00		0.414	20.50	15.50	Left Edge 10mm	0.000	0.131	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.059	22.00	20.00		0.000	20.50	15.50	Right Edge 10mm	0.037	0.000	0.037	0.335	0.087	0.141	0.053	0.372	0.178	0.177
		0.000	22.00	20.00		0.042	20.50	15.50	Top Edge 10mm	0.000	0.013	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.462	22.00	20.00		0.000	20.50	15.50	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
CA_2A_4A	Ant.5	0.102	21.50	21.50	Ant.4	0.209	20.50	15.50	Front Side 10mm	0.102	0.066	0.168	0.172	0.062	0.055	0.023	0.340	0.223	0.253
		0.167	21.50	21.50		0.259	20.50	15.50	Back Side 10mm	0.167	0.082	0.249	0.248	0.141	0.085	0.034	0.497	0.334	0.424
		0.000	21.50	21.50		0.414	20.50	15.50	Left Edge 10mm	0.000	0.131	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.225	21.50	21.50		0.000	20.50	15.50	Right Edge 10mm	0.225	0.000	0.225	0.335	0.087	0.141	0.053	0.560	0.366	0.365
		0.000	21.50	21.50		0.042	20.50	15.50	Top Edge 10mm	0.000	0.013	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	21.50	21.50		0.000	20.50	15.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_2A_4A	Ant.2	0.186	19.50	15.50	Ant.5	0.143	24.00	24.00	Front Side 10mm	0.074	0.143	0.217	0.172	0.062	0.055	0.023	0.389	0.272	0.302
		0.254	19.50	15.50		0.225	24.00	24.00	Back Side 10mm	0.101	0.225	0.326	0.248	0.141	0.085	0.034	0.574	0.411	0.501
		0.074	19.50	15.50		0.000	24.00	24.00	Left Edge 10mm	0.029	0.000	0.029	0.000	0.000	0.000	0.000	0.029	0.029	0.029
		0.000	19.50	15.50		0.321	24.00	24.00	Right Edge 10mm	0.000	0.321	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.355	19.50	15.50		0.000	24.00	24.00	Top Edge 10mm	0.141	0.000	0.141	0.141	0.225	0.047	0.018	0.282	0.188	0.384
		0.000	19.50	15.50		0.000	24.00	24.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_2A_4A	Ant.3	0.168	22.00	20.00	Ant.5	0.143	24.00	24.00	Front Side 10mm	0.106	0.143	0.249	0.172	0.062	0.055	0.023	0.421	0.304	0.334
		0.264	22.00	20.00		0.225	24.00	24.00	Back Side 10mm	0.167	0.225	0.392	0.248	0.141	0.085	0.034	0.640	0.477	0.567
		0.000	22.00	20.00		0.000	24.00	24.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.059	22.00	20.00		0.321	24.00	24.00	Right Edge 10mm	0.037	0.321	0.358	0.335	0.087	0.141	0.053	0.693	0.499	0.498
		0.000	22.00	20.00		0.000	24.00	24.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.462	22.00	20.00		0.000	24.00	24.00	Bottom Edge 10mm	0.292	0.000	0.292	0.000	0.000	0.000	0.000	0.292	0.292	0.292
CA_2A_4A	Ant.4	0.105	24.50	18.50	Ant.5	0.143	24.00	24.00	Front Side 10mm	0.026	0.143	0.169	0.172	0.062	0.055	0.023	0.341	0.224	0.254
		0.130	24.50	18.50		0.225	24.00	24.00	Back Side 10mm	0.033	0.225	0.258	0.248	0.141	0.085	0.034	0.506	0.343	0.433
		0.209	24.50	18.50		0.000	24.00	24.00	Left Edge 10mm	0.052	0.000	0.052	0.000	0.000	0.000	0.000	0.052	0.052	0.052
		0.000	24.50	18.50		0.321	24.00	24.00	Right Edge 10mm	0.000	0.321	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.022	24.50	18.50		0.000	24.00	24.00	Top Edge 10mm	0.006	0.000	0.006	0.141	0.225	0.047	0.018	0.147	0.053	0.249
		0.000	24.50	18.50		0.000	24.00	24.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_5A	Ant.2	0.164	17.00	14.00	Ant.0	0.336	25.50	24.50	Front Side 10mm	0.082	0.267	0.349	0.172	0.062	0.055	0.023	0.521	0.404	0.434
		0.235	17.00	14.00		0.487	25.50	24.50	Back Side 10mm	0.118	0.387	0.505	0.248	0.141	0.085	0.034	0.753	0.590	0.680
		0.063	17.00	14.00		0.209	25.50	24.50	Left Edge 10mm	0.032	0.166	0.198	0.000	0.000	0.000	0.000	0.198	0.198	0.198
		0.000	17.00	14.00		0.158	25.50	24.50	Right Edge 10mm	0.000	0.126	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.303	17.00	14.00		0.000	25.50	24.50	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.257	25.50	24.50	Bottom Edge 10mm	0.000	0.204	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
CA_4A_5A	Ant.2	0.164	17.00	14.00	Ant.1	0.578	24.00	20.50	Front Side 10mm	0.082	0.258	0.340	0.172	0.062	0.055	0.023	0.512	0.395	0.425

		0.235	17.00	14.00		0.655	24.00	20.50	Back Side 10mm	0.118	0.293	0.410	0.248	0.141	0.085	0.034	0.658	0.495	0.585
		0.063	17.00	14.00		0.923	24.00	20.50	Left Edge 10mm	0.032	0.412	0.444	0.000	0.000	0.000	0.000	0.444	0.444	0.444
		0.000	17.00	14.00		0.000	24.00	20.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.303	17.00	14.00		0.003	24.00	20.50	Top Edge 10mm	0.152	0.001	0.153	0.141	0.225	0.047	0.018	0.294	0.200	0.396
		0.000	17.00	14.00		0.000	24.00	20.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_5A	Ant.3	0.306	22.00	19.50	Ant.0	0.336	25.50	24.50	Front Side 10mm	0.172	0.267	0.439	0.172	0.062	0.055	0.023	0.611	0.494	0.524
		0.436	22.00	19.50		0.487	25.50	24.50	Back Side 10mm	0.245	0.387	0.632	0.248	0.141	0.085	0.034	0.880	0.717	0.807
		0.000	22.00	19.50		0.209	25.50	24.50	Left Edge 10mm	0.000	0.166	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.111	22.00	19.50		0.158	25.50	24.50	Right Edge 10mm	0.062	0.126	0.188	0.335	0.087	0.141	0.053	0.523	0.329	0.328
		0.000	22.00	19.50		0.000	25.50	24.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.633	22.00	19.50		0.257	25.50	24.50	Bottom Edge 10mm	0.356	0.204	0.560	0.000	0.000	0.000	0.000	0.560	0.560	0.560
CA_4A_5A	Ant.3	0.306	22.00	19.50	Ant.1	0.578	24.00	20.50	Front Side 10mm	0.172	0.258	0.430	0.172	0.062	0.055	0.023	0.602	0.485	0.515
		0.436	22.00	19.50		0.655	24.00	20.50	Back Side 10mm	0.245	0.293	0.538	0.248	0.141	0.085	0.034	0.786	0.623	0.713
		0.000	22.00	19.50		0.923	24.00	20.50	Left Edge 10mm	0.000	0.412	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.111	22.00	19.50		0.000	24.00	20.50	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.003	24.00	20.50	Top Edge 10mm	0.000	0.001	0.001	0.141	0.225	0.047	0.018	0.142	0.048	0.244
		0.633	22.00	19.50		0.000	24.00	20.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
CA_4A_5A	Ant.4	0.209	20.50	15.50	Ant.0	0.336	25.50	24.50	Front Side 10mm	0.066	0.267	0.333	0.172	0.062	0.055	0.023	0.505	0.388	0.418
		0.259	20.50	15.50		0.487	25.50	24.50	Back Side 10mm	0.082	0.387	0.469	0.248	0.141	0.085	0.034	0.717	0.554	0.644
		0.414	20.50	15.50		0.209	25.50	24.50	Left Edge 10mm	0.131	0.166	0.297	0.000	0.000	0.000	0.000	0.297	0.297	0.297
		0.000	20.50	15.50		0.158	25.50	24.50	Right Edge 10mm	0.000	0.126	0.126	0.335	0.087	0.141	0.053	0.461	0.267	0.266
		0.042	20.50	15.50		0.000	25.50	24.50	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.257	25.50	24.50	Bottom Edge 10mm	0.000	0.204	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
CA_4A_5A	Ant.4	0.209	20.50	15.50	Ant.1	0.578	24.00	20.50	Front Side 10mm	0.066	0.258	0.324	0.172	0.062	0.055	0.023	0.496	0.379	0.409
		0.259	20.50	15.50		0.655	24.00	20.50	Back Side 10mm	0.082	0.293	0.374	0.248	0.141	0.085	0.034	0.622	0.459	0.549
		0.414	20.50	15.50		0.923	24.00	20.50	Left Edge 10mm	0.131	0.412	0.543	0.000	0.000	0.000	0.000	0.543	0.543	0.543
		0.000	20.50	15.50		0.000	24.00	20.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.042	20.50	15.50		0.003	24.00	20.50	Top Edge 10mm	0.013	0.001	0.015	0.141	0.225	0.047	0.018	0.156	0.062	0.258
		0.000	20.50	15.50		0.000	24.00	20.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_5A	Ant.5	0.143	24.00	24.00	Ant.0	0.336	25.50	24.50	Front Side 10mm	0.143	0.267	0.410	0.172	0.062	0.055	0.023	0.582	0.465	0.495
		0.225	24.00	24.00		0.487	25.50	24.50	Back Side 10mm	0.225	0.387	0.612	0.248	0.141	0.085	0.034	0.860	0.697	0.787
		0.000	24.00	24.00		0.209	25.50	24.50	Left Edge 10mm	0.000	0.166	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.321	24.00	24.00		0.158	25.50	24.50	Right Edge 10mm	0.321	0.126	0.447	0.335	0.087	0.141	0.053	0.782	0.588	0.587
		0.000	24.00	24.00		0.000	25.50	24.50	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.257	25.50	24.50	Bottom Edge 10mm	0.000	0.204	0.204	0.000	0.000	0.000	0.000	0.204	0.204	0.204
CA_4A_5A	Ant.5	0.143	24.00	24.00	Ant.1	0.578	24.00	20.50	Front Side 10mm	0.143	0.258	0.401	0.172	0.062	0.055	0.023	0.573	0.456	0.486
		0.225	24.00	24.00		0.655	24.00	20.50	Back Side 10mm	0.225	0.293	0.518	0.248	0.141	0.085	0.034	0.766	0.603	0.693
		0.000	24.00	24.00		0.923	24.00	20.50	Left Edge 10mm	0.000	0.412	0.412	0.000	0.000	0.000	0.000	0.412	0.412	0.412
		0.321	24.00	24.00		0.000	24.00	20.50	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.003	24.00	20.50	Top Edge 10mm	0.000	0.001	0.001	0.141	0.225	0.047	0.018	0.142	0.048	0.244
		0.000	24.00	24.00		0.000	24.00	20.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_7A	Ant.3	0.306	22.00	19.50	Ant.2	0.127	17.00	14.50	Front Side 10mm	0.172	0.071	0.243	0.172	0.062	0.055	0.023	0.415	0.298	0.328
		0.436	22.00	19.50		0.202	17.00	14.50	Back Side 10mm	0.245	0.114	0.359	0.248	0.141	0.085	0.034	0.607	0.444	0.534

		0.000	22.00	19.50		0.063	17.00	14.50	Left Edge 10mm	0.000	0.035	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.111	22.00	19.50		0.000	17.00	14.50	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.169	17.00	14.50	Top Edge 10mm	0.000	0.095	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.633	22.00	19.50		0.000	17.00	14.50	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
CA_4A_7A	Ant.4	0.209	20.50	15.50	Ant.2	0.127	17.00	14.50	Front Side 10mm	0.066	0.071	0.138	0.172	0.062	0.055	0.023	0.310	0.193	0.223
		0.259	20.50	15.50		0.202	17.00	14.50	Back Side 10mm	0.082	0.114	0.195	0.248	0.141	0.085	0.034	0.443	0.280	0.370
		0.414	20.50	15.50		0.063	17.00	14.50	Left Edge 10mm	0.131	0.035	0.166	0.000	0.000	0.000	0.000	0.166	0.166	0.166
		0.000	20.50	15.50		0.000	17.00	14.50	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.042	20.50	15.50		0.169	17.00	14.50	Top Edge 10mm	0.013	0.095	0.108	0.141	0.225	0.047	0.018	0.249	0.155	0.351
		0.000	20.50	15.50		0.000	17.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_7A	Ant.5	0.143	24.00	24.00	Ant.2	0.127	17.00	14.50	Front Side 10mm	0.143	0.071	0.214	0.172	0.062	0.055	0.023	0.386	0.269	0.299
		0.225	24.00	24.00		0.202	17.00	14.50	Back Side 10mm	0.225	0.114	0.339	0.248	0.141	0.085	0.034	0.587	0.424	0.514
		0.000	24.00	24.00		0.063	17.00	14.50	Left Edge 10mm	0.000	0.035	0.035	0.000	0.000	0.000	0.000	0.035	0.035	0.035
		0.321	24.00	24.00		0.000	17.00	14.50	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.169	17.00	14.50	Top Edge 10mm	0.000	0.095	0.095	0.141	0.225	0.047	0.018	0.236	0.142	0.338
		0.000	24.00	24.00		0.000	17.00	14.50	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_7A	Ant.2	0.164	17.00	14.00	Ant.3	0.380	21.00	19.00	Front Side 10mm	0.082	0.240	0.322	0.172	0.062	0.055	0.023	0.494	0.377	0.407
		0.235	17.00	14.00		0.463	21.00	19.00	Back Side 10mm	0.118	0.292	0.410	0.248	0.141	0.085	0.034	0.658	0.495	0.585
		0.063	17.00	14.00		0.000	21.00	19.00	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.051	21.00	19.00	Right Edge 10mm	0.000	0.032	0.032	0.335	0.087	0.141	0.053	0.367	0.173	0.172
		0.303	17.00	14.00		0.000	21.00	19.00	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.461	21.00	19.00	Bottom Edge 10mm	0.000	0.291	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
CA_4A_7A	Ant.4	0.209	20.50	15.50	Ant.3	0.380	21.00	19.00	Front Side 10mm	0.066	0.240	0.306	0.172	0.062	0.055	0.023	0.478	0.361	0.391
		0.259	20.50	15.50		0.463	21.00	19.00	Back Side 10mm	0.082	0.292	0.374	0.248	0.141	0.085	0.034	0.622	0.459	0.549
		0.414	20.50	15.50		0.000	21.00	19.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.051	21.00	19.00	Right Edge 10mm	0.000	0.032	0.032	0.335	0.087	0.141	0.053	0.367	0.173	0.172
		0.042	20.50	15.50		0.000	21.00	19.00	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.461	21.00	19.00	Bottom Edge 10mm	0.000	0.291	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
CA_4A_7A	Ant.5	0.143	24.00	24.00	Ant.3	0.380	21.00	19.00	Front Side 10mm	0.143	0.240	0.383	0.172	0.062	0.055	0.023	0.555	0.438	0.468
		0.225	24.00	24.00		0.463	21.00	19.00	Back Side 10mm	0.225	0.292	0.517	0.248	0.141	0.085	0.034	0.765	0.602	0.692
		0.000	24.00	24.00		0.000	21.00	19.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.321	24.00	24.00		0.051	21.00	19.00	Right Edge 10mm	0.321	0.032	0.353	0.335	0.087	0.141	0.053	0.688	0.494	0.493
		0.000	24.00	24.00		0.000	21.00	19.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.000	24.00	24.00		0.461	21.00	19.00	Bottom Edge 10mm	0.000	0.291	0.291	0.000	0.000	0.000	0.000	0.291	0.291	0.291
CA_4A_7A	Ant.2	0.164	17.00	14.00	Ant.4	0.145	17.00	14.00	Front Side 10mm	0.082	0.073	0.155	0.172	0.062	0.055	0.023	0.327	0.210	0.240
		0.235	17.00	14.00		0.239	17.00	14.00	Back Side 10mm	0.118	0.120	0.238	0.248	0.141	0.085	0.034	0.486	0.323	0.413
		0.063	17.00	14.00		0.261	17.00	14.00	Left Edge 10mm	0.032	0.131	0.162	0.000	0.000	0.000	0.000	0.162	0.162	0.162
		0.000	17.00	14.00		0.000	17.00	14.00	Right Edge 10mm	0.000	0.000	0.000	0.335	0.087	0.141	0.053	0.335	0.141	0.140
		0.303	17.00	14.00		0.066	17.00	14.00	Top Edge 10mm	0.152	0.033	0.185	0.141	0.225	0.047	0.018	0.326	0.232	0.428
		0.000	17.00	14.00		0.000	17.00	14.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_7A	Ant.3	0.306	22.00	19.50	Ant.4	0.145	17.00	14.00	Front Side 10mm	0.172	0.073	0.245	0.172	0.062	0.055	0.023	0.417	0.300	0.330
		0.436	22.00	19.50		0.239	17.00	14.00	Back Side 10mm	0.245	0.120	0.365	0.248	0.141	0.085	0.034	0.613	0.450	0.540
		0.000	22.00	19.50		0.261	17.00	14.00	Left Edge 10mm	0.000	0.131	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131

		0.111	22.00	19.50		0.000	17.00	14.00	Right Edge 10mm	0.062	0.000	0.062	0.335	0.087	0.141	0.053	0.397	0.203	0.202
		0.000	22.00	19.50		0.066	17.00	14.00	Top Edge 10mm	0.000	0.033	0.033	0.141	0.225	0.047	0.018	0.174	0.080	0.276
		0.633	22.00	19.50		0.000	17.00	14.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
CA_4A_7A	Ant.5	0.143	24.00	24.00	Ant.4	0.145	17.00	14.00	Front Side 10mm	0.143	0.073	0.216	0.172	0.062	0.055	0.023	0.388	0.271	0.301
		0.225	24.00	24.00		0.239	17.00	14.00	Back Side 10mm	0.225	0.120	0.345	0.248	0.141	0.085	0.034	0.593	0.430	0.520
		0.000	24.00	24.00		0.261	17.00	14.00	Left Edge 10mm	0.000	0.131	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.321	24.00	24.00		0.000	17.00	14.00	Right Edge 10mm	0.321	0.000	0.321	0.335	0.087	0.141	0.053	0.656	0.462	0.461
		0.000	24.00	24.00		0.066	17.00	14.00	Top Edge 10mm	0.000	0.033	0.033	0.141	0.225	0.047	0.018	0.174	0.080	0.276
		0.000	24.00	24.00		0.000	17.00	14.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_7A	Ant.2	0.164	17.00	14.00	Ant.5	0.164	20.00	16.00	Front Side 10mm	0.082	0.065	0.147	0.172	0.062	0.055	0.023	0.319	0.202	0.232
		0.235	17.00	14.00		0.331	20.00	16.00	Back Side 10mm	0.118	0.132	0.250	0.248	0.141	0.085	0.034	0.498	0.335	0.425
		0.063	17.00	14.00		0.000	20.00	16.00	Left Edge 10mm	0.032	0.000	0.032	0.000	0.000	0.000	0.000	0.032	0.032	0.032
		0.000	17.00	14.00		0.408	20.00	16.00	Right Edge 10mm	0.000	0.162	0.162	0.335	0.087	0.141	0.053	0.497	0.303	0.302
		0.303	17.00	14.00		0.000	20.00	16.00	Top Edge 10mm	0.152	0.000	0.152	0.141	0.225	0.047	0.018	0.293	0.199	0.395
		0.000	17.00	14.00		0.000	20.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
CA_4A_7A	Ant.3	0.306	22.00	19.50	Ant.5	0.164	20.00	16.00	Front Side 10mm	0.172	0.065	0.237	0.172	0.062	0.055	0.023	0.409	0.292	0.322
		0.436	22.00	19.50		0.331	20.00	16.00	Back Side 10mm	0.245	0.132	0.377	0.248	0.141	0.085	0.034	0.625	0.462	0.552
		0.000	22.00	19.50		0.000	20.00	16.00	Left Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
		0.111	22.00	19.50		0.408	20.00	16.00	Right Edge 10mm	0.062	0.162	0.225	0.335	0.087	0.141	0.053	0.560	0.366	0.365
		0.000	22.00	19.50		0.000	20.00	16.00	Top Edge 10mm	0.000	0.000	0.000	0.141	0.225	0.047	0.018	0.141	0.047	0.243
		0.633	22.00	19.50		0.000	20.00	16.00	Bottom Edge 10mm	0.356	0.000	0.356	0.000	0.000	0.000	0.000	0.356	0.356	0.356
CA_4A_7A	Ant.4	0.209	20.50	15.50	Ant.5	0.164	20.00	16.00	Front Side 10mm	0.066	0.065	0.131	0.172	0.062	0.055	0.023	0.303	0.186	0.216
		0.259	20.50	15.50		0.331	20.00	16.00	Back Side 10mm	0.082	0.132	0.214	0.248	0.141	0.085	0.034	0.462	0.299	0.389
		0.414	20.50	15.50		0.000	20.00	16.00	Left Edge 10mm	0.131	0.000	0.131	0.000	0.000	0.000	0.000	0.131	0.131	0.131
		0.000	20.50	15.50		0.408	20.00	16.00	Right Edge 10mm	0.000	0.162	0.162	0.335	0.087	0.141	0.053	0.497	0.303	0.302
		0.042	20.50	15.50		0.000	20.00	16.00	Top Edge 10mm	0.013	0.000	0.013	0.141	0.225	0.047	0.018	0.154	0.060	0.256
		0.000	20.50	15.50		0.000	20.00	16.00	Bottom Edge 10mm	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Note:																			
1: The simultaneous transmission combinations of the multiple antennas contain combinations of two antennas, so only the worst simultaneous transmission combinations was shown in this table.																			
2: The highest Summed 1g SAR is 0.880 W/Kg < 1.6 W/kg, so Simultaneous Transmission SAR test is not required.																			

14 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY5	52.8.8.1222	N/A	N/A
Test Software	Speag	DASY8	16.2.2.1588	N/A	N/A
750MHz Validation Dipole	Speag	D750V3	SN: 1208	2024/08/19	2027/08/18
835MHz Validation Dipole	Speag	D835V2	SN: 4d187	2024/05/08	2027/05/07
1750MHz Validation Dipole	Speag	D1750V2	SN: 1130	2024/05/08	2027/05/07
1950MHz Validation Dipole	Speag	D1950V3	SN: 1240	2021/09/13	2024/09/12
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2024/05/07	2027/05/06
2600MHz Validation Dipole	Speag	D2600V2	SN: 1095	2024/05/08	2027/05/07
3500MHz Validation Dipole	Speag	D3500V2	SN: 1129	2024/07/19	2027/07/18
3700MHz Validation Dipole	Speag	D3700V2	SN: 1101	2024/07/18	2027/07/17
3900MHz Validation Dipole	Speag	D3900V2	SN: 1077	2024/07/19	2027/07/18
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2024/05/09	2027/05/08
6.5GHz Validation Dipole	Speag	D6.5GHzV2	SN: 1037	2024/05/28	2027/05/27
Data Acquisition Electronicsr	Speag	DAE4	SN: 1711	2024/03/18	2025/03/17
Data Acquisition Electronicsr	Speag	DAE4	SN: 1710	2024/01/03	2025/01/02
E-Field Probe	Speag	EX3DV4	SN: 3748	2024/04/12	2025/04/11
E-Field Probe	Speag	EX3DV4	SN: 7350	2023/12/13	2024/12/12
E-Field Probe	Speag	EX3DV4	SN: 7510	2024/06/25	2025/06/24
Signal Generator	R&S	SMB100A	177746	2024/04/24	2025/04/23
Power Meter	R&S	NRVD-B2	835843/014	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z4	100381	2024/08/08	2025/08/07
Power Sensor	R&S	NRV-Z2	100211	2024/08/08	2025/08/07
Wireless Communication Test Set	Anritsu	MT8820C	6201502991	2023/11/14	2024/11/13
Wireless Communication Test Set	Anritsu	MT8820C	6201502974	2024/08/01	2025/07/31
Network Analyzer	Agilent	E5071C	MY46103472	2023/11/14	2024/11/13
Thermometer	Elitech	RC-4	EF5238001628	2023/10/09	2024/10/08
Thermometer	Elitech	RC-4HC	EF7239002652	2023/11/17	2024/11/16
Thermometer	Elitech	RC-4	EF5238001629	2023/10/09	2024/10/08
Thermometer	Elitech	RC-4HC	EF7239002655	2023/11/17	2024/11/16
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	Speag	DAK3.5	SN: 1312	N/A	N/A
Phantom	Speag	SAM	SN: 1859	N/A	N/A
Phantom	Speag	SAM	SN: 1576	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A
Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria: 1. There is no physical damage on the dipole; 2. System validation with specific dipole is within 10% of calibrated value; 3. Return-loss in within 20% of calibrated measurement. 4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.					

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAK3.5 Dielectric Probe Kit.

Head Liquid

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2024.09.08	Head	750	21.3	0.91	41.89	0.89	41.94	2.25	-0.12
2024.09.09	Head	750	21.4	0.92	40.71	0.89	41.94	3.37	-2.93
2024.08.27	Head	835	21.3	0.91	42.15	0.90	41.50	1.11	1.57
2024.08.28	Head	835	21.4	0.91	41.31	0.90	41.50	1.11	-0.46
2024.08.29	Head	835	21.2	0.90	40.78	0.90	41.50	0.00	-1.73
2024.08.26	Head	1750	21.3	1.39	39.69	1.37	40.08	1.46	-0.97
2024.08.25	Head	1750	21.4	1.38	39.84	1.37	40.08	0.73	-0.60
2024.08.24	Head	1750	21.2	1.40	39.75	1.37	40.08	2.19	-0.82
2024.08.23	Head	1950	21.1	1.43	39.32	1.40	40.00	2.14	-1.70
2024.08.22	Head	1950	21.2	1.41	39.16	1.40	40.00	0.71	-2.10
2024.08.21	Head	1950	21.3	1.43	39.13	1.40	40.00	2.14	-2.18
2024.08.22	Head	2450	21.4	1.81	39.17	1.80	39.20	0.56	-0.08
2024.08.26	Head	2450	21.5	1.81	39.34	1.80	39.20	0.56	0.36
2024.08.30	Head	2600	21.2	1.98	38.77	1.96	39.01	1.02	-0.62
2024.08.31	Head	2600	21.4	1.99	38.85	1.96	39.01	1.53	-0.41
2024.09.01	Head	2600	21.5	1.96	38.89	1.96	39.01	0.00	-0.31
2024.09.02	Head	2600	21.4	1.98	38.12	1.96	39.01	1.02	-2.28
2024.09.03	Head	2600	21.4	1.97	38.99	1.96	39.01	0.51	-0.05
2024.09.04	Head	2600	21.3	1.97	39.19	1.96	39.01	0.51	0.46
2024.09.05	Head	2600	21.2	1.97	38.92	1.96	39.01	0.51	-0.23
2024.09.06	Head	2600	21.0	1.99	38.71	1.96	39.01	1.53	-0.77
2024.09.07	Head	2600	21.2	1.96	38.51	1.96	39.01	0.00	-1.28
2024.09.08	Head	2600	21.5	1.99	38.65	1.96	39.01	1.53	-0.92
2024.09.09	Head	2600	21.6	1.98	38.79	1.96	39.01	1.02	-0.56
2024.09.10	Head	2600	21.5	1.98	39.51	1.96	39.01	1.02	1.28
2024.09.03	Head	3500	21.3	2.94	37.95	2.91	37.93	1.03	0.05
2024.09.04	Head	3500	21.3	2.89	38.49	2.91	37.93	-0.69	1.48
2024.09.05	Head	3700	21.4	3.16	37.24	3.12	37.70	1.28	-1.22
2024.09.06	Head	3700	21.1	3.12	37.94	3.12	37.70	0.00	0.64
2024.09.07	Head	3700	21.4	3.09	37.96	3.12	37.70	-0.96	0.69
2024.08.14	Head	3900	21.3	3.35	37.43	3.32	37.47	0.90	-0.11
2024.08.15	Head	3900	21.2	3.32	38.02	3.32	37.47	0.00	1.47
2024.09.10	Head	5250	21.4	4.69	36.29	4.71	35.93	-0.42	1.00

2024.09.11	Head	5600	21.2	5.09	35.83	5.07	35.53	0.39	0.84
2024.09.12	Head	5750	21.7	5.17	35.41	5.22	35.36	-0.96	0.14
2024.09.13	Head	5250	21.5	4.59	36.48	4.71	35.93	-2.55	1.53
2024.09.14	Head	5600	21.3	5.12	34.68	5.07	35.53	0.99	-2.39
2024.09.15	Head	5750	21.4	5.26	34.97	5.22	35.36	0.77	-1.10
2024.08.23	Head	6500	21.2	6.08	34.55	6.07	34.46	0.16	0.26
2024.08.24	Head	6500	21.4	5.97	33.79	6.07	34.46	-1.65	-1.94
2024.08.25	Head	6500	21.0	6.21	34.64	6.07	34.46	2.31	0.52

Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Head liquid 1g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2024.09.08	Head	750	100	0.85	8.53	8.46	0.83
2024.09.09	Head	750	100	0.86	8.61	8.46	1.77
2024.08.27	Head	835	100	0.98	9.81	9.74	0.72
2024.08.28	Head	835	100	0.97	9.71	9.74	-0.31
2024.08.29	Head	835	100	0.98	9.76	9.74	0.21
2024.08.26	Head	1750	100	3.71	37.10	37.00	0.27
2024.08.25	Head	1750	100	3.66	36.60	37.00	-1.08
2024.08.24	Head	1750	100	3.75	37.50	37.00	1.35
2024.08.23	Head	1950	100	4.14	41.40	41.40	0.00
2024.08.22	Head	1950	100	4.19	41.90	41.40	1.21
2024.08.21	Head	1950	100	4.09	40.90	41.40	-1.21
2024.08.22	Head	2450	100	5.28	52.80	52.60	0.38
2024.08.26	Head	2450	100	5.31	53.10	52.60	0.95
2024.08.30	Head	2600	100	5.56	55.60	55.90	-0.54
2024.08.31	Head	2600	100	5.61	56.10	55.90	0.36
2024.09.01	Head	2600	100	5.49	54.90	55.90	-1.79
2024.09.02	Head	2600	100	5.56	55.60	55.90	-0.54
2024.09.03	Head	2600	100	5.69	56.90	55.90	1.79
2024.09.04	Head	2600	100	5.64	56.40	55.90	0.89
2024.09.05	Head	2600	100	5.70	57.00	55.90	1.97
2024.09.06	Head	2600	100	5.68	56.80	55.90	1.61
2024.09.07	Head	2600	100	5.59	55.90	55.90	0.00
2024.09.08	Head	2600	100	5.62	56.20	55.90	0.54
2024.09.09	Head	2600	100	5.49	54.90	55.90	-1.79
2024.09.10	Head	2600	100	5.54	55.40	55.90	-0.89
2024.09.03	Head	3500	100	6.71	67.10	68.00	-1.32
2024.09.04	Head	3500	100	6.76	67.60	68.00	-0.59
2024.09.05	Head	3700	100	6.81	68.10	66.70	2.10
2024.09.06	Head	3700	100	6.79	67.90	66.70	1.80
2024.09.07	Head	3700	100	6.75	67.50	66.70	1.20
2024.08.14	Head	3900	100	6.98	69.80	67.60	3.25
2024.08.15	Head	3900	100	7.01	70.10	67.60	3.70
2024.09.10	Head	5250	100	7.81	78.10	77.70	0.51
2024.09.11	Head	5600	100	8.19	81.90	81.30	0.74
2024.09.12	Head	5750	100	7.81	78.10	77.60	0.64

2024.09.13	Head	5250	100	7.84	78.40	77.70	0.90
2024.09.14	Head	5600	100	8.25	82.50	81.30	1.48
2024.09.15	Head	5750	100	7.95	79.50	77.60	2.45
2024.08.23	Head	6500	100	29.20	292.00	299.00	-2.34
2024.08.24	Head	6500	100	29.80	298.00	299.00	-0.33
2024.08.25	Head	6500	100	30.20	302.00	299.00	1.00
Note: The tolerance limit of System validation $\pm 10\%$.							

Head liquid 10g

Date	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2024.08.27	835	100	0.65	6.46	6.43	0.47
2024.08.28	835	100	0.64	6.39	6.43	-0.62
2024.08.29	835	100	0.64	6.42	6.43	-0.16
2024.08.26	1750	100	1.98	19.80	19.70	0.51
2024.08.25	1750	100	1.94	19.40	19.70	-1.52
2024.08.24	1750	100	1.99	19.90	19.70	1.02
2024.08.23	1950	100	2.13	21.30	21.40	-0.47
2024.08.22	1950	100	2.16	21.60	21.40	0.93
2024.08.21	1950	100	2.11	21.10	21.40	-1.40
2024.08.22	2450	100	2.49	24.90	24.70	0.81
2024.08.26	2450	100	2.51	25.10	24.70	1.62
2024.08.30	2600	100	2.51	25.10	25.40	-1.18
2024.08.31	2600	100	2.54	25.40	25.40	0.00
2024.09.01	2600	100	2.46	24.60	25.40	-3.15
2024.09.02	2600	100	2.49	24.90	25.40	-1.97
2024.09.03	2600	100	2.56	25.60	25.40	0.79
2024.09.04	2600	100	2.54	25.40	25.40	0.00
2024.09.05	2600	100	2.58	25.80	25.40	1.57
2024.09.06	2600	100	2.55	25.50	25.40	0.39
2024.09.07	2600	100	2.50	25.00	25.40	-1.57
2024.09.08	2600	100	2.51	25.10	25.40	-1.18
2024.09.09	2600	100	2.48	24.80	25.40	-2.36
2024.09.10	2600	100	2.51	25.10	25.40	-1.18
2024.09.03	3500	100	2.51	25.10	26.10	-3.83
2024.09.04	3500	100	2.54	25.40	26.10	-2.68
2024.09.05	3700	100	2.46	24.60	24.60	0.00
2024.09.06	3700	100	2.43	24.30	24.60	-1.22
2024.09.07	3700	100	2.40	24.00	24.60	-2.44
2024.08.14	3900	100	2.42	24.20	23.60	2.54
2024.08.15	3900	100	2.46	24.60	23.60	4.24
2024.09.10	5250	100	2.21	22.10	22.00	0.45
2024.09.11	5600	100	2.36	23.60	23.10	2.16
2024.09.12	5750	100	2.34	23.40	21.90	6.85
2024.09.13	5250	100	2.25	22.50	22.00	2.27
2024.09.14	5600	100	2.33	23.30	23.10	0.87
2024.09.15	5750	100	2.31	23.10	21.90	5.48
2024.08.23	6500	100	5.43	54.30	55.20	-1.63
2024.08.24	6500	100	5.45	54.50	55.20	-1.27
2024.08.25	6500	100	5.48	54.80	55.20	-0.72

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (750MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
CD750V3, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatur e [°C]	Liquid Temperatur e [°C]
Flat, HSL		CD700	CW, 0--	750.0, 100	10.29	0.906	41.9	22.4	21.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-08	2024-09-08
psSAR1g [W/kg]	0.842	0.853
psSAR10g [W/kg]	0.545	0.559
Power Drift [dB]	0.04	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		86.3
Dist 3dB Peak [mm]		20.2

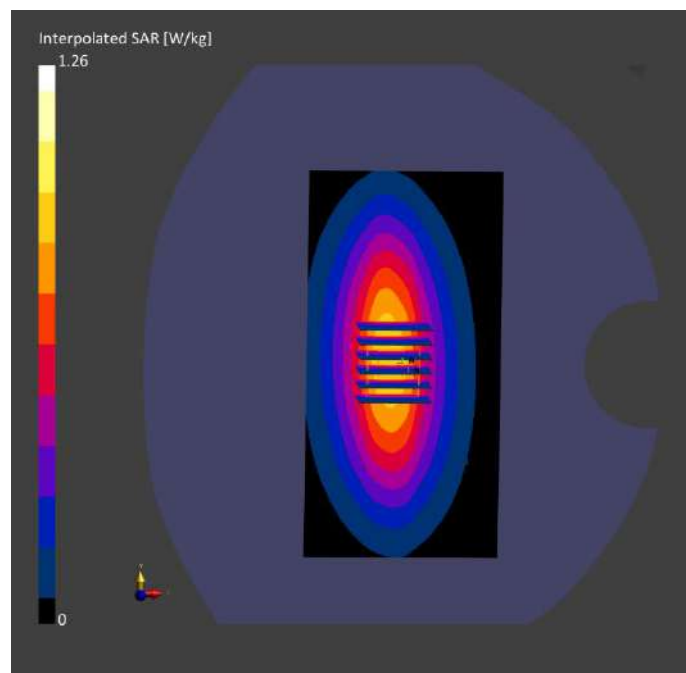

System Performance Check Data (750MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D750V3, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatur e [°C]	Liquid Temperatur e [°C]
Flat, HSL		CD700	CW, 0--	750.0, 100	10.29	0.919	40.7	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 160.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-09	2024-09-09
psSAR1g [W/kg]	0.855	0.861
psSAR10g [W/kg]	0.558	0.564
Power Drift [dB]	-0.03	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		86.1
Dist 3dB Peak [mm]		20.3

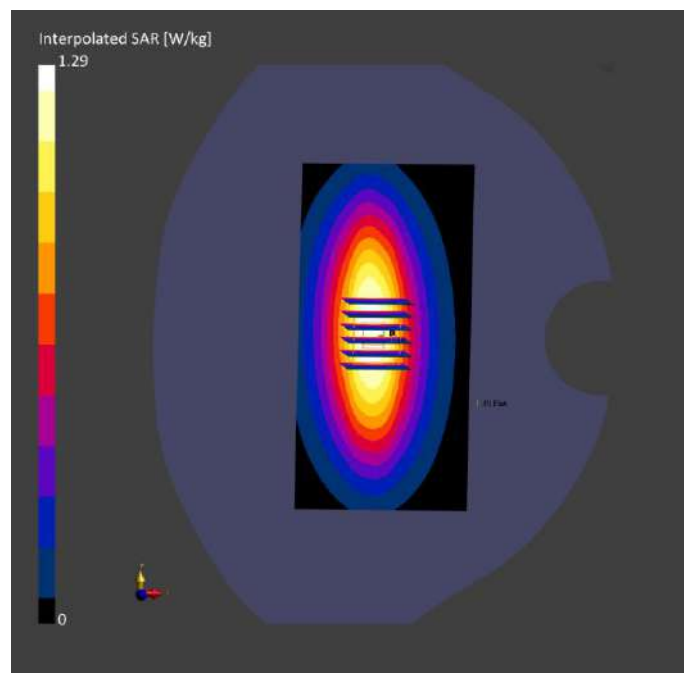

System Performance Check Data (835MHz)

Date: 2024.08.27

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 835 100mW/Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


CW 835 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.14 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.646 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

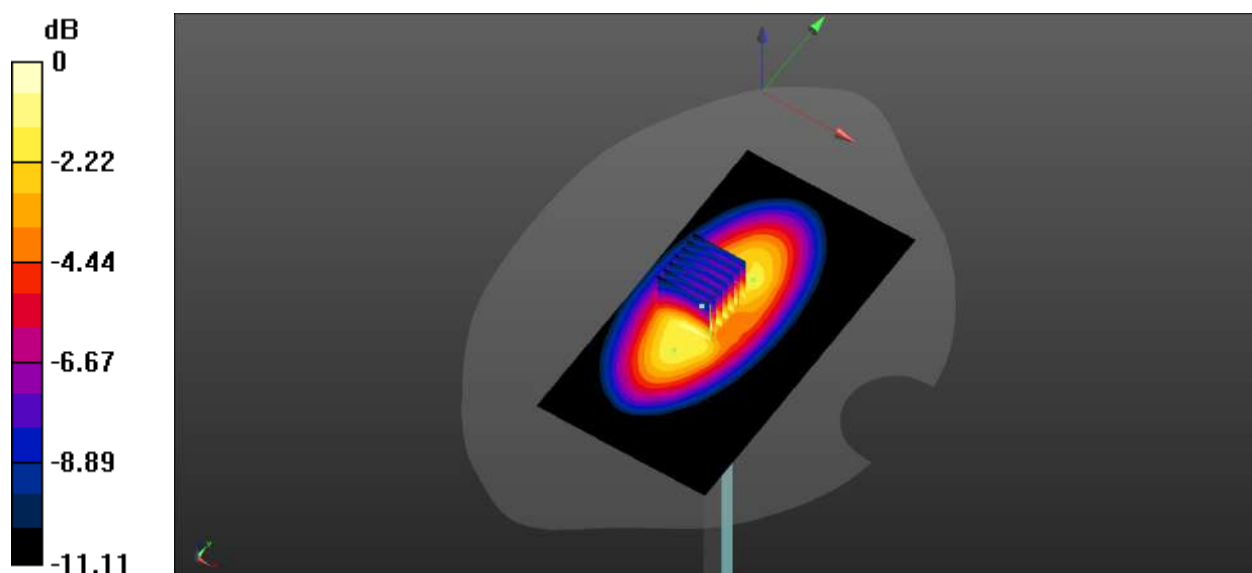

0 dB = 1.03 W/kg

System Performance Check Data (835MHz)

Date: 2024.08.28

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.306$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 835 100mW/Area Scan (61x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.06 W/kg


CW 835 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 32.64 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.971 W/kg; SAR(10 g) = 0.639 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

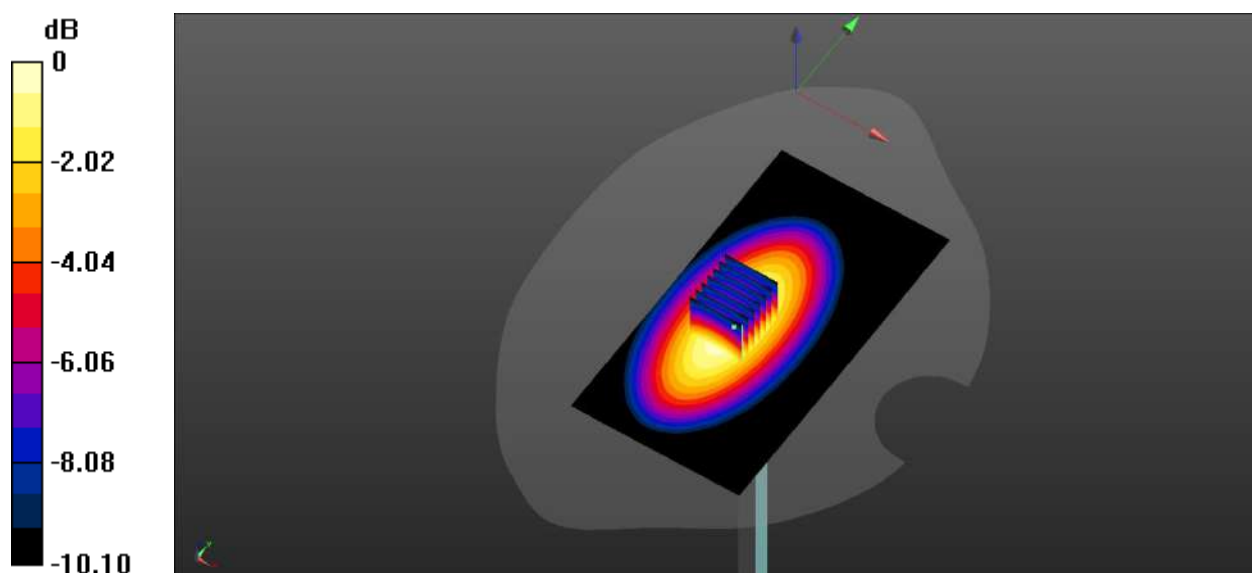

0 dB = 1.18 W/kg

System Performance Check Data (835MHz)

Date: 2024.08.29

Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.899 \text{ S/m}$; $\epsilon_r = 40.778$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 835 100mW/Area Scan (61x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.07 W/kg



CW 835 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.63 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.976 W/kg ; SAR(10 g) = 0.642 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

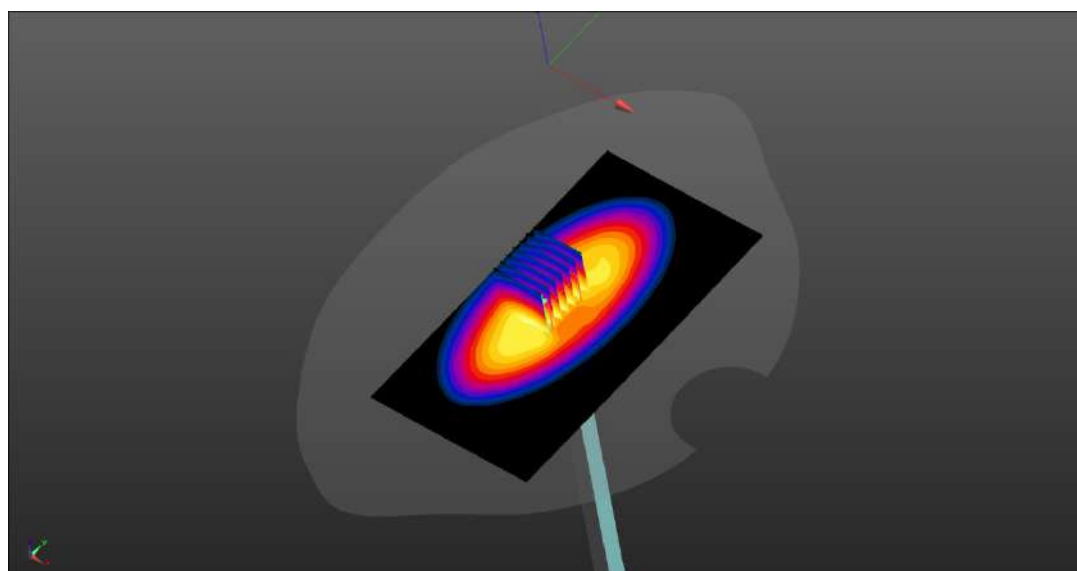

0 dB = 1.12 W/kg

System Performance Check Data (1750MHz)

Date: 2024.08.26

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1750$ MHz; $\sigma = 1.389$ S/m; $\epsilon_r = 39.687$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW1750 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.43 W/kg


CW1750 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.25 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 6.58 W/kg

SAR(1 g) = 3.71 W/kg; SAR(10 g) = 1.98 W/kg

Maximum value of SAR (measured) = 4.56 W/kg

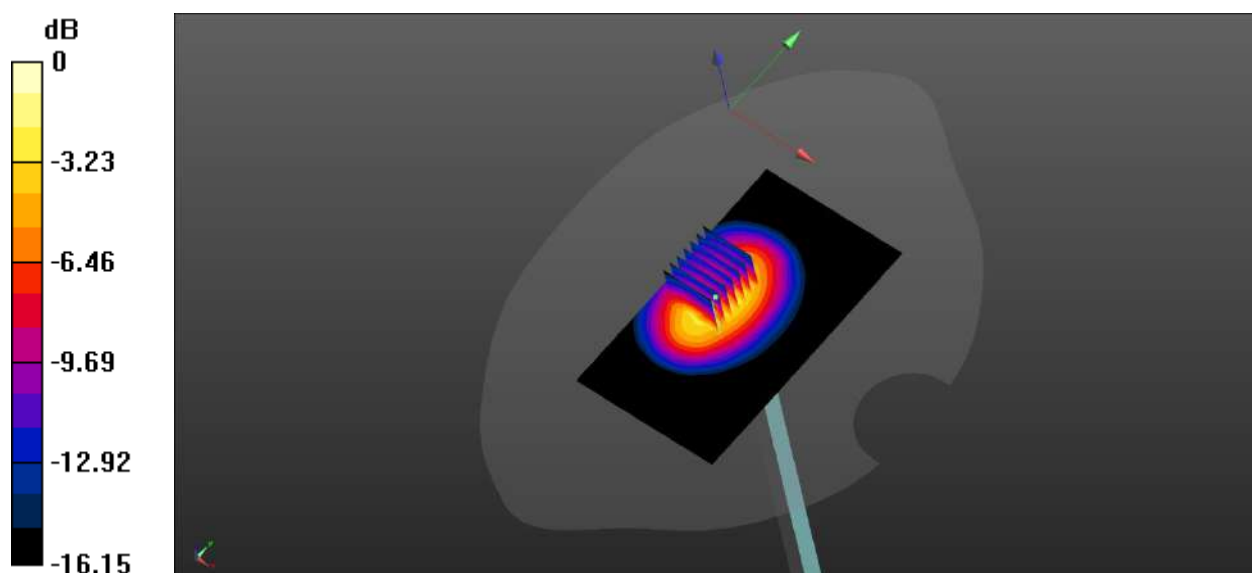

0 dB = 4.56 W/kg

System Performance Check Data (1750MHz)

Date: 2024.08.25

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 39.835$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW1750 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.26 W/kg


CW1750 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.25 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 6.23 W/kg

SAR(1 g) = 3.66 W/kg; SAR(10 g) = 1.94 W/kg

Maximum value of SAR (measured) = 4.21 W/kg

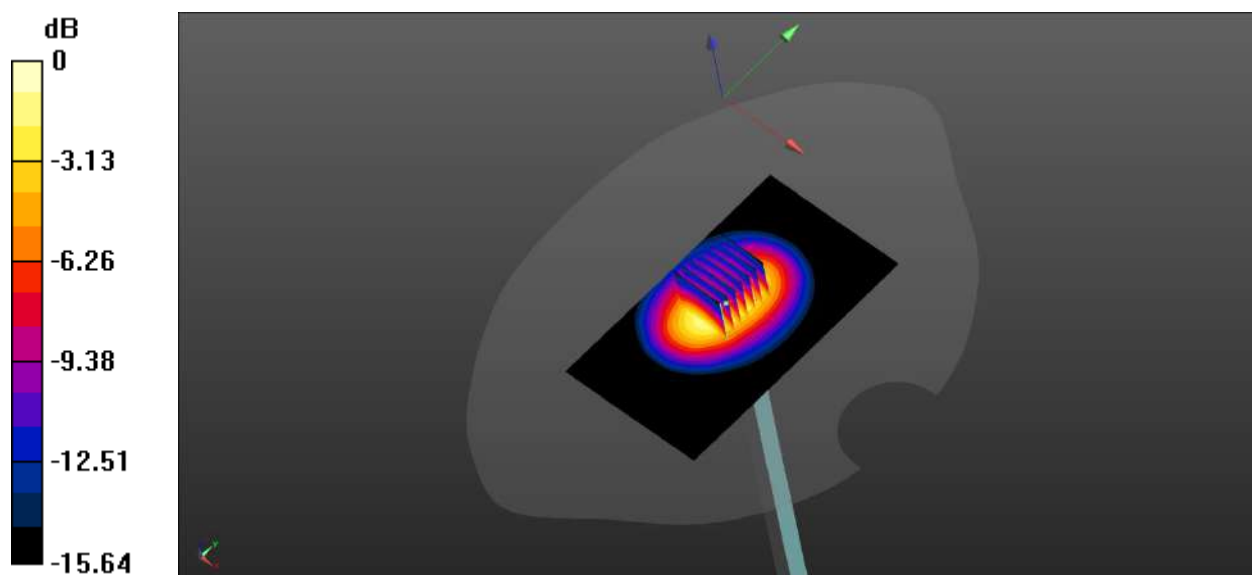

0 dB = 4.21 W/kg

System Performance Check Data (1750MHz)

Date: 2024.08.24

Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1750$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 39.751$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 1750 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.36 W/kg


CW 1750 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.08 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 6.45 W/kg

SAR(1 g) = 3.75 W/kg; SAR(10 g) = 1.99 W/kg

Maximum value of SAR (measured) = 4.38 W/kg

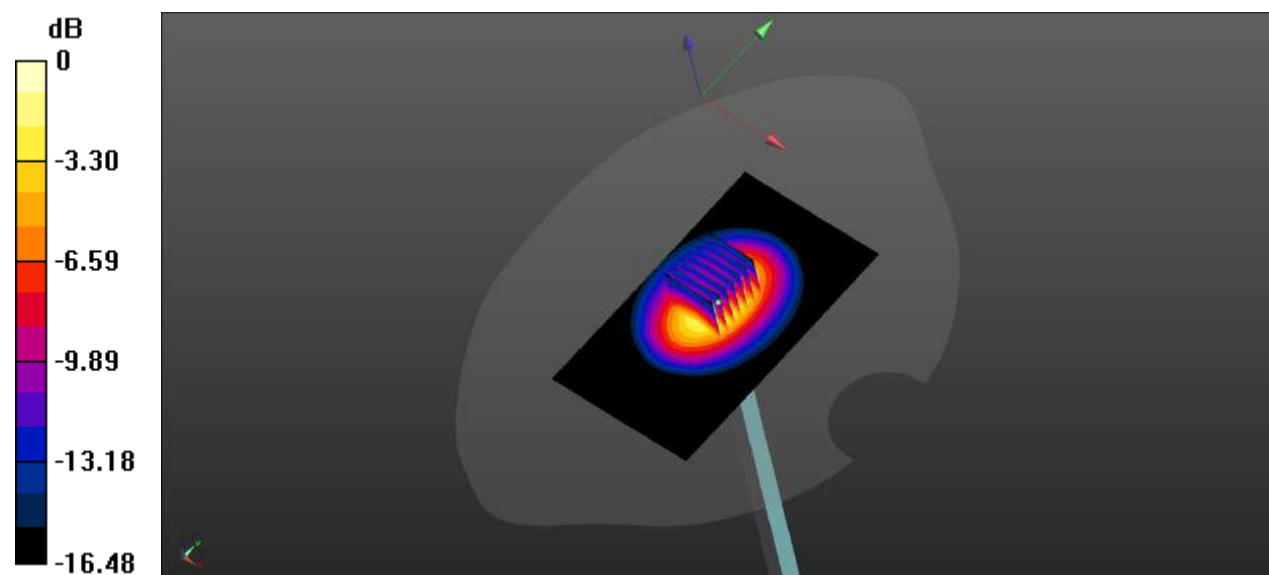

0 dB = 4.38 W/kg

System Performance Check Data (1950MHz)

Date: 2024.08.23

Communication System Band: D1950 (1950.0 MHz); Frequency: 1950 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1950$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 39.322$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW1950 100mw/Area Scan (101x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 4.52 W/kg


CW1950 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 54.11 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 6.28 W/kg

SAR(1 g) = 4.14 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 4.49 W/kg

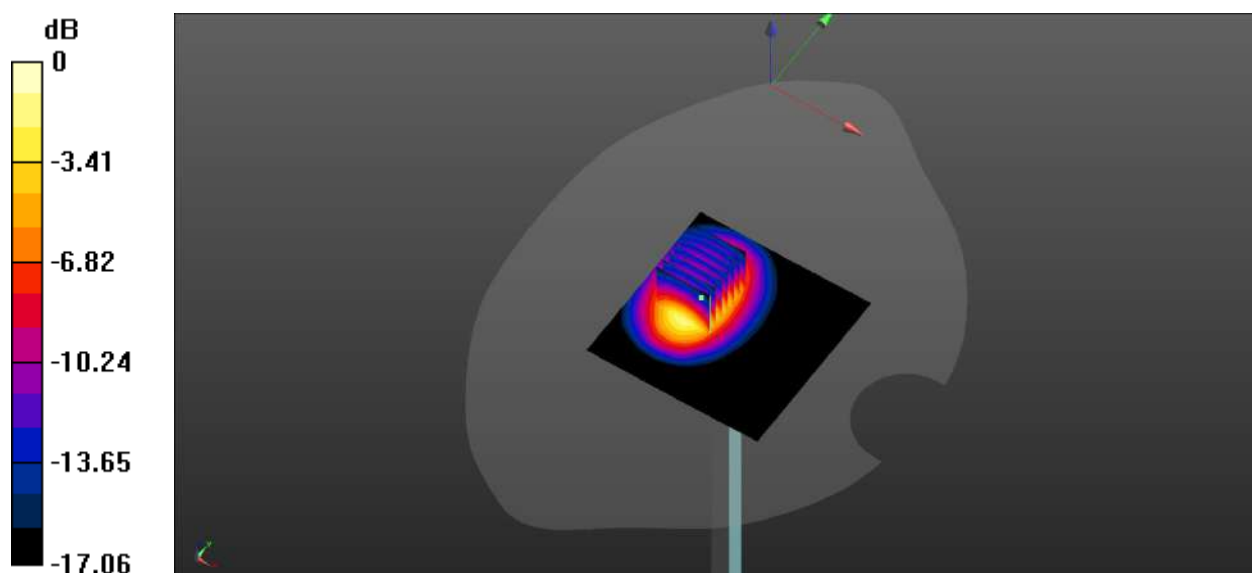

0 dB = 4.49 W/kg

System Performance Check Data (1950MHz)

Date: 2024.08.22

Communication System Band: D1950 (1950.0 MHz); Frequency: 1950 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1950$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.16$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 1950 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.43 W/kg


CW 1950 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.53 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 7.18 W/kg

SAR(1 g) = 4.19 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 4.39 W/kg

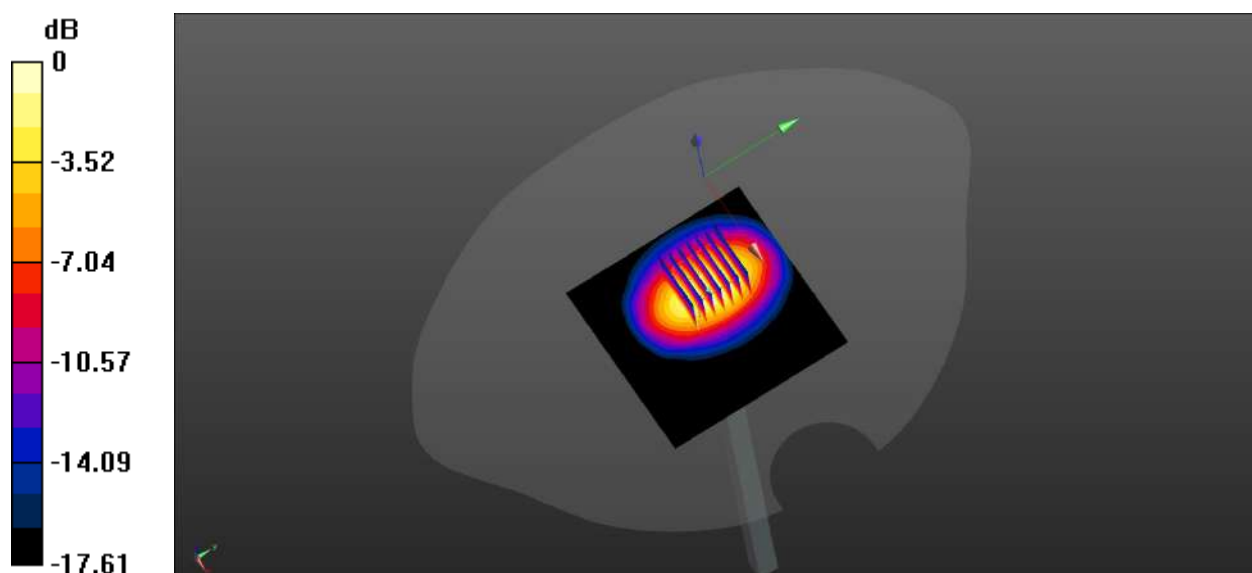

0 dB = 4.39 W/kg

System Performance Check Data (1950MHz)

Date: 2024.08.21

Communication System Band: D1950 (1950.0 MHz); Frequency: 1950 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1950$ MHz; $\sigma = 1.433$ S/m; $\epsilon_r = 39.132$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW1950 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.28 W/kg


CW1950 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.92 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 7.21 W/kg

SAR(1 g) = 4.09 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 4.32 W/kg

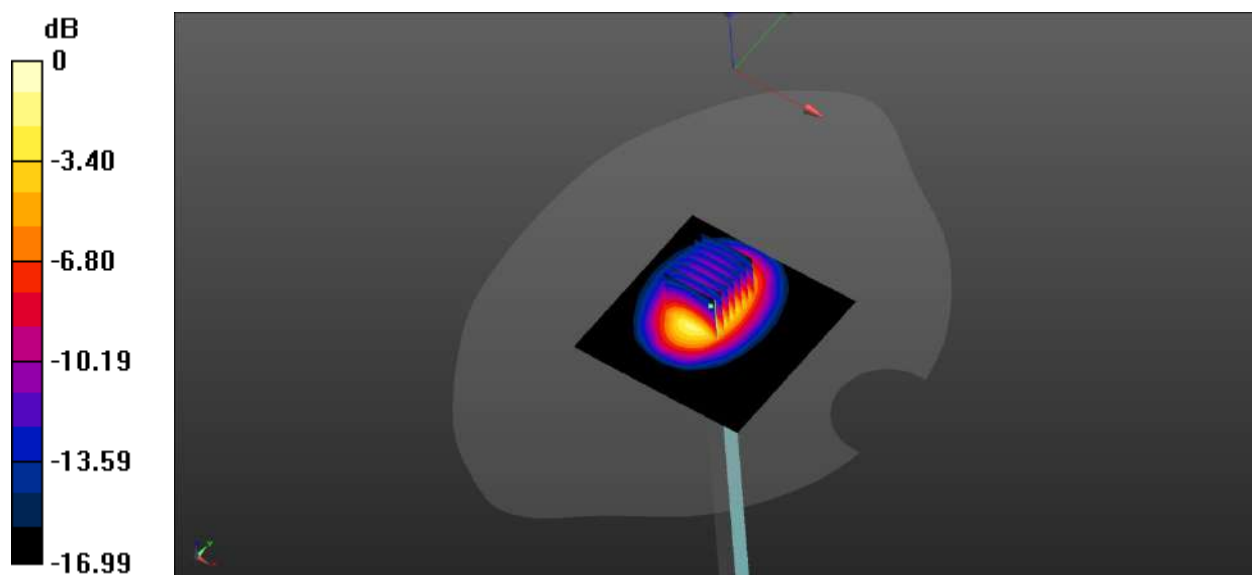

0 dB = 4.32 W/kg

System Performance Check Data (2450MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D2450V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatur e [°C]	Liquid Temperatur e [°C]
Flat, HSL		D2450	CW, 0--	2450.0, 2450	7.75	1.81	39.2	22.4	21.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-22	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-22	2024-08-22
psSAR1g [W/kg]	5.22	5.28
psSAR10g [W/kg]	2.41	2.49
Power Drift [dB]	-0.06	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.2
Dist 3dB Peak [mm]		8.9

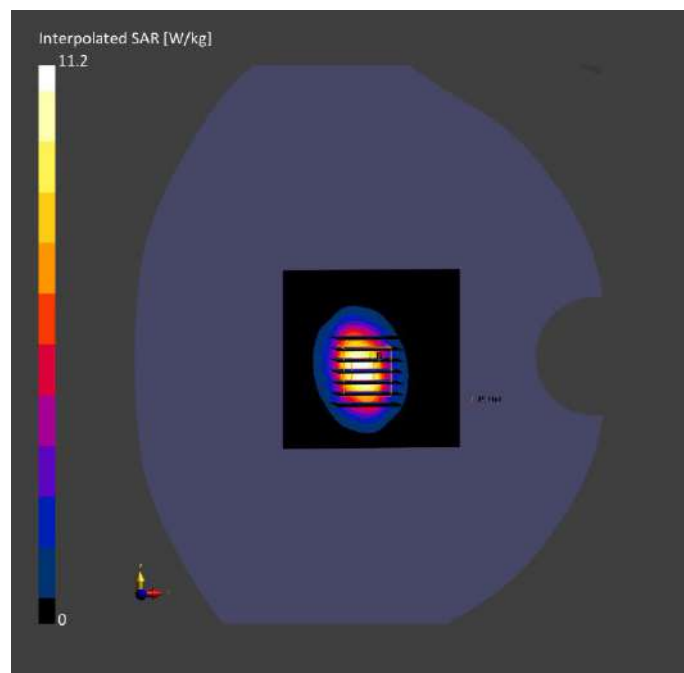

System Performance Check Data (2450MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D2450V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivit y [S/m]	TSL Permittivity	Ambient Temperatur e [°C]	Liquid Temperatur e [°C]
Flat, HSL		D2450	CW, 0--	2450.0, 2450	7.75	1.81	39.3	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-26	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-26	2024-08-26
psSAR1g [W/kg]	5.28	5.31
psSAR10g [W/kg]	2.47	2.51
Power Drift [dB]	-0.02	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.5
Dist 3dB Peak [mm]		9.2

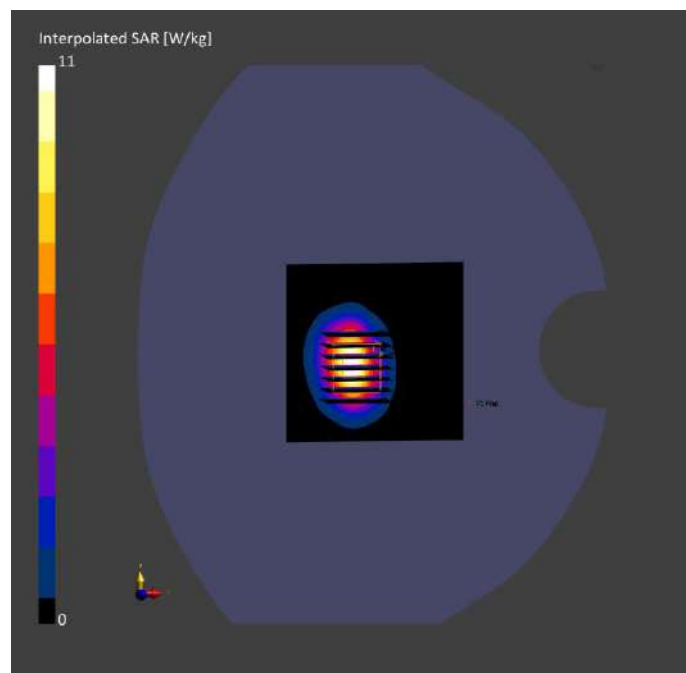

System Performance Check Data (2600MHz)

Date: 2024.08.30

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.976$ S/m; $\epsilon_r = 38.769$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.48 W/kg


CW 2600 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.37 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.56 W/kg; SAR(10 g) = 2.51 W/kg

Maximum value of SAR (measured) = 6.72 W/kg

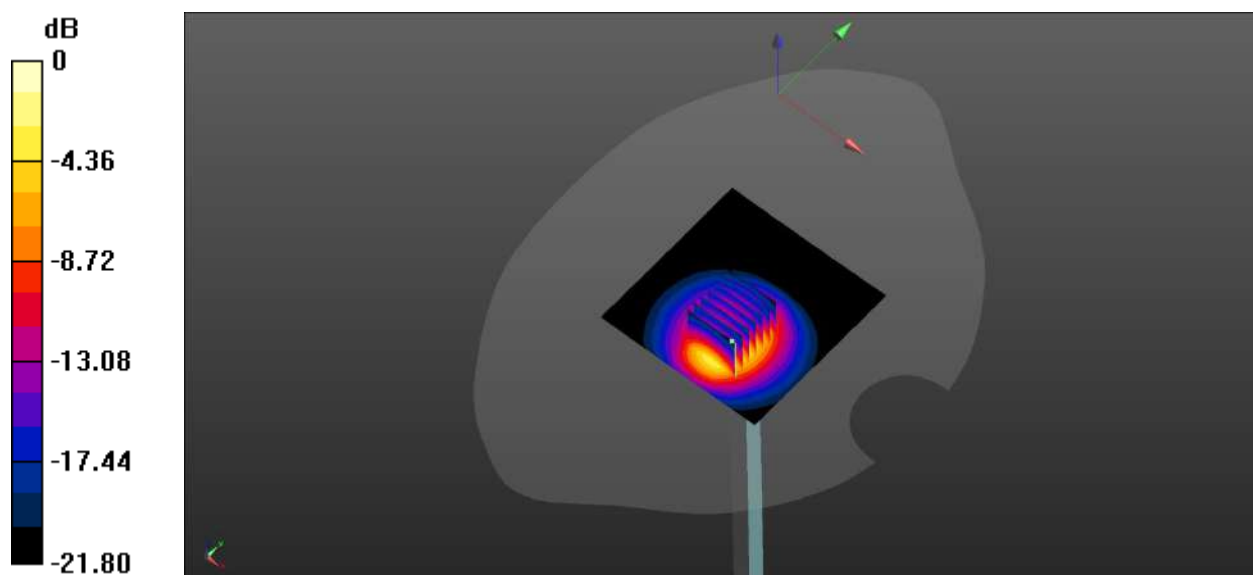

System Performance Check Data (2600MHz)

Date: 2024.08.31

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.986$ S/m; $\epsilon_r = 38.851$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mW /Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.46 W/kg


CW 2600 100mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.94 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.61 W/kg; SAR(10 g) = 2.54 W/kg

Maximum value of SAR (measured) = 6.29 W/kg

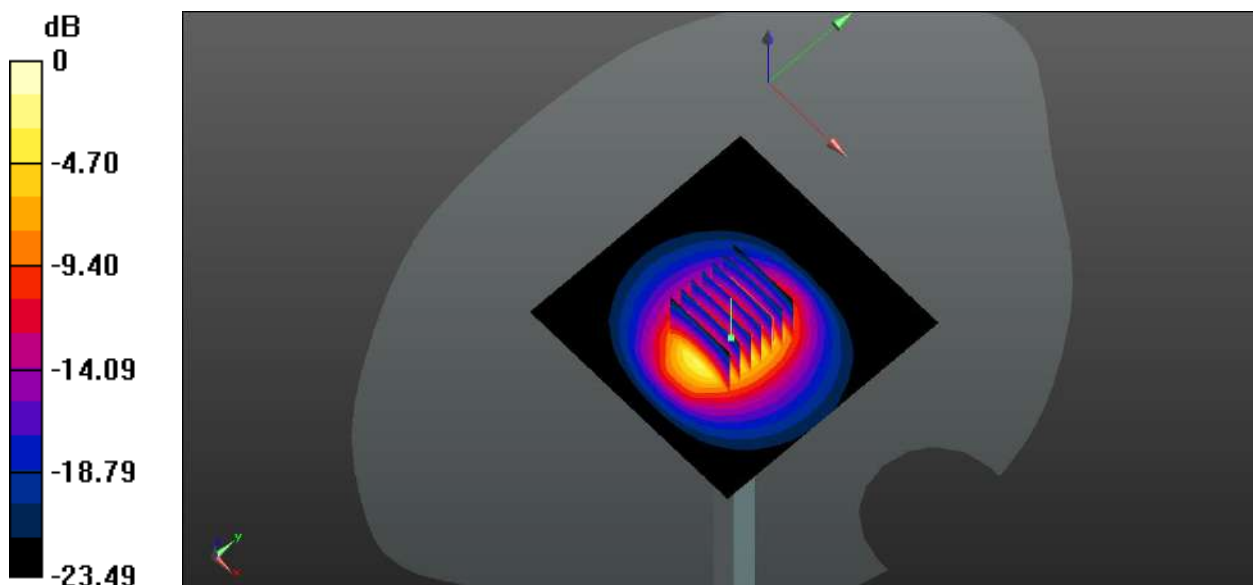

0 dB = 6.29 W/kg

System Performance Check Data (2600MHz)

Date: 2024.09.01

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 2600$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.894$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.16 W/kg


CW 2600 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 42.52 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.49 W/kg; SAR(10 g) = 2.46 W/kg

Maximum value of SAR (measured) = 6.18 W/kg

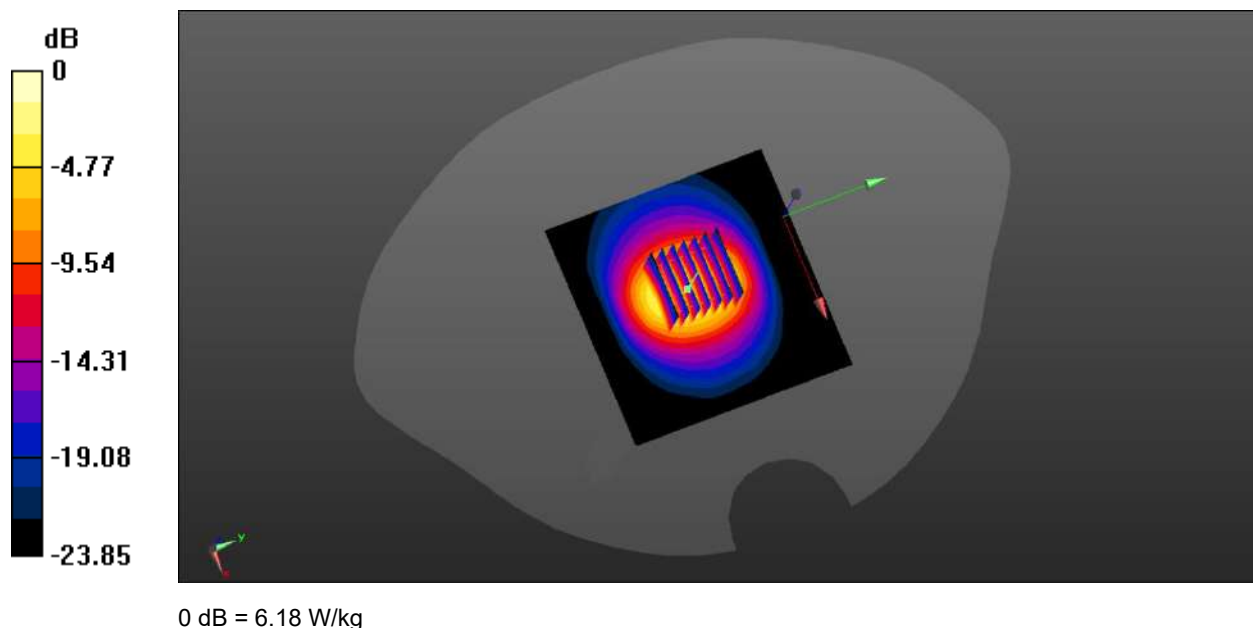

System Performance Check Data (2600MHz)

Date: 2024.09.02

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 2600$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 38.123$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.33 W/kg


CW 2600 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.08 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.56 W/kg; SAR(10 g) = 2.49 W/kg

Maximum value of SAR (measured) = 6.37 W/kg

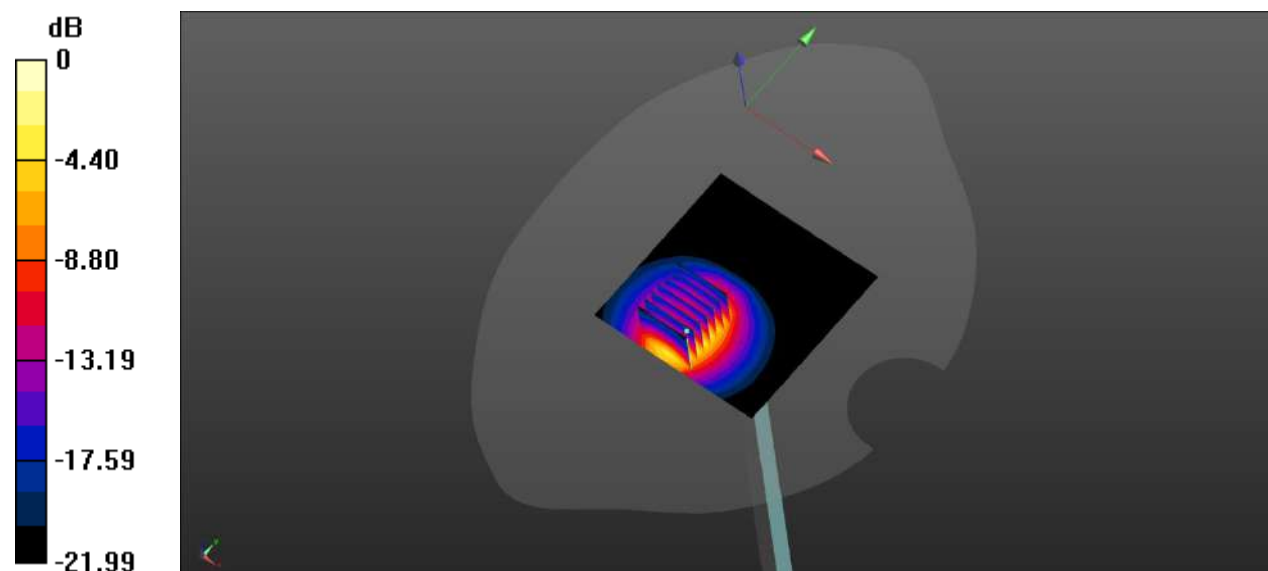

0 dB = 6.37 W/kg

System Performance Check Data (2600MHz)

Date: 2024.09.03

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 2600$ MHz; $\sigma = 1.968$ S/m; $\epsilon_r = 38.988$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.28 W/kg


CW 2600 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 42.52 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 5.69 W/kg; SAR(10 g) = 2.56 W/kg

Maximum value of SAR (measured) = 6.35 W/kg

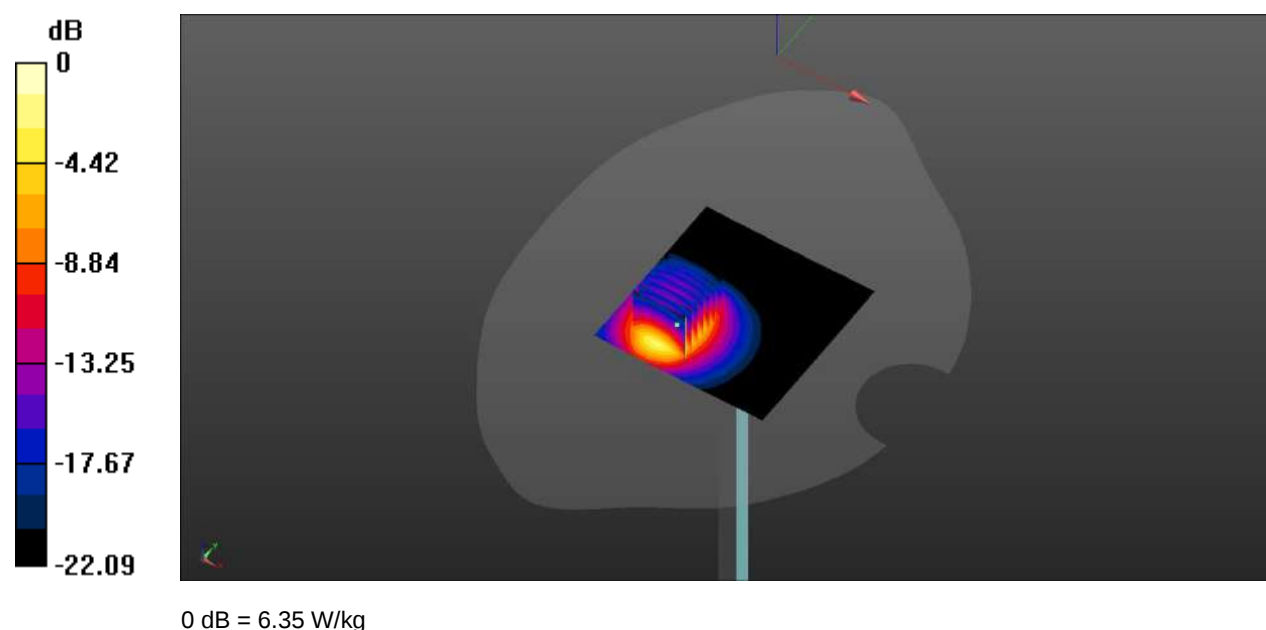

System Performance Check Data (2600MHz)

Date: 2024.09.04

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.966$ S/m; $\epsilon_r = 39.189$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mW/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.23 W/kg


CW 2600 100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.92 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 5.64 W/kg; SAR(10 g) = 2.54 W/kg

Maximum value of SAR (measured) = 6.18 W/kg

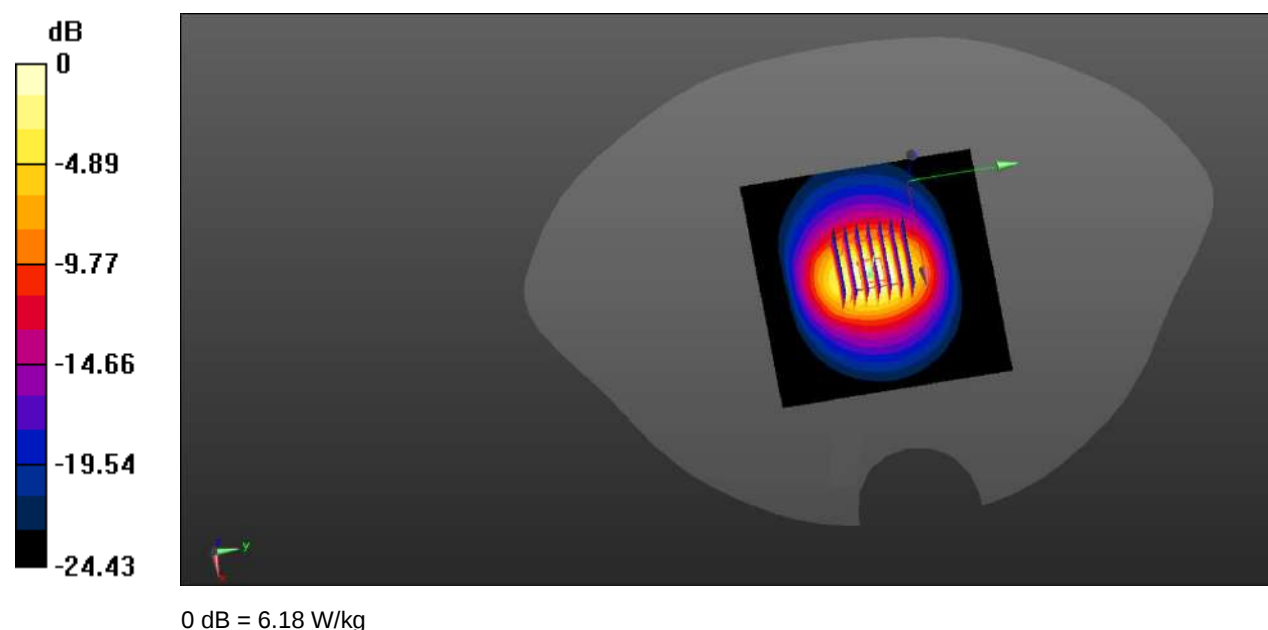

System Performance Check Data (2600MHz)

Date: 2024.09.05

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.972$ S/m; $\epsilon_r = 38.922$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW2600 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.21 W/kg


CW2600 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.67 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.7 W/kg; SAR(10 g) = 2.58 W/kg

Maximum value of SAR (measured) = 6.16 W/kg

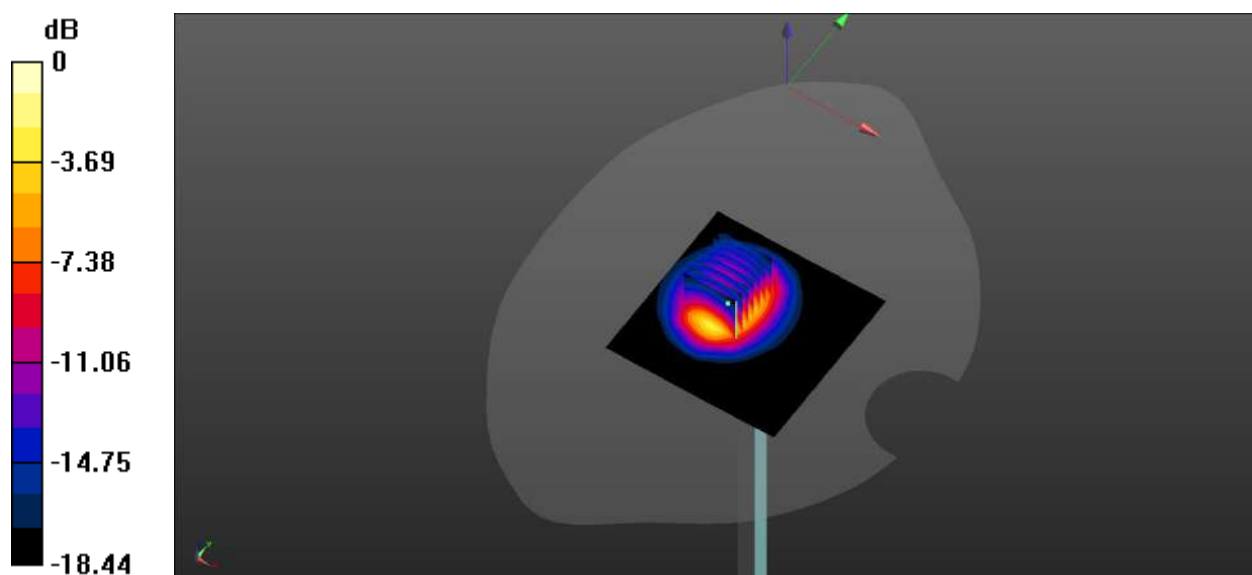

0 dB = 6.16 W/kg

System Performance Check Data (2600MHz)

Date: 2024.09.06

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.991$ S/m; $\epsilon_r = 38.714$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.26 W/kg


CW 2600 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.59 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.68 W/kg; SAR(10 g) = 2.55 W/kg

Maximum value of SAR (measured) = 6.23 W/kg

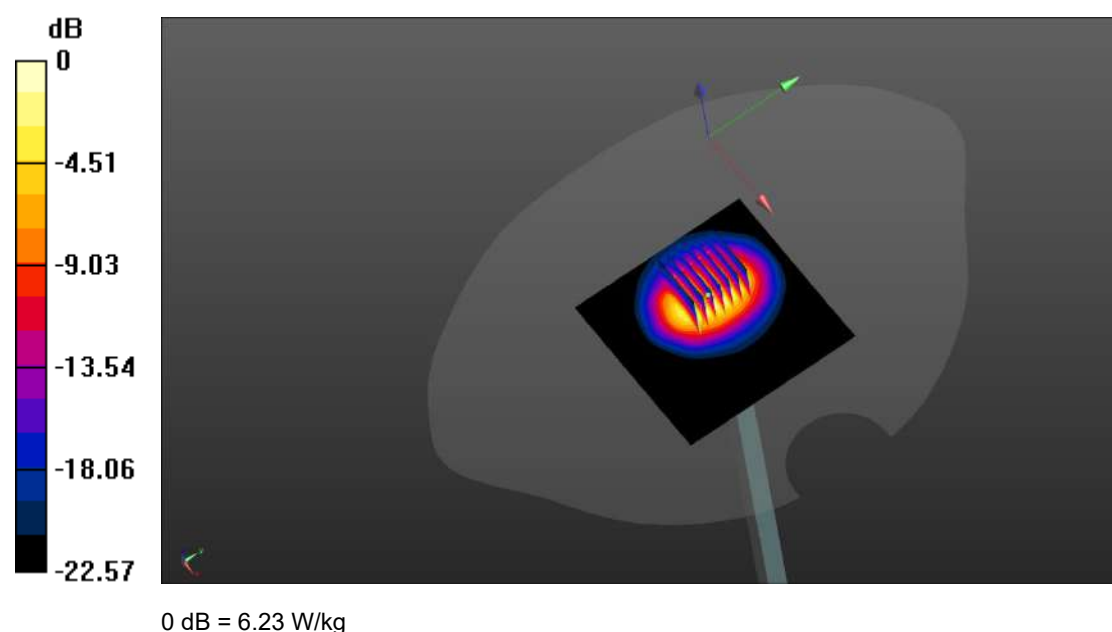

System Performance Check Data (2600MHz)

Date: 2024.09.07

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 38.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.33 W/kg


CW 2600 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.85 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 11.8 W/kg

SAR(1 g) = 5.59 W/kg; SAR(10 g) = 2.5 W/kg

Maximum value of SAR (measured) = 6.28 W/kg

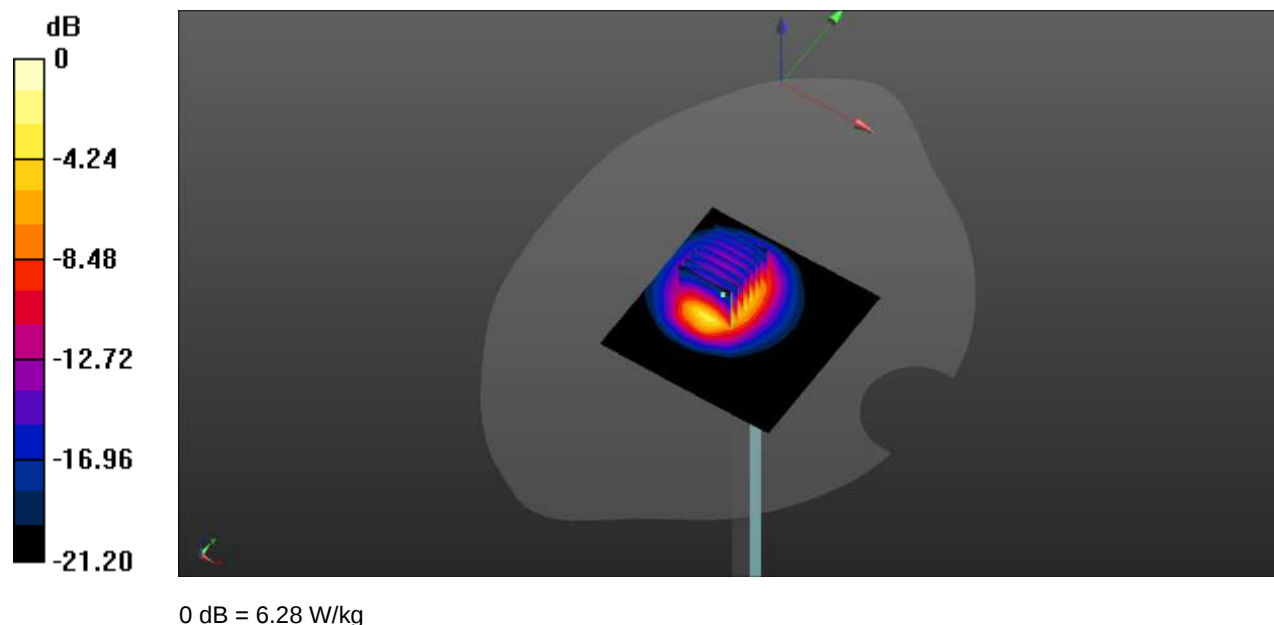

System Performance Check Data (2600MHz)

Date: 2024.09.08

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.987$ S/m; $\epsilon_r = 38.649$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.19 W/kg


CW 2600 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.93 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 11.6 W/kg

SAR(1 g) = 5.62 W/kg; SAR(10 g) = 2.51 W/kg

Maximum value of SAR (measured) = 6.13 W/kg

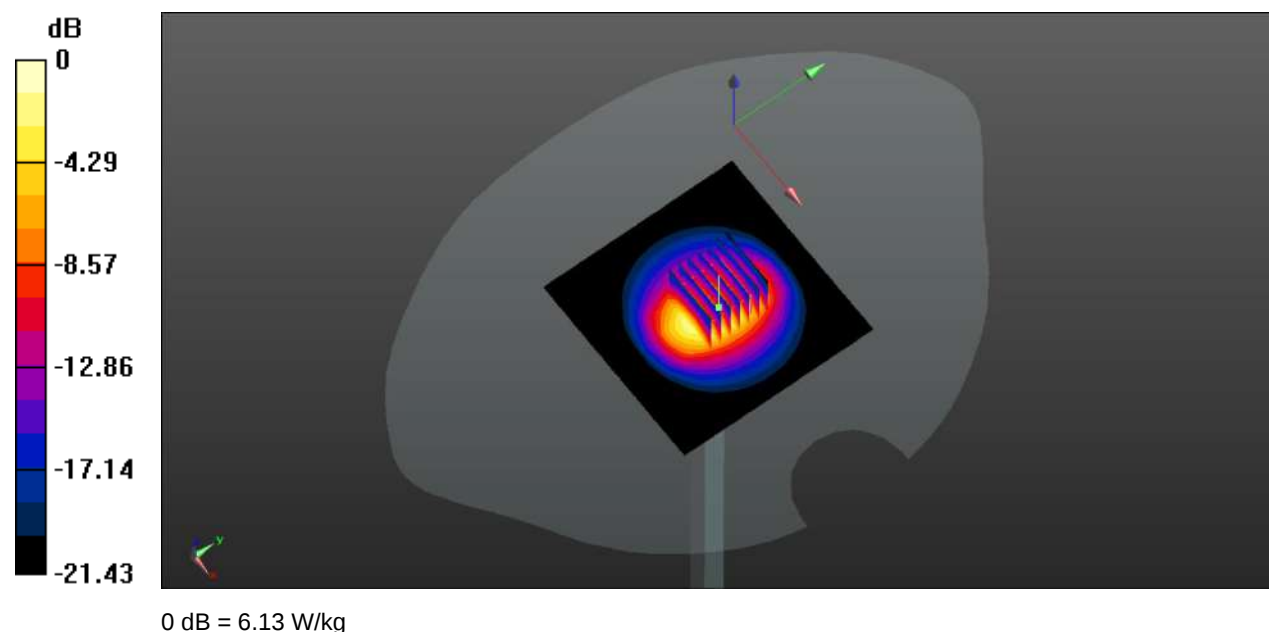

System Performance Check Data (2600MHz)

Date: 2024.09.09

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 1.976$ S/m; $\epsilon_r = 38.788$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.15 W/kg


CW 2600 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 43.76 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.49 W/kg; SAR(10 g) = 2.48 W/kg

Maximum value of SAR (measured) = 6.11 W/kg

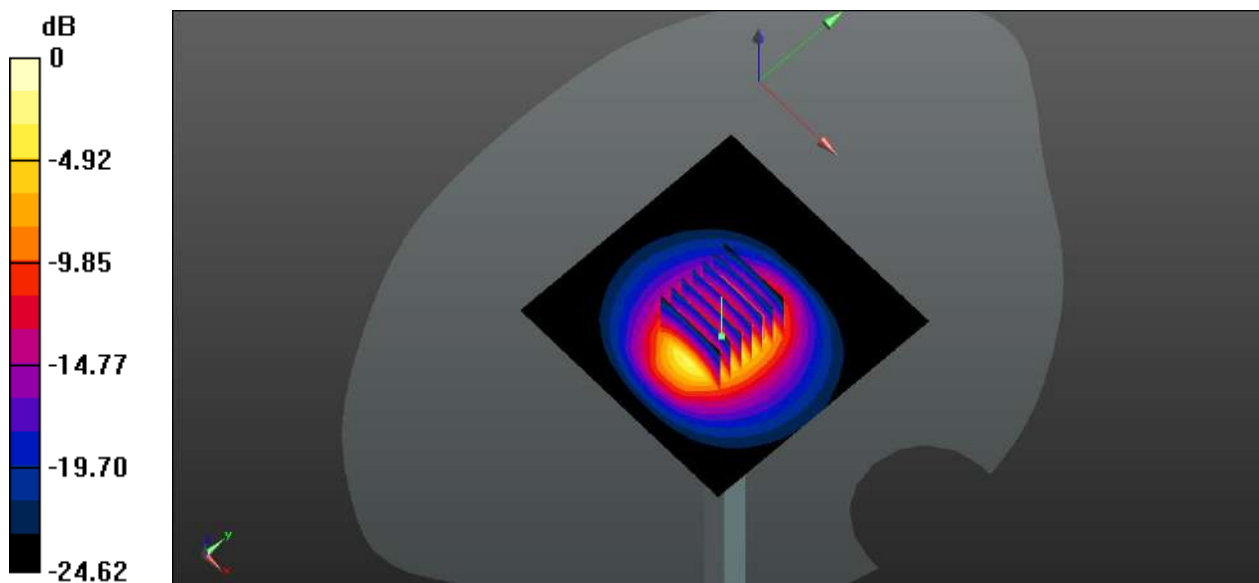

System Performance Check Data (2600MHz)

Date: 2024.09.10

Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 2600$ MHz; $\sigma = 1.981$ S/m; $\epsilon_r = 39.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CW 2600 100mw/Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.21 W/kg


CW 2600 100mw/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 42.25 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.54 W/kg; SAR(10 g) = 2.51 W/kg

Maximum value of SAR (measured) = 6.16 W/kg

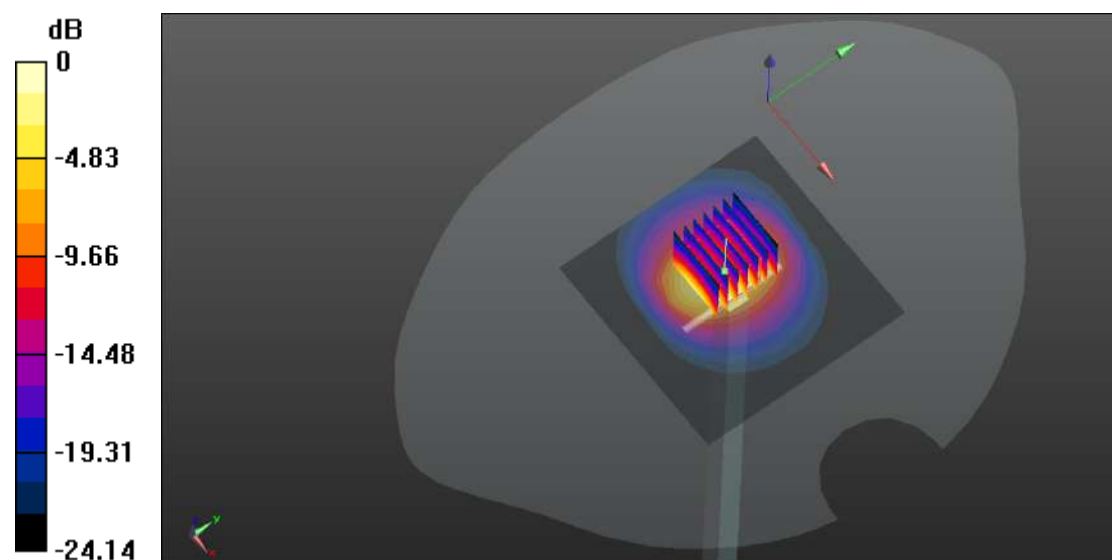

0 dB = 6.16 W/kg

System Performance Check Data (3500MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D3500V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D3500V2	CW, 0--	3500.0, 3500	7.11	2.94	38.0	22.2	21.3

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-09-03	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-03	2024-09-03
psSAR1g [W/kg]	6.54	6.71
psSAR10g [W/kg]	2.43	2.51
Power Drift [dB]	-0.04	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		76.9
Dist 3dB Peak [mm]		8.5

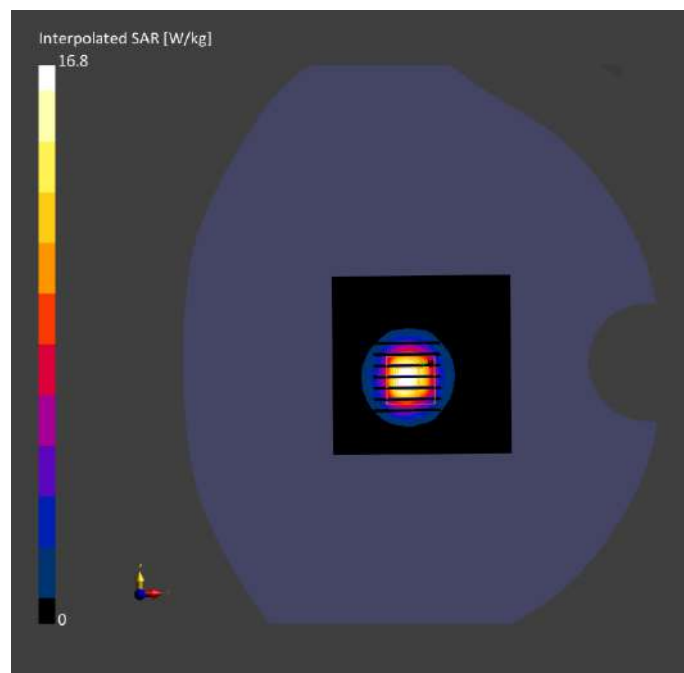

System Performance Check Data (3500MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D3500V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D3500V2	CW, 0--	3500.0, 3500	7.11	2.89	38.5	22.4	21.3

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM (30deg probe tilt) - 1859	V5.0	HBBL-600-10000	2024-09-04	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-04	2024-09-04
psSAR1g [W/kg]	6.41	6.76
psSAR10g [W/kg]	2.47	2.54
Power Drift [dB]	-0.02	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		75.9
Dist 3dB Peak [mm]		8.5

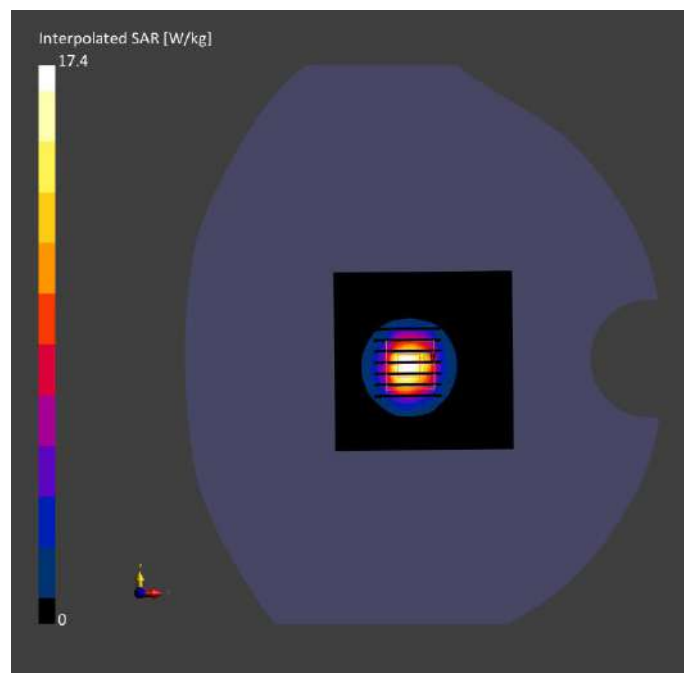

System Performance Check Data (3700MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D3700V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D3700V2	CW, 0--	3700.0, 3700	6.94	3.16	37.2	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-09-05	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-05	2024-09-05
psSAR1g [W/kg]	6.29	6.81
psSAR10g [W/kg]	2.43	2.46
Power Drift [dB]	-0.02	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		76.5
Dist 3dB Peak [mm]		8.4

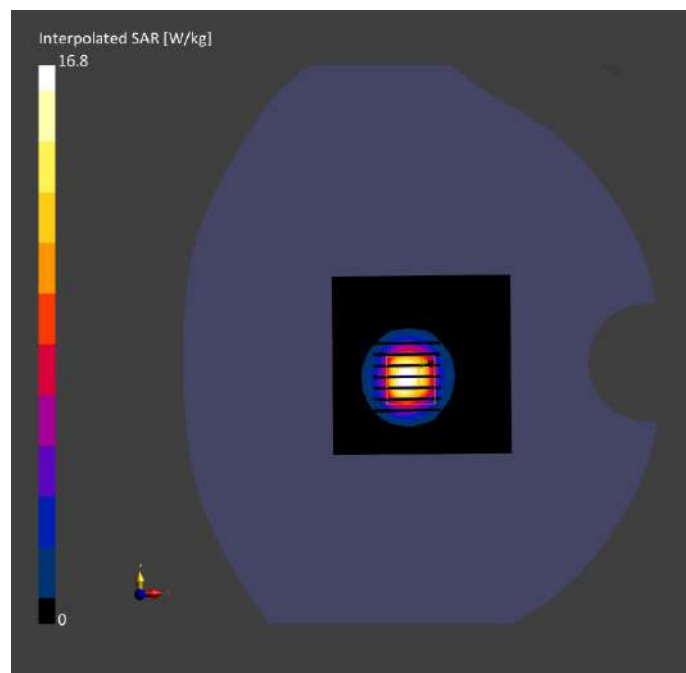

System Performance Check Data (3700MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D3700V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D3700V2	CW, 0--	3700.0, 3700	6.94	3.12	37.9	22.3	21.1

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-09-06	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-06	2024-09-06
psSAR1g [W/kg]	6.49	6.79
psSAR10g [W/kg]	2.36	2.43
Power Drift [dB]	-0.02	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		75.8
Dist 3dB Peak [mm]		8.5

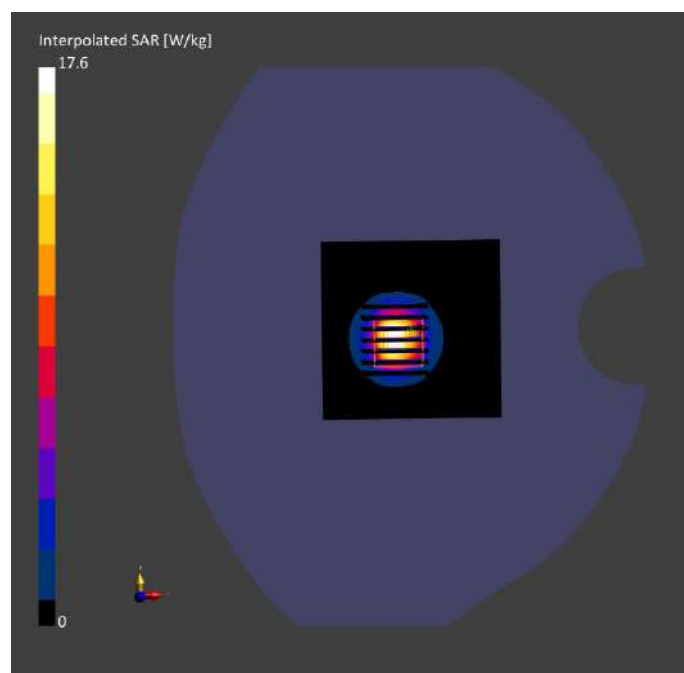

System Performance Check Data (3700MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D3700V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position	Band	Group	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Section, TSL	Test Distance [mm]		UID	Channel Number					
Flat, HSL		D3700V 2	CW, 0--	3700.0, 3700	6.94	3.09	37.9	22.6	21.4

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM (30deg probe tilt) - 1859	V5.0	HBBL-600-10000	2024-09-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-07	2024-09-07
psSAR1g [W/kg]	6.52	6.75
psSAR10g [W/kg]	2.38	2.40
Power Drift [dB]	-0.03	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		76.1
Dist 3dB Peak [mm]		8.8

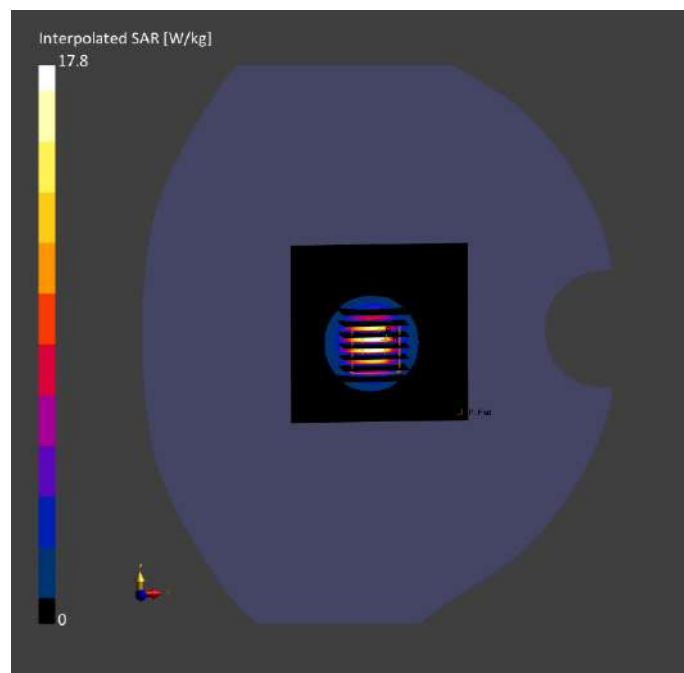

System Performance Check Data (3900MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D3900V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D3900V2	CW, 0--	3900.0, 3900	6.85	3.35	37.4	22.4	21.3

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM (30deg probe tilt) - V5.0 1859	HBBL-600-10000	2024-08-14	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-14	2024-08-14
psSAR1g [W/kg]	6.74	6.98
psSAR10g [W/kg]	2.37	2.42
Power Drift [dB]	0.01	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		73.9
Dist 3dB Peak [mm]		8.3

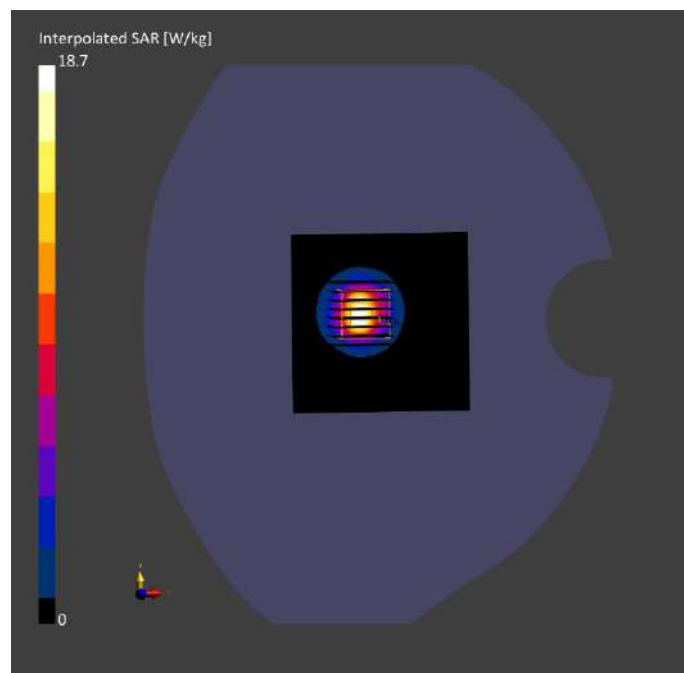

System Performance Check Data (3900MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D3900V2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position	Band	Group	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Section, TSL	Test Distance [mm]		UID	Channel Number					
Flat, HSL		D3900V 2	CW, 0--	3900.0, 3900	6.85	3.32	38.0	22.4	21.2

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM (30deg probe tilt) - 1859	V5.0	HBBL-600-10000	2024-08-15	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.5
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-15	2024-08-15
psSAR1g [W/kg]	6.84	7.01
psSAR10g [W/kg]	2.39	2.46
Power Drift [dB]	0.02	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		76.3
Dist 3dB Peak [mm]		8.5

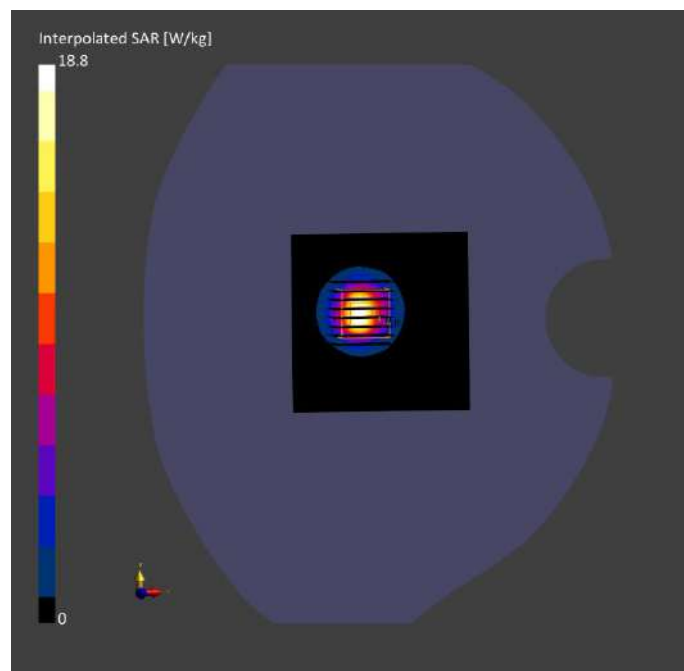

System Performance Check Data (5250MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D5GHZV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, TSL	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D5GHZ	CW, 0--	5250.0, 5250	5.74	4.69	36.3	22.6	21.4

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-09-10	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-10	2024-09-10
psSAR1g [W/kg]	7.56	7.81
psSAR10g [W/kg]	2.08	2.21
Power Drift [dB]	0.01	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.6
Dist 3dB Peak [mm]		7.9

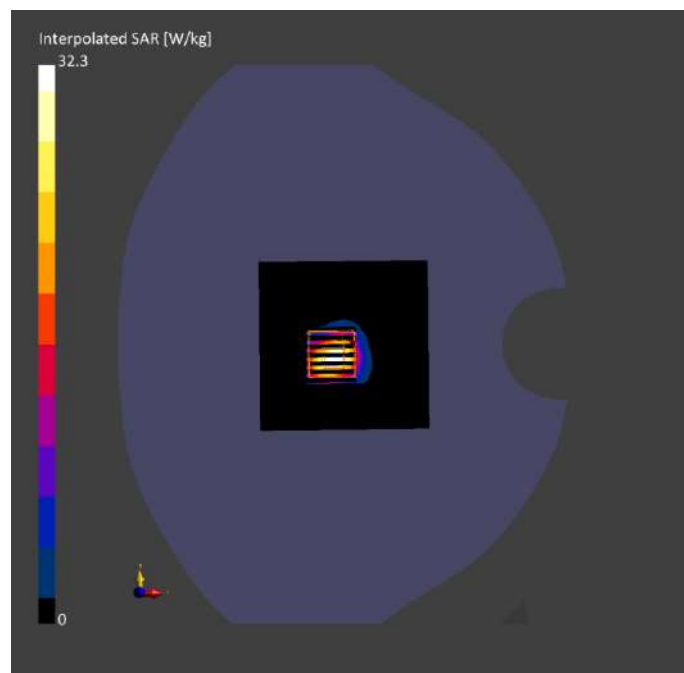

System Performance Check Data (5250MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D5GHZV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		Validation n band	CW, 0--	5250.0, 5250	5.74	4.59	36.5	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-13	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-13	2024-09-13
psSAR1g [W/kg]	7.75	7.84
psSAR10g [W/kg]	2.19	2.25
Power Drift [dB]	0.02	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.3
Dist 3dB Peak [mm]		7.1

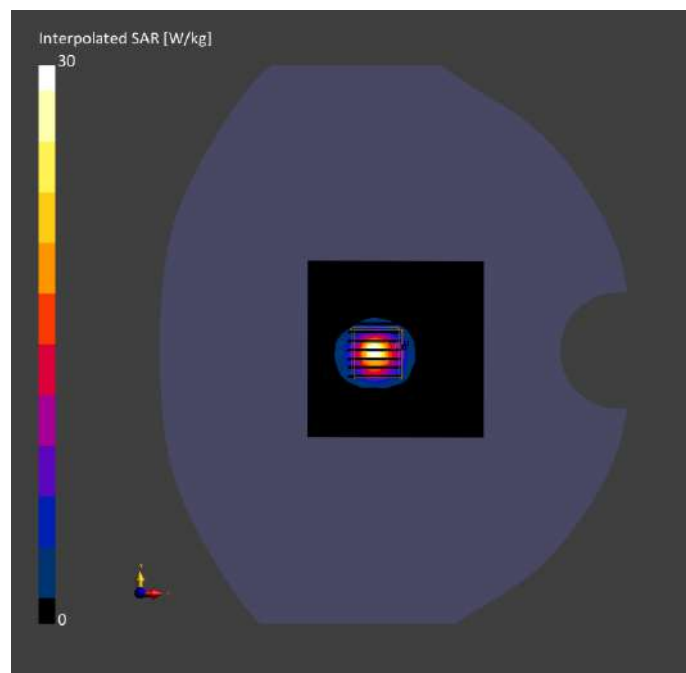

System Performance Check Data (5600MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D5GHZV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		Validation n band	CW, 0--	5600.0, 5600	5.00	5.09	35.8	22.4	21.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-11	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-11	2024-09-11
psSAR1g [W/kg]	7.96	8.19
psSAR10g [W/kg]	2.21	2.36
Power Drift [dB]	-0.02	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.8
Dist 3dB Peak [mm]		6.9

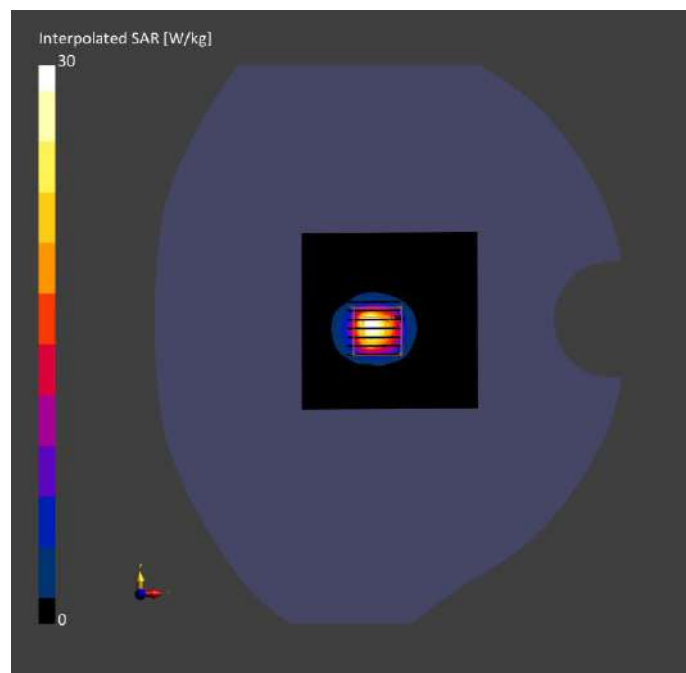

System Performance Check Data (5600MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D5GHZV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, TSL	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D5GH z	CW, 0--	5600.0, 5600	5.00	5.12	34.7	22.4	21.3

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-09-14	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-14	2024-09-14
psSAR1g [W/kg]	7.97	8.25
psSAR10g [W/kg]	2.21	2.33
Power Drift [dB]	0.05	0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.3
Dist 3dB Peak [mm]		7.8

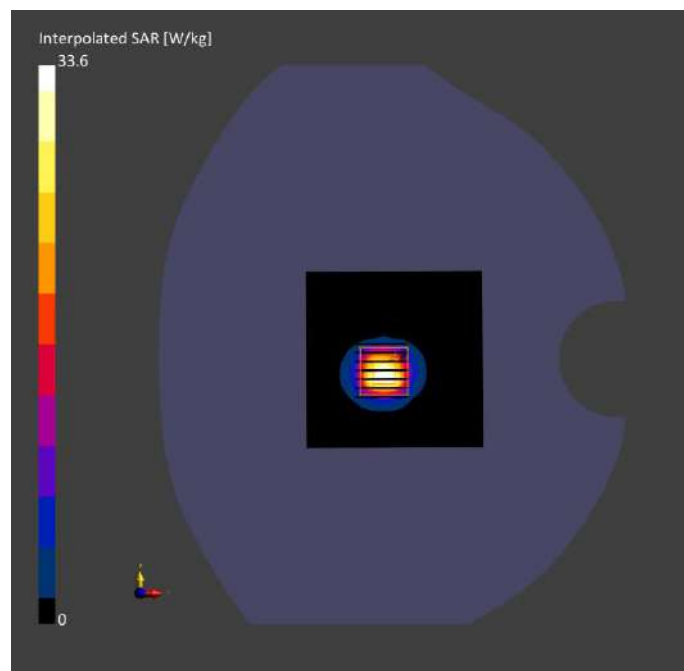

System Performance Check Data (5750MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D5GHZV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		Validation n band	CW, 0--	5750.0, 5750	5.04	5.17	35.4	22.8	21.7

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-09-12	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-12	2024-09-12
psSAR1g [W/kg]	7.69	7.81
psSAR10g [W/kg]	2.28	2.34
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		63.5
Dist 3dB Peak [mm]		7.2

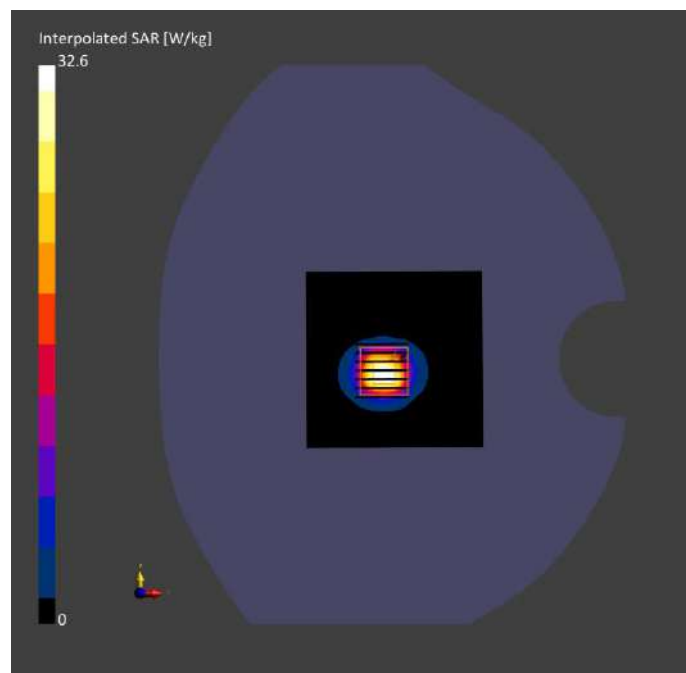

System Performance Check Data (5750MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D5GHZV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom	Position, Test Section, TSL	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		D5GHZ	CW, 0--	5750.0, 5750	5.04	5.26	35.0	22.3	21.4

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date		DAE, Calibration Date	
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-09-15	EX3DV4 - SN7510,	2024-06-25	DAE4 Sn1711,	2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface	VMS + 6p	VMS + 6p
Detection		
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-15	2024-09-15
psSAR1g [W/kg]	7.84	7.95
psSAR10g [W/kg]	2.18	2.31
Power Drift [dB]	-0.03	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.2
Dist 3dB Peak [mm]		7.1

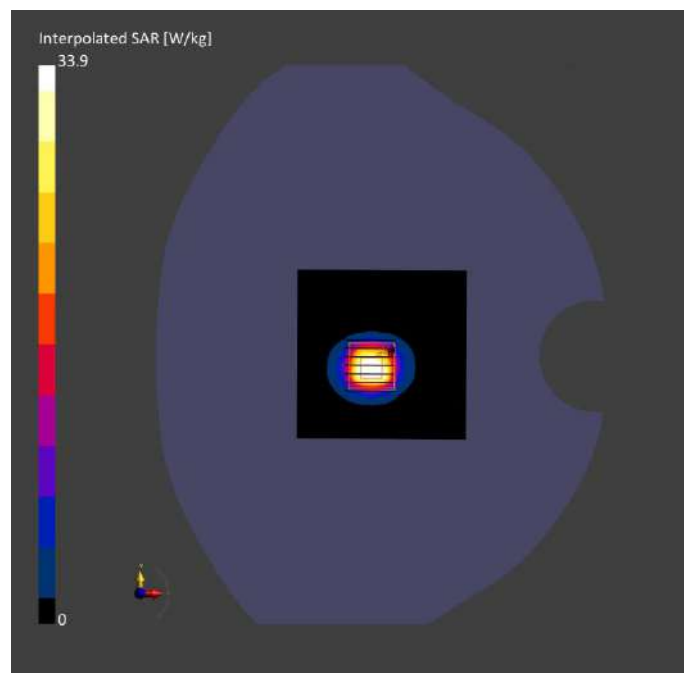

System Performance Check Data (6500MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D6.5GHzV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		Validation n band	CW, 0--	6500.0, 6500	5.45	6.08	34.5	22.5	21.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-23	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-23	2024-08-23
psSAR1g [W/kg]	27.1	29.2
psSAR10g [W/kg]	5.09	5.43
APD 4cm² [W/m²]		135
Power Drift [dB]	0.02	0.04
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.5
Dist 3dB Peak [mm]		5.3

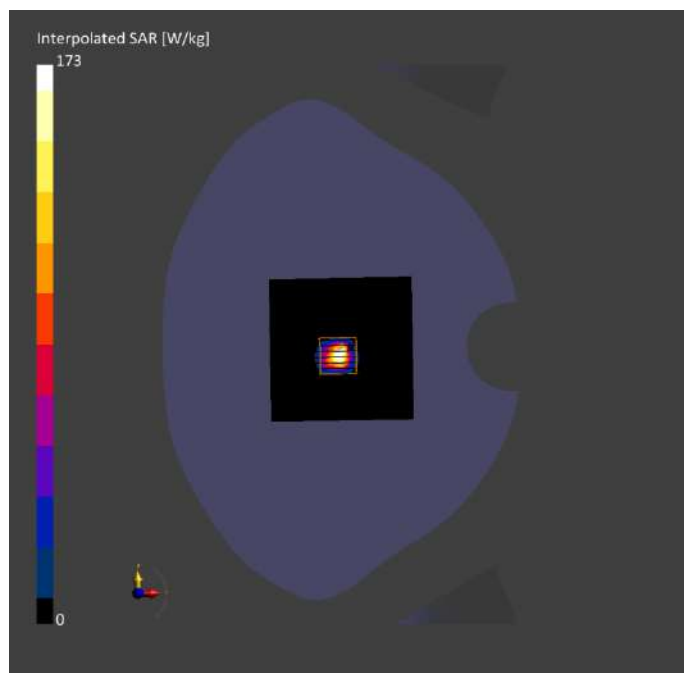

System Performance Check Data (6500MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D6.5GHzV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		Validation n band	CW, 0--	6500.0, 6500	5.45	5.97	33.8	22.5	21.4

Hardware Setup


Phantom	TSL, Measured Date		Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000	2024-08-24	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-24	2024-08-24
psSAR1g [W/kg]	27.5	29.8
psSAR10g [W/kg]	5.11	5.45
APD 4cm² [W/m²]		137
Power Drift [dB]	0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.8
Dist 3dB Peak [mm]		5.4

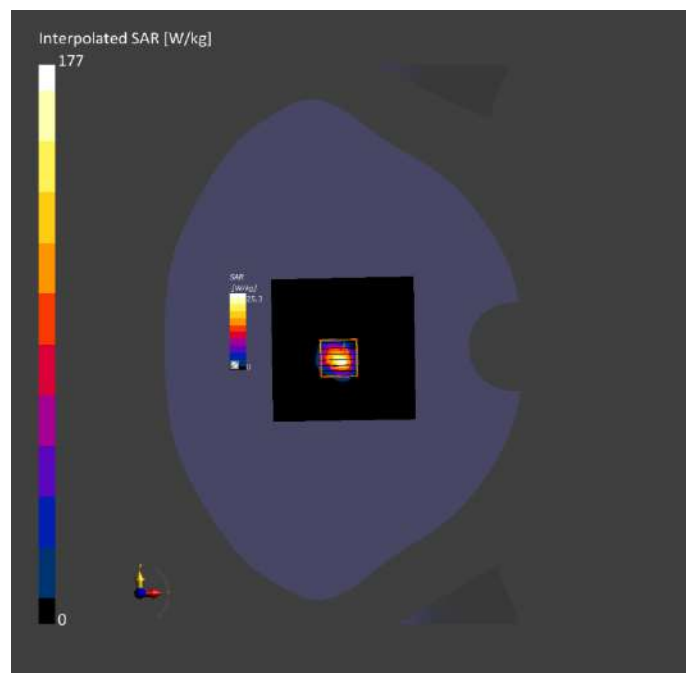

System Performance Check Data (6500MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
D6.5GHzV2, SPEAG	10.0 x 10.0 x 3.0	Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL		Validation n band	CW, 0--	6500.0, 6500	5.45	6.21	34.6	22.1	21.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-25	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-25	2024-08-25
psSAR1g [W/kg]	28.8	30.2
psSAR10g [W/kg]	5.23	5.48
APD 4cm² [W/m²]		138
Power Drift [dB]	0.05	0.08
Power Scaling	Disabled	Disabled
Scaling Factor		
[dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.7
Dist 3dB Peak [mm]		6.1

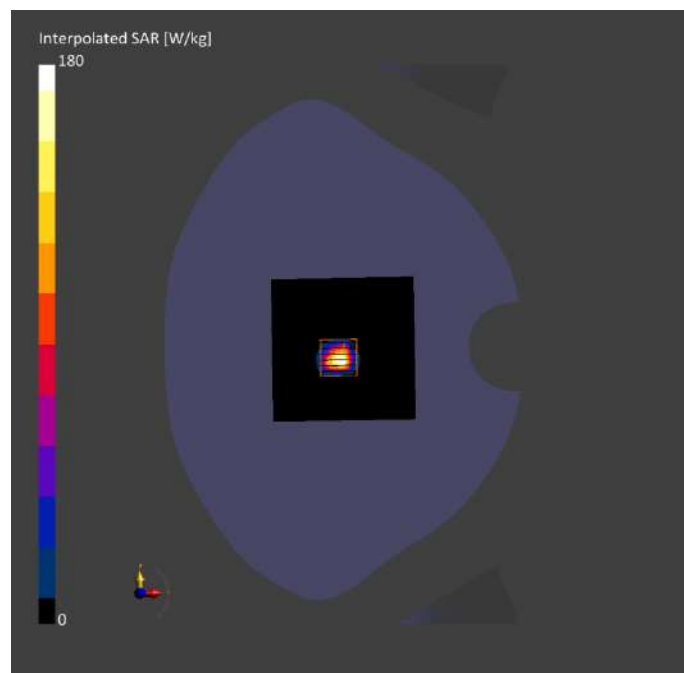

ANNEX C TEST DATA

Meas.1 Left Head with Cheek on Low Channel in GSM850 2Slots mode with Antenna 1

Date: 2024.08.27

Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.403$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH128/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.829 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.157 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.95 W/kg

SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 0.795 W/kg

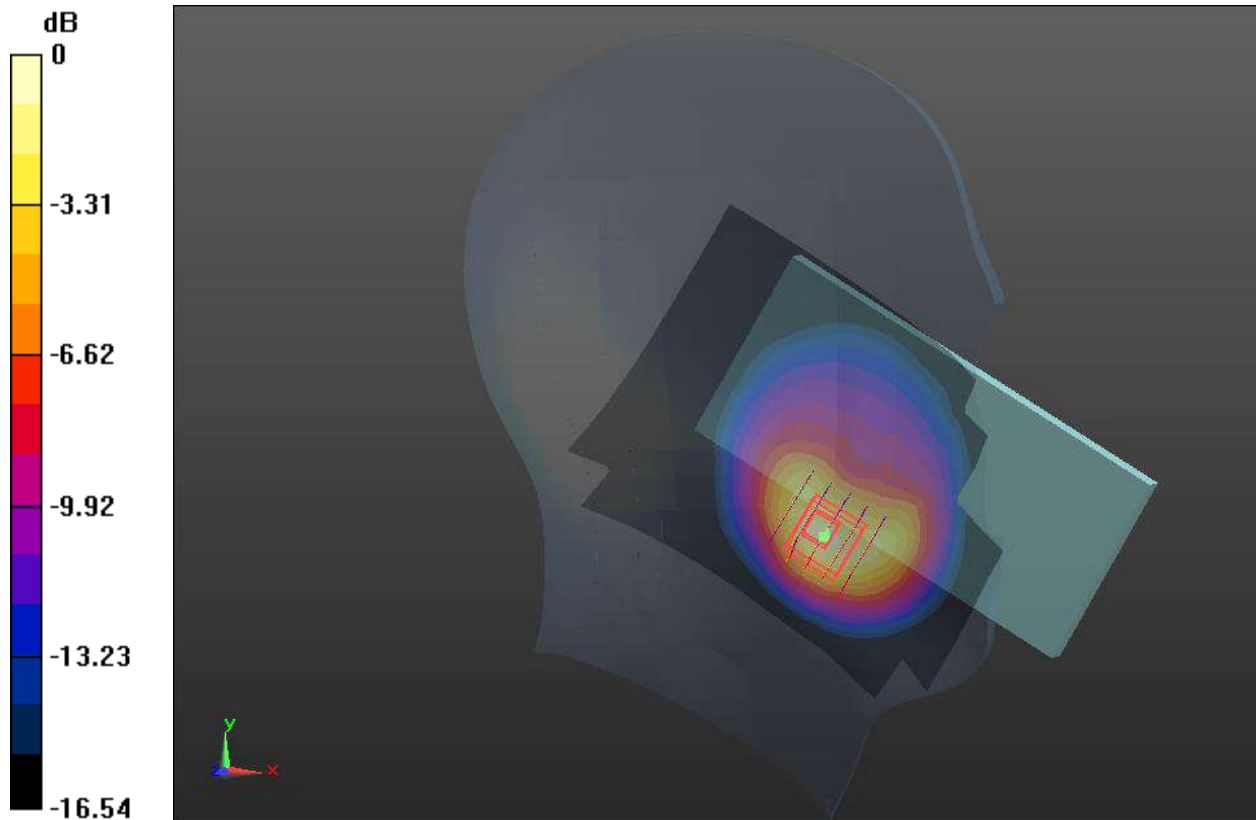

0 dB = 0.795 W/kg

Meas.2 Body with Back Side 15mm on Low Channel in GPRS850 2Slots mode with Antenna 1

Date: 2024.08.27

Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.403$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH128/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.206 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.175 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.191 W/kg

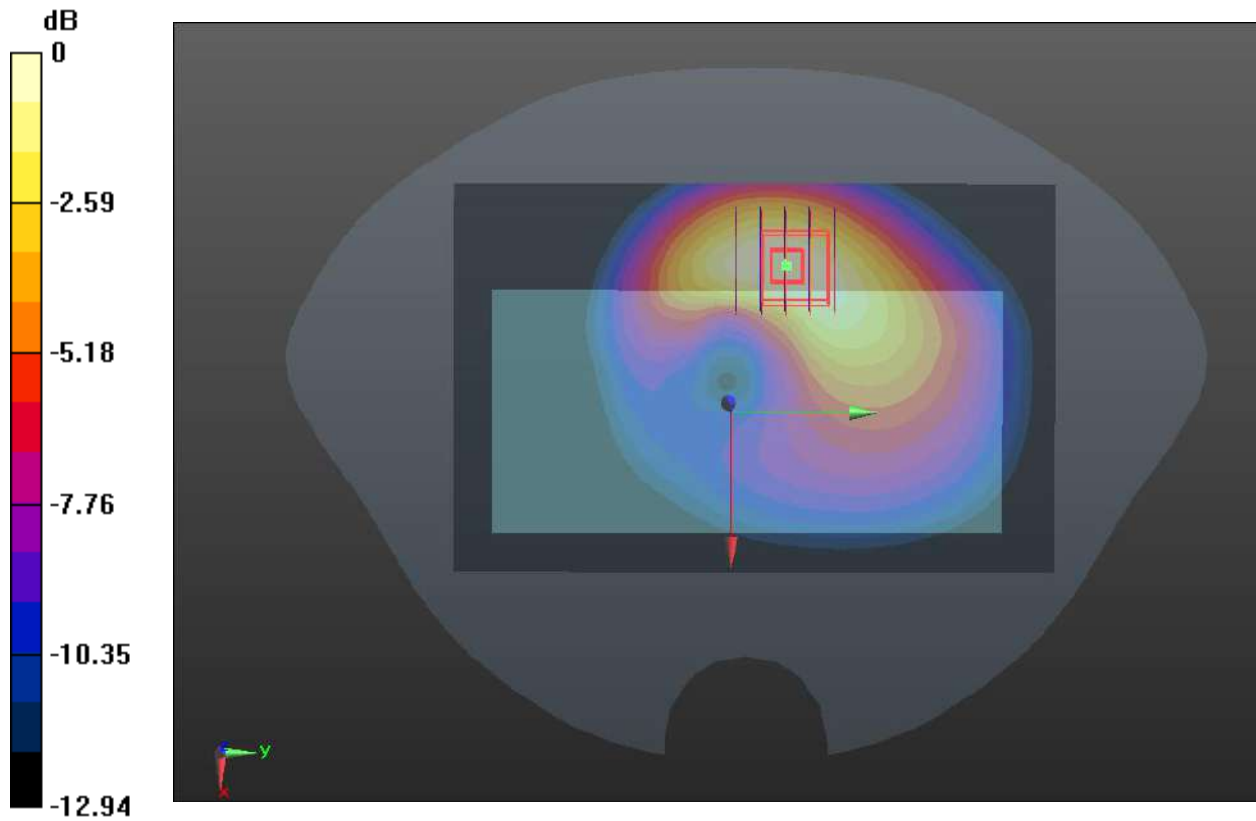

0 dB = 0.191 W/kg

Meas.3 Body with Left Edge 10mm on Low Channel in GSM850 2Slots mode with Antenna 1

Date: 2024.08.27

Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.403$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH128/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.263 W/kg


CH128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.222 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.218 W/kg

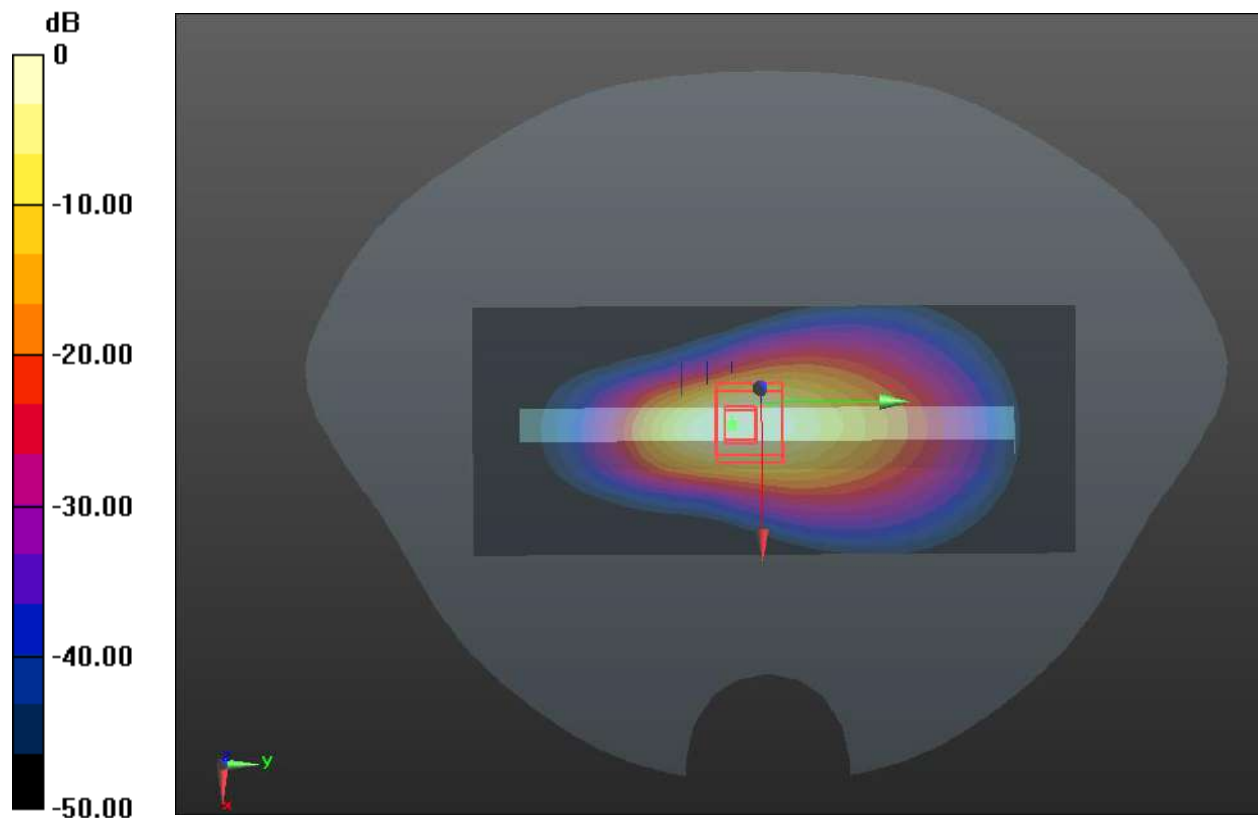

0 dB = 0.218 W/kg

Meas.4 Right Head with Cheek on Middle Channel in GSM1900 2Slots mode with Antenna 2

Date: 2024.08.23

Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.398$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH661/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.845 W/kg


CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.30 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.377 W/kg

Maximum value of SAR (measured) = 0.682 W/kg

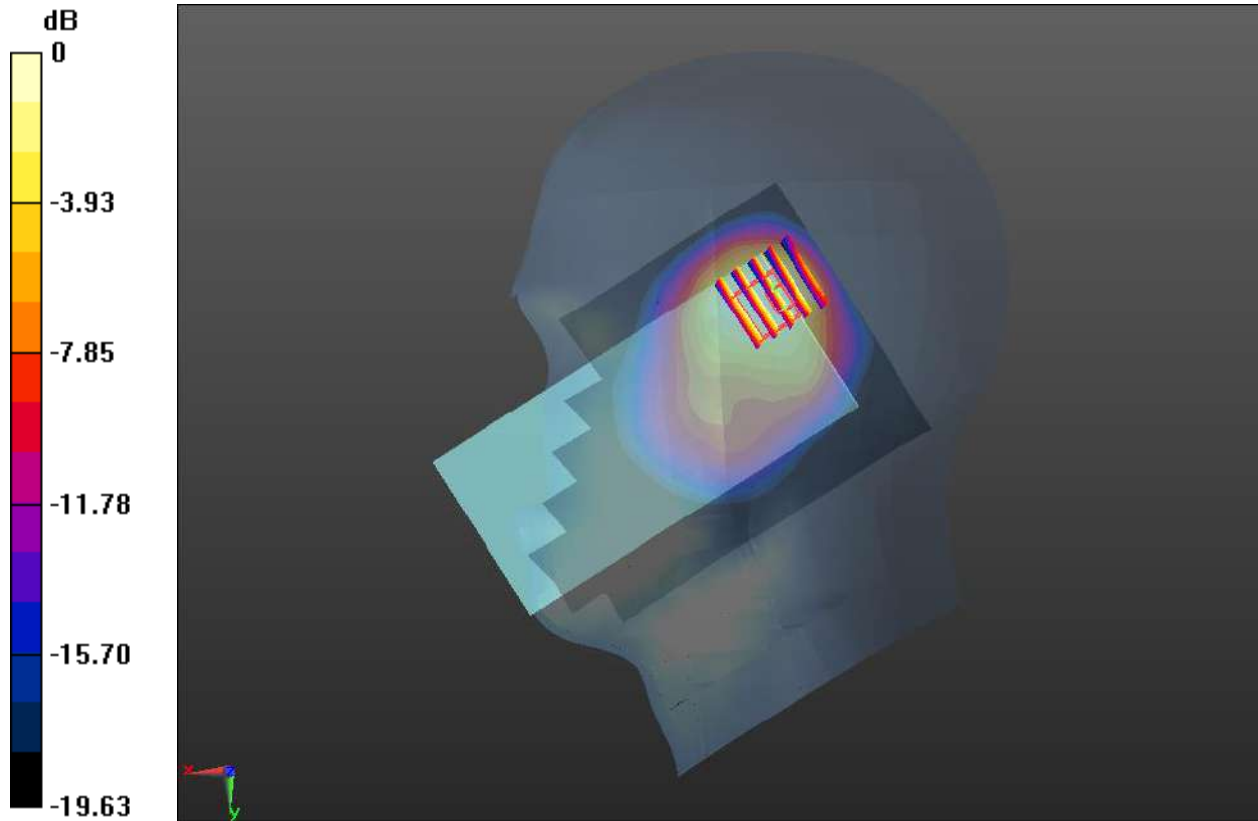

0 dB = 0.682 W/kg

Meas.5 Body with Back Side 15mm on Middle Channel in GSM1900 2Slots mode with Antenna 2

Date: 2024.08.23

Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.398$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH661/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.167 W/kg


CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.133 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.224 W/kg

SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.087 W/kg

Maximum value of SAR (measured) = 0.148 W/kg

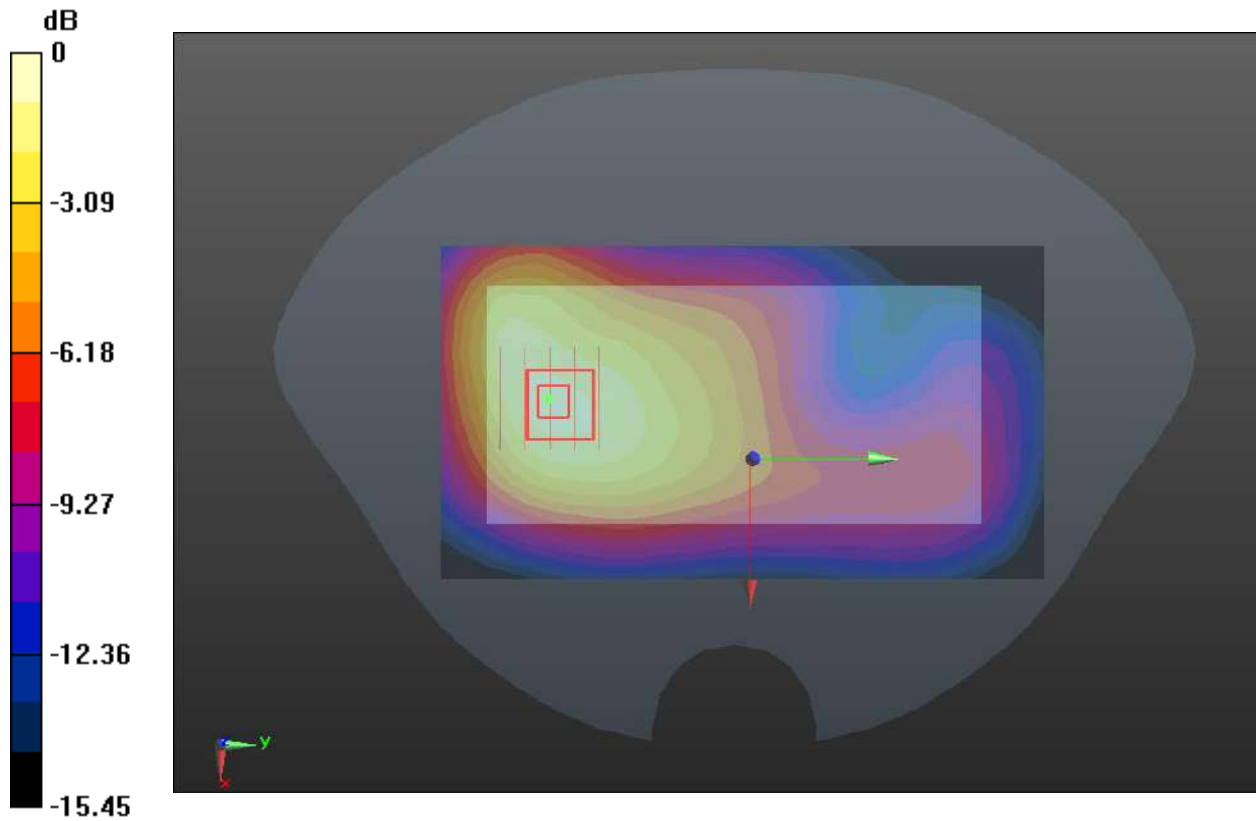

0 dB = 0.148 W/kg

Meas.6 Body Plane with Top Edge 10mm on Middle Channel in GSM 1900 2Slots mode with Antenna 2

Date: 2024.08.23

Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:4.1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.398$ S/m; $\epsilon_r = 40.192$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.474 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.22 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.220 W/kg

Maximum value of SAR (measured) = 0.422 W/kg

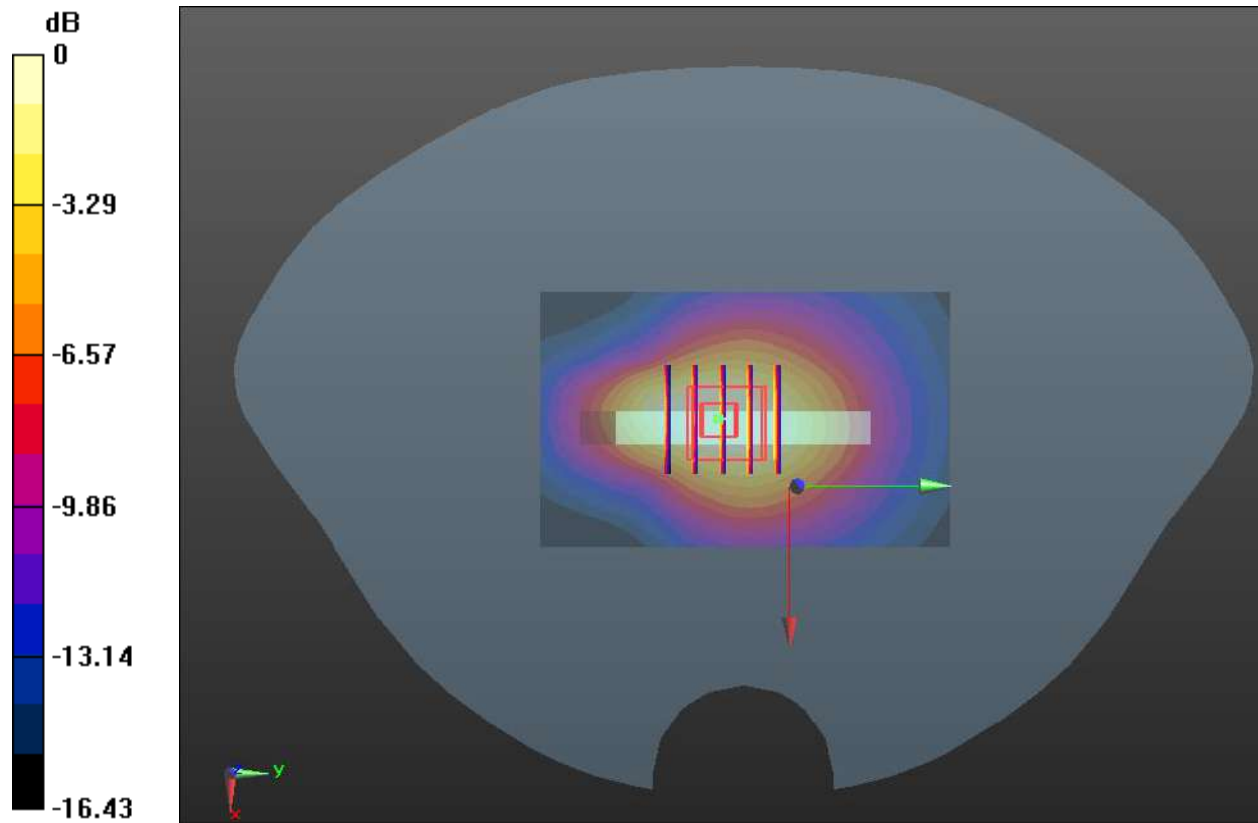

Meas.7 Right Head with Cheek on Low Channel in WCDMA Band2 mode with Antenna 2

Date: 2024.08.23

Communication System Band: BAND 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.208$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.851 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.97 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.608 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.660 W/kg

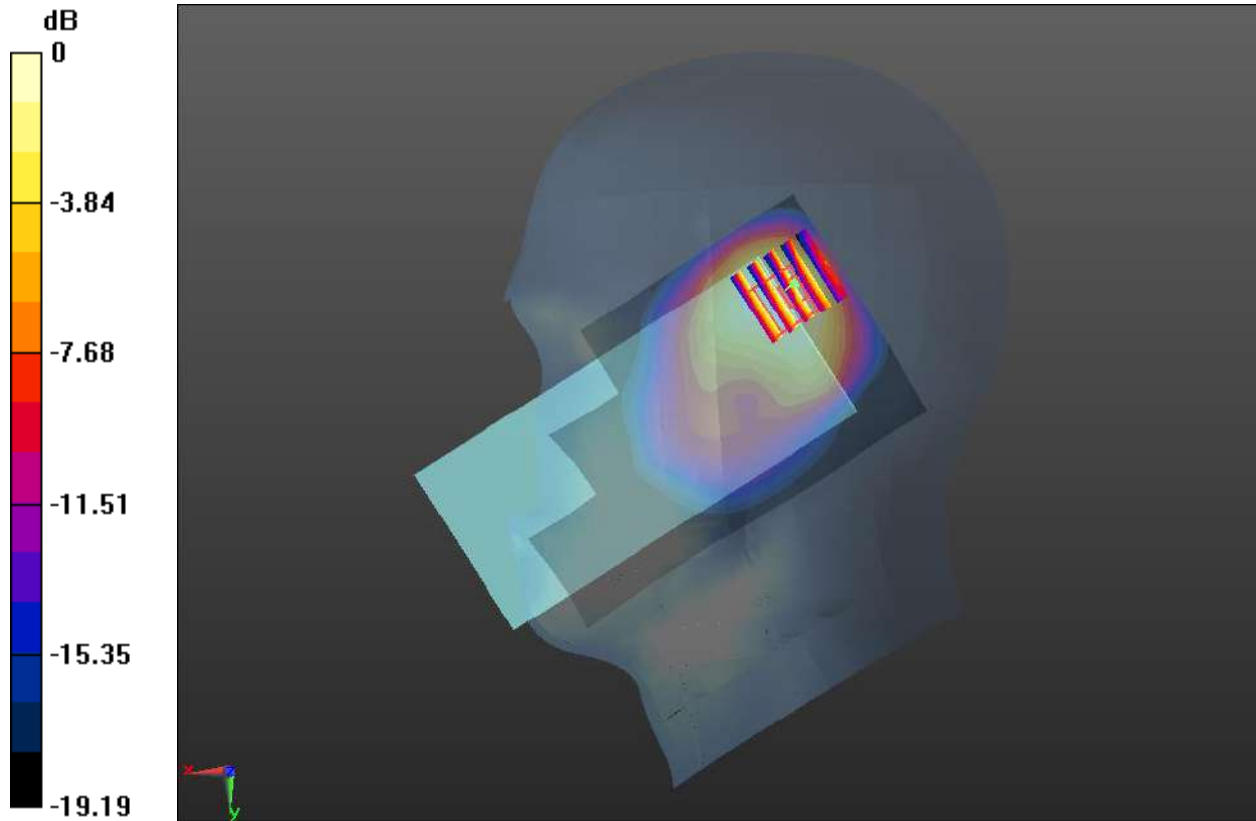

0 dB = 0.660 W/kg

Meas.8 Body Plane with Back Side 15mm on Low Channel in WCDMA Band2 with Antenna 3

Date: 2024.08.23

Communication System Band: BAND 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.208$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH9262/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.217 W/kg


CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.900 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

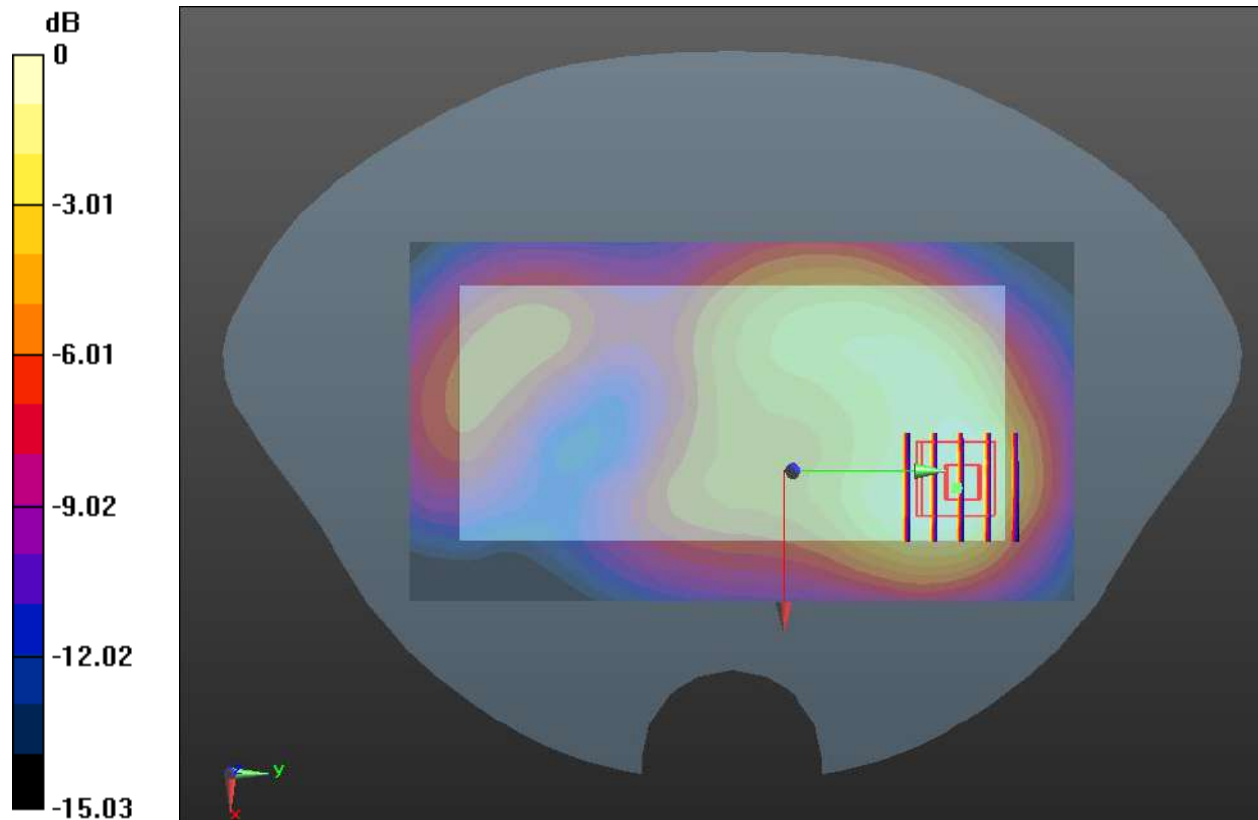

0 dB = 0.193 W/kg

Meas.9 Body Plane with Bottom Edge 10mm on Low Channel in WCDMA Band2 with Antenna 3

Date: 2024.08.23

Communication System Band: BAND 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.208$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH9262/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.558 W/kg


CH9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.42 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.783 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.511 W/kg

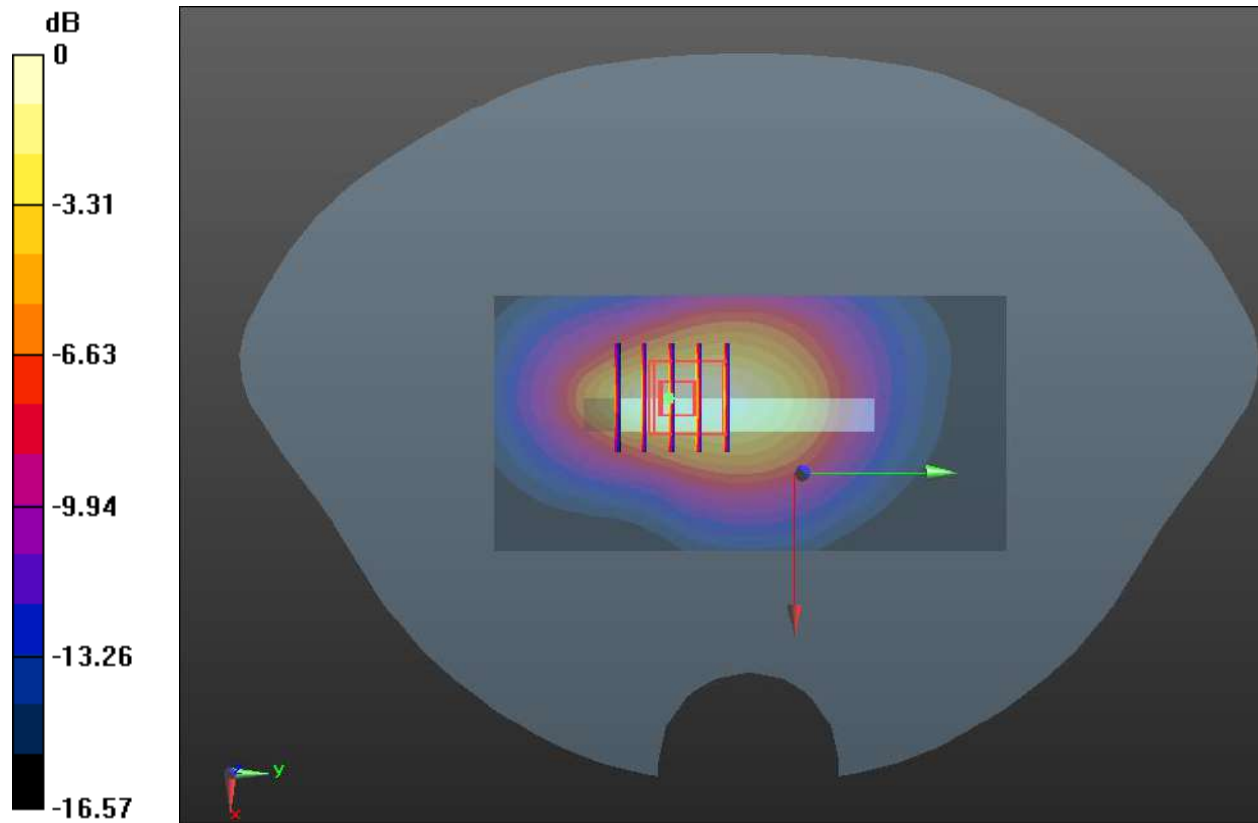

0 dB = 0.511 W/kg

Meas.10 Body Plane with Top Edge 0mm on Low Channel in WCDMA Band2 mode with Antenna 2

Date: 2024.08.23

Communication System Band: BAND 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.208$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.57 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 60.68 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 7.74 W/kg

SAR(1 g) = 3.9 W/kg; SAR(10 g) = 1.92 W/kg

Maximum value of SAR (measured) = 4.47 W/kg

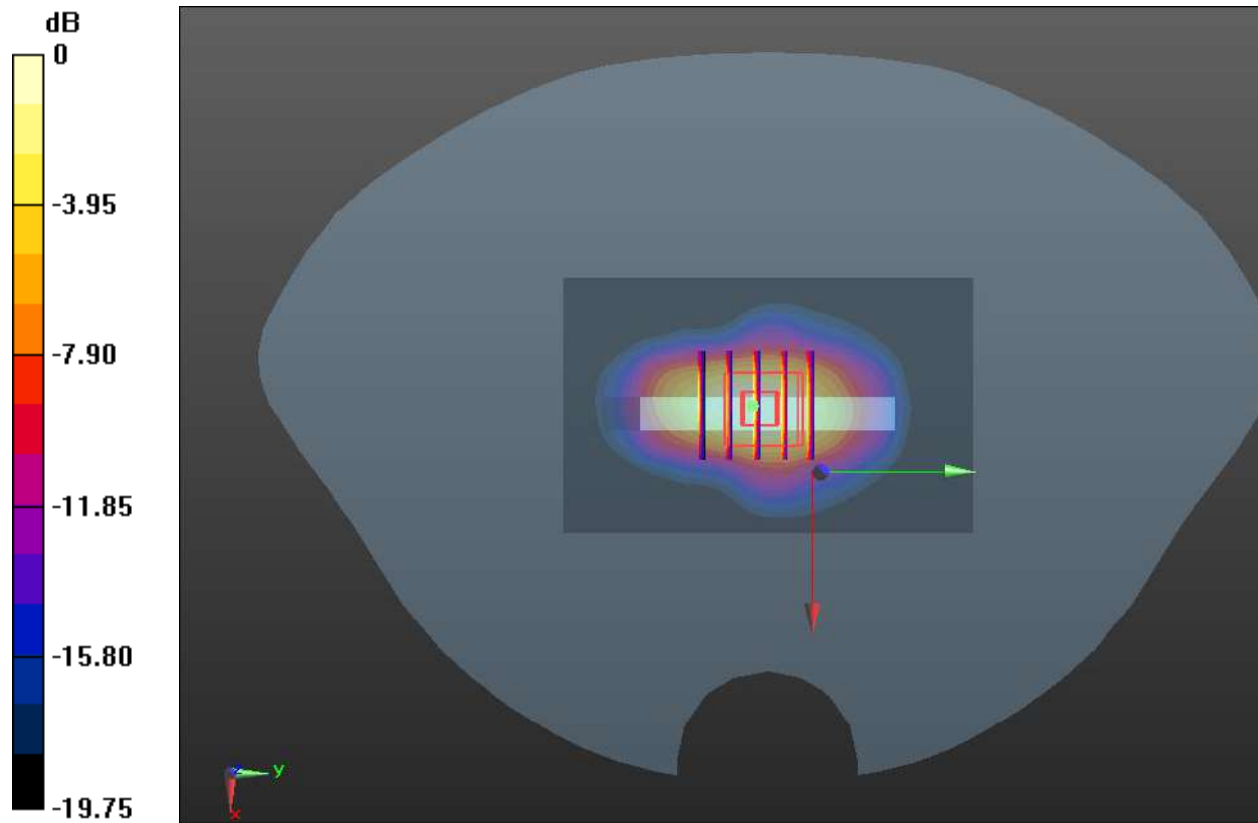

0 dB = 4.47 W/kg

Meas.11 Right Head with Cheek on Low Channel in WCDMA Band4 mode with Antenna 2

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.643$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1312/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.834 W/kg


Ch1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.21 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.340 W/kg

Maximum value of SAR (measured) = 0.704 W/kg

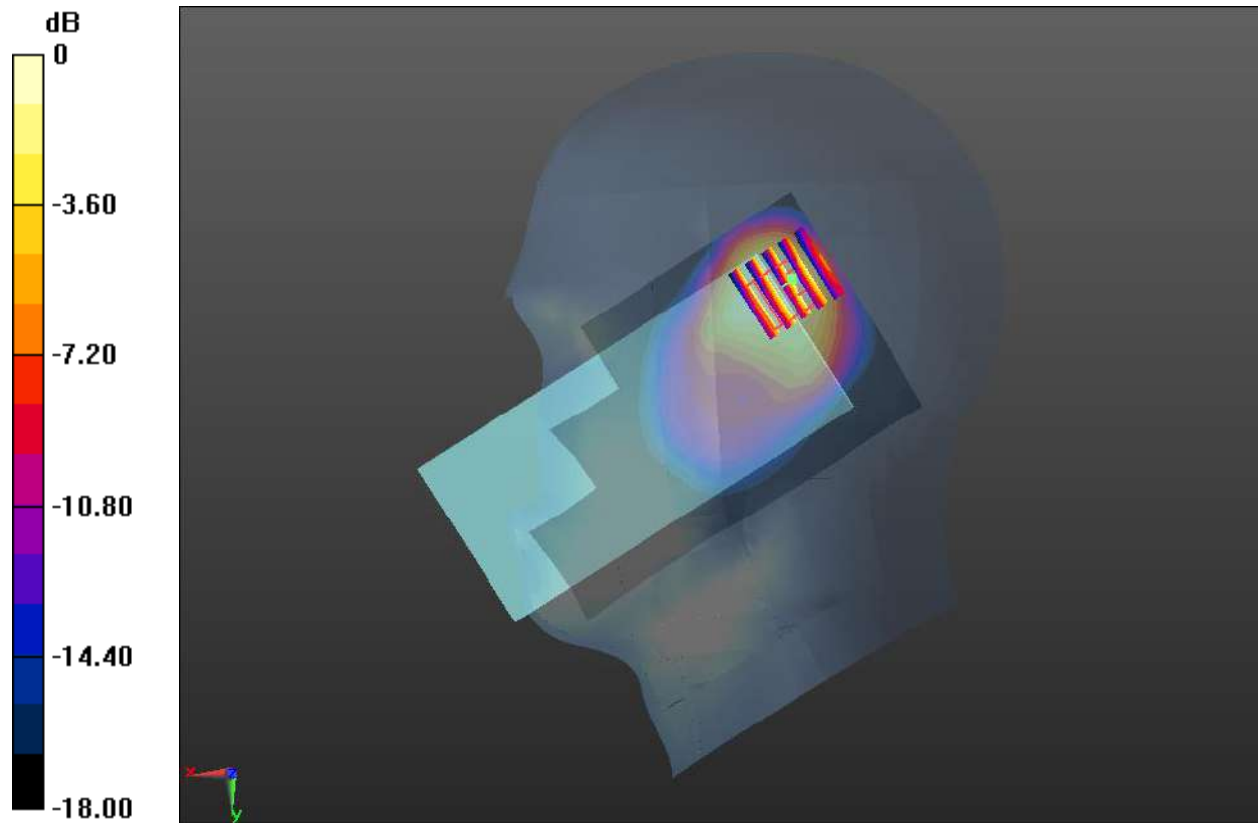

0 dB = 0.704 W/kg

Meas.12 Body Plane with Back Side 15mm on Middle Channel in WCDMA Band4 mode with Antenna 2

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH1412/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.577 W/kg


CH1412/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.21 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.572 W/kg

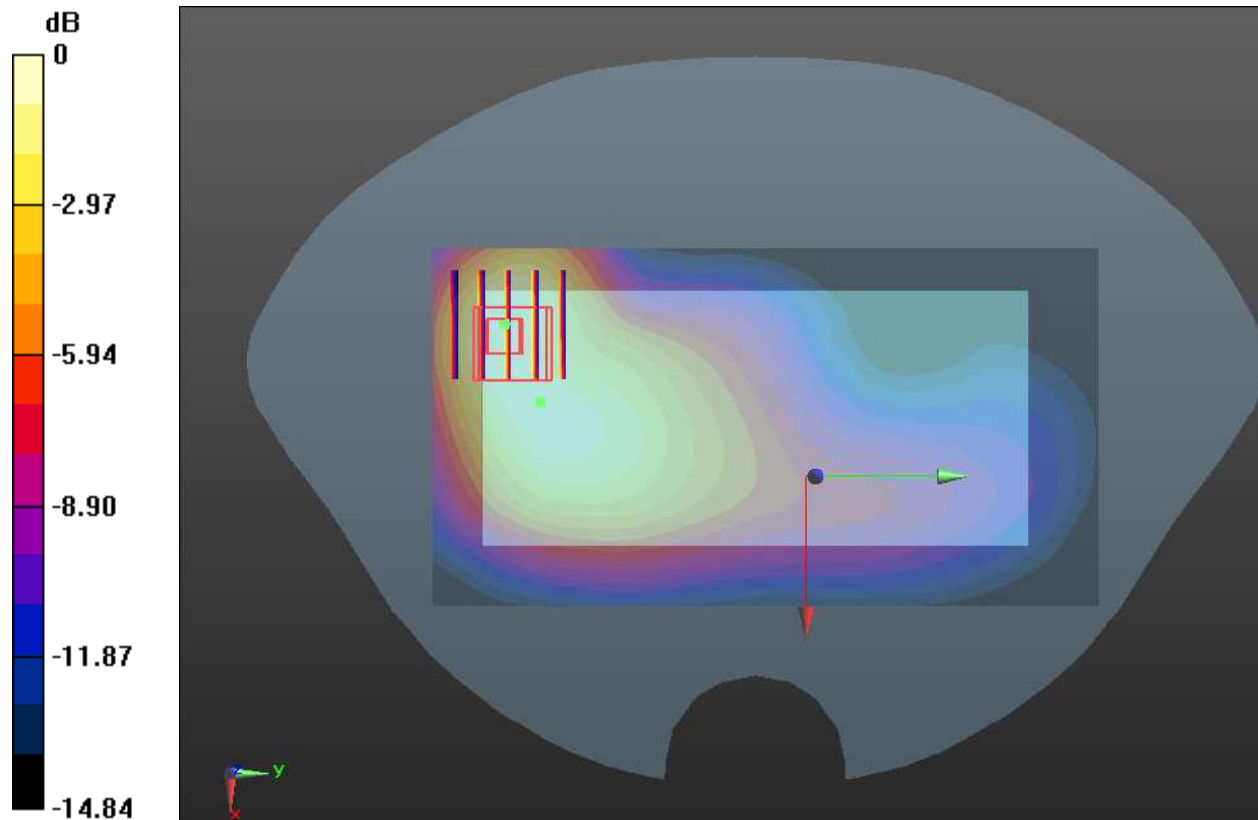

0 dB = 0.572 W/kg

Meas.13 Body Plane with Bottom Edge 10mm on High Channel in WCDMA Band4 with Antenna 3

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.381$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH1513/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.566 W/kg


CH1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.11 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.795 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.527 W/kg

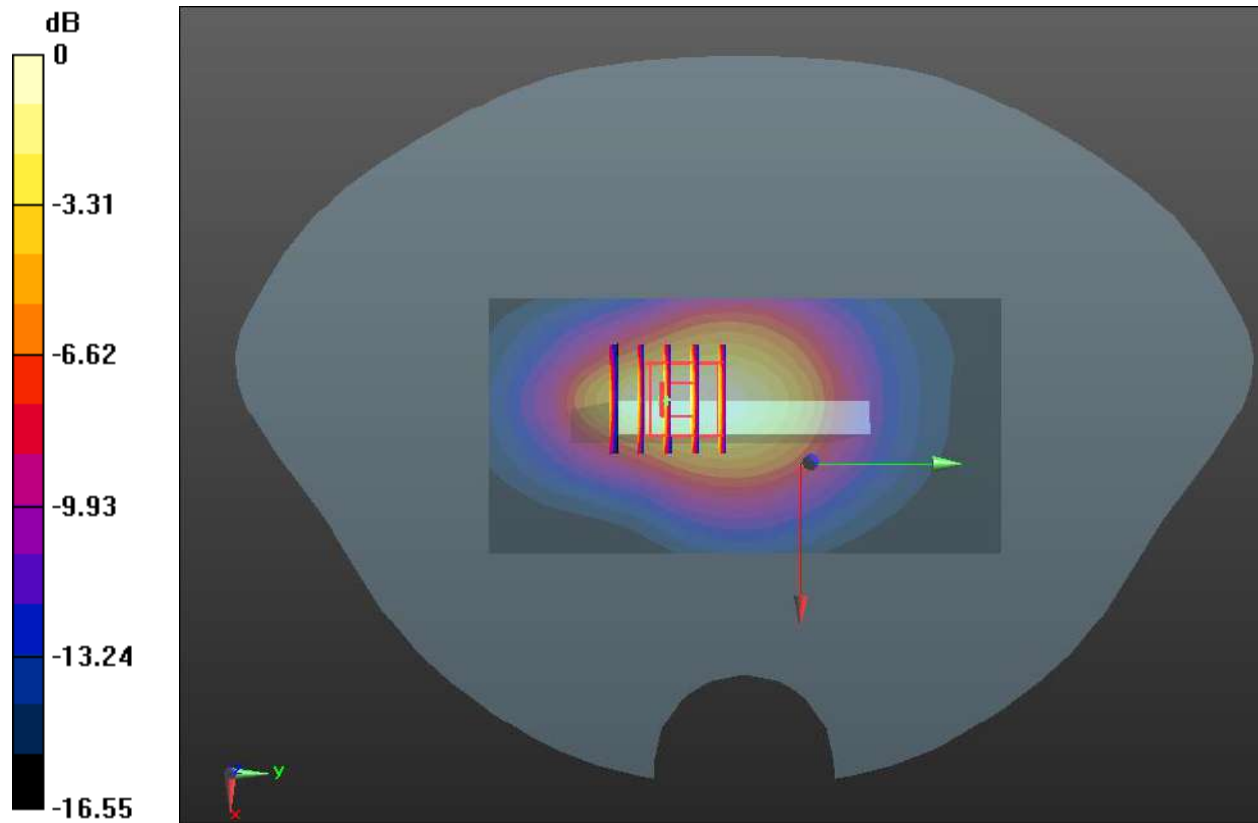

Meas.14 Body Plane with Back Side 0mm on High Channel in WCDMA Band4 mode with Antenna 3

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 39.381$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH1513/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.71 W/kg


CH1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.897 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 4.75 W/kg

SAR(1 g) = 2.22 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 2.54 W/kg

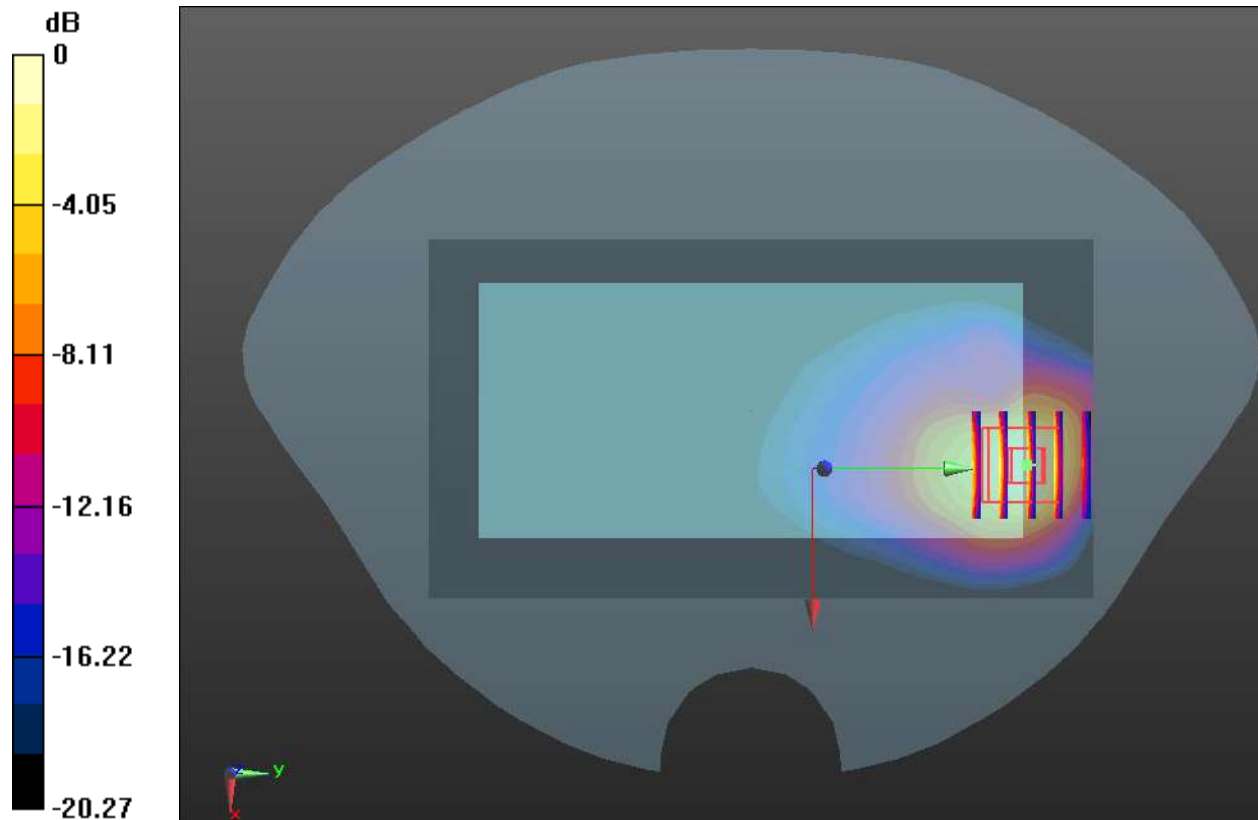

Meas.15 Left Head with Cheek on Low Channel in WCDMA Band5 mode with Antenna 1

Date: 2024.08.27

Communication System Band: BAND 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.363$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH4132/Area Scan (81x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.739 W/kg


CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.297 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.669 W/kg

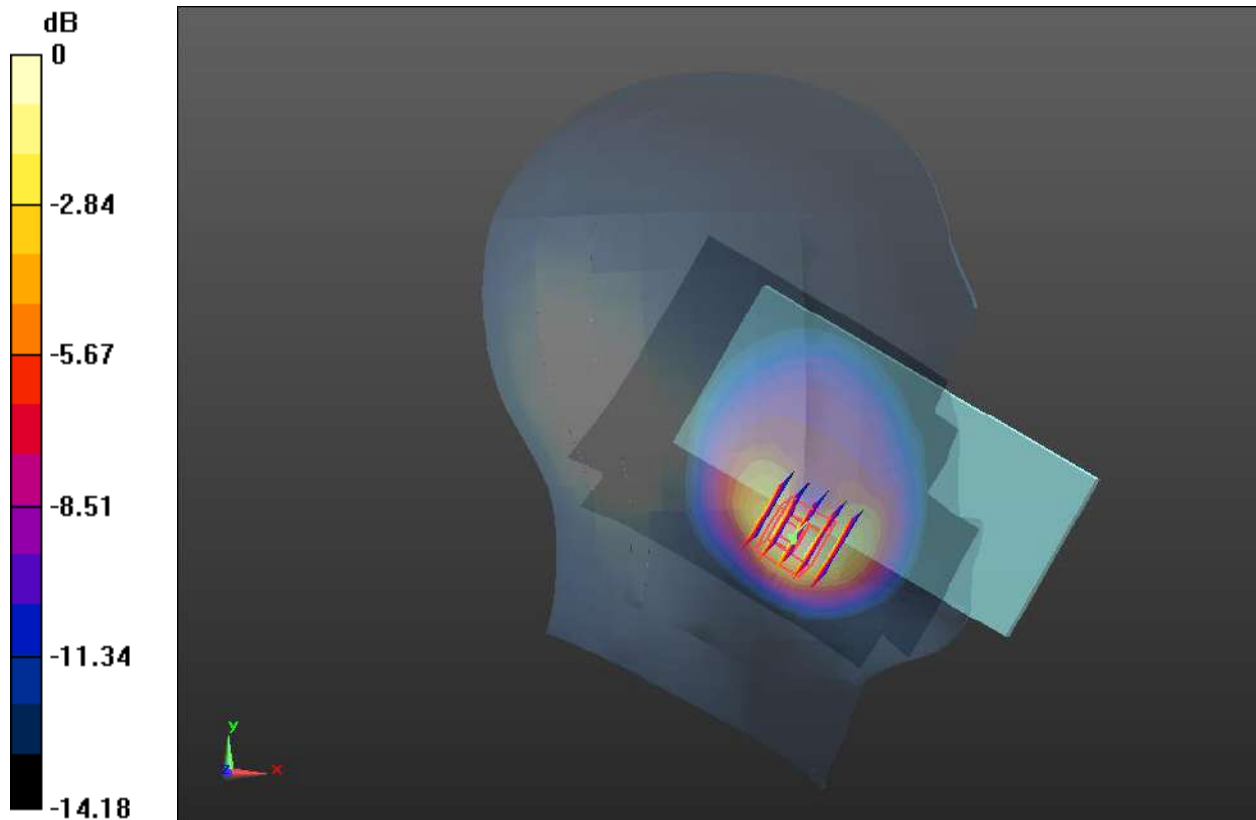

0 dB = 0.669 W/kg

Meas.16 Body Plane with Back Side 15mm on Low Channel in WCDMA Band5 mode with Antenna 1

Date: 2024.08.27

Communication System Band: BAND 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.363$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4132/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.796 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.459 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.189 W/kg

Maximum value of SAR (measured) = 0.322 W/kg

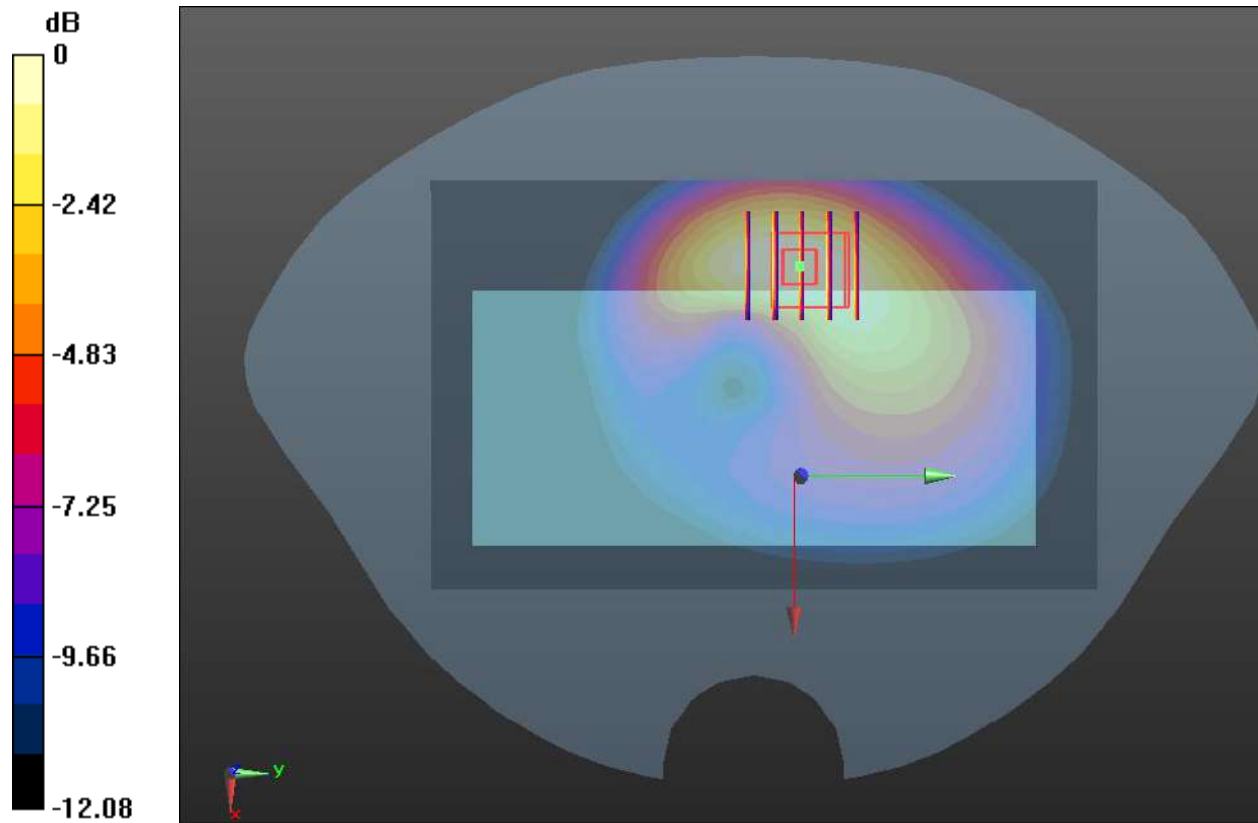

0 dB = 0.322 W/kg

Meas.17 Body Plane with Left Edge 10mm on Low Channel in WCDMA Band5 mode with Antenna 1

Date: 2024.08.27

Communication System Band: BAND 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.363$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4132/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.782 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.55 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.720 W/kg

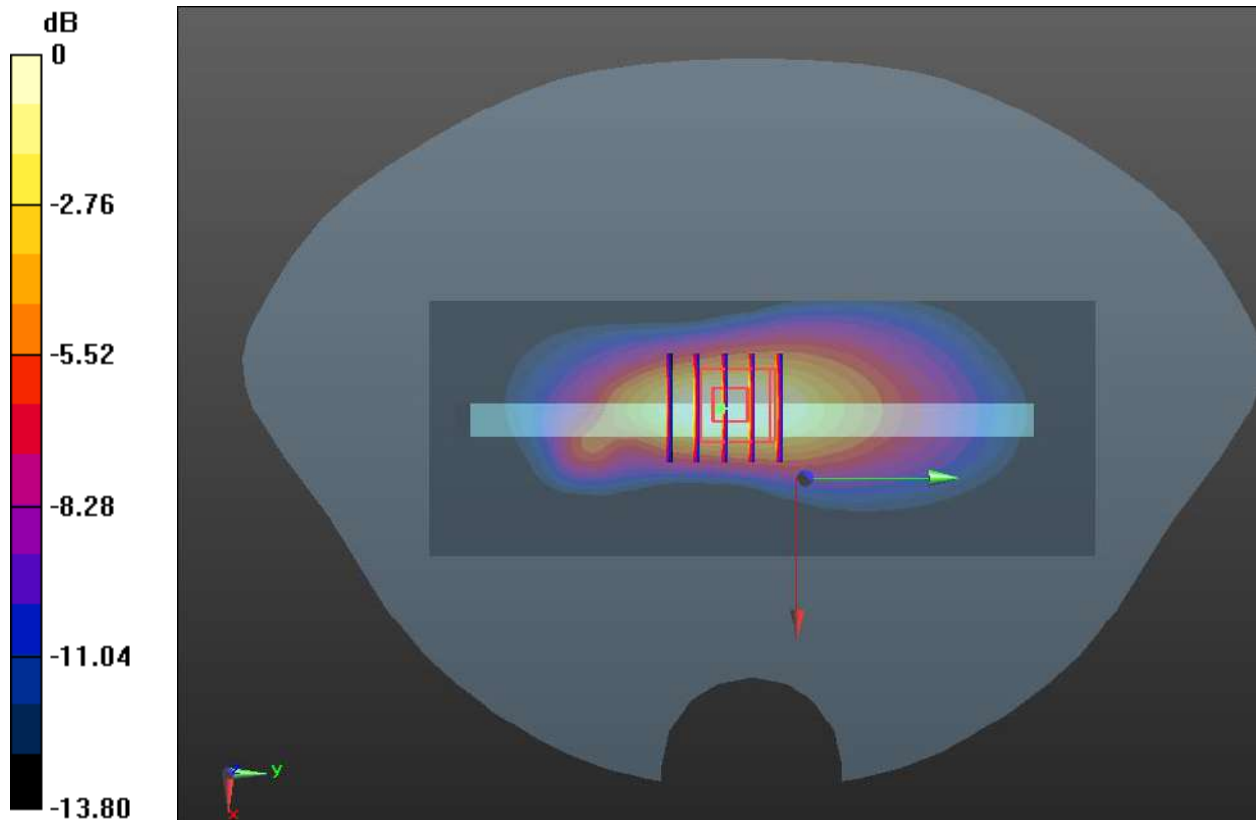

Meas.18 Body Plane with Left Edge 0mm on Low Channel in WCDMA Band5 mode with Antenna 1

Date: 2024.08.27

Communication System Band: BAND 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.363$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4132/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.77 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.05 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 7.99 W/kg

SAR(1 g) = 3.08 W/kg; SAR(10 g) = 1.38 W/kg

Maximum value of SAR (measured) = 4.01 W/kg

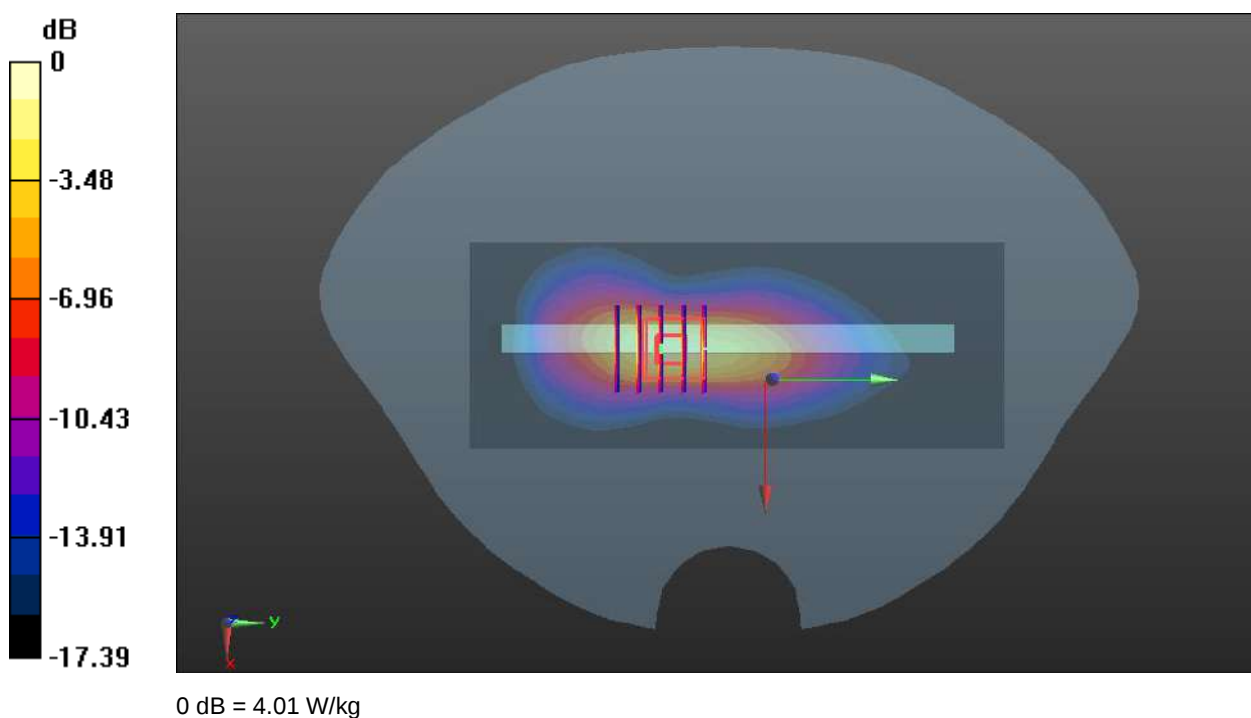

Meas.19 Right Head with Cheek on High Channel in LTE Band2 mode with Antenna 2

Date: 2024.08.22

Communication System Band: BAND 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.816$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1900/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


Ch1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.19 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 0.792 W/kg

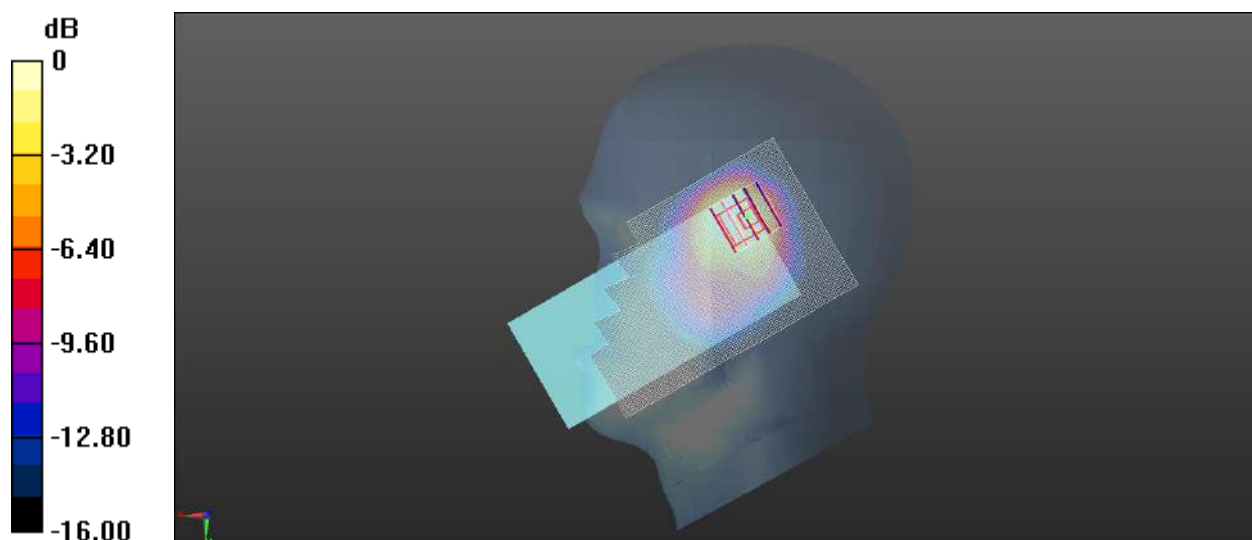

0 dB = 0.792 W/kg

Meas.20 Body Plane with Back Side 15mm on High Channel in LTE Band2 mode with Antenna 2

Date: 2024.08.22

Communication System Band: BAND 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.816$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch19100/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.325 W/kg


Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.77 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.313 W/kg

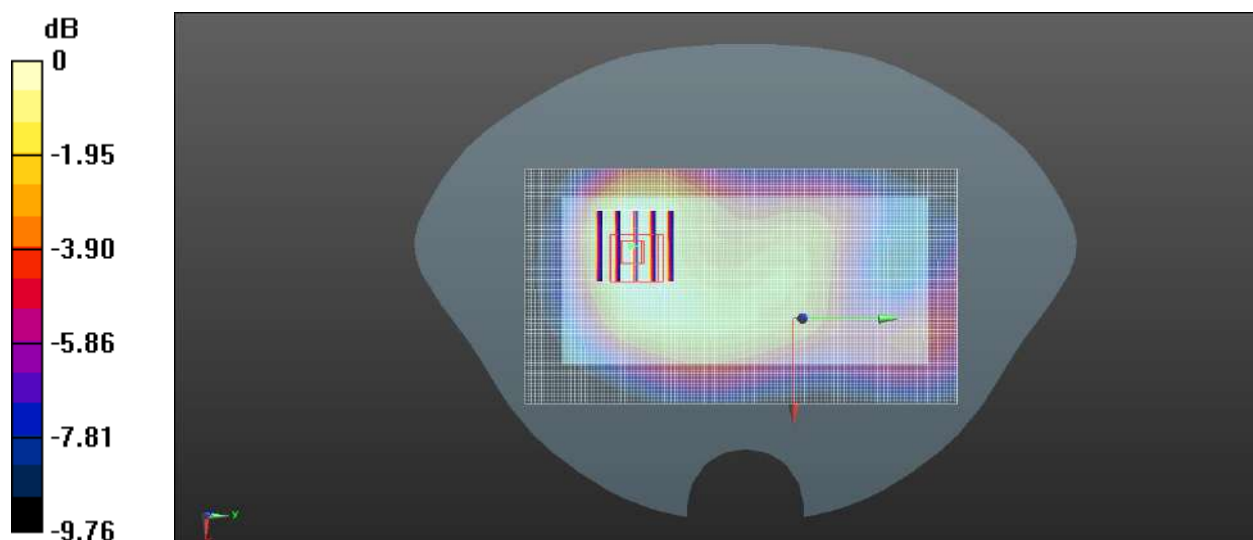

0 dB = 0.313 W/kg

Meas.21 Body Plane with Bottom Edge 10mm on High Channel in LTE Band2 mode with Antenna 3

Date: 2024.08.22

Communication System Band: BAND 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.816$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch19100/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.419 W/kg



Ch19100/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.22 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.591 W/kg

SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.385 W/kg

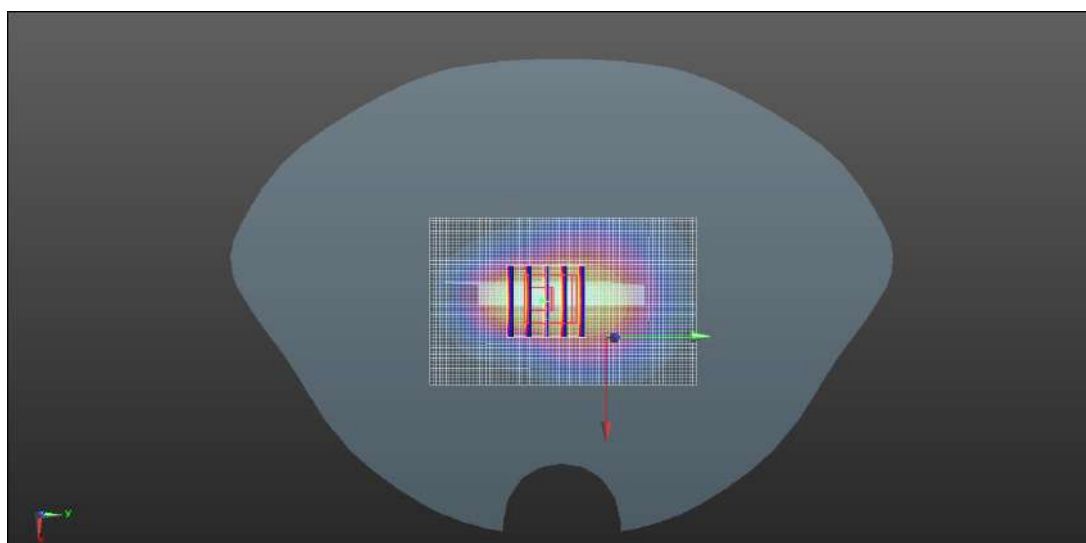

0 dB = 0.385 W/kg

Meas.22 Body Plane with Top Edge 0mm on Low Channel in LTE Band2 mode with Antenna 2

Date: 2024.08.22

Communication System Band: BAND 2; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch18700/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.12 W/kg


Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.58 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 3.28 W/kg; SAR(10 g) = 1.62 W/kg

Maximum value of SAR (measured) = 3.76 W/kg

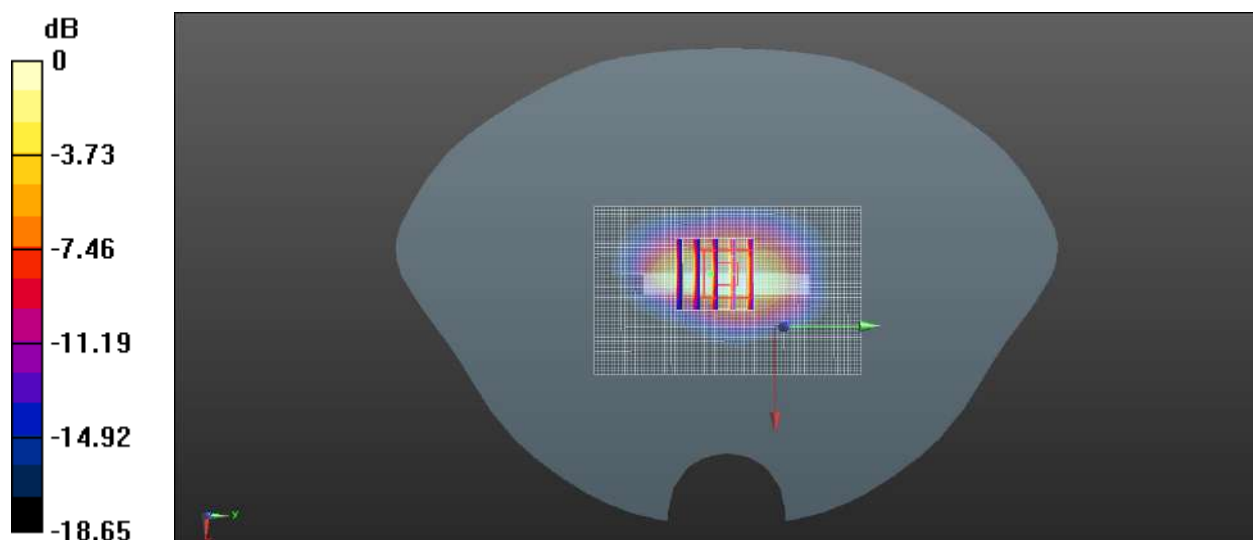

0 dB = 3.76 W/kg

Meas.23 Right Head with Cheek on Middle Channel in LTE Band4 mode with Antenna 4

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20175/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.820 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.214 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.774 W/kg

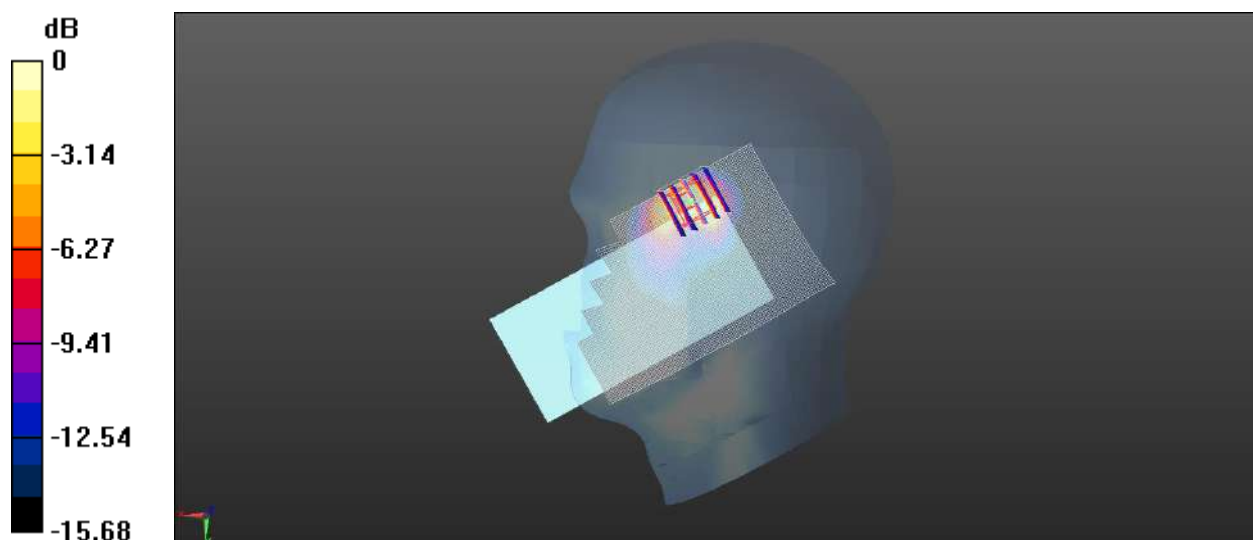

0 dB = 0.774 W/kg

Meas.24 Body Plane with Back Side 15mm on Middle Channel in LTE Band4 mode with Antenna 2

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20175/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.884 W/kg



Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.43 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.812 W/kg; SAR(10 g) = 0.540 W/kg

Maximum value of SAR (measured) = 0.857 W/kg

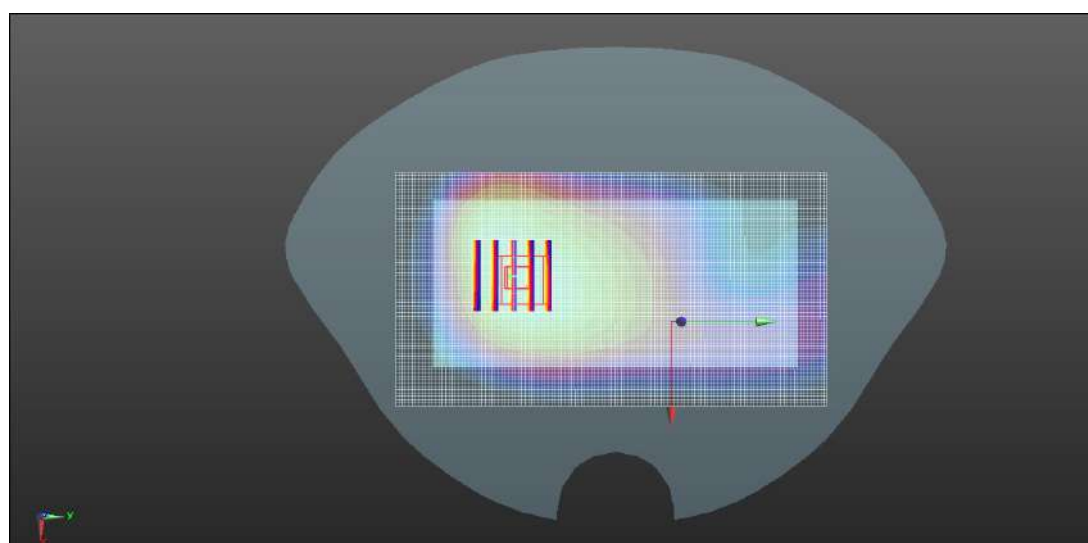

0 dB = 0.857 W/kg

Meas.25 Body Plane with Bottom Edge 10mm on Middle Channel in LTE Band4 mode with Antenna 3

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20175/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.547 W/kg



Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.39 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.499 W/kg

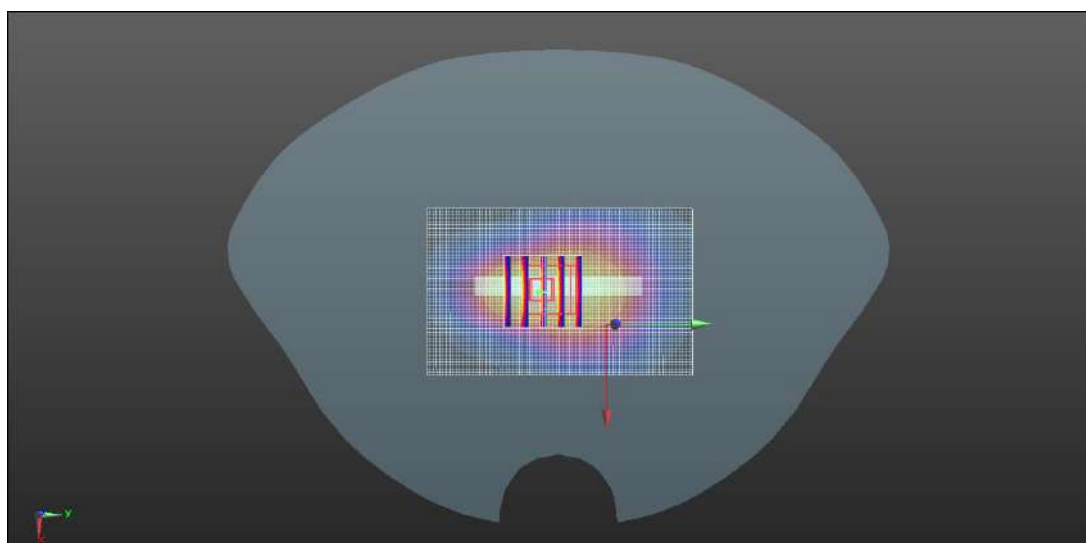

0 dB = 0.499 W/kg

Meas.26 Body Plane with Bottom Edge 0mm on Middle Channel in LTE Band4 mode with Antenna 3

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH20175/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.29 W/kg


CH20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.612 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.30 W/kg

SAR(1 g) = 2.52 W/kg; SAR(10 g) = 1.18 W/kg

Maximum value of SAR (measured) = 2.85 W/kg

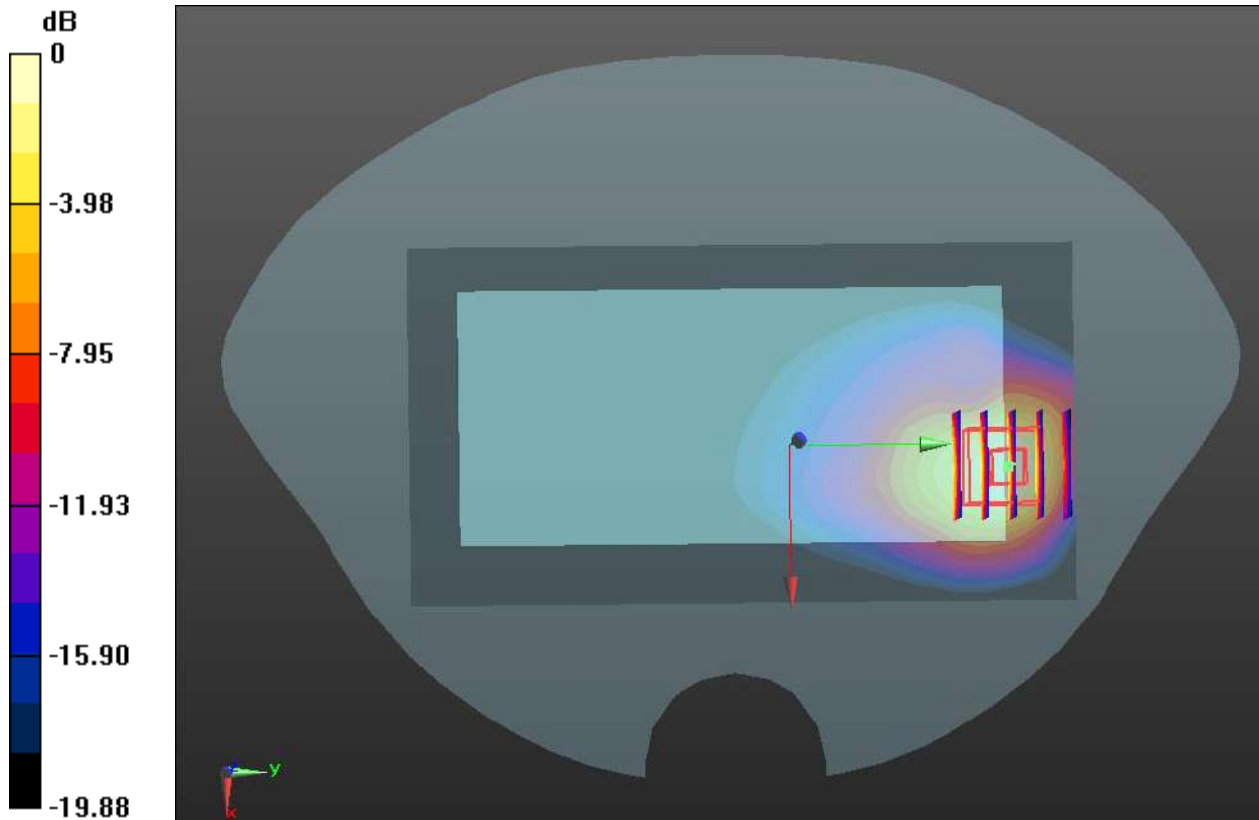

Meas.27 Left Head with Cheek on Low Channel in LTE Band5 mode with Antenna 1

Date: 2024.08.28

Communication System Band: BAND 5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.032$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20450/Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.721 W/kg



Ch20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.094 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.350 W/kg

Maximum value of SAR (measured) = 0.672 W/kg

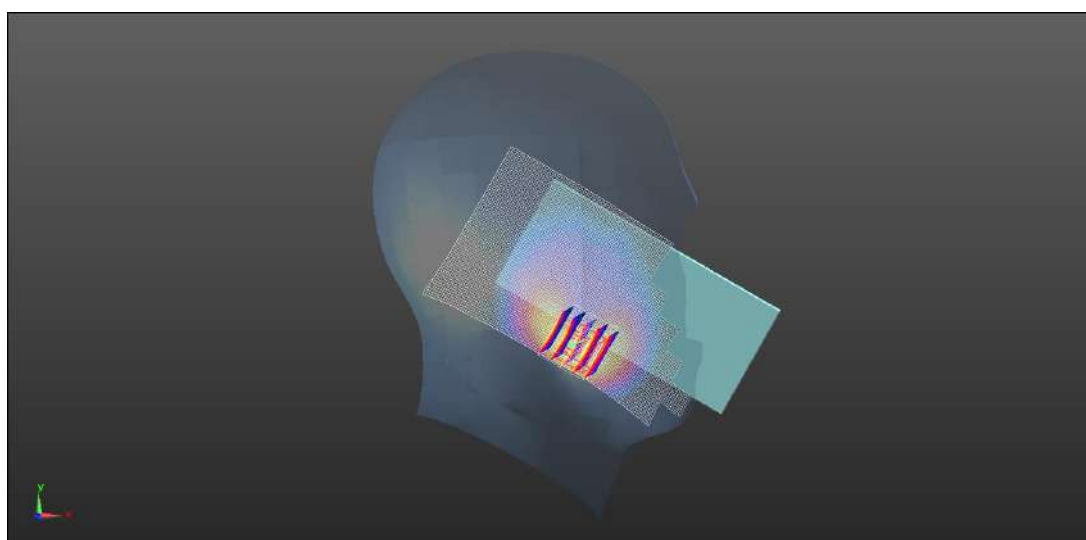

0 dB = 0.672 W/kg

Meas.28 Body Plane with Back Side 15mm on Low Channel in LTE Band5 mode with Antenna 0

Date: 2024.08.28

Communication System Band: BAND 5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829 \text{ MHz}$; $\sigma = 0.884 \text{ S/m}$; $\epsilon_r = 42.032$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20450/Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.212 W/kg


Ch20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.48 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.133 W/kg

Maximum value of SAR (measured) = 0.212 W/kg

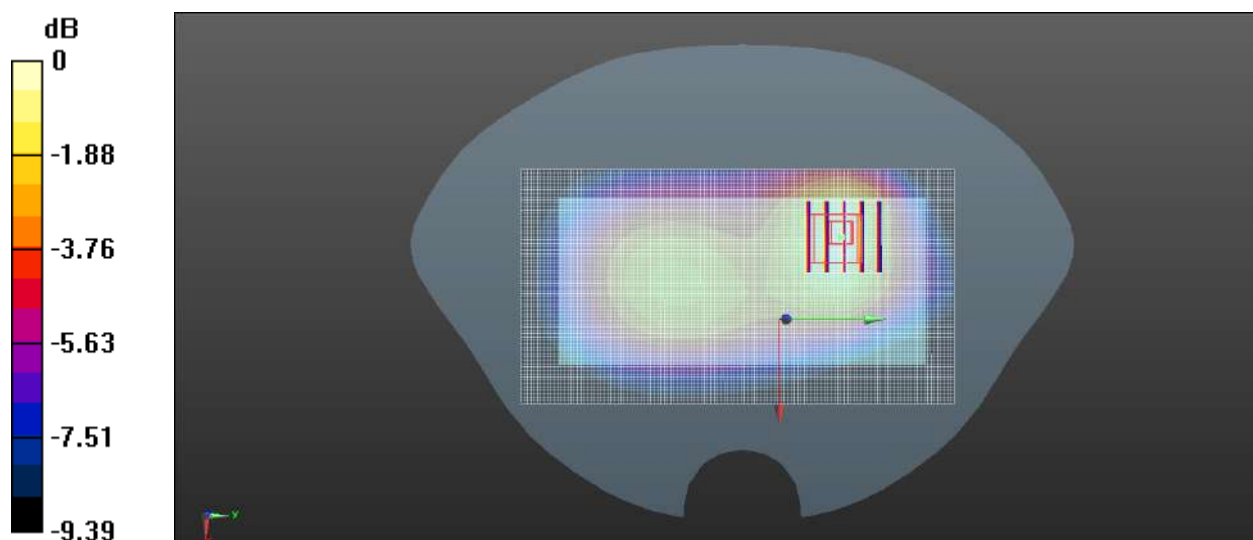

0 dB = 0.212 W/kg

Meas.29 Body Plane with Left Edge 10mm on Low Channel in LTE Band5 mode with Antenna 1

Date: 2024.08.28

Communication System Band: BAND 5; Frequency: 829 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 829 \text{ MHz}$; $\sigma = 0.884 \text{ S/m}$; $\epsilon_r = 42.032$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH20450/Area Scan (51x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.862 W/kg


CH20450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.50 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.371 W/kg

Maximum value of SAR (measured) = 0.781 W/kg

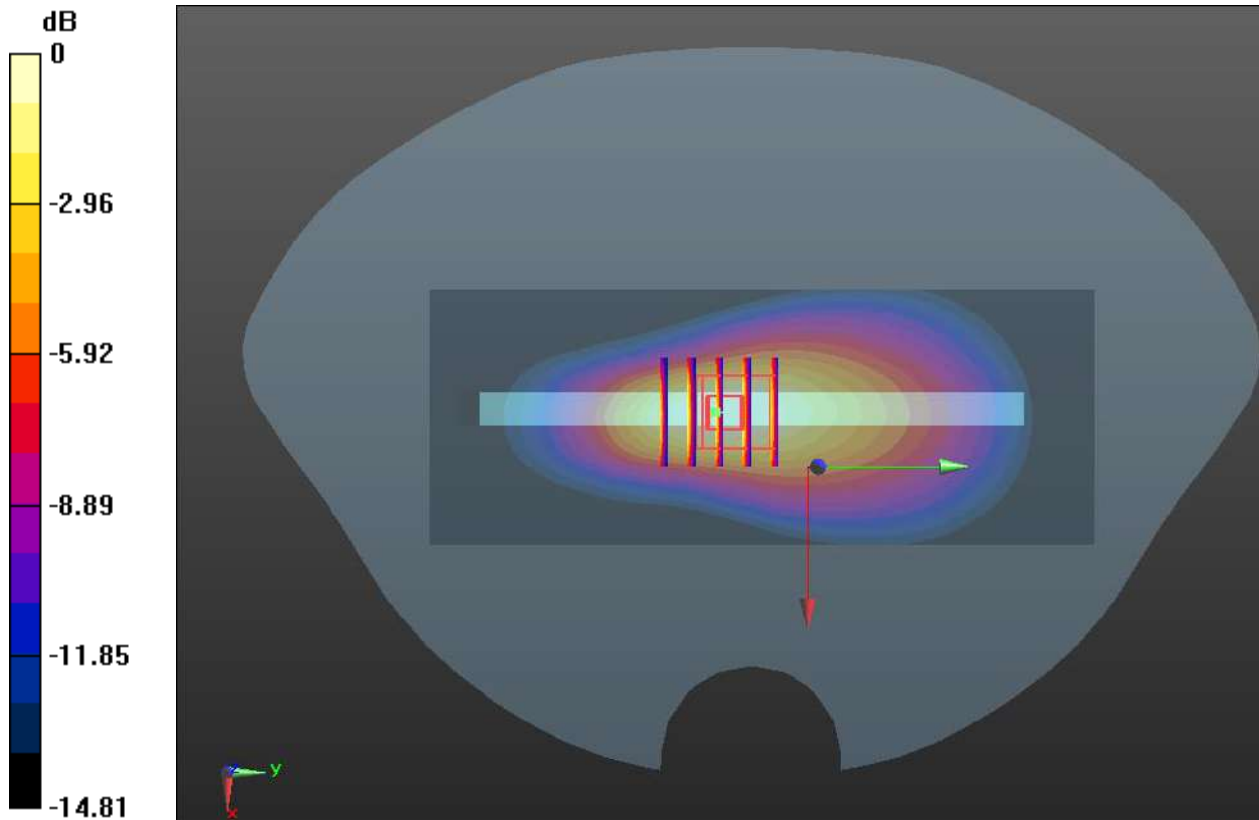

Meas.30 Right Head with Cheek on Low Channel in LTE Band7 mode with Antenna 2

Date: 2024.08.30

Communication System Band: BAND 7; Frequency: 2510 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 39.812$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature:22.3°C Liquid Temperature:21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20850/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.05 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.400 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

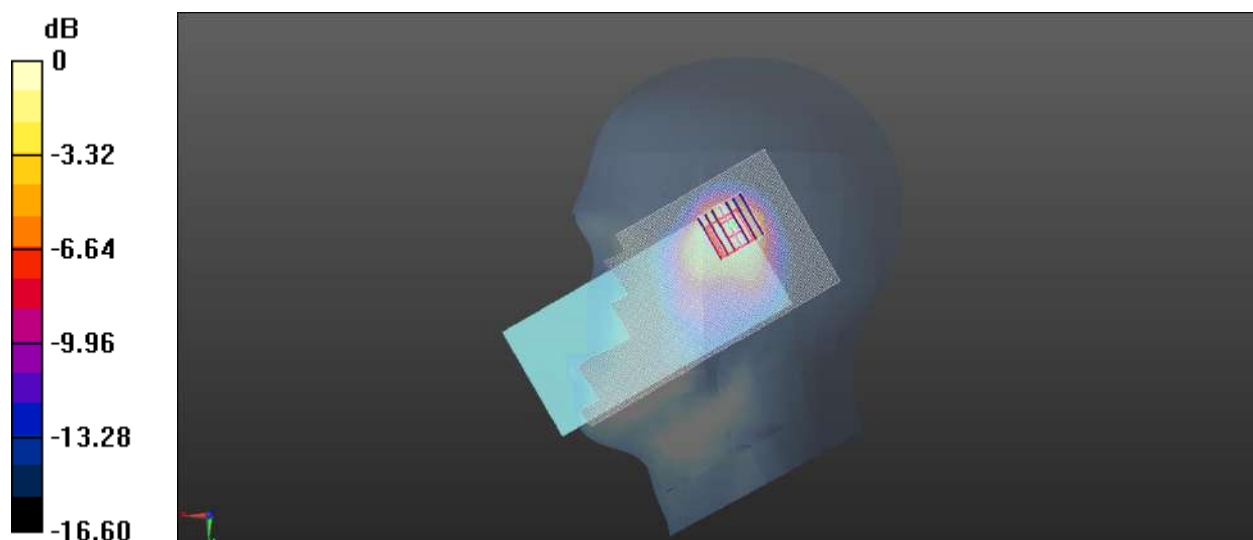

0 dB = 1.02 W/kg

Meas.31 Body Plane with Back Side 15mm on Middle Channel in LTE Band7 mode with Antenna 2

Date: 2024.08.30

Communication System Band: BAND 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 39.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21100/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.517 W/kg



Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.67 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.457 W/kg; SAR(10 g) = 0.282 W/kg

Maximum value of SAR (measured) = 0.491 W/kg

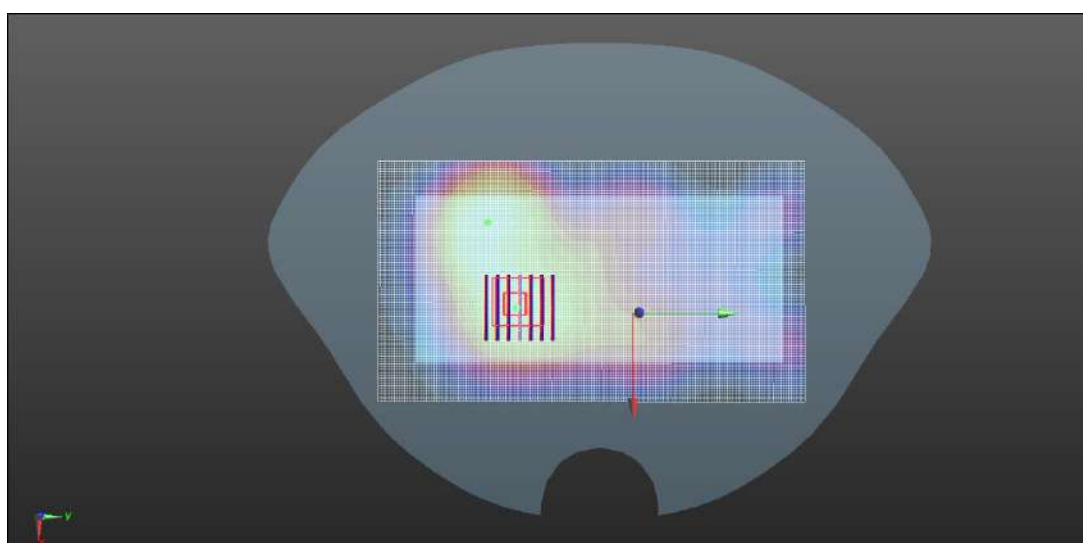

0 dB = 0.491 W/kg

Meas.32 Body Plane with Back Side 10mm on High Channel in LTE Band7 mode with Antenna 3

Date: 2024.08.30

Communication System Band: BAND 7; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2560$ MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 39.191$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21350/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.384 W/kg


Ch21350/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.555 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.371 W/kg

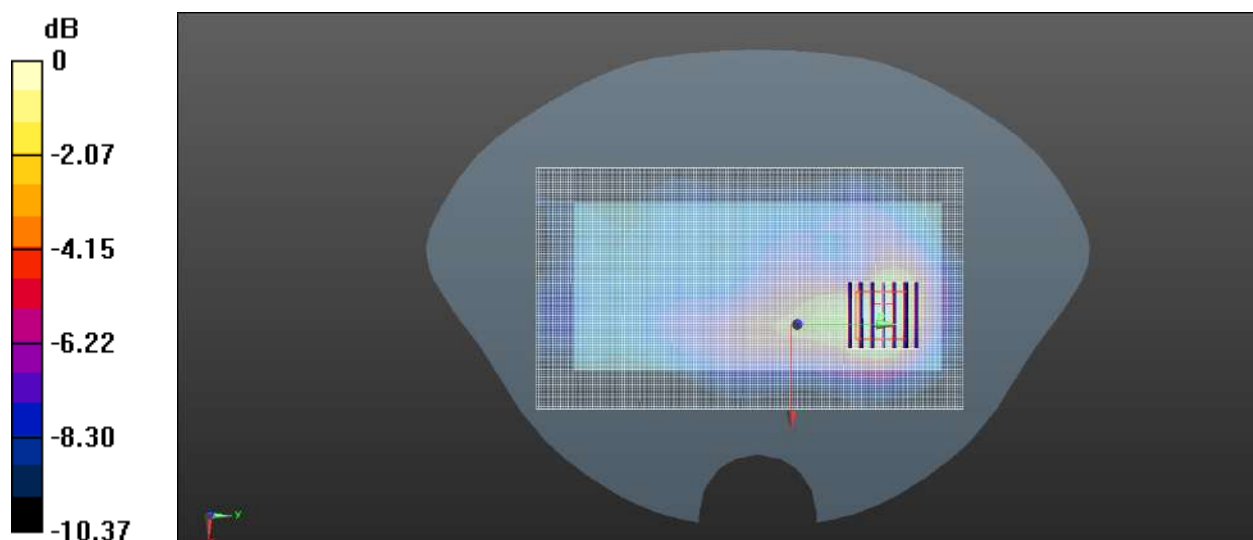

0 dB = 0.371 W/kg

Meas.33 Body Plane with Top Edge 0mm on Middle Channel in LTE Band7 mode with Antenna 2

Date: 2024.08.30

Communication System Band: BAND 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 39.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21100/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.38 W/kg


Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.72 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 3.94 W/kg; SAR(10 g) = 1.35 W/kg

Maximum value of SAR (measured) = 4.88 W/kg

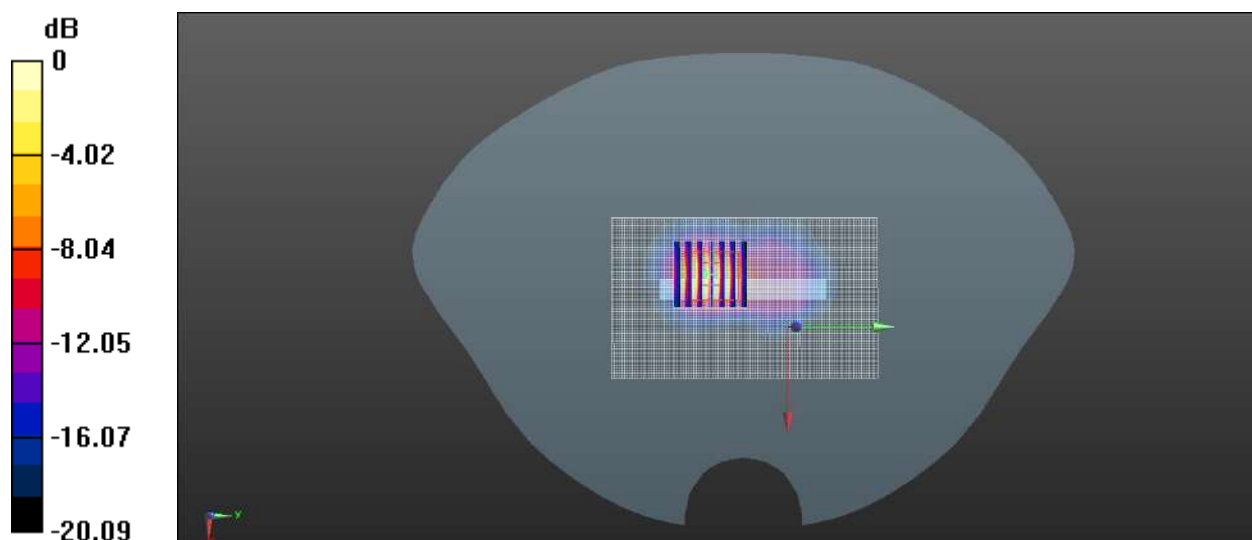

0 dB = 4.88 W/kg

Meas.34 Left Head with Cheek on Middle Channel in LTE Band12 mode with Antenna 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	CHEEK,	Band	LTE-FDD,	707.5,	10.29	0.892	42.4	22.4	21.3
HSL	0.00	12	10175-CAH	23095					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-08	2024-09-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.682	0.722
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.405	0.368
[mm]			Power Drift [dB]	0.00	0.01
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		45.0
			Dist 3dB Peak		6.7
			[mm]		

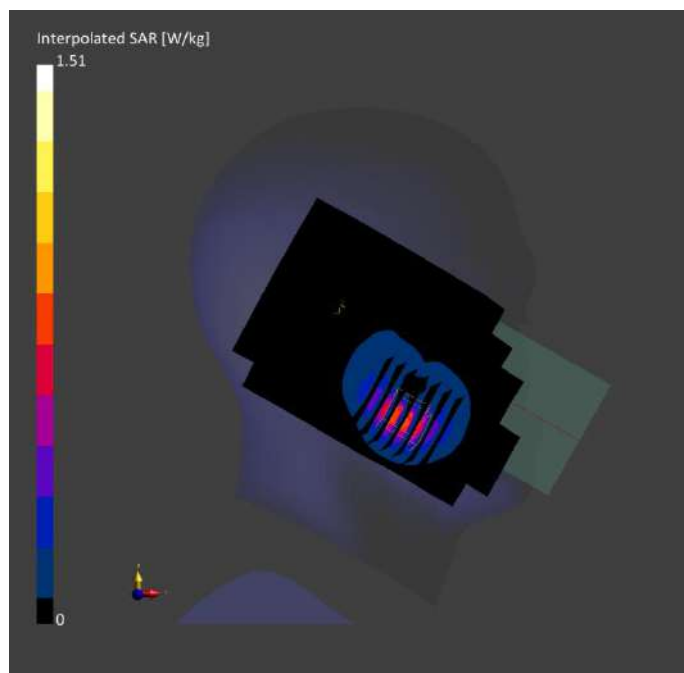

Meas.35 Body Plane with Back Side 15mm on Middle Channel in LTE Band12 mode with Antenna 0

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band 12	LTE-FDD, 10175-CAH	707.5, 23095	10.29	0.892	42.4	22.4	21.3


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-08	2024-09-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.188	0.189
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.126	0.121
Graded Grid	Yes	Yes	Power Drift [dB]	0.00	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		59.9
			Dist 3dB Peak [mm]		16.3

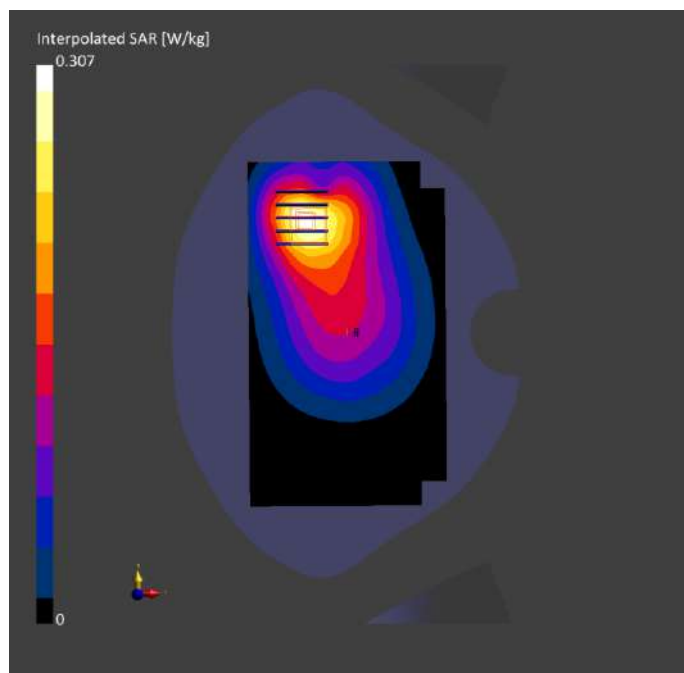

Meas.36 Body Plane with Left Edge 10mm on Middle Channel in LTE Band12 mode with Antenna 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE	Band	LTE-FDD,	707.5,	10.29	0.892	42.4	22.4	21.3
HSL	LEFT,	12	10175-CAH	23095					
	10.00								


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-08	2024-09-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.636	0.667
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.386	0.383
[mm]			Power Drift [dB]	-0.01	-0.01
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		55.8
			Dist 3dB Peak		9.6
			[mm]		

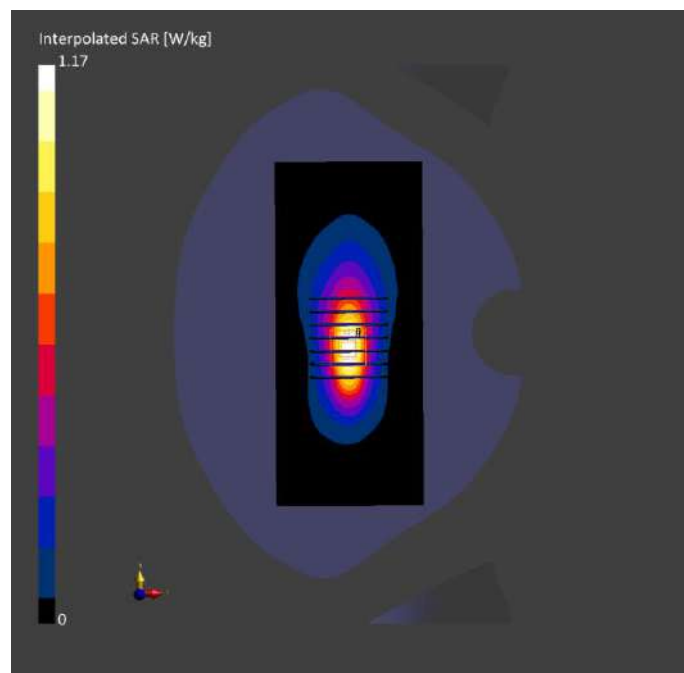

Meas.37 Left Head with Cheek on Middle Channel in LTE Band13 mode with Antenna 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	CHEEK,	Band	LTE-FDD,	782.0,	10.29	0.912	41.6	22.4	21.3
HSL	0.00	13	10175-CAH	23230					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-08	2024-09-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.725	0.767
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.430	0.393
[mm]			Power Drift [dB]	-0.01	-0.01
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		46.5
			Dist 3dB Peak		6.6
			[mm]		

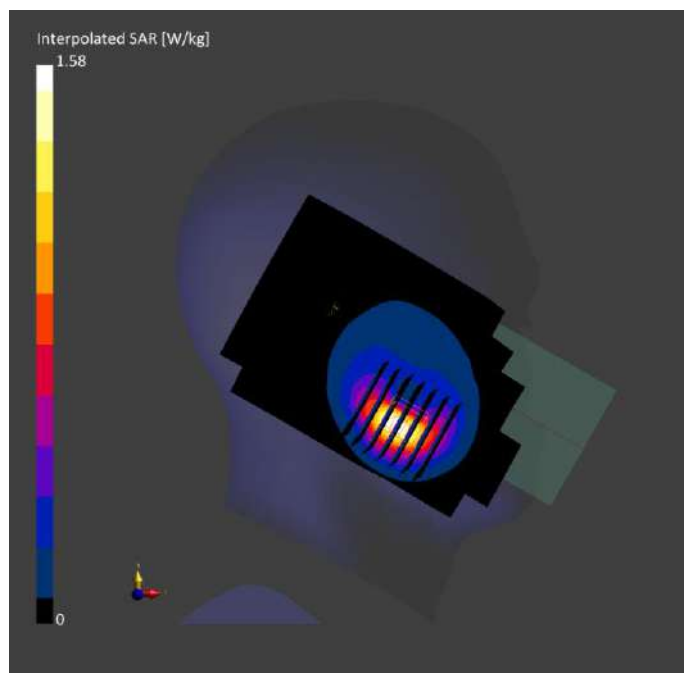

Meas.38 Body Plane with Back Side 15mm on Middle Channel in LTE Band13 mode with Antenna 0

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band 13	LTE-FDD, 10175-CAH	782.0, 23230	10.29	0.912	41.6	22.4	21.3


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-08	2024-09-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.247	0.265
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.176	0.199
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		73.0
			Dist 3dB Peak [mm]		> 16.0

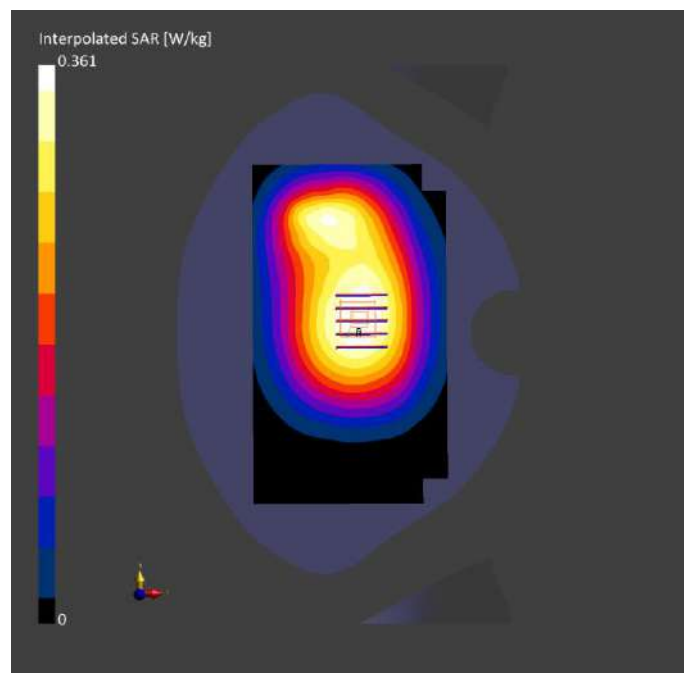

Meas.39 Body Plane with Left Edge 10mm on Middle Channel in LTE Band13 mode with Antenna 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE	Band	LTE-FDD,	782.0,	10.29	0.912	41.6	22.4	21.3
HSL	LEFT,	13	10175-CAH	23230					
	10.00								


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-08	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-08	2024-09-08
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.586	0.609
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.348	0.341
[mm]			Power Drift [dB]	0.00	0.01
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		55.1
			Dist 3dB Peak		9.6
			[mm]		

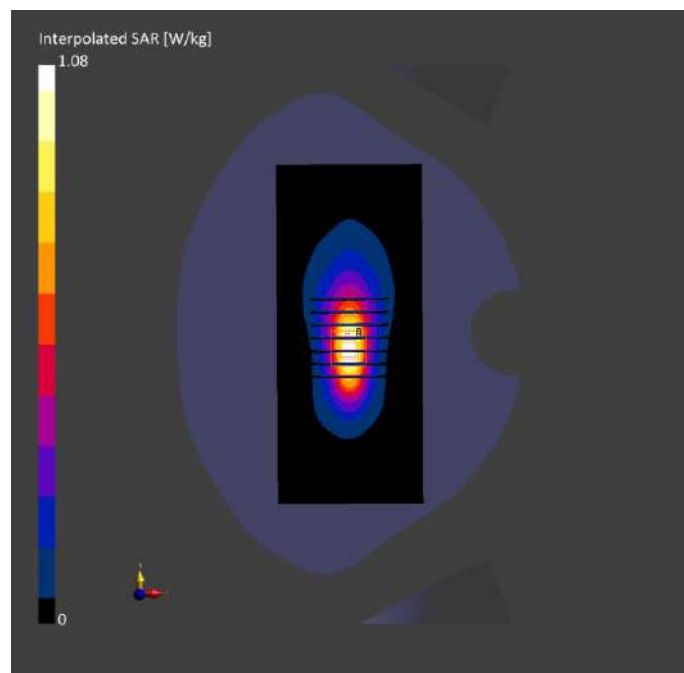

Meas.40 Left Head with Cheek on Middle Channel in LTE Band17 mode with Antenna 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	CHEEK,	Band	LTE-FDD,	710.0,	10.29	0.897	41.8	22.5	21.4
HSL	0.00	17	10175-CAH	23790					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-09	2024-09-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.697	0.735
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.414	0.375
[mm]			Power Drift [dB]	-0.02	0.03
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		44.9
			Dist 3dB Peak		6.7
			[mm]		

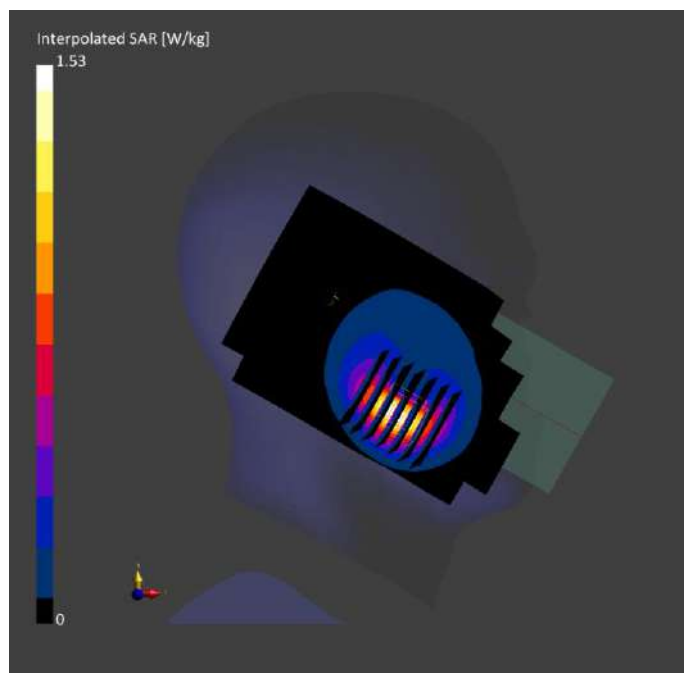

Meas.41 Body Plane with Back Side 15mm on Middle Channel in LTE Band17 mode with Antenna 0

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band 13	LTE-FDD, 10175-CAH	710.0, 23790	10.29	0.897	41.8	22.5	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-09	2024-09-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.201	0.197
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.162	0.151
Graded Grid	Yes	Yes	Power Drift [dB]	-0.09	-0.17
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		73.0
			Dist 3dB Peak [mm]		9.7

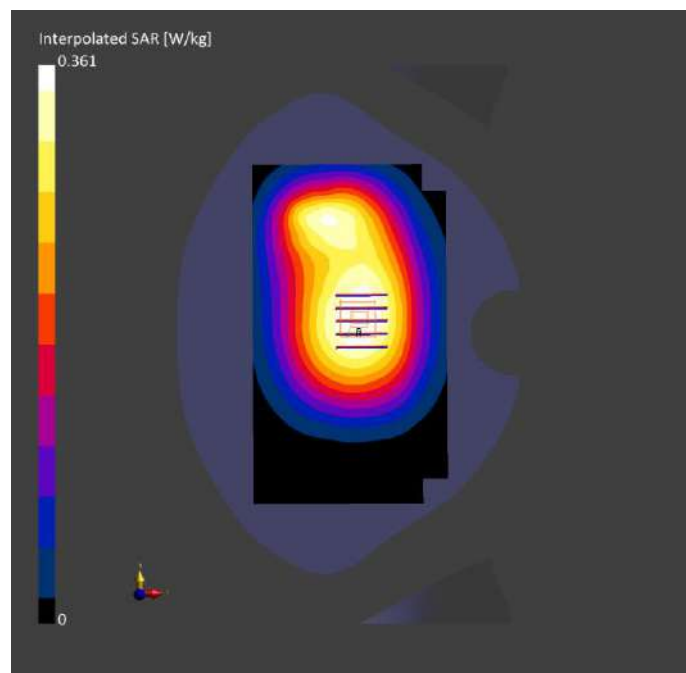

Meas.42 Body Plane with Left Edge 10mm on Middle Channel in LTE Band17 mode with Antenna 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE	Band	LTE-FDD,	710.0,	10.29	0.897	41.8	22.5	21.4
HSL	LEFT,	17	10175-CAH	23790					
	10.00								


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-09	2024-09-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.650	0.678
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.394	0.387
[mm]			Power Drift [dB]	0.00	-0.02
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		56.0
			Dist 3dB Peak		9.6
			[mm]		

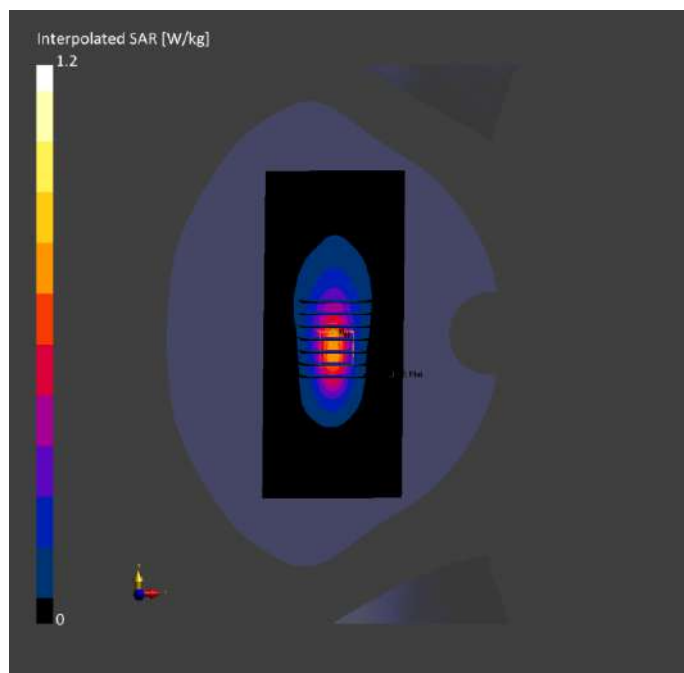

Meas.43 Left Head with Cheek on Middle Channel in LTE Band26 mode with Antenna 1

Date: 2024.08.28

Communication System Band: BAND 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.601$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26865/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.924 W/kg


Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.144 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.424 W/kg

Maximum value of SAR (measured) = 0.772 W/kg

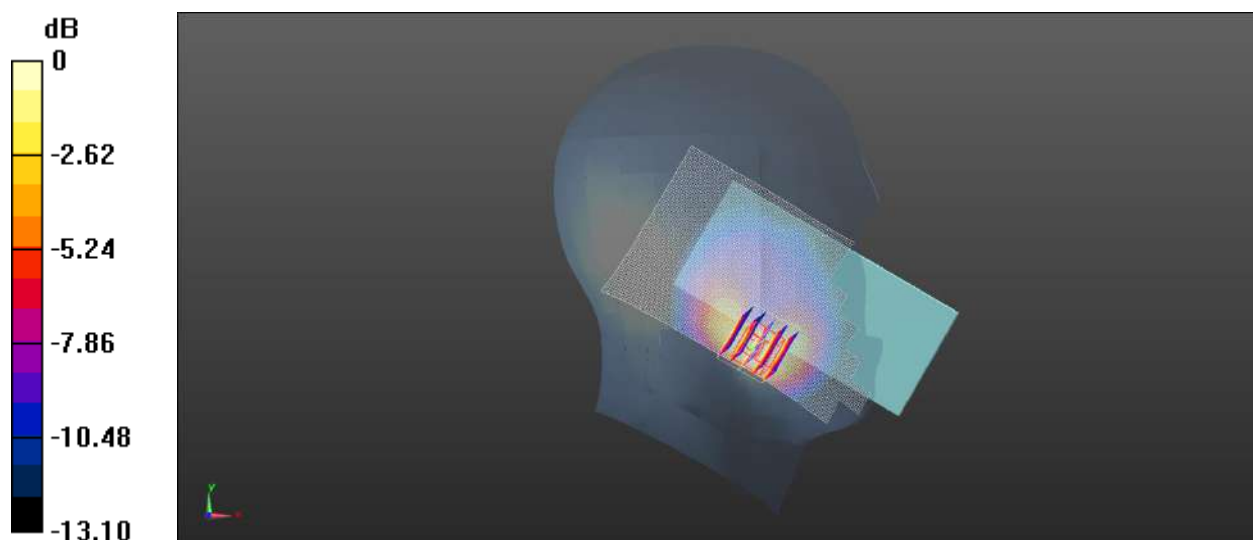

0 dB = 0.772 W/kg

Meas.44 Body Plane with Back Side 15mm on Middle Channel in LTE Band26 mode with Antenna 1

Date: 2024.08.28

Communication System Band: BAND 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26865/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.196 W/kg



Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.084 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

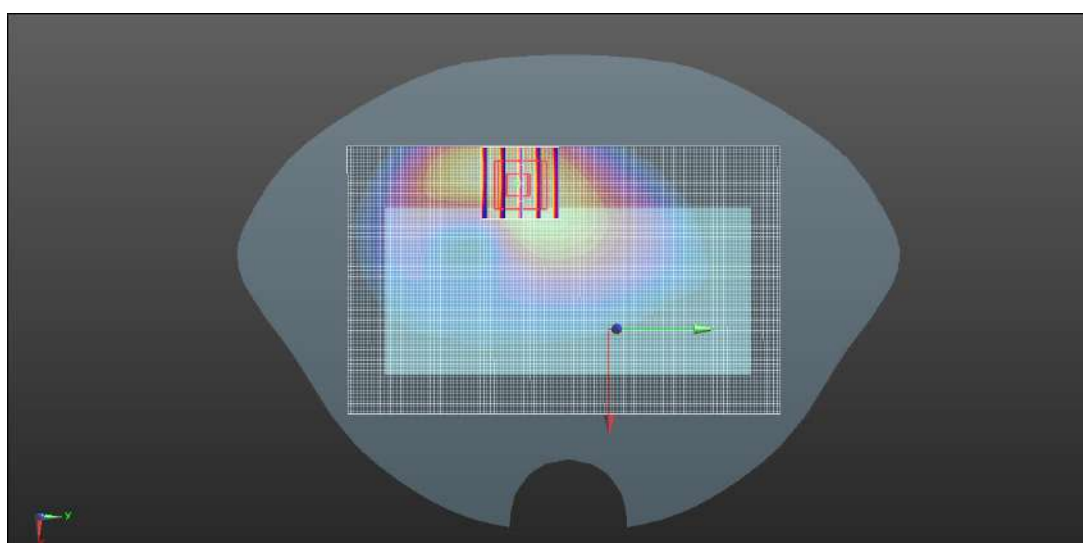

0 dB = 0.196 W/kg

Meas.45 Body Plane with Left Edge 10mm on Middle Channel in LTE Band26 mode with Antenna 1

Date: 2024.08.28

Communication System Band: BAND 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 41.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26865/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.536 W/kg


Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.95 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.792 W/kg

SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.514 W/kg

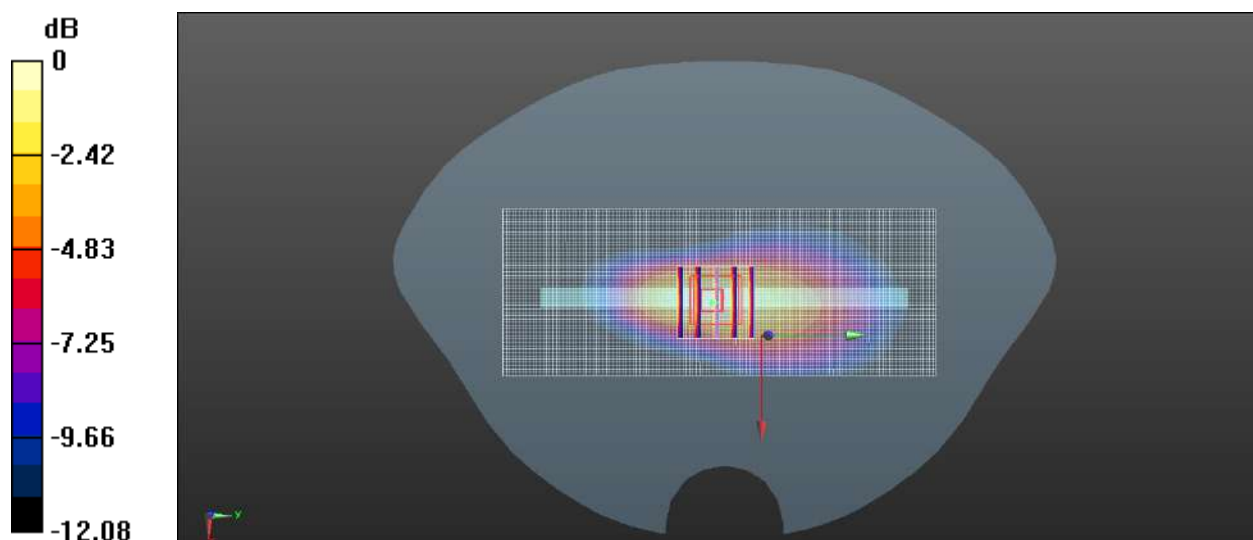

0 dB = 0.514 W/kg

Meas.46 Right Head with Cheek on Middle Channel in LTE Band66 mode with Antenna 4

Date: 2024.08.25

Communication System Band: BAND 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132322/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.755 W/kg


Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.992 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.657 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

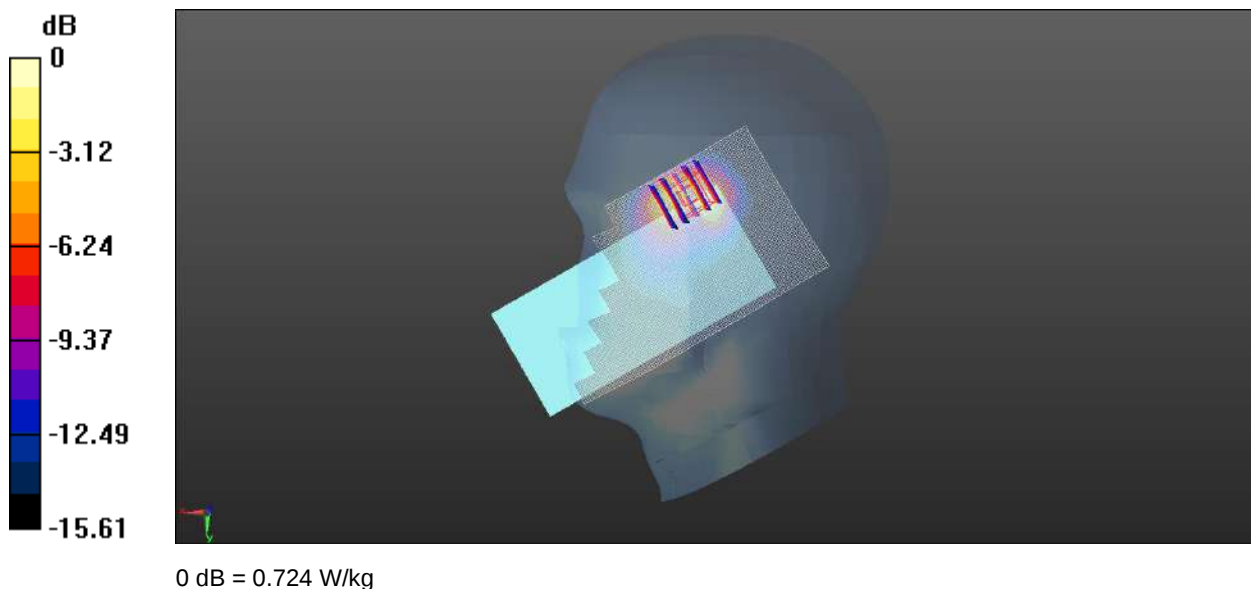

Meas.47 Body Plane with Back Side 15mm on Middle Channel in LTE Band66 mode with Antenna 2

Date: 2024.08.25

Communication System Band: BAND 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132322/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.705 W/kg



Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.10 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 0.683 W/kg

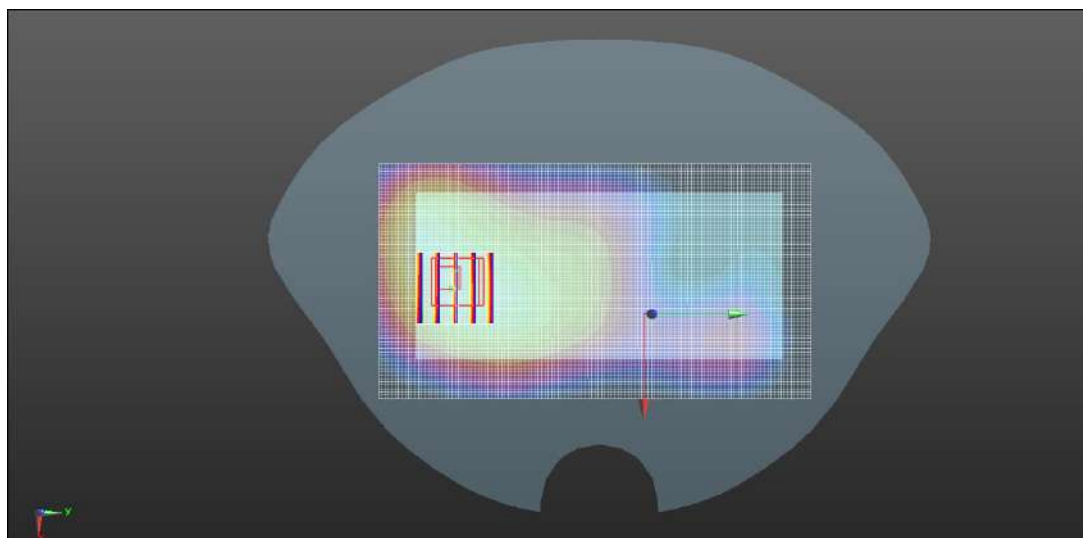

0 dB = 0.683 W/kg

Meas.48 Body Plane with Bottom Edge 10mm on Middle Channel in LTE Band66 mode with Antenna 3

Date: 2024.08.25

Communication System Band: BAND 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132322/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.594 W/kg



Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.49 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.798 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.541 W/kg

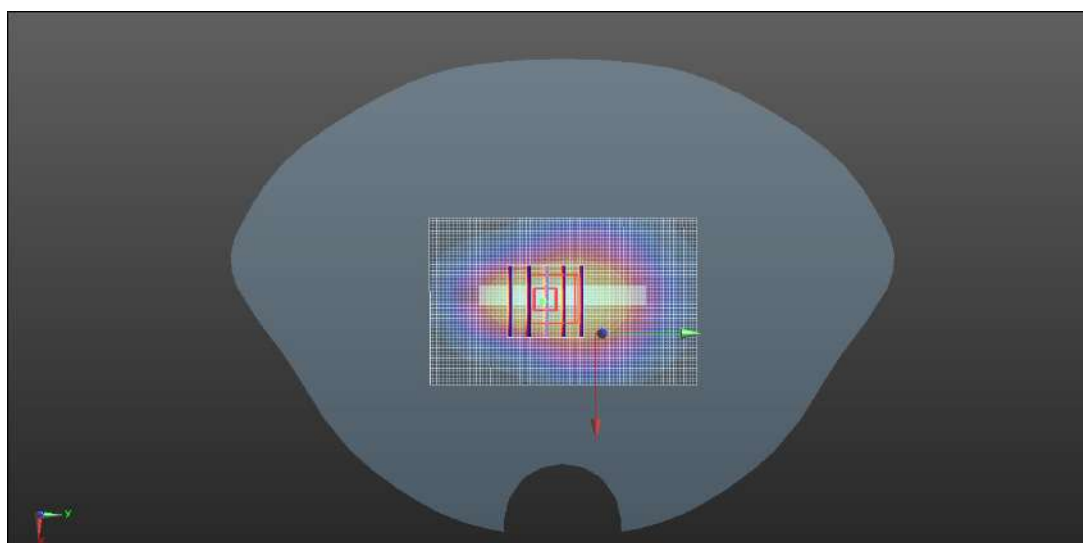

0 dB = 0.541 W/kg

Meas.49 Body Plane with Top Edge 0mm on Middle Channel in LTE Band66 mode with Antenna 2

Date: 2024.08.25

Communication System Band: BAND 66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.37$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch132322/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.28 W/kg


Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.37 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 3.18 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 3.68 W/kg

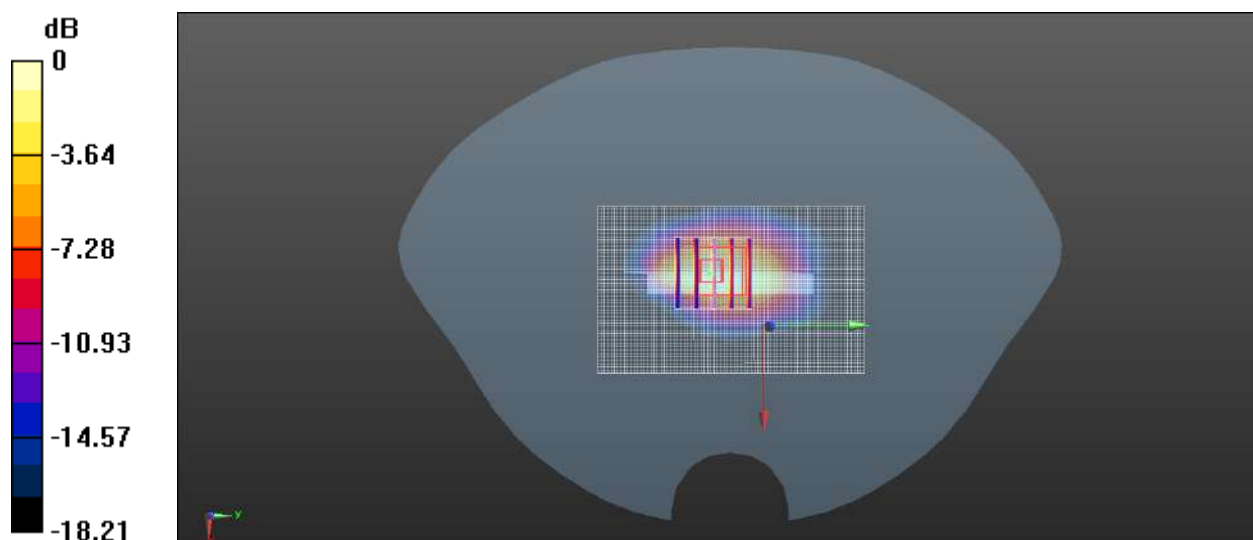

0 dB = 3.68 W/kg

Meas.50 Right Head with Cheek on Middle Channel in LTE Band38 mode with Antenna 2

Date: 2024.09.01

Communication System Band: BAND 38; Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 39.018$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.819 W/kg



Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.30 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.749 W/kg

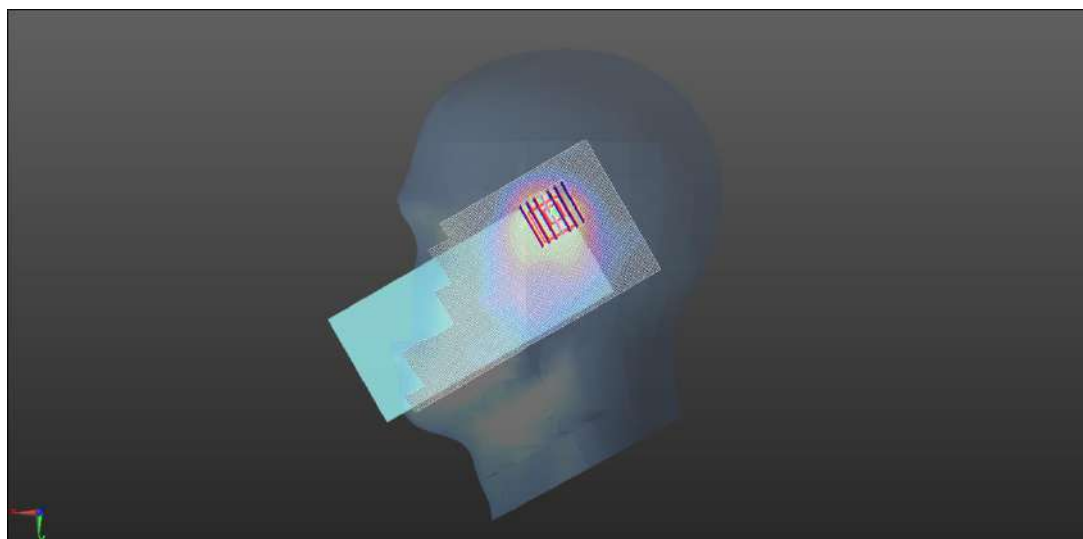

0 dB = 0.749 W/kg

Meas.51 Body Plane with Back Side 15mm on Middle Channel in LTE Band38 mode with Antenna 2

Date: 2024.09.01

Communication System Band: BAND 38; Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 39.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.451 W/kg



Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.957 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

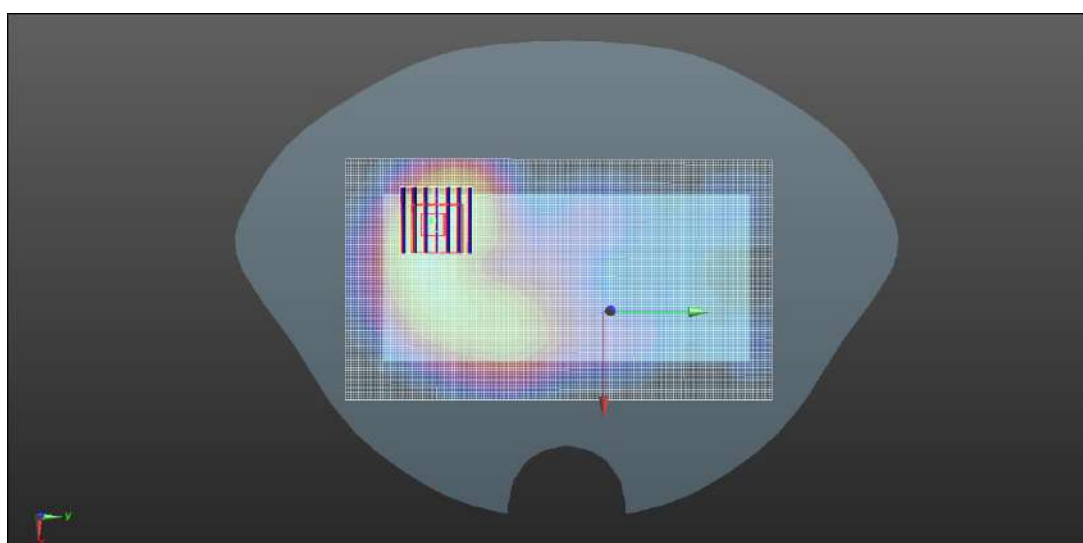

0 dB = 0.427 W/kg

Meas.52 Body Plane with Bottom Edge 10mm on Middle Channel in LTE Band38 mode with Antenna 3

Date: 2024.09.01

Communication System Band: BAND 38; Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 39.018$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.653 W/kg



Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.91 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.284 W/kg

Maximum value of SAR (measured) = 0.649 W/kg

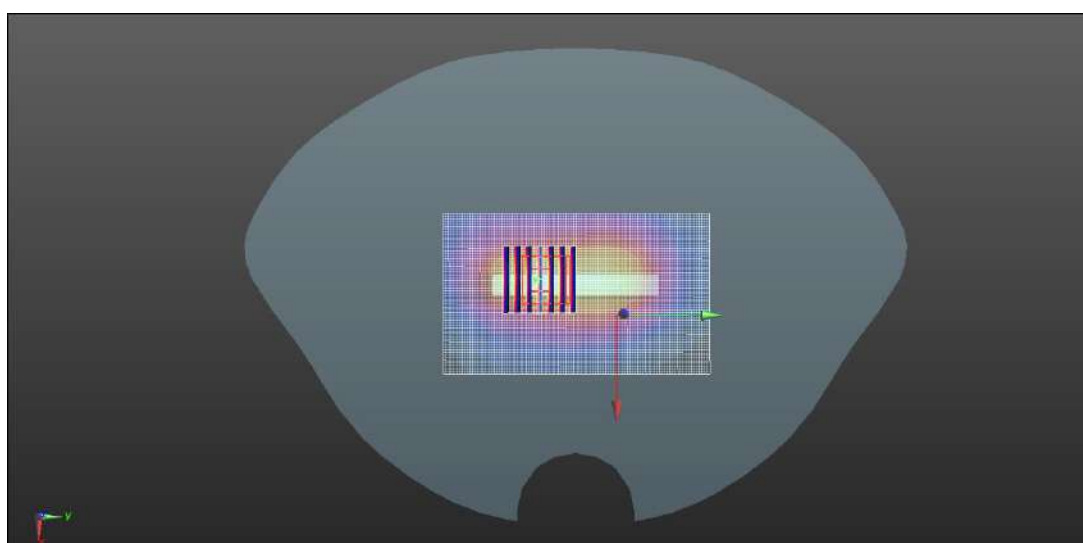

0 dB = 0.649 W/kg

Meas.53 Body Plane with Top Edge 0mm on Middle Channel in LTE Band38 mode with Antenna 2

Date: 2024.09.02

Communication System Band: BAND 38; Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.965$ S/m; $\epsilon_r = 38.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch38000/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.06 W/kg


Ch38000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.02 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 9.30 W/kg

SAR(1 g) = 3.41 W/kg; SAR(10 g) = 1.18 W/kg

Maximum value of SAR (measured) = 4.28 W/kg

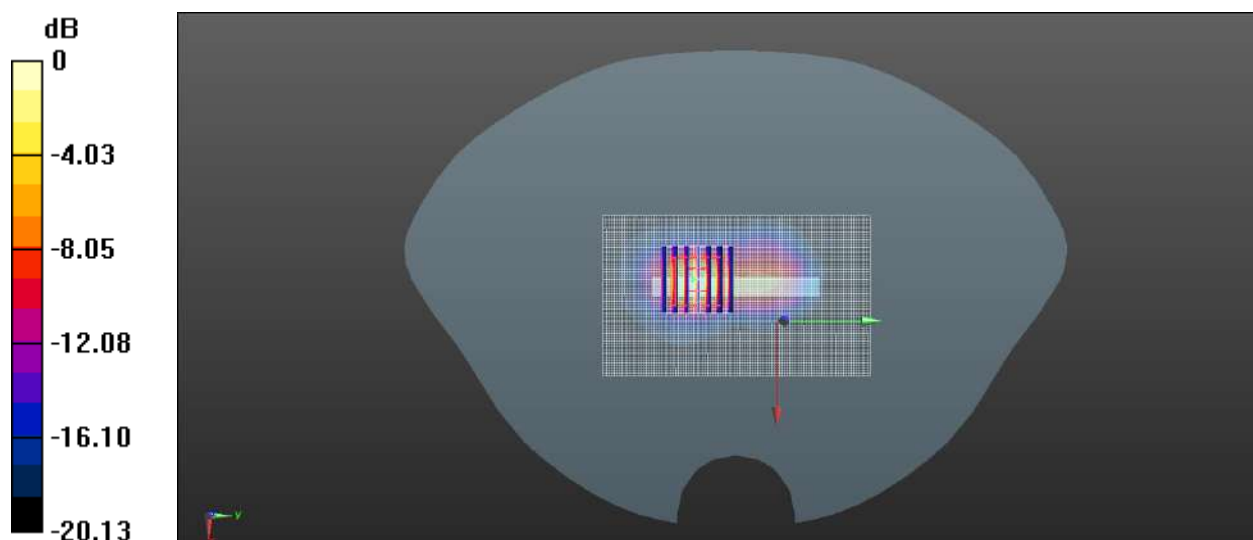

0 dB = 4.28 W/kg

Meas.54 Right Head with Cheek on High Channel in LTE Band41 mode with Antenna 2

Date: 2024.09.03

Communication System Band: BAND 41; Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.08$ S/m; $\epsilon_r = 38.62$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41490/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.875 W/kg



Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.90 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.362 W/kg

Maximum value of SAR (measured) = 0.786 W/kg

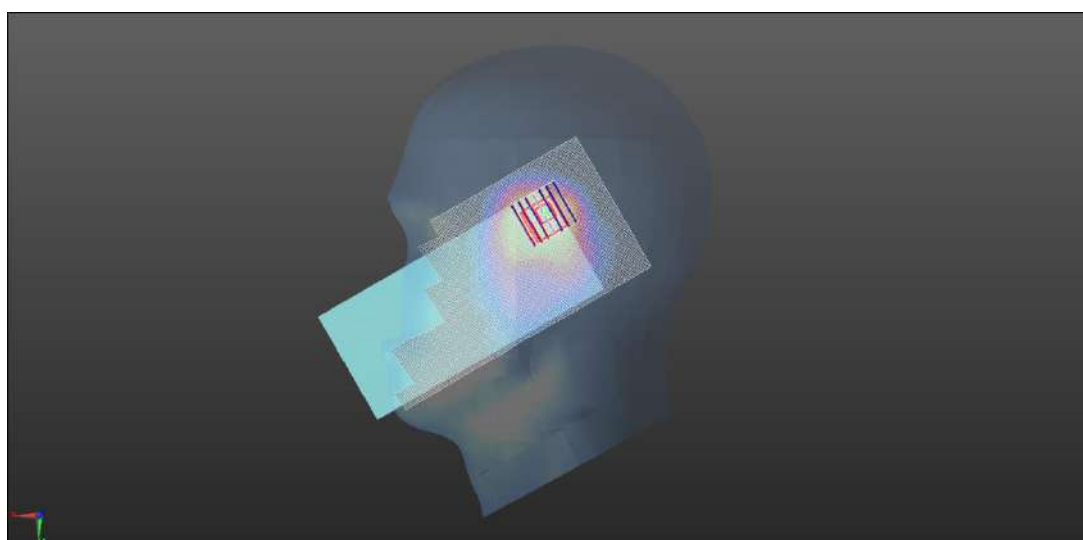

0 dB = 0.786 W/kg

Meas.55 Body Plane with Back Side 15mm on Middle Channel in LTE Band41 mode with Antenna 2

Date: 2024.09.04

Communication System Band: BAND 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 39.389$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40620/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.403 W/kg



Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.099 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.213 W/kg

Maximum value of SAR (measured) = 0.398 W/kg

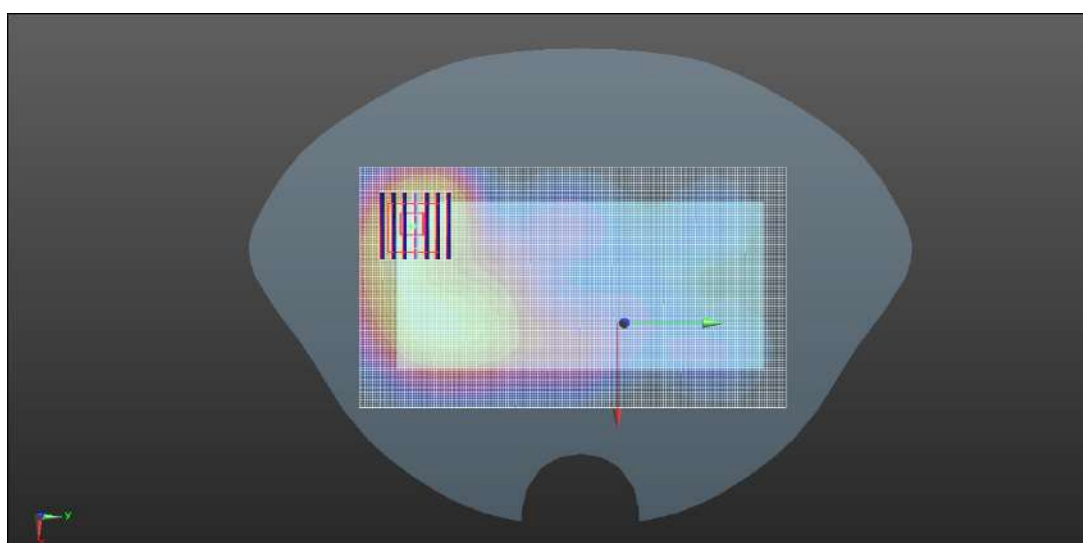

0 dB = 0.398 W/kg

Meas.56 Body Plane with Bottom Edge 10mm on Middle Channel in LTE Band41 mode with Antenna 3

Date: 2024.09.04

Communication System Band: BAND 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 39.389$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40620/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.532 W/kg



Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.34 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

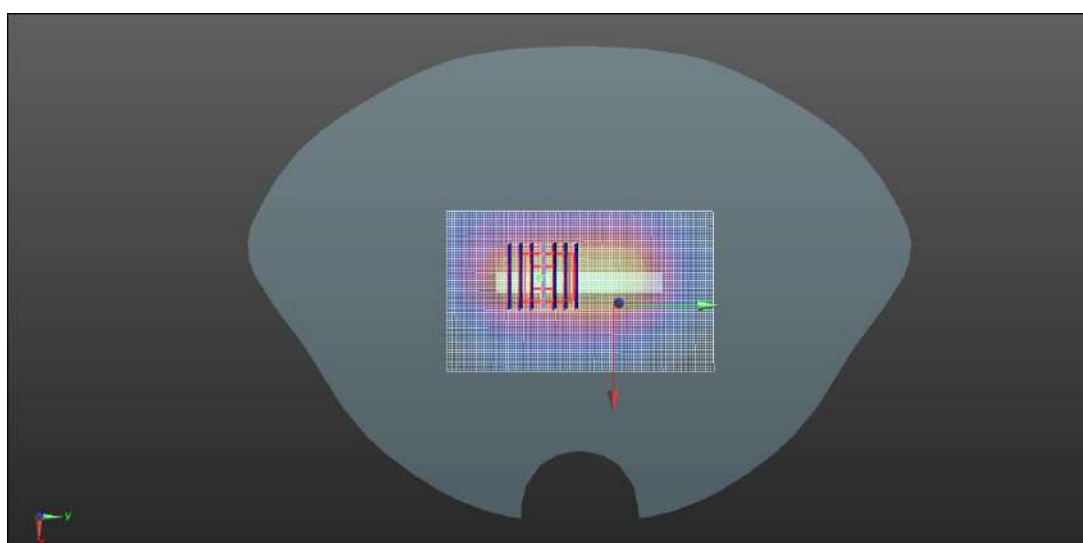

0 dB = 0.539 W/kg

Meas.57 Body Plane with Top Edge 0mm on Middle Channel in LTE Band41 mode with Antenna 2

Date: 2024.09.04

Communication System Band: BAND 41; Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.958$ S/m; $\epsilon_r = 39.389$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch40620/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.21 W/kg


Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.44 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 7.77 W/kg

SAR(1 g) = 2.8 W/kg; SAR(10 g) = 0.971 W/kg

Maximum value of SAR (measured) = 3.46 W/kg

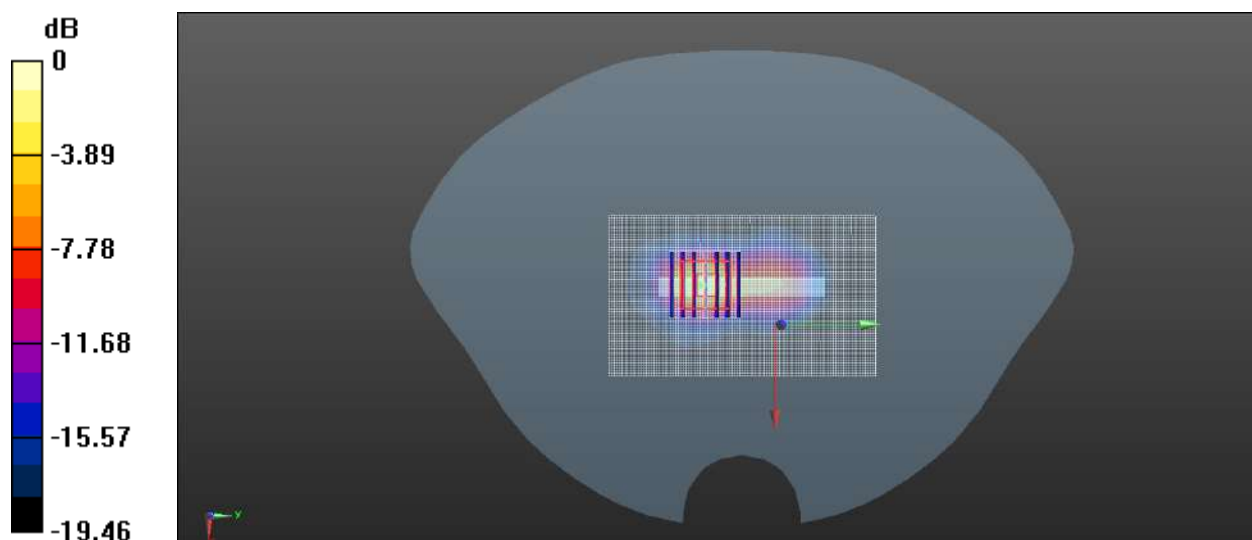

0 dB = 3.46 W/kg

Meas.58 Right Head with Cheek on Middle Channel in LTE Band42 mode with Antenna 8
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band 42	LTE-TDD, 10435-AAG	3500.0, 42590	7.11	2.94	38.0	22.2	21.3


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-03	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-03	2024-09-03
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.465	0.501
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.186	0.191
Graded Grid	Yes	Yes	Power Drift [dB]	0.08	-0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	N/A	Scaling Factor		
Surface Detection	All points	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		46.9
			Dist 3dB Peak		8.7
			[mm]		

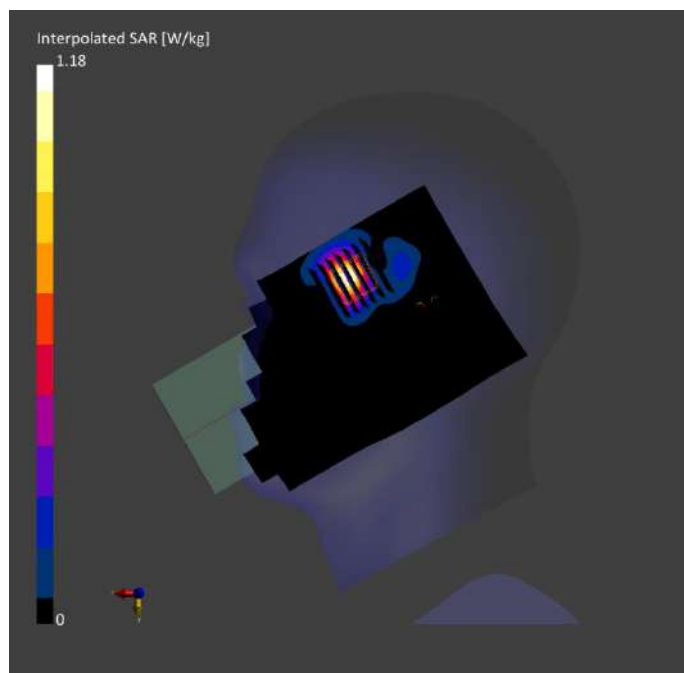

Meas.59 Body Plane with Back Side 15mm on Middle Channel in LTE Band42 mode with Antenna 9

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band 42	LTE-TDD, 10435-AAG	3500.0, 42590	7.11	2.94	38.0	22.2	21.3


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-03	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-03	2024-09-03
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.126	0.125
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.057	0.053
Graded Grid	Yes	Yes	Power Drift [dB]	-0.05	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		49.9
			Dist 3dB Peak [mm]		11.8

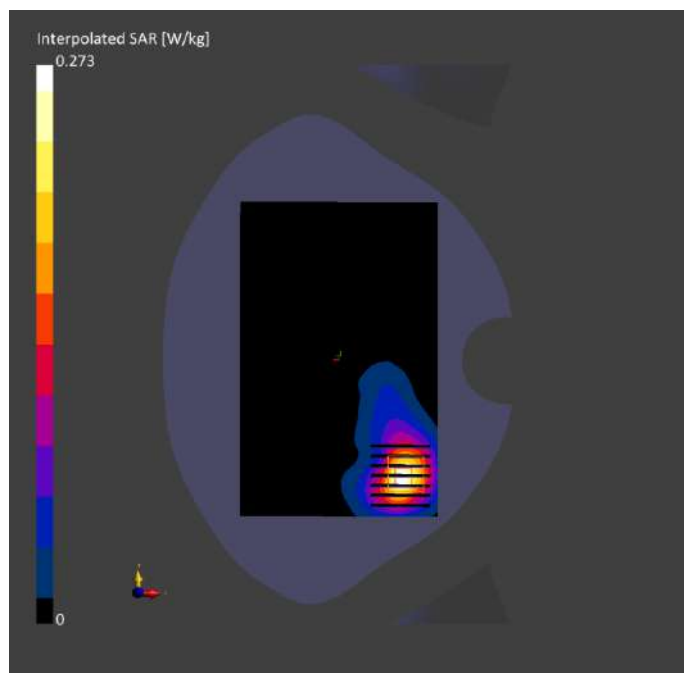

Meas.60 Body Plane with Top Edge 10mm on Middle Channel in LTE Band42 mode with Antenna 7
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	Band	LTE-TDD,	3500.0,	7.11	2.94	38.0	22.2	21.3
HSL	0.00	42	10435-AAG	42590					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-03	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	24.0 x 24.0 x 24.0	Date	2024-09-03	2024-09-03
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.108	0.117
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.047	0.044
[mm]			Power Drift [dB]	0.07	0.06
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	Y	Y	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		49.6
			Dist 3dB Peak		8.7
			[mm]		

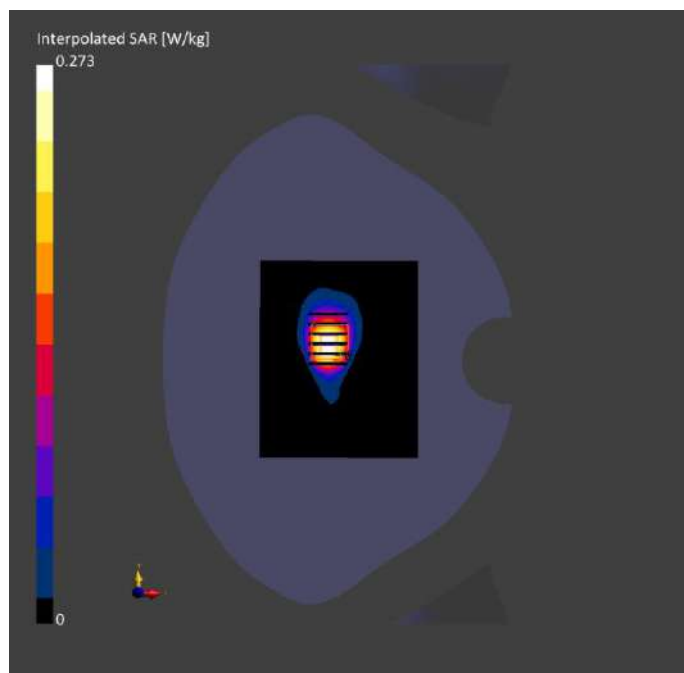

Meas.61 Body Plane with Top Edge 0mm on Middle Channel in LTE Band42 mode with Antenna 6
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	Band	LTE-TDD,	3500.0,	7.11	2.94	38.0	22.2	21.3
HSL	0.00	42	10435-AAG	42590					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-03	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	24.0 x 24.0 x 24.0	Date	2024-09-03	2024-09-03
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	1.25	1.99
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.455	0.554
[mm]			Power Drift [dB]	-0.06	0.03
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		45.0
			Dist 3dB Peak		4.8
			[mm]		

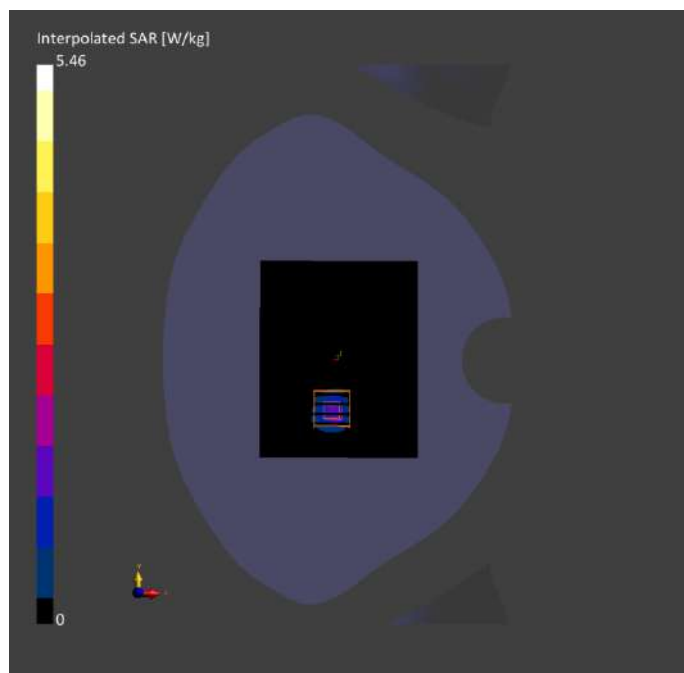

Meas.62 Left Head with Tilt on Middle Channel in LTE Band48 mode with Antenna 7

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	170.0 x 70.0 x 8.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	Band	LTE-TDD,	3625.0,	6.94	3.02	38.3	22.5	21.4
HSL	0.00	48	10172-CAH	55990					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-05	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-05	2024-09-05
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.479	0.513
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.170	0.178
[mm]			Power Drift [dB]	0.03	-0.06
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		39.8
			Dist 3dB Peak		5.1
			[mm]		

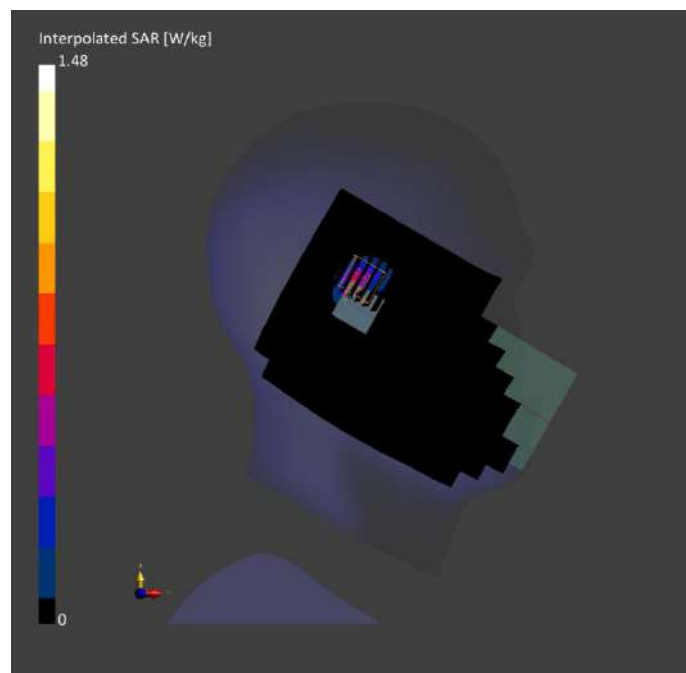

Meas.63 Body Plane with Back Side 15mm on Middle Channel in LTE Band48 mode with Antenna 7

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band 48	LTE-TDD, 10172-CAH	3625.0, 55990	6.94	3.02	38.3	22.5	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-05	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-05	2024-09-05
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.134	0.152
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.060	0.070
Graded Grid	Yes	Yes	Power Drift [dB]	0.01	0.12
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.2
			Dist 3dB Peak [mm]		11.9

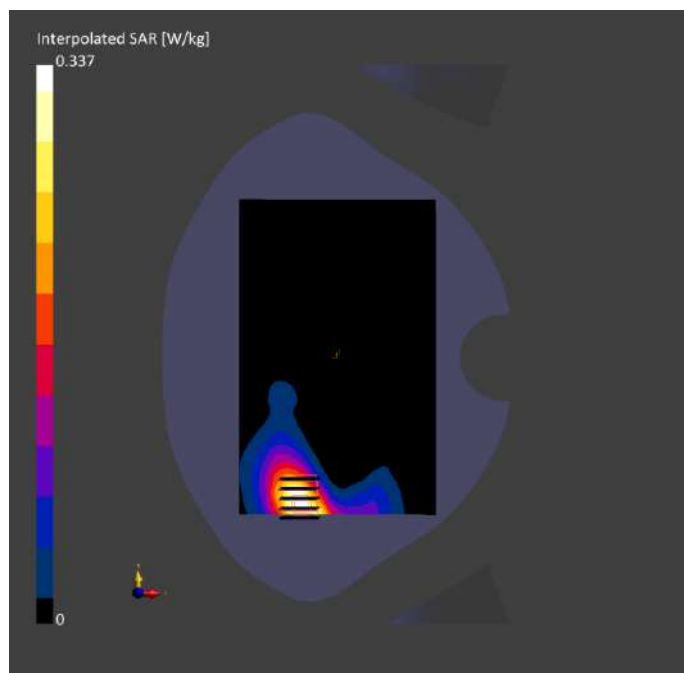

Meas.64 Body Plane with Back Side 10mm on Middle Channel in LTE Band48 mode with Antenna 8

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band 48	LTE-TDD, 10172-CAH	3625.0, 55990	6.94	3.02	38.3	22.5	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-05	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-05	2024-09-05
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.164	0.185
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.073	0.077
Graded Grid	Yes	Yes	Power Drift [dB]	-0.07	0.04
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		45.1
			Dist 3dB Peak [mm]		7.6

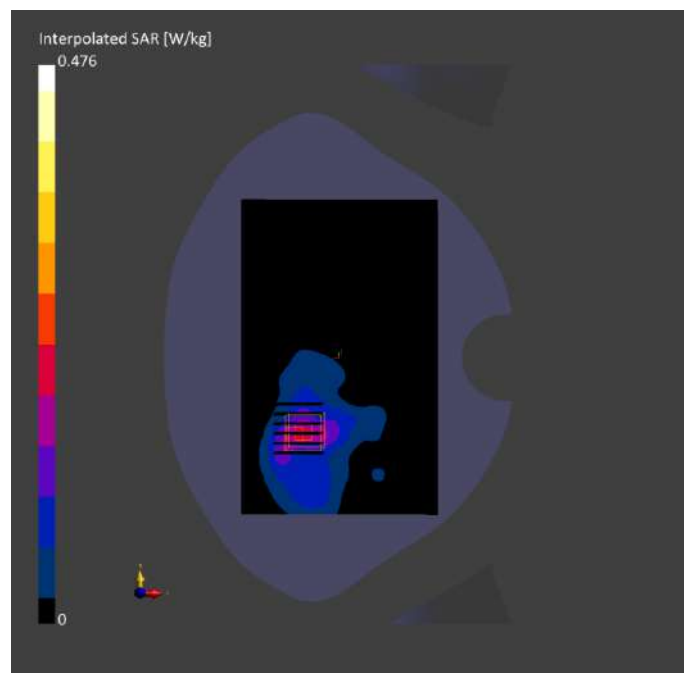

Meas.65 Right Head with Cheek on Middle Channel in NR Band2 mode with Antenna 2

Date: 2024.08.21

Communication System Band: N2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 39.432$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch380000/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.691 W/kg


Ch380000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.29 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

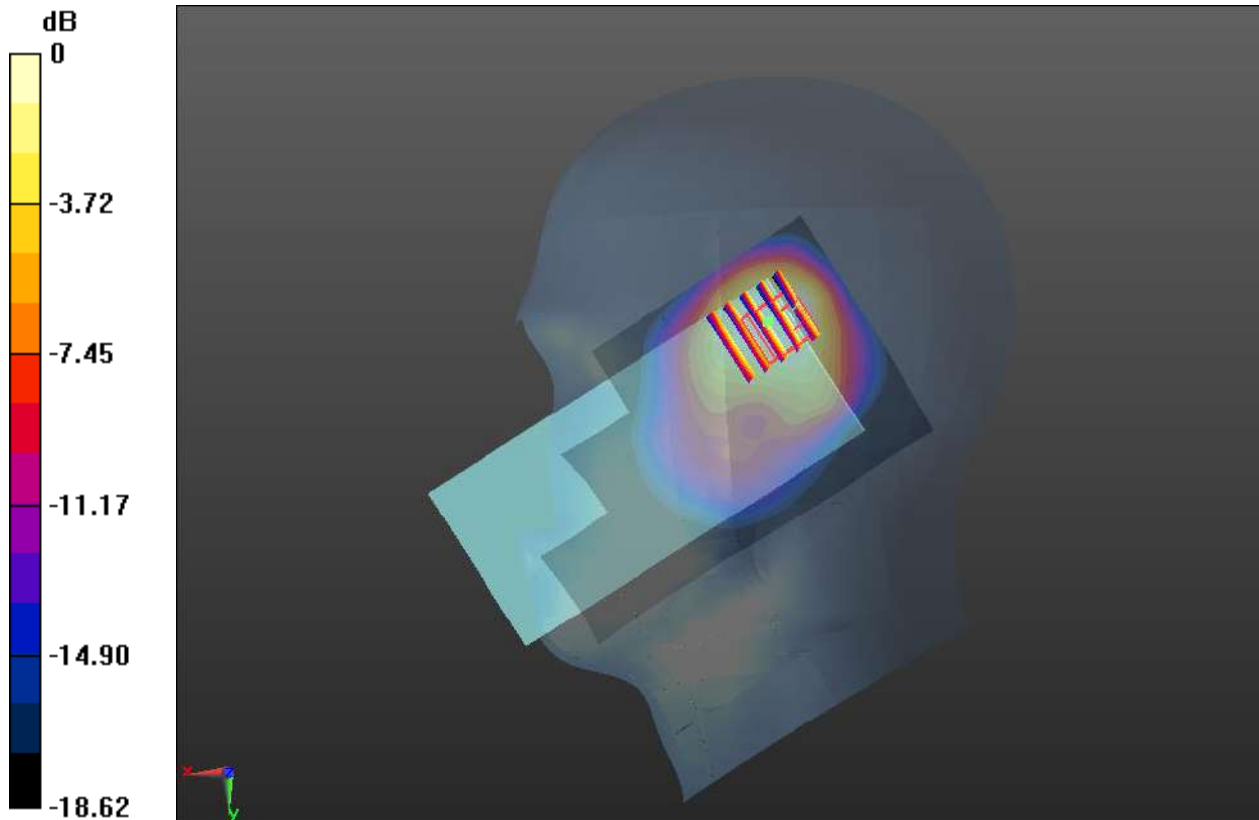

0 dB = 0.645 W/kg

Meas.66 Body Plane with Back Side 15mm on Middle Channel in NR Band2 mode with Antenna 2

Date: 2024.08.21

Communication System Band: N2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch376000/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.79 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

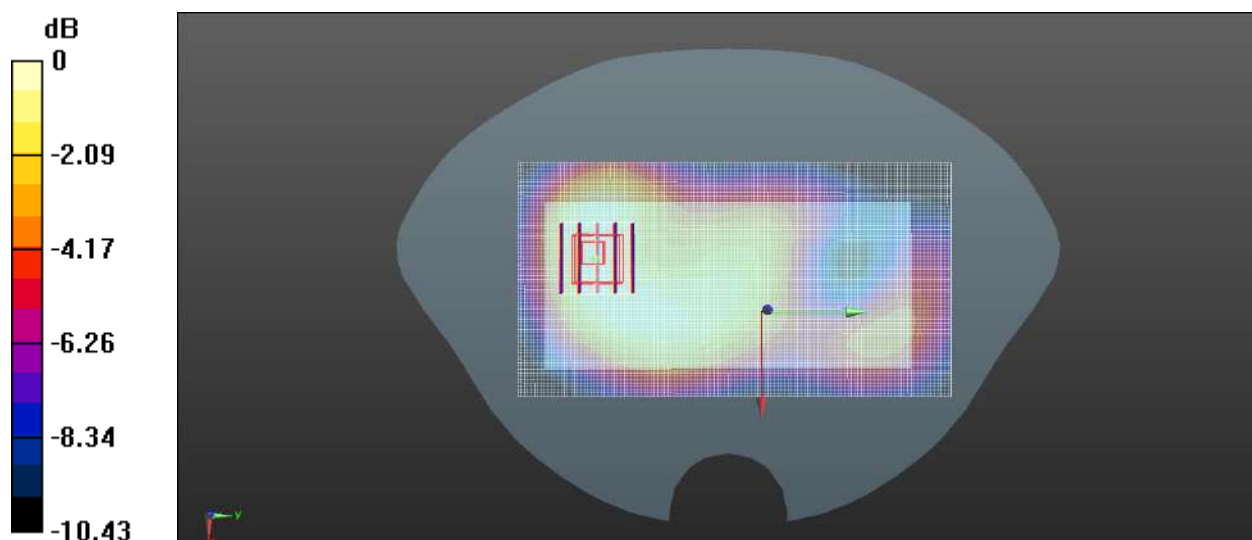

0 dB = 0.276 W/kg

Meas.67 Body Plane with Bottom Edge 10mm on Middle Channel in NR Band2 mode with Antenna 3

Date: 2024.08.21

Communication System Band: N2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch376000/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.660 W/kg



Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.62 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.301 W/kg

Maximum value of SAR (measured) = 0.609 W/kg

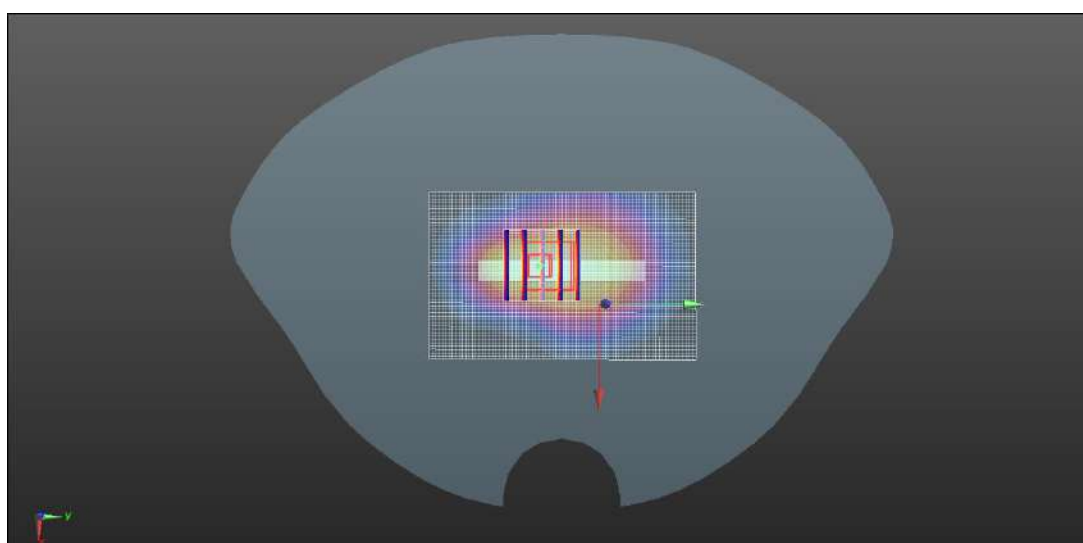

0 dB = 0.609 W/kg

Meas.68 Body Plane with Bottom Edge 0mm on Middle Channel in NR Band2 mode with Antenna 3

Date: 2024.08.21

Communication System Band: N2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.19, 7.19, 7.19); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch376000/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.61 W/kg


Ch376000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.22 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 4.29 W/kg; SAR(10 g) = 1.83 W/kg

Maximum value of SAR (measured) = 5.21 W/kg

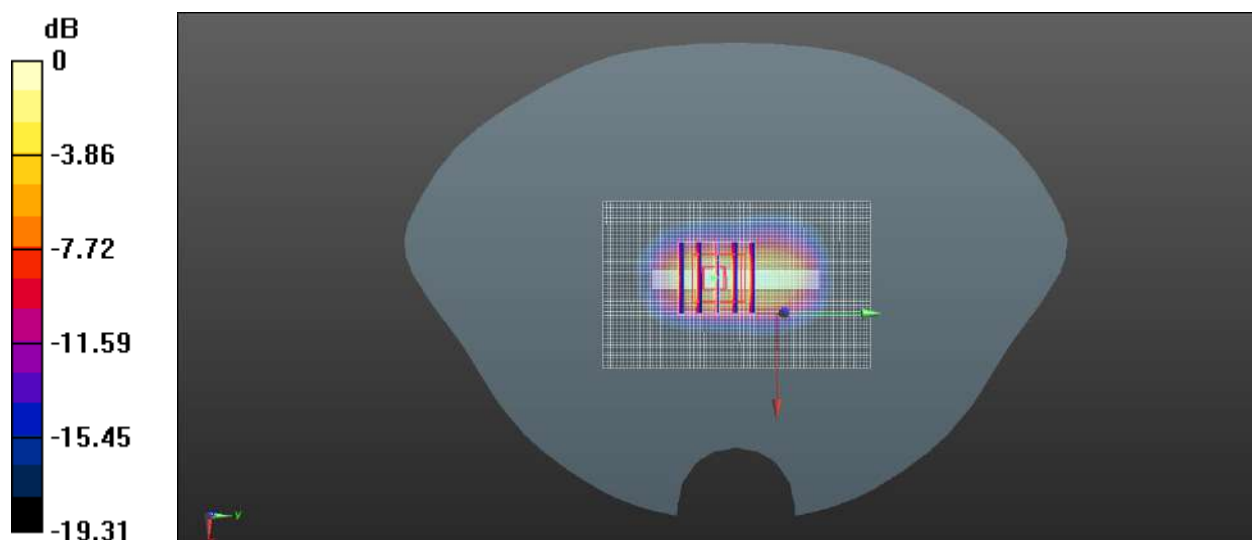

0 dB = 5.21 W/kg

Meas.69 Left Head with Cheek on Middle Channel in NR Band5 mode with Antenna 1

Date: 2024.08.29

Communication System Band: N5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.731$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch167300/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.776 W/kg


Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.926 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.330 W/kg

Maximum value of SAR (measured) = 0.700 W/kg

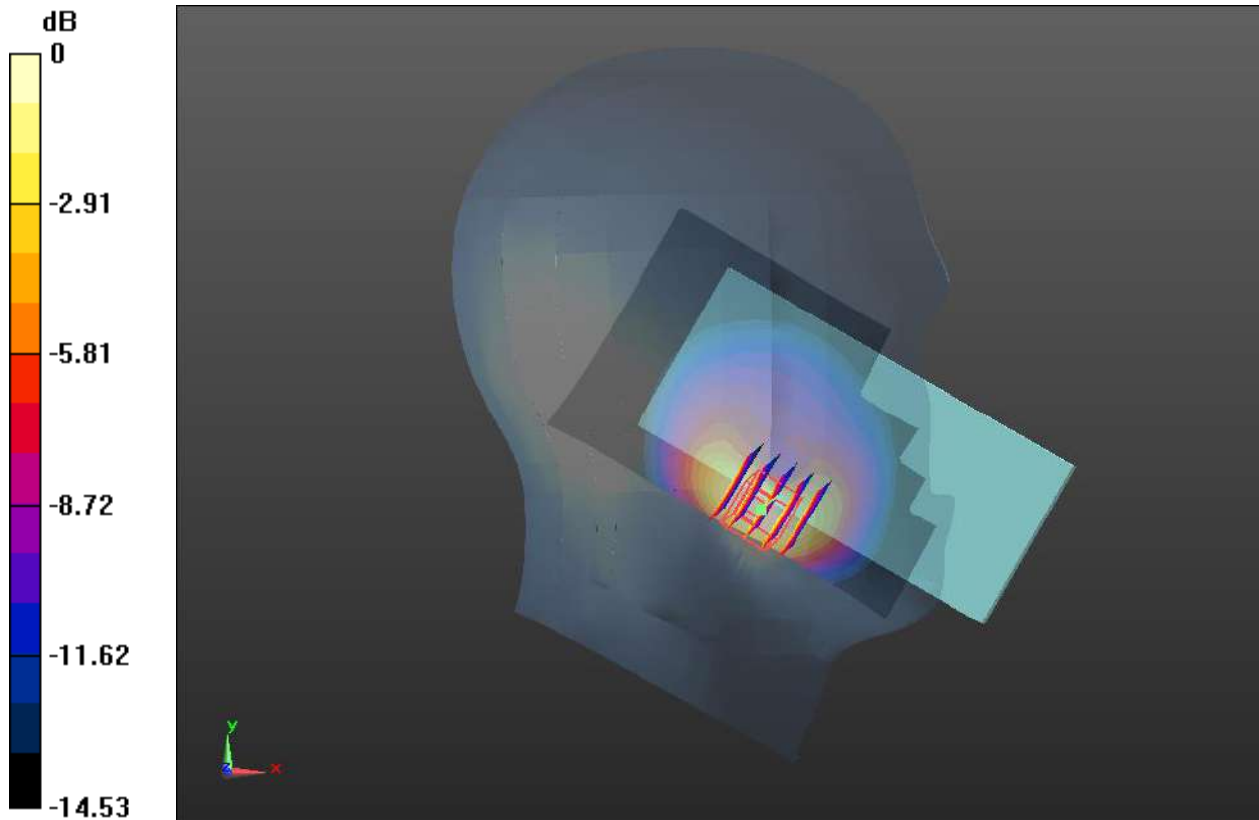

0 dB = 0.700 W/kg

Meas.70 Body Plane with Back Side 15mm on Middle Channel in NR Band5 mode with Antenna 1

Date: 2024.08.29

Communication System Band: N5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch167300/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.287 W/kg


Ch167300/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.943 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

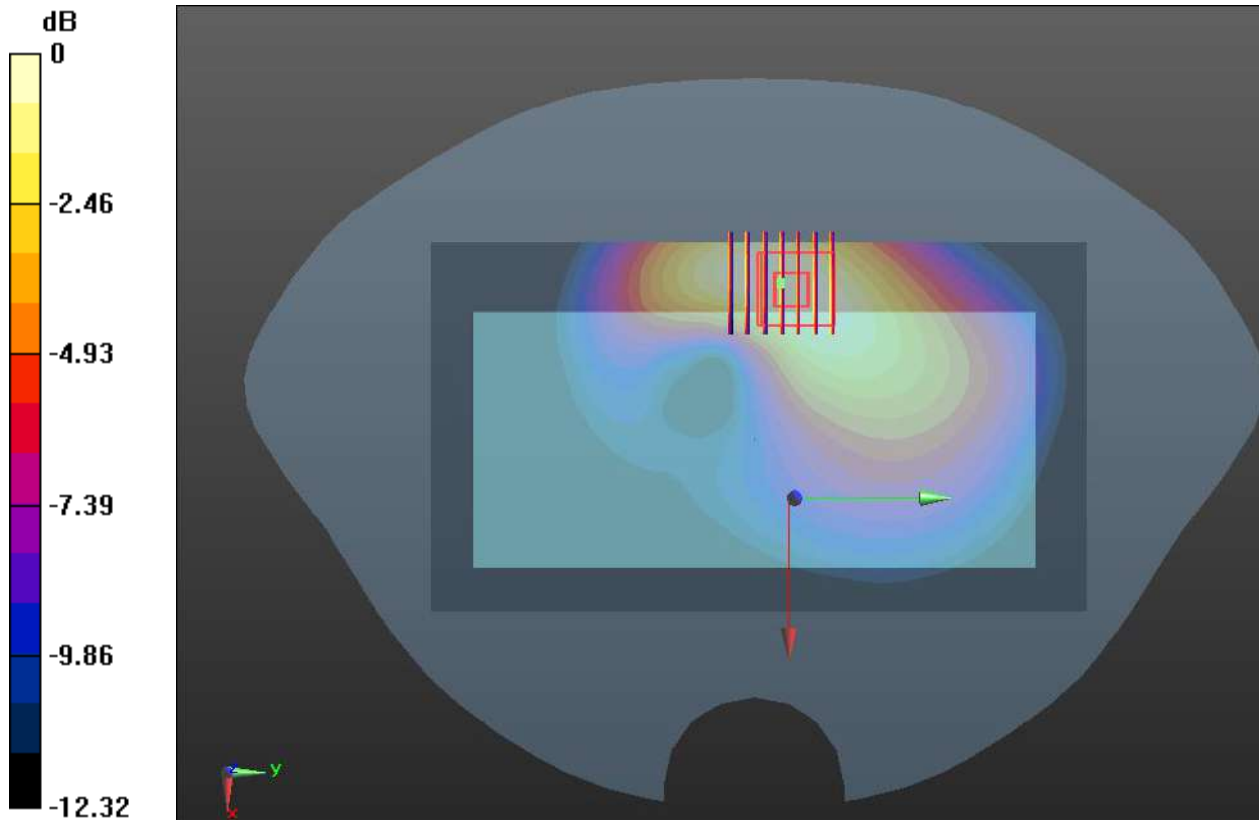

Meas.71 Body Plane with Left Edge 10mm on Middle Channel in NR Band5 mode with Antenna 1

Date: 2024.08.29

Communication System Band: N5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.731$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch167300/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.577 W/kg


Ch167300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.49 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.1710 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.278 W/kg

Maximum value of SAR (measured) = 0.556 W/kg

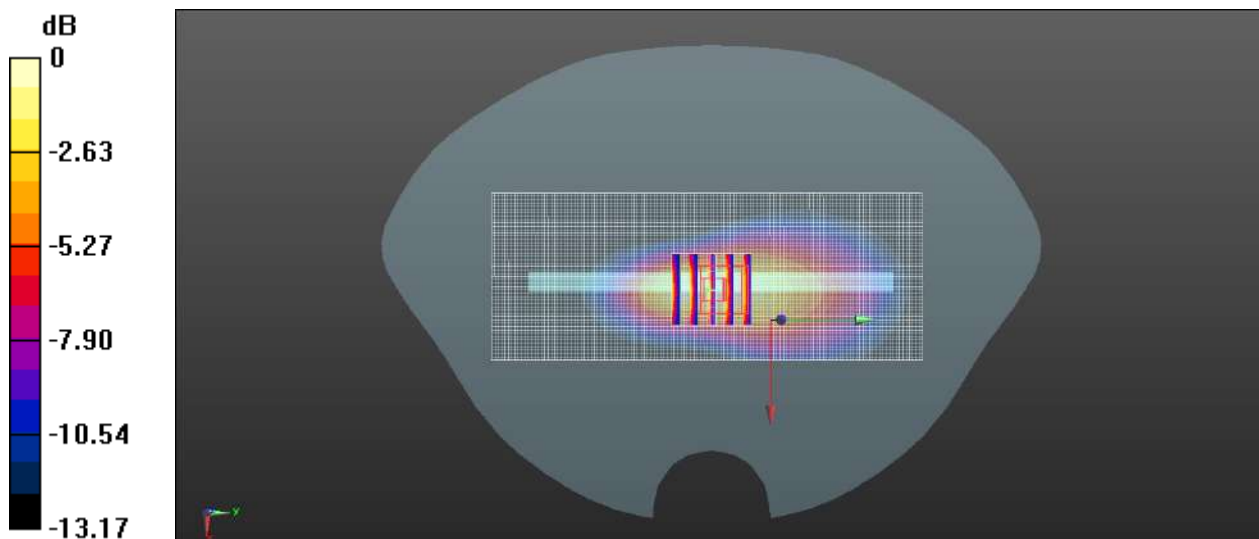

0 dB = 0.556 W/kg

Meas.72 Right Head with Cheek on Middle Channel in NR Band7 mode with Antenna 2

Date: 2024.09.05

Communication System Band: N7; Frequency: 2520 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2520$ MHz; $\sigma = 1.874$ S/m; $\epsilon_r = 39.79$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch504000/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.838 W/kg


Ch504000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.22 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.691 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.753 W/kg

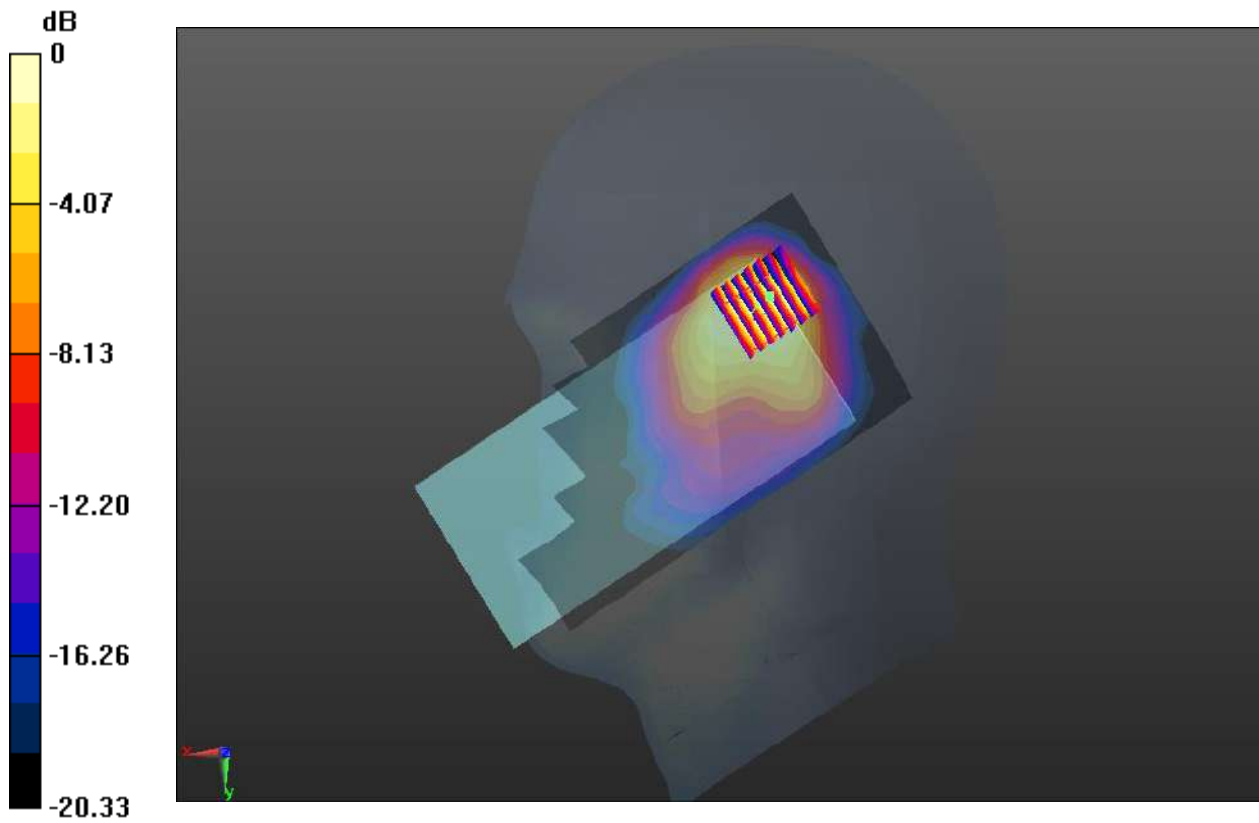

0 dB = 0.753 W/kg

Meas.73 Body Plane with Back Side 15mm on Middle Channel in NR Band7 mode with Antenna 2

Date: 2024.09.06

Communication System Band: N7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 39.671$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch507000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.766 W/kg



Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.760 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.402 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

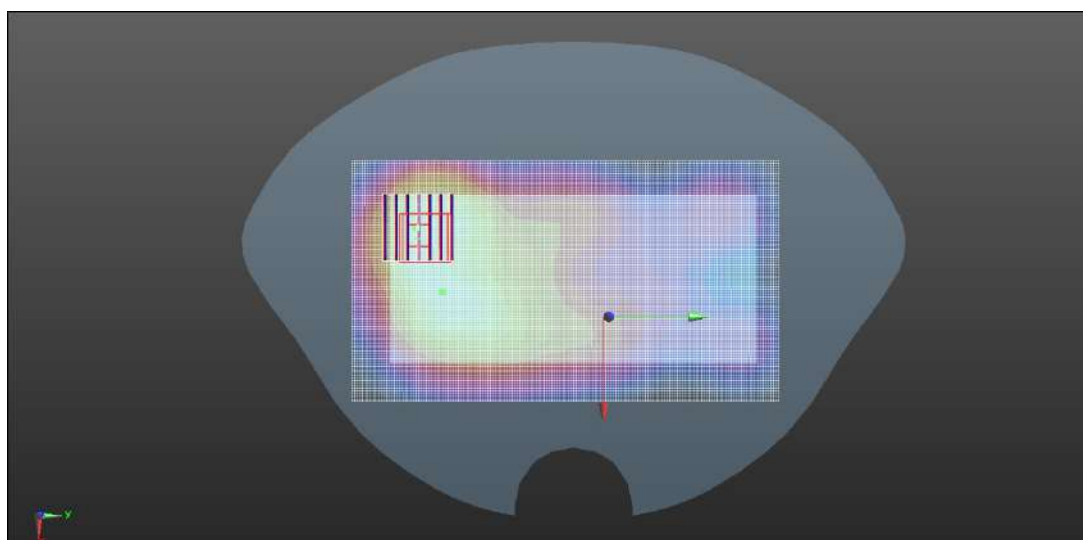

0 dB = 0.736 W/kg

Meas.74 Body Plane with Bottom Edge 10mm on Low Channel in NR Band7 mode with Antenna 3

Date: 2024.09.06

Communication System Band: N7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 39.671$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch507000/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.481 W/kg


Ch507000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.576 W/kg

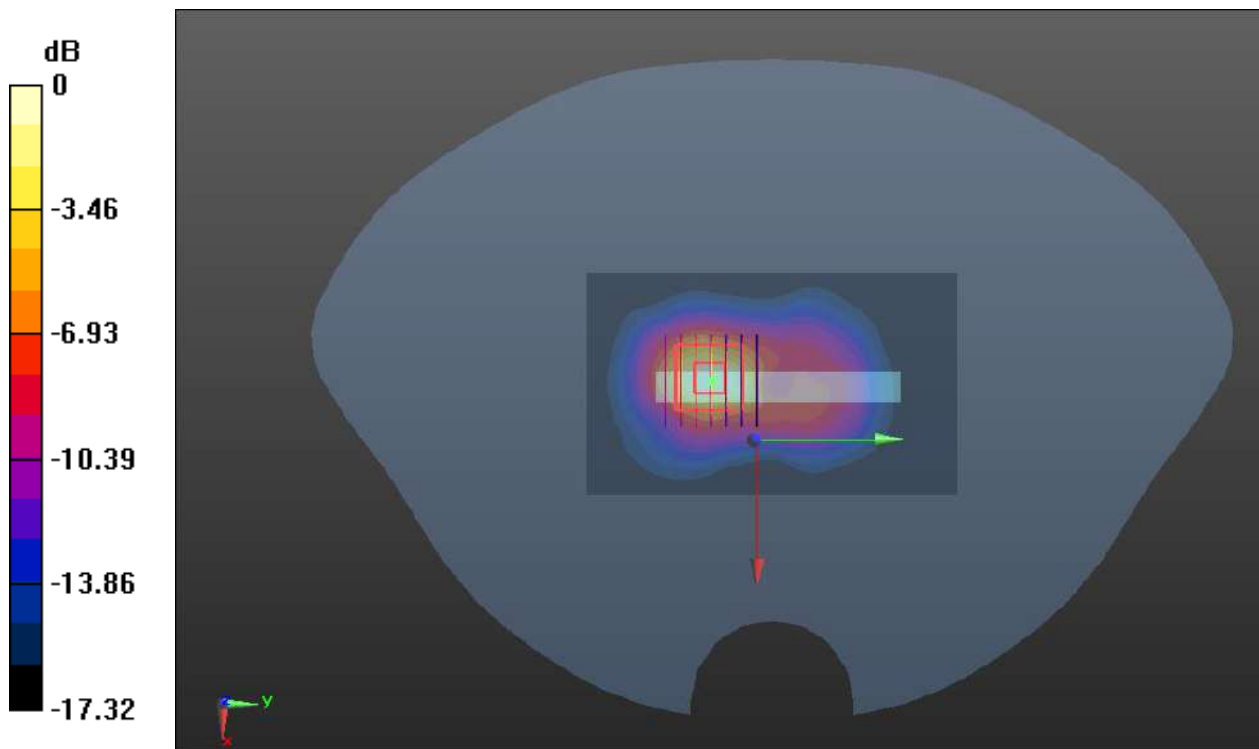

0 dB = 0.576 W/kg

Meas.75 Body Plane with Top Edge 10mm on Low Channel in NR Band7 mode with Antenna 2

Date: 2024.09.06

Communication System Band: N7; Frequency: 2520 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2520$ MHz; $\sigma = 1.876$ S/m; $\epsilon_r = 39.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.0°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch504000/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.41 W/kg


Ch504000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.10 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 4.18 W/kg; SAR(10 g) = 1.4 W/kg

Maximum value of SAR (measured) = 5.22 W/kg

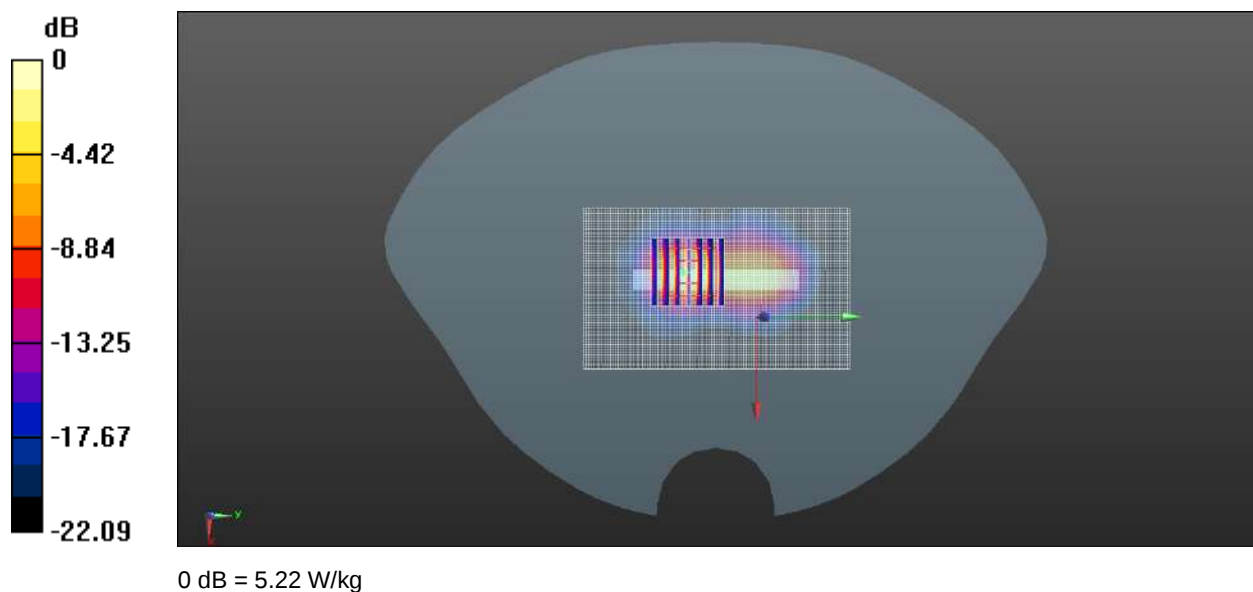

Meas.76 Left Head with Cheek on High Channel in NR Band12 mode with Antenna 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	CHEEK,	Band	5G NR FR1	708.5,	10.29	0.890	42.3	22.5	21.4
HSL	0.00	n12	FDD,	141700					
			10930-AAC						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-09	2024-09-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.780	0.751
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.450	0.399
[mm]			Power Drift [dB]	-0.19	0.02
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		52.7
			Dist 3dB Peak		9.3
			[mm]		

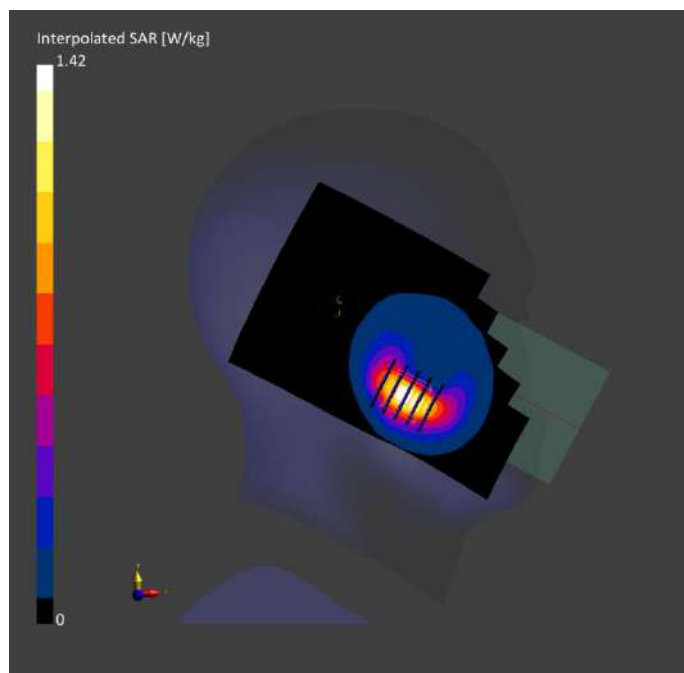

Meas.77 Body Plane with Back Side 15mm on Middle Channel in NR Band12 mode with Antenna 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band n12	5G NR FR1 FDD, 10930-AAC	707.5, 141500	10.29	0.887	43.1	22.5	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-09	2024-09-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.209	0.216
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.138	0.139
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		65.8
			Dist 3dB Peak [mm]		12.9

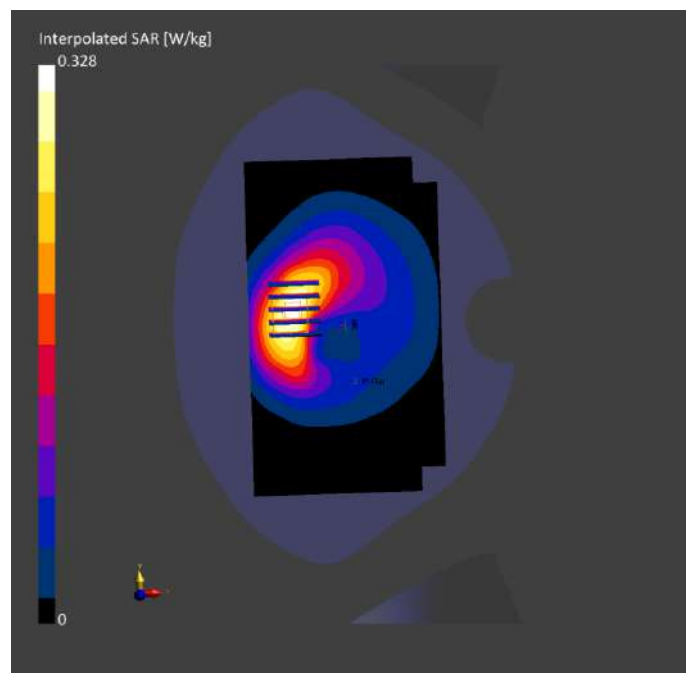

Meas.78 Body Plane with Left Edge 10mm on High Channel in NR Band12 mode with Antenna 1
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE	Band	5G NR FR1	708.5,	10.29	0.890	42.3	22.5	21.4
HSL	LEFT,	n12	FDD,	141700					
	10.00		10930-AAC						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-09	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 210.0	32.0 x 32.0 x 30.0	Date	2024-09-09	2024-09-09
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0	psSAR1g [W/kg]	0.574	0.660
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.362	0.381
[mm]			Power Drift [dB]	-0.04	-0.06
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.0
			Dist 3dB Peak		9.6
			[mm]		

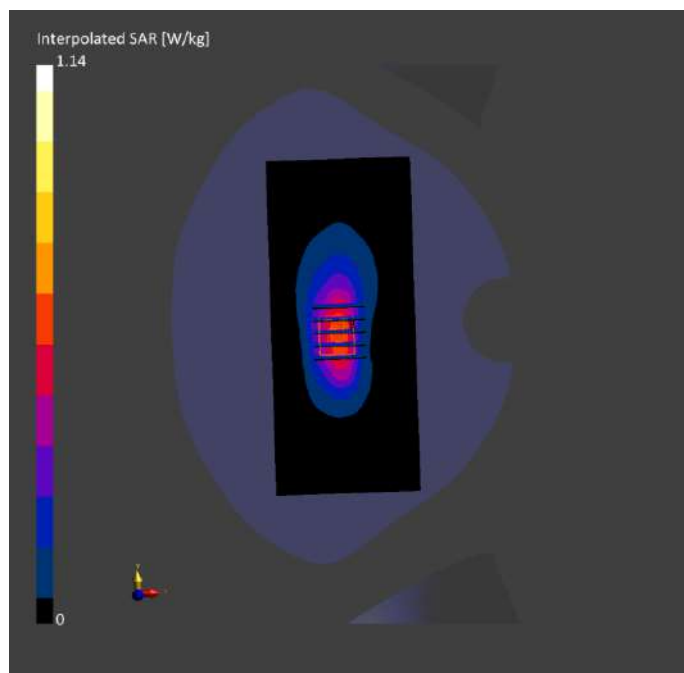

Meas.79 Left Head with Cheek on Middle Channel in NR Band26 mode with Antenna 1

Date: 2024.08.29

Communication System Band: N26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.827$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch166300/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.727 W/kg


Ch166300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.306 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 0.643 W/kg

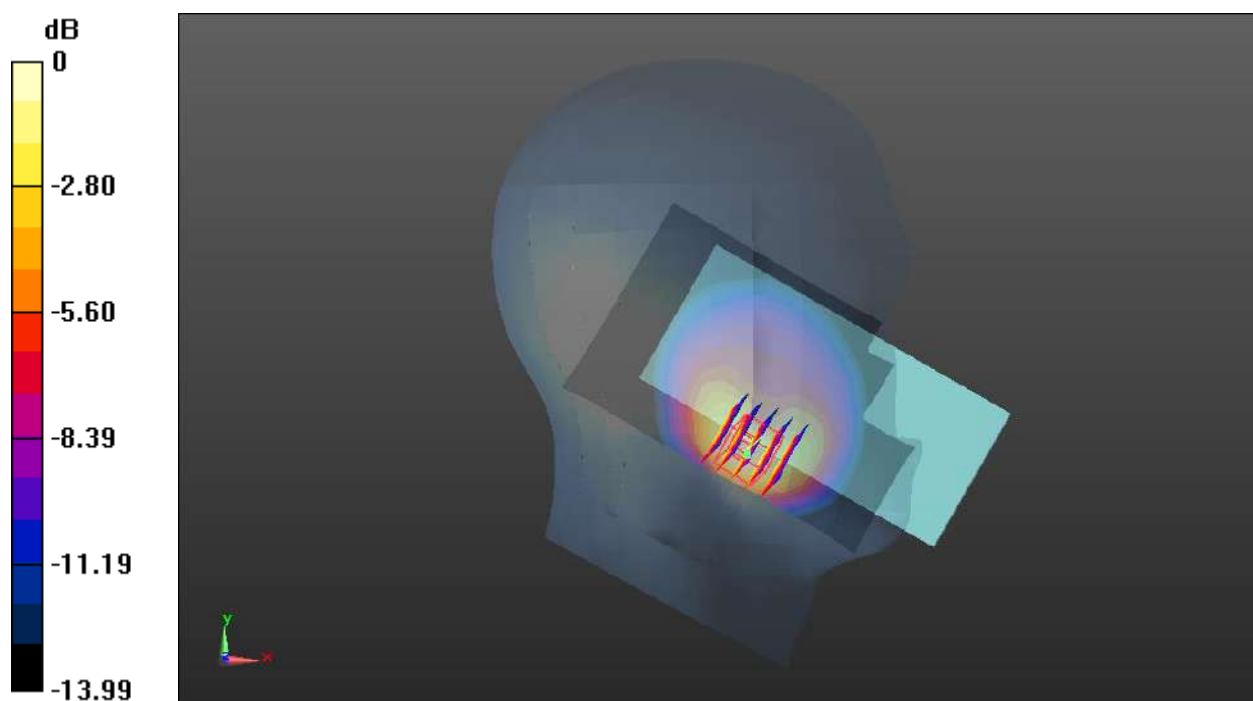

0 dB = 0.643 W/kg

Meas.80 Body Plane with Back Side 15mm on Middle Channel in NR Band26 mode with Antenna 1

Date: 2024.08.29

Communication System Band: N26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.827$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch166300/Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.340 W/kg


Ch166300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.191 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.464 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.346 W/kg

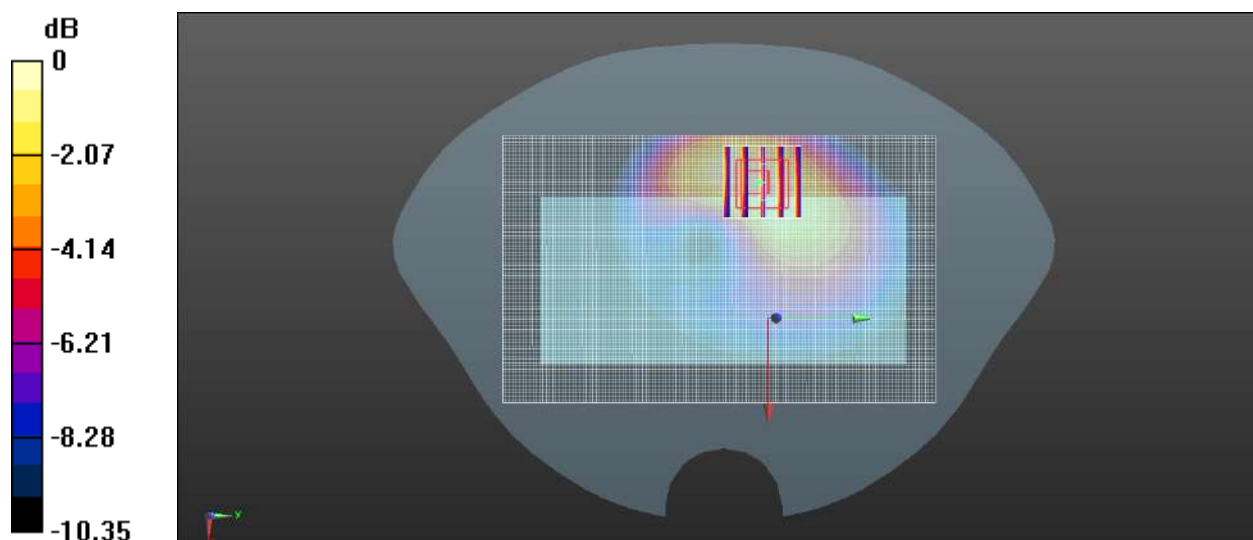

Meas.81 Body Plane with Left Edge 10mm on Middle Channel in NR Band26 mode with Antenna 1

Date: 2024.08.29

Communication System Band: N26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 41.827$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(8.73, 8.73, 8.73); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch166300/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.606 W/kg


Ch166300/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.65 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.296 W/kg

Maximum value of SAR (measured) = 0.580 W/kg

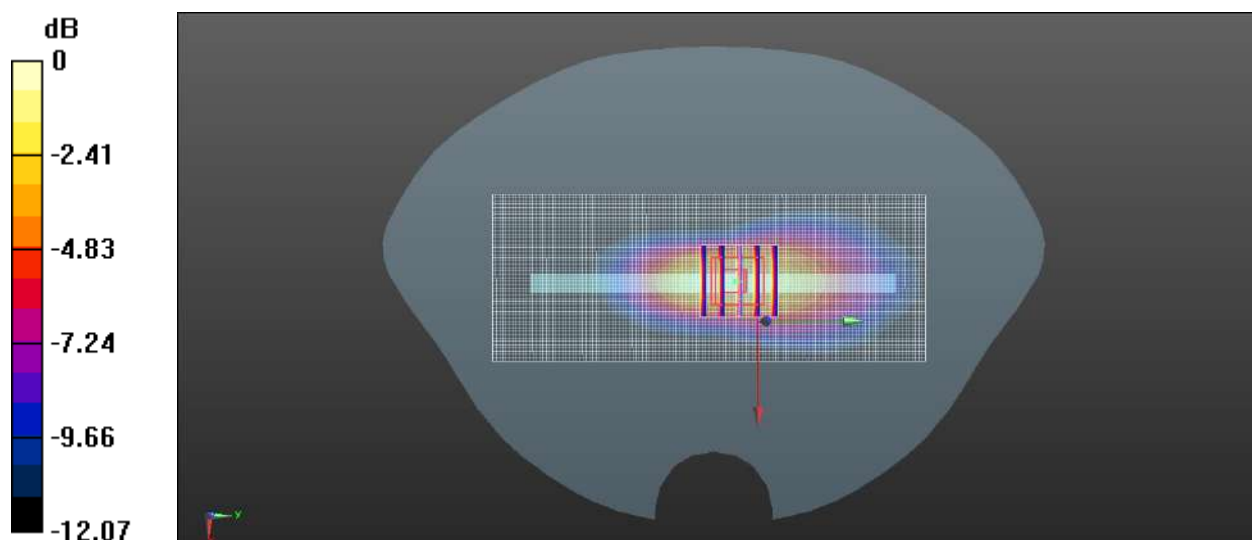

0 dB = 0.580 W/kg

Meas.82 Right Head with Cheek on Middle Channel in NR Band66 mode with Antenna 2

Date: 2024.08.24

Communication System Band: N66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.424$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch349000/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.69 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.882 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 0.948 W/kg

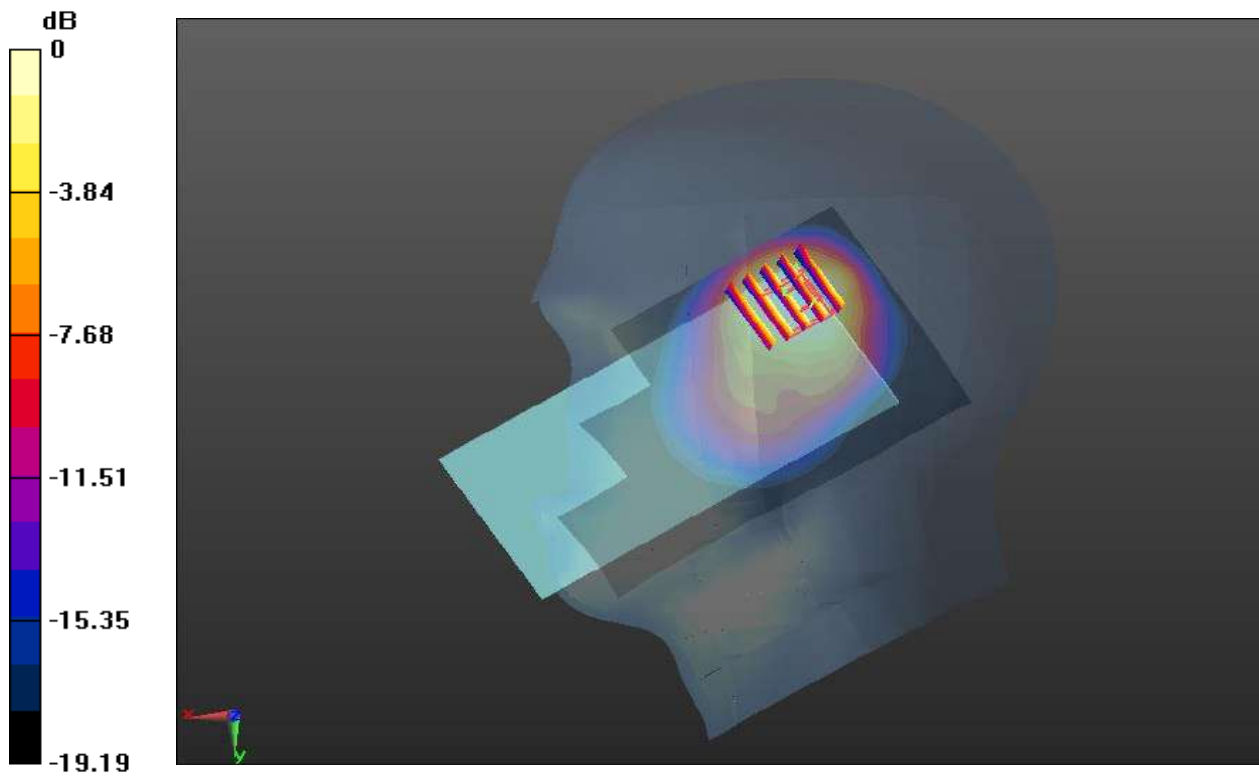

0 dB = 0.948 W/kg

Meas.83 Body Plane with Back Side 15mm on Middle Channel in NR Band66 mode with Antenna 2

Date: 2024.08.24

Communication System Band: N66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.424$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch349000/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.350 W/kg


Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.88 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

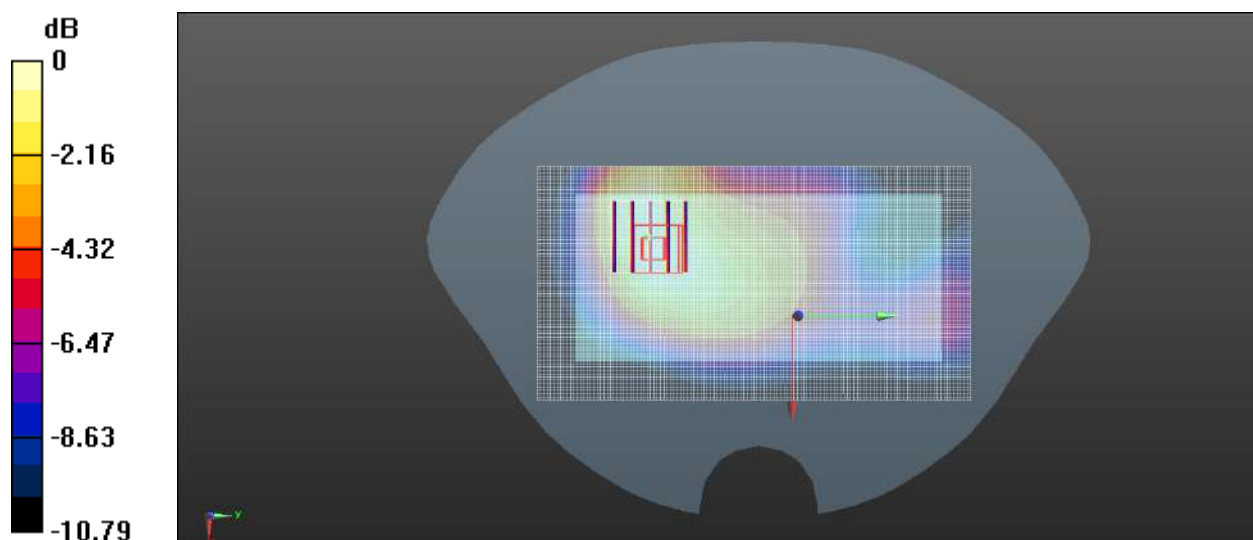

Meas.84 Body Plane with Bottom Edge 10mm on Middle Channel in NR Band66 mode with Antenna 3

Date: 2024.08.24

Communication System Band: N66; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.424$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch349000/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.559 W/kg



Ch349000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.24 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 0.529 W/kg

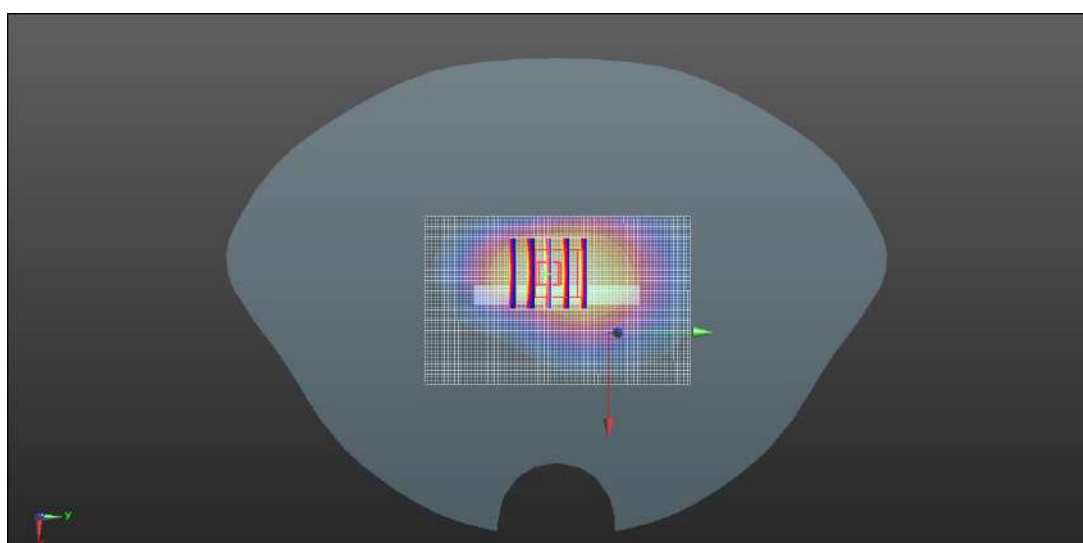

0 dB = 0.529 W/kg

Meas.85 Body Plane with Top Edge 0mm on High Channel in NR Band66 mode with Antenna 2

Date: 2024.08.24

Communication System Band: N66; Frequency: 1760 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1760$ MHz; $\sigma = 1.411$ S/m; $\epsilon_r = 39.624$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch352000/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.46 W/kg


Ch352000/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.79 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 7.26 W/kg

SAR(1 g) = 3.31 W/kg; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 3.88 W/kg

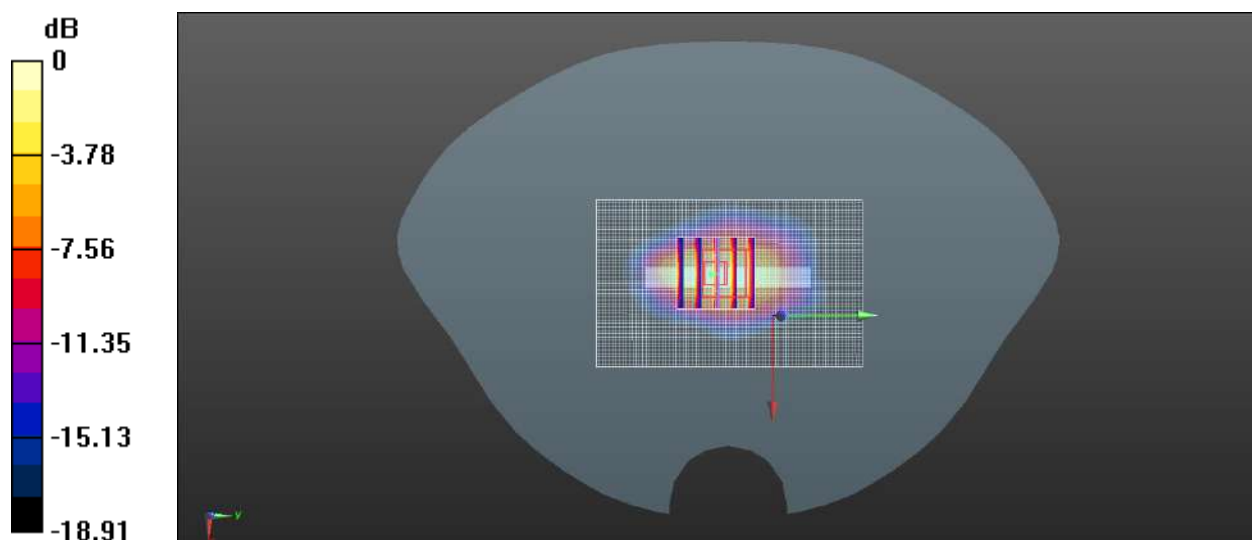

0 dB = 3.88 W/kg

Meas.86 Right Head with Cheek on Middle Channel in NR Band38 mode with Antenna 2

Date: 2024.09.08

Communication System Band: N38; Frequency: 2595 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 38.932$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch519000/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.96 W/kg


Ch519000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.89 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.339 W/kg

Maximum value of SAR (measured) = 0.848 W/kg

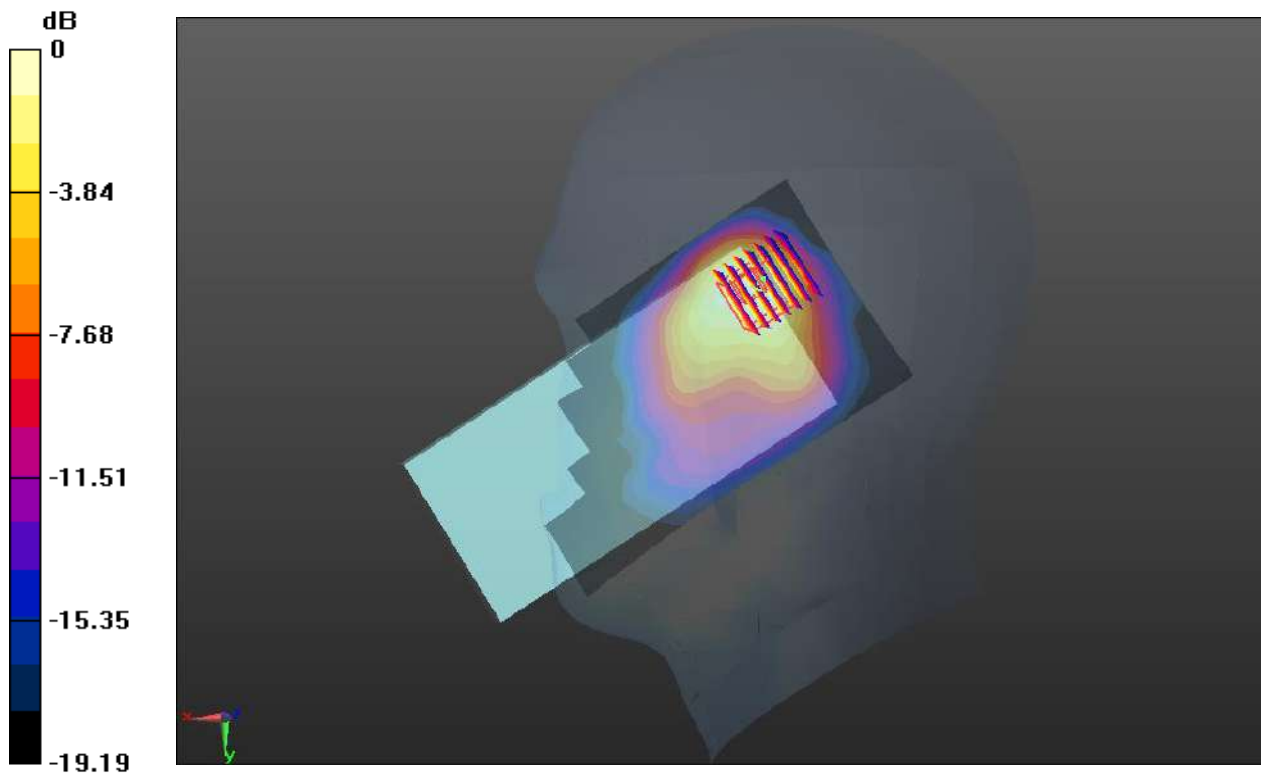

0 dB = 0.848 W/kg

Meas.87 Body Plane with Back Side 15mm on Middle Channel in NR Band38 mode with Antenna 2

Date: 2024.09.08

Communication System Band: N38; Frequency: 2595 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 38.932$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch519000/Area Scan (91x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.557 W/kg


Ch519000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.980 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.944 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

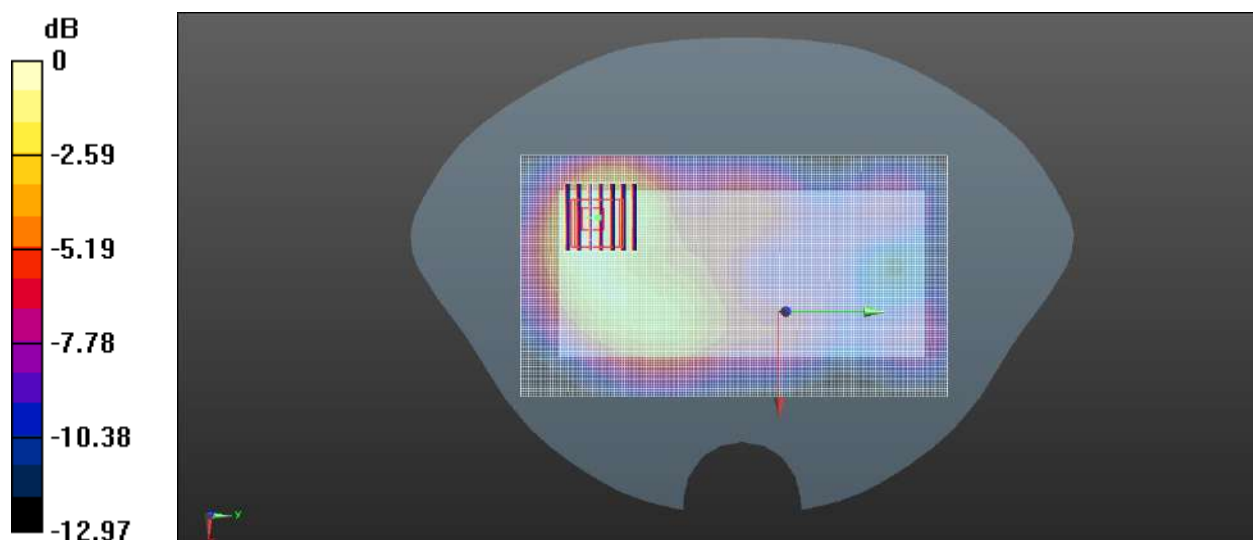

0 dB = 0.551 W/kg

Meas.88 Body Plane with Bottom Edge 10mm on Low Channel in NR Band38 mode with Antenna 3

Date: 2024.09.07

Communication System Band: N38; Frequency: 2590 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2590$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 39.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch518000/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.431 W/kg


Ch518000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.39 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.195 W/kg

Maximum value of SAR (measured) = 0.437 W/kg

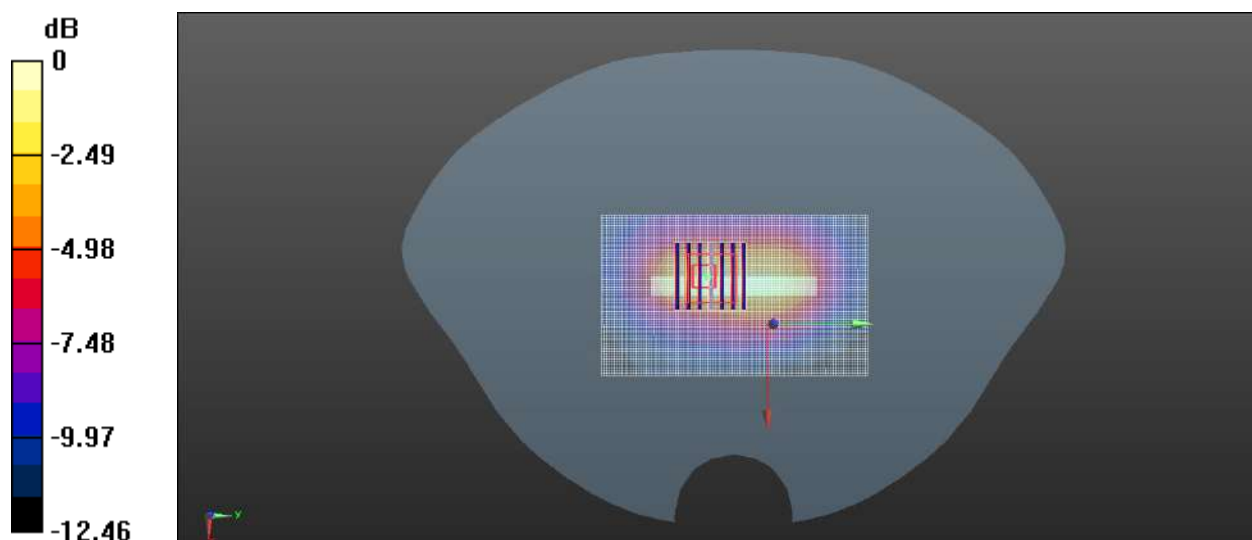

0 dB = 0.437 W/kg

Meas.89 Body Plane with Top Edge 0mm on Low Channel in NR Band38 mode with Antenna 2

Date: 2024.09.07

Communication System Band: N38; Frequency: 2590 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2590$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 39.238$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch518000/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.92 W/kg


Ch518000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.10 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 6.48 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 8.11 W/kg

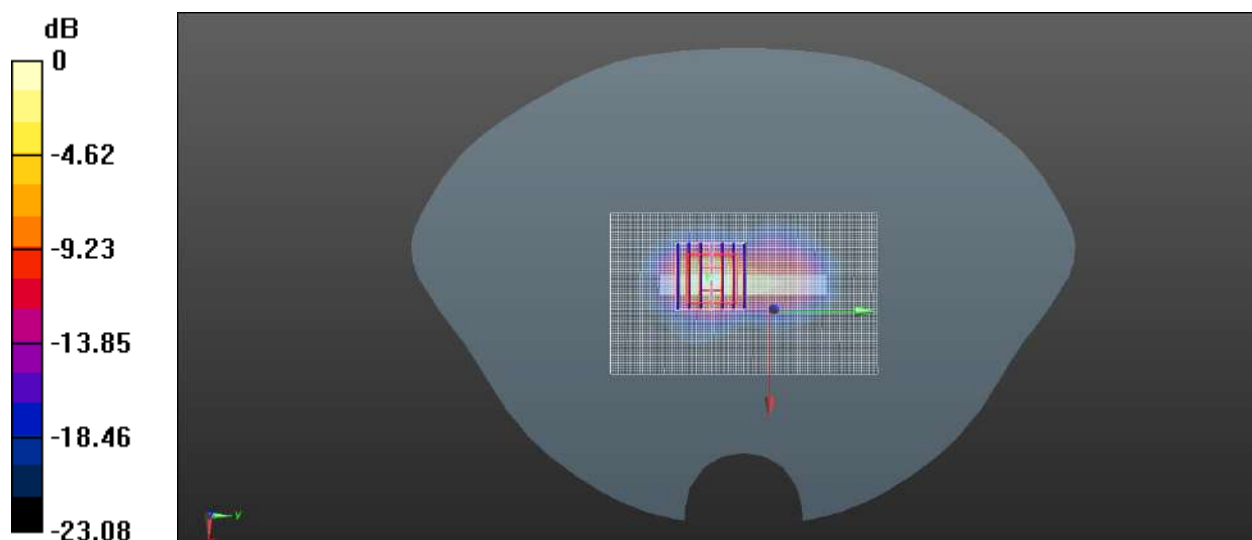

0 dB = 8.11 W/kg

Meas.90 Right Head with Cheek on Middle Channel in NR Band41 mode with Antenna 2

Date: 2024.09.09

Communication System Band: N41; Frequency: 2640 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2640$ MHz; $\sigma = 2.047$ S/m; $\epsilon_r = 38.418$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch528000/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.920 W/kg


Ch528000/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.53 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.770 W/kg

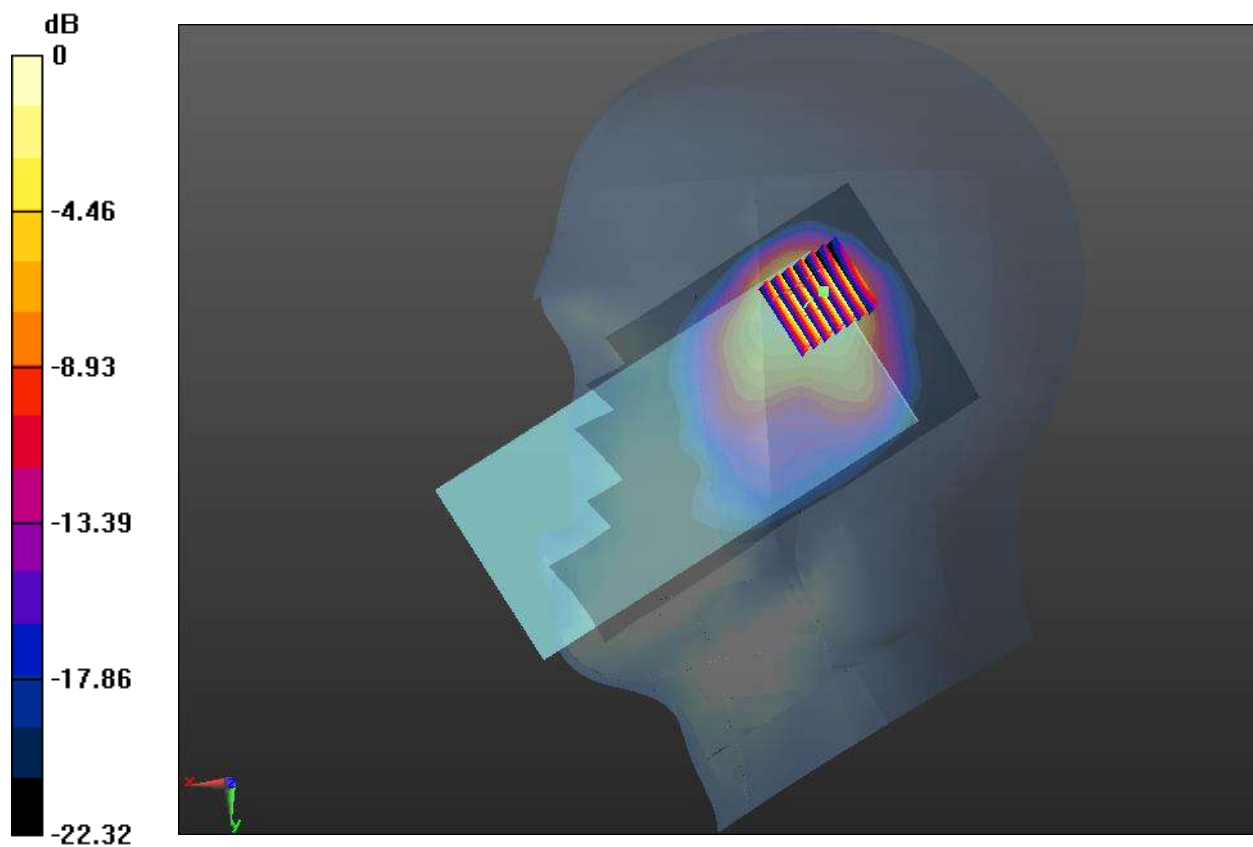

0 dB = 0.770 W/kg

Meas.91 Body Plane with Back Side 15mm on Middle Channel in NR Band41 mode with Antenna 2

Date: 2024.09.09

Communication System Band: N41; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 1.964$ S/m; $\epsilon_r = 39.114$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch518598/Area Scan (91x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.391 W/kg


Ch518598/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.552 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.650 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.387 W/kg

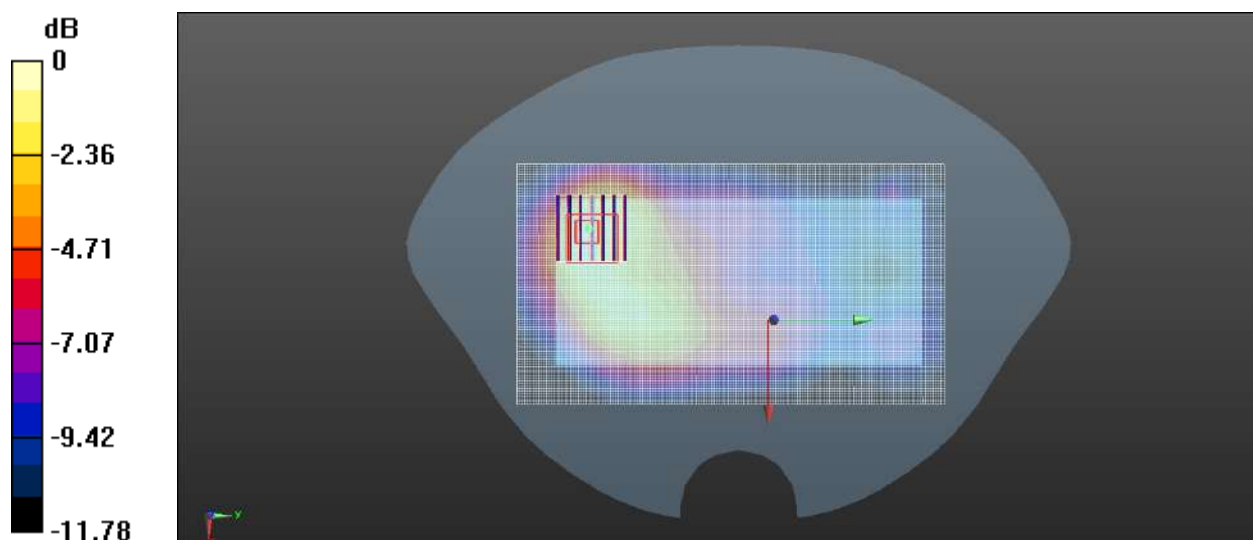

0 dB = 0.387 W/kg

Meas.92 Body Plane with Bottom Edge 10mm on Low Channel in NR Band41 mode with Antenna 3

Date: 2024.09.10

Communication System Band: N41; Frequency: 2569.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2569.5$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 39.613$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch513900/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.711 W/kg


Ch513900/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.29 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.316 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

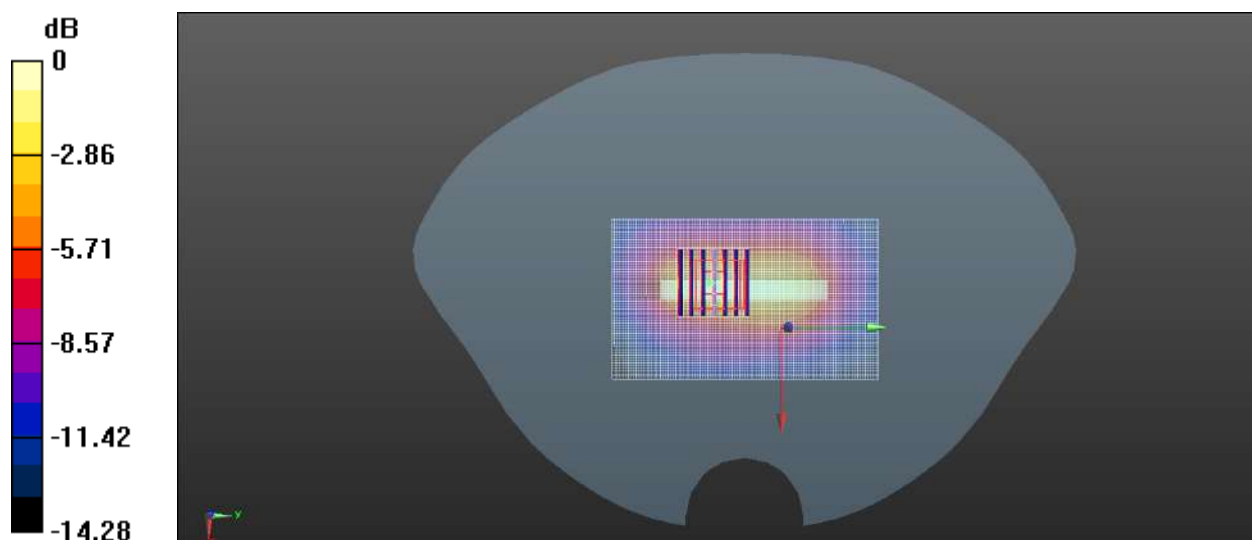

0 dB = 0.736 W/kg

Meas.93 Body Plane with Top Edge 0mm on Middle Channel in NR Band41 mode with Antenna 2

Date: 2024.09.10

Communication System Band: N41; Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 1.961$ S/m; $\epsilon_r = 39.538$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch518598/Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.55 W/kg


Ch518598/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.99 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 13.9 W/kg

SAR(1 g) = 4.95 W/kg; SAR(10 g) = 1.67 W/kg

Maximum value of SAR (measured) = 6.02 W/kg

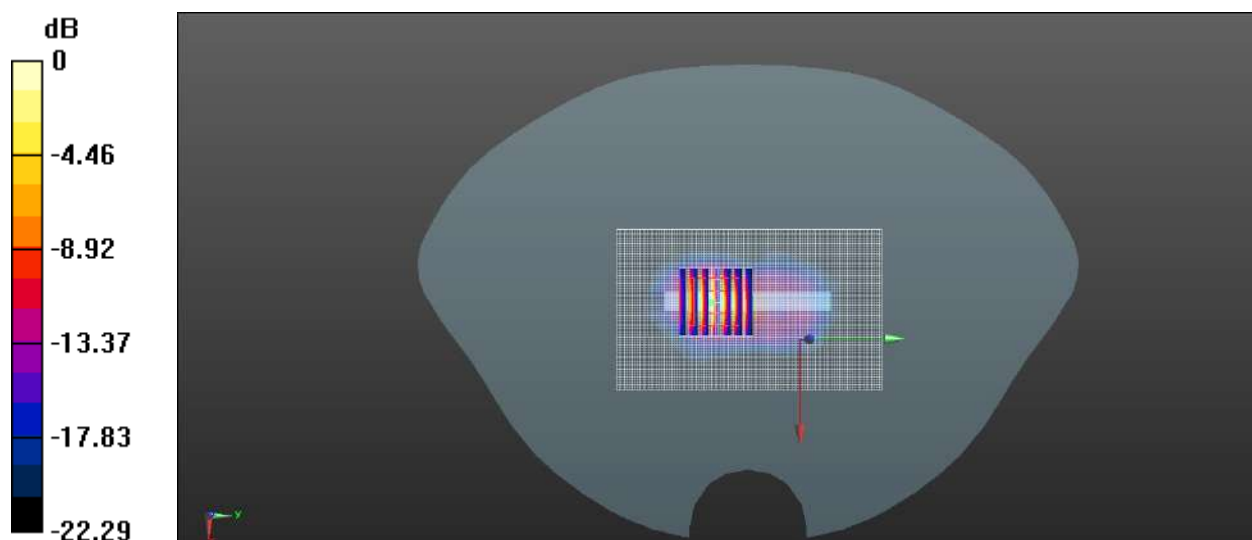

0 dB = 6.02 W/kg

Meas.94 Right Head with Cheek on Low Channel in NR Band48 mode with Antenna 6

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
RightHead, HSL	CHEEK, 0.00	Band n48	5G NR FR1 TDD, 10903-AAD	3570.0, 638000	7.11	3.00	37.7	22.4	21.3


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-04	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-04	2024-09-04
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.724	0.726
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.281	0.279
Graded Grid	Yes	Yes	Power Drift [dB]	-0.05	0.00
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface Detection	VMS + 6p	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		44.1
			Dist 3dB Peak [mm]		7.3

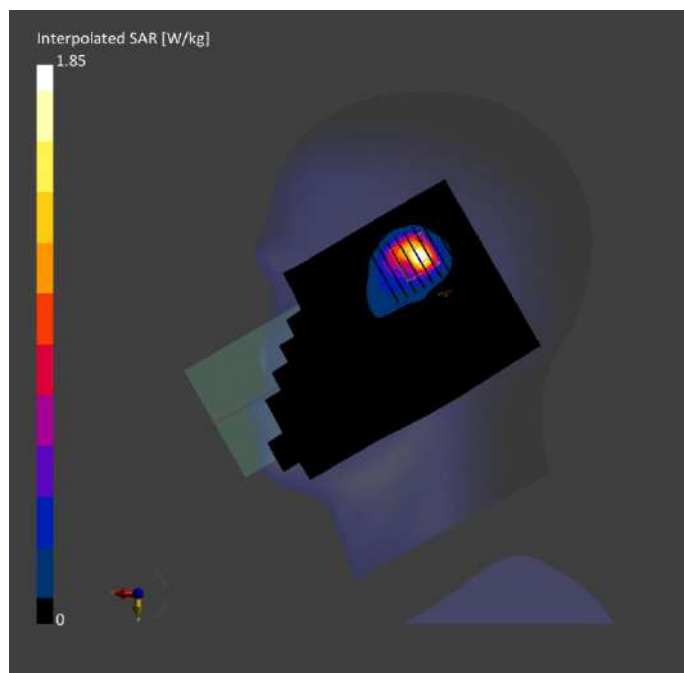

Meas.95 Body Plane with Back Side 15mm on Middle Channel in NR Band48 mode with Antenna 6
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band n48	5G NR FR1 TDD, 10903-AAD	3625.0, 641666	6.94	3.02	38.3	22.5	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-05	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-05	2024-09-05
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.226	0.236
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.10	0.105
Graded Grid	Yes	Yes	Power Drift [dB]	-0.03	-0.01
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.9
			Dist 3dB Peak [mm]		11.3

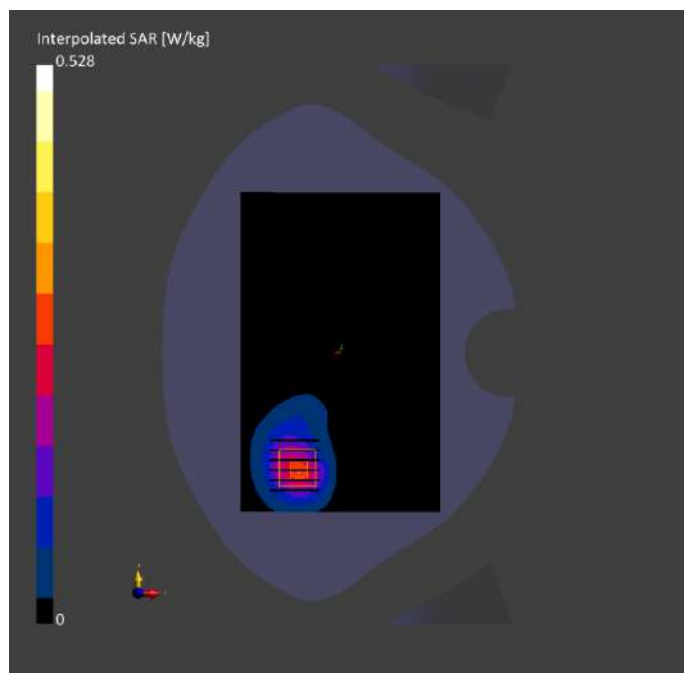

Meas.96 Body Plane with Right Edge 10mm on Low Channel in NR Band48 mode with Antenna 9
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE	Band	5G NR FR1	3570.0,	7.11	3.00	37.7	22.4	21.3
HSL	RIGHT,	n48	TDD,	638000					
	10.00		10903-AAD						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-04	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-04	2024-09-04
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.339	0.373
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.145	0.153
[mm]			Power Drift [dB]	0.02	0.05
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	Y	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.6
			Dist 3dB Peak		9.6
			[mm]		

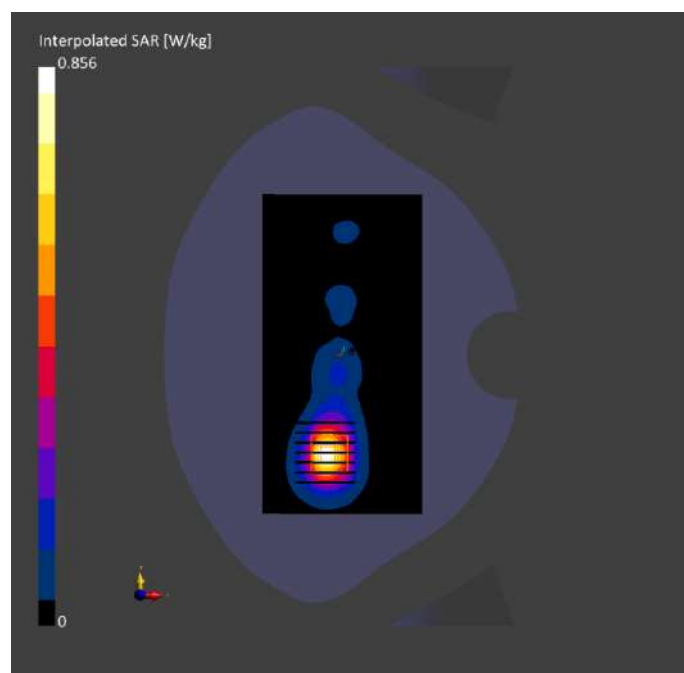

Meas.97 Body Plane with Top Edge 0mm on Middle Channel in NR Band48 mode with Antenna 6
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	Band	5G NR FR1	3625.0,	6.94	3.02	38.3	22.5	21.4
HSL	0.00	n48	TDD,	641666					
			10903-AAD						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-05	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	24.0 x 24.0 x 24.0	Date	2024-09-05	2024-09-05
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	5.68	6.40
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	1.62	1.78
[mm]			Power Drift [dB]	0.00	0.02
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		41.0
			Dist 3dB Peak		4.8
			[mm]		

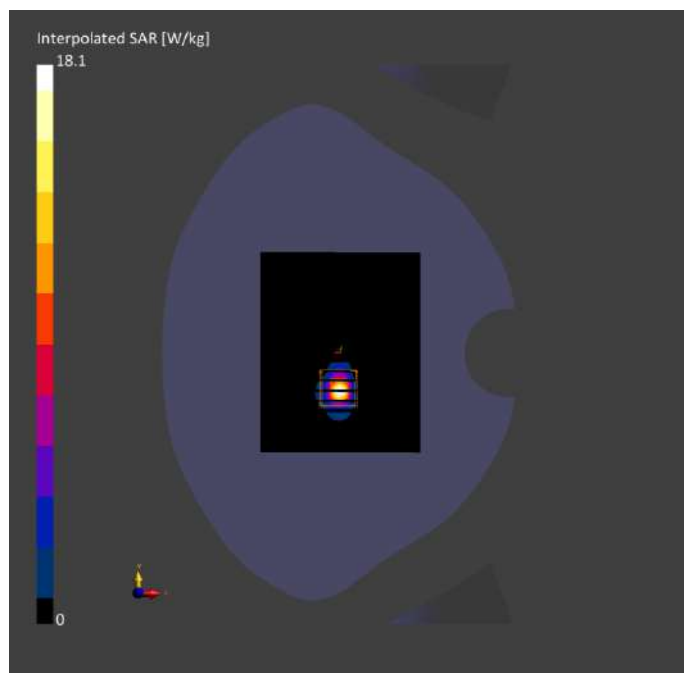

Meas.98 Right Head with Cheek on Middle Channel in NR Band77 mode with Antenna 6

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
RightHead,	CHEEK,	Band	5G NR FR1	3750.0,	6.94	3.19	37.9	22.3	21.1
HSL	0.00	n77	TDD,	650000					
			10866-AAF						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-06	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-06	2024-09-06
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.676	0.692
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.259	0.264
[mm]			Power Drift [dB]	0.02	0.00
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		44.4
			Dist 3dB Peak		7.6
			[mm]		

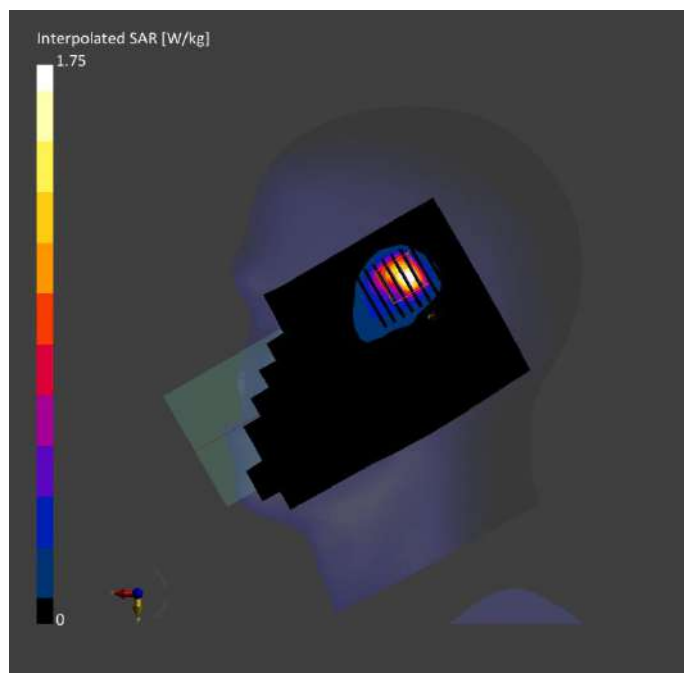

Meas.99 Body Plane with Back Side 15mm on Middle Channel in NR Band77 mode with Antenna 7
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	BACK,	Band	5G NR FR1	3840.0,	6.85	3.25	38.0	22.4	21.3
HSL	15.00	n77	TDD,	656000					
			10866-AAF						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-14	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-08-14	2024-08-14
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.604	0.616
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.272	0.285
[mm]			Power Drift [dB]	0.01	-0.05
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	Y	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		48.6
			Dist 3dB Peak		11.3
			[mm]		

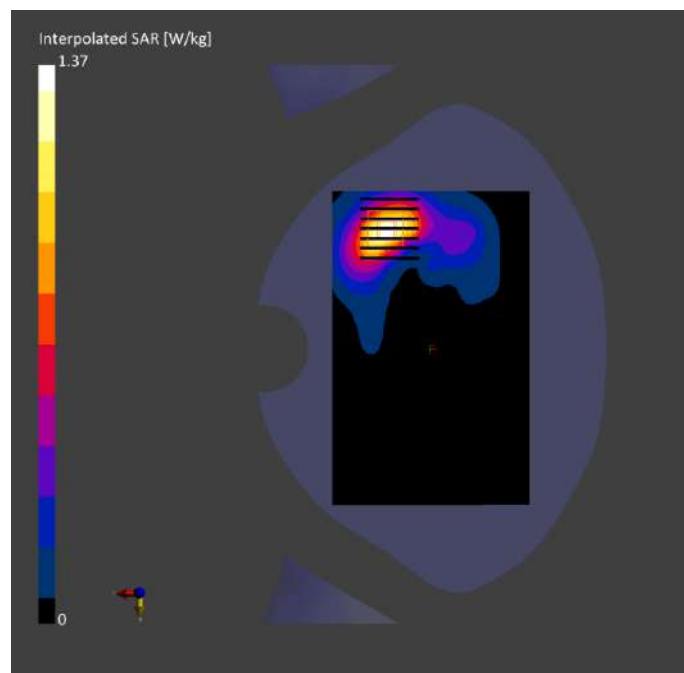

Meas.100 Body Plane with Top Edge 10mm on Middle Channel in NR Band77 mode with Antenna 7
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	Band	5G NR FR1	3840.0,	6.85	3.25	38.0	22.4	21.3
HSL	10.00	n77	TDD,	656000					
			10866-AAF						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-14	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	24.0 x 24.0 x 24.0	Date	2024-08-14	2024-08-14
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.273	0.285
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.114	0.117
[mm]			Power Drift [dB]	-0.01	0.09
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	Y	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		44.7
			Dist 3dB Peak		9.9
			[mm]		

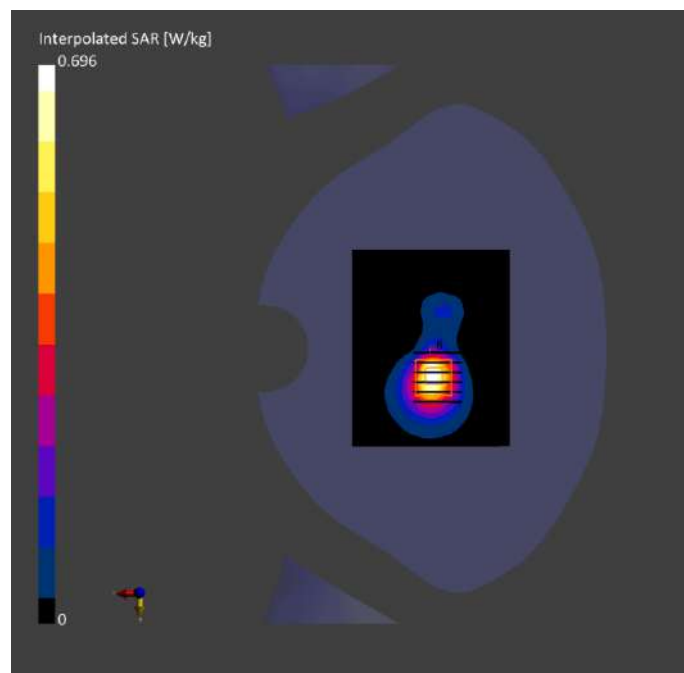

Meas.101 Body Plane with Top Edge 10mm on Middle Channel in NR Band77 mode with Antenna 7
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	Band	5G NR FR1	3840.0,	6.85	3.25	38.0	22.4	21.3
HSL	0.00	n77	TDD,	656000					
			10866-AAF						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-14	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	24.0 x 24.0 x 24.0	Date	2024-08-14	2024-08-14
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	4.16	6.48
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	1.35	1.64
[mm]			Power Drift [dB]	-0.03	-0.02
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		39.6
			Dist 3dB Peak		6.0
			[mm]		

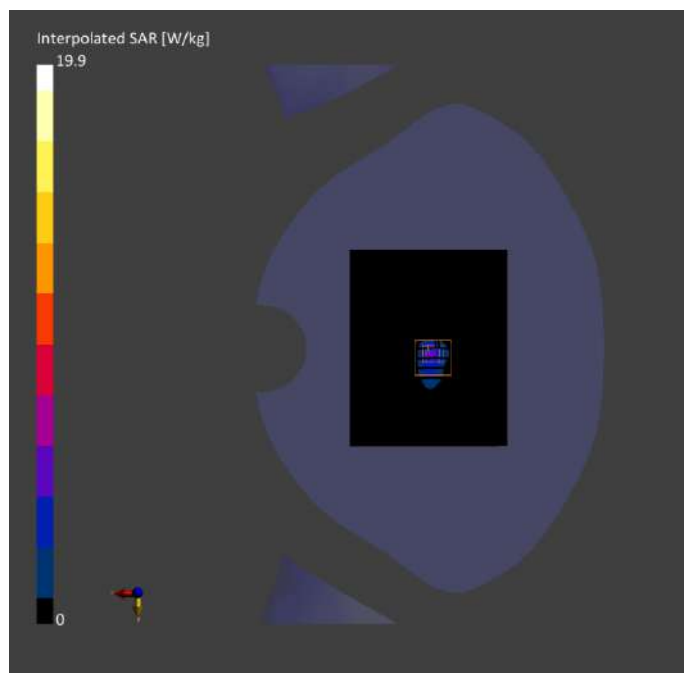

Meas.102 Left Head with Tilt on Middle Channel in NR Band78 mode with Antenna 7

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	Band	5G NR FR1	3750.0,	6.94	3.17	37.8	22.6	21.4
HSL	0.00	n78	TDD,	650000					
			10866-AAF						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-07	2024-09-07
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.585	0.676
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.201	0.246
[mm]			Power Drift [dB]	0.02	-0.01
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		41.3
			Dist 3dB Peak		5.4
			[mm]		

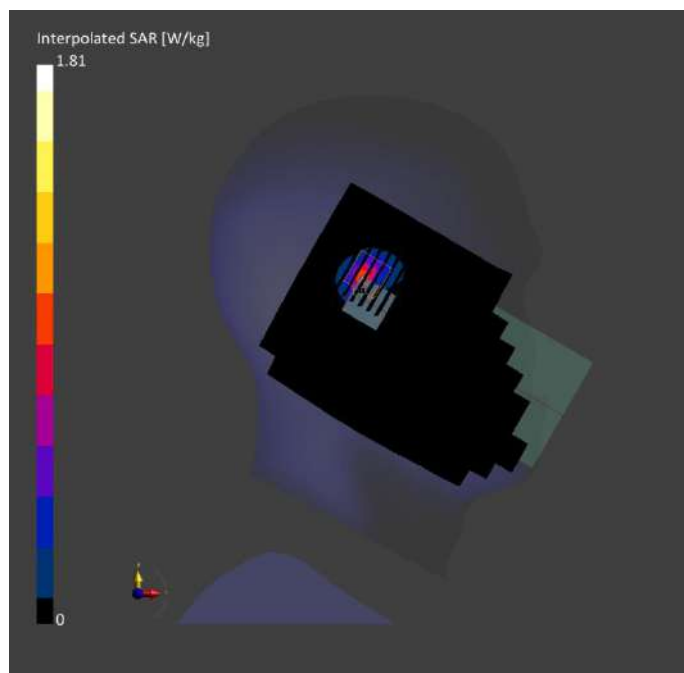

Meas.103 Body Plane with Front Side 15mm on Middle Channel in NR Band78 mode with Antenna 7

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position, Test	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	Band n78	5G NR FR1 TDD, 10866-AAF	3750.0, 650000	6.94	3.17	37.8	22.6	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-07	2024-09-07
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.561	0.601
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.256	0.278
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	-0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		49.0
			Dist 3dB Peak [mm]		11.1

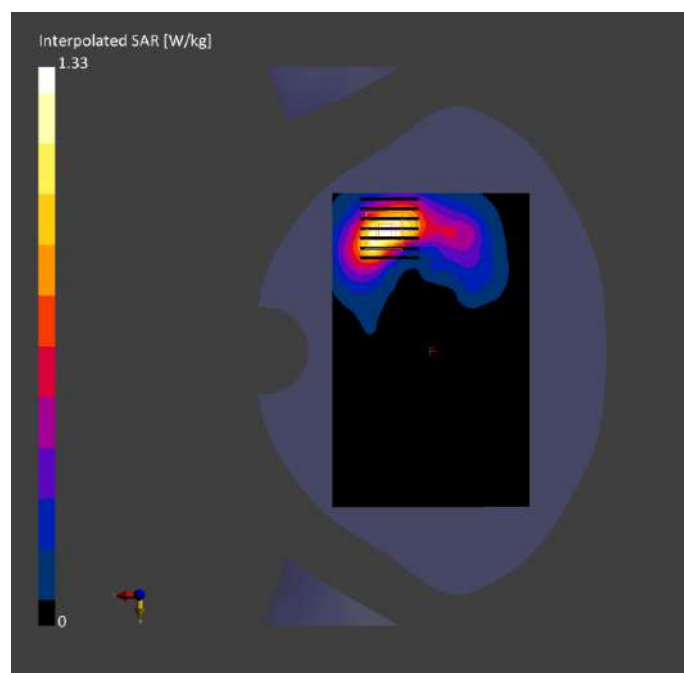

Meas.104 Body Plane with Back Side 10mm on Middle Channel in NR Band78 mode with Antenna 8

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position, Test	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 10.00	Band n78	5G NR FR1 TDD, 10866-AAF	3750.0, 650000	6.94	3.17	37.8	22.6	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	24.0 x 24.0 x 24.0	Date	2024-09-07	2024-09-07
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	0.364	0.386
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.151	0.159
Graded Grid	Yes	Yes	Power Drift [dB]	-0.01	0.06
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	N/A	Scaling Factor		
Surface Detection	VMS + 6p	VMS + 6p	[dB]		
Scan Method	Measured	Measured	TSL Correction	No correction	No correction
			M2/M1 [%]		46.8
			Dist 3dB Peak [mm]		8.0

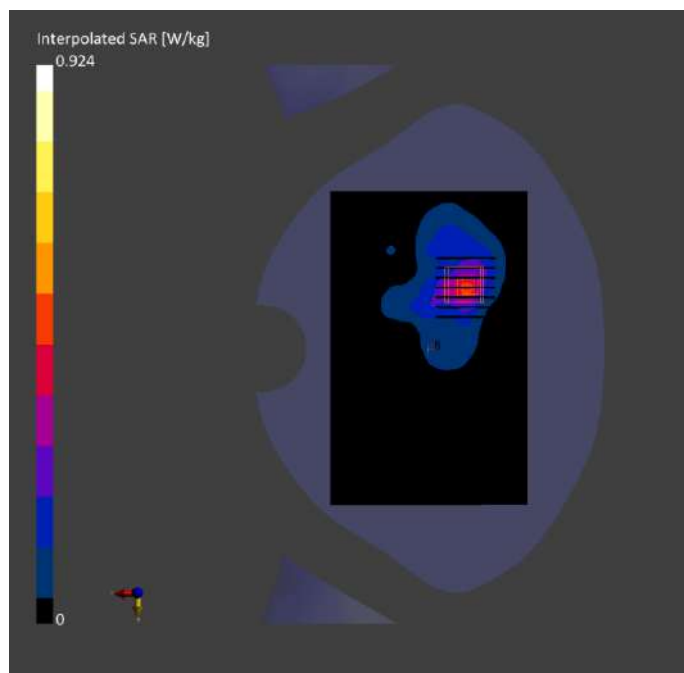

Meas.105 Body Plane with Top Edge 0mm on Middle Channel in NR Band78 mode with Antenna 7
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	Band	5G NR FR1	3750.0,	6.94	3.17	37.8	22.6	21.4
HSL	0.00	n78	TDD,	650000					
			10866-AAF						


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-07	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	24.0 x 24.0 x 24.0	Date	2024-09-07	2024-09-07
Grid Steps [mm]	12.0 x 12.0	6.0 x 6.0 x 4.0	psSAR1g [W/kg]	2.99	4.62
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.968	1.16
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		40.1
			Dist 3dB Peak [mm]		6.0

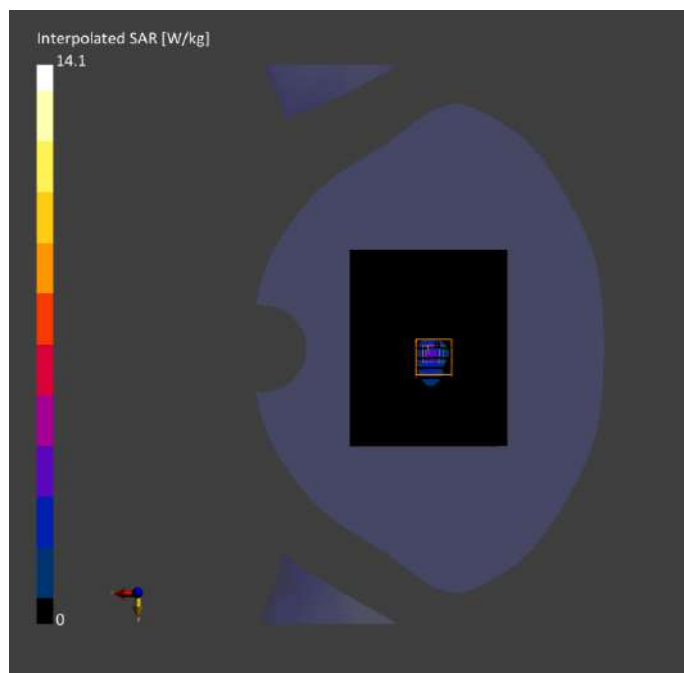

Meas.106 Left Head with Cheek on 6 Channel in IEEE802.11b mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	170.0 x 70.0 x 8.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	WLAN	WLAN,	2437.0,	7.75	1.78	39.7	22.4	21.4
HSL	0.00	2.4GHz	10315-AAB	6					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-22	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2024-08-22	2024-08-22
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.841	0.823
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.362	0.342
[mm]			Power Drift [dB]	0.00	0.02
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		40.9
			Dist 3dB Peak		5.0
			[mm]		

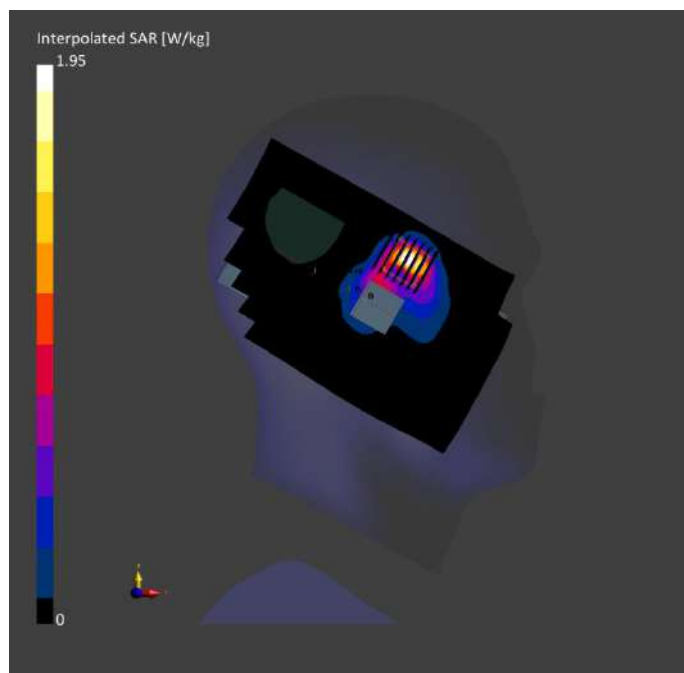

Meas.107 Body Plane with Back Side 15mm on 11 Channel in IEEE802.11b mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	WLAN 2.4GHz	WLAN, 10415-AAA	2462.0, 11	7.75	1.83	38.8	22.4	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-22	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2024-08-22	2024-08-22
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.085	0.088
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.046	0.048
Graded Grid	Yes	Yes	Power Drift [dB]	-0.19	0.11
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		56.5
			Dist 3dB Peak [mm]		12.7

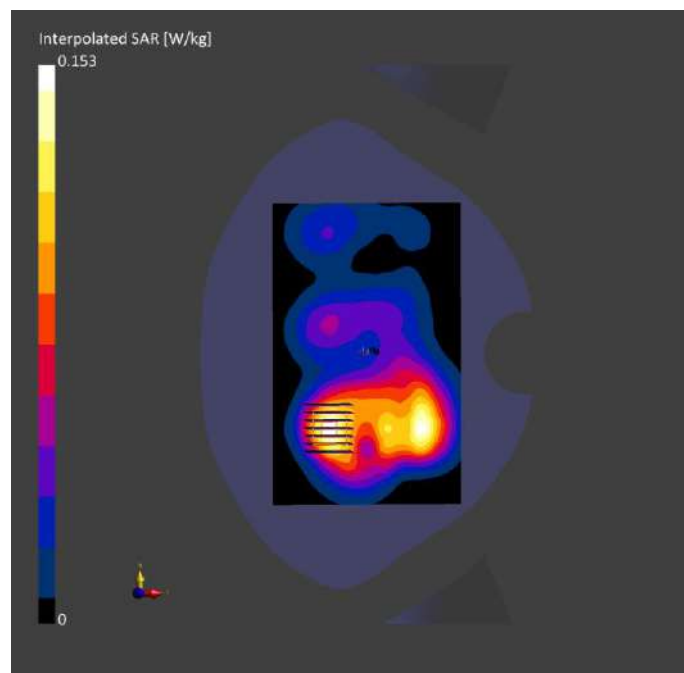

Meas.108 Body Plane with Right Edge 10mm on 11 Channel in IEEE802.11b mode with Antenna 9

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	158.2 x 77.9 x 8.0	Phone


Exposure Conditions

Phantom	Position, Test	Band	Group	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature
Section, TSL	Distance [mm]		UID						
Flat, HSL	EDGE, RIGHT, 5.00	WLAN, 2.4GHz	WLAN, 10012-CAB	2462.0, 11	7.75	1.83	38.8	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-22	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 192.0	30.0 x 30.0 x 30.0	Date	2024-08-22	2024-08-22
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.497	0.514
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.224	0.227
Graded Grid	Yes	Yes	Power Drift [dB]	0.05	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		49.7
			Dist 3dB Peak [mm]		8.0

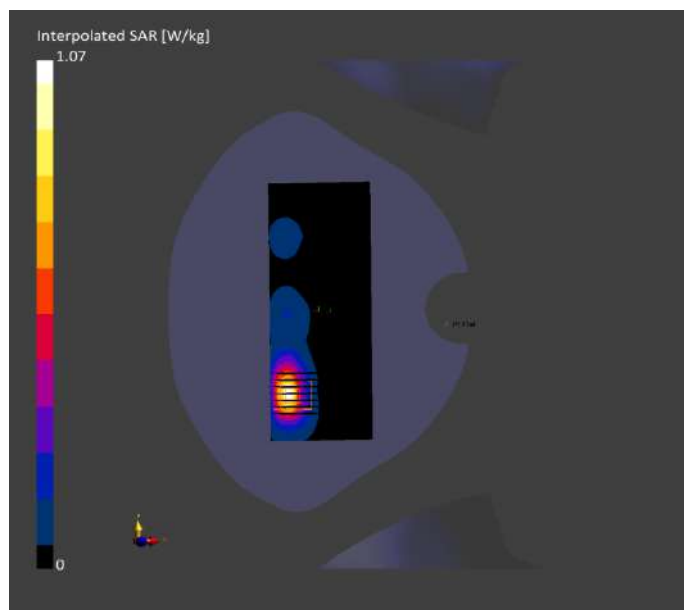

Meas.109 Body Plane with Top Edge 0mm on 11 Channel in IEEE802.11b mode with Antenna 7
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	158.2 x 77.9 x 8.0	Phone


Exposure Conditions

Phantom	Position	Band	Group	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Section, TSL	Distance [mm]		UID	Channel Number					
Flat, HSL	EDGE, TOP, 5.00	WLAN, 2.4GHz	WLAN, 10012-CAB	2462.0, 11	7.75	1.83	38.8	22.4	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-22	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-08-22	2024-08-22
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	3.67	4.22
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.35	1.38
Graded Grid	Yes	Yes	Power Drift [dB]	-0.04	-0.03
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		38.7
			Dist 3dB Peak [mm]		5.0

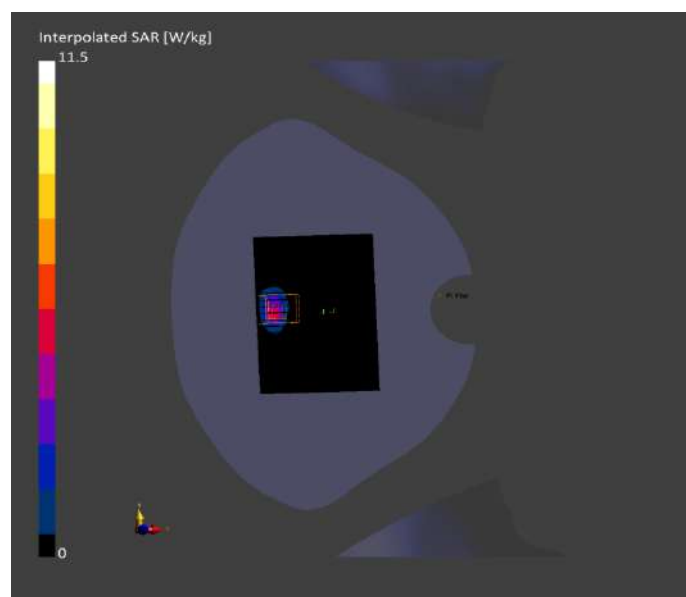

Meas.110 Left Head with Tilt on 54 Channel in IEEE802.11n40 mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	170.0 x 70.0 x 8.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	WLAN	WLAN,	5270.0,	5.5	4.71	36.2	22.6	21.4
HSL	0.00	5GHz	10599-AAE	54					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-10	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	24.0 x 24.0 x 22.0	Date	2024-09-10	2024-09-10
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.667	0.828
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.213	0.227
[mm]			Power Drift [dB]	0.11	0.03
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.4	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		52.9
			Dist 3dB Peak		4.7
			[mm]		

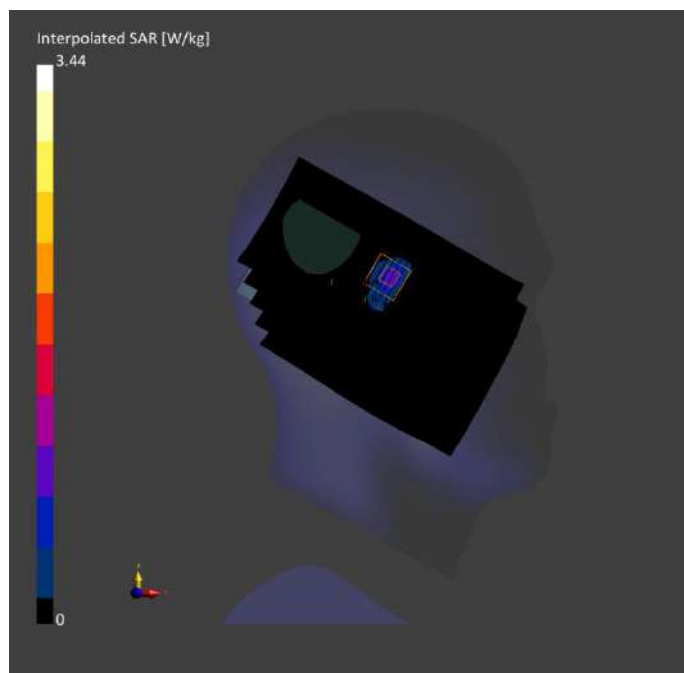

Meas.111 Left Head with Tilt on 114 Channel in IEEE802.11ac160 mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	170.0 x 70.0 x 8.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	WLAN	WLAN,	5570.0,	5	5.05	35.9	22.4	21.2
HSL	0.00	5GHz	10554-AAD	114					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-11	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	24.0 x 24.0 x 22.0	Date	2024-09-11	2024-09-11
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.592	0.668
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.184	0.184
[mm]			Power Drift [dB]	0.02	-0.03
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.4	Scaling Factor		
MAIA	Y	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		51.7
			Dist 3dB Peak		5.4
			[mm]		

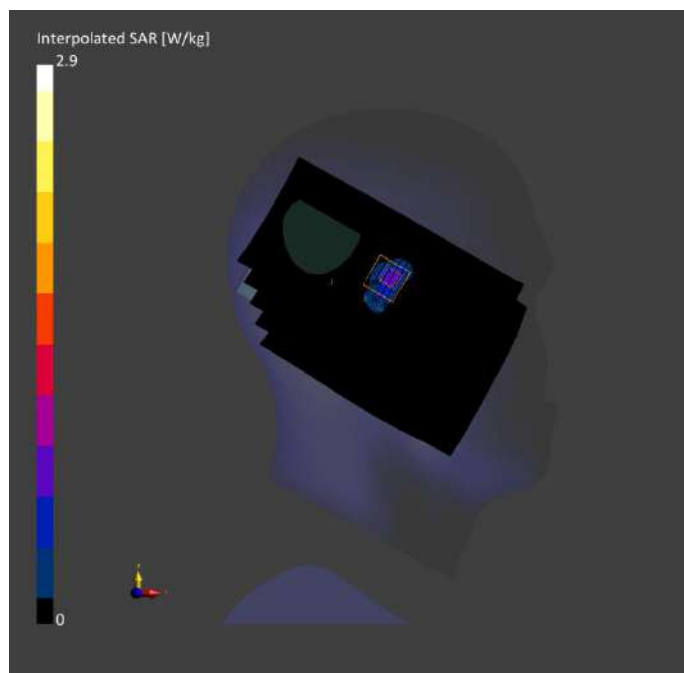

Meas.112 Left Head with Tilt on 155 Channel in IEEE802.11ac80 mode with Antenna MIMO
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	170.0 x 70.0 x 8.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	WLAN	WLAN,	5775.0,	5.04	5.23	35.3	22.8	21.7
HSL	0.00	5GHz	10544-AAD	155					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-12	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	24.0 x 24.0 x 22.0	Date	2024-09-12	2024-09-12
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.711	0.864
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.223	0.229
[mm]			Power Drift [dB]	0.10	-0.13
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.4	Scaling Factor		
MAIA	Y	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		47.8
			Dist 3dB Peak		5.1
			[mm]		

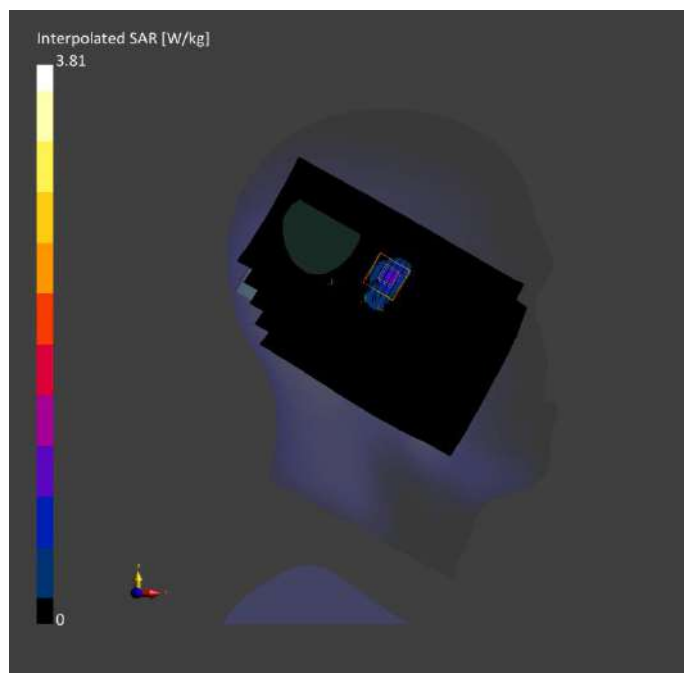

Meas.113 Body Plane with Back Side 15mm on 64 Channel in IEEE802.11a mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	WLAN 5GHz	WLAN, 10317-AAE	5320.0, 64	5.5	4.79	36.0	22.6	21.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-13	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-09-13	2024-09-13
psSAR1g [W/kg]	0.165	0.137
psSAR10g [W/kg]	0.064	0.051
Power Drift [dB]	-0.15	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.2
Dist 3dB Peak [mm]		11.9

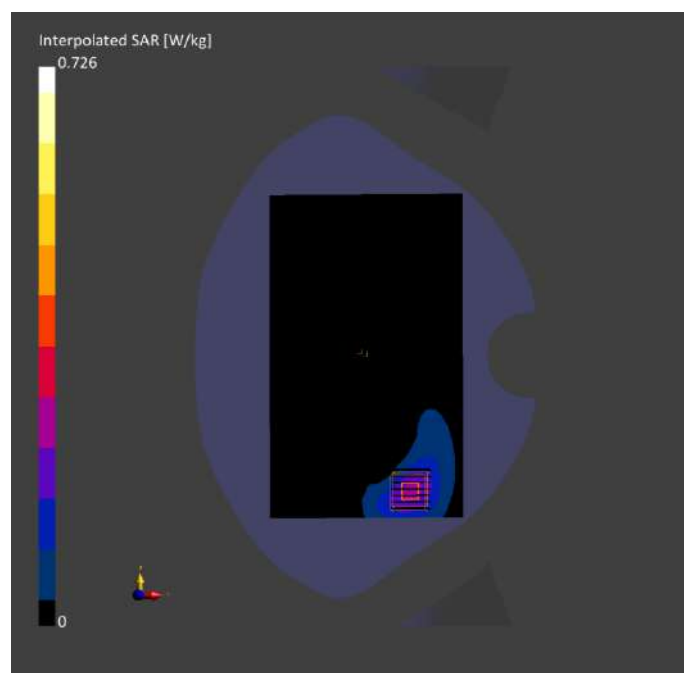

Meas.114 Body Plane with Back Side 15mm on 138 Channel in IEEE802.11ac80 mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	WLAN 5GHz	WLAN, 10544-AAD	5690.0, 138	5	5.24	34.2	22.4	21.3


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-14	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.0	Date	2024-09-14	2024-09-14
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.181	0.177
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.074	0.071
Graded Grid	Yes	Yes	Power Drift [dB]	-0.10	0.08
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		50.2
			Dist 3dB Peak [mm]		11.8

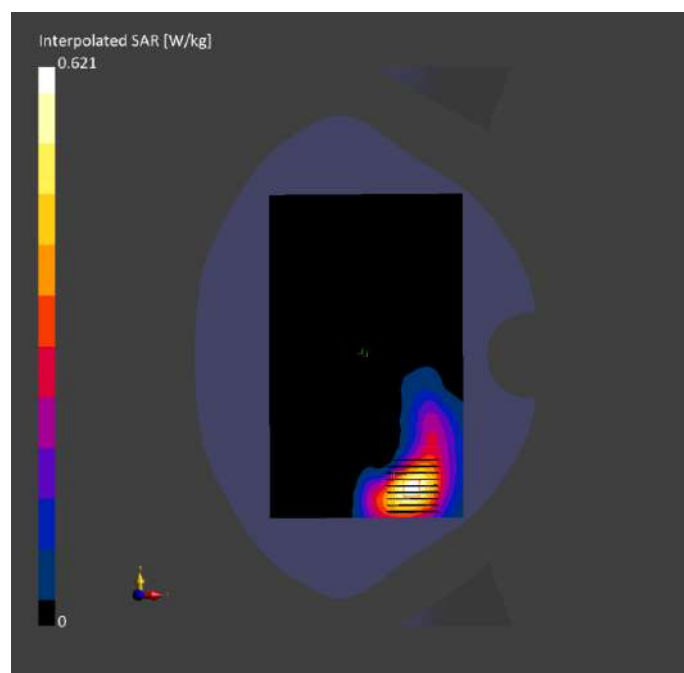

Meas.115 Body Plane with Back Side 15mm on 155 Channel in IEEE802.11ac80 mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	WLAN 5GHz	WLAN, 10544-AAD	5775.0, 155	5.04	5.30	34.8	22.3	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-15	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.0	Date	2024-09-15	2024-09-15
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.205	0.205
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.084	0.079
Graded Grid	Yes	Yes	Power Drift [dB]	-0.05	0.11
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		49.2
			Dist 3dB Peak [mm]		11.9

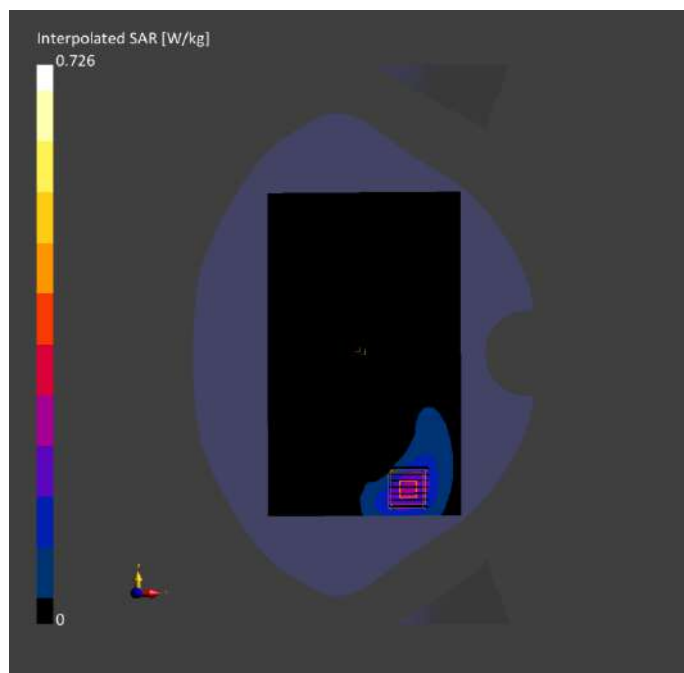

Meas.116 Body Plane with Top Edge 10mm on 44 Channel in IEEE802.11a mode with Antenna MIMO
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	WLAN	WLAN,	5220.0,	5.74	4.55	36.7	22.6	21.5
HSL	10.00	5GHz	10317-AAE	44					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-13	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0	Date	2024-09-13	2024-09-13
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.472	0.499
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.176	0.182
[mm]			Power Drift [dB]	-0.01	-0.03
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.4	Scaling Factor		
MAIA	Y	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.5
			Dist 3dB Peak		8.9
			[mm]		

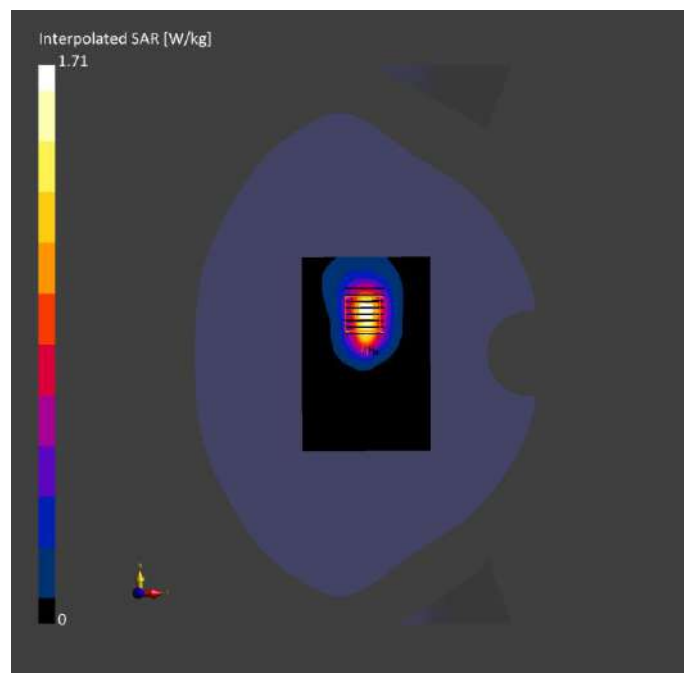

Meas.117 Body Plane with Top Edge 10mm on 155 Channel in IEEE802.11ac80 mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone


Exposure Conditions

Phantom	Position, Test Section, Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature
Flat, HSL	EDGE, TOP, 10.00	WLAN, N 5GHz	WLAN, 10544-AAC	5775.0, 155	5.04	5.30	34.8	22.3	21.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-15	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0	Date	2024-09-15	2024-09-15
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	0.542	0.553
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.215	0.210
Graded Grid	Yes	Yes	Power Drift [dB]	0.09	-0.03
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		51.0
			Dist 3dB Peak [mm]		9.1

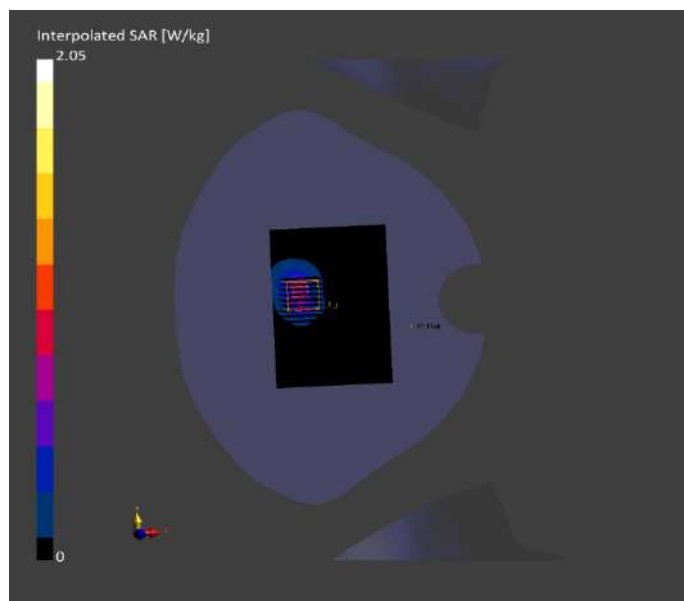

Meas.118 Body Plane with Top Edge 0mm on 64 Channel in IEEE802.11a mode with Antenna MIMO
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	WLAN	WLAN,	5320.0,	5.5	4.79	36.0	22.6	21.5
HSL	0.00	5GHz	10317-AAE	64					


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-13	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0	Date	2024-09-13	2024-09-13
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	7.86	7.64
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	1.59	1.54
[mm]			Power Drift [dB]	-0.04	-0.05
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.4	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.4
			Dist 3dB Peak		4.3
			[mm]		

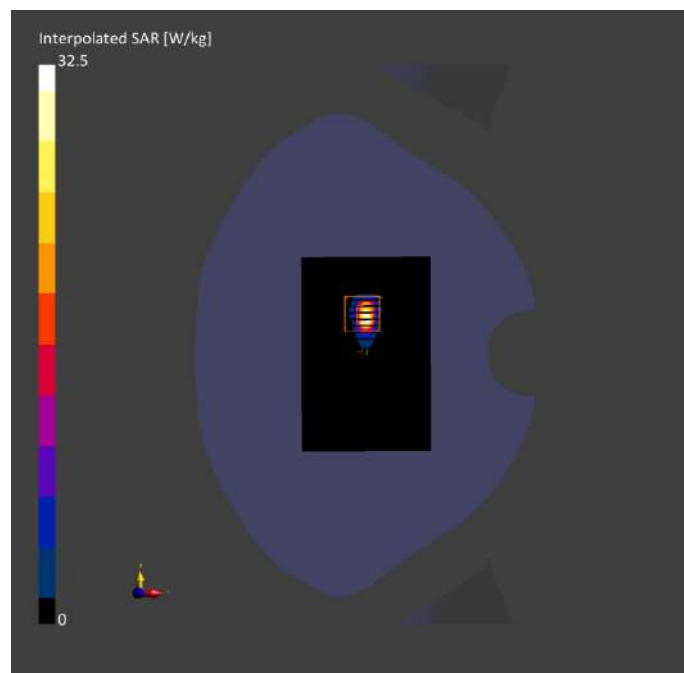

Meas.119 Body Plane with Top Edge 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5690.0, 138	5	5.24	34.2	22.4	21.3


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-14	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 22.0	Date	2024-09-14	2024-09-14
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	7.82	7.45
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.54	1.46
Graded Grid	Yes	Yes	Power Drift [dB]	-0.02	0.00
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.2
			Dist 3dB Peak [mm]		4.2

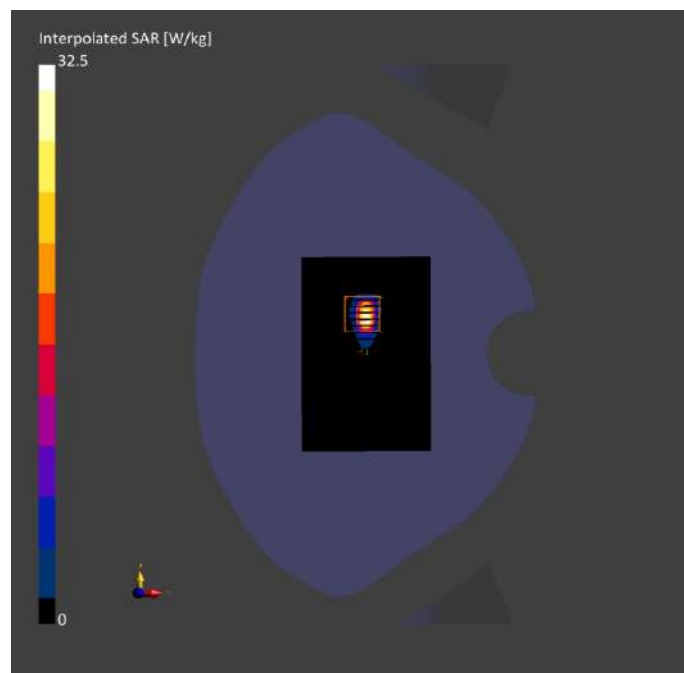

Meas.120 Body Plane with Top Edge 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna MIMO

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5775.0, 155	5.04	5.30	34.8	22.3	21.4


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-09-15	EX3DV4 - SN7510, 2024-06-25	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 120.0	24.0 x 24.0 x 24.0	Date	2024-09-15	2024-09-15
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0	psSAR1g [W/kg]	7.94	8.20
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	1.70	1.61
Graded Grid	Yes	Yes	Power Drift [dB]	-0.03	0.03
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		53.7
			Dist 3dB Peak [mm]		4.1

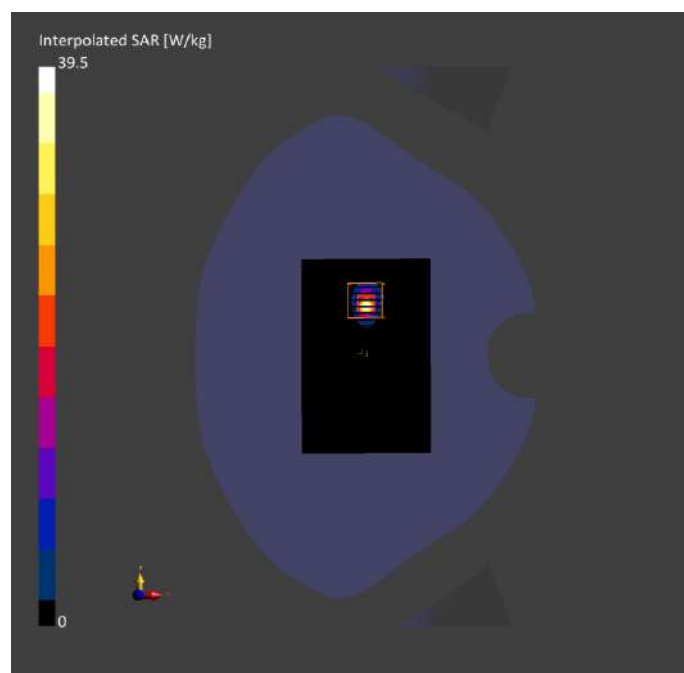

Meas.121 Left Head with Tilt on 47 Channel in IEEE802.11ax160 mode with Antenna 15

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	U-NII-5	WLAN,	6185.0,	5.45	5.65	35.5	22.1	21.0
HSL	0.00		10743-AAC	47					

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-25	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 187.0	27.2 x 27.2 x 22.0	Date	2024-08-25	2024-08-25
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	0.142	0.171
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.036	0.040
Graded Grid	Yes	Yes	Power Drift [dB]	0.08	-0.02
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		54.6
			Dist 3dB Peak [mm]		4.1