



FCC RF Test Report

APPLICANT : Espressif Systems (Shanghai) Co.,Ltd.
EQUIPMENT : 2.4GHz Wi-Fi & BT IoT Module
BRAND NAME : ESPRESSIF
MODEL NAME : ESP8684-WROOM-06C
FCC ID : 2AC7Z-ESP868406C
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 01, 2024 ~ Jun. 05, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 LIST OF MEASURING EQUIPMENT.....	22
5 MEASUREMENT UNCERTAINTY.....	23
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR413001A	Rev. 01	Initial issue of report	Sep. 20, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.43 dB at 2483.50 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.15 dB at 0.173 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.2 Manufacturer

Espressif Systems (Shanghai) Co.,Ltd.

Suite 204, Block 2, 690 Bibo Road, Zhang Jiang Hi-Tech Park, Shanghai, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4GHz Wi-Fi & BT IoT Module
Brand Name	ESPRESSIF
Model Name	ESP8684-WROOM-06C
FCC ID	2AC7Z-ESP868406C
HW Version	v1.1
SW Version	v1.1.3.4
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 19.25 dBm (0.0841 W) BLE 2Mbps: 19.33 dBm (0.0857 W) BLE 125Kbps: 18.54 dBm (0.0714 W) BLE 500Kbps: 19.18 dBm (0.0828 W)
99% Occupied Bandwidth	BLE 1Mbps:1.083MHz BLE 2Mbps:2.058MHz BLE 125Kbps:1.083MHz BLE 500Kbps:1.083MHz
Antenna Type / Gain	PCB antenna with gain 2.7 dBi
Type of Modulation	Bluetooth LE : GFSK

Note : For BLE 1Mbps & 2Mbps & 125Kbps & 500Kbps mode, the whole testing has assessed BLE 1Mbps/2Mbps mode by referring to the higher conducted power.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH06-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
AC Conducted Emission	Mode 1: BLE TX + Powered by Notebook
Remark: For Radiated Test Cases, The tests were performed with Notebook.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

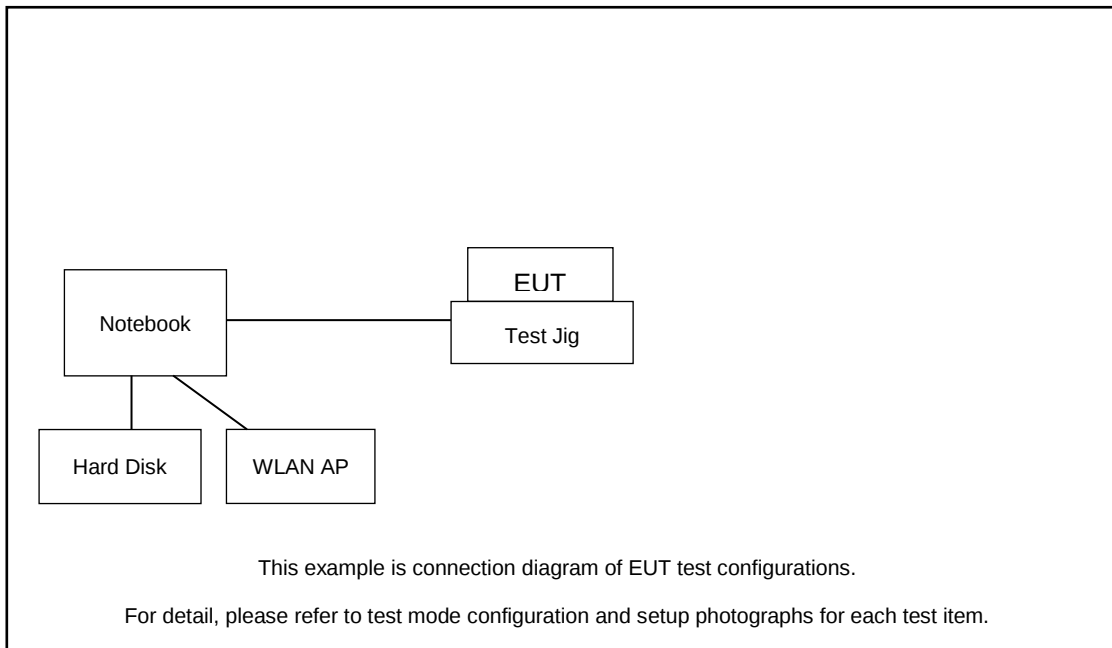

Radiated Emission:

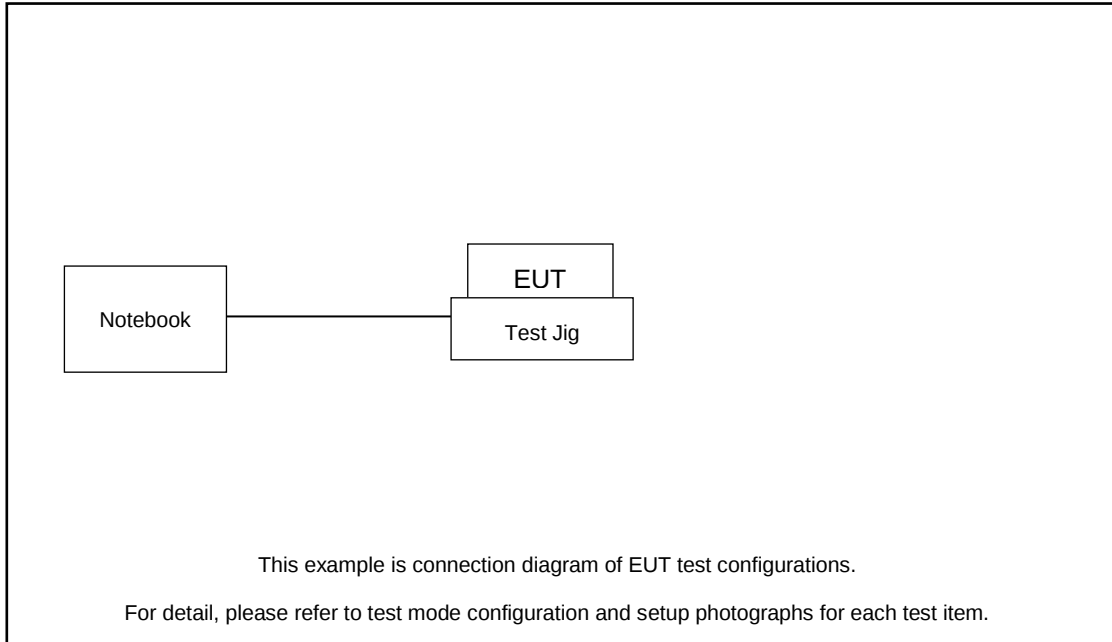

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Hard Disk	WD	C6B	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.86 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.86 + 10 = 11.86 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

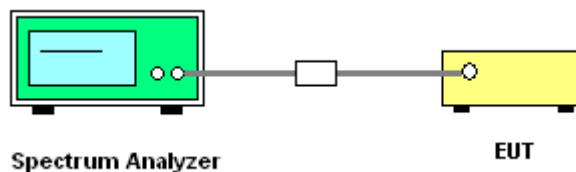

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

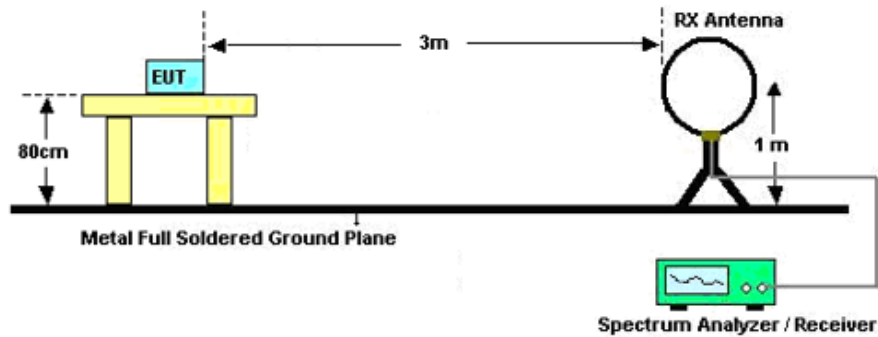

For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz

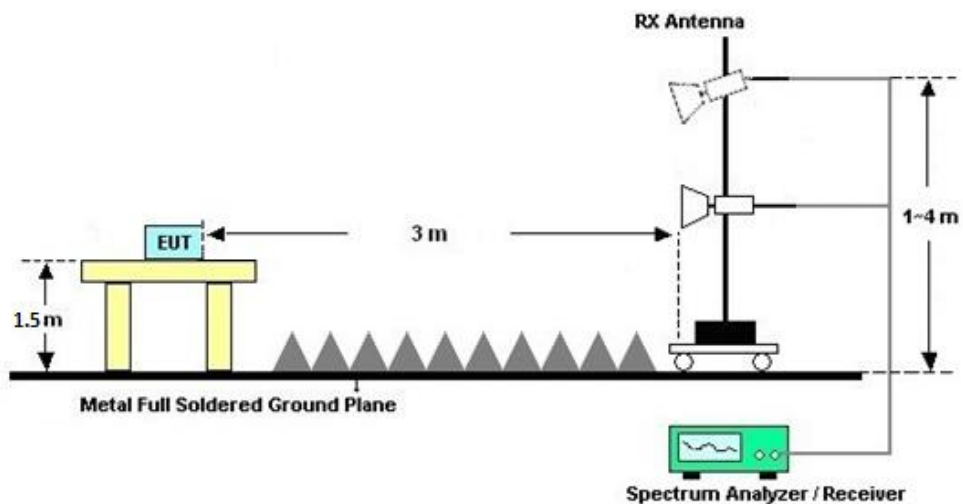

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

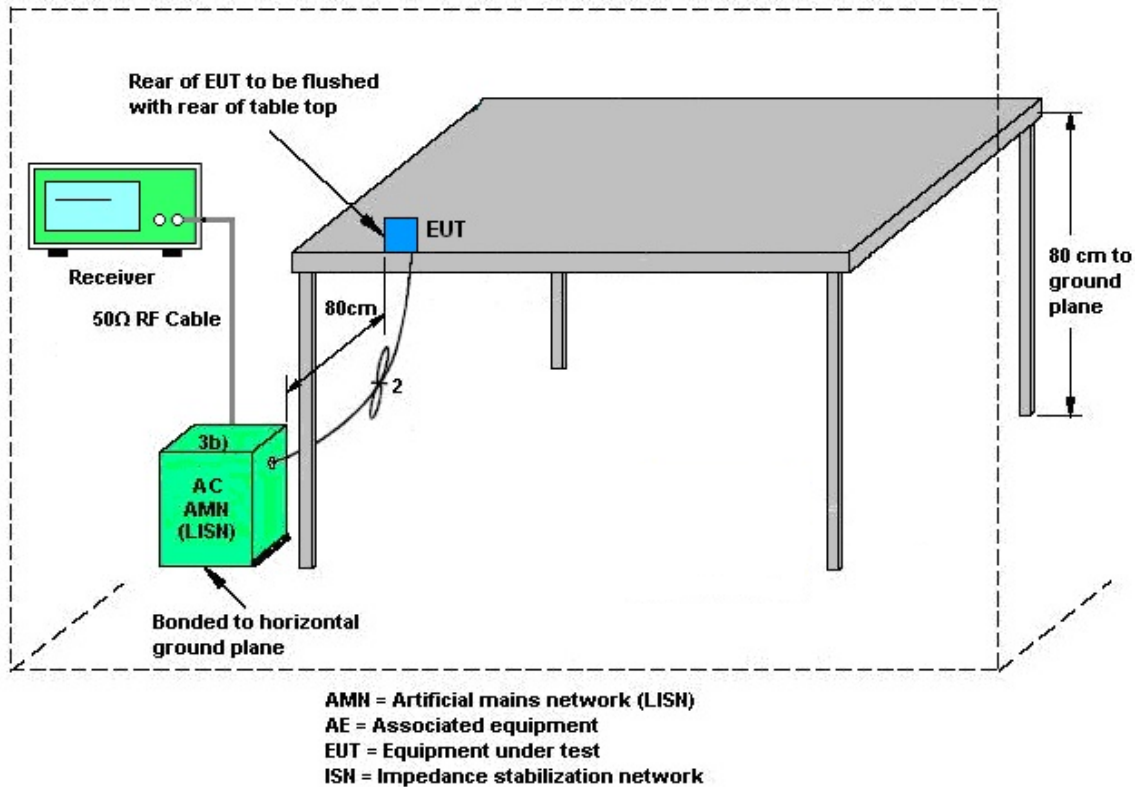

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2023	Mar. 14, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 10, 2023	Mar. 14, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 10, 2023	Mar. 14, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 19, 2023	Mar. 14, 2024	Aug. 18, 2024	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240132	1GHz~18GHz	Jul. 12, 2023	Mar. 14, 2024	Jul. 11, 2024	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2024	Mar. 14, 2024	Jan. 04, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 06, 2023	Mar. 14, 2024	Jul. 05, 2024	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 04, 2024	Mar. 14, 2024	Jan. 03, 2025	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1Ghz-18Ghz	Jan. 04, 2024	Mar. 14, 2024	Jan. 03, 2025	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 10, 2023	Mar. 14, 2024	Oct. 09, 2024	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 14, 2024	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 14, 2024	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 14, 2024	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 16, 2023	Mar. 01, 2024	May 15, 2024	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 11, 2023	Mar. 01, 2024	Oct. 10, 2024	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 16, 2023	Mar. 01, 2024	May 15, 2024	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 11, 2023	Mar. 01, 2024	Oct. 10, 2024	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	May 09, 2024~Jun. 05, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2024	May 09, 2024~Jun. 05, 2024	Jan. 01, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2024	May 09, 2024~Jun. 05, 2024	Jan. 01, 2025	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Conducted Power Spectral Density	±0.88 dB
Frequency	±0.4 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.32 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Case No. : <u>413001</u>	
Ambient Condition: <u>25</u> °C, <u>45</u> %RH	
Test Date: <u>2024/5/9~2024/6/5</u>	Test Engineer: <u>Jacob Zhang</u>


DTS Bandwidth


Test Result


TestMode	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	0.66	2401.65	2402.31	0.5	PASS
	2440	0.66	2439.64	2440.31	0.5	PASS
	2480	0.66	2479.64	2480.30	0.5	PASS
BLE_2M	2402	1.12	2401.41	2402.53	0.5	PASS
	2440	1.12	2439.41	2440.52	0.5	PASS
	2480	1.12	2479.41	2480.52	0.5	PASS



Test Graphs

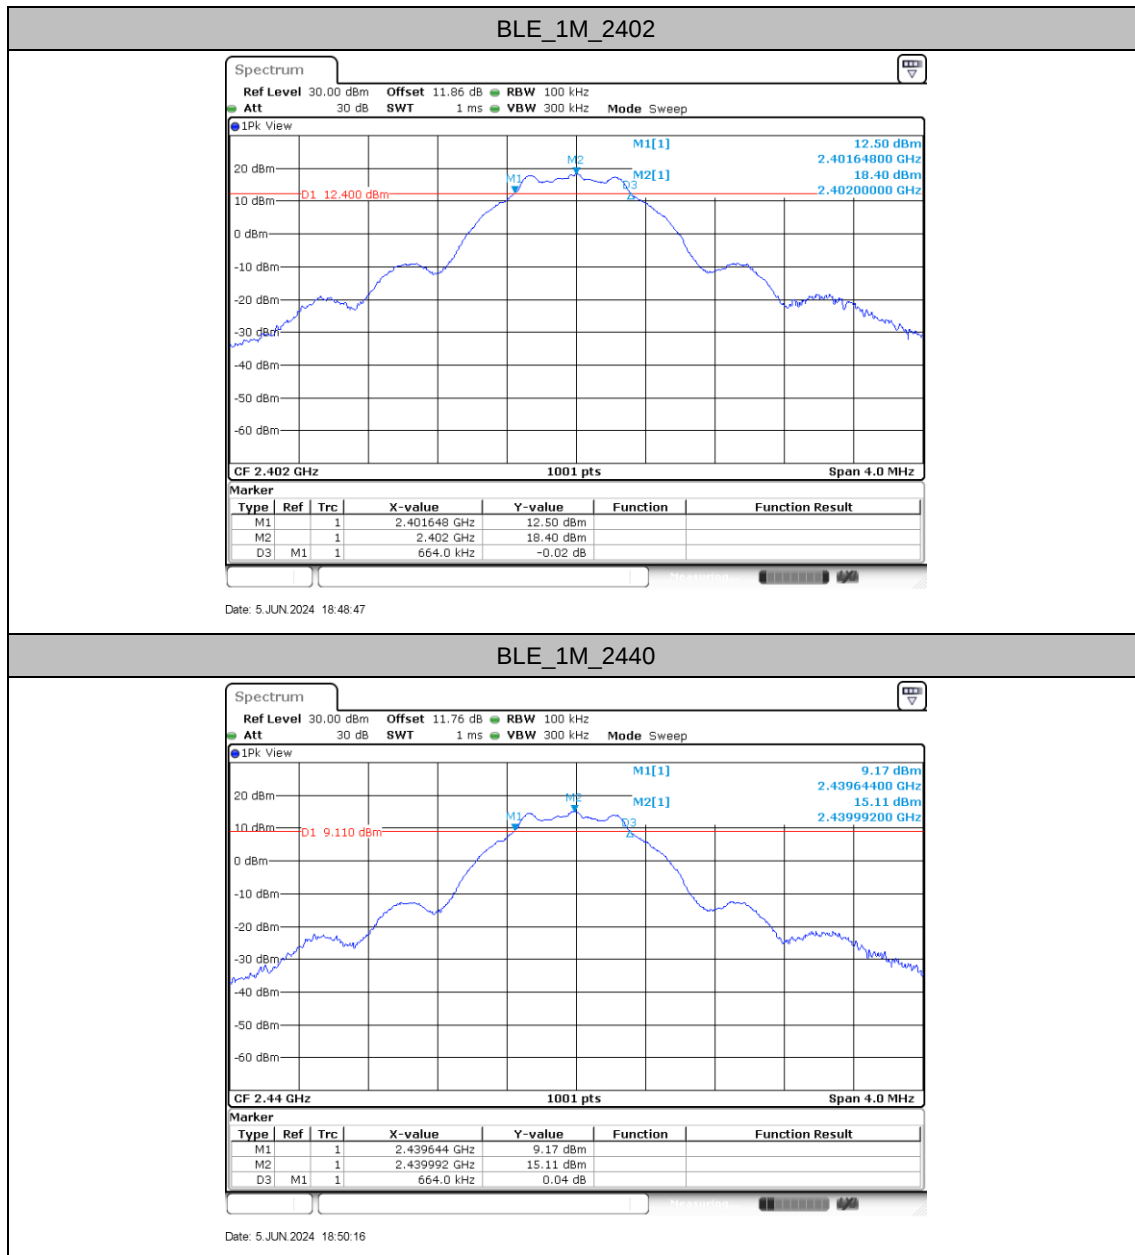

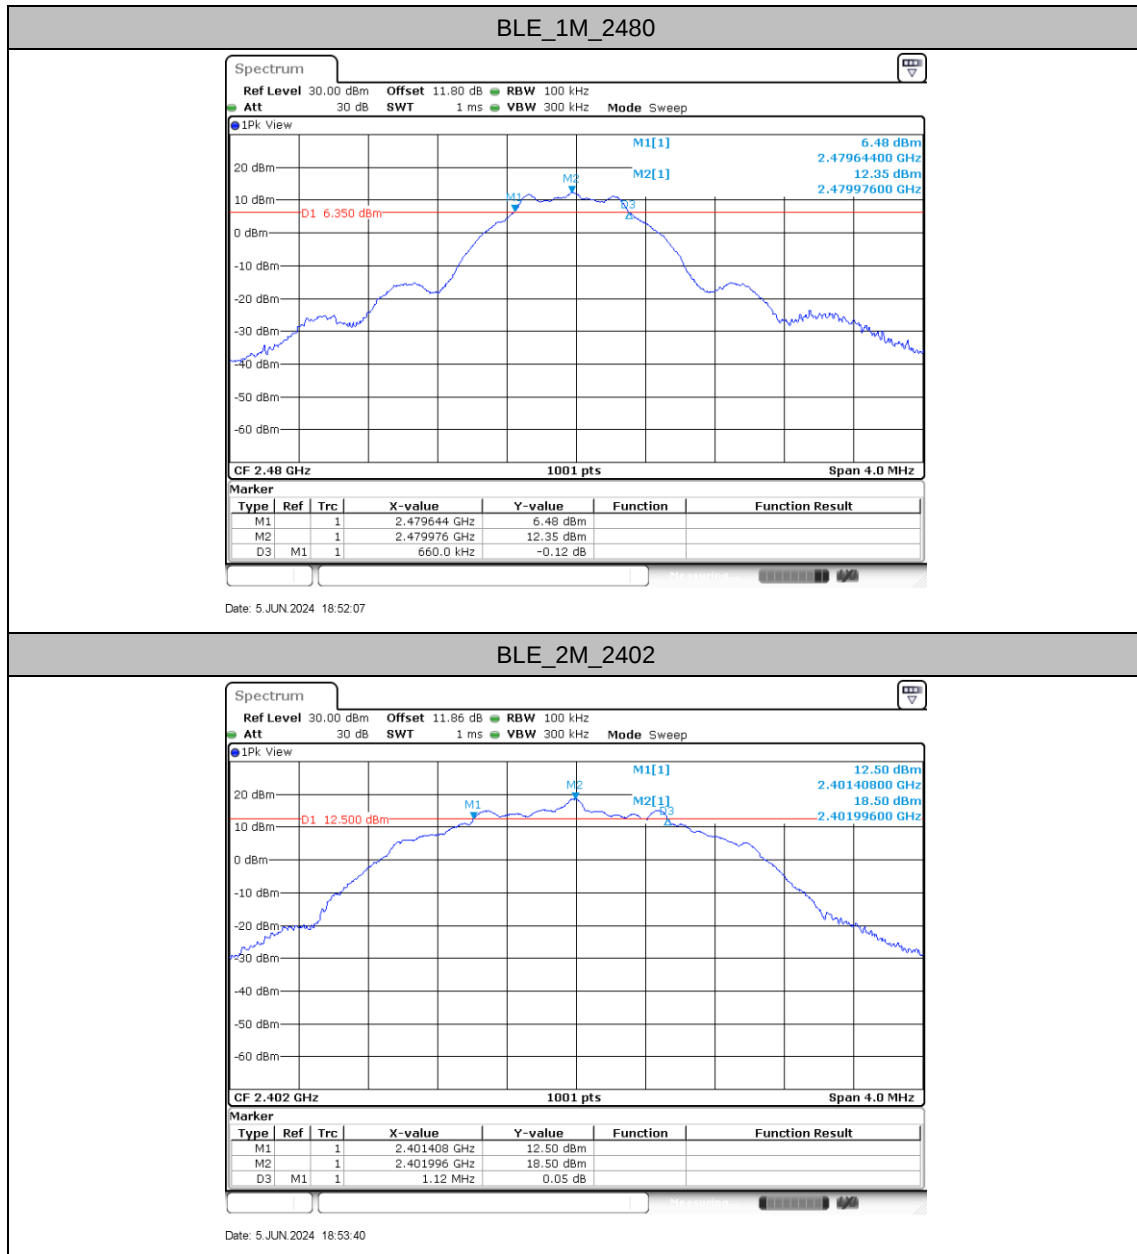

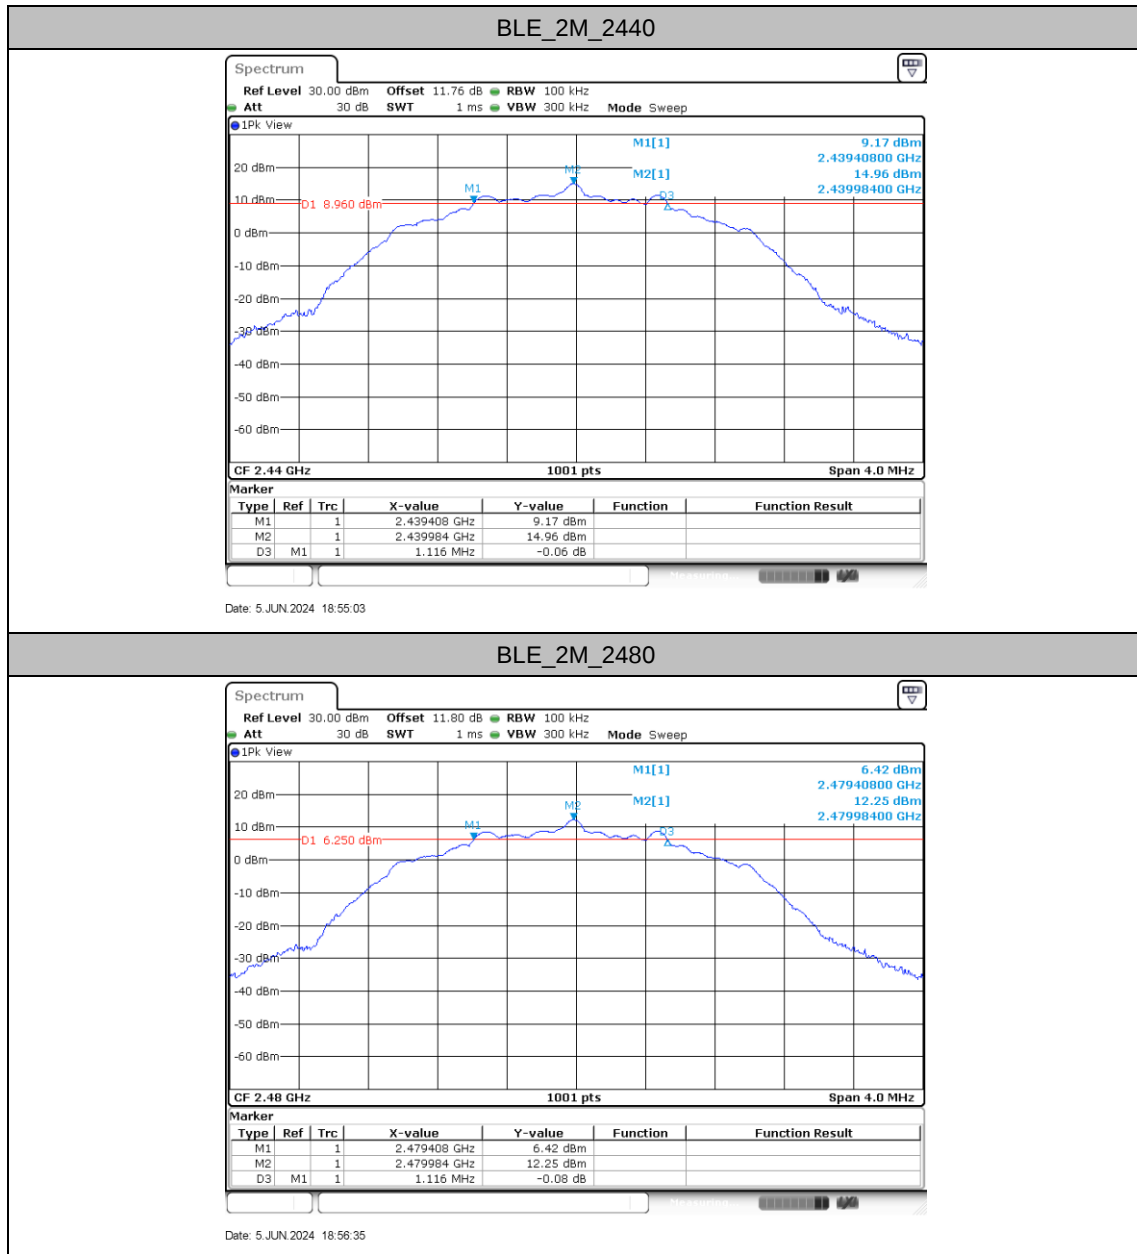




Occupied Channel Bandwidth


Test Result

TestMode	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	2402	1.083	2401.4366	2402.5195	---	---
	2440	1.083	2439.4326	2440.5155	---	---
	2480	1.079	2479.4326	2480.5115	---	---
BLE_2M	2402	2.054	2400.9491	2403.0030	---	---
	2440	2.058	2438.9451	2441.0030	---	---
	2480	2.054	2478.9491	2481.0030	---	---
BLE_125K	2402	1.079	2401.4406	2402.5195	---	---
	2440	1.083	2439.4406	2440.5235	---	---
	2480	1.079	2479.4406	2480.5195	---	---
BLE_500K	2402	1.075	2401.4486	2402.5235	---	---
	2440	1.079	2439.4406	2440.5195	---	---
	2480	1.083	2479.4366	2480.5195	---	---




Test Graphs

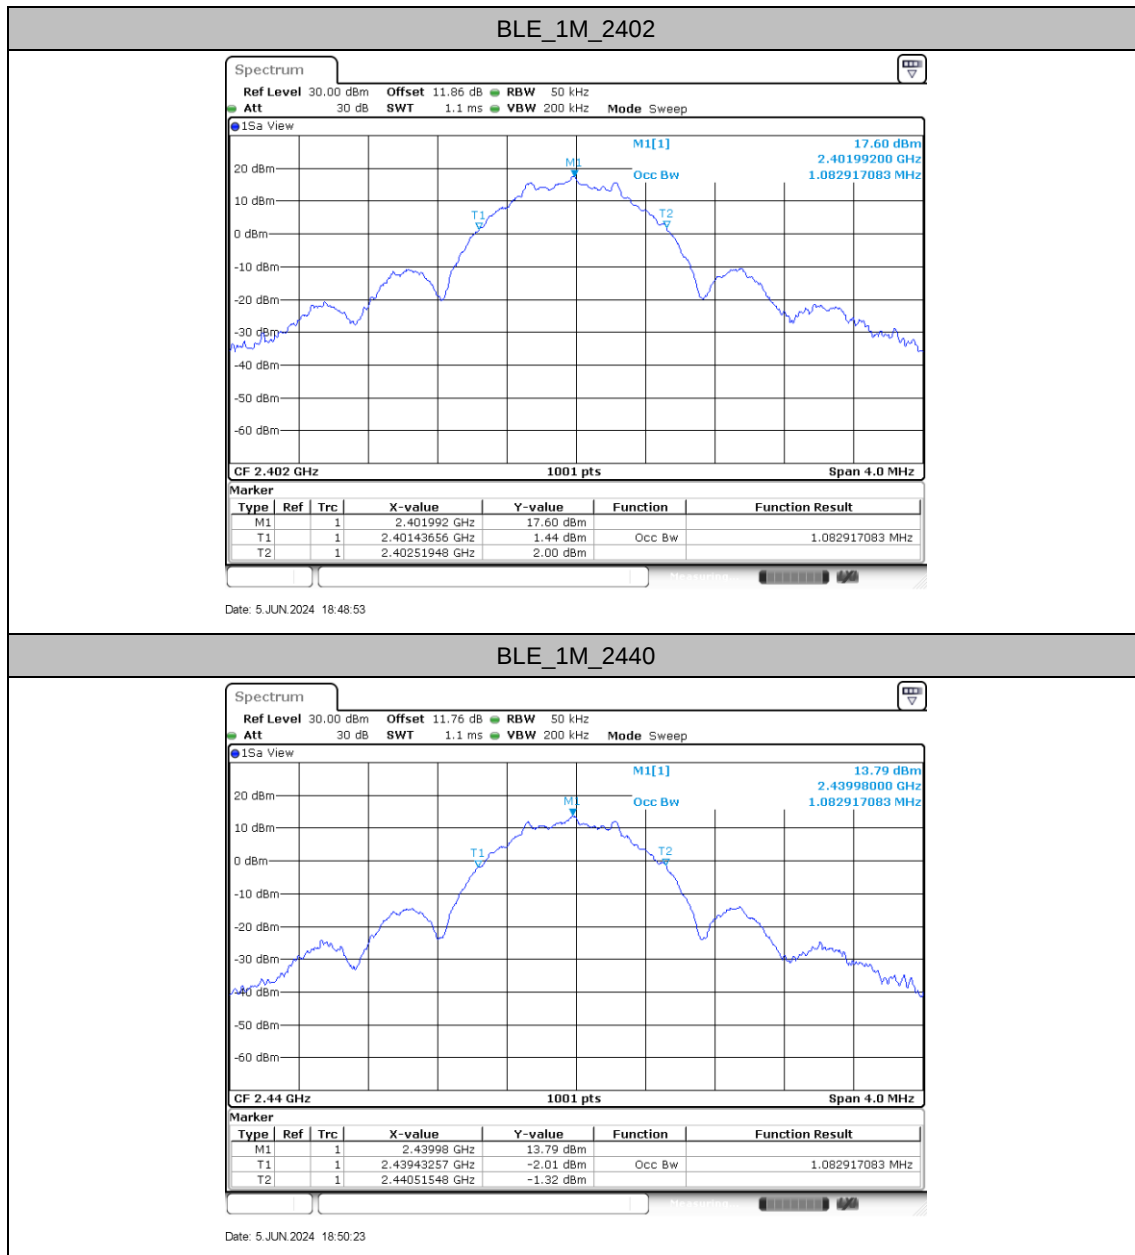

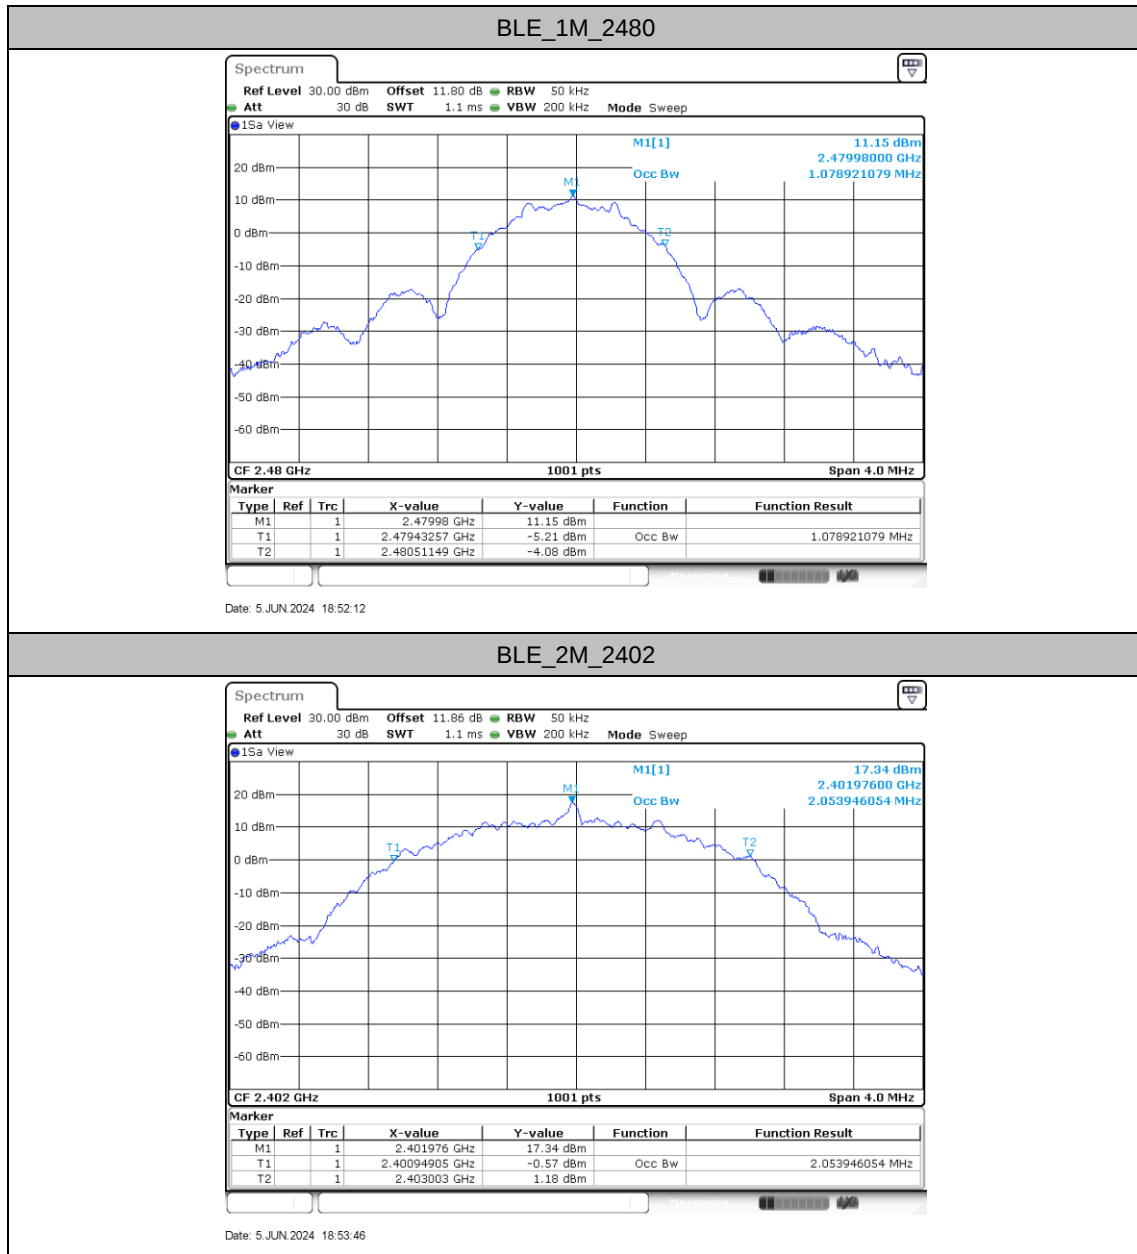




BLE_2M_2440

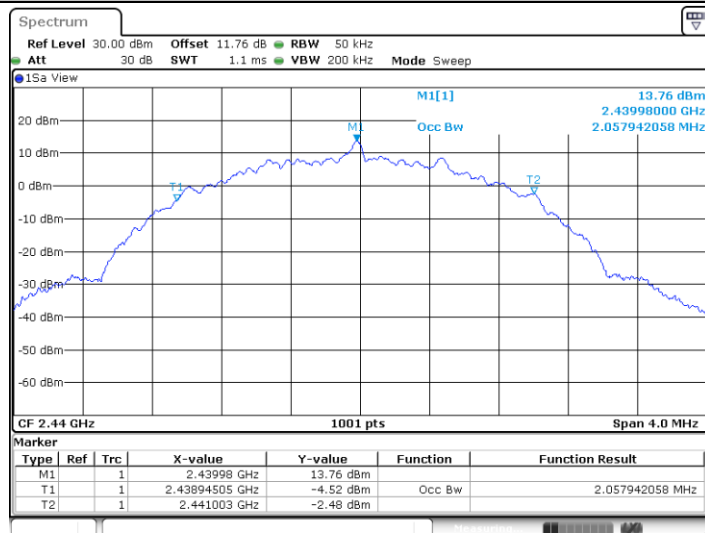


Date: 5 JUN.2024 18:55:08

BLE_2M_2480

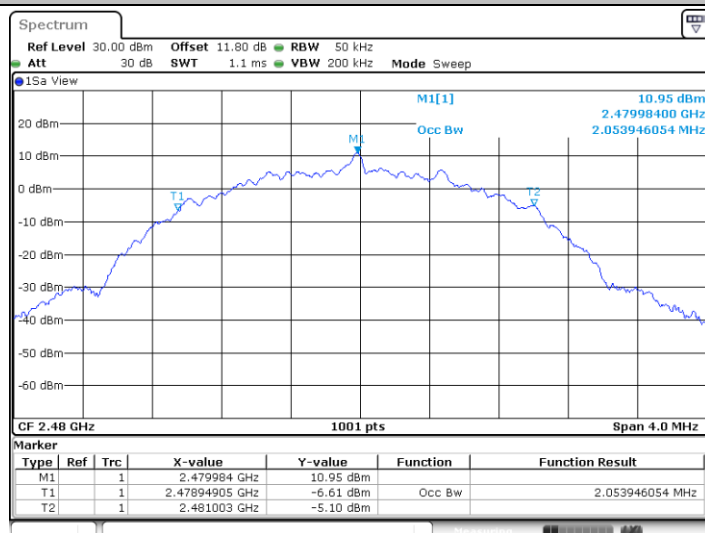


Date: 5 JUN.2024 18:56:41

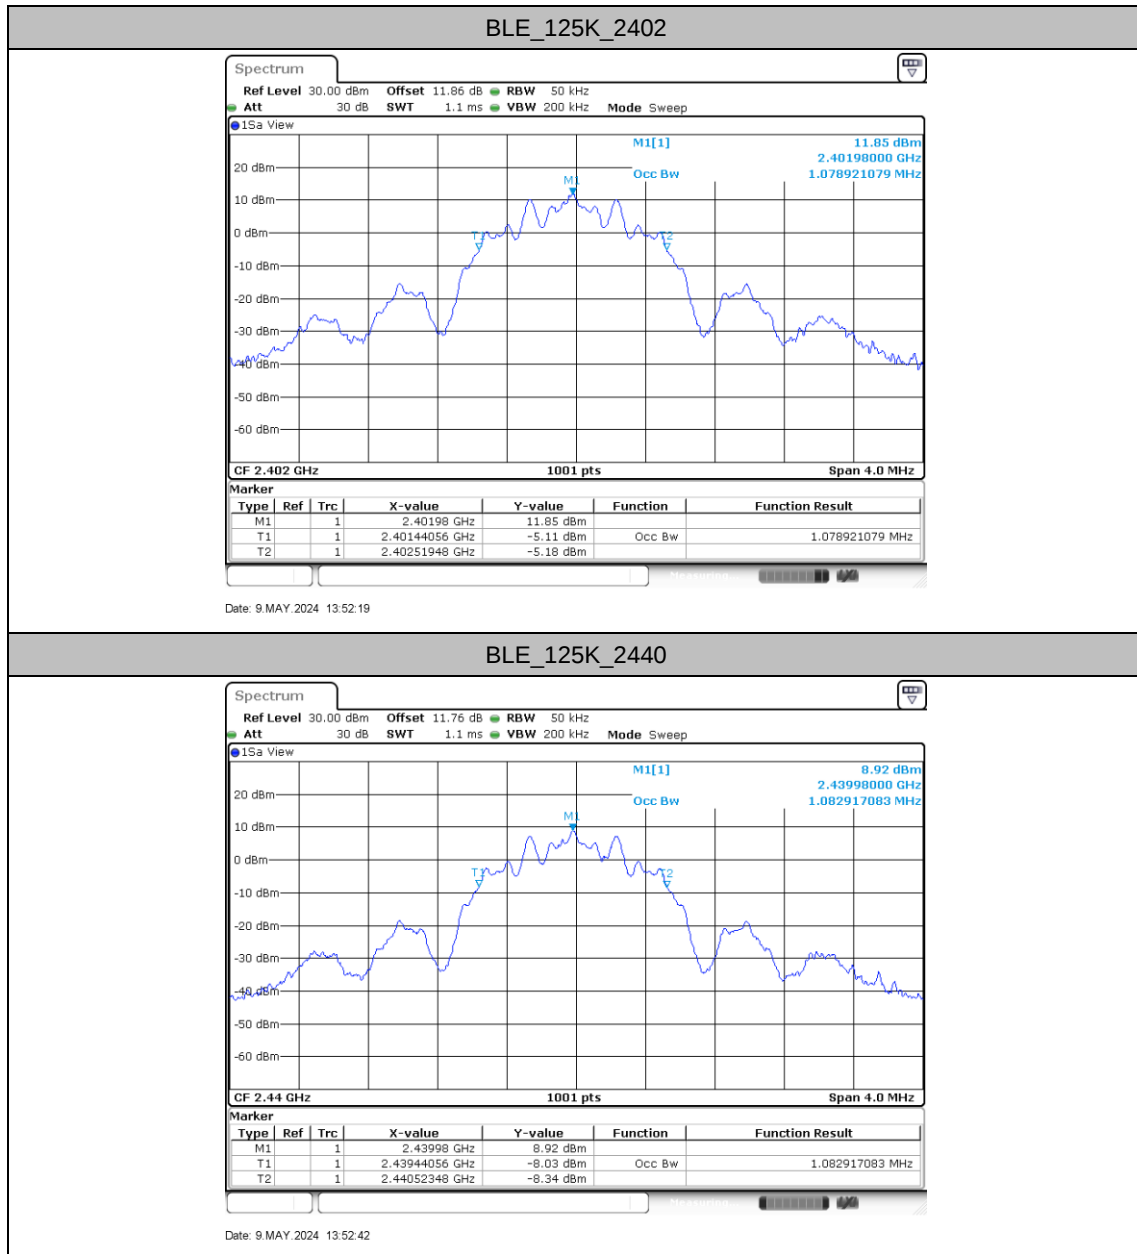




BLE_125K_2480

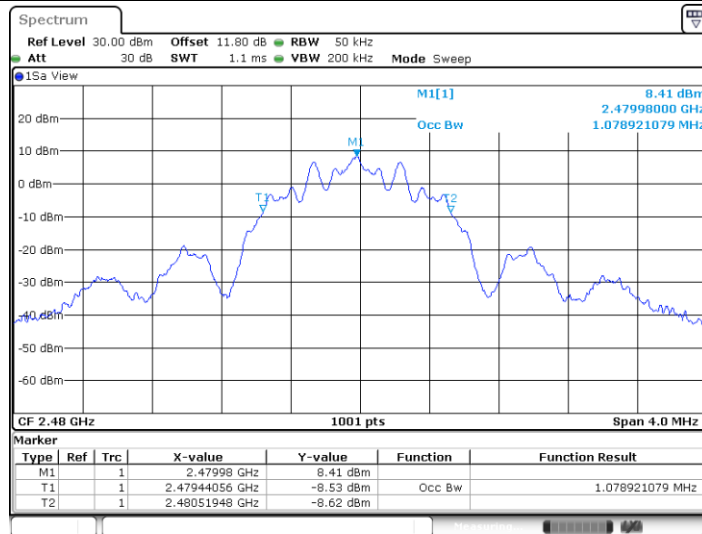

Date: 9 MAY 2024 13:53:02


BLE_500K_2402

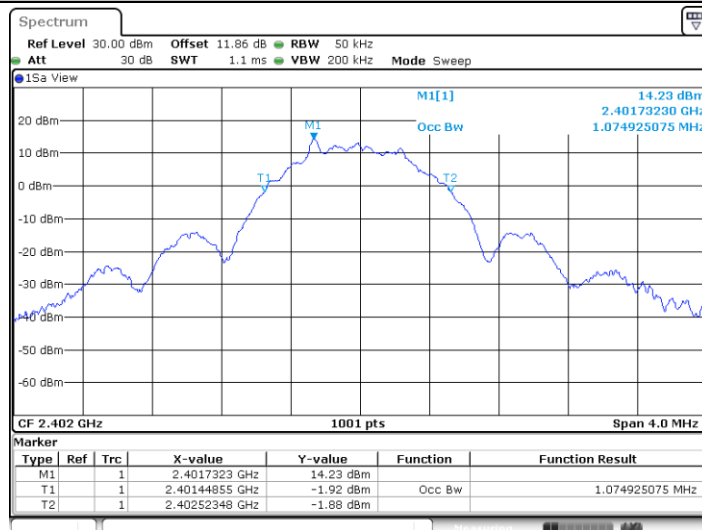

Date: 9 MAY 2024 13:53:30




BLE_500K_2440

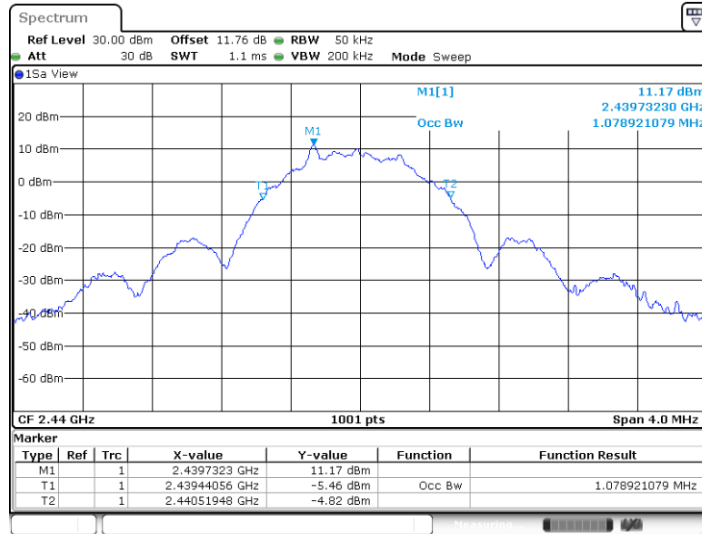

Date: 9 MAY 2024 13:53:51

BLE_500K_2480

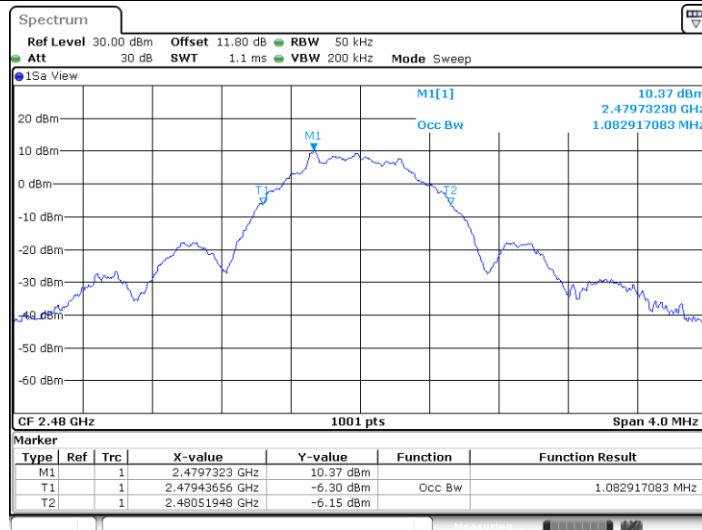

Date: 9 MAY 2024 13:54:02



Maximum conducted output power

Test Result Peak

TestMode	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail	Power setting
BLE1M	0	19.25	30.00	2.7	21.95	36.00	Pass	14
	19	16.26	30.00	2.7	18.96	36.00	Pass	13
	39	13.27	30.00	2.7	15.97	36.00	Pass	12
BLE2M	0	19.33	30.00	2.7	22.03	36.00	Pass	14
	19	16.35	30.00	2.7	19.05	36.00	Pass	13
	39	13.36	30.00	2.7	16.06	36.00	Pass	12
BLE_125K	0	18.54	30.00	2.7	21.24	36.00	Pass	14
	19	15.82	30.00	2.7	18.52	36.00	Pass	13
	39	12.91	30.00	2.7	15.61	36.00	Pass	12
BLE_500K	0	19.18	30.00	2.7	21.88	36.00	Pass	14
	19	16.19	30.00	2.7	18.89	36.00	Pass	13
	39	13.21	30.00	2.7	15.91	36.00	Pass	12

Test Result Average

TestMode	CH.	Duty Factor (dB)	Average Conducted Power (dBm)
BLE1M	0	0.23	18.01
	19	0.23	15.25
	39	0.23	12.38
BLE2M	0	0.42	18.20
	19	0.42	15.37
	39	0.42	12.53
BLE_125K	0	0.23	17.76
	19	0.23	15.01
	39	0.23	12.15
BLE_500K	0	0.42	17.83
	19	0.42	14.99
	39	0.42	12.13




Maximum power spectral density


Test Result


TestMode	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	2402	5.41	≤8.00	PASS
	2440	1.82	≤8.00	PASS
	2480	-0.98	≤8.00	PASS
BLE_2M	2402	2.71	≤8.00	PASS
	2440	-0.86	≤8.00	PASS
	2480	-3.58	≤8.00	PASS



Test Graphs

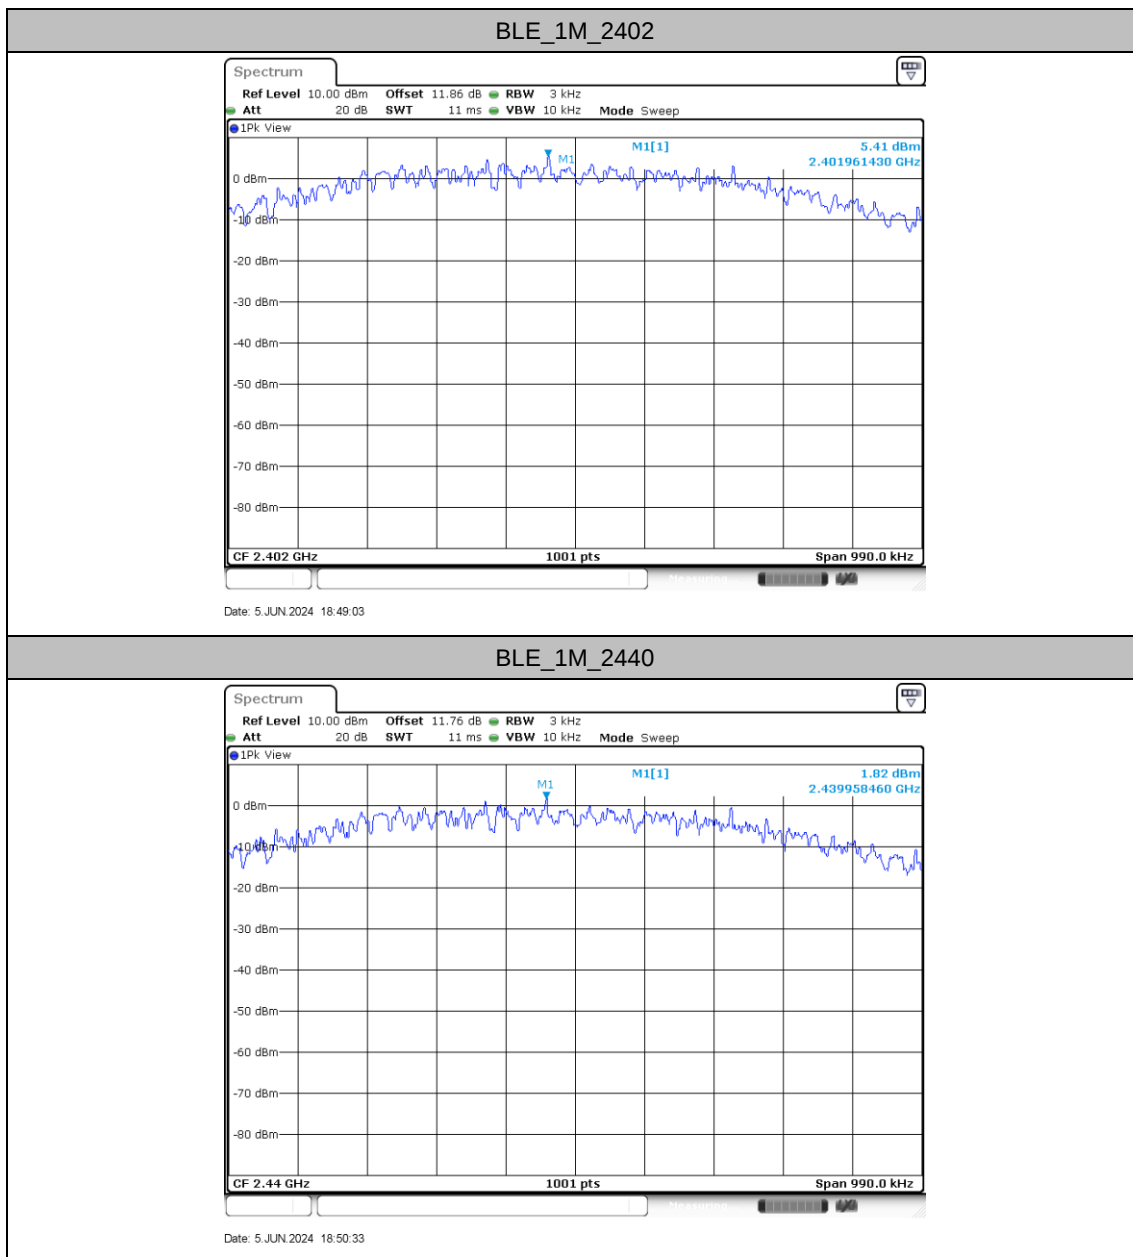

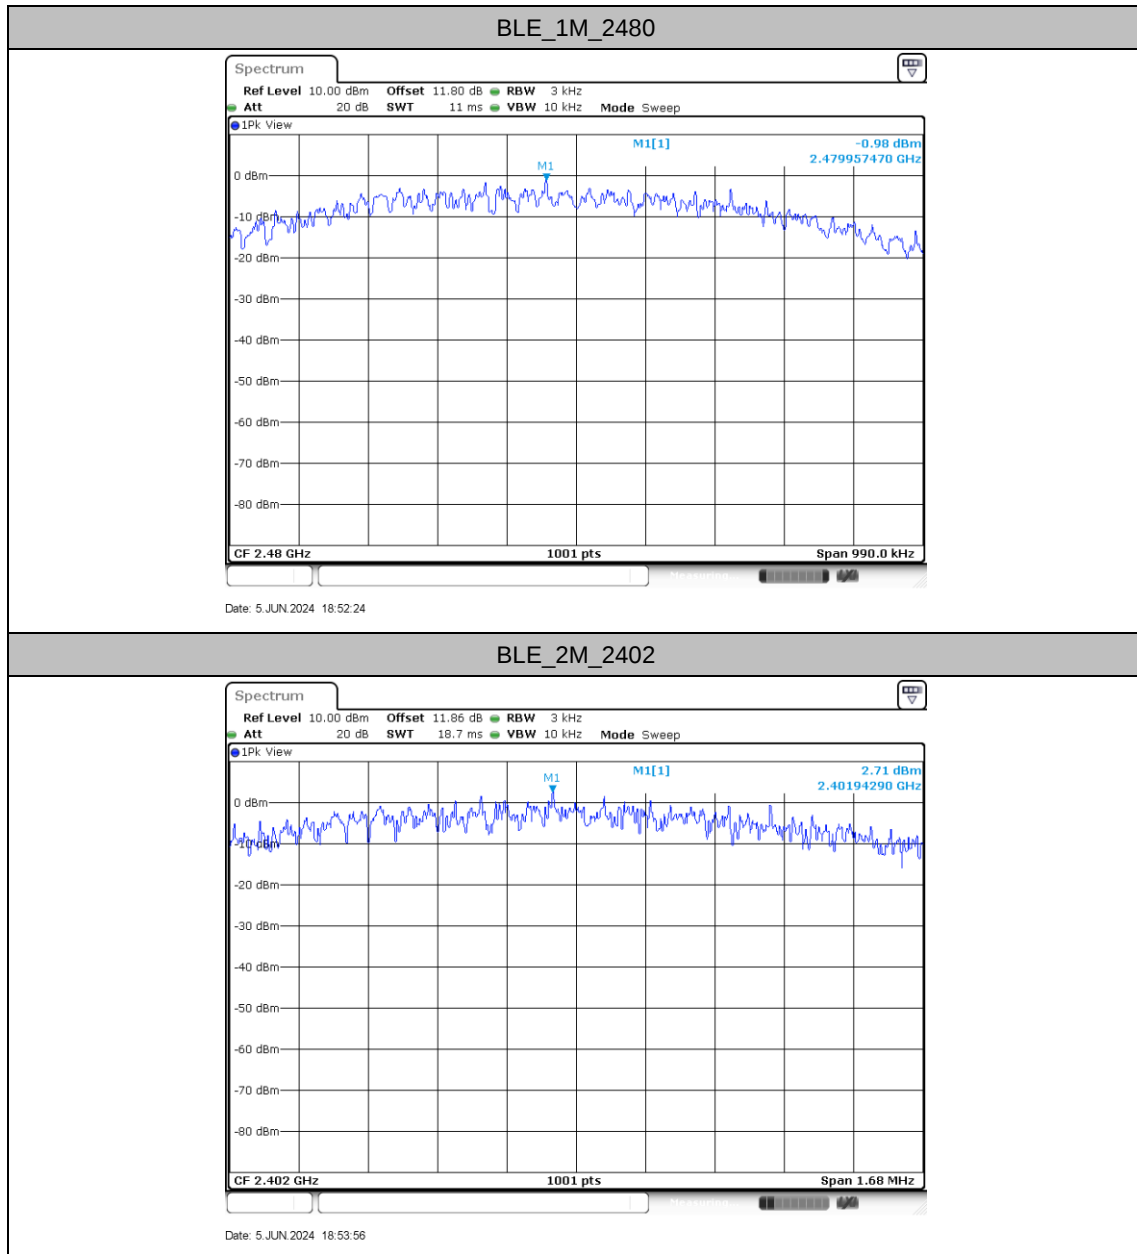

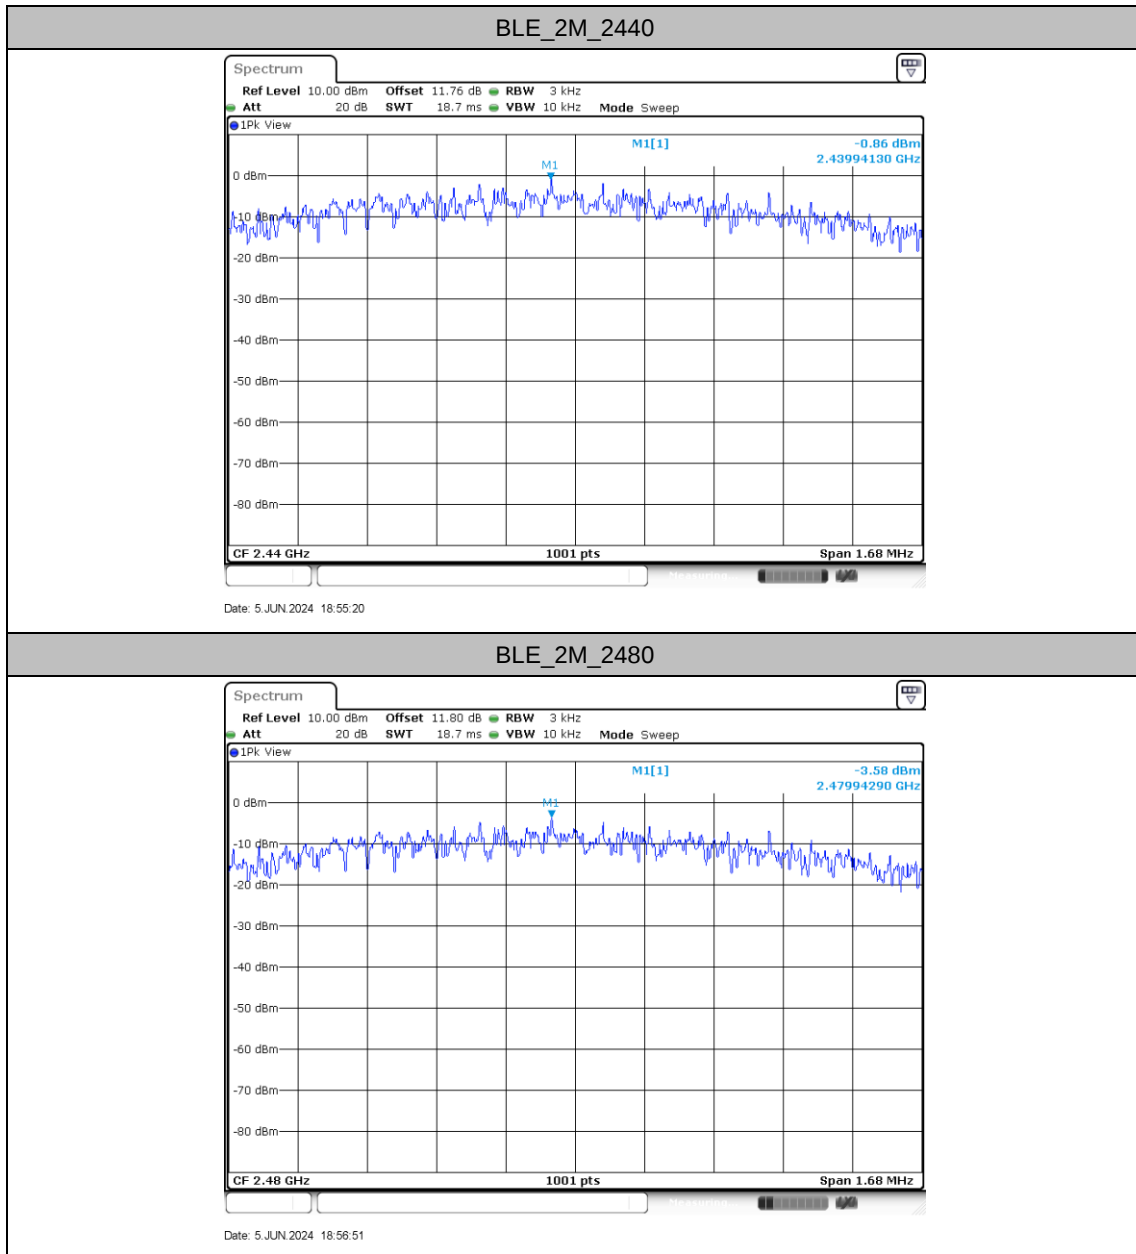



Reference level measurement

Test Result

TestMode	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	2402	2401.99	18.65
	2440	2439.98	14.98
	2480	2479.99	12.17
BLE_2M	2402	2401.99	18.46
	2440	2439.98	14.89
	2480	2479.99	12.21



Test Graphs










Band edge measurements


Test Result

TestMode	ChName	Freq(MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Low	2402	18.65	-32.49	≤ -1.35	PASS
	High	2480	12.17	-43.54	≤ -7.83	PASS
BLE_2M	Low	2402	18.46	-30.58	≤ -1.54	PASS
	High	2480	12.21	-43.94	≤ -7.79	PASS



Test Graphs

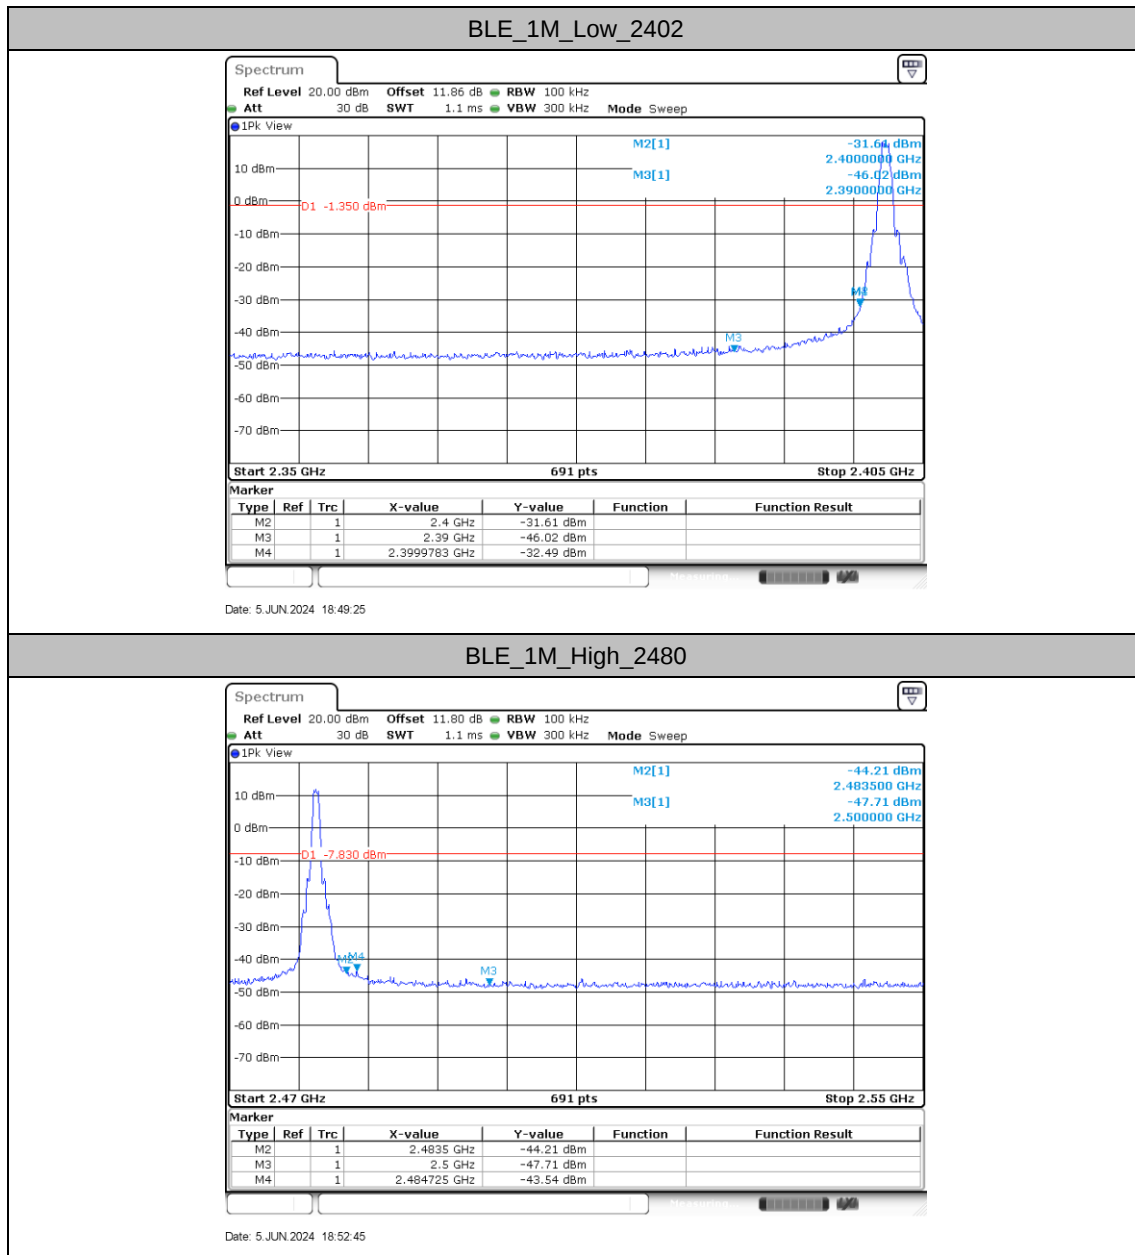

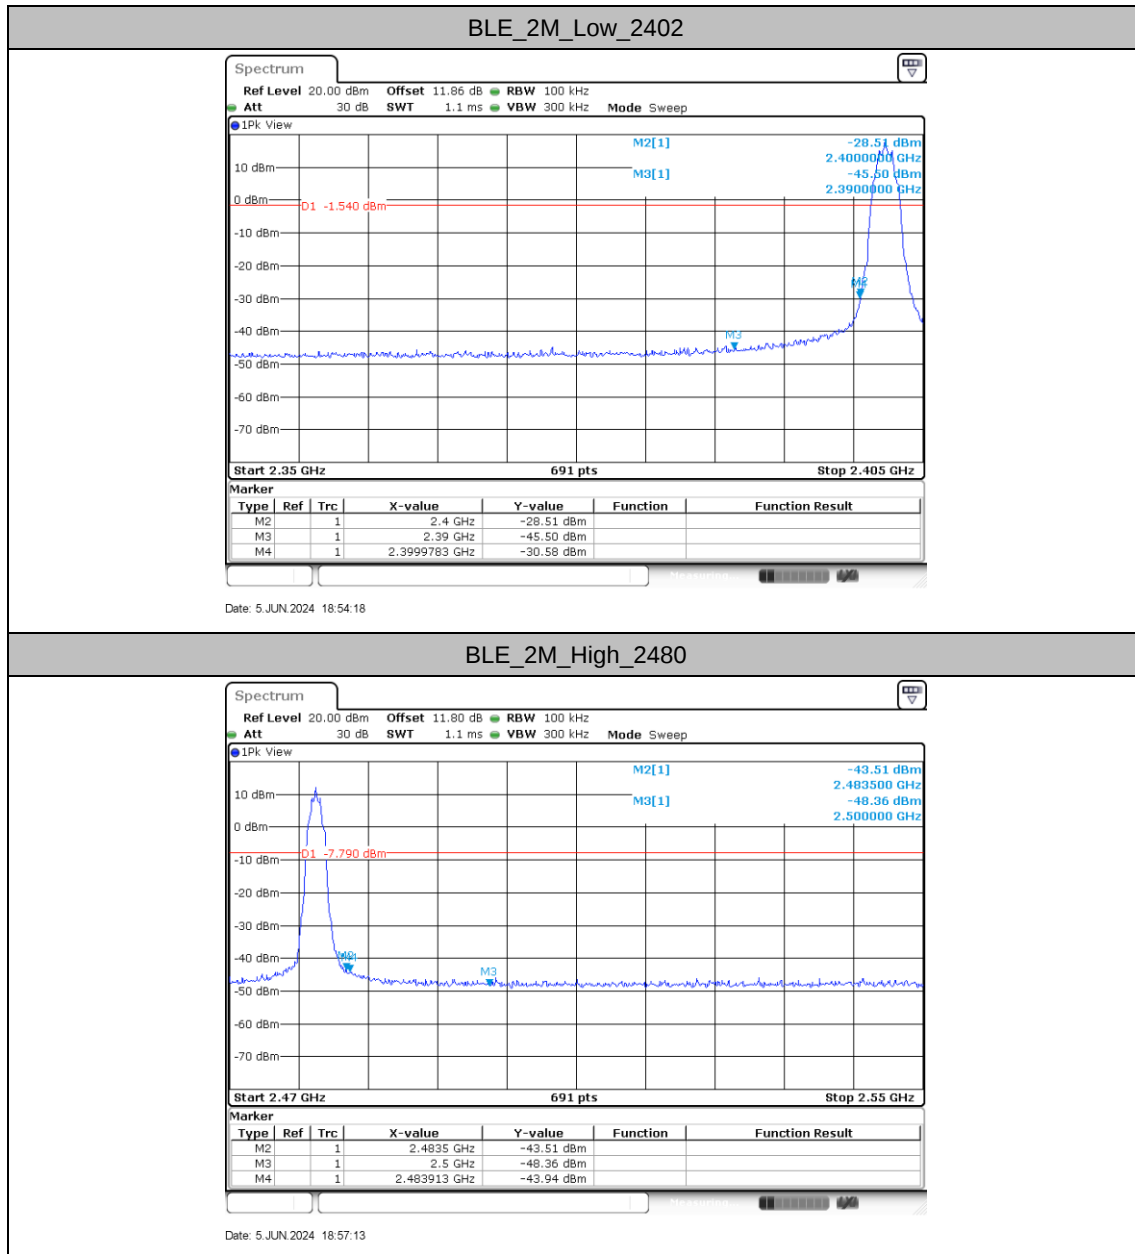




Conducted Spurious Emission


Test Result


TestMode	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	2402	30~1000	18.65	-50.74	≤ -1.35	PASS
		1000~26500	18.65	-42.58	≤ -1.35	PASS
	2440	30~1000	14.98	-51.05	≤ -5.02	PASS
		1000~26500	14.98	-45.73	≤ -5.02	PASS
	2480	30~1000	12.17	-50.94	≤ -7.83	PASS
		1000~26500	12.17	-45.18	≤ -7.83	PASS
BLE_2M	2402	30~1000	18.46	-50.4	≤ -1.54	PASS
		1000~26500	18.46	-43.39	≤ -1.54	PASS
	2440	30~1000	14.89	-50.25	≤ -5.11	PASS
		1000~26500	14.89	-46.08	≤ -5.11	PASS
	2480	30~1000	12.21	-51.01	≤ -7.79	PASS
		1000~26500	12.21	-45.52	≤ -7.79	PASS





Test Graphs

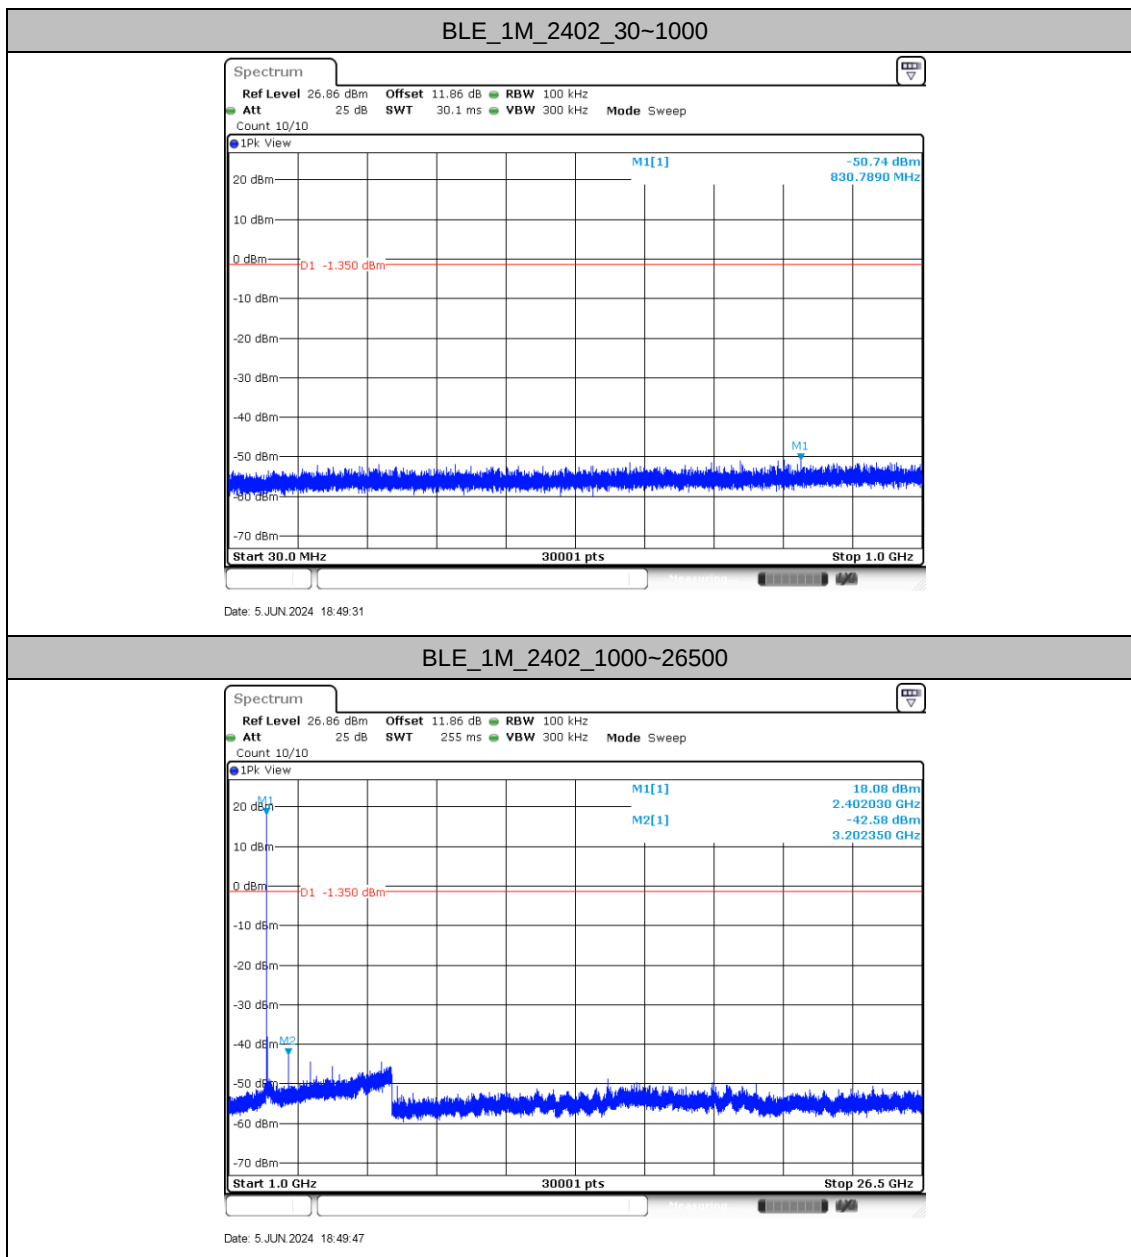


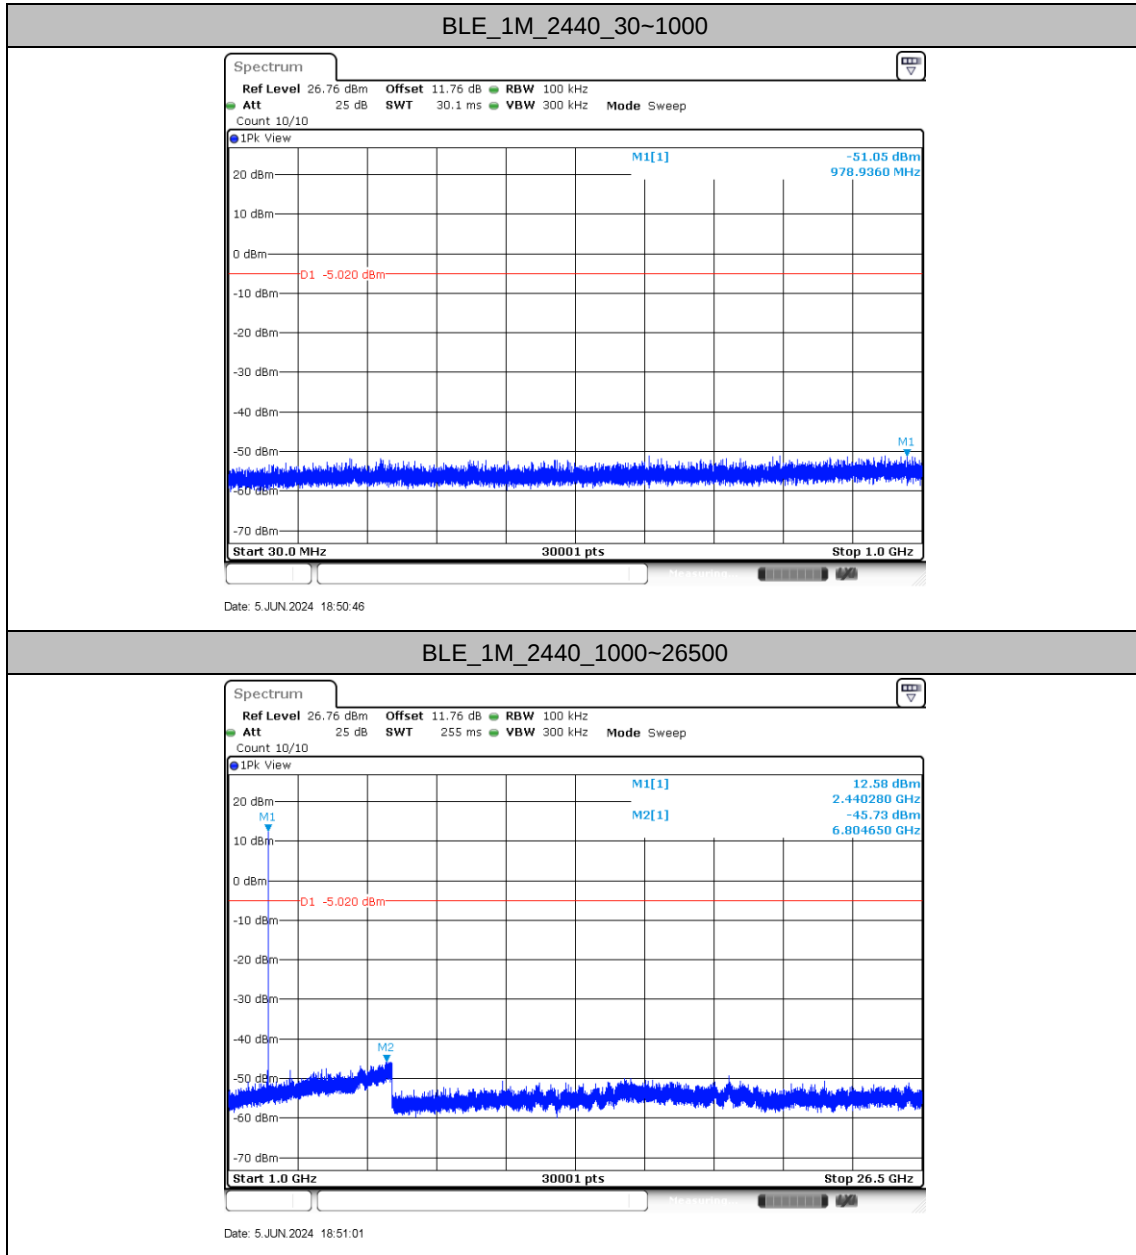

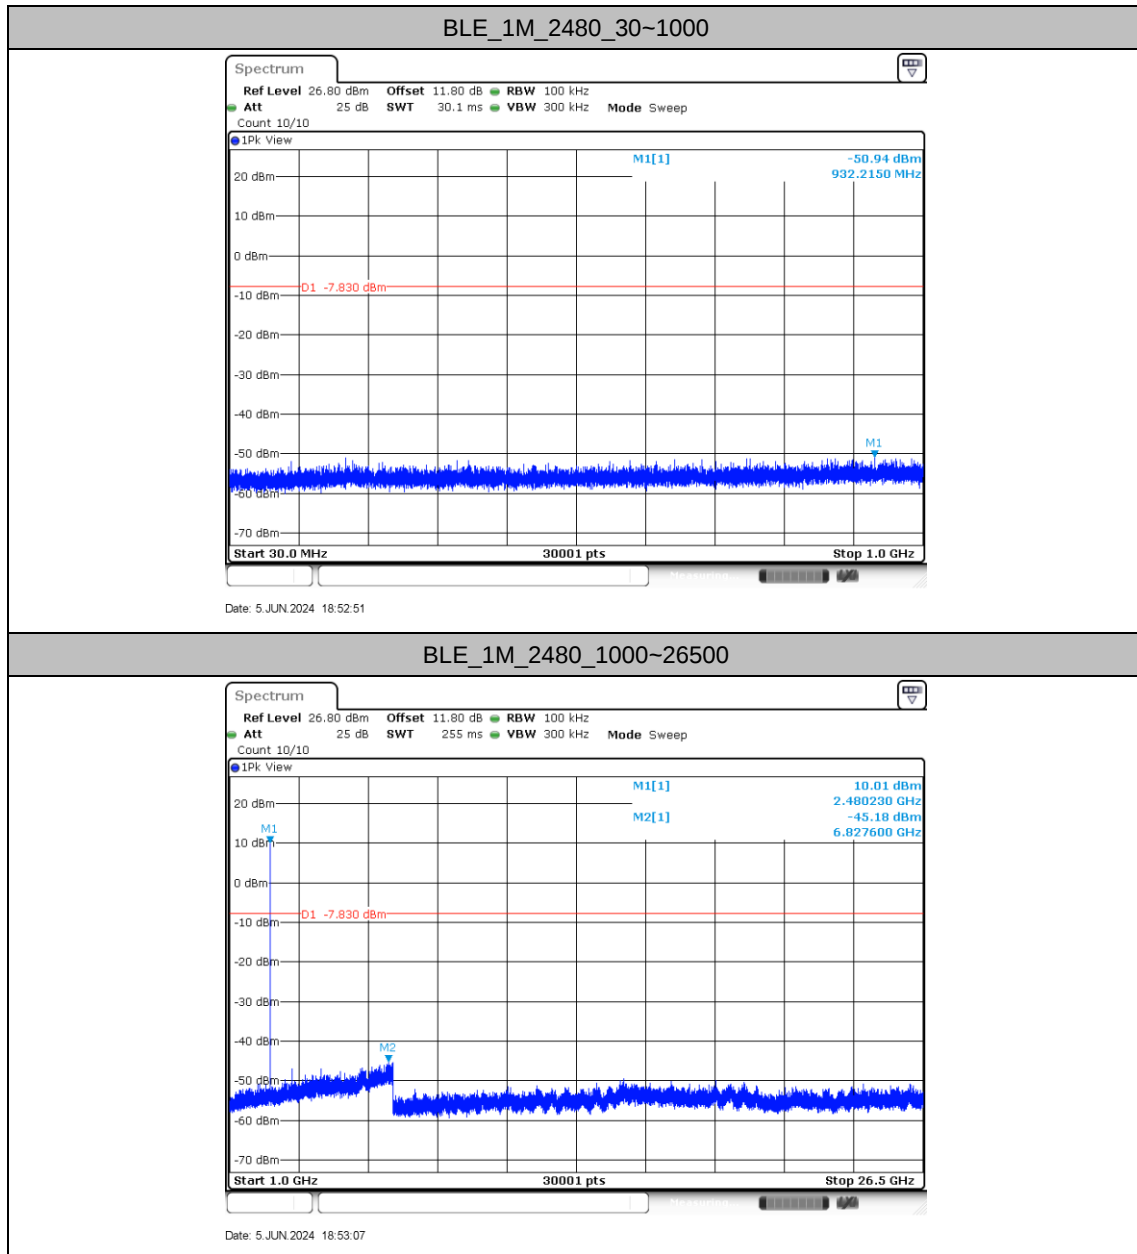

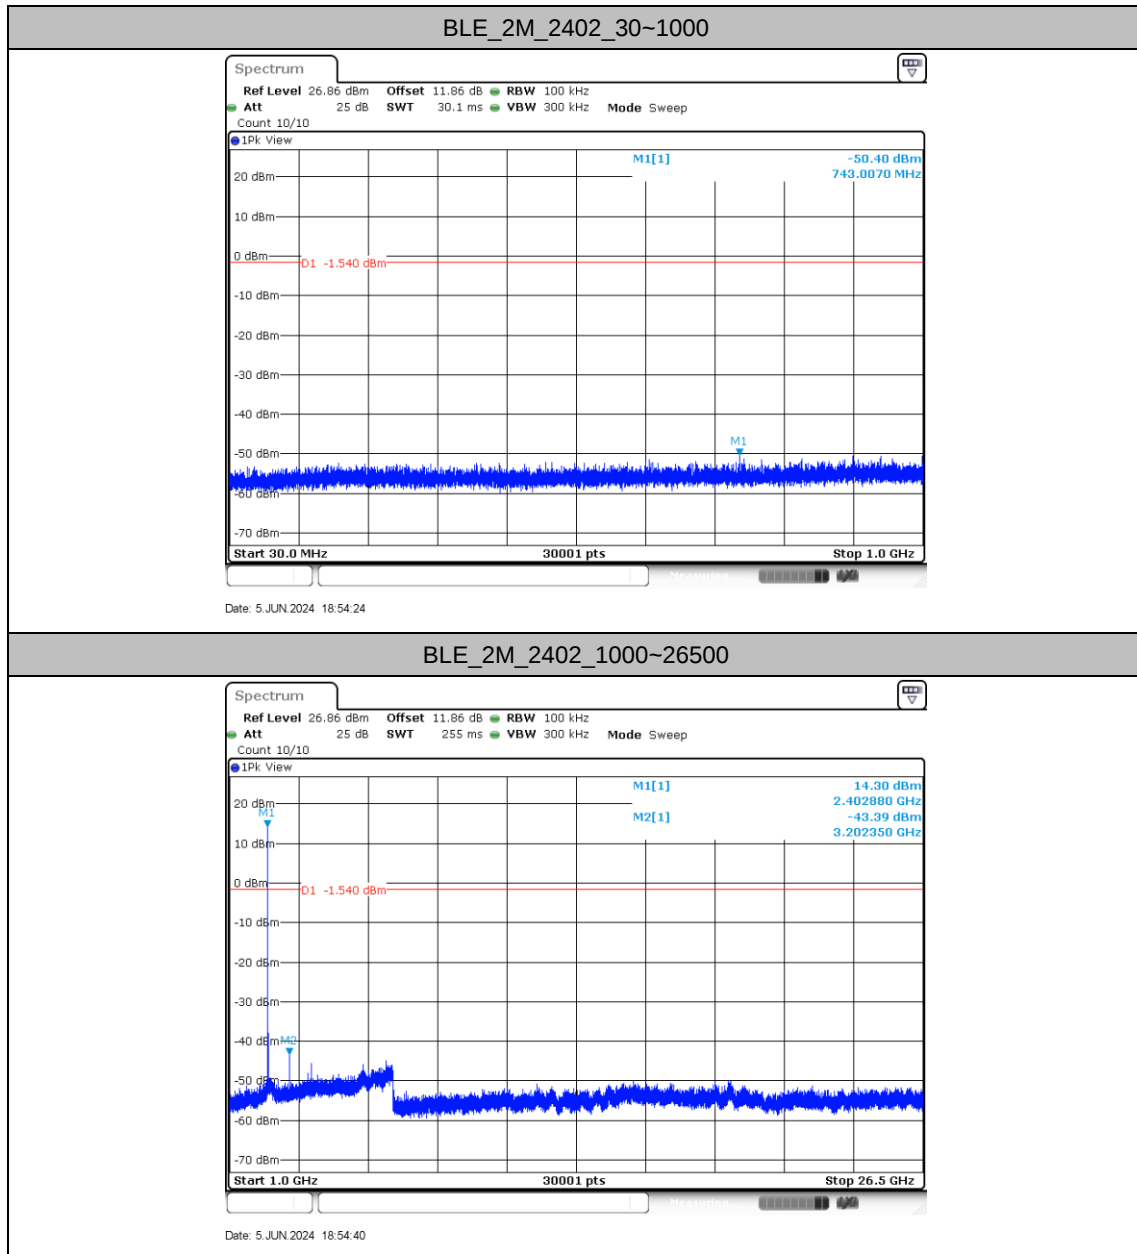


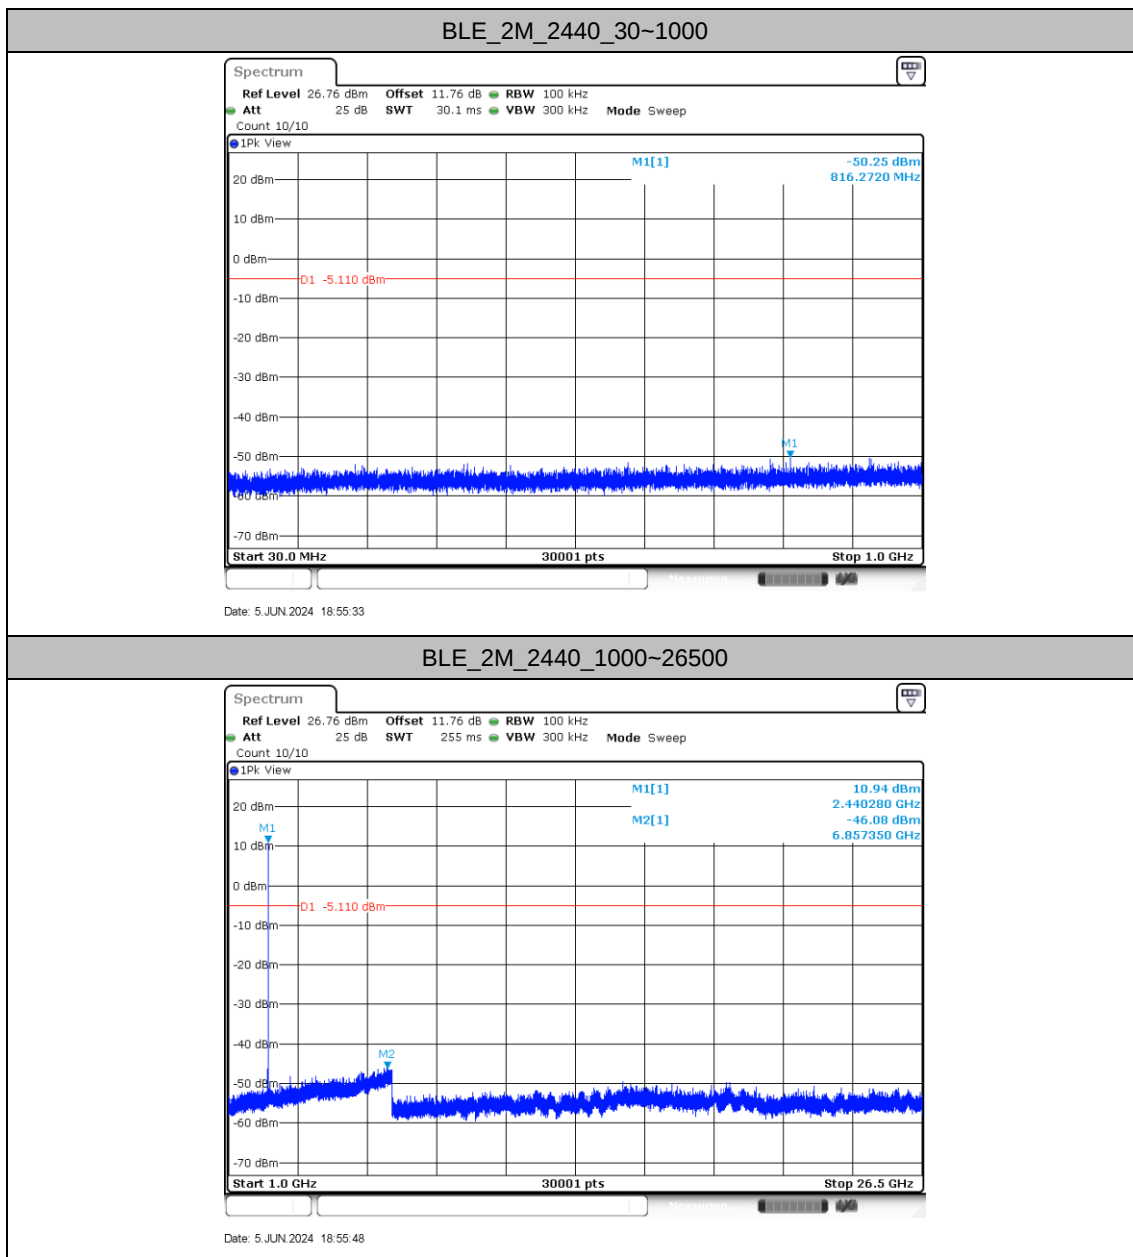

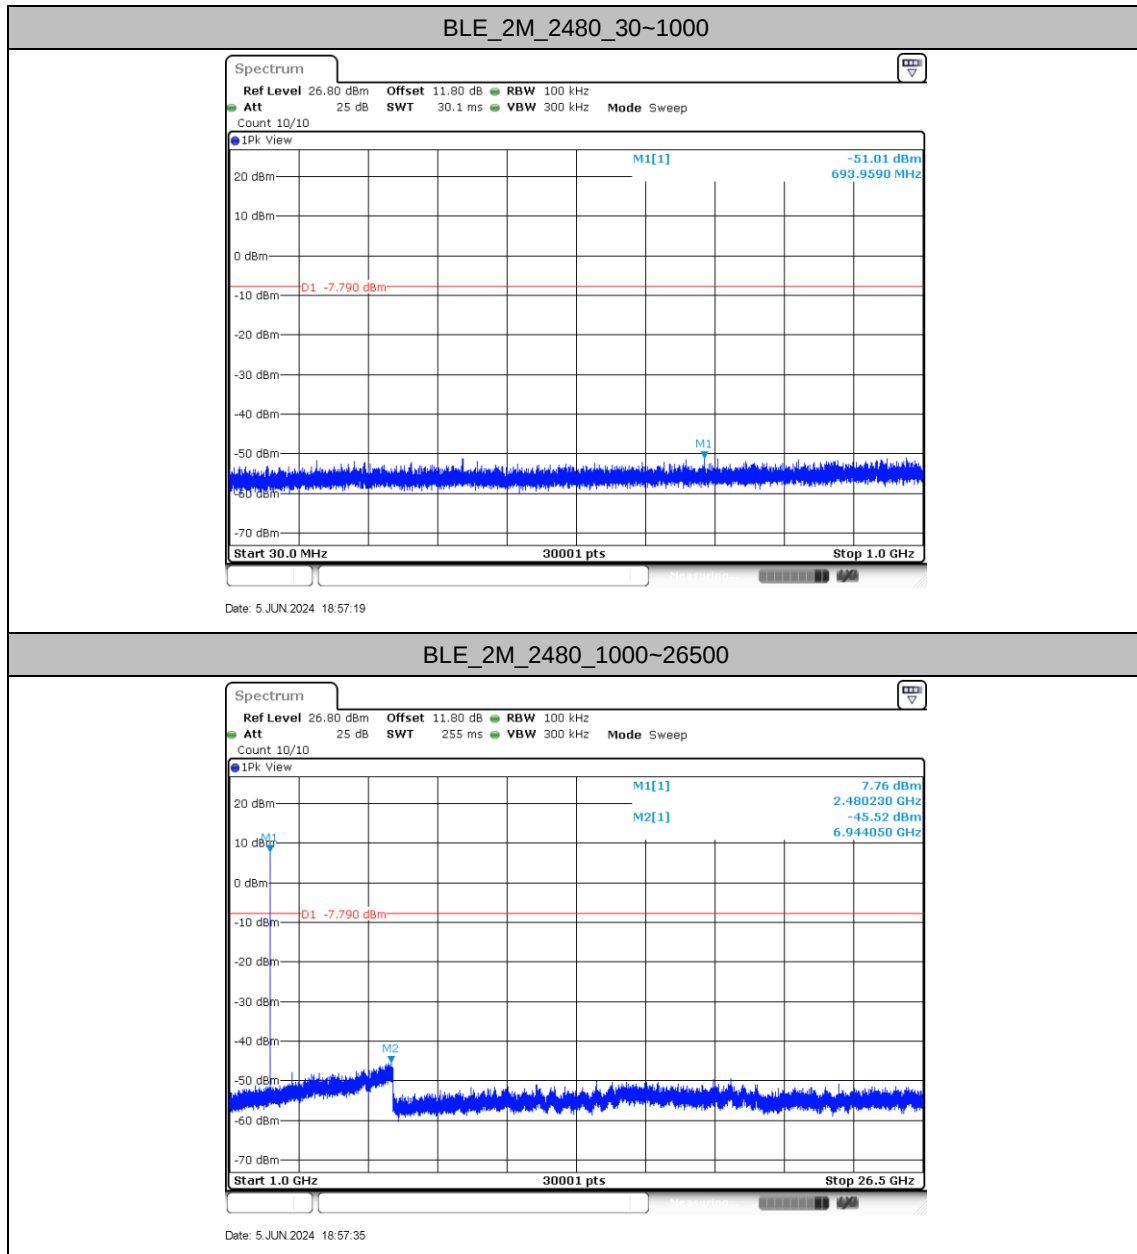

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

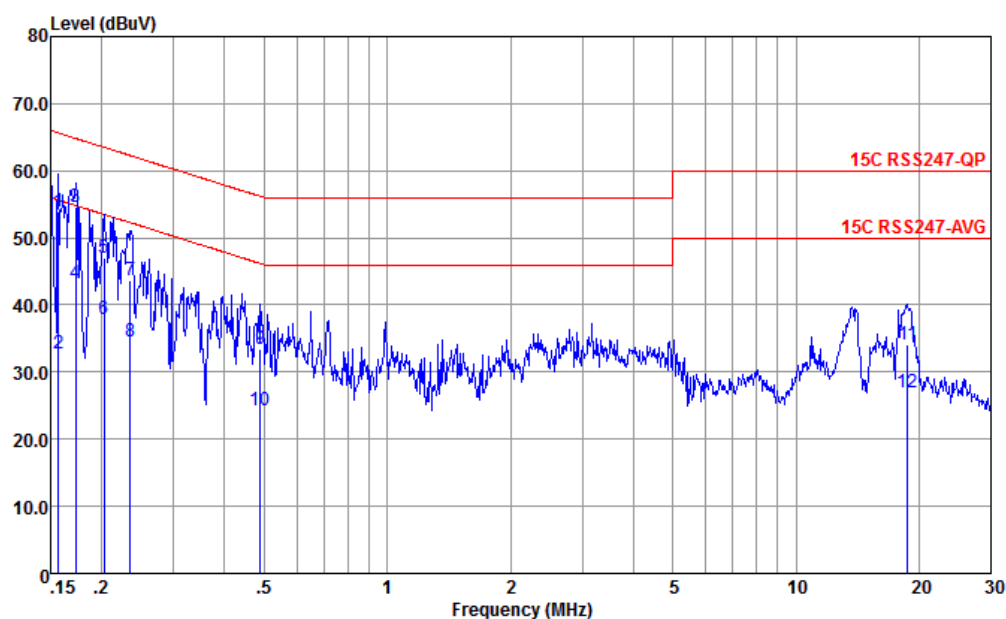


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	53.97	-11.68	65.65	43.50	0.05	10.42	QP
2	0.156	32.77	-22.88	55.65	22.30	0.05	10.42	Average
3 *	0.173	54.66	-10.15	64.81	44.21	0.04	10.41	QP
4	0.173	43.26	-11.55	54.81	32.81	0.04	10.41	Average
5	0.203	47.04	-16.45	63.49	36.60	0.03	10.41	QP
6	0.203	37.94	-15.55	53.49	27.50	0.03	10.41	Average
7	0.235	43.61	-18.65	62.26	33.20	0.03	10.38	QP
8	0.235	34.51	-17.75	52.26	24.10	0.03	10.38	Average
9	0.489	33.40	-22.79	56.19	23.20	-0.03	10.23	QP
10	0.489	24.40	-21.79	46.19	14.20	-0.03	10.23	Average
11	18.721	34.20	-25.80	60.00	23.20	-0.31	11.31	QP
12	18.721	26.90	-23.10	50.00	15.90	-0.31	11.31	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

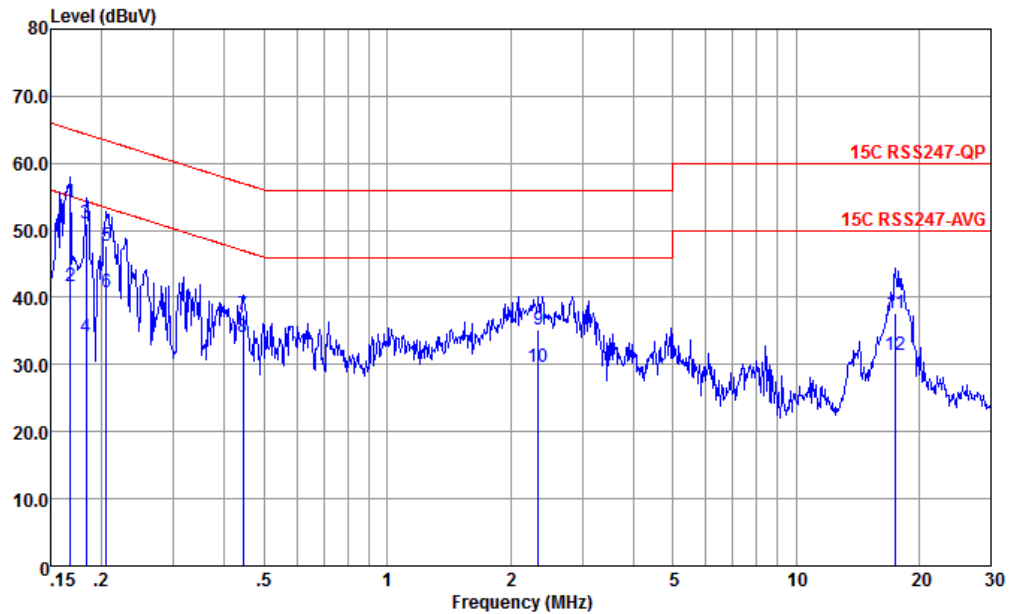

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.168	54.26	-10.82	65.08	43.80	0.04	10.42	QP
2	0.168	41.66	-13.42	55.08	31.20	0.04	10.42	Average
3	0.183	51.06	-13.27	64.33	40.60	0.05	10.41	QP
4	0.183	34.06	-20.27	54.33	23.60	0.05	10.41	Average
5	0.205	47.65	-15.75	63.40	37.20	0.04	10.41	QP
6	0.205	40.75	-12.65	53.40	30.30	0.04	10.41	Average
7	0.444	37.39	-19.59	56.98	27.20	-0.06	10.25	QP
8	0.444	34.09	-12.89	46.98	23.90	-0.06	10.25	Average
9	2.346	35.15	-20.85	56.00	25.20	-0.12	10.07	QP
10	2.346	29.55	-16.45	46.00	19.60	-0.12	10.07	Average
11	17.568	37.69	-22.31	60.00	26.60	-0.19	11.28	QP
12	17.568	31.39	-18.61	50.00	20.30	-0.19	11.28	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Ryan Xu	Relative Humidity :	41~42%
		Temperature :	22~23℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Bluetooth-LE_GSFK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	Bluetooth-LE_GSFK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-
	2400-2483.5	Bluetooth-LE_GSFK	39	2480	1Mbps	-	LF
Mode 4	2400-2483.5	Bluetooth-LE_GSFK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	Bluetooth-LE_GSFK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSFK	00	2389.95	48.51	54.00	-5.49	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSFK	00	4804.00	50.81	54.00	-3.19	V	Average	Pass	Harmonic
2	Bluetooth-LE_GSFK	19	2493.22	45.44	54.00	-8.56	H	AVERAGE	Pass	Band Edge
2	Bluetooth-LE_GSFK	19	7320.00	49.11	54.00	-4.89	H	Average	Pass	Harmonic
3	Bluetooth-LE_GSFK	39	2483.50	52.57	54.00	-1.43	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSFK	39	7440.00	47.12	54.00	-6.88	H	Average	Pass	Harmonic
	Bluetooth-LE_GSFK	39	849.64	37.70	46.00	-8.30	H	PEAK	Pass	LF
4	Bluetooth-LE_GSFK	00	2389.95	47.17	54.00	-6.83	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE_GSFK	00	4804.00	50.19	54.00	-3.81	V	AVERAGE	Pass	Harmonic
5	Bluetooth-LE_GSFK	19	2498.80	45.17	54.00	-8.83	V	AVERAGE	Pass	Band Edge
5	Bluetooth-LE_GSFK	19	7320.00	46.17	54.00	-7.83	V	AVERAGE	Pass	Harmonic
6	Bluetooth-LE_GSFK	39	2483.50	52.22	54.00	-1.78	V	AVERAGE	Pass	Band Edge
6	Bluetooth-LE_GSFK	39	7440.00	49.62	54.00	-4.38	V	AVERAGE	Pass	Harmonic

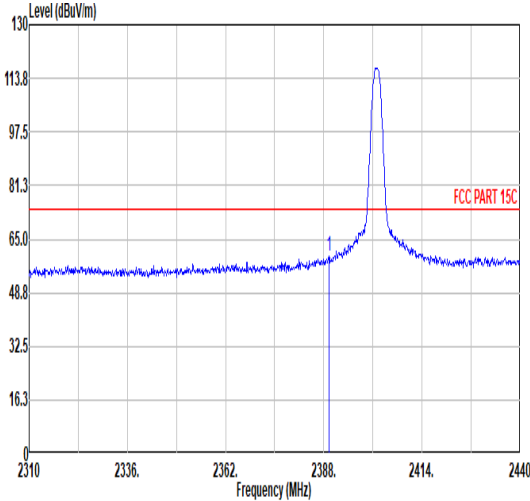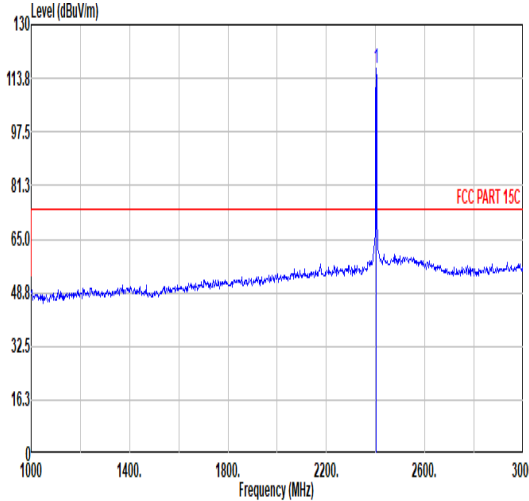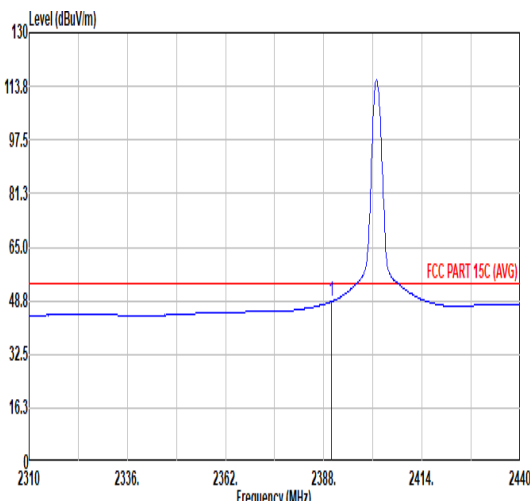
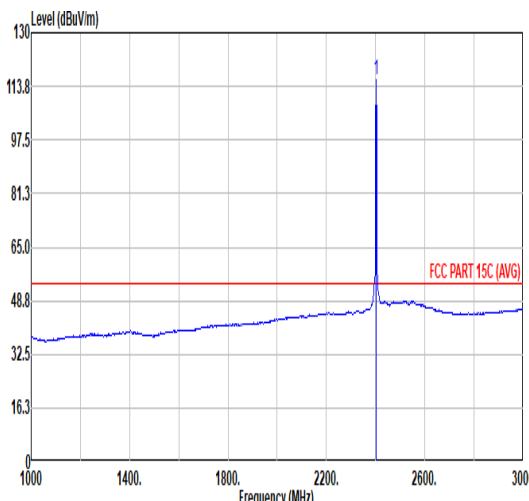


Mode	1																																																					
	Band Edge																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																					
Pol.	Horizontal																																																					
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>59.96</td><td>74.00</td><td>-14.04</td><td>47.49</td><td>32.05</td><td>6.60</td><td>32.18</td><td>6.00</td><td>120</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	59.96	74.00	-14.04	47.49	32.05	6.60	32.18	6.00	120	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.43	59.96	74.00	-14.04	47.49	32.05	6.60	32.18	6.00	120	0 PEAK																																											
Fundamental																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>116.83</td><td>-----</td><td>-----</td><td>104.18</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>120</td><td>0 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	116.83	-----	-----	104.18	32.21	6.62	32.18	6.00	120	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2402.00	116.83	-----	-----	104.18	32.21	6.62	32.18	6.00	120	0 PEAK																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>48.51</td><td>54.00</td><td>-5.49</td><td>36.03</td><td>32.06</td><td>6.60</td><td>32.18</td><td>6.00</td><td>120</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.51	54.00	-5.49	36.03	32.06	6.60	32.18	6.00	120	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	48.51	54.00	-5.49	36.03	32.06	6.60	32.18	6.00	120	0 AVERAGE																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>115.59</td><td>-----</td><td>-----</td><td>102.94</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>120</td><td>0 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	115.59	-----	-----	102.94	32.21	6.62	32.18	6.00	120	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2402.00	115.59	-----	-----	102.94	32.21	6.62	32.18	6.00	120	0 AVERAGE																																											

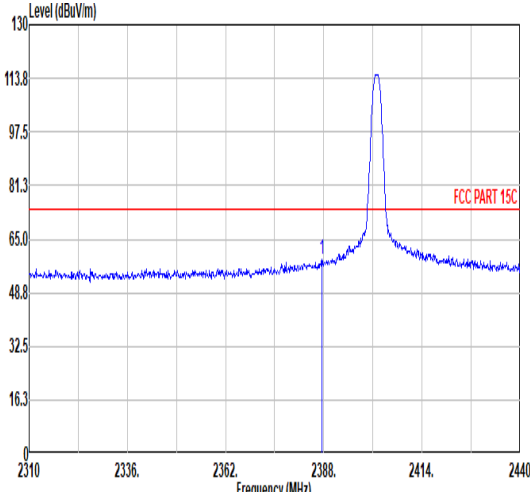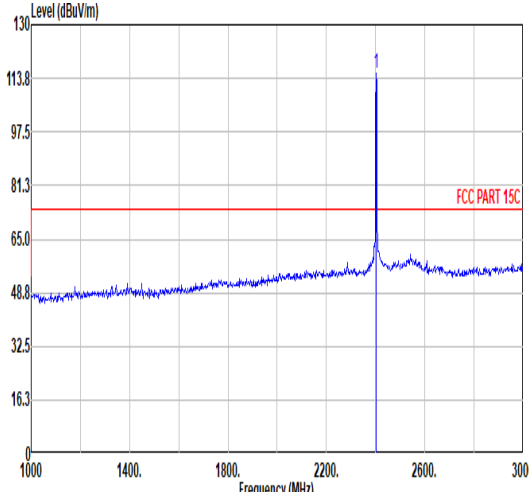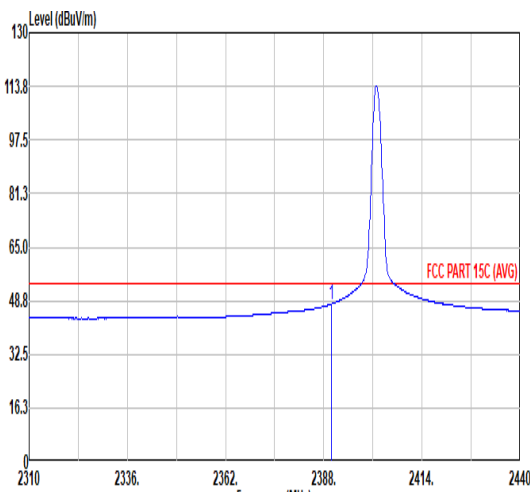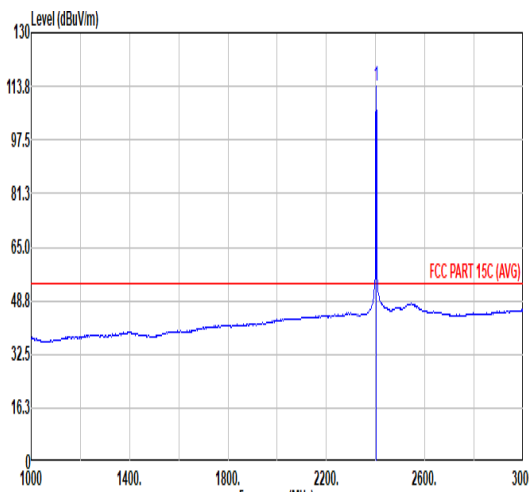

Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.48</td><td>58.76</td><td>74.00</td><td>-15.24</td><td>46.32</td><td>32.02</td><td>6.60</td><td>32.18</td><td>6.00</td><td>378</td><td>303</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.48	58.76	74.00	-15.24	46.32	32.02	6.60	32.18	6.00	378	303	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>115.06</td><td>-----</td><td>-----</td><td>102.41</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>378</td><td>303</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	115.06	-----	-----	102.41	32.21	6.62	32.18	6.00	378	303
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.48	58.76	74.00	-15.24	46.32	32.02	6.60	32.18	6.00	378	303	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	115.06	-----	-----	102.41	32.21	6.62	32.18	6.00	378	303	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>47.79</td><td>54.00</td><td>-6.21</td><td>35.31</td><td>32.06</td><td>6.60</td><td>32.18</td><td>6.00</td><td>378</td><td>303</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.79	54.00	-6.21	35.31	32.06	6.60	32.18	6.00	378	303	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>113.85</td><td>-----</td><td>-----</td><td>101.20</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>378</td><td>303</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	113.85	-----	-----	101.20	32.21	6.62	32.18	6.00	378	303
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	47.79	54.00	-6.21	35.31	32.06	6.60	32.18	6.00	378	303	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2402.00	113.85	-----	-----	101.20	32.21	6.62	32.18	6.00	378	303	AVERAGE																																																																																							

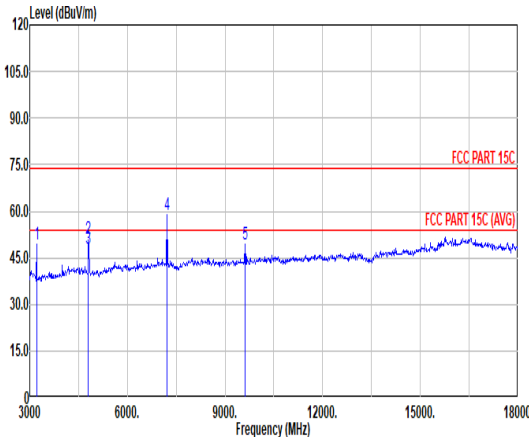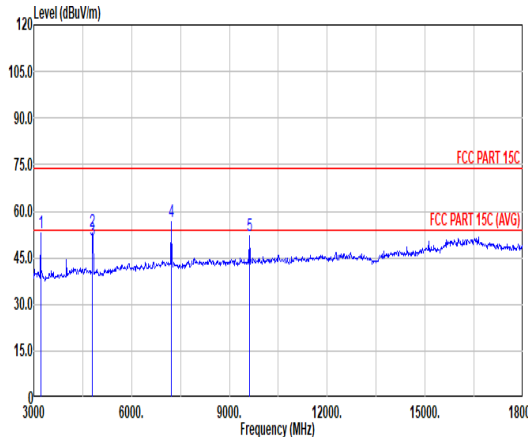

Mode	1																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
Peak Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>49.54</td><td>91.77</td><td>-42.23</td><td>71.06</td><td>32.48</td><td>7.69</td><td>61.69</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>51.23</td><td>74.00</td><td>-22.77</td><td>68.87</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>308</td><td>226 PEAK</td></tr><tr><td>3</td><td>4804.00</td><td>48.06</td><td>54.00</td><td>-5.94</td><td>65.70</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>308</td><td>226 AVERAGE</td></tr><tr><td>4</td><td>7215.00</td><td>58.94</td><td>91.77</td><td>-32.83</td><td>72.14</td><td>35.66</td><td>11.65</td><td>60.51</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>9615.00</td><td>49.49</td><td>91.77</td><td>-42.28</td><td>60.20</td><td>36.90</td><td>13.56</td><td>61.17</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3210.00	49.54	91.77	-42.23	71.06	32.48	7.69	61.69	0.00	---	Peak	2	4804.00	51.23	74.00	-22.77	68.87	34.20	9.44	61.28	0.00	308	226 PEAK	3	4804.00	48.06	54.00	-5.94	65.70	34.20	9.44	61.28	0.00	308	226 AVERAGE	4	7215.00	58.94	91.77	-32.83	72.14	35.66	11.65	60.51	0.00	---	Peak	5	9615.00	49.49	91.77	-42.28	60.20	36.90	13.56	61.17	0.00	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>52.82</td><td>90.01</td><td>-37.19</td><td>74.34</td><td>32.48</td><td>7.69</td><td>61.69</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>71.10</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>100</td><td>278 Peak</td></tr><tr><td>3</td><td>4804.00</td><td>50.81</td><td>54.00</td><td>-3.19</td><td>68.45</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>100</td><td>278 Average</td></tr><tr><td>4</td><td>7215.00</td><td>56.58</td><td>90.01</td><td>-33.43</td><td>69.78</td><td>35.66</td><td>11.65</td><td>60.51</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>9615.00</td><td>51.88</td><td>90.01</td><td>-38.13</td><td>62.59</td><td>36.90</td><td>13.56</td><td>61.17</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3210.00	52.82	90.01	-37.19	74.34	32.48	7.69	61.69	0.00	---	Peak	2	4804.00	53.46	74.00	-20.54	71.10	34.20	9.44	61.28	0.00	100	278 Peak	3	4804.00	50.81	54.00	-3.19	68.45	34.20	9.44	61.28	0.00	100	278 Average	4	7215.00	56.58	90.01	-33.43	69.78	35.66	11.65	60.51	0.00	---	Peak	5	9615.00	51.88	90.01	-38.13	62.59	36.90	13.56	61.17	0.00	---	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																														
1	3210.00	49.54	91.77	-42.23	71.06	32.48	7.69	61.69	0.00	---	Peak																																																																																																																																																																													
2	4804.00	51.23	74.00	-22.77	68.87	34.20	9.44	61.28	0.00	308	226 PEAK																																																																																																																																																																													
3	4804.00	48.06	54.00	-5.94	65.70	34.20	9.44	61.28	0.00	308	226 AVERAGE																																																																																																																																																																													
4	7215.00	58.94	91.77	-32.83	72.14	35.66	11.65	60.51	0.00	---	Peak																																																																																																																																																																													
5	9615.00	49.49	91.77	-42.28	60.20	36.90	13.56	61.17	0.00	---	Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																														
1	3210.00	52.82	90.01	-37.19	74.34	32.48	7.69	61.69	0.00	---	Peak																																																																																																																																																																													
2	4804.00	53.46	74.00	-20.54	71.10	34.20	9.44	61.28	0.00	100	278 Peak																																																																																																																																																																													
3	4804.00	50.81	54.00	-3.19	68.45	34.20	9.44	61.28	0.00	100	278 Average																																																																																																																																																																													
4	7215.00	56.58	90.01	-33.43	69.78	35.66	11.65	60.51	0.00	---	Peak																																																																																																																																																																													
5	9615.00	51.88	90.01	-38.13	62.59	36.90	13.56	61.17	0.00	---	Peak																																																																																																																																																																													



Mode	2																																																							
	Band Edge - L																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																							
Pol.	Horizontal																																																							
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2373.44</td><td>56.20</td><td>74.00</td><td>-17.80</td><td>43.98</td><td>31.83</td><td>6.58</td><td>32.19</td><td>6.00</td><td>143</td><td>0 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.44	56.20	74.00	-17.80	43.98	31.83	6.58	32.19	6.00	143	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2373.44	56.20	74.00	-17.80	43.98	31.83	6.58	32.19	6.00	143	0 PEAK																																													
Fundamental	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>115.16</td><td>-----</td><td>-----</td><td>102.26</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>143</td><td>0 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	115.16	-----	-----	102.26	32.44	6.67	32.21	6.00	143	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2440.00	115.16	-----	-----	102.26	32.44	6.67	32.21	6.00	143	0 PEAK																																													
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.82</td><td>43.84</td><td>54.00</td><td>-10.16</td><td>31.36</td><td>32.06</td><td>6.60</td><td>32.18</td><td>6.00</td><td>143</td><td>0 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	43.84	54.00	-10.16	31.36	32.06	6.60	32.18	6.00	143	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.82	43.84	54.00	-10.16	31.36	32.06	6.60	32.18	6.00	143	0 AVERAGE																																													
Fundamental	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2440.00</td><td>113.94</td><td>-----</td><td>-----</td><td>101.04</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>143</td><td>0 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	113.94	-----	-----	101.04	32.44	6.67	32.21	6.00	143	0 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2440.00	113.94	-----	-----	101.04	32.44	6.67	32.21	6.00	143	0 AVERAGE																																													



Mode	2																																												
	Band Edge - R																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																												
Pol.	Horizontal	Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.92</td><td>58.34</td><td>74.00</td><td>-15.66</td><td>44.94</td><td>32.89</td><td>6.75</td><td>32.24</td><td>6.00</td><td>143</td><td>0 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.92	58.34	74.00	-15.66	44.94	32.89	6.75	32.24	6.00	143	0 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2498.92	58.34	74.00	-15.66	44.94	32.89	6.75	32.24	6.00	143	0 PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.22</td><td>45.44</td><td>54.00</td><td>-8.56</td><td>32.08</td><td>32.85</td><td>6.75</td><td>32.24</td><td>6.00</td><td>143</td><td>0 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.22	45.44	54.00	-8.56	32.08	32.85	6.75	32.24	6.00	143	0 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	2493.22	45.44	54.00	-8.56	32.08	32.85	6.75	32.24	6.00	143	0 AVERAGE																																		





Mode	2																																																						
	Band Edge - L																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																						
Pol.	Vertical						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2380.72</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>43.80</td><td>31.93</td><td>6.59</td><td>32.19</td><td>6.00</td><td>366</td><td>298</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2380.72	56.13	74.00	-17.87	43.80	31.93	6.59	32.19	6.00	366	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2380.72	56.13	74.00	-17.87	43.80	31.93	6.59	32.19	6.00	366	298	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>112.82</td><td>-----</td><td>-----</td><td>99.92</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>366</td><td>298</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	112.82	-----	-----	99.92	32.44	6.67	32.21	6.00	366	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2440.00	112.82	-----	-----	99.92	32.44	6.67	32.21	6.00	366	298	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>30.99</td><td>32.06</td><td>6.60</td><td>32.18</td><td>6.00</td><td>366</td><td>298</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	43.47	54.00	-10.53	30.99	32.06	6.60	32.18	6.00	366	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	43.47	54.00	-10.53	30.99	32.06	6.60	32.18	6.00	366	298	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>111.58</td><td>-----</td><td>-----</td><td>98.68</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>366</td><td>298</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	111.58	-----	-----	98.68	32.44	6.67	32.21	6.00	366	298
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2440.00	111.58	-----	-----	98.68	32.44	6.67	32.21	6.00	366	298	AVERAGE																																											



Mode	2																																																								
	Band Edge - R																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																								
Pol.	Vertical						Fundamental																																																		
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2491.90</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>43.43</td><td>32.84</td><td>6.74</td><td>32.24</td><td>6.00</td><td>366</td><td>298</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2491.90	56.77	74.00	-17.23	43.43	32.84	6.74	32.24	6.00	366	298	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2491.90	56.77	74.00	-17.23	43.43	32.84	6.74	32.24	6.00	366	298	PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>44.49</td><td>54.00</td><td>-9.51</td><td>31.22</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>366</td><td>298</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	44.49	54.00	-9.51	31.22	32.77	6.73	32.23	6.00	366	298	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2483.62	44.49	54.00	-9.51	31.22	32.77	6.73	32.23	6.00	366	298	AVERAGE																																													



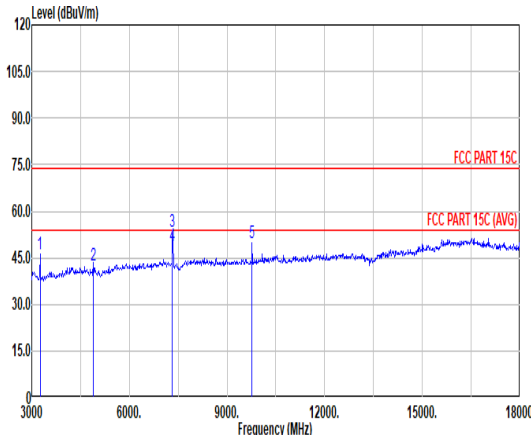
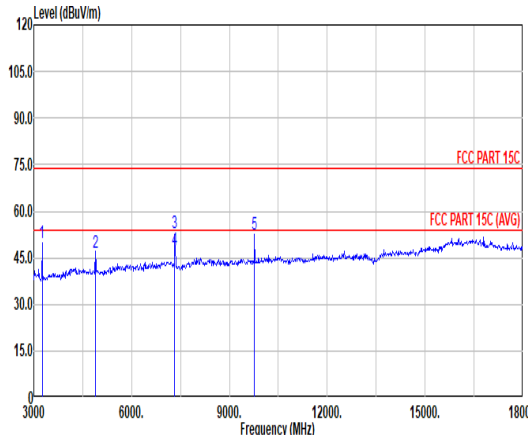


Mode	2																																																																																																																																																																																							
	Harmonic																																																																																																																																																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
Peak Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3255.00</td><td>46.31</td><td>92.54</td><td>-46.23</td><td>67.78</td><td>32.41</td><td>7.75</td><td>61.63</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 4880.00</td><td>42.75</td><td>74.00</td><td>-31.25</td><td>60.24</td><td>34.20</td><td>9.53</td><td>61.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3 7320.00</td><td>53.40</td><td>74.00</td><td>-20.60</td><td>66.78</td><td>35.68</td><td>11.69</td><td>60.75</td><td>0.00</td><td>100</td><td>247</td><td>Peak</td></tr><tr><td>4 7320.00</td><td>49.11</td><td>54.00</td><td>-4.89</td><td>62.49</td><td>35.68</td><td>11.69</td><td>60.75</td><td>0.00</td><td>100</td><td>247</td><td>Average</td></tr><tr><td>5 9765.00</td><td>49.96</td><td>92.54</td><td>-42.58</td><td>60.47</td><td>37.13</td><td>13.59</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3255.00	46.31	92.54	-46.23	67.78	32.41	7.75	61.63	0.00	---	---	Peak	2 4880.00	42.75	74.00	-31.25	60.24	34.20	9.53	61.22	0.00	---	---	PEAK	3 7320.00	53.40	74.00	-20.60	66.78	35.68	11.69	60.75	0.00	100	247	Peak	4 7320.00	49.11	54.00	-4.89	62.49	35.68	11.69	60.75	0.00	100	247	Average	5 9765.00	49.96	92.54	-42.58	60.47	37.13	13.59	61.23	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 3255.00</td><td>49.70</td><td>91.13</td><td>-41.43</td><td>71.17</td><td>32.41</td><td>7.75</td><td>61.63</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 4880.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>64.27</td><td>34.20</td><td>9.53</td><td>61.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3 7320.00</td><td>52.79</td><td>74.00</td><td>-21.21</td><td>66.17</td><td>35.68</td><td>11.69</td><td>60.75</td><td>0.00</td><td>242</td><td>187</td><td>PEAK</td></tr><tr><td>4 7320.00</td><td>47.45</td><td>54.00</td><td>-6.55</td><td>60.83</td><td>35.68</td><td>11.69</td><td>60.75</td><td>0.00</td><td>242</td><td>187</td><td>AVERAGE</td></tr><tr><td>5 9765.00</td><td>52.70</td><td>91.13</td><td>-38.43</td><td>63.21</td><td>37.13</td><td>13.59</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 3255.00	49.70	91.13	-41.43	71.17	32.41	7.75	61.63	0.00	---	---	Peak	2 4880.00	46.78	74.00	-27.22	64.27	34.20	9.53	61.22	0.00	---	---	PEAK	3 7320.00	52.79	74.00	-21.21	66.17	35.68	11.69	60.75	0.00	242	187	PEAK	4 7320.00	47.45	54.00	-6.55	60.83	35.68	11.69	60.75	0.00	242	187	AVERAGE	5 9765.00	52.70	91.13	-38.43	63.21	37.13	13.59	61.23	0.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																														
1 3255.00	46.31	92.54	-46.23	67.78	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																													
2 4880.00	42.75	74.00	-31.25	60.24	34.20	9.53	61.22	0.00	---	---	PEAK																																																																																																																																																																													
3 7320.00	53.40	74.00	-20.60	66.78	35.68	11.69	60.75	0.00	100	247	Peak																																																																																																																																																																													
4 7320.00	49.11	54.00	-4.89	62.49	35.68	11.69	60.75	0.00	100	247	Average																																																																																																																																																																													
5 9765.00	49.96	92.54	-42.58	60.47	37.13	13.59	61.23	0.00	---	---	Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																														
1 3255.00	49.70	91.13	-41.43	71.17	32.41	7.75	61.63	0.00	---	---	Peak																																																																																																																																																																													
2 4880.00	46.78	74.00	-27.22	64.27	34.20	9.53	61.22	0.00	---	---	PEAK																																																																																																																																																																													
3 7320.00	52.79	74.00	-21.21	66.17	35.68	11.69	60.75	0.00	242	187	PEAK																																																																																																																																																																													
4 7320.00	47.45	54.00	-6.55	60.83	35.68	11.69	60.75	0.00	242	187	AVERAGE																																																																																																																																																																													
5 9765.00	52.70	91.13	-38.43	63.21	37.13	13.59	61.23	0.00	---	---	Peak																																																																																																																																																																													



		3																																																				
Mode		Band Edge																																																				
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																				
Pol.		Horizontal					Fundamental																																															
Peak																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>63.56</td><td>74.00</td><td>-10.44</td><td>50.29</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>162</td><td>0 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	63.56	74.00	-10.44	50.29	32.77	6.73	32.23	6.00	162	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.56	63.56	74.00	-10.44	50.29	32.77	6.73	32.23	6.00	162	0 PEAK																																											
Avg																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>52.57</td><td>54.00</td><td>-1.43</td><td>39.30</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>162</td><td>0 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.57	54.00	-1.43	39.30	32.77	6.73	32.23	6.00	162	0 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.50	52.57	54.00	-1.43	39.30	32.77	6.73	32.23	6.00	162	0 AVERAGE																																											
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>112.80</td><td>-----</td><td>-----</td><td>99.56</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>162</td><td>0 PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	112.80	-----	-----	99.56	32.74	6.73	32.23	6.00	162	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2480.00	112.80	-----	-----	99.56	32.74	6.73	32.23	6.00	162	0 PEAK																																											
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>111.39</td><td>-----</td><td>-----</td><td>98.15</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>162</td><td>0 AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	111.39	-----	-----	98.15	32.74	6.73	32.23	6.00	162	0 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2480.00	111.39	-----	-----	98.15	32.74	6.73	32.23	6.00	162	0 AVERAGE																																											

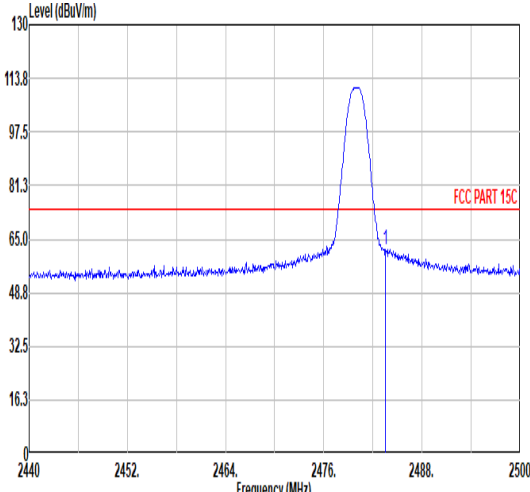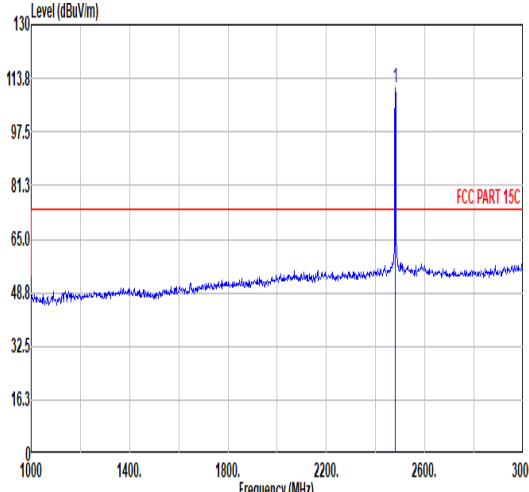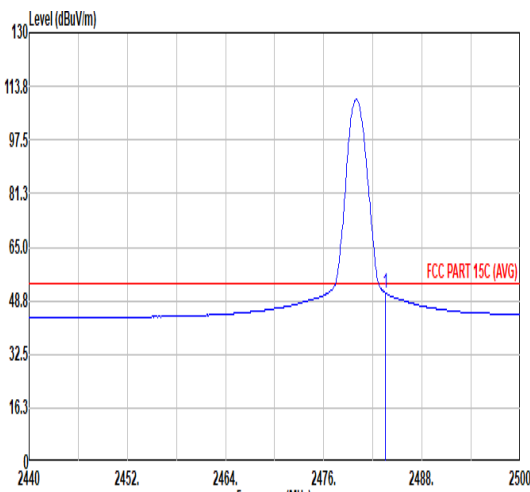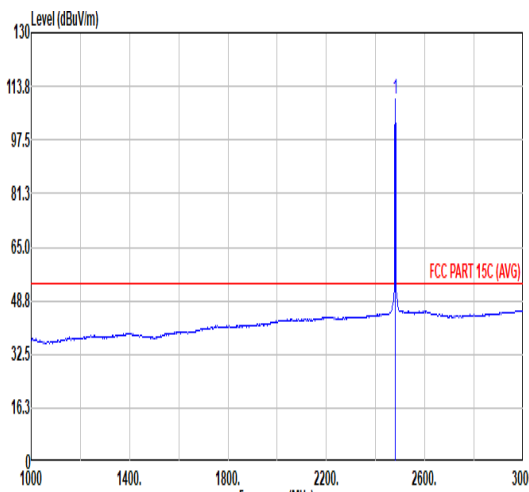

		3																																																																																																										
Mode		Band Edge																																																																																																										
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																										
Pol.		Vertical										Fundamental																																																																																																
Peak																																																																																																												
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>61.87</td><td>74.00</td><td>-12.13</td><td>48.60</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>398</td><td>300</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	61.87	74.00	-12.13	48.60	32.77	6.73	32.23	6.00	398	300	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>111.07</td><td>-----</td><td>-----</td><td>97.83</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>398</td><td>300</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	111.07	-----	-----	97.83	32.74	6.73	32.23	6.00	398	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2483.50	61.87	74.00	-12.13	48.60	32.77	6.73	32.23	6.00	398	300	PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2480.00	111.07	-----	-----	97.83	32.74	6.73	32.23	6.00	398	300	PEAK																																																																																																
Avg																																																																																																												
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>51.20</td><td>54.00</td><td>-2.80</td><td>37.93</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>398</td><td>300</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	51.20	54.00	-2.80	37.93	32.77	6.73	32.23	6.00	398	300	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>109.83</td><td>-----</td><td>-----</td><td>96.59</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>398</td><td>300</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	109.83	-----	-----	96.59	32.74	6.73	32.23	6.00	398	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2483.50	51.20	54.00	-2.80	37.93	32.77	6.73	32.23	6.00	398	300	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2480.00	109.83	-----	-----	96.59	32.74	6.73	32.23	6.00	398	300	AVERAGE																																																																																																



3

Mode


Harmonic

2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz


Pol.

Horizontal



Vertical

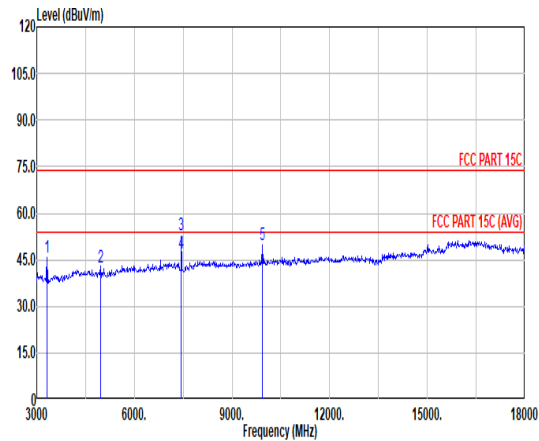Peak
Avg





	Limit				Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	3315.00	45.65	87.17	-41.52	66.90	32.47	7.83	61.55	0.00	---	---	Peak
2	4960.00	42.52	74.00	-31.48	59.89	34.18	9.61	61.16	0.00	---	---	PEAK
3	7440.00	52.82	74.00	-21.18	66.37	35.70	11.77	61.02	0.00	100		240 Peak
4	7440.00	47.12	54.00	-6.88	60.67	35.70	11.77	61.02	0.00	100		240 Average
5	9930.00	49.67	87.17	-37.50	59.80	37.36	13.79	61.28	0.00	---	---	Peak

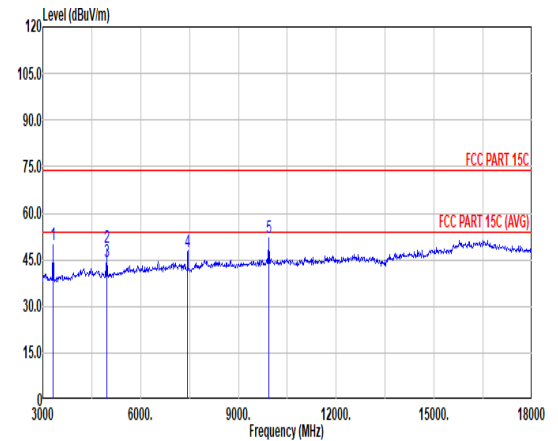

	Limit				Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	3315.00	49.87	86.96	-37.09	71.12	32.47	7.83	61.55	0.00	---	---	Peak
2	4960.00	49.07	74.00	-24.93	66.44	34.18	9.61	61.16	0.00	319	170	PEAK
3	4960.00	44.60	54.00	-9.40	61.97	34.18	9.61	61.16	0.00	319	170	AVERAGE
4	7440.00	47.53	74.00	-26.47	61.08	35.70	11.77	61.02	0.00	---	---	PEAK
5	9930.00	52.02	86.96	-34.94	62.15	37.36	13.79	61.28	0.00	---	---	Peak

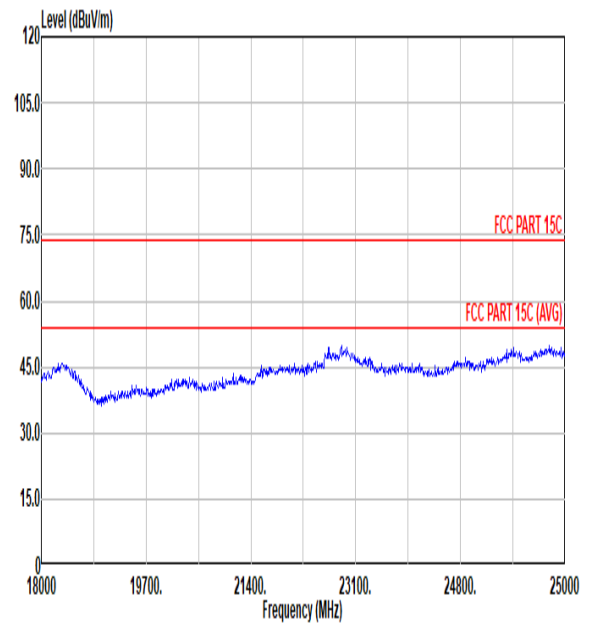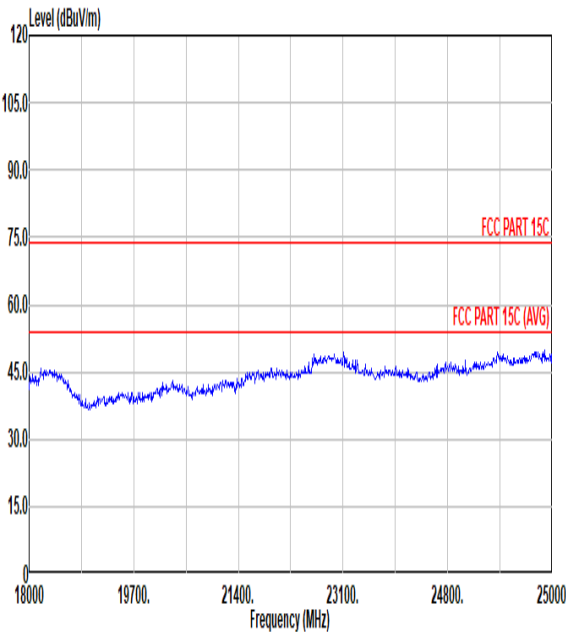Peak
Avg

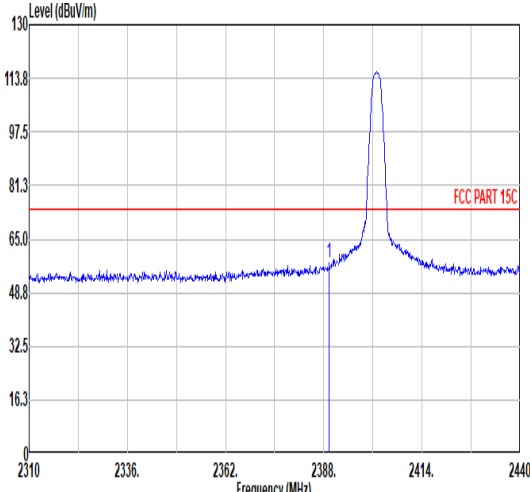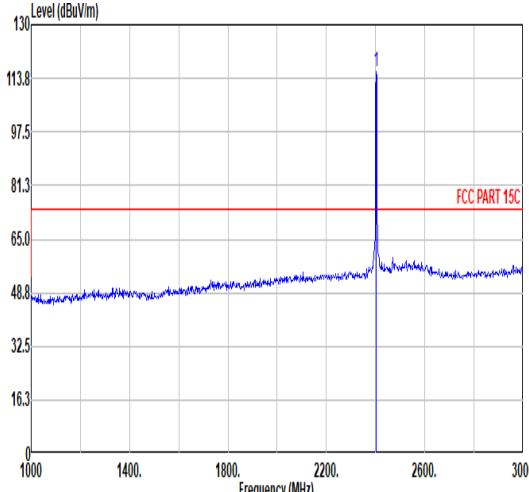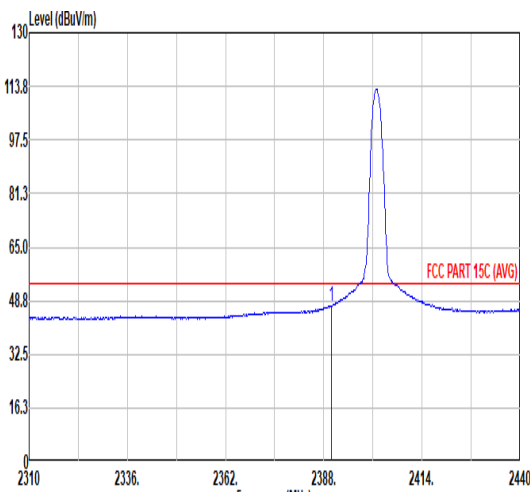
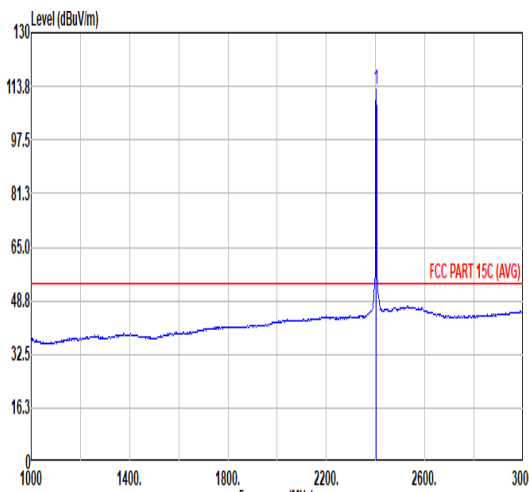


		4																																																																																																										
Mode		Band Edge																																																																																																										
		2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																										
Pol.		Horizontal										Fundamental																																																																																																
Peak																																																																																																												
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>57.83</td><td>74.00</td><td>-16.17</td><td>45.36</td><td>32.05</td><td>6.60</td><td>32.18</td><td>6.00</td><td>100</td><td>334</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	57.83	74.00	-16.17	45.36	32.05	6.60	32.18	6.00	100	334	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>115.56</td><td>-----</td><td>-----</td><td>102.91</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>100</td><td>334</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	115.56	-----	-----	102.91	32.21	6.62	32.18	6.00	100	334
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2389.43	57.83	74.00	-16.17	45.36	32.05	6.60	32.18	6.00	100	334	PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2402.00	115.56	-----	-----	102.91	32.21	6.62	32.18	6.00	100	334	PEAK																																																																																																
Avg																																																																																																												
		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>47.17</td><td>54.00</td><td>-6.83</td><td>34.69</td><td>32.06</td><td>6.60</td><td>32.18</td><td>6.00</td><td>100</td><td>334</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.17	54.00	-6.83	34.69	32.06	6.60	32.18	6.00	100	334	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>112.88</td><td>-----</td><td>-----</td><td>100.23</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>100</td><td>334</td><td>AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	112.88	-----	-----	100.23	32.21	6.62	32.18	6.00	100	334
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2389.95	47.17	54.00	-6.83	34.69	32.06	6.60	32.18	6.00	100	334	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2402.00	112.88	-----	-----	100.23	32.21	6.62	32.18	6.00	100	334	AVERAGE																																																																																																







Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>58.11</td><td>74.00</td><td>-15.89</td><td>45.63</td><td>32.06</td><td>6.60</td><td>32.18</td><td>6.00</td><td>357</td><td>258</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	58.11	74.00	-15.89	45.63	32.06	6.60	32.18	6.00	357	258	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>116.28</td><td>-----</td><td>-----</td><td>103.63</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>357</td><td>258</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	116.28	-----	-----	103.63	32.21	6.62	32.18	6.00	357	258	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	58.11	74.00	-15.89	45.63	32.06	6.60	32.18	6.00	357	258	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	116.28	-----	-----	103.63	32.21	6.62	32.18	6.00	357	258	PEAK																																																																																								
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>46.74</td><td>54.00</td><td>-7.26</td><td>34.26</td><td>32.06</td><td>6.60</td><td>32.18</td><td>6.00</td><td>357</td><td>258</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.74	54.00	-7.26	34.26	32.06	6.60	32.18	6.00	357	258	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>113.41</td><td>-----</td><td>-----</td><td>100.76</td><td>32.21</td><td>6.62</td><td>32.18</td><td>6.00</td><td>357</td><td>258</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	113.41	-----	-----	100.76	32.21	6.62	32.18	6.00	357	258	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	46.74	54.00	-7.26	34.26	32.06	6.60	32.18	6.00	357	258	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	113.41	-----	-----	100.76	32.21	6.62	32.18	6.00	357	258	AVERAGE																																																																																								

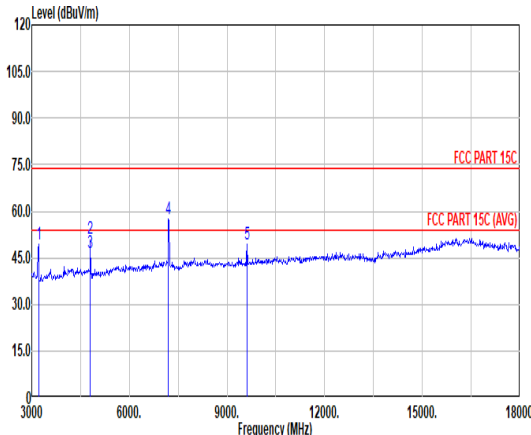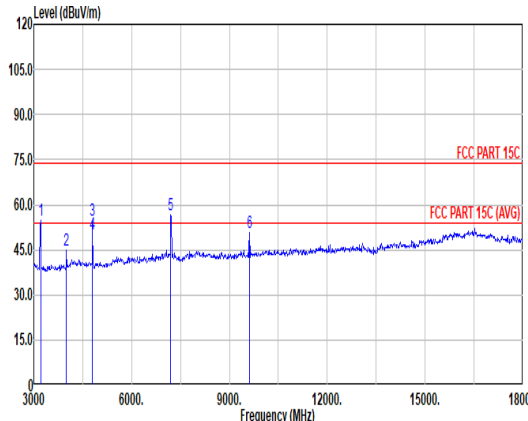

Mode	4																																																																																																																																																																																																			
	Harmonic																																																																																																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																																																		
Peak Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>49.38</td><td>93.06</td><td>-43.68</td><td>70.90</td><td>32.48</td><td>7.69</td><td>61.69</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4804.00</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>69.03</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>107</td><td>38 PEAK</td></tr><tr><td>3</td><td>4804.00</td><td>46.71</td><td>54.00</td><td>-7.29</td><td>64.35</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>107</td><td>38 AVERAGE</td></tr><tr><td>4</td><td>7200.00</td><td>57.39</td><td>93.06</td><td>-35.67</td><td>70.62</td><td>35.60</td><td>11.65</td><td>60.48</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>9615.00</td><td>49.34</td><td>93.06</td><td>-43.72</td><td>60.05</td><td>36.90</td><td>13.56</td><td>61.17</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3210.00	49.38	93.06	-43.68	70.90	32.48	7.69	61.69	0.00	---	Peak	2	4804.00	51.39	74.00	-22.61	69.03	34.20	9.44	61.28	0.00	107	38 PEAK	3	4804.00	46.71	54.00	-7.29	64.35	34.20	9.44	61.28	0.00	107	38 AVERAGE	4	7200.00	57.39	93.06	-35.67	70.62	35.60	11.65	60.48	0.00	---	Peak	5	9615.00	49.34	93.06	-43.72	60.05	36.90	13.56	61.17	0.00	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3210.00</td><td>54.75</td><td>94.97</td><td>-40.22</td><td>76.27</td><td>32.48</td><td>7.69</td><td>61.69</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4805.00</td><td>44.73</td><td>74.00</td><td>-29.27</td><td>63.73</td><td>34.14</td><td>8.63</td><td>61.77</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>4804.00</td><td>54.70</td><td>74.00</td><td>-19.30</td><td>72.34</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>366</td><td>307 PEAK</td></tr><tr><td>4</td><td>4804.00</td><td>50.19</td><td>54.00</td><td>-3.81</td><td>67.83</td><td>34.20</td><td>9.44</td><td>61.28</td><td>0.00</td><td>366</td><td>307 AVERAGE</td></tr><tr><td>5</td><td>7200.00</td><td>56.55</td><td>94.97</td><td>-38.42</td><td>69.78</td><td>35.60</td><td>11.65</td><td>60.48</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>9615.00</td><td>50.66</td><td>94.97</td><td>-44.31</td><td>61.37</td><td>36.90</td><td>13.56</td><td>61.17</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3210.00	54.75	94.97	-40.22	76.27	32.48	7.69	61.69	0.00	---	Peak	2	4805.00	44.73	74.00	-29.27	63.73	34.14	8.63	61.77	0.00	---	Peak	3	4804.00	54.70	74.00	-19.30	72.34	34.20	9.44	61.28	0.00	366	307 PEAK	4	4804.00	50.19	54.00	-3.81	67.83	34.20	9.44	61.28	0.00	366	307 AVERAGE	5	7200.00	56.55	94.97	-38.42	69.78	35.60	11.65	60.48	0.00	---	Peak	6	9615.00	50.66	94.97	-44.31	61.37	36.90	13.56	61.17	0.00	---	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																										
1	3210.00	49.38	93.06	-43.68	70.90	32.48	7.69	61.69	0.00	---	Peak																																																																																																																																																																																									
2	4804.00	51.39	74.00	-22.61	69.03	34.20	9.44	61.28	0.00	107	38 PEAK																																																																																																																																																																																									
3	4804.00	46.71	54.00	-7.29	64.35	34.20	9.44	61.28	0.00	107	38 AVERAGE																																																																																																																																																																																									
4	7200.00	57.39	93.06	-35.67	70.62	35.60	11.65	60.48	0.00	---	Peak																																																																																																																																																																																									
5	9615.00	49.34	93.06	-43.72	60.05	36.90	13.56	61.17	0.00	---	Peak																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																										
1	3210.00	54.75	94.97	-40.22	76.27	32.48	7.69	61.69	0.00	---	Peak																																																																																																																																																																																									
2	4805.00	44.73	74.00	-29.27	63.73	34.14	8.63	61.77	0.00	---	Peak																																																																																																																																																																																									
3	4804.00	54.70	74.00	-19.30	72.34	34.20	9.44	61.28	0.00	366	307 PEAK																																																																																																																																																																																									
4	4804.00	50.19	54.00	-3.81	67.83	34.20	9.44	61.28	0.00	366	307 AVERAGE																																																																																																																																																																																									
5	7200.00	56.55	94.97	-38.42	69.78	35.60	11.65	60.48	0.00	---	Peak																																																																																																																																																																																									
6	9615.00	50.66	94.97	-44.31	61.37	36.90	13.56	61.17	0.00	---	Peak																																																																																																																																																																																									

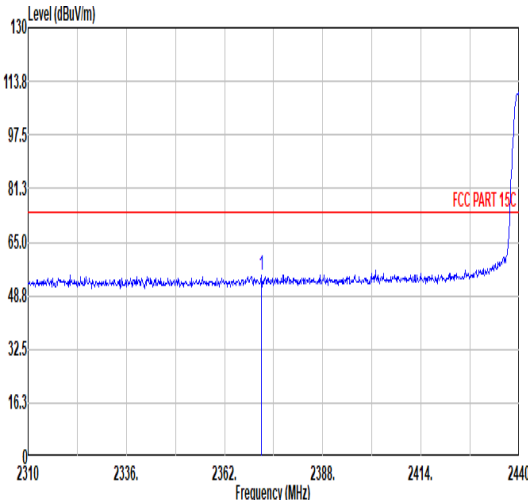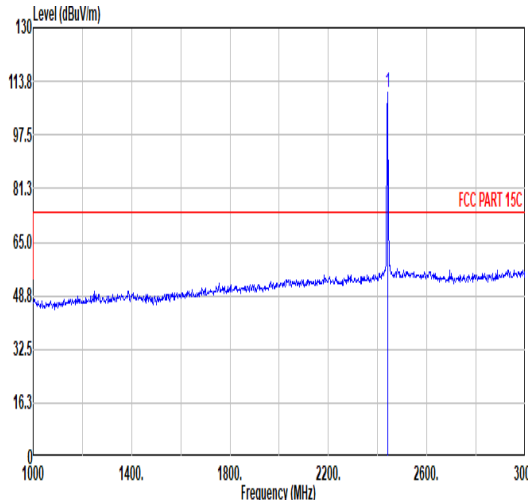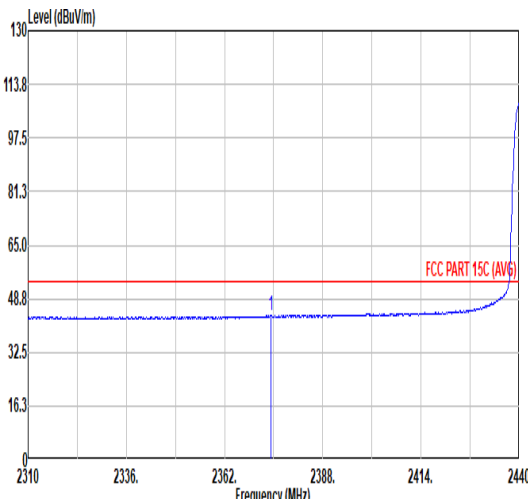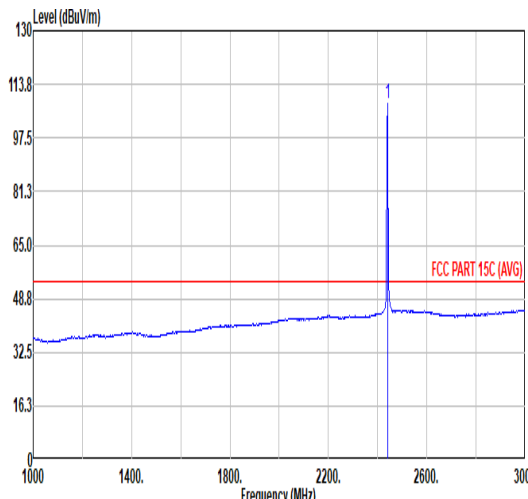

Mode	5																																																				
	Band Edge - L																																																				
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																				
Pol.	Horizontal						Fundamental																																														
Peak																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2371.75</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>42.93</td><td>31.00</td><td>6.58</td><td>32.19</td><td>6.00</td><td>107</td><td>350 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2371.75	55.12	74.00	-18.88	42.93	31.00	6.58	32.19	6.00	107
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2371.75	55.12	74.00	-18.88	42.93	31.00	6.58	32.19	6.00	107	350 PEAK																																										
Peak																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>110.41</td><td>-----</td><td>-----</td><td>97.51</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>107</td><td>350 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	110.41	-----	-----	97.51	32.44	6.67	32.21	6.00	107
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2440.00	110.41	-----	-----	97.51	32.44	6.67	32.21	6.00	107	350 PEAK																																										
Avg																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2374.22</td><td>43.74</td><td>54.00</td><td>-10.26</td><td>31.51</td><td>31.84</td><td>6.58</td><td>32.19</td><td>6.00</td><td>107</td><td>350 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2374.22	43.74	54.00	-10.26	31.51	31.84	6.58	32.19	6.00	107
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2374.22	43.74	54.00	-10.26	31.51	31.84	6.58	32.19	6.00	107	350 AVERAGE																																										
Avg																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>107.73</td><td>-----</td><td>-----</td><td>94.83</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>107</td><td>350 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	107.73	-----	-----	94.83	32.44	6.67	32.21	6.00	107
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2440.00	107.73	-----	-----	94.83	32.44	6.67	32.21	6.00	107	350 AVERAGE																																										



Mode	5																																																					
	Band Edge - R																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																					
Pol.	Horizontal					Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.80</td><td>57.11</td><td>74.00</td><td>-16.89</td><td>43.84</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>107</td><td>350</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.80	57.11	74.00	-16.89	43.84	32.77	6.73	32.23	6.00	107	350	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.80	57.11	74.00	-16.89	43.84	32.77	6.73	32.23	6.00	107	350	PEAK																																										
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2496.82</td><td>44.99</td><td>54.00</td><td>-9.01</td><td>31.61</td><td>32.87</td><td>6.75</td><td>32.24</td><td>6.00</td><td>107</td><td>350</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.82	44.99	54.00	-9.01	31.61	32.87	6.75	32.24	6.00	107	350	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2496.82	44.99	54.00	-9.01	31.61	32.87	6.75	32.24	6.00	107	350	AVERAGE																																										



Mode	5																																																										
	Band Edge - L																																																										
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																										
Pol.	Vertical						Fundamental																																																				
Peak																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2347.70</td><td>54.91</td><td>74.00</td><td>-19.09</td><td>43.05</td><td>31.52</td><td>6.54</td><td>32.20</td><td>6.00</td><td>172</td><td>116 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2347.70	54.91	74.00	-19.09	43.05	31.52	6.54	32.20	6.00	172
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2347.70	54.91	74.00	-19.09	43.05	31.52	6.54	32.20	6.00	172	116 PEAK																																																
Fundamental																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>111.66</td><td>-----</td><td>-----</td><td>98.76</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>172</td><td>116 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	111.66	-----	-----	98.76	32.44	6.67	32.21	6.00	172
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2440.00	111.66	-----	-----	98.76	32.44	6.67	32.21	6.00	172	116 PEAK																																																
Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2380.46</td><td>43.69</td><td>54.00</td><td>-10.31</td><td>31.36</td><td>31.93</td><td>6.59</td><td>32.19</td><td>6.00</td><td>172</td><td>116 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2380.46	43.69	54.00	-10.31	31.36	31.93	6.59	32.19	6.00	172
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2380.46	43.69	54.00	-10.31	31.36	31.93	6.59	32.19	6.00	172	116 AVERAGE																																																
Fundamental																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="3">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2440.00</td><td>108.88</td><td>-----</td><td>-----</td><td>95.98</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>172</td><td>116 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos				Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2440.00	108.88	-----	-----	95.98	32.44	6.67	32.21	6.00	172
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	2440.00	108.88	-----	-----	95.98	32.44	6.67	32.21	6.00	172	116 AVERAGE																																																







Mode	5																																																						
	Band Edge - R																																																						
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																						
Pol.	Vertical										Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.66</td><td>56.78</td><td>74.00</td><td>-17.22</td><td>43.48</td><td>32.79</td><td>6.74</td><td>32.23</td><td>6.00</td><td>172</td><td>116</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.66	56.78	74.00	-17.22	43.48	32.79	6.74	32.23	6.00	172	116	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2485.66	56.78	74.00	-17.22	43.48	32.79	6.74	32.23	6.00	172	116	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.80</td><td>45.17</td><td>54.00</td><td>-8.83</td><td>31.77</td><td>32.89</td><td>6.75</td><td>32.24</td><td>6.00</td><td>172</td><td>116</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.80	45.17	54.00	-8.83	31.77	32.89	6.75	32.24	6.00	172	116	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2498.80	45.17	54.00	-8.83	31.77	32.89	6.75	32.24	6.00	172	116	AVERAGE																																											



Mode	5																																																																																																																																																																																																												
	Harmonic																																																																																																																																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																																																																																						
Peak Avg																																																																																																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>3255.00</td><td>46.38</td><td>86.66</td><td>-40.28</td><td>67.85</td><td>32.41</td><td>7.75</td><td>61.63</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>43.36</td><td>74.00</td><td>-30.64</td><td>60.85</td><td>34.20</td><td>9.53</td><td>61.22</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7320.00</td><td>51.93</td><td>74.00</td><td>-22.07</td><td>65.31</td><td>35.68</td><td>11.69</td><td>60.75</td><td>0.00</td><td>106</td><td>312 PEAK</td></tr><tr><td>4</td><td>7320.00</td><td>45.75</td><td>54.00</td><td>-8.25</td><td>59.13</td><td>35.67</td><td>11.69</td><td>60.74</td><td>0.00</td><td>106</td><td>312 AVERAGE</td></tr><tr><td>5</td><td>9765.00</td><td>49.66</td><td>86.66</td><td>-37.00</td><td>60.17</td><td>37.13</td><td>13.59</td><td>61.23</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3255.00	46.38	86.66	-40.28	67.85	32.41	7.75	61.63	0.00	---	Peak	2	4880.00	43.36	74.00	-30.64	60.85	34.20	9.53	61.22	0.00	---	PEAK	3	7320.00	51.93	74.00	-22.07	65.31	35.68	11.69	60.75	0.00	106	312 PEAK	4	7320.00	45.75	54.00	-8.25	59.13	35.67	11.69	60.74	0.00	106	312 AVERAGE	5	9765.00	49.66	86.66	-37.00	60.17	37.13	13.59	61.23	0.00	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>3255.00</td><td>50.04</td><td>88.25</td><td>-38.21</td><td>71.51</td><td>32.41</td><td>7.75</td><td>61.63</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4880.00</td><td>47.22</td><td>74.00</td><td>-26.78</td><td>64.71</td><td>34.20</td><td>9.53</td><td>61.22</td><td>0.00</td><td>300</td><td>0 PEAK</td></tr><tr><td>3</td><td>4880.00</td><td>39.97</td><td>54.00</td><td>-14.03</td><td>57.46</td><td>34.20</td><td>9.53</td><td>61.22</td><td>0.00</td><td>300</td><td>0 AVERAGE</td></tr><tr><td>4</td><td>7320.00</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>65.68</td><td>35.68</td><td>11.69</td><td>60.75</td><td>0.00</td><td>317</td><td>281 PEAK</td></tr><tr><td>5</td><td>7320.00</td><td>46.17</td><td>54.00</td><td>-7.83</td><td>59.55</td><td>35.67</td><td>11.69</td><td>60.74</td><td>0.00</td><td>317</td><td>281 AVERAGE</td></tr><tr><td>6</td><td>9765.00</td><td>50.73</td><td>88.25</td><td>-37.52</td><td>61.24</td><td>37.13</td><td>13.59</td><td>61.23</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3255.00	50.04	88.25	-38.21	71.51	32.41	7.75	61.63	0.00	---	Peak	2	4880.00	47.22	74.00	-26.78	64.71	34.20	9.53	61.22	0.00	300	0 PEAK	3	4880.00	39.97	54.00	-14.03	57.46	34.20	9.53	61.22	0.00	300	0 AVERAGE	4	7320.00	52.30	74.00	-21.70	65.68	35.68	11.69	60.75	0.00	317	281 PEAK	5	7320.00	46.17	54.00	-7.83	59.55	35.67	11.69	60.74	0.00	317	281 AVERAGE	6	9765.00	50.73	88.25	-37.52	61.24	37.13	13.59	61.23	0.00	---
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																			
1	3255.00	46.38	86.66	-40.28	67.85	32.41	7.75	61.63	0.00	---	Peak																																																																																																																																																																																																		
2	4880.00	43.36	74.00	-30.64	60.85	34.20	9.53	61.22	0.00	---	PEAK																																																																																																																																																																																																		
3	7320.00	51.93	74.00	-22.07	65.31	35.68	11.69	60.75	0.00	106	312 PEAK																																																																																																																																																																																																		
4	7320.00	45.75	54.00	-8.25	59.13	35.67	11.69	60.74	0.00	106	312 AVERAGE																																																																																																																																																																																																		
5	9765.00	49.66	86.66	-37.00	60.17	37.13	13.59	61.23	0.00	---	Peak																																																																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																			
1	3255.00	50.04	88.25	-38.21	71.51	32.41	7.75	61.63	0.00	---	Peak																																																																																																																																																																																																		
2	4880.00	47.22	74.00	-26.78	64.71	34.20	9.53	61.22	0.00	300	0 PEAK																																																																																																																																																																																																		
3	4880.00	39.97	54.00	-14.03	57.46	34.20	9.53	61.22	0.00	300	0 AVERAGE																																																																																																																																																																																																		
4	7320.00	52.30	74.00	-21.70	65.68	35.68	11.69	60.75	0.00	317	281 PEAK																																																																																																																																																																																																		
5	7320.00	46.17	54.00	-7.83	59.55	35.67	11.69	60.74	0.00	317	281 AVERAGE																																																																																																																																																																																																		
6	9765.00	50.73	88.25	-37.52	61.24	37.13	13.59	61.23	0.00	---	Peak																																																																																																																																																																																																		

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	3255.00	50.04	88.25	-38.21	71.51	32.41	7.75	61.63	0.00	---	Peak
2	4880.00	47.22	74.00	-26.78	64.71	34.20	9.53	61.22	0.00	300	0 PEAK
3	4880.00	39.97	54.00	-14.03	57.46	34.20	9.53	61.22	0.00	300	0 AVERAGE
4	7320.00	52.30	74.00	-21.70	65.68	35.68	11.69	60.75	0.00	317	281 PEAK
5	7320.00	46.17	54.00	-7.83	59.55	35.67	11.69	60.74	0.00	317	281 AVERAGE
6	9765.00	50.73	88.25	-37.52	61.24	37.13	13.59	61.23	0.00	---	Peak

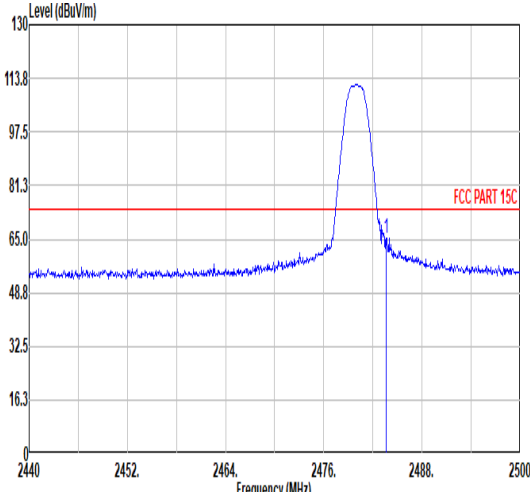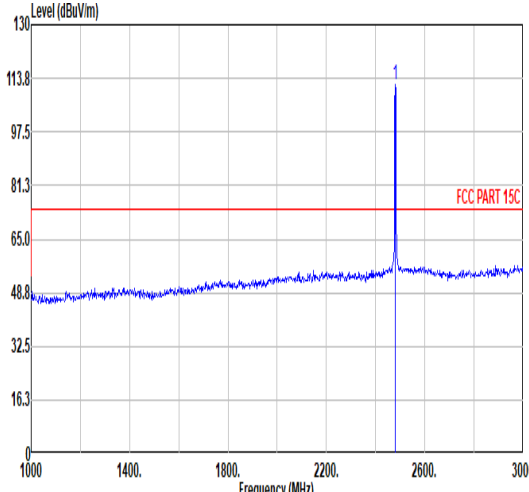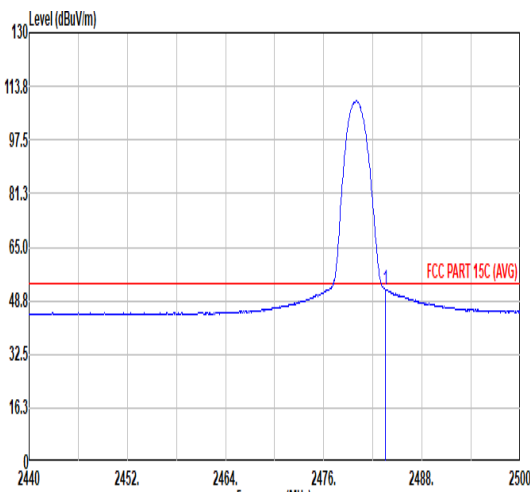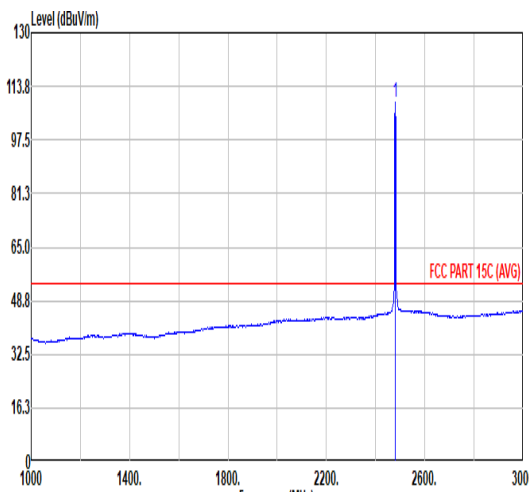

Mode	6																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>65.41</td><td>74.00</td><td>-8.59</td><td>52.14</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>105</td><td>319</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	65.41	74.00	-8.59	52.14	32.77	6.73	32.23	6.00	105	319	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>111.89</td><td>-----</td><td>-----</td><td>98.65</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>105</td><td>319</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	111.89	-----	-----	98.65	32.74	6.73	32.23	6.00	105	319
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.62	65.41	74.00	-8.59	52.14	32.77	6.73	32.23	6.00	105	319	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	111.89	-----	-----	98.65	32.74	6.73	32.23	6.00	105	319	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>52.22</td><td>54.00</td><td>-1.78</td><td>38.95</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>105</td><td>319</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.22	54.00	-1.78	38.95	32.77	6.73	32.23	6.00	105	319	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>109.06</td><td>-----</td><td>-----</td><td>95.82</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>105</td><td>319</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	109.06	-----	-----	95.82	32.74	6.73	32.23	6.00	105	319
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	52.22	54.00	-1.78	38.95	32.77	6.73	32.23	6.00	105	319	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	109.06	-----	-----	95.82	32.74	6.73	32.23	6.00	105	319	AVERAGE																																																																																							



		6																																																				
Mode		Band Edge																																																				
		2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																				
Pol.		Vertical					Fundamental																																															
Peak																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>66.45</td><td>74.00</td><td>-7.55</td><td>53.18</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>135</td><td>237</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	66.45	74.00	-7.55	53.18	32.77	6.73	32.23	6.00	135	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.56	66.45	74.00	-7.55	53.18	32.77	6.73	32.23	6.00	135	237	PEAK																																										
Avg																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>52.22</td><td>54.00</td><td>-1.78</td><td>38.95</td><td>32.77</td><td>6.73</td><td>32.23</td><td>6.00</td><td>135</td><td>237</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	52.22	54.00	-1.78	38.95	32.77	6.73	32.23	6.00	135	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.50	52.22	54.00	-1.78	38.95	32.77	6.73	32.23	6.00	135	237	AVERAGE																																										
Peak																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>111.89</td><td>-----</td><td>-----</td><td>98.65</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>135</td><td>237</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	111.89	-----	-----	98.65	32.74	6.73	32.23	6.00	135	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2480.00	111.89	-----	-----	98.65	32.74	6.73	32.23	6.00	135	237	PEAK																																										
Avg																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>109.24</td><td>-----</td><td>-----</td><td>96.00</td><td>32.74</td><td>6.73</td><td>32.23</td><td>6.00</td><td>135</td><td>237</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	109.24	-----	-----	96.00	32.74	6.73	32.23	6.00	135	237
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2480.00	109.24	-----	-----	96.00	32.74	6.73	32.23	6.00	135	237	AVERAGE																																										



Mode	6																																																																																																																																																																																																																																																														
	Harmonic																																																																																																																																																																																																																																																														
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																																																																																																														
Pol.	Horizontal											Vertical																																																																																																																																																																																																																																																			
Peak Avg																																																																																																																																																																																																																																																															
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3315.00</td><td>48.92</td><td>85.68</td><td>-36.76</td><td>70.17</td><td>32.47</td><td>7.83</td><td>61.55</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>50.66</td><td>74.00</td><td>-23.34</td><td>68.03</td><td>34.18</td><td>9.61</td><td>61.16</td><td>0.00</td><td>106</td><td>291</td><td>PEAK</td></tr><tr><td>3</td><td>4960.00</td><td>45.58</td><td>54.00</td><td>-8.42</td><td>62.95</td><td>34.18</td><td>9.61</td><td>61.16</td><td>0.00</td><td>106</td><td>291</td><td>AVERAGE</td></tr><tr><td>4</td><td>7440.00</td><td>54.30</td><td>74.00</td><td>-19.70</td><td>67.85</td><td>35.70</td><td>11.77</td><td>61.02</td><td>0.00</td><td>101</td><td>294</td><td>PEAK</td></tr><tr><td>5</td><td>7440.00</td><td>48.81</td><td>54.00</td><td>-5.19</td><td>62.35</td><td>35.70</td><td>11.77</td><td>61.01</td><td>0.00</td><td>101</td><td>294</td><td>AVERAGE</td></tr><tr><td>6</td><td>9930.00</td><td>48.40</td><td>85.68</td><td>-37.28</td><td>58.53</td><td>37.36</td><td>13.79</td><td>61.28</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	3315.00	48.92	85.68	-36.76	70.17	32.47	7.83	61.55	0.00	---	---	Peak	2	4960.00	50.66	74.00	-23.34	68.03	34.18	9.61	61.16	0.00	106	291	PEAK	3	4960.00	45.58	54.00	-8.42	62.95	34.18	9.61	61.16	0.00	106	291	AVERAGE	4	7440.00	54.30	74.00	-19.70	67.85	35.70	11.77	61.02	0.00	101	294	PEAK	5	7440.00	48.81	54.00	-5.19	62.35	35.70	11.77	61.01	0.00	101	294	AVERAGE	6	9930.00	48.40	85.68	-37.28	58.53	37.36	13.79	61.28	0.00	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3315.00</td><td>53.07</td><td>87.77</td><td>-34.70</td><td>74.32</td><td>32.47</td><td>7.83</td><td>61.55</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>69.73</td><td>34.18</td><td>9.61</td><td>61.16</td><td>0.00</td><td>327</td><td>4</td><td>PEAK</td></tr><tr><td>3</td><td>4960.00</td><td>47.08</td><td>54.00</td><td>-6.92</td><td>64.45</td><td>34.18</td><td>9.61</td><td>61.16</td><td>0.00</td><td>327</td><td>4</td><td>AVERAGE</td></tr><tr><td>4</td><td>7440.00</td><td>54.80</td><td>74.00</td><td>-19.20</td><td>68.35</td><td>35.70</td><td>11.77</td><td>61.02</td><td>0.00</td><td>102</td><td>3</td><td>PEAK</td></tr><tr><td>5</td><td>7440.00</td><td>49.62</td><td>54.00</td><td>-4.38</td><td>63.16</td><td>35.70</td><td>11.77</td><td>61.01</td><td>0.00</td><td>102</td><td>3</td><td>AVERAGE</td></tr><tr><td>6</td><td>9930.00</td><td>52.02</td><td>87.77</td><td>-35.75</td><td>62.15</td><td>37.36</td><td>13.79</td><td>61.28</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	3315.00	53.07	87.77	-34.70	74.32	32.47	7.83	61.55	0.00	---	---	Peak	2	4960.00	52.36	74.00	-21.64	69.73	34.18	9.61	61.16	0.00	327	4	PEAK	3	4960.00	47.08	54.00	-6.92	64.45	34.18	9.61	61.16	0.00	327	4	AVERAGE	4	7440.00	54.80	74.00	-19.20	68.35	35.70	11.77	61.02	0.00	102	3	PEAK	5	7440.00	49.62	54.00	-4.38	63.16	35.70	11.77	61.01	0.00	102	3	AVERAGE	6	9930.00	52.02	87.77	-35.75	62.15	37.36	13.79	61.28	0.00	---	---
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																				
1	3315.00	48.92	85.68	-36.76	70.17	32.47	7.83	61.55	0.00	---	---	Peak																																																																																																																																																																																																																																																			
2	4960.00	50.66	74.00	-23.34	68.03	34.18	9.61	61.16	0.00	106	291	PEAK																																																																																																																																																																																																																																																			
3	4960.00	45.58	54.00	-8.42	62.95	34.18	9.61	61.16	0.00	106	291	AVERAGE																																																																																																																																																																																																																																																			
4	7440.00	54.30	74.00	-19.70	67.85	35.70	11.77	61.02	0.00	101	294	PEAK																																																																																																																																																																																																																																																			
5	7440.00	48.81	54.00	-5.19	62.35	35.70	11.77	61.01	0.00	101	294	AVERAGE																																																																																																																																																																																																																																																			
6	9930.00	48.40	85.68	-37.28	58.53	37.36	13.79	61.28	0.00	---	---	Peak																																																																																																																																																																																																																																																			
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																				
1	3315.00	53.07	87.77	-34.70	74.32	32.47	7.83	61.55	0.00	---	---	Peak																																																																																																																																																																																																																																																			
2	4960.00	52.36	74.00	-21.64	69.73	34.18	9.61	61.16	0.00	327	4	PEAK																																																																																																																																																																																																																																																			
3	4960.00	47.08	54.00	-6.92	64.45	34.18	9.61	61.16	0.00	327	4	AVERAGE																																																																																																																																																																																																																																																			
4	7440.00	54.80	74.00	-19.20	68.35	35.70	11.77	61.02	0.00	102	3	PEAK																																																																																																																																																																																																																																																			
5	7440.00	49.62	54.00	-4.38	63.16	35.70	11.77	61.01	0.00	102	3	AVERAGE																																																																																																																																																																																																																																																			
6	9930.00	52.02	87.77	-35.75	62.15	37.36	13.79	61.28	0.00	---	---	Peak																																																																																																																																																																																																																																																			




Mode	3																																																																																																																																																																														
	LF																																																																																																																																																																														
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																																																													
Peak	Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.97</td><td>26.34</td><td>-13.66</td><td>40.00</td><td>33.15</td><td>24.93</td><td>0.46</td><td>32.20</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>68.80</td><td>27.11</td><td>-12.89</td><td>40.00</td><td>46.56</td><td>12.23</td><td>0.94</td><td>32.62</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>345.25</td><td>31.82</td><td>-14.18</td><td>46.00</td><td>41.47</td><td>20.25</td><td>2.51</td><td>32.41</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>419.94</td><td>34.25</td><td>-11.75</td><td>46.00</td><td>41.34</td><td>22.60</td><td>2.76</td><td>32.45</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>849.65</td><td>37.70</td><td>-8.30</td><td>46.00</td><td>36.74</td><td>29.08</td><td>3.93</td><td>32.05</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>952.47</td><td>37.41</td><td>-8.59</td><td>46.00</td><td>33.08</td><td>31.16</td><td>4.16</td><td>30.99</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	30.97	26.34	-13.66	40.00	33.15	24.93	0.46	32.20	---	Peak	2	68.80	27.11	-12.89	40.00	46.56	12.23	0.94	32.62	---	Peak	3	345.25	31.82	-14.18	46.00	41.47	20.25	2.51	32.41	---	Peak	4	419.94	34.25	-11.75	46.00	41.34	22.60	2.76	32.45	---	Peak	5	849.65	37.70	-8.30	46.00	36.74	29.08	3.93	32.05	---	Peak	6	952.47	37.41	-8.59	46.00	33.08	31.16	4.16	30.99	---	Peak	Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>60.07</td><td>29.64</td><td>-10.36</td><td>40.00</td><td>49.36</td><td>11.93</td><td>0.84</td><td>32.49</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>148.34</td><td>31.79</td><td>-11.71</td><td>43.50</td><td>45.38</td><td>17.15</td><td>1.62</td><td>32.36</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>345.25</td><td>30.82</td><td>-15.18</td><td>46.00</td><td>40.47</td><td>20.25</td><td>2.51</td><td>32.41</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>615.88</td><td>33.59</td><td>-12.41</td><td>46.00</td><td>37.12</td><td>25.73</td><td>3.35</td><td>32.61</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>800.18</td><td>34.90</td><td>-11.10</td><td>46.00</td><td>34.60</td><td>28.76</td><td>3.82</td><td>32.28</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>942.77</td><td>35.71</td><td>-10.29</td><td>46.00</td><td>32.02</td><td>30.65</td><td>4.13</td><td>31.09</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	60.07	29.64	-10.36	40.00	49.36	11.93	0.84	32.49	---	Peak	2	148.34	31.79	-11.71	43.50	45.38	17.15	1.62	32.36	---	Peak	3	345.25	30.82	-15.18	46.00	40.47	20.25	2.51	32.41	---	Peak	4	615.88	33.59	-12.41	46.00	37.12	25.73	3.35	32.61	---	Peak	5	800.18	34.90	-11.10	46.00	34.60	28.76	3.82	32.28	---	Peak	6	942.77	35.71	-10.29	46.00	32.02	30.65	4.13	31.09	---	Peak
		Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																																																					
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																																																																																						
1	30.97	26.34	-13.66	40.00	33.15	24.93	0.46	32.20	---	Peak																																																																																																																																																																					
2	68.80	27.11	-12.89	40.00	46.56	12.23	0.94	32.62	---	Peak																																																																																																																																																																					
3	345.25	31.82	-14.18	46.00	41.47	20.25	2.51	32.41	---	Peak																																																																																																																																																																					
4	419.94	34.25	-11.75	46.00	41.34	22.60	2.76	32.45	---	Peak																																																																																																																																																																					
5	849.65	37.70	-8.30	46.00	36.74	29.08	3.93	32.05	---	Peak																																																																																																																																																																					
6	952.47	37.41	-8.59	46.00	33.08	31.16	4.16	30.99	---	Peak																																																																																																																																																																					
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																																																						
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																					
1	60.07	29.64	-10.36	40.00	49.36	11.93	0.84	32.49	---	Peak																																																																																																																																																																					
2	148.34	31.79	-11.71	43.50	45.38	17.15	1.62	32.36	---	Peak																																																																																																																																																																					
3	345.25	30.82	-15.18	46.00	40.47	20.25	2.51	32.41	---	Peak																																																																																																																																																																					
4	615.88	33.59	-12.41	46.00	37.12	25.73	3.35	32.61	---	Peak																																																																																																																																																																					
5	800.18	34.90	-11.10	46.00	34.60	28.76	3.82	32.28	---	Peak																																																																																																																																																																					
6	942.77	35.71	-10.29	46.00	32.02	30.65	4.13	31.09	---	Peak																																																																																																																																																																					

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	94.77	2.101	0.476	1kHz
Bluetooth LE 2Mbps	90.68	1.058	0.945	1kHz

Bluetooth LE 1Mbps

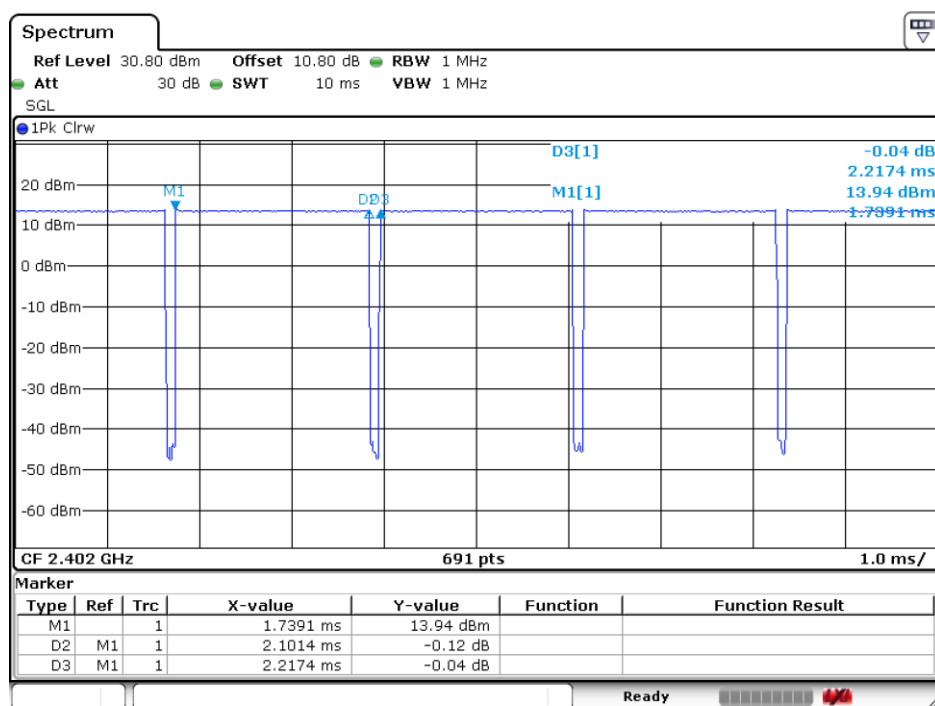



Bluetooth LE 2Mbps

