


9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

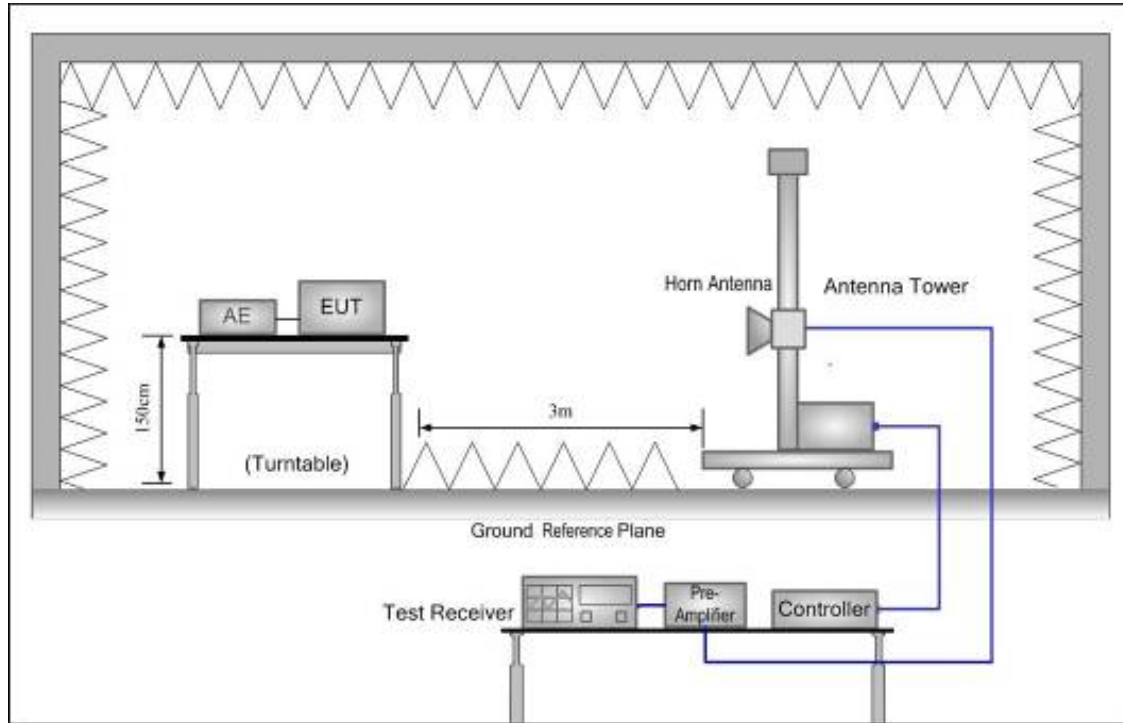

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.


9.4. Test Result

PASS. (See below detailed test data)


Test Mode: GFSK-Low Hopping-off

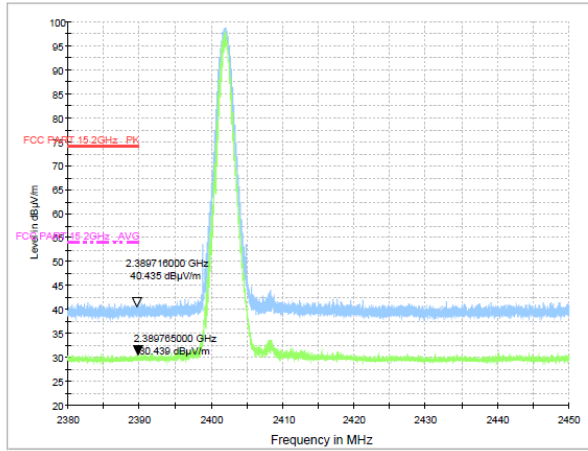


Test Mode: GFSK-High Hopping-off

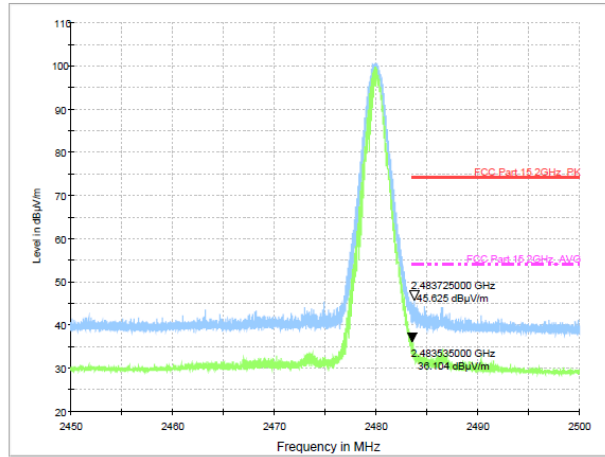

Test Mode: GFSK-Low Hopping-on

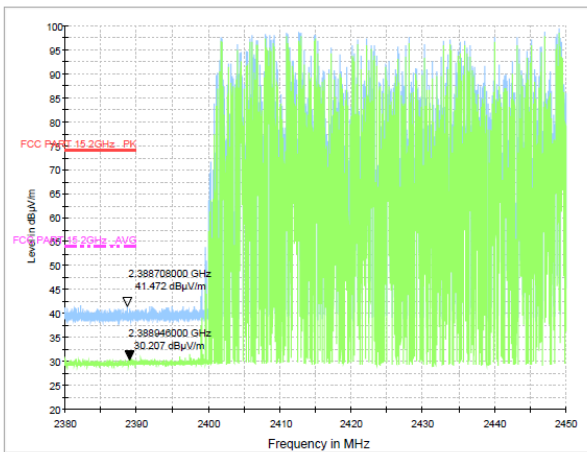


Test Mode: GFSK-High Hopping-on

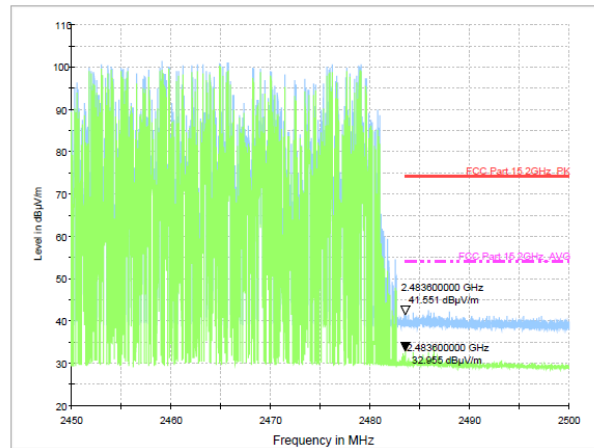


Note: 1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: $\pi/4$ DQPSK-Low Hopping-off

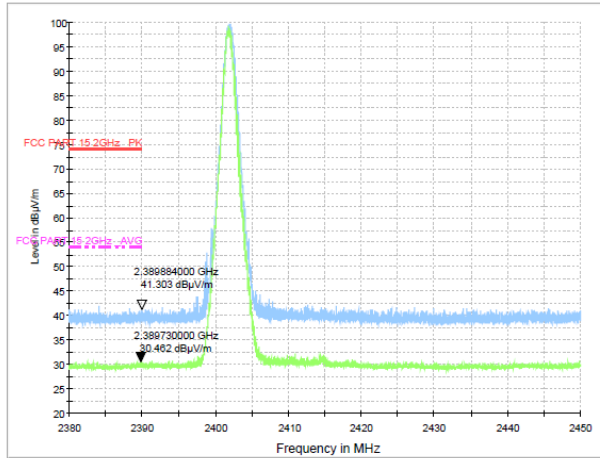


Test Mode: $\pi/4$ DQPSK-High Hopping-off

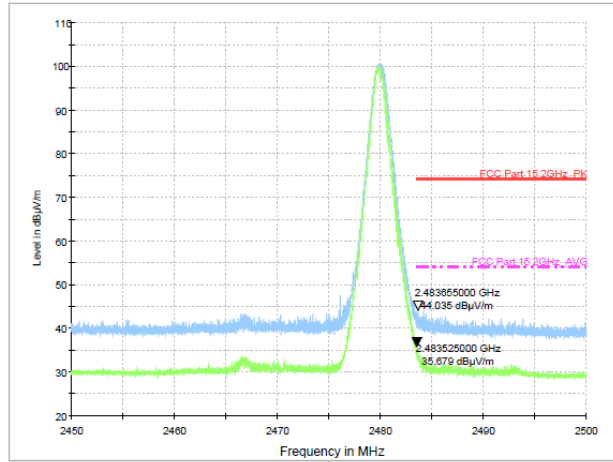

Test Mode: $\pi/4$ DQPSK-Low Hopping-on

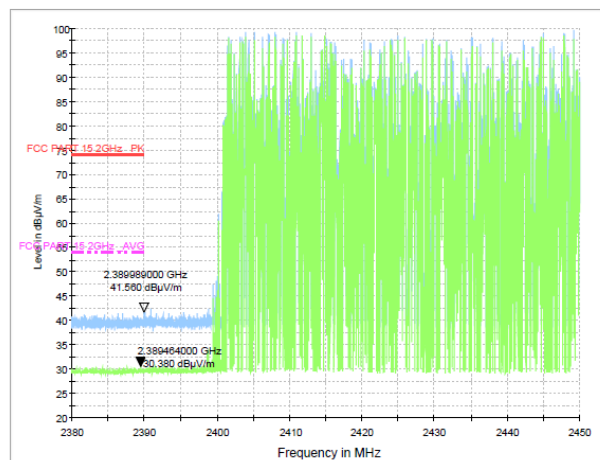


Test Mode: $\pi/4$ DQPSK-High Hopping-on

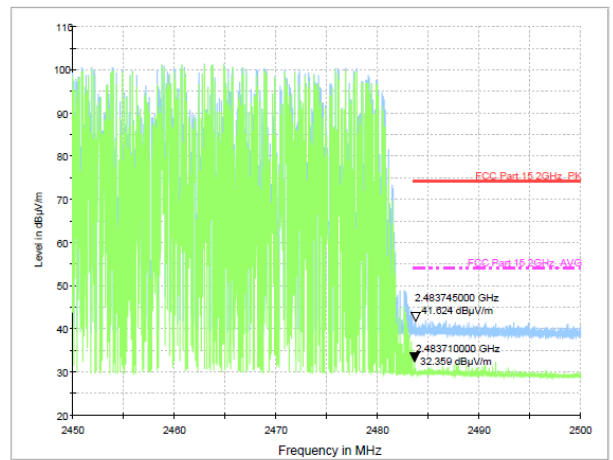


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Test Mode: 8DPSK-Low Hopping-off

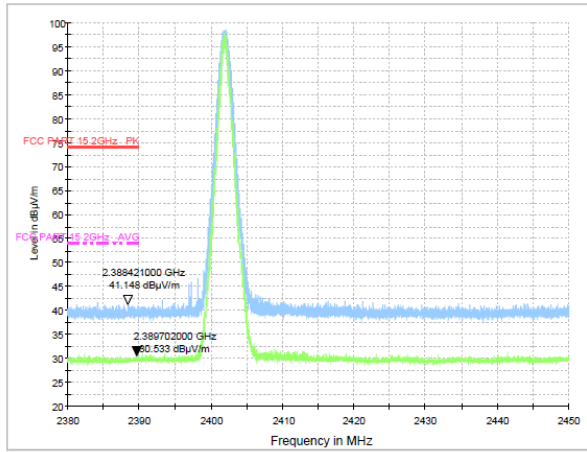


Test Mode: 8DPSK-High Hopping-off

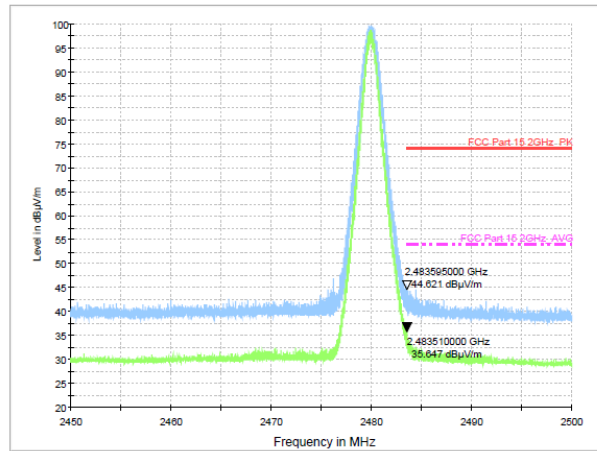

Test Mode: 8DPSK-Low Hopping-on

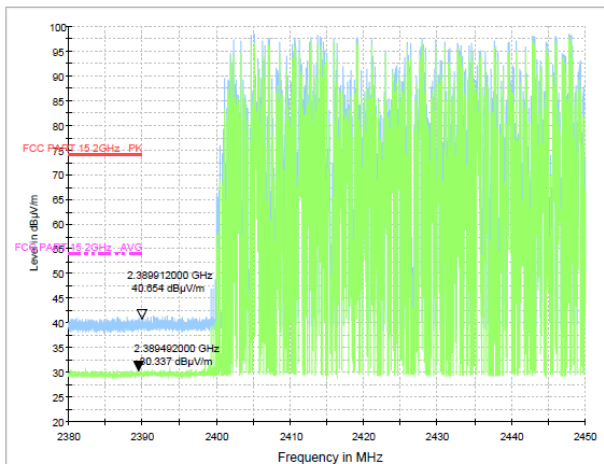


Test Mode: 8DPSK-High Hopping-on

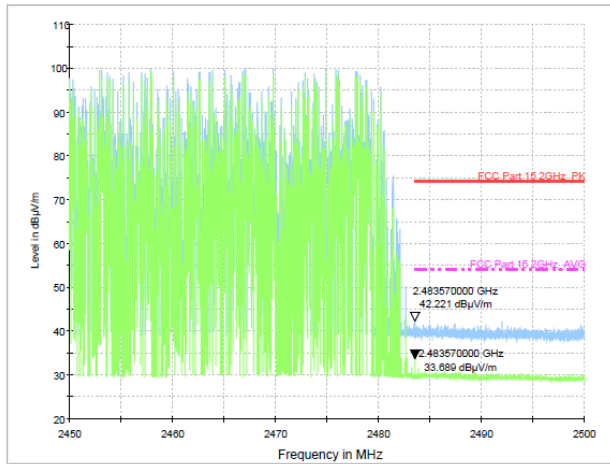


Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Conducted Method

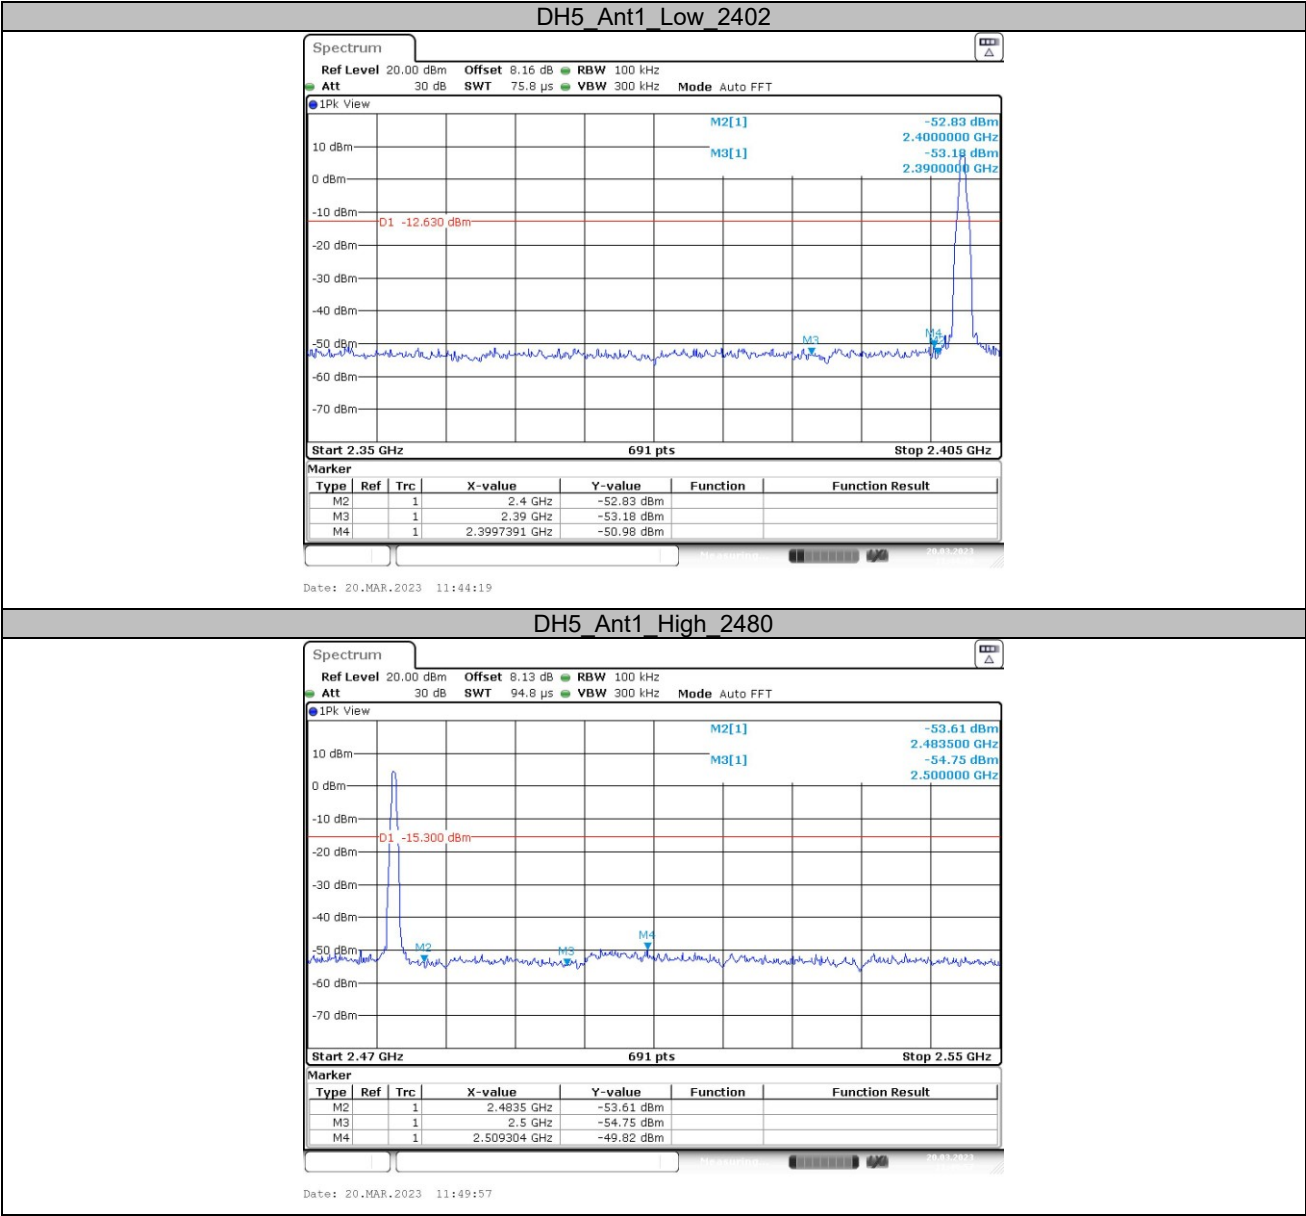


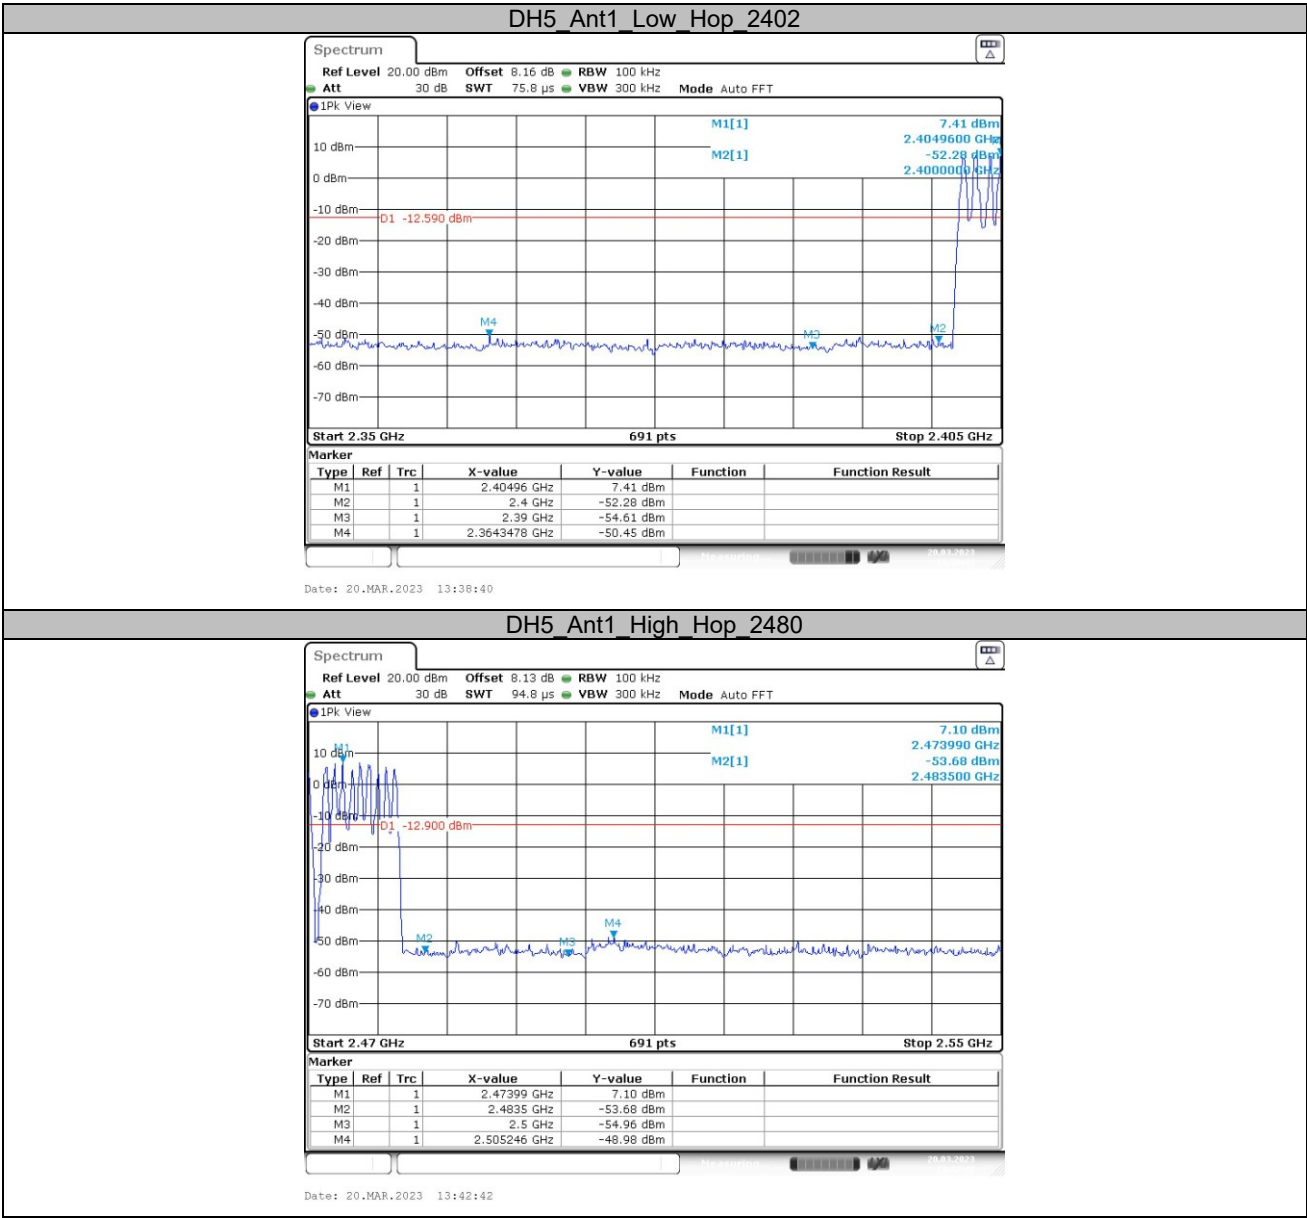


2DH5_Ant1_Low_2402

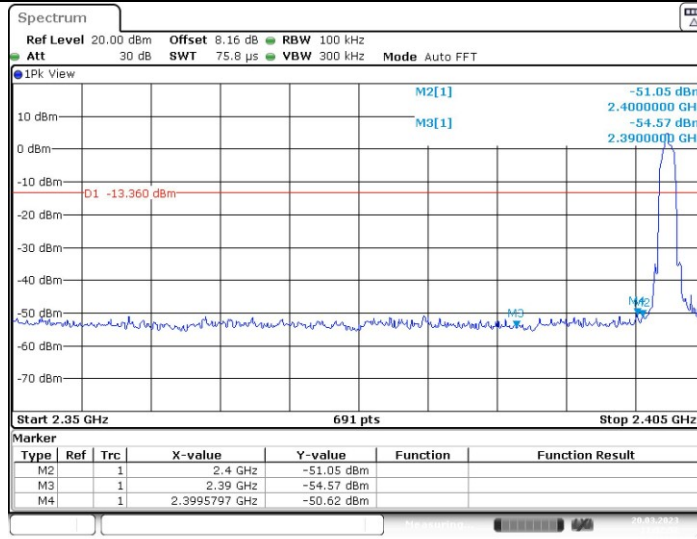


2DH5_Ant1_High_2480

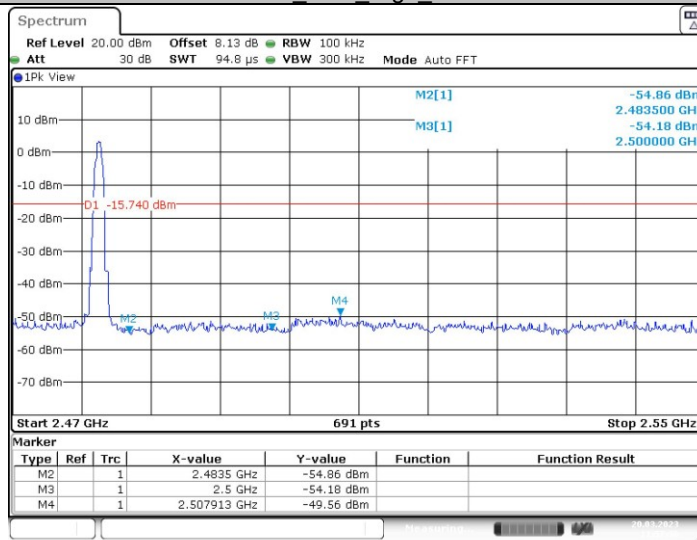


2DH5 Ant1_Low_Hop_2402

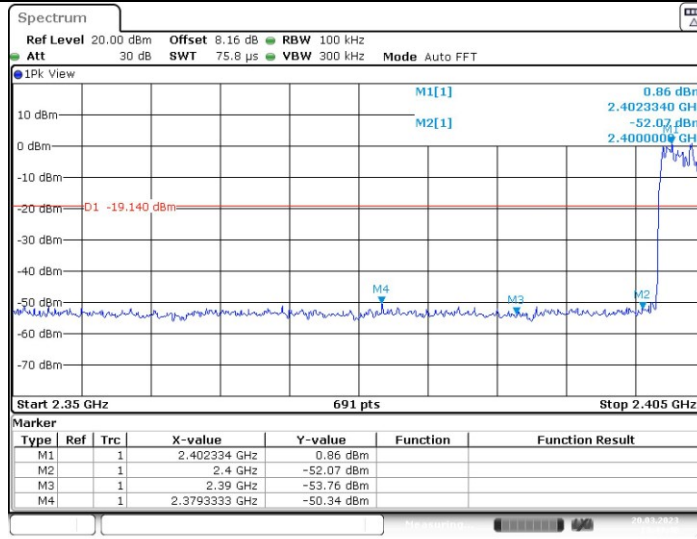


2DH5 Ant1_High_Hop_2480

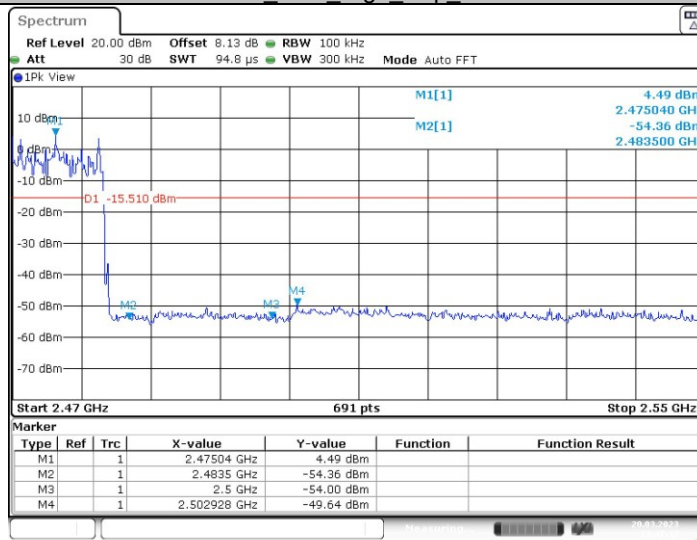


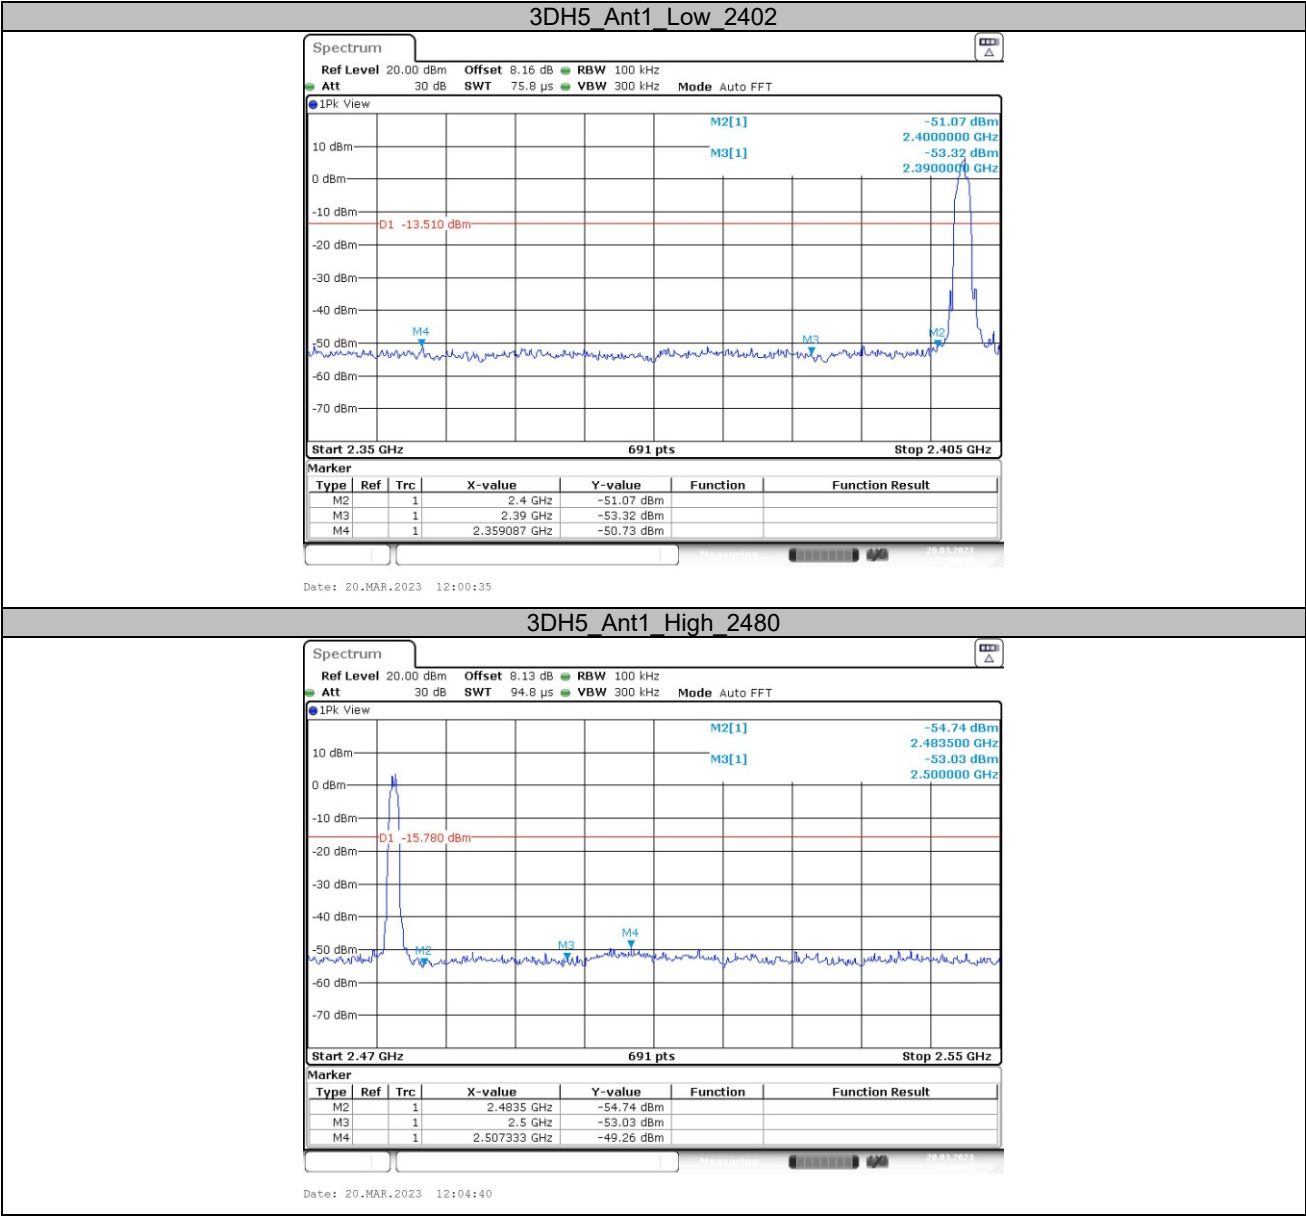

3DH5 Ant1_Low_Hop_2402

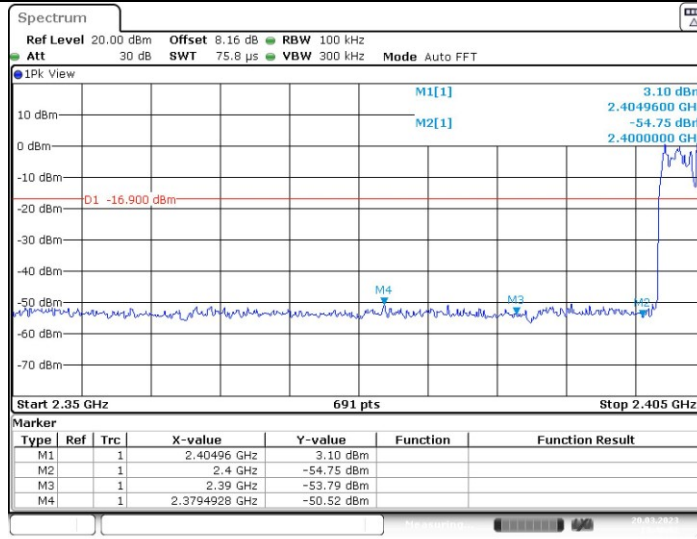


3DH5 Ant1_High_Hop_2480

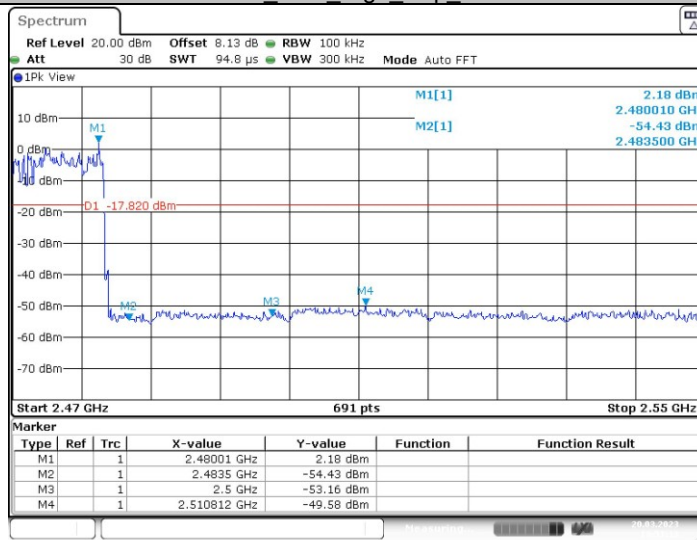

10. POWER LINE CONDUCTED EMISSIONS

10.1. Block Diagram of Test Setup

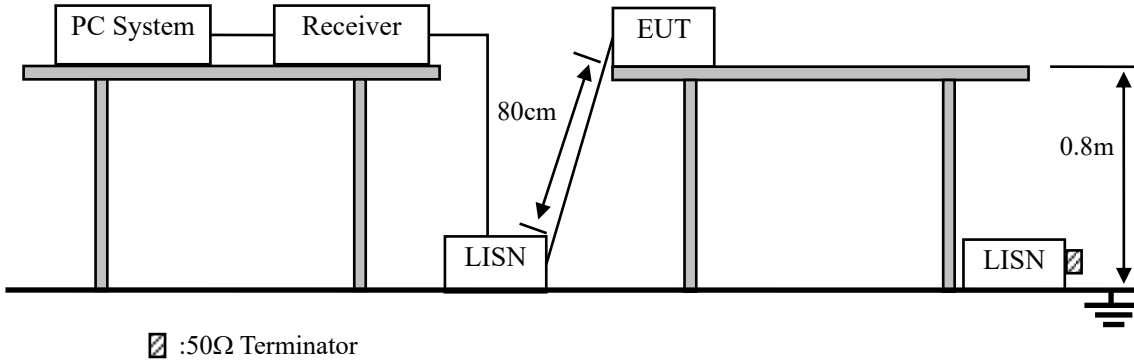

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.


10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

10.4. Test Result

Pass

Polarity: L

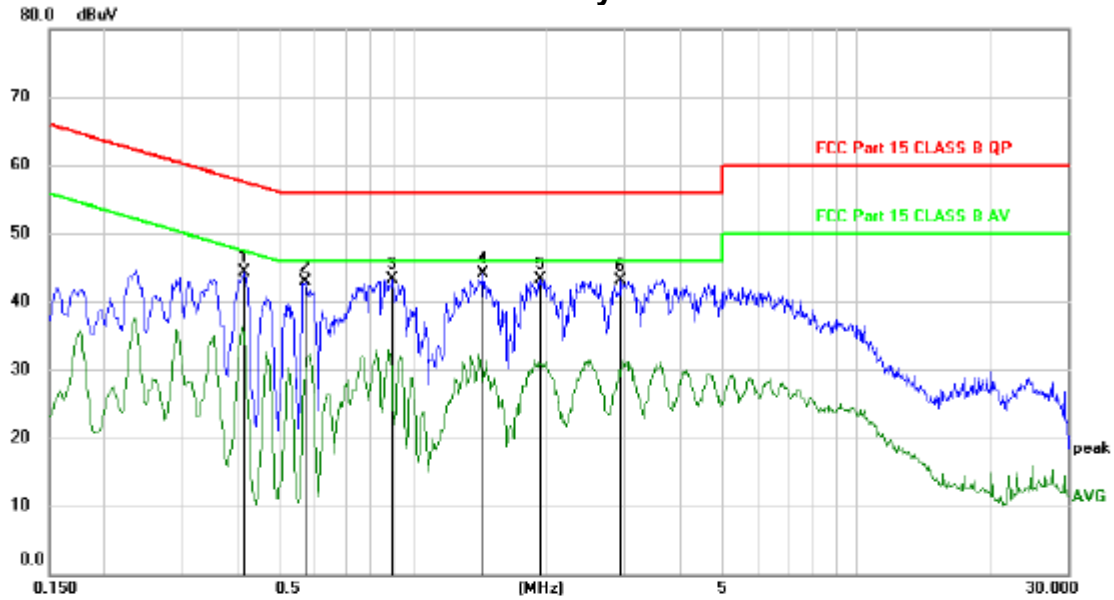


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4140	34.31	9.94	44.25	57.57	-13.32	peak	
2		0.5700	32.93	9.93	42.86	56.00	-13.14	peak	
3		0.8970	33.31	9.97	43.28	56.00	-12.72	peak	
4	*	1.4400	34.23	9.90	44.13	56.00	-11.87	peak	
5		1.9290	33.34	9.89	43.23	56.00	-12.77	peak	
6		2.9310	33.15	9.95	43.10	56.00	-12.90	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

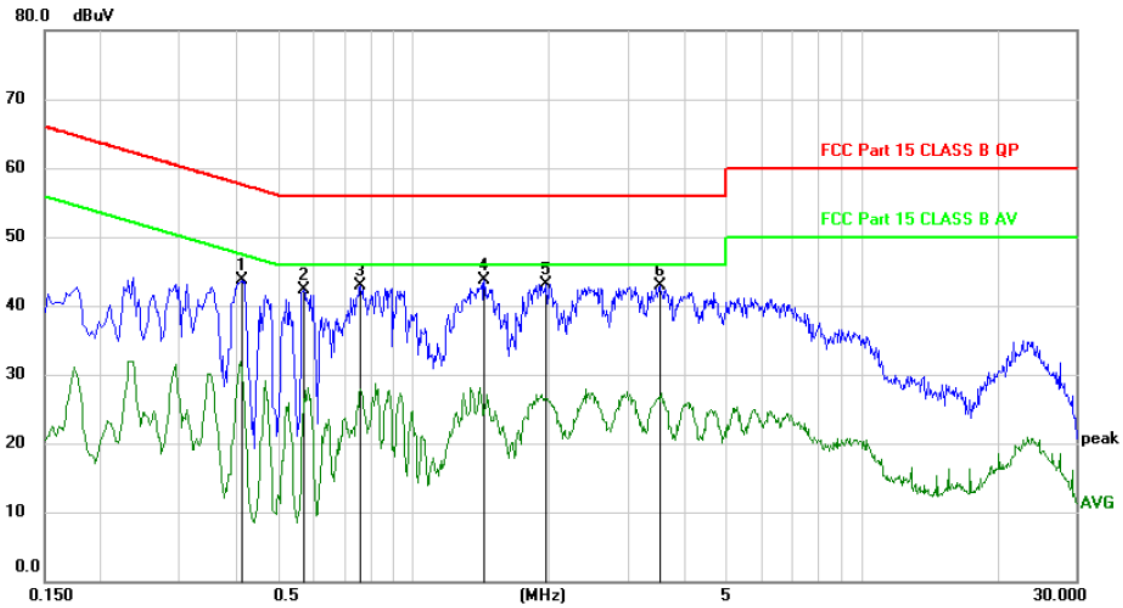Polarity: N

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4140	33.81	9.94	43.75	57.57	-13.82	peak	
2		0.5700	32.40	9.93	42.33	56.00	-13.67	peak	
3		0.7620	32.89	9.94	42.83	56.00	-13.17	peak	
4	*	1.4370	33.82	9.90	43.72	56.00	-12.28	peak	
5		1.9740	33.25	9.88	43.13	56.00	-12.87	peak	
6		3.5280	33.02	9.96	42.98	56.00	-13.02	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

11.ANTENNA REQUIREMENTS

11.1.Limit



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Result


The EUT antenna is Internal Antenna. It comply with the standard requirement.

12. TEST SETUP PHOTO

12.1.Photo of Radiated Emission test

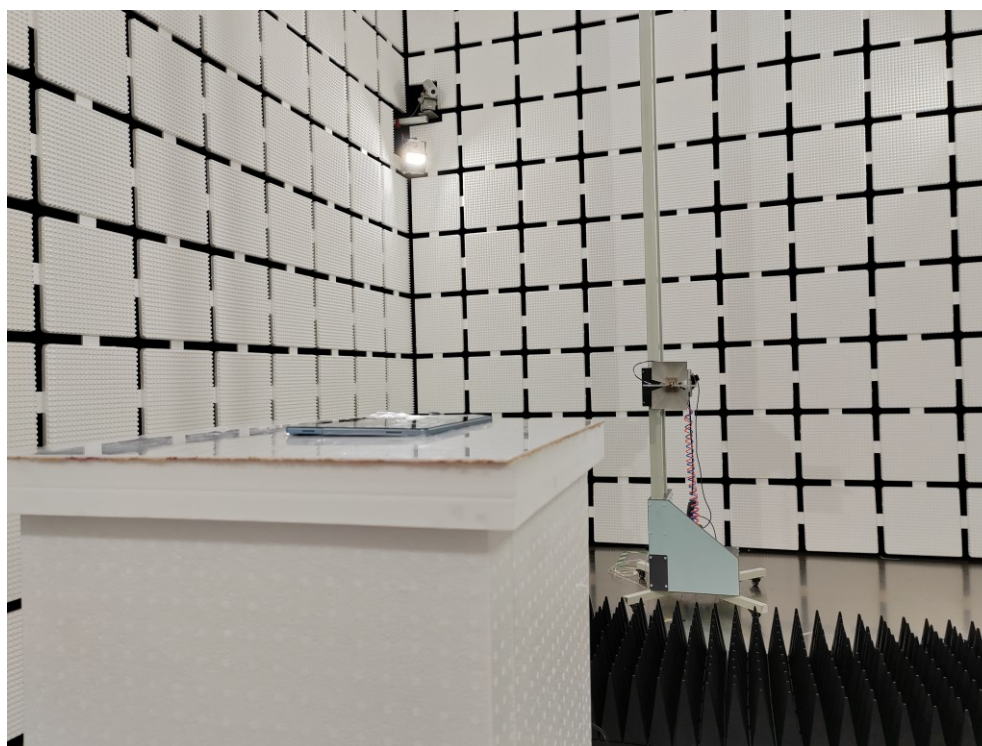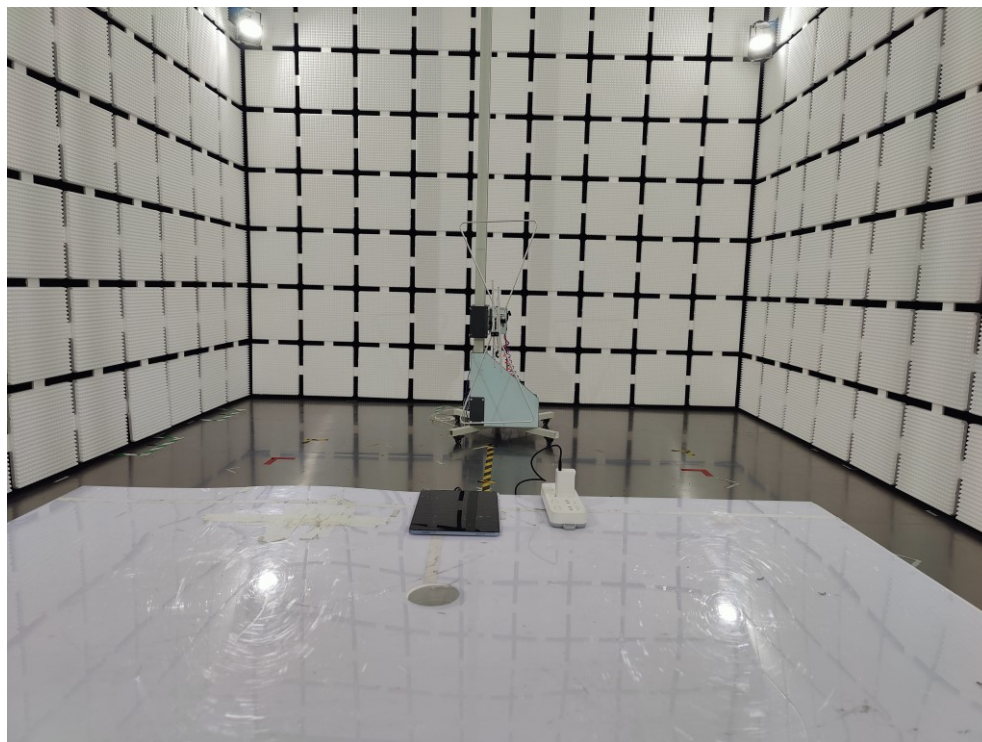

12.2.Photo of Conducted Emission test

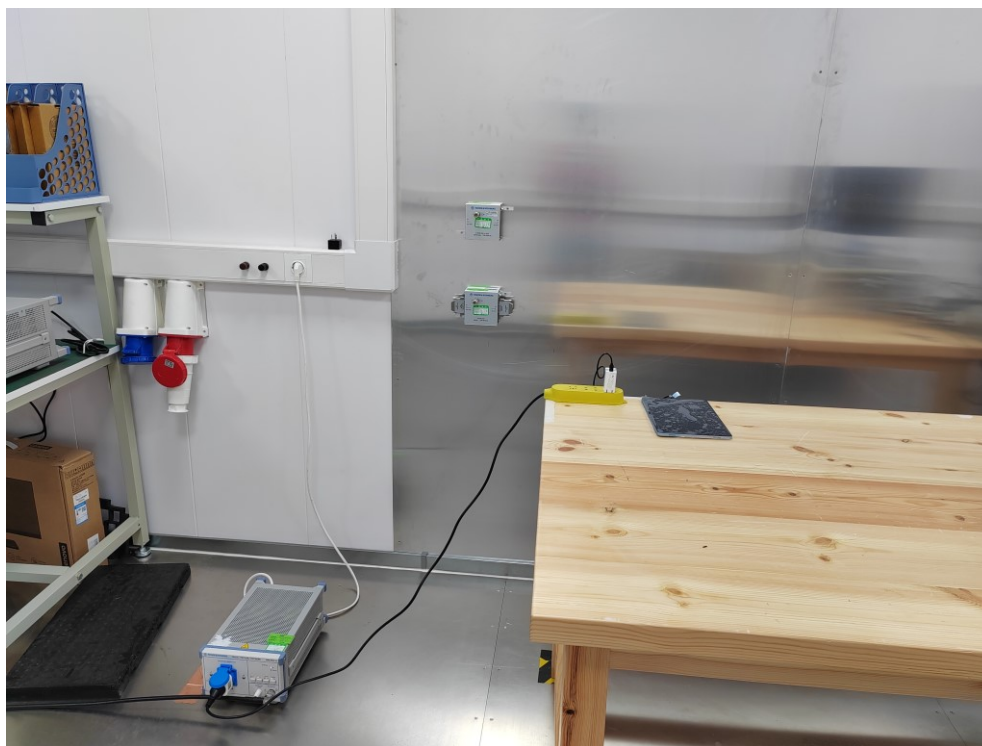

-----END OF REPORT-----