


Site: AC1	Time: 2020/07/06 - 16:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0	

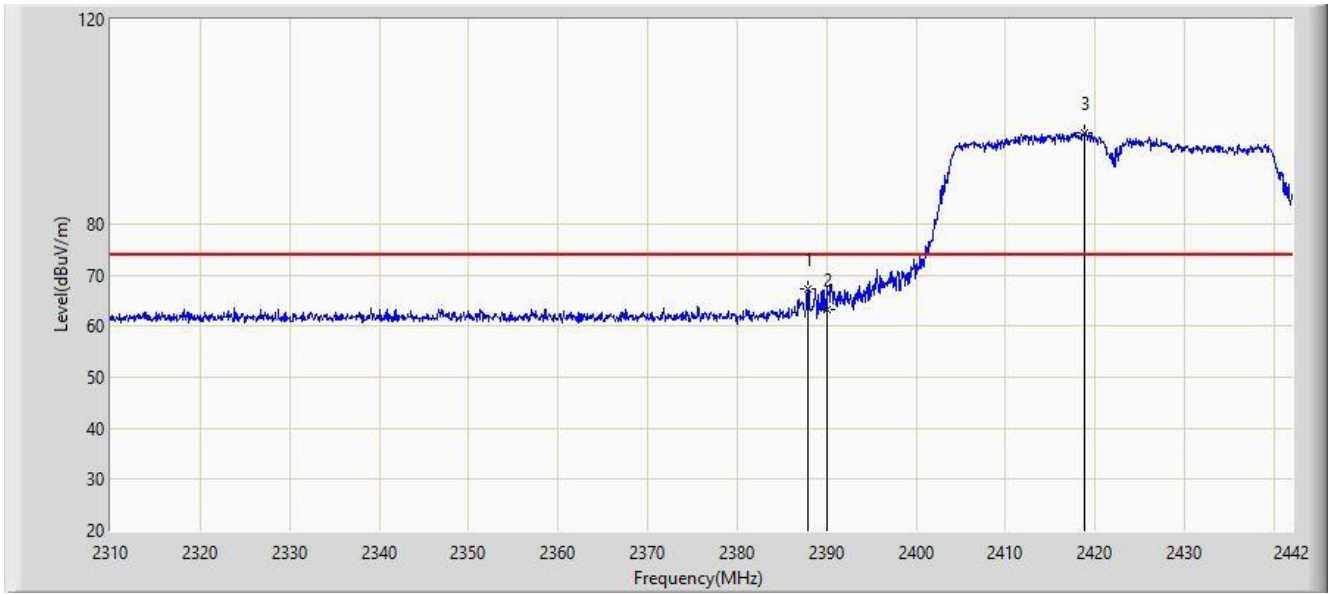


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2387.880	67.151	34.449	-6.849	74.000	32.702	PK
2		2390.000	63.255	30.543	-10.745	74.000	32.712	PK
3	*	2418.900	97.807	65.075	N/A	N/A	32.732	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 16:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0	

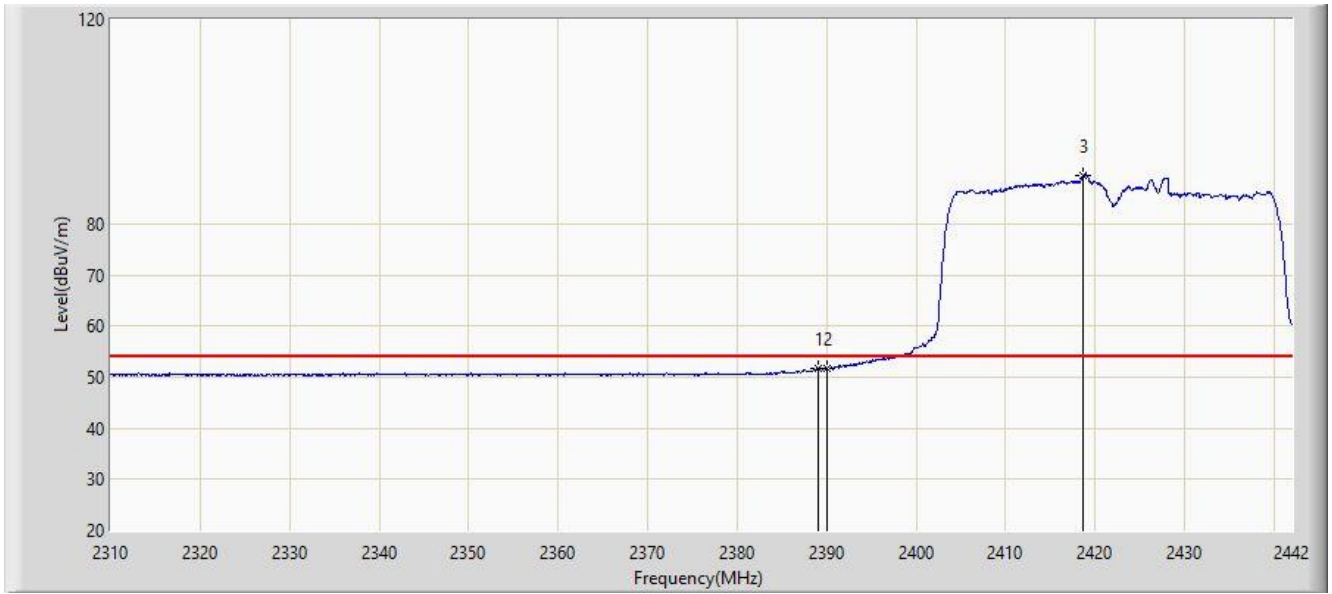


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.002	51.782	19.075	-2.218	54.000	32.707	AV
2		2390.000	51.577	18.865	-2.423	54.000	32.712	AV
3	*	2418.702	89.437	56.705	N/A	N/A	32.731	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0	

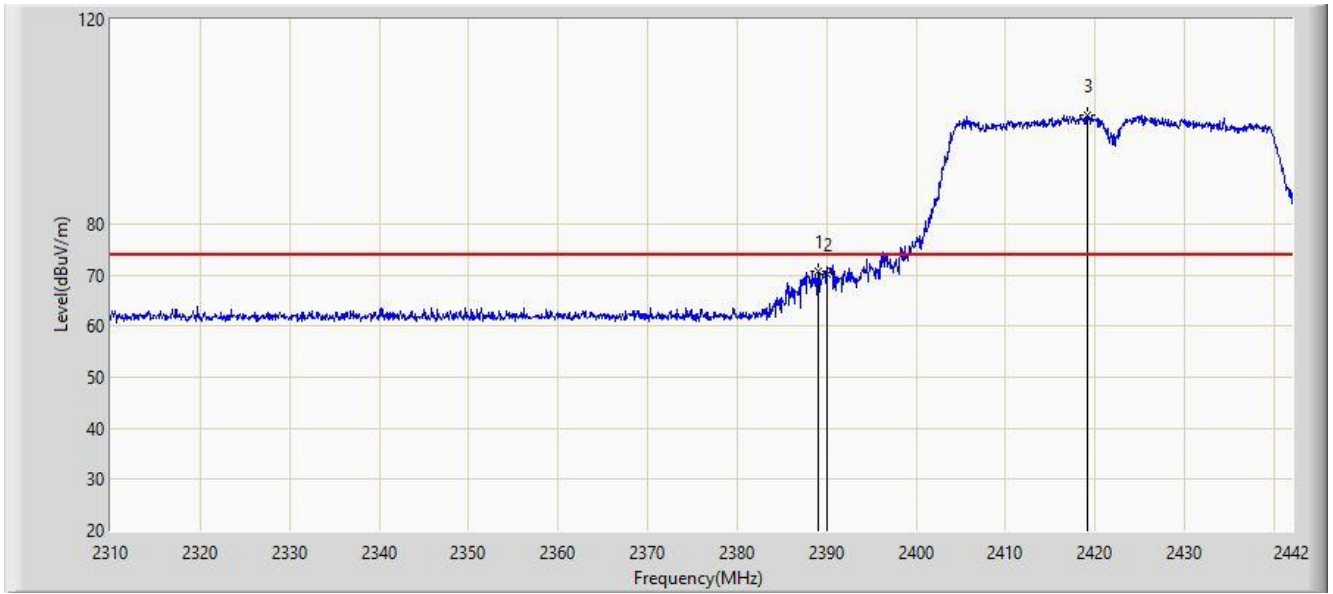


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.002	70.667	37.960	-3.333	74.000	32.707	PK
2		2390.000	70.015	37.303	-3.985	74.000	32.712	PK
3	*	2419.230	101.273	68.540	N/A	N/A	32.733	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 16:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0	

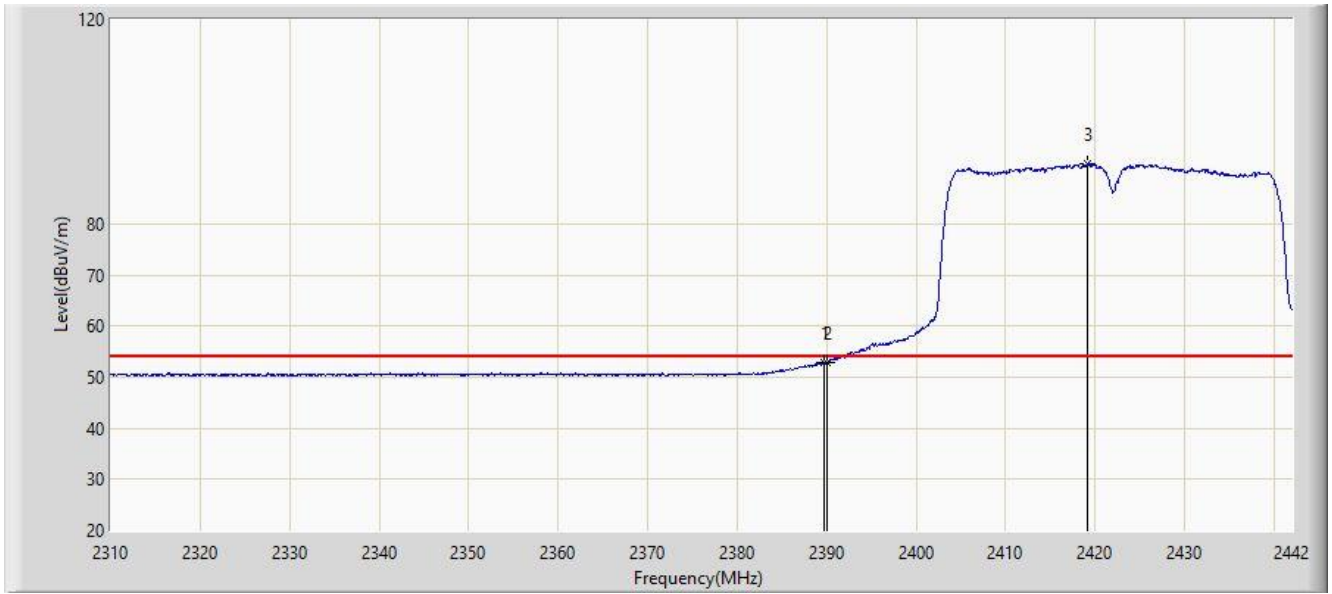


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.794	52.982	20.271	-1.018	54.000	32.710	AV
2		2390.000	52.859	20.147	-1.141	54.000	32.712	AV
3	*	2419.230	91.670	58.937	N/A	N/A	32.733	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 16:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0	

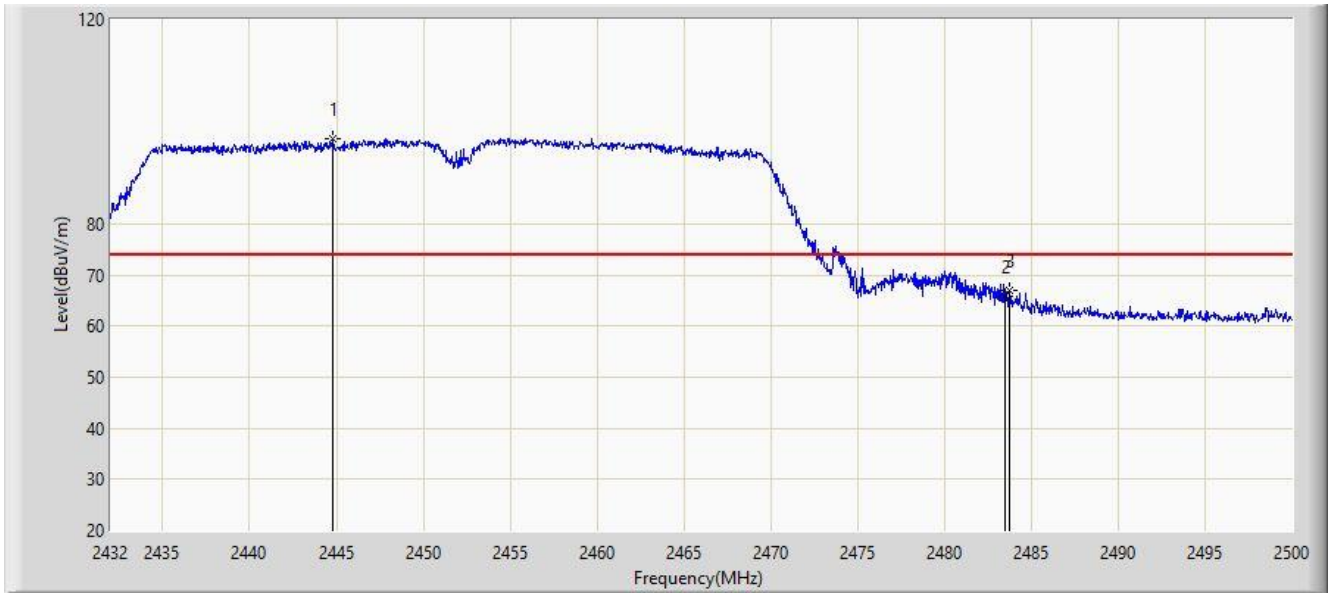


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2444.818	96.736	63.999	N/A	N/A	32.736	PK
2		2483.500	65.860	33.210	-8.140	74.000	32.651	PK
3		2483.782	66.949	34.301	-7.051	74.000	32.648	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 16:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0	

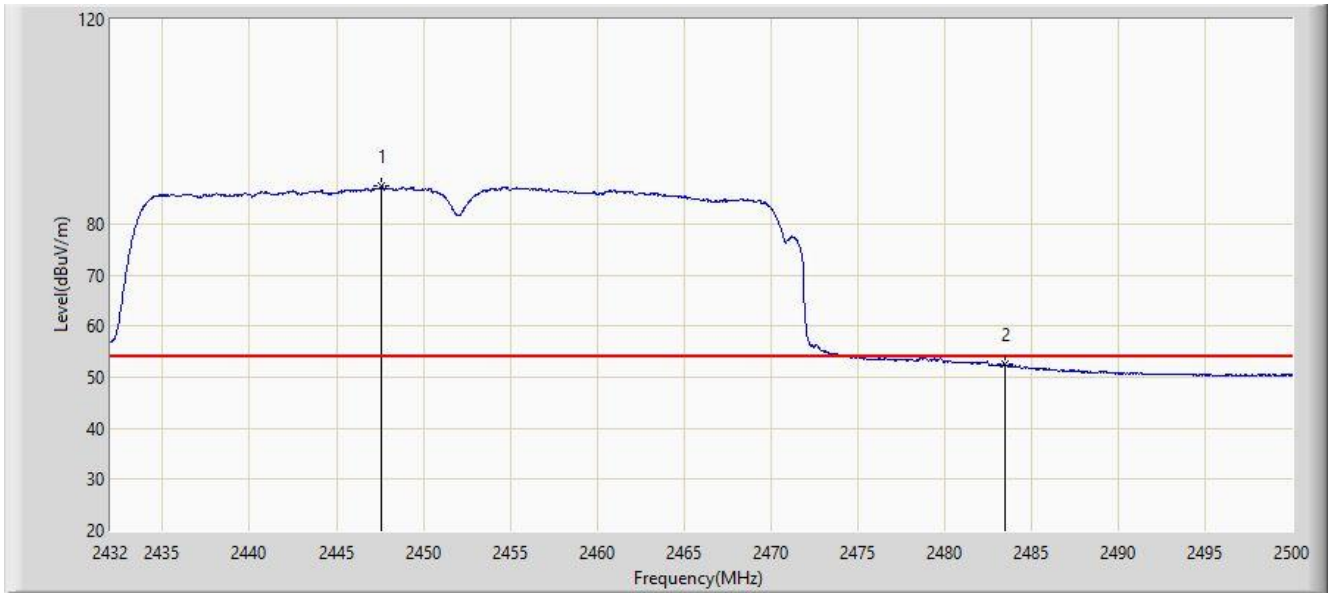


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2447.606	87.295	54.565	N/A	N/A	32.730	AV
2		2483.500	52.448	19.798	-1.552	54.000	32.651	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0	

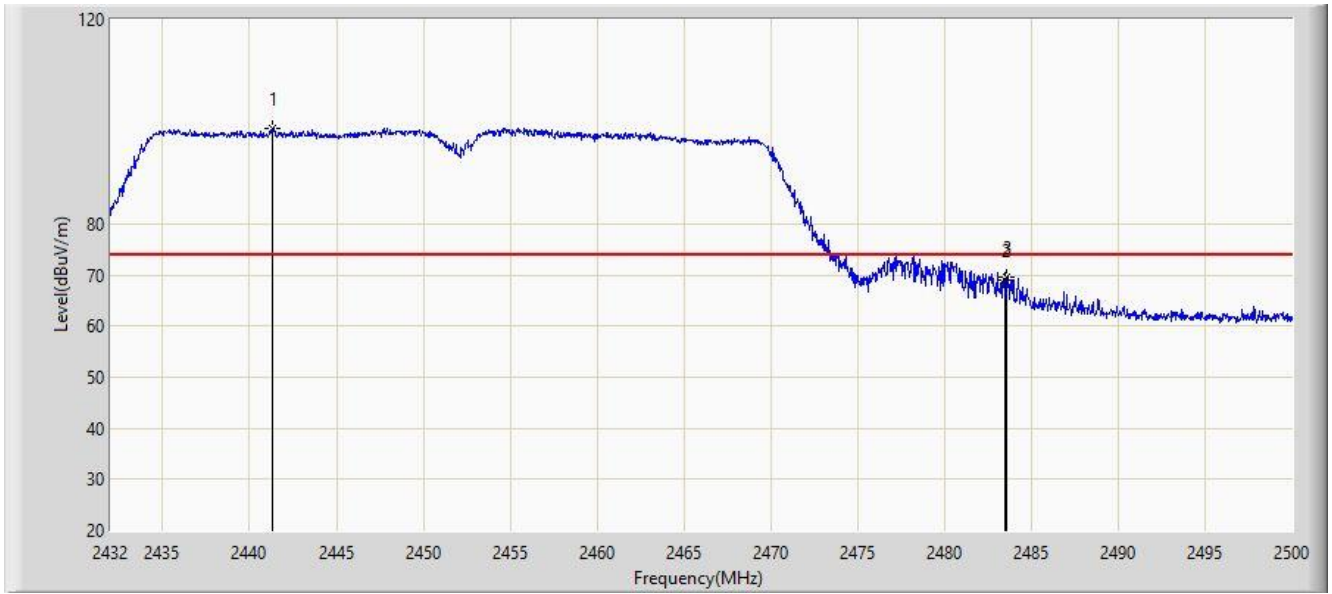


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2441.282	98.567	65.824	N/A	N/A	32.743	PK
2		2483.500	69.059	36.409	-4.941	74.000	32.651	PK
3		2483.612	69.676	37.027	-4.324	74.000	32.649	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0	

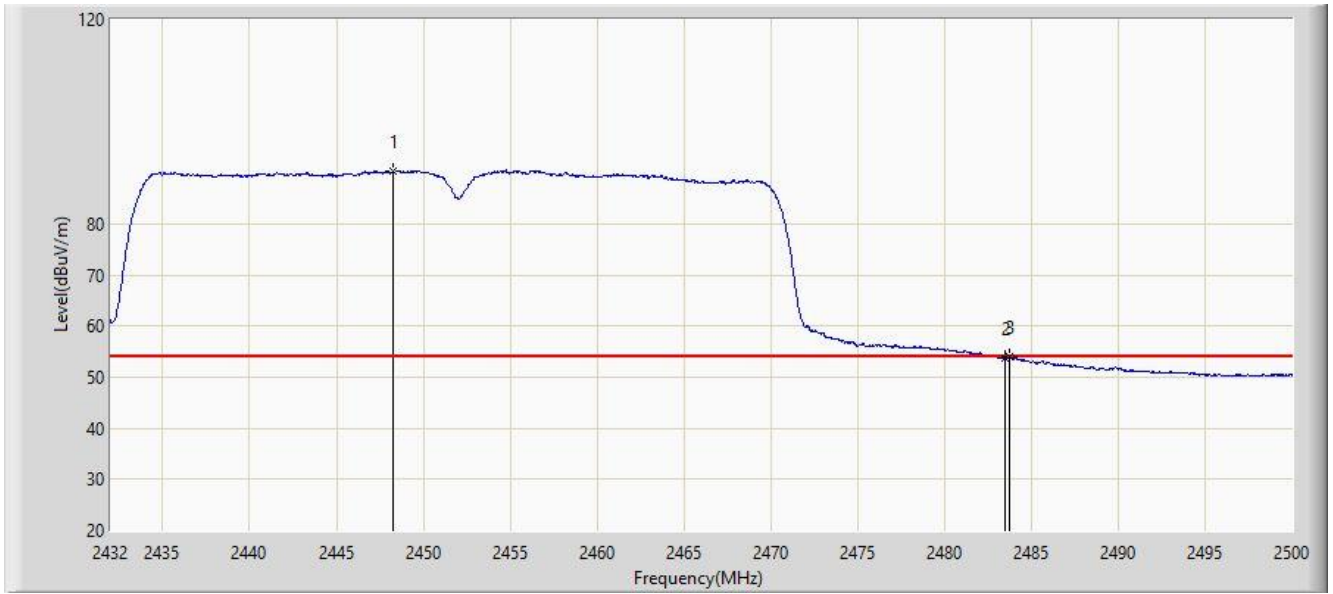


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2448.252	90.366	57.638	N/A	N/A	32.728	AV
2		2483.500	53.592	20.942	-0.408	54.000	32.651	AV
3		2483.714	53.874	21.226	-0.126	54.000	32.648	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

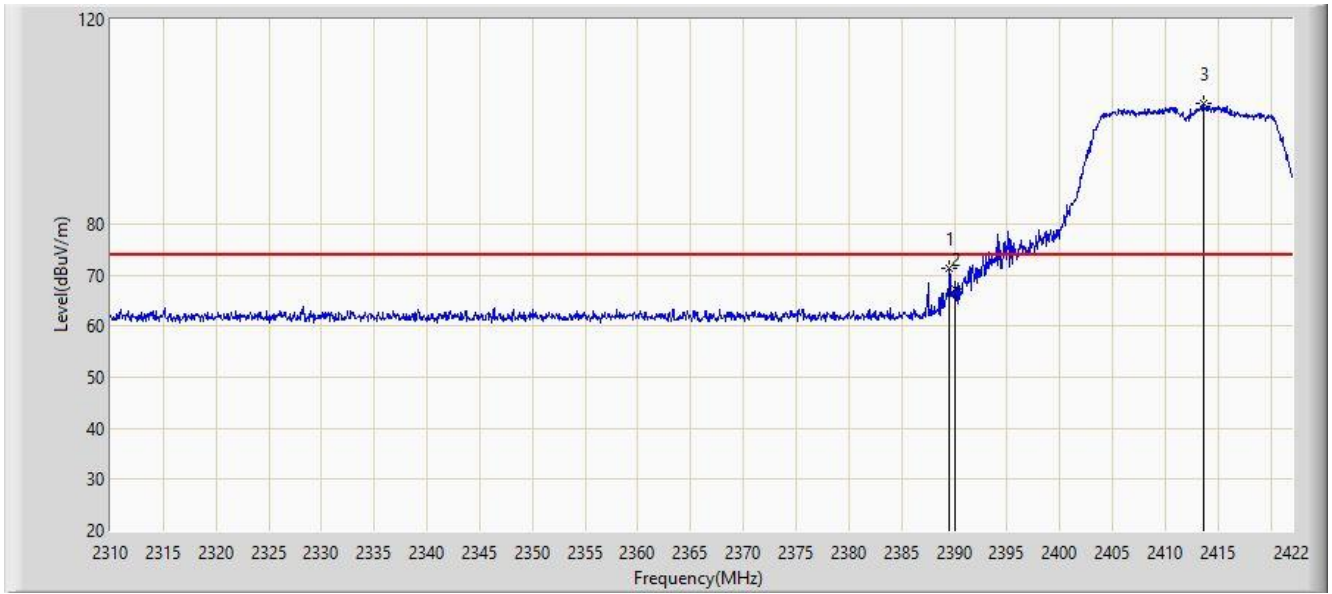


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.520	71.168	38.458	-2.832	74.000	32.710	PK
2		2390.000	67.268	34.556	-6.732	74.000	32.712	PK
3	*	2413.600	103.513	70.785	N/A	N/A	32.729	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

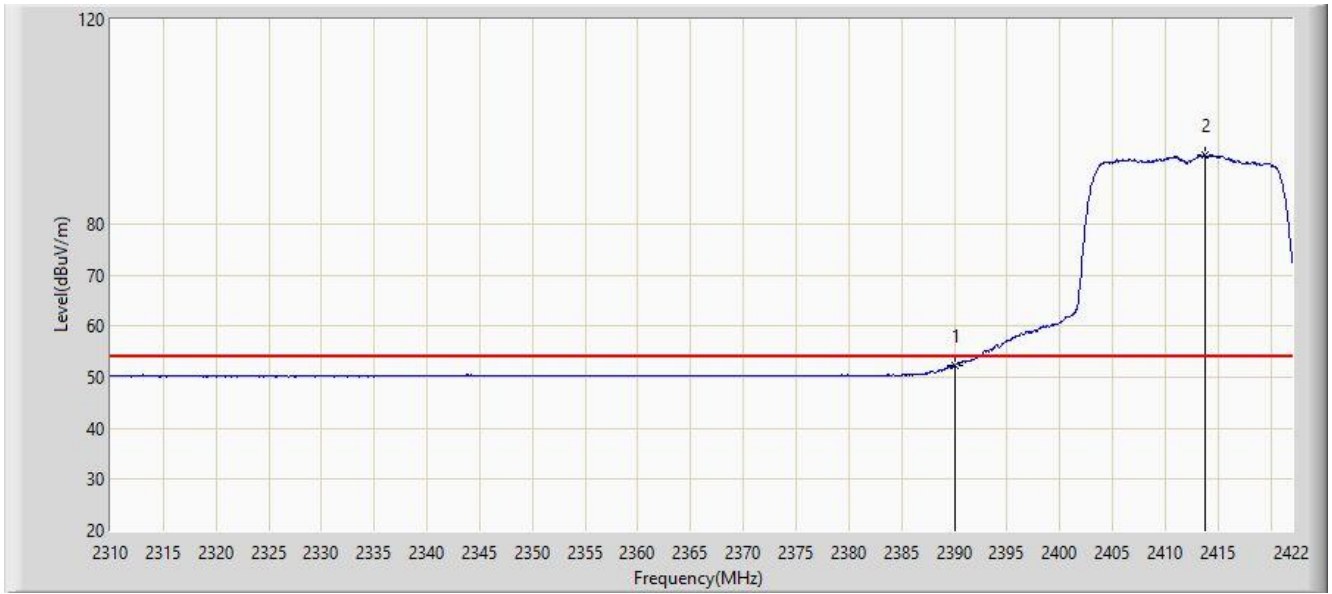


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.261	19.549	-1.739	54.000	32.712	AV
2	*	2413.824	93.473	60.745	N/A	N/A	32.729	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

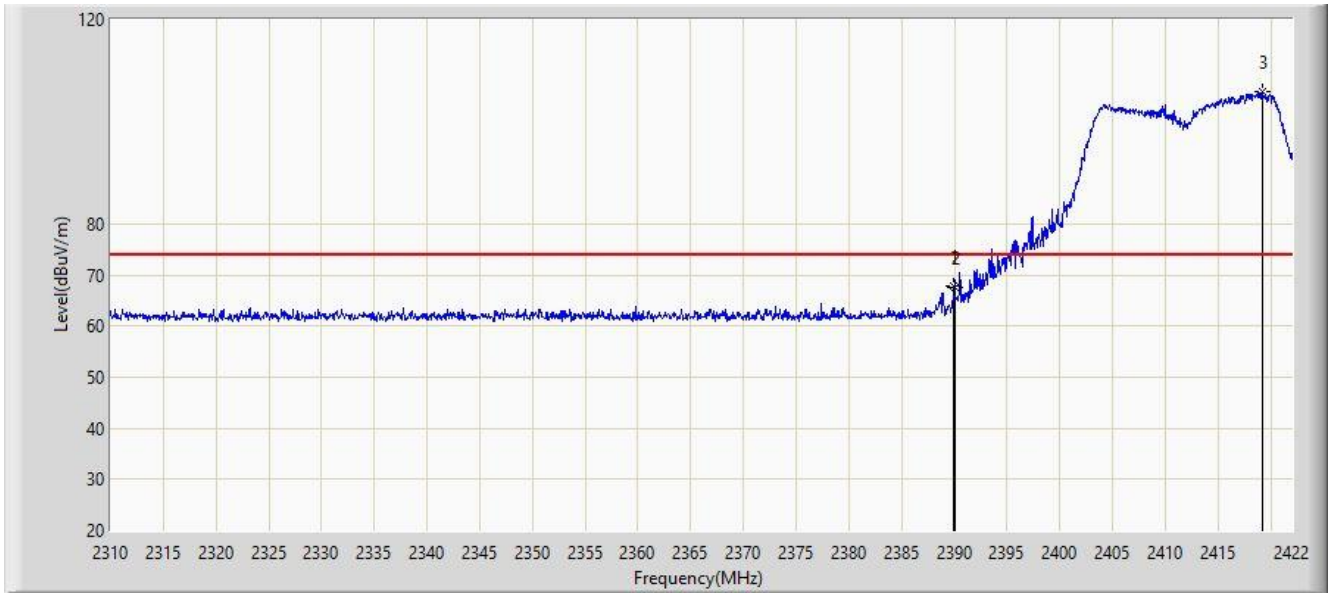


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.912	67.892	35.181	-6.108	74.000	32.711	PK
2		2390.000	67.638	34.926	-6.362	74.000	32.712	PK
3	*	2419.144	105.763	73.031	N/A	N/A	32.732	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz Ant 0+1	

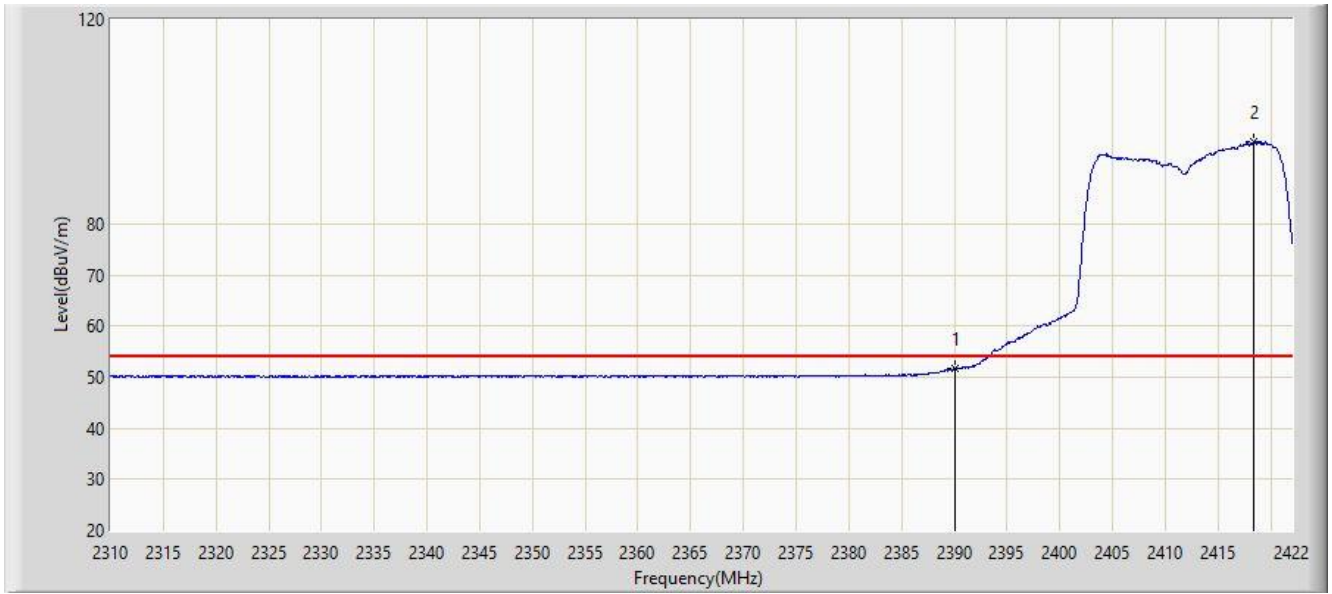


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.690	18.978	-2.310	54.000	32.712	AV
2	*	2418.360	95.990	63.259	N/A	N/A	32.731	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	

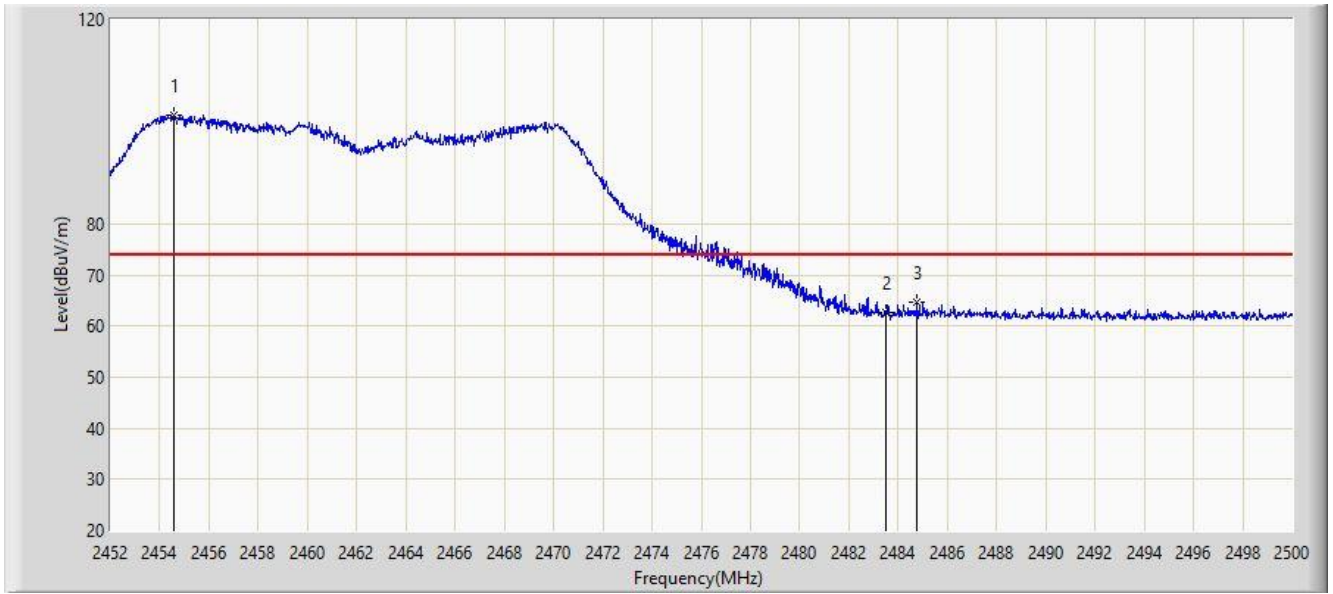


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2454.592	101.329	68.599	N/A	N/A	32.731	PK
2		2483.500	62.573	29.923	-11.427	74.000	32.651	PK
3		2484.760	64.715	32.076	-9.285	74.000	32.640	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	

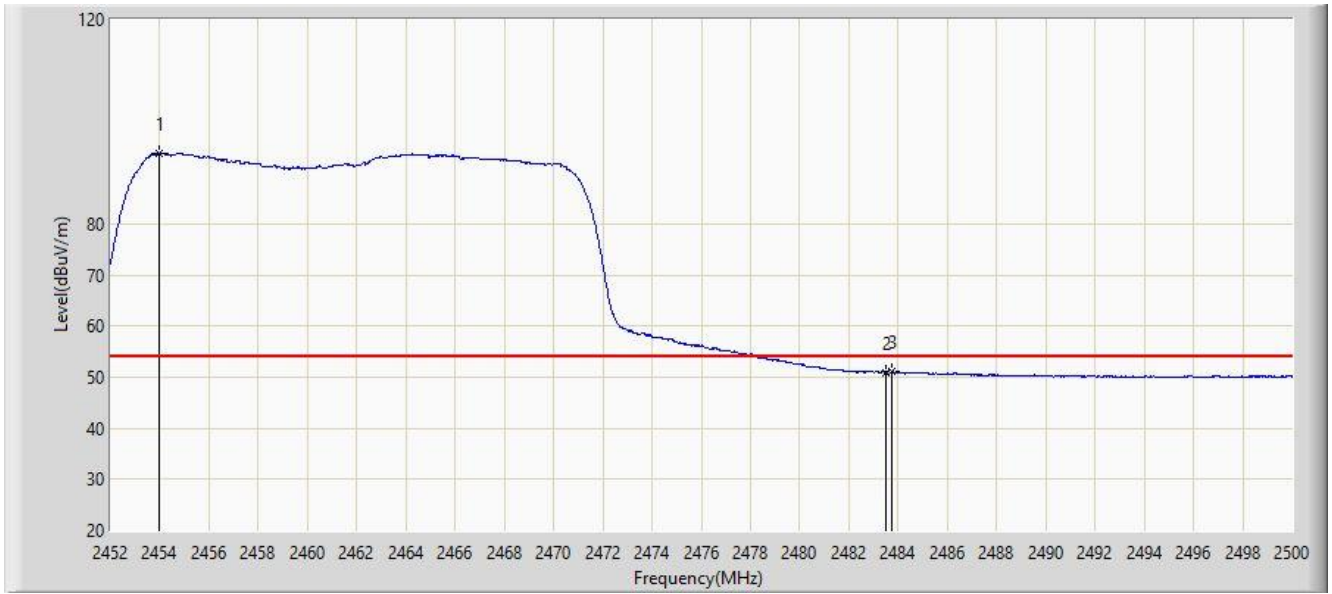


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2453.944	93.796	61.068	N/A	N/A	32.728	AV
2		2483.500	50.927	18.277	-3.073	54.000	32.651	AV
3		2483.752	51.058	18.410	-2.942	54.000	32.648	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	

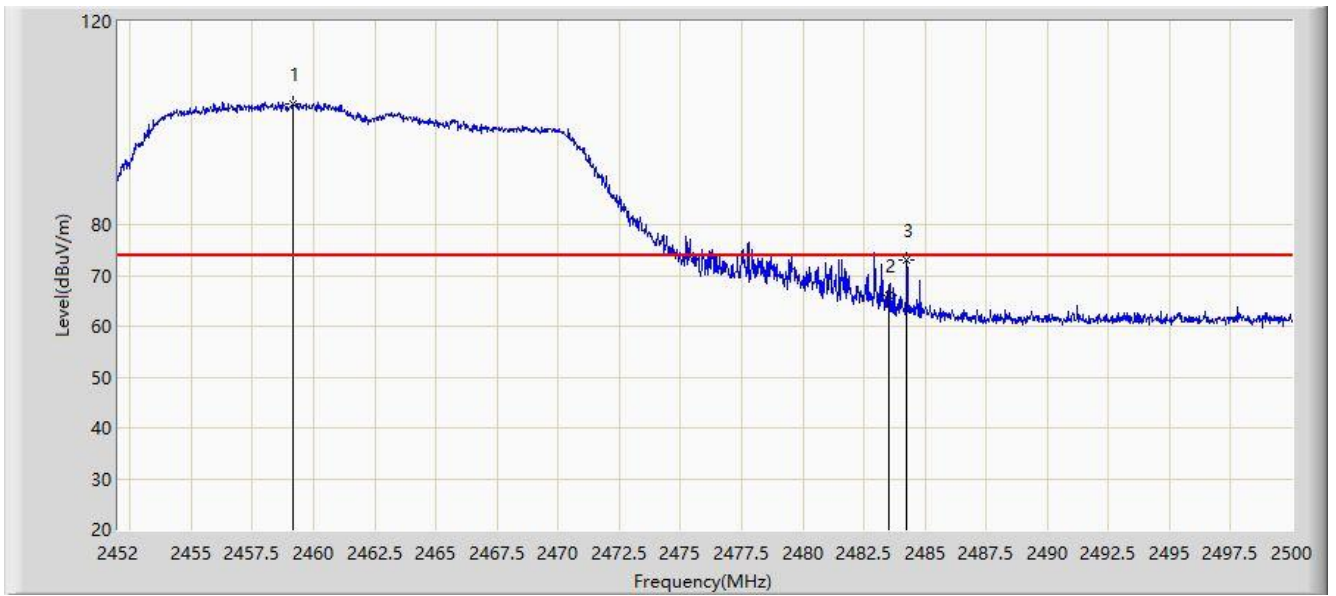


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2459.176	103.730	70.983	N/A	N/A	32.747	PK
2		2483.500	66.135	33.485	-7.865	74.000	32.651	PK
3		2484.256	73.108	40.464	-0.892	74.000	32.644	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 17:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz Ant 0+1	

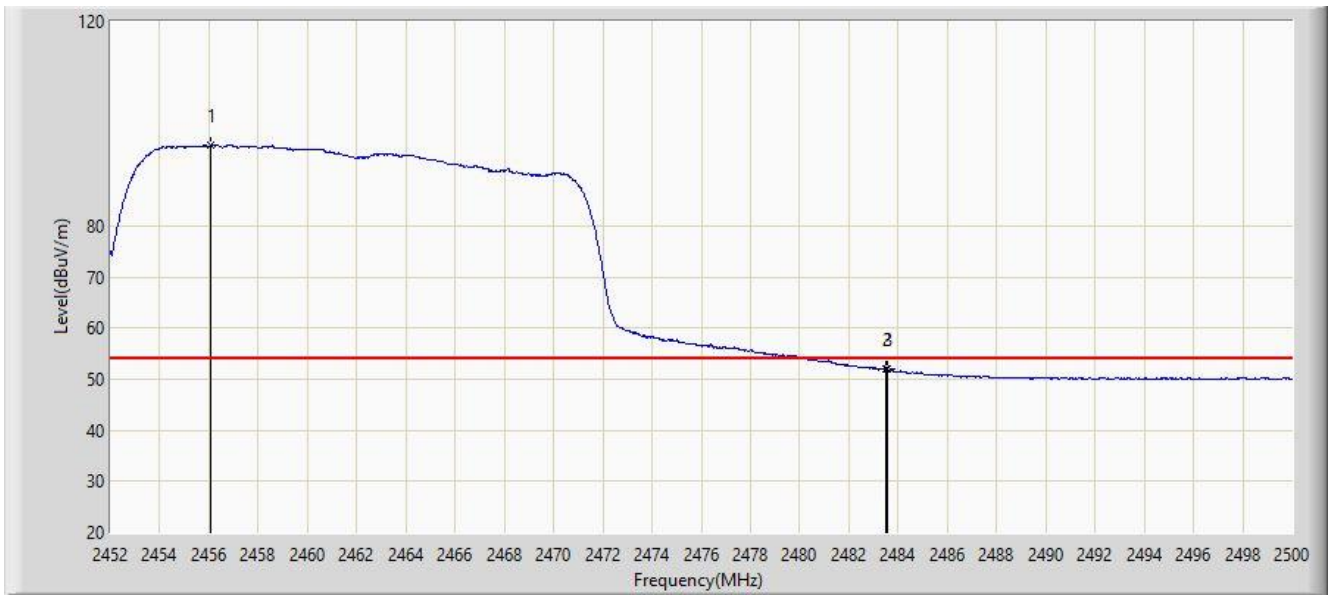


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2456.056	95.657	62.921	N/A	N/A	32.736	AV
2		2483.500	51.909	19.259	-2.091	54.000	32.651	AV
3		2483.584	51.969	19.319	-2.031	54.000	32.650	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0+1	

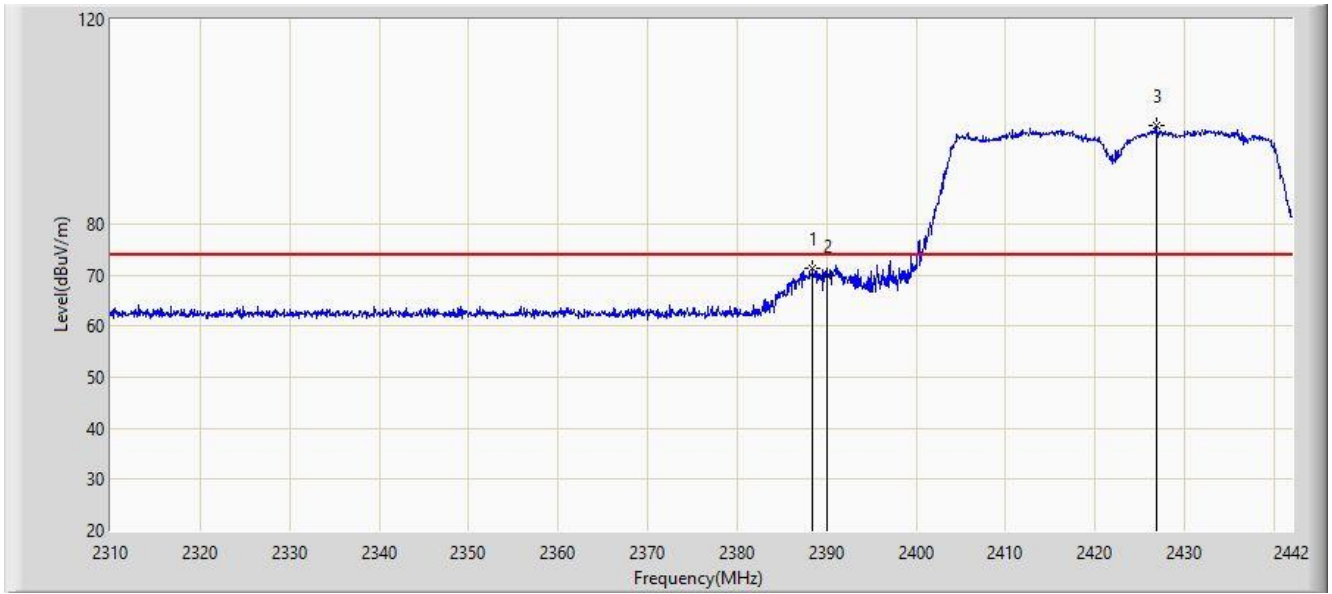


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2388.408	71.317	38.613	-2.683	74.000	32.704	PK
2		2390.000	69.741	37.029	-4.259	74.000	32.712	PK
3	*	2426.820	99.239	66.493	N/A	N/A	32.745	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0+1	

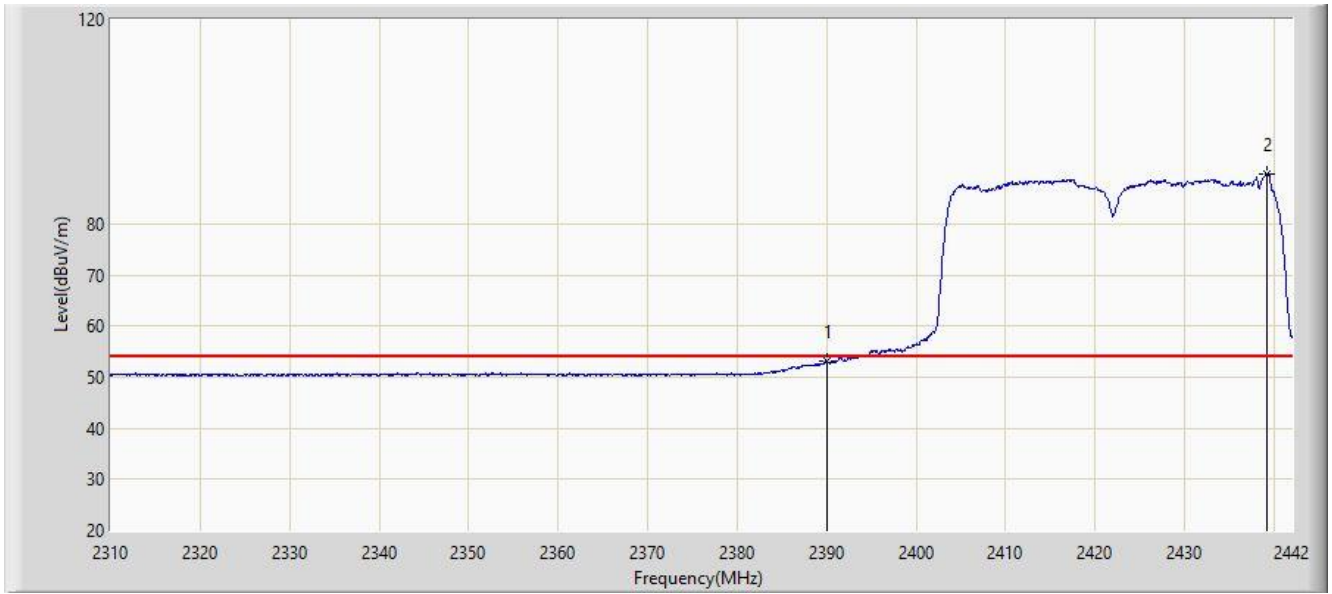


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	53.013	20.301	-0.987	54.000	32.712	AV
2	*	2439.228	89.811	57.064	N/A	N/A	32.747	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0+1	

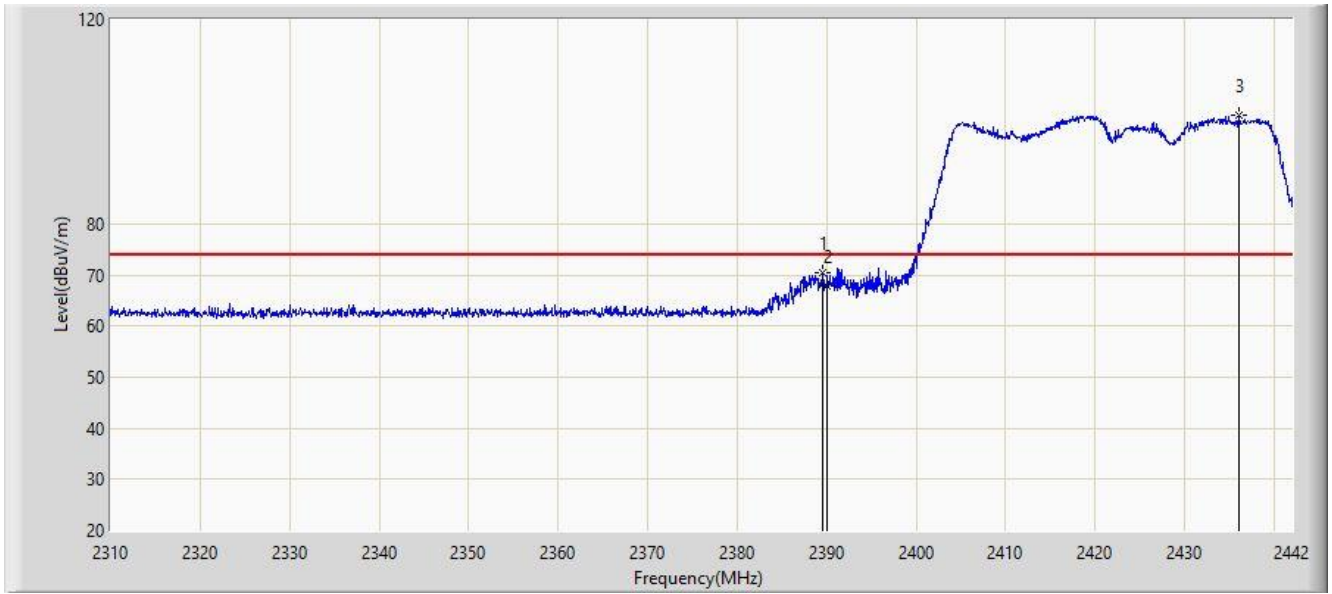


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2389.596	70.397	37.687	-3.603	74.000	32.710	PK
2		2390.000	67.899	35.187	-6.101	74.000	32.712	PK
3	*	2436.060	101.223	68.470	N/A	N/A	32.753	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz Ant 0+1	

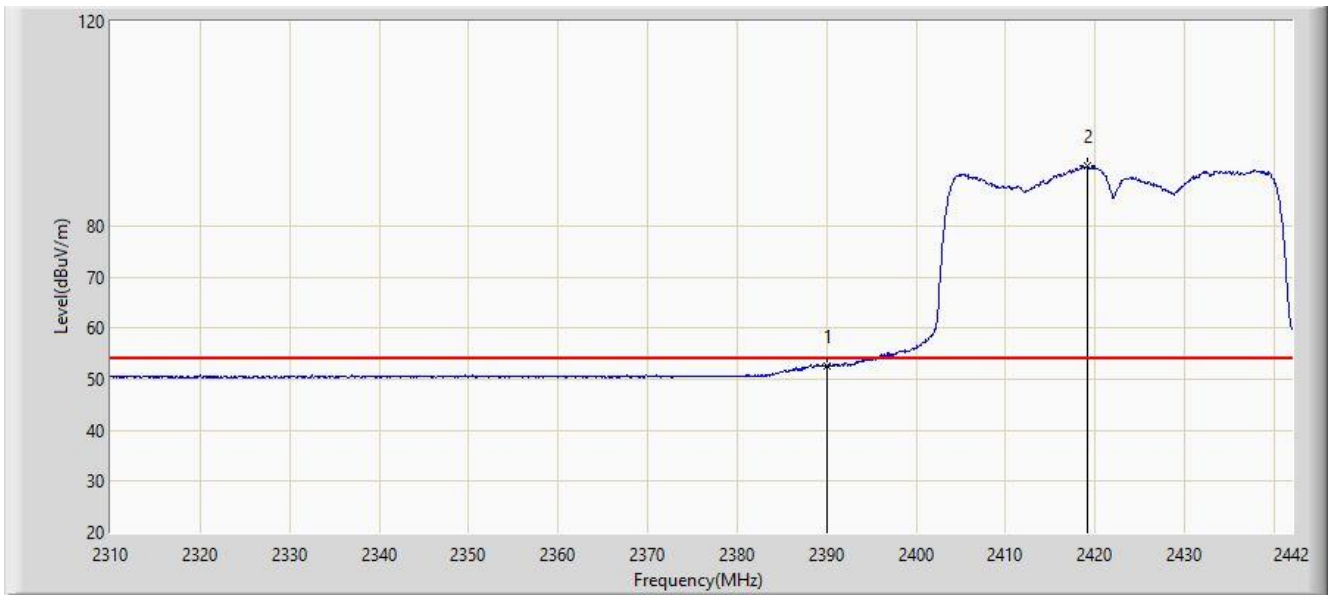


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	52.639	19.927	-1.361	54.000	32.712	AV
2	*	2419.230	91.699	58.966	N/A	N/A	32.733	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0+1	

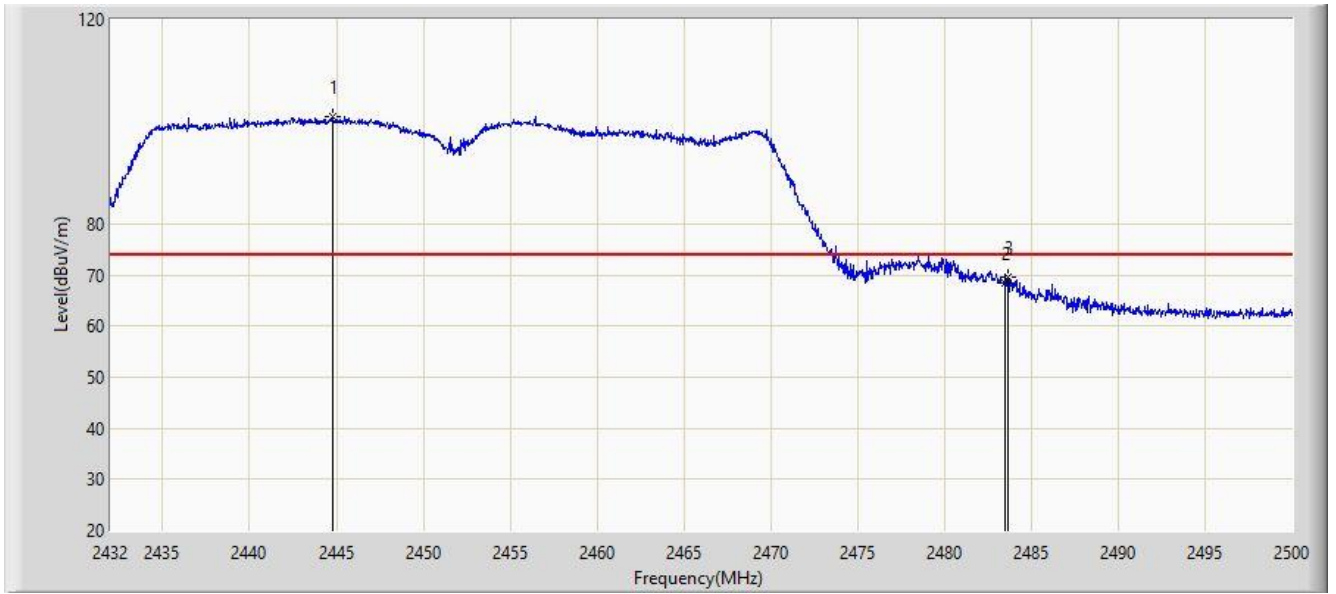


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2444.818	101.119	68.382	N/A	N/A	32.736	PK
2		2483.500	68.526	35.876	-5.474	74.000	32.651	PK
3		2483.680	69.567	36.918	-4.433	74.000	32.648	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0+1	

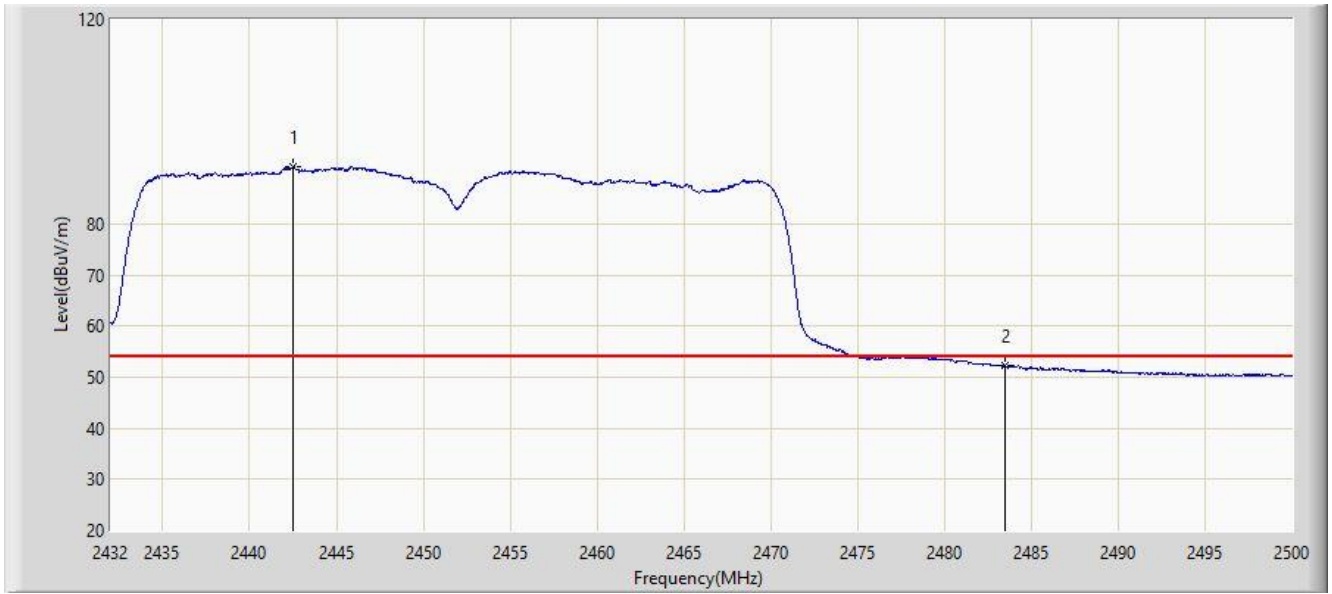


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2442.472	91.100	58.359	N/A	N/A	32.741	AV
2		2483.500	52.175	19.525	-1.825	54.000	32.651	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0+1	

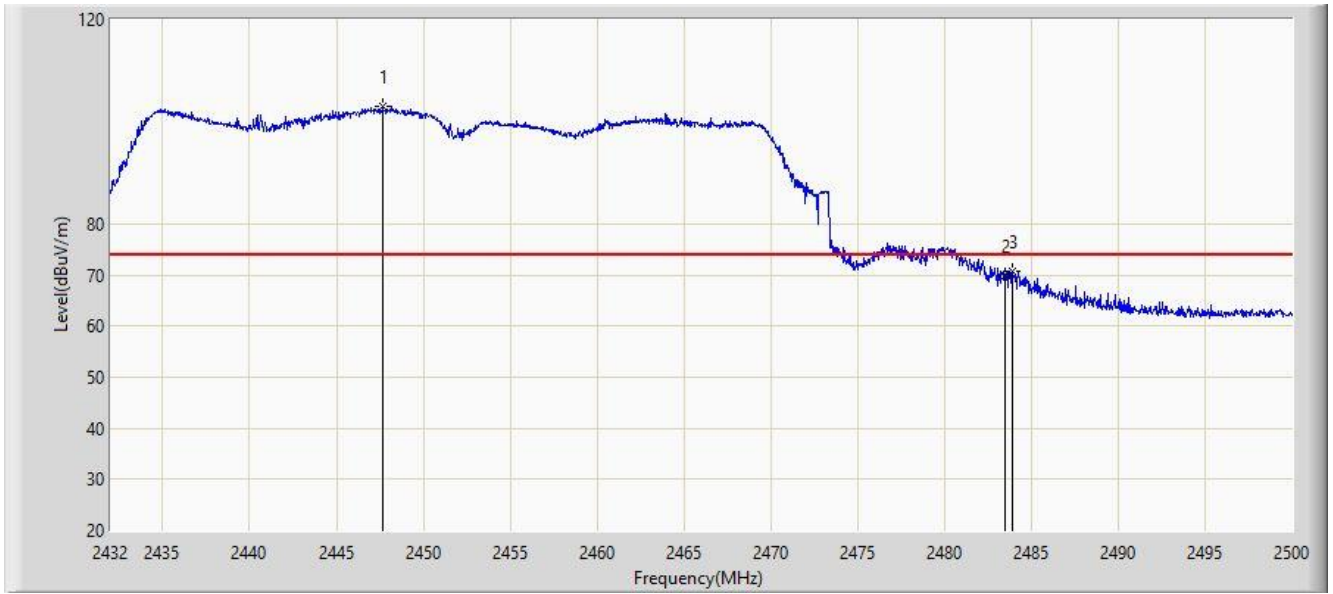


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2447.674	102.907	70.177	N/A	N/A	32.730	PK
2		2483.500	69.772	37.122	-4.228	74.000	32.651	PK
3		2483.918	70.587	37.940	-3.413	74.000	32.647	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2020/07/06 - 19:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz Ant 0+1	

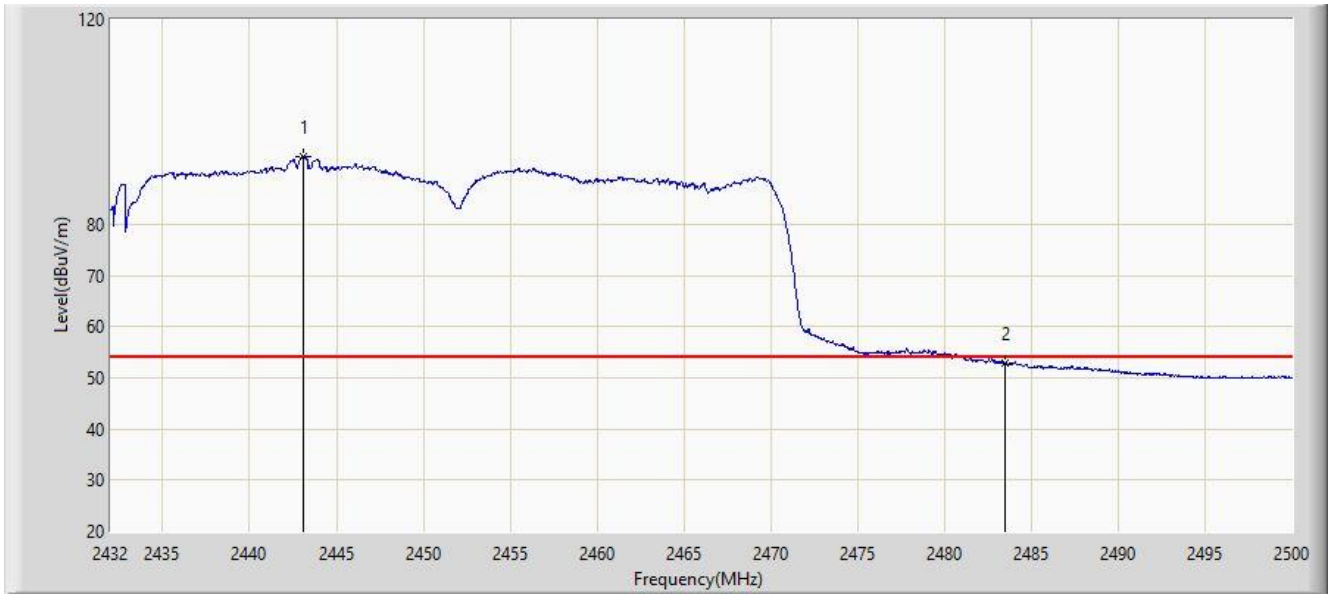

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2443.084	93.173	60.433	N/A	N/A	32.740	AV
2		2483.500	52.716	20.066	-1.284	54.000	32.651	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

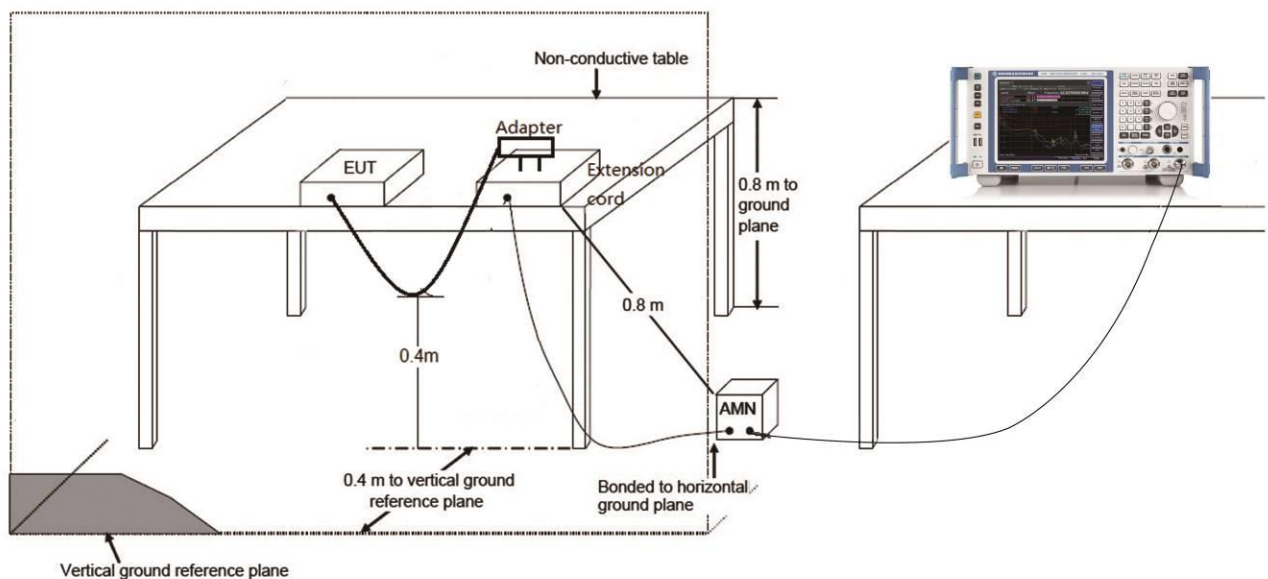

7.8.3.Test Result

Site: SR2	Time: 2020/07/13 - 17:43
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

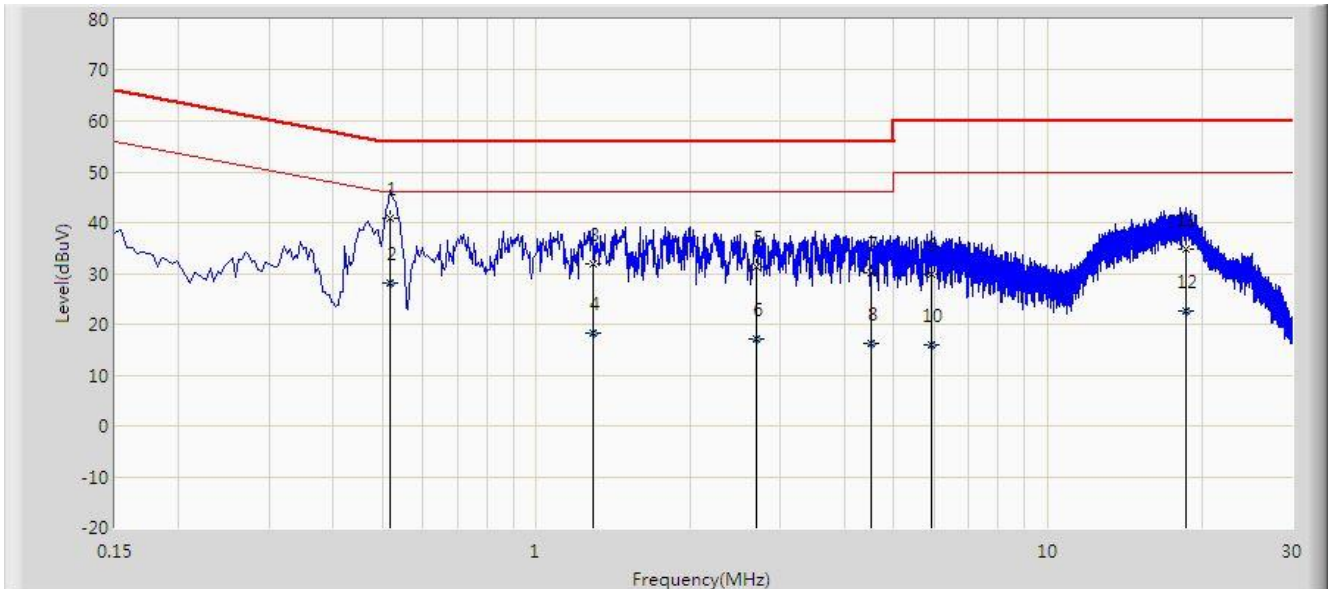


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor	Type
1		*	0.518	40.954	31.214	-15.046	56.000	9.740	QP
2			0.518	28.194	18.454	-17.806	46.000	9.740	AV
3			1.290	31.821	21.951	-24.179	56.000	9.870	QP
4			1.290	18.250	8.380	-27.750	46.000	9.870	AV
5			2.698	31.212	21.363	-24.788	56.000	9.849	QP
6			2.698	17.156	7.307	-28.844	46.000	9.849	AV
7			4.518	30.063	19.956	-25.937	56.000	10.106	QP
8			4.518	16.248	6.141	-29.752	46.000	10.106	AV
9			5.922	29.750	19.479	-30.250	60.000	10.270	QP
10			5.922	15.932	5.662	-34.068	50.000	10.270	AV
11			18.674	34.680	24.363	-25.320	60.000	10.317	QP
12			18.674	22.488	12.170	-27.512	50.000	10.317	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2020/07/13 - 17:47
Limit: FCC_Part15.207_CE_AC Power	Engineer: Hyde Yu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at channel 2422MHz	

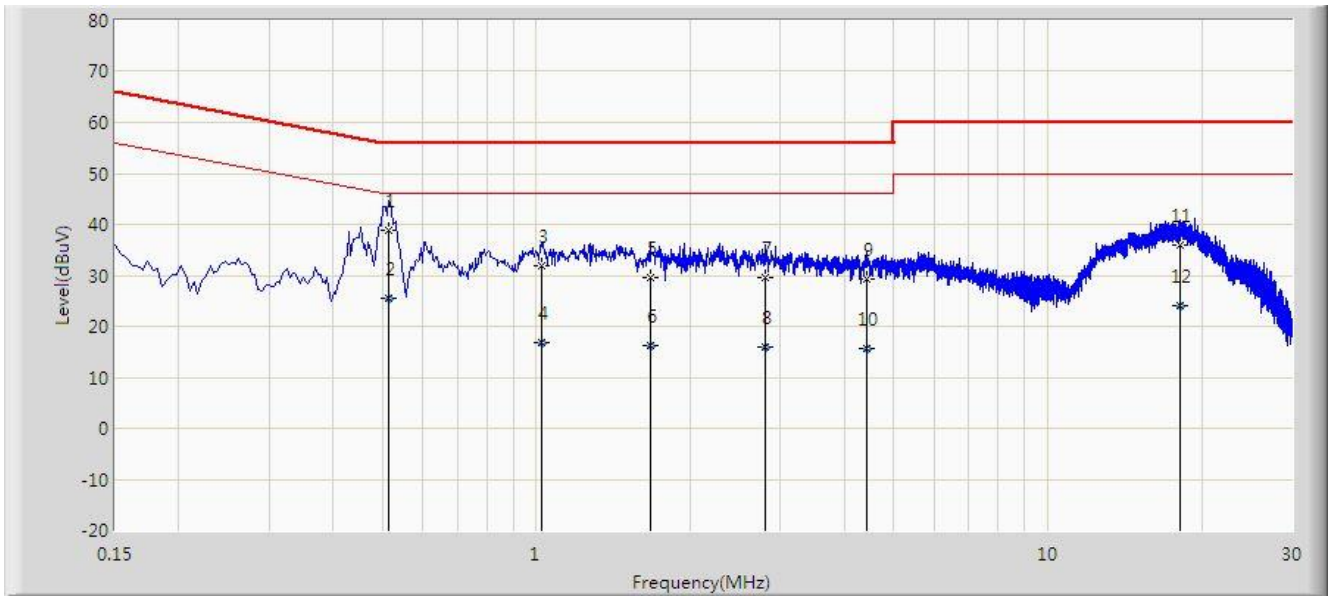

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor	Type
1		*	0.514	38.793	29.134	-17.207	56.000	9.659	QP
2			0.514	25.547	15.888	-20.453	46.000	9.659	AV
3			1.022	31.827	22.132	-24.173	56.000	9.694	QP
4			1.022	16.743	7.048	-29.257	46.000	9.694	AV
5			1.666	29.446	19.695	-26.554	56.000	9.751	QP
6			1.666	16.275	6.524	-29.725	46.000	9.751	AV
7			2.794	29.646	19.852	-26.354	56.000	9.794	QP
8			2.794	16.035	6.242	-29.965	46.000	9.794	AV
9			4.418	29.224	19.210	-26.776	56.000	10.014	QP
10			4.418	15.584	5.570	-30.416	46.000	10.014	AV
11			18.094	35.923	25.665	-24.077	60.000	10.258	QP
12			18.094	24.199	13.941	-25.801	50.000	10.258	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to "2006RSU069-UT" file.

Appendix B - EUT Photograph

Refer to "2006RSU069-UE" file.