


Freq Offset 0 Hz

Scale Type

<u>Lin</u>

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



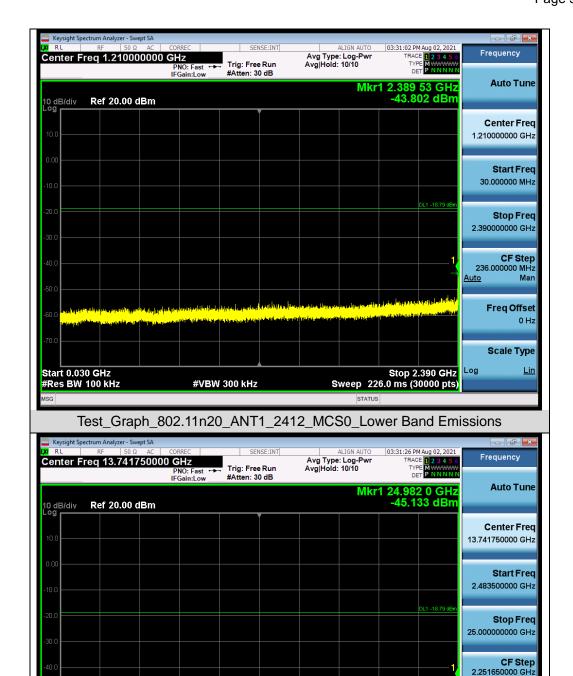


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n20_ANT1_2412_MCS0_Higher Band Emissions

#VBW 300 kHz

Start 2.48 GHz #Res BW 100 kHz



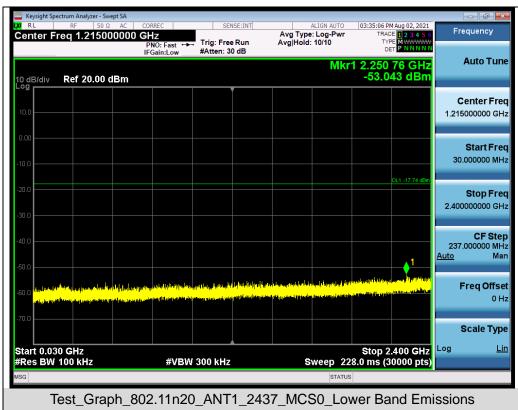




0 Hz

Scale Type

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



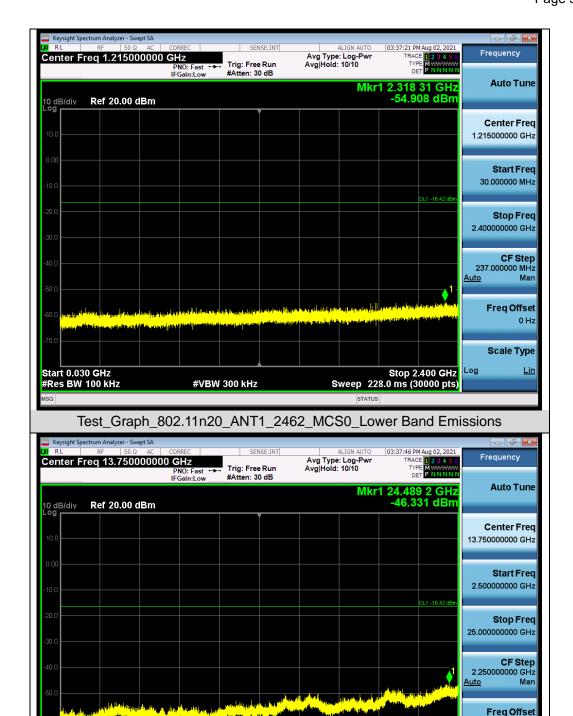

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n20_ANT1_2462_MCS0_Higher Band Emissions

#VBW 300 kHz


Start 2.50 GHz #Res BW 100 kHz

Freq Offset 0 Hz

Scale Type

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



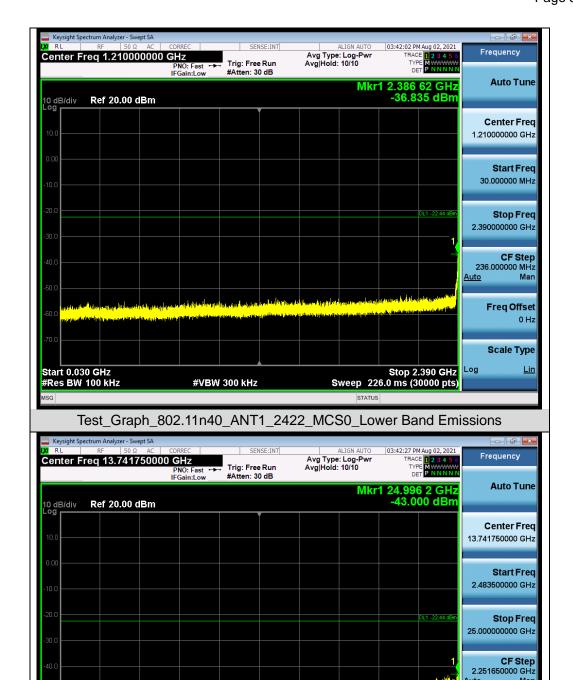

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT1_2422_MCS0_Higher Band Emissions

#VBW 300 kHz


Start 2.48 GHz #Res BW 100 kHz

Scale Type

<u>Lin</u>

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



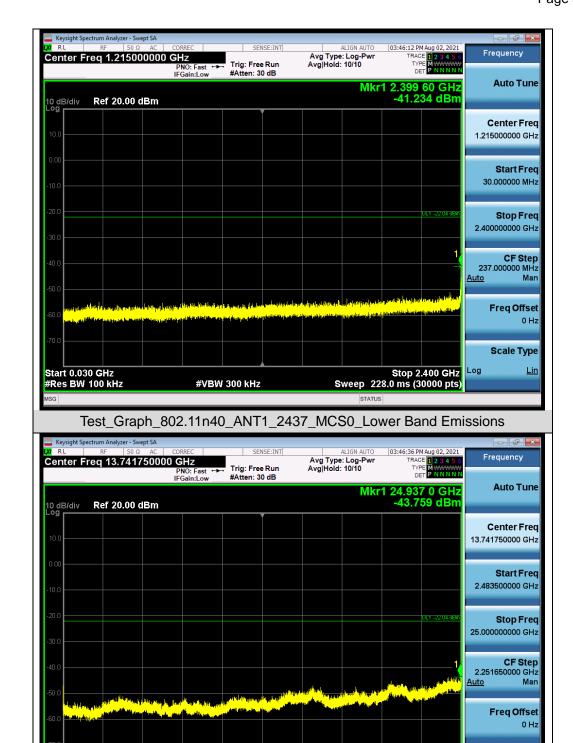

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT1_2437_MCS0_Higher Band Emissions

#VBW 300 kHz


Start 2.48 GHz #Res BW 100 kHz

0 Hz

Scale Type

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



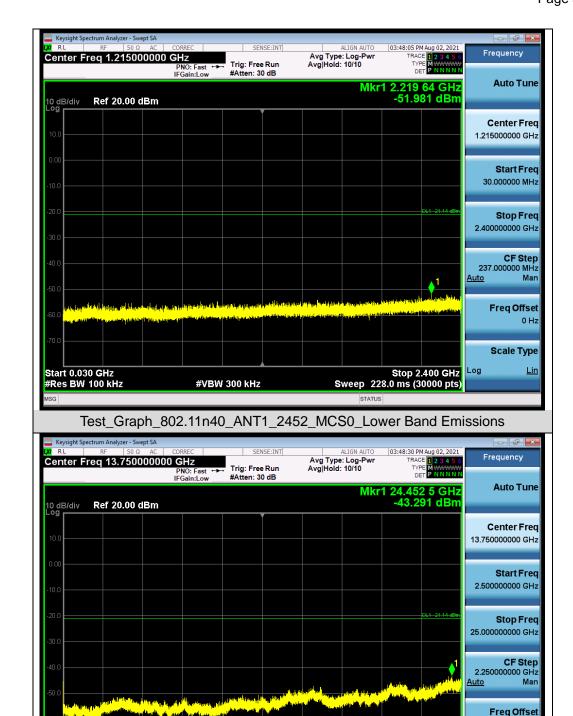

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT1_2452_MCS0_Higher Band Emissions

#VBW 300 kHz

Start 2.50 GHz #Res BW 100 kHz




Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_Lower Band Edge Emissions



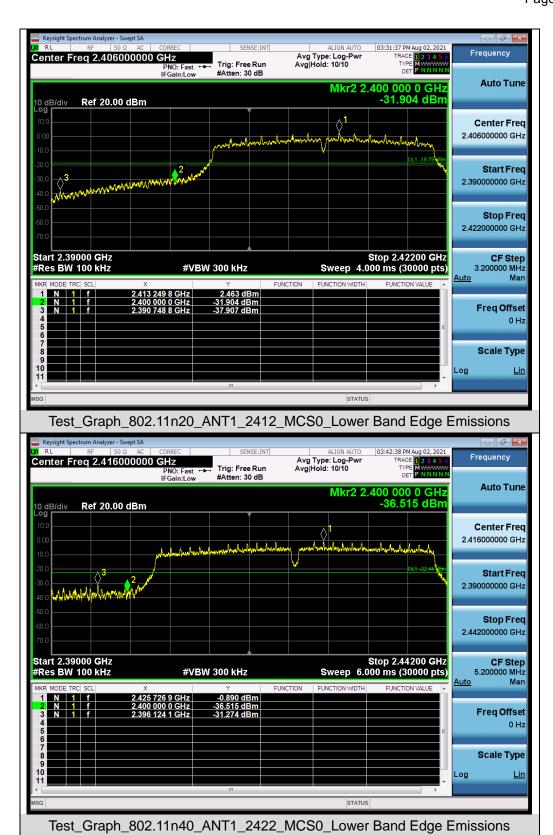



Report No.: AGC00210210705FE05

Page 58 of 120

Note:

- 1. Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.
- 2. All the antennas have been pre-tested, and all modes of each antenna are tested. The In 802.11b, 802.11g mode antenna 1 is the worst case and recorded in the report; For 802.11n mode, the worst case Antenna 1 has more than 3dB margins, so the MIMO mode also compliance the limit.



Report No.: AGC00210210705FE05

Page 59 of 120

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


Refer to Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4 LIMITS AND MEASUREMENT RESULT

10.4 LIMITS AND MILASONLMILIT NESCET											
Test Data of Conducted Output Power Spectral Density-antenna 1											
Test Mode	Test Mode Test Channel (MHz)		Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail						
	2412	0.766	-7.473	≤8	Pass						
802.11b	2437	2.406	-5.833	≤8	Pass						
	2462	3.016	-5.223	≤8	Pass						
	2412	-4.799	-13.038	≤8	Pass						
802.11g	2437	-3.849	-12.088 ≤8		Pass						
	2462	-2.956	-11.195	≤8	Pass						
	2412	-4.585	-12.824	≤8	Pass						
802.11n20	2437	-3.218	-11.457	≤8	Pass						
	2462	-3.738	-11.977	≤8	Pass						
	2422	-7.715	-15.954	≤8	Pass						
802.11n40	2437	-7.448	-15.687	≤8	Pass						
	2452	-5.960	-14.199	≤8	Pass						






	Test Data of Conducted Output Power Spectral Density-antenna 2									
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail					
	2412	1.821	-6.418	≤8	Pass					
802.11b	2437	2.389	-5.85	≤8	Pass					
	2462	3.561	-4.678	≤8	Pass					
	2412	-4.201	-12.44	≤8	Pass					
802.11g	2437	-4.064	-12.303	≤8	Pass					
	2462	-4.327	-12.566	≤8	Pass					
	2412	-3.507	-11.746	≤8	Pass					
802.11n20	2437	-3.186	-11.425	≤8	Pass					
	2462	-2.860	-11.099	≤8	Pass					
	2422	-7.813	-16.052	≤8	Pass					
802.11n40	2437	-7.521	-15.76	≤8	Pass					
	2452	-6.553	-14.792	≤8	Pass					

Test Data of Conducted Output Power Spectral Density-antenna 1+2										
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail					
	2412	-1.00	-9.24	≤7.93	Pass					
802.11n20	2437	-0.19	-8.43	≤7.93	Pass					
	2462	-0.27	-8.51	≤7.93	Pass					
	2422	-4.75	-12.99	≤7.93	Pass					
802.11n40	2437	-4.47	-12.71	≤7.93	Pass					
	2452	-3.24	-11.48	≤7.93	Pass					

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).



Test Graphs of Conducted Output Power Spectral Density

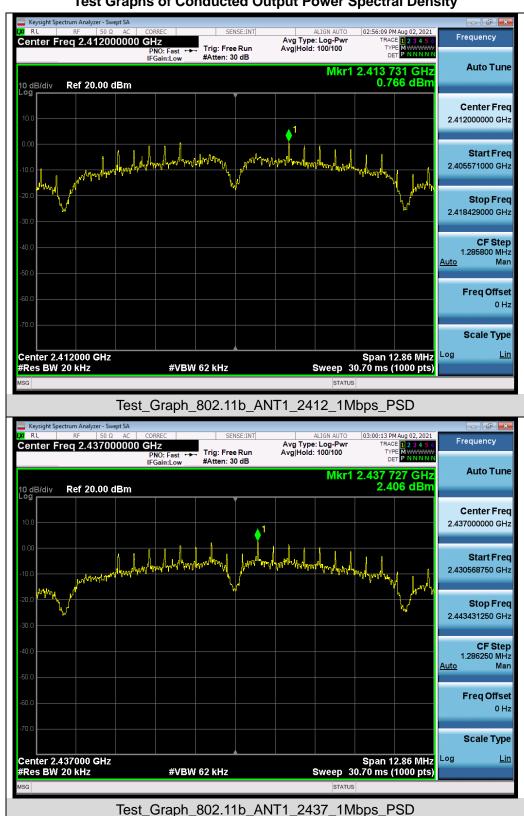


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.









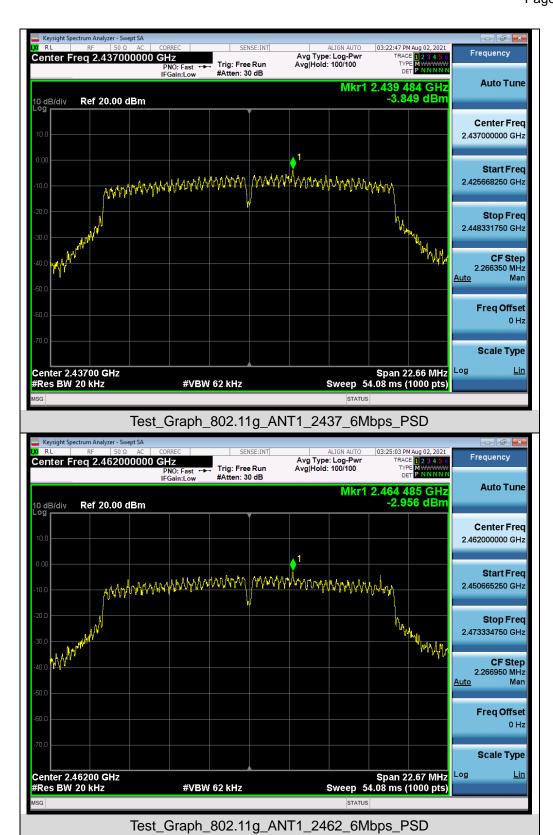




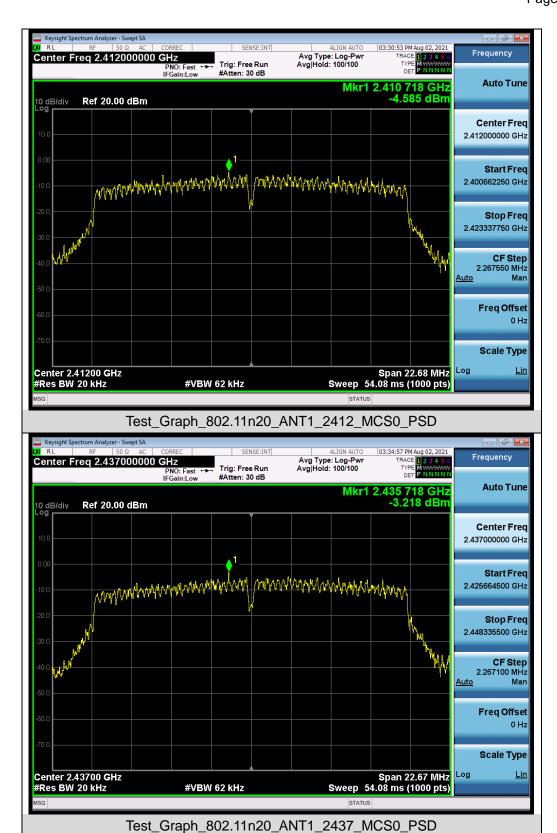



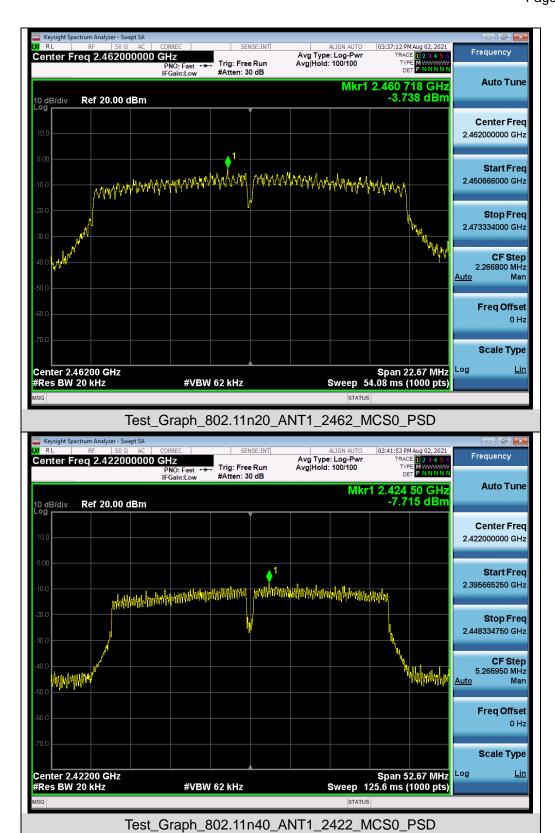




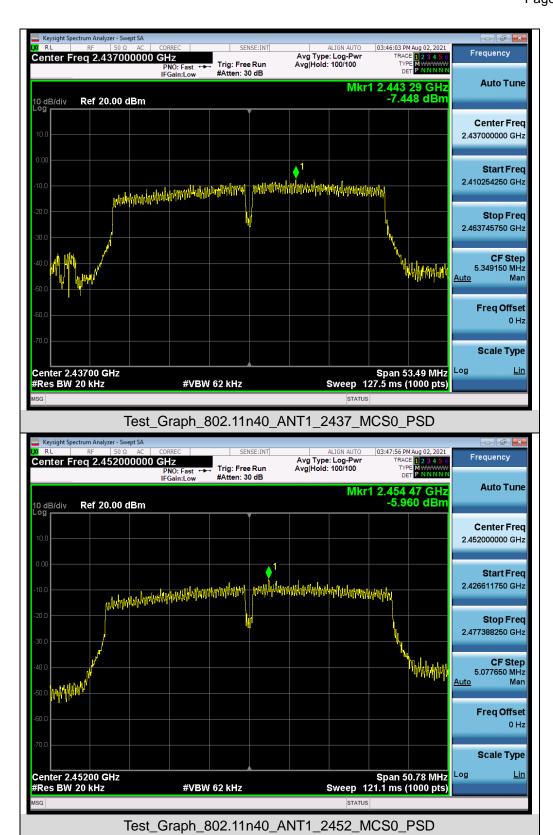








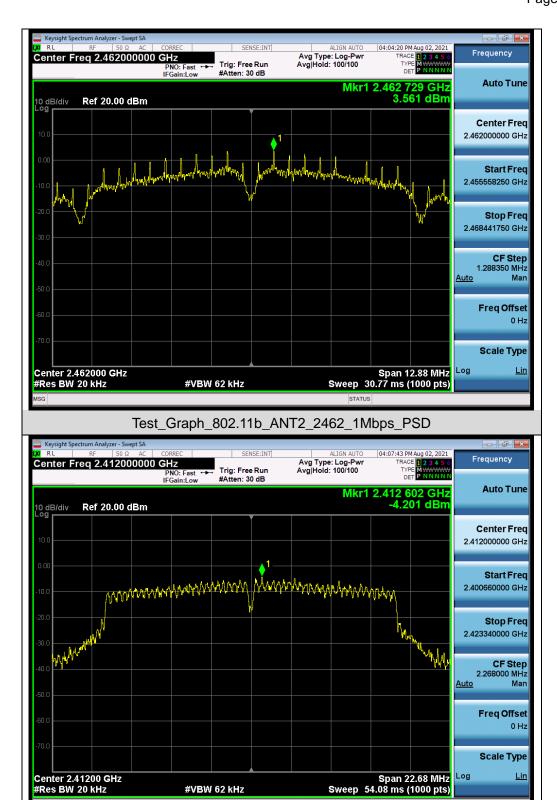

Test_Graph_802.11g_ANT2_2412_6Mbps_PSD



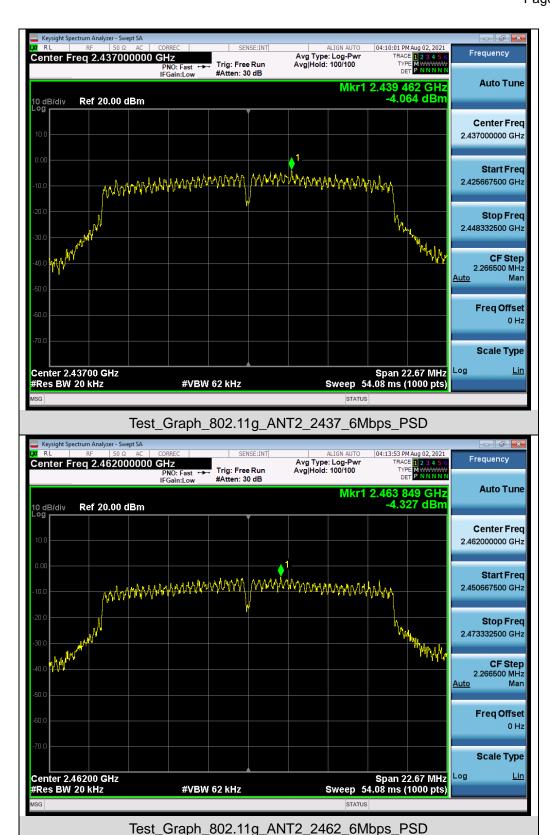


0 Hz

Scale Type

Span 22.67 MHz Sweep 54.08 ms (1000 pts)



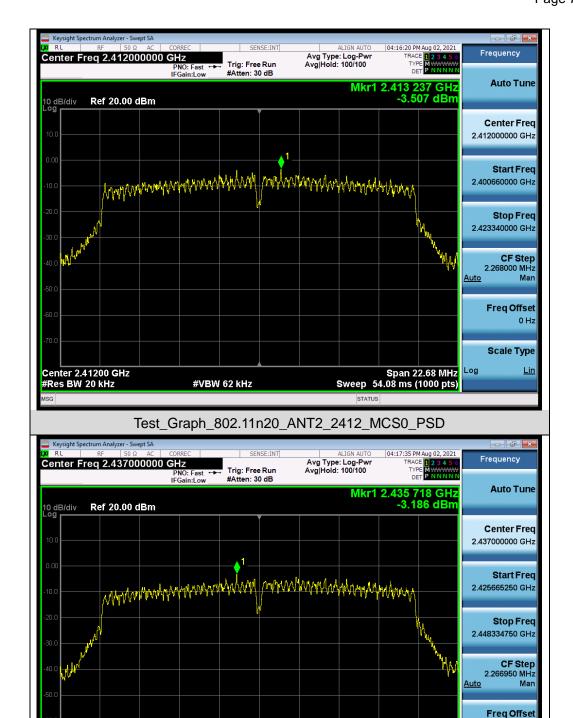

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n20_ANT2_2437_MCS0_PSD

#VBW 62 kHz


Center 2.43700 GHz #Res BW 20 kHz

Freq Offset 0 Hz

Scale Type

Span 53.50 MHz Sweep 127.5 ms (1000 pts)



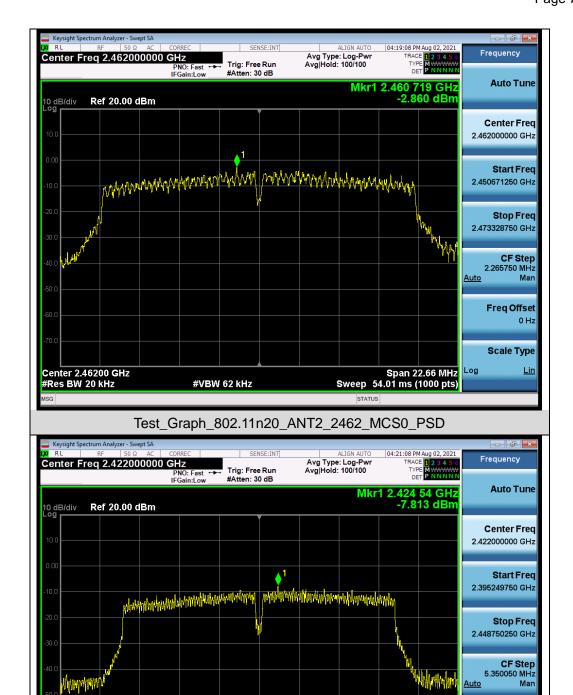


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_2422_MCS0_PSD

#VBW 62 kHz

Center 2.42200 GHz #Res BW 20 kHz



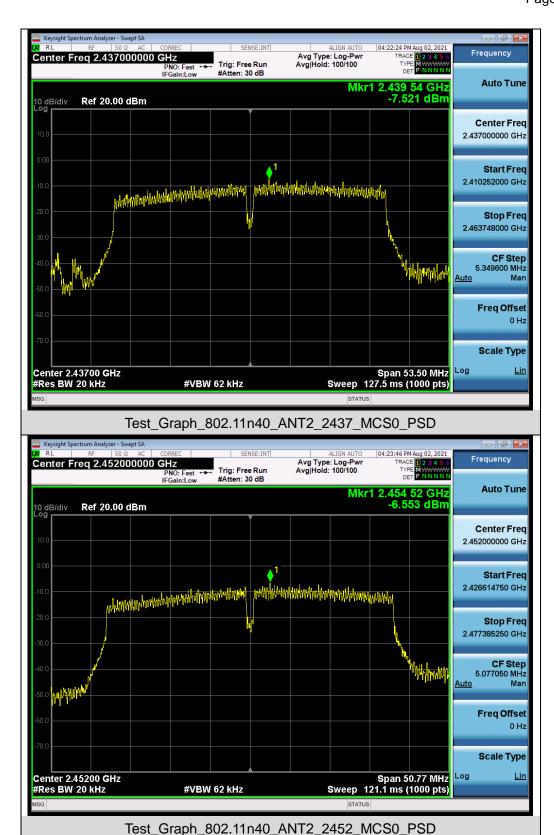



Report No.: AGC00210210705FE05 Page 73 of 120

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

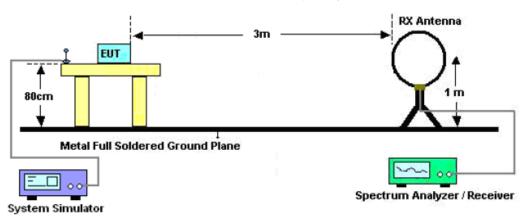

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

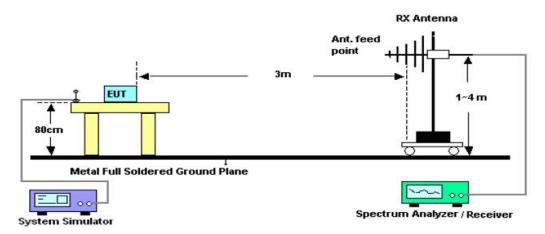

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

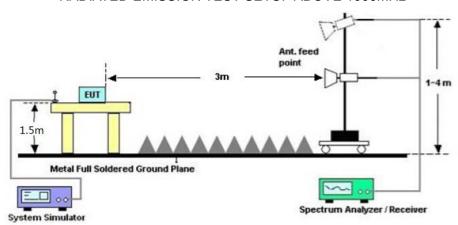



Report No.: AGC00210210705FE05

Page 75 of 120

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.






Radiated emission from 30MHz to 1000MHz

Power board A

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

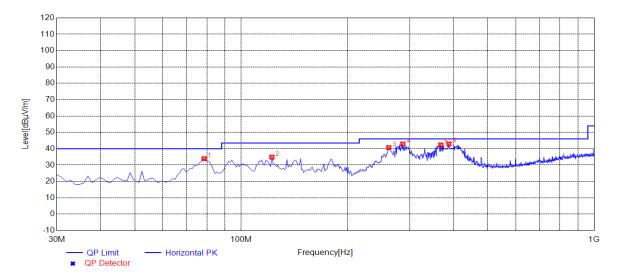


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	78.5000	33.93	7.46	40.00	6.07	100	89	Horizontal
2	122.1500	34.89	13.62	43.50	8.61	100	180	Horizontal
3	261.8300	40.72	14.71	46.00	5.28	100	242	Horizontal
4	287.0500	42.90	16.19	46.00	3.10	100	284	Horizontal
5	367.5600	42.33	18.53	46.00	3.67	100	1	Horizontal
6	387.9300	42.96	19.36	46.00	3.04	100	260	Horizontal


RESULT: PASS



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

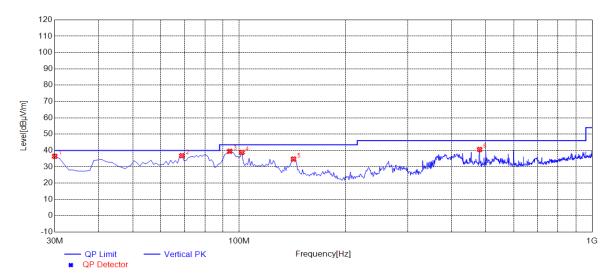


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.0000	36.43	9.85	40.00	3.57	100	269	Vertical
2	68.8000	36.80	9.43	40.00	3.20	100	303	Vertical
3	94.0200	39.52	8.92	43.50	3.98	100	145	Vertical
4	101.7800	38.82	11.56	43.50	4.68	100	82	Vertical
5	142.5200	34.78	14.88	43.50	8.72	100	16	Vertical
6	480.0800	40.62	21.72	46.00	5.38	100	103	Vertical






EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

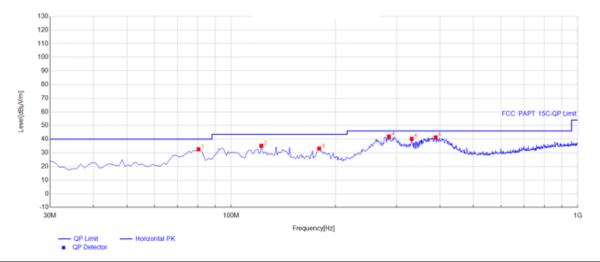


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	80.44	32.57	7.15	40.00	7.43	100	127	Horizontal
2	122.15	35.15	13.62	43.50	8.35	100	176	Horizontal
3	179.38	33.13	13.06	43.50	10.37	100	9	Horizontal
4	285.11	41.96	16.24	46.00	4.04	100	292	Horizontal
5	331.67	40.29	17.15	46.00	5.71	100	96	Horizontal
6	388.9	41.31	19.39	46.00	4.69	100	260	Horizontal






EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

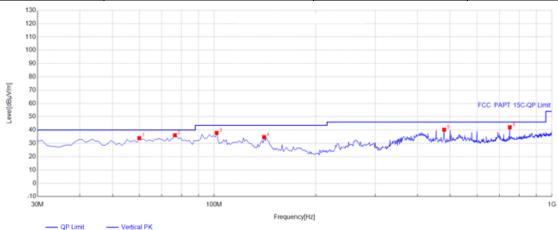


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	60.07	33.90	10.90	40.00	6.10	100	113	Vertical
2	76.56	36.11	7.87	40.00	3.89	100	126	Vertical
3	101.78	37.86	11.56	43.50	5.64	100	63	Vertical
4	140.58	34.70	14.88	43.50	8.80	100	14	Vertical
5	480.08	40.28	21.72	46.00	5.72	100	116	Vertical
6	750.71	42.13	27.24	46.00	3.87	100	232	Vertical






EUT	. VAVA Chroma 4K UST Triple Laser Projector		VA-SP003	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal	

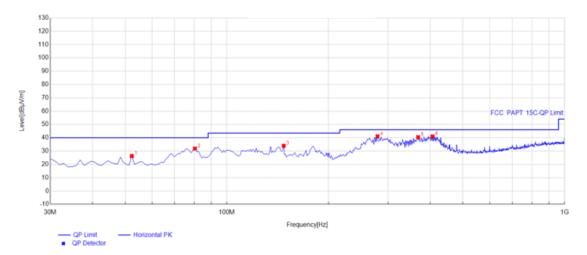


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.31	26.24	11.49	40.00	13.76	100	359	Horizontal
2	80.44	31.85	7.15	40.00	8.15	100	117	Horizontal
3	147.37	33.95	14.88	43.50	9.55	100	52	Horizontal
4	279.29	41.00	16.23	46.00	5.00	100	289	Horizontal
5	368.53	40.39	18.56	46.00	5.61	100	2	Horizontal
6	406.36	40.96	19.97	46.00	5.04	100	34	Horizontal





EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical	

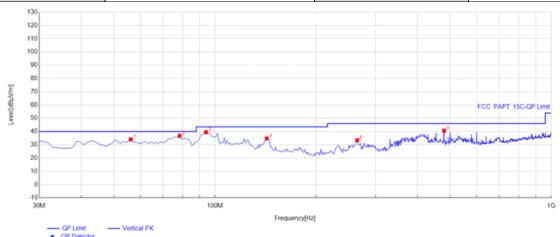


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	56.19	34.11	11.20	40.00	5.89	100	174	Vertical
2	78.5	36.80	7.46	40.00	3.20	100	145	Vertical
3	94.02	39.52	8.92	43.50	3.98	100	145	Vertical
4	142.52	34.78	14.88	43.50	8.72	100	16	Vertical
5	264.74	33.41	14.96	46.00	12.59	100	232	Vertical
6	480.08	40.62	21.72	46.00	5.38	100	103	Vertical



Power board B

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

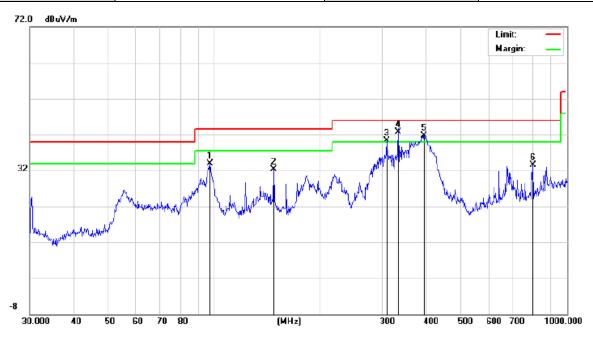


No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		97.1148	24.16	9.75	33.91	43.50	-9.59	peak
2		147.4036	20.21	12.10	32.31	43.50	-11.19	peak
3	İ	307.8313	23.68	16.62	40.30	46.00	-5.70	peak
4	*	332.5187	25.44	17.17	42.61	46.00	-3.39	QP
5	İ	393.4723	23.11	18.53	41.64	46.00	-4.36	peak
6		798.9797	14.08	19.40	33.48	46.00	-12.52	peak

RESULT: PASS




EUT	VAVA Chroma 4K UST Triple Laser Projector		VA-SP003	
Temperature	25°C	Relative Humidity	58%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical	

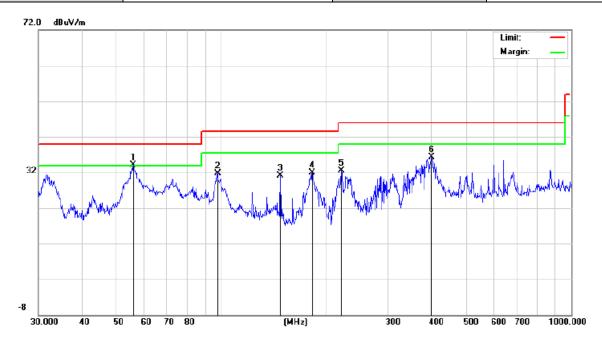

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	56.0007	23.65	10.47	34.12	40.00	-5.88	peak
2		97.4560	23.10	8.51	31.61	43.50	-11.89	peak
3		147.4036	18.73	12.47	31.20	43.50	-12.30	peak
4		181.9202	20.18	11.74	31.92	43.50	-11.58	peak
5		219.8449	22.31	10.22	32.53	46.00	-13.47	peak
6		399.0302	22.35	13.98	36.33	46.00	-9.67	peak



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

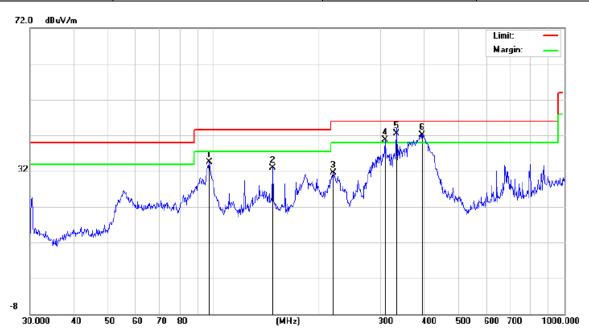

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		97.1148	24.66	9.75	34.41	43.50	-9.09	peak
2		147.4036	20.71	12.10	32.81	43.50	-10.69	peak
3		219.0752	24.14	7.32	31.46	46.00	-14.54	peak
4	İ	307.8312	24.18	16.62	40.80	46.00	-5.20	peak
5	*	332.5187	25.38	17.17	42.55	46.00	-3.45	QP
6	İ	393.4723	23.61	18.53	42.14	46.00	-3.86	peak




EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical



No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		31.6202	24.66	7.22	31.88	40.00	-8.12	peak
2	×	56.0007	24.15	10.47	34.62	40.00	-5.38	peak
3		97.4560	23.60	8.51	32.11	43.50	-11.39	peak
4		181.9201	20.18	11.74	31.92	43.50	-11.58	peak
5		219.8448	22.31	10.22	32.53	46.00	-13.47	peak
6		399.0300	22.35	13.98	36.33	46.00	-9.67	peak



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

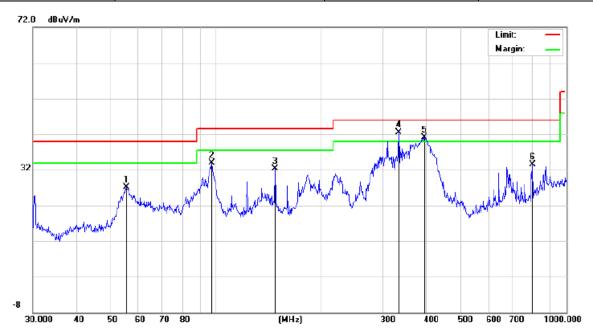

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		55.4147	16.80	10.22	27.02	40.00	-12.98	peak
2		97.1148	24.16	9.75	33.91	43.50	-9.59	peak
3		147.4036	20.21	12.10	32.31	43.50	-11.19	peak
4	*	332.5187	25.37	17.17	42.54	46.00	-3.46	QP
5	İ	393.4723	22.61	18.53	41.14	46.00	-4.86	peak
6		798.9796	14.08	19.40	33.48	46.00	-12.52	peak



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		31.6202	23.16	7.22	30.38	40.00	-9.62	peak
2	*	56.0007	23.15	10.47	33.62	40.00	-6.38	peak
3		97.4560	22.10	8.51	30.61	43.50	-12.89	peak
4		219.8448	21.81	10.22	32.03	46.00	-13.97	peak
5		399.0300	22.85	13.98	36.83	46.00	-9.17	peak
6		640.6109	15.99	20.03	36.02	46.00	-9.98	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b of antenna 1 is the worst case and recorded in the report.



Report No.: AGC00210210705FE05

Page 88 of 120

Radiated emission above 1GHz

Power board A

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4824.000	57.24	0.08	57.32	74	-16.68	peak			
4824.000	46.29	0.08	46.37	54	-7.63	AVG			
7236.000	50.27	2.21	52.48	74	-21.52	peak			
7236.000	42.16	2.21	44.37	54	-9.63	AVG			
temark:									
actor = Anter	nna Factor + Cab	e Loss – Pre-a	mplifier.	•					

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type				
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type				
4824.000	57.16	0.08	57.24	74	-16.76	peak				
4824.000	43.28	0.08	43.36	54	-10.64	AVG				
7236.000	51.18	2.21	53.39	74	-20.61	peak				
7236.000	40.97	2.21	43.18	54	-10.82	AVG				
Remark:	•		•			-				
Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.							



Report No.: AGC00210210705FE05 Page 89 of 120

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	57.46	0.14	57.6	74	-16.4	peak
4874.000	46.23	0.14	46.37	54	-7.63	AVG
7311.000	52.47	2.36	54.83	74	-19.17	peak
7311.000	43.15	2.36	45.51	54	-8.49	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874.000	56.74	0.14	56.88	74	-17.12	peak
4874.000	46.22	0.14	46.36	54	-7.64	AVG
7311.000	50.35	2.36	52.71	74	-21.29	peak
7311.000	40.12	2.36	42.48	54	-11.52	AVG
Remark:						
actor = Anter	na Factor + Cable	Loss – Pre-	amplifier.			



Report No.: AGC00210210705FE05 Page 90 of 120

VA-SP003


EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4924.000	55.63	0.22	55.85	74	-18.15	peak
4924.000	45.12	0.22	45.34	54	-8.66	AVG
7386.000	49.37	2.64	52.01	74	-21.99	peak
7386.000	39.51	2.64	42.15	54	-11.85	AVG
Remark:	1				Į	1
Factor = Anten	ına Factor + Cabl	e Loss – Pre-a	mplifier.			

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	57.43	0.22	57.65	74	-16.35	peak
4924.000	48.35	0.22	48.57	54	-5.43	AVG
7386.000	52.18	2.64	54.82	74	-19.18	peak
7386.000	42.37	2.64	45.01	54	-8.99	AVG
Remark:	1		'		I.	•
Factor = Anter	nna Factor + Cabl	e Loss – Pre-a	amplifier.			

RESULT: PASS





Power board B

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	57.64	0.08	57.72	74	-16.28	peak
4824.000	46.25	0.08	46.33	54	-7.67	AVG
7236.000	52.43	2.21	54.64	74	-19.36	peak
7236.000	43.67	2.21	45.88	54	-8.12	AVG
Remark:						
actor = Anter	nna Factor + Cab	e Loss – Pre-	amnlifier	•	•	•

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	57.43	0.08	57.51	74	-16.49	peak
4824.000	45.16	0.08	45.24	54	-8.76	AVG
7236.000	52.34	2.21	54.55	74	-19.45	peak
7236.000	41.19	2.21	43.4	54	-10.6	AVG
Remark:	•					-
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC00210210705FE05

Page 92 of 120

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	56.34	0.14	56.48	74	-17.52	peak
4874.000	47.15	0.14	47.29	54	-6.71	AVG
7311.000	51.26	2.36	53.62	74	-20.38	peak
7311.000	42.19	2.36	44.55	54	-9.45	AVG
Remark:						•
actor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			_

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value Type
4874.000	56.74	0.14	56.88	74	-17.12	peak
4874.000	46.22	0.14	46.36	54	-7.64	AVG
7311.000	50.35	2.36	52.71	74	-21.29	peak
7311.000	40.12	2.36	42.48	54	-11.52	AVG
emark:						



Report No.: AGC00210210705FE05 Page 93 of 120

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	55.43	0.22	55.65	74	-18.35	peak
4924.000	43.28	0.22	43.5	54	-10.5	AVG
7386.000	49.61	2.64	52.25	74	-21.75	peak
7386.000	40.25	2.64	42.89	54	-11.11	AVG
_						
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	56.37	0.22	56.59	74	-17.41	peak
4924.000	48.51	0.22	48.73	54	-5.27	AVG
7386.000	51.08	2.64	53.72	74	-20.28	peak
7386.000	42.15	2.64	44.79	54	-9.21	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode of antenna 1 is the worst case and recorded in the report.



Test result for band edge emission at restricted bands

EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS



EUT	VAVA Chroma 4K UST Triple Laser Projector	Model Name	VA-SP003
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

