



TEST REPORT

No.I20N02988-SAR

For

Guangdong OPPO Mobile Telecommunications Corp., Ltd.

Mobile Phone

Model Name: CPH2205

With

Hardware Version: 11

Software Version: ColorOS V11.1

FCC ID: R9C-CPH2205

Issued Date: 2021-01-09

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@saict.ac.cn www.saict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20N02988-SAR	Rev.0	1st edition	2021-01-09

CONTENTS

1. SUMMARY OF TEST REPORT	5
1.1. TEST ITEMS	5
1.2. TEST STANDARDS	5
1.3. TEST RESULT.....	5
1.4. TESTING LOCATION	5
1.5. PROJECT DATA	5
1.6. SIGNATURE.....	5
2. STATEMENT OF COMPLIANCE	6
3. CLIENT INFORMATION	9
3.1. APPLICANT INFORMATION.....	9
3.2. MANUFACTURER INFORMATION	9
4. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
4.1. ABOUT EUT	10
4.2. POWER REDUCTION SPECIFICATION.....	12
4.3. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	13
4.4. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	13
5. TEST METHODOLOGY	14
5.1. APPLICABLE LIMIT REGULATIONS.....	14
5.2. APPLICABLE MEASUREMENT STANDARDS	14
6. SPECIFIC ABSORPTION RATE (SAR).....	15
6.1. INTRODUCTION.....	15
6.2. SAR DEFINITION.....	15
7. TISSUE SIMULATING LIQUIDS	16
7.1. TARGETS FOR TISSUE SIMULATING LIQUID	16
7.2. DIELECTRIC PERFORMANCE	16
8. SYSTEM VERIFICATION	21
8.1. SYSTEM SETUP.....	21
8.2. SYSTEM VERIFICATION	22
9. MEASUREMENT PROCEDURES	23
9.1. TESTS TO BE PERFORMED.....	23
9.2. GENERAL MEASUREMENT PROCEDURE	25
9.3. WCDMA MEASUREMENT PROCEDURES FOR SAR	26
9.4. LTE MEASUREMENT PROCEDURES FOR SAR.....	27
9.5. LTE (TDD) CONSIDERATIONS.....	27
9.6. BLUETOOTH & WLAN MEASUREMENT PROCEDURES FOR SAR.....	29
9.7. POWER DRIFT.....	29

10. CONDUCTED OUTPUT POWER	30
10.1. GSM MEASUREMENT RESULT	30
10.2. WCDMA MEASUREMENT RESULT	36
10.3. LTE MEASUREMENT RESULT	44
10.4. WLAN AND BLUETOOTH MEASUREMENT RESULT	263
11. SIMULTANEOUS TX SAR CONSIDERATIONS	269
11.1. INTRODUCTION	269
11.2. TRANSMIT ANTENNA SEPARATION DISTANCES	269
11.3. SAR MEASUREMENT POSITIONS	270
11.4. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	270
12. EVALUATION OF SIMULTANEOUS.....	271
13. SUMMARY OF TEST RESULTS.....	272
13.1. TESTING ENVIRONMENT	272
13.2. SAR RESULTS.....	273
13.3. WLAN EVALUATION FOR 2.4G	315
13.4. WLAN EVALUATION FOR 5G	317
14. SAR MEASUREMENT VARIABILITY	322
15. MEASUREMENT UNCERTAINTY	324
15.1. MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	324
15.2. MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3GHz~6GHz)	325
16. MAIN TEST INSTRUMENTS.....	326
ANNEX A: GRAPH RESULTS	327
ANNEX B: SYSTEMVERIFICATION RESULTS.....	359
ANNEX C: SAR MEASUREMENT SETUP.....	368
ANNEX D: POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	374
ANNEX E: EQUIVALENT MEDIA RECIPES	377
ANNEX F: SYSTEM VALIDATION.....	378
ANNEX G: DAE CALIBRATION CERTIFICATE	379
ANNEX H: PROBE CALIBRATION CERTIFICATE	382
ANNEX I: DIPOLE CALIBRATION CERTIFICATE	392
ANNEX J: EXTENDED CALIBRATION SAR DIPOLE.....	454



1. Summary of Test Report

1.1. Test Items

Description: Mobile Phone
Model Name: CPH2205
Applicant's name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Manufacturer's Name: Guangdong OPPO Mobile Telecommunications Corp., Ltd.

1.2. Test Standards

ANSI C95.1-1992, IEEE 1528-2013

1.3. Test Result

Pass. Please refer to "13. Summary of Test Results"

1.4. Testing Location

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project Data

Testing Start Date: 2020-12-04

Testing End Date: 2020-12-28

1.6. Signature

Li Yongfu

(Prepared this test report)

Zhang Yunzhuan

(Reviewed this test report)

Cao Junfei

(Approved this test report)

2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Guangdong OPPO Mobile Telecommunications Corp., Ltd. Mobile Phone CPH2205 are as follows:

Table 2.1: Highest Reported SAR for Head (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM850	0.82	PCE
	PCS1900	0.80	
	WCDMA Band2	1.13	
	WCDMA Band4	1.07	
	WCDMA Band5	0.57	
	LTE Band 2	1.06	
	LTE Band 4	1.00	
	LTE Band 7	0.72	
	LTE Band 12	0.35	
	LTE Band 26	0.40	
	LTE Band 38	1.01	
	LTE Band 41	0.95	
	LTE Band 66	1.08	
	Bluetooth	0.17	DSS
	WLAN 2.4GHz	0.99	DTS
	WLAN 5GHz	1.03	NII

Table 2.2: Highest Reported SAR for Hotspot (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Hotspot (Separation Distance 10mm)	GSM850	0.61	PCE
	PCS1900	1.03	
	WCDMA Band2	1.07	
	WCDMA Band4	1.06	
	WCDMA Band5	0.32	
	LTE Band 2	1.03	
	LTE Band 4	0.92	
	LTE Band 7	0.66	
	LTE Band 12	0.15	
	LTE Band 26	0.24	
	LTE Band 38	0.58	
	LTE Band 41	0.79	
	LTE Band 66	1.01	
	Bluetooth	0.08	DSS
	WLAN 2.4GHz	0.49	DTS
	WLAN 5GHz	1.17	NII

Table 2.3: Highest Reported SAR for Body-worn (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Body-worn (Separation Distance 15mm)	GSM850	0.38	PCE
	PCS1900	0.38	
	WCDMA Band2	0.39	
	WCDMA Band4	0.34	
	WCDMA Band5	0.15	
	LTE Band 2	0.35	
	LTE Band 4	0.29	
	LTE Band 7	0.41	
	LTE Band 12	0.08	
	LTE Band 26	0.17	
	LTE Band 33	0.27	
	LTE Band 41	0.24	
	LTE Band 66	0.26	
	Bluetooth	0.05	DSS
	WLAN 2.4GHz	0.16	DTS
	WLAN 5GHz	0.26	NII

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of **(Table 2.1 & 2.2 & 2.3)**, head value is **1.13 W/kg (1g)**, Hotspot value is **1.17 W/kg (1g)** and Body-worn value is **0.41 W/kg (1g)**.

Table 2.4: The sum of reported SAR values for WWAN antenna and WLAN

<i>I</i>	Position	WWAN	WLAN	Sum
Highest reported SAR value for Head	Right Tilt	0.85	0.54	1.39
Highest reported SAR value for Hotspot	Rear	0.79	0.49	1.28
Highest reported SAR value for Body-worn	Rear	0.38	0.16	0.54

Note: the test positions of above tables are for the worse case that has been evaluated.

Table2.5: The sum of reported SAR values for WWAN antenna and Bluetooth

<i>I</i>	Position	WWAN	Bluetooth	Sum
Highest reported SAR value for Head	Right Tilt	0.85	0.07	0.92
Highest reported SAR value for Hotspot	Bottom	1.06	/	1.06
Highest reported SAR value for Body-worn	Rear	0.38	0.05	0.43

Note: the test positions of above tables are for the worse case that has been evaluated.

According to the above tables, the highest sum of reported SAR values is **1.39 W/kg (1g)**.

The detail for simultaneous transmission consideration is described in chapter 12.

3. Client Information

3.1. Applicant Information

Company Name:	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address:	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China
City:	DongGuan
Country:	China
Telephone:	(86)76986076999

3.2. Manufacturer Information

Company Name:	Guangdong OPPO Mobile Telecommunications Corp., Ltd.
Address:	NO.18 Haibin Road, Wusha Village, Chang'an Town, Dongguan City, Guangdong, China
City:	DongGuan
Country:	China
Telephone:	(86)76986076999

4. Equipment under Test (EUT) and Ancillary Equipment (AE)

4.1. About EUT

Description:	Mobile Phone
Model Name:	CPH2205
Condition of EUT as received:	No obvious damage in appearance
Frequency Bands:	GSM 850/1900, WCDMA Band 2/4/5, Bluetooth, LTE Band 2/4/5/7/12/17/18/19/26/38/41/66, WLAN 2.4G/5G
Tested Tx Frequency:	824 – 849MHz (GSM 850)
	1850 – 1910MHz (GSM 1900)
	1850 – 1910MHz (WCDMA Band 2)
	1710 – 1755MHz (WCDMA Band 4)
	824 – 849MHz (WCDMA Band 5)
	1850 – 1910MHz (LTE Band 2)
	1710 – 1755MHz (LTE Band 4)
	824 – 849MHz (LTE Band 5)
	2500 – 2570MHz (LTE Band 7)
	699 – 716MHz (LTE Band 12)
	704 – 716MHz (LTE Band 17)
	815 – 830MHz (LTE Band 18)
	830 – 845MHz (LTE Band 19)
	814 – 849MHz (LTE Band 26)
	2570 – 2620MHz (LTE Band 38)
	2496 – 2690MHz (LTE Band 41)
	1710 – 1780MHz (LTE Band 66)
	2402 – 2480MHz (Bluetooth)
	2412 – 2462MHz (WLAN 2.4G)
	5180 – 5825MHz (WLAN 5G)
GPRS / EGPRS Multislot Class:	12
GPRS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support
Product Dimensions:	Long 160.1mm ;Wide 73.2mm ; Overall Diagonal 170mm
Display Diagonal:	159mm
Remark: 1. This device does not support DTM operation. 2. This device has WWAN Top and Bottom transmitter antennas which can refer to antenna location chapter. 3. The device is capable of switching between the top antenna and bottom antenna based on signal strength.	

4. There are totally 6 power reduction levels of WWAN antenna and 3 power reduction levels of WLAN antenna, detail descriptions of the power reduction mechanism are included in the operational description.

5. For WWAN transmitter (6 sets of power reduction levels).

a) Head exposure conditions:

Reduced power level 1 – GSM850/1900, WCDMA Band 2/4, LTE Band 2/4/7/38/41/66

While the device WWAN is transmitting at the WWAN Top antenna and the audio is actively routed through the receiver, power reduction enabled for those bands.

Reduced power level 2 – GSM850/1900, WCDMA Band 2/4, LTE Band 2/4/7/38/41/66

While the device WLAN 2.4G or WLAN 5G is transmitting simultaneously with the WWAN Top antenna, and the audio is actively routed through the receiver, power reduction enabled for those bands.

b) Body exposure condition

Reduced power level 3 – GSM1900, WCDMA Band 2/4, LTE Band 2/4/7/66

While the device is transmitting at the WWAN Top antenna, power reduction enabled for those bands.

Reduced power level 4 – WCDMA Band 2, LTE Band 2/66

While the device is transmitting at the WWAN Bottom antenna, power reduction enabled for those bands.

Reduced power level 5 – GSM1900, WCDMA Band 2/4, LTE Band 2/4/7/66

While the device WLAN 2.4G or WLAN 5G is transmitting simultaneously with the WWAN Top antenna, power reduction enabled for those bands.

Reduced power level 6 – WCDMA Band 2, LTE Band 2/4/7/66

While the device WLAN 2.4G or WLAN 5G is transmitting simultaneously with the WWAN Bottom antenna, power reduction enabled for those bands.

5. For WLAN transmitter (3 sets of power reduction levels).

a) Head exposure conditions:

Reduced power level 7 – WLAN 2.4G, WLAN 5.2G, WLAN 5.3G, WLAN 5.5G, WLAN 5.8G

While the device WLAN 2.4G or 5G is transmitting, power reduction enabled for those bands.

Reduced power level 8 – WLAN 2.4G, WLAN 5.2G, WLAN 5.3G, WLAN 5.5G, WLAN 5.8G

While the device WLAN 2.4G or WLAN 5G is transmitting simultaneously with the WWAN antenna, power reduction enabled for those bands.

b) Body exposure condition.

Reduced power level 9 – WLAN 5.2G, WLAN 5.3G, WLAN 5.5G, WLAN 5.8G

While the device WLAN 5G is transmitting simultaneously with the WWAN antenna, power reduction enabled for this band.

4.2. Power reduction specification

The following tables summarize the key power reduction information. The detailed full power which is the maximum power the state can use and reduced tune-up specifications and conducted power measurement results are provided in chapter 12 of this report.

Band	Top Antenna				Bottom Antenna		
	Head	Head	Body	Body	Head	Body	Body
	Reduced power level 1	Reduced power level 2	Reduced power level 3	Reduced power level 5	Normal	Reduced power level 4	Reduced power level 6
GSM850	-1.0	-2.0	0	0	0	0	0
GSM1900	-5.5	-6.5	-0.5	-1.5	0	0	0
WCDMA B2	-7.5	-8.5	-2.5	-4.5	0	-1.5	-2.5
WCDMA B4	-6.5	-7.5	-2.0	-3.0	0	0	0
WCDMA B5	0	0	0	0	0	0	0
LTE Band2	-7.0	-8.0	-2.0	-4.0	0	-1.0	-2.0
LTE Band4	-6.0	-7.0	-1.0	-2.0	0	0	-1.0
LTE Band5	0	0	0	0	0	0	0
LTE Band7	-7.0	-8.0	-2.5	-3.5	0	0	-1.0
LTE Band12	0	0	0	0	0	0	0
LTE Band17	0	0	0	0	0	0	0
LTE Band18	0	0	0	0	0	0	0
LTE Band19	0	0	0	0	0	0	0
LTE Band26	0	0	0	0	0	0	0
LTE Band38	-3.5	-4.5	0	0	0	0	0
LTE Band41	-4.0	-4.5	0	0	0	0	0
LTE Band66	-6.0	-8.0	-1.5	-2.5	0	-0.5	-1.5
Band	WLAN Antenna						
	Head		Head		Body		
	Reduced power level 7		Reduced power level 8		Reduced power level 9		
WLAN2.4G	-3.0		-4.0		0		
WLAN5.2G	-5.0		-6.0		-3.0		
WLAN5.3G	-5.0		-6.0		-3.0		
WLAN5.5G	-4.0		-5.0		-3.0		
WLAN5.8G	-3.0		-4.0		-2.0		

4.3. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
UT09aa	866811050019234	11	ColorOS V11.1
UT10aa	866811050019218	11	ColorOS V11.1
UT11aa	866811050019192	11	ColorOS V11.1

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the UT10aa&11aa, and conducted power with the UT 09aa.

4.4. Internal Identification of AE used during the test

AE ID*	Description	Type	Manufacturer
AE1	Battery	BLP835	SUNWODA Electronic Co., Ltd.
AE1	Battery	BLP835	TWS Technology(Guangzhou) Limited
AE2	Headset	MH156	JiangXi Risound Electronics CO.,LTD
AE3	Headset	MH156	GuangDong Allwin Technology Co., Ltd

*AE ID: is used to identify the test sample in the lab internally.

Note: The device has two types of batteries. AE1 battery was used for the initial test, AE2 battery was used for verification tests with the worst configuration.

5. Test Methodology

5.1. Applicable Limit Regulations

ANSI C95.1–1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2. Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Experimental Techniques.

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB 648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB 941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB 941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB 941225 D06 Hot Spot SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB 248227 D01 802.11 Wi-Fi SAR v02r02: SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters.

KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB 865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

KDB 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02: REL. 10 LTE SAR TEST GUIDANCE AND KDB INQUIRIES

TCB workshop April 2019; RF Exposure Procedures (Tissue Simulating Liquids)

6. Specific Absorption Rate (SAR)

6.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7. Tissue Simulating Liquids

7.1. Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.9	39.8~44.0
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
1750	Head	1.37	1.30~1.44	40.1	38.1~42.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2550	Head	1.91	1.81~2.01	39.1	37.1~41.0
5250	Head	4.71	4.47~4.95	35.9	34.1~37.7
5600	Head	5.07	4.82~5.32	35.5	33.8~37.3
5750	Head	5.22	4.96~5.48	35.4	33.6~37.1

7.2. Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Conductivity σ (S/m)	Drift (%)	Permittivity ϵ	Drift (%)
2020-12-04	Head	750	0.908	2.02	41.04	-2.05
2020-12-07	Head	835	0.915	1.67	40.78	-1.73
2020-12-24	Head	1750	1.353	-1.24	40.55	1.12
2020-12-22	Head	1900	1.415	1.07	39.43	-1.43
2020-12-10	Head	2450	1.835	1.94	38.26	-2.40
2020-12-16	Head	2550	1.949	2.04	38.09	-2.58
2020-12-26	Head	5250	4.802	1.95	35.44	-1.28
2020-12-27	Head	5600	4.994	-1.50	35.98	1.35
2020-12-28	Head	5750	5.147	-1.40	36.21	2.29


Note: The liquid temperature is 22.0°C.

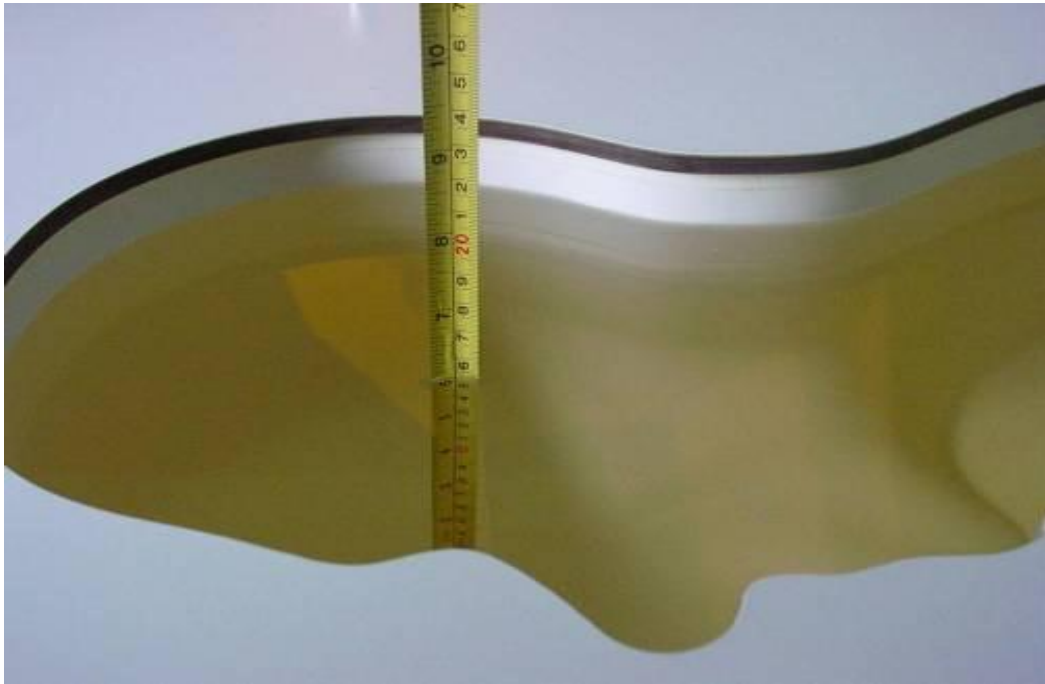

Picture 7-1: Liquid depth in the Head Phantom (750 MHz)




Picture 7-2: Liquid depth in the Head Phantom (835 MHz)

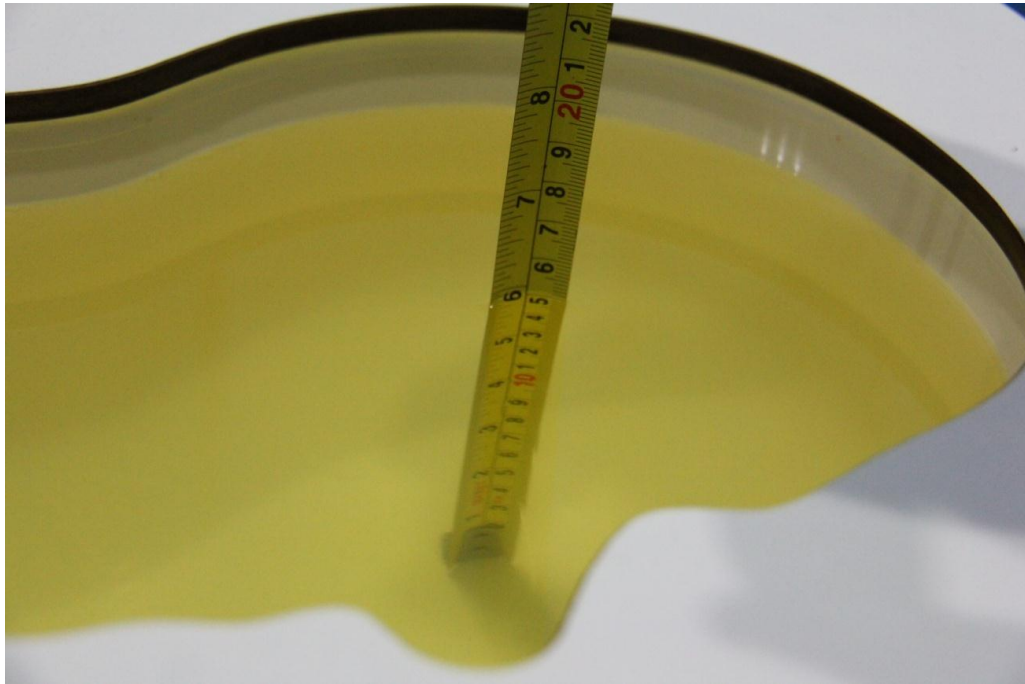


Picture 7-3: Liquid depth in the Head Phantom (1750 MHz)



Picture 7-4: Liquid depth in the Head Phantom (1900 MHz)

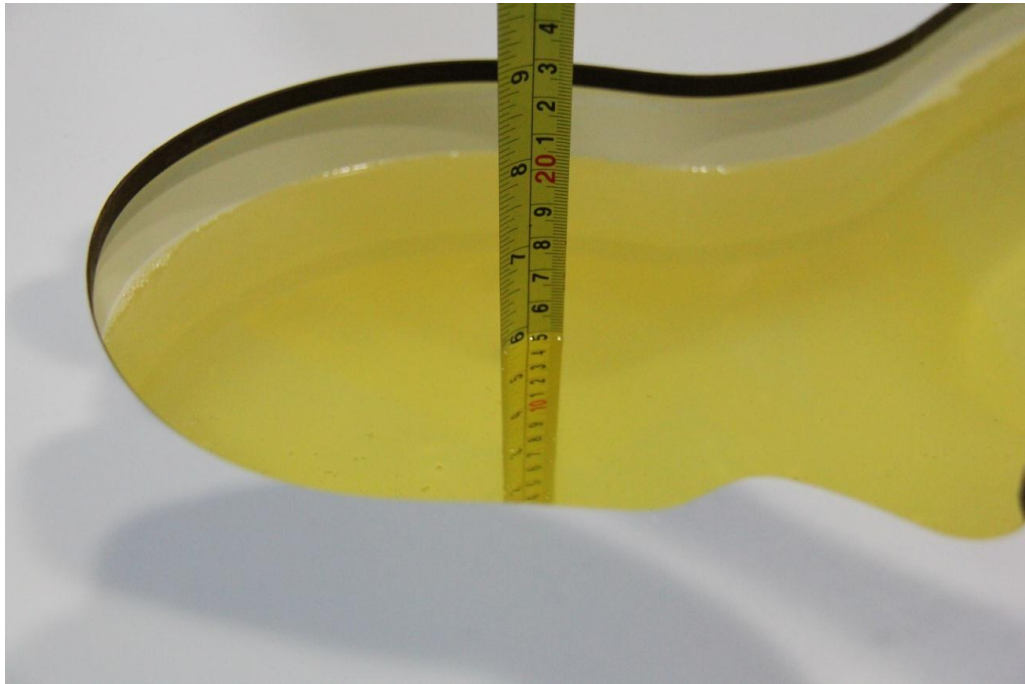

Picture 7-5: Liquid depth in the Head Phantom(2450MHz)

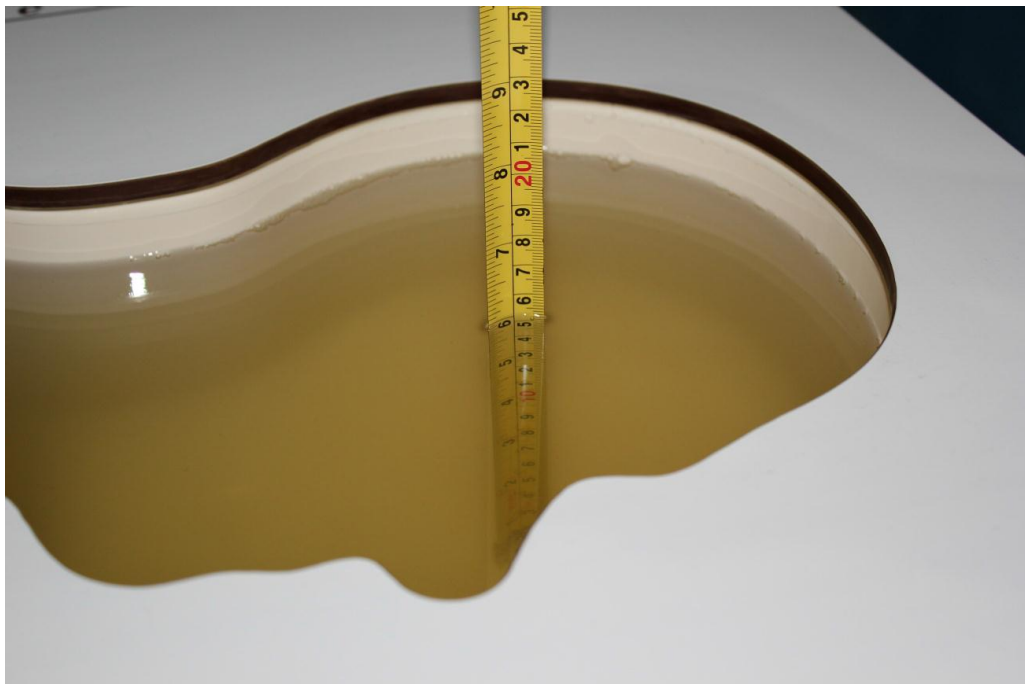

Picture 7-6: Liquid depth in the Head Phantom(2550MHz)




Picture 7-7: Liquid depth in the Head Phantom(5GHz)

8. System verification

8.1. System Setup


In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

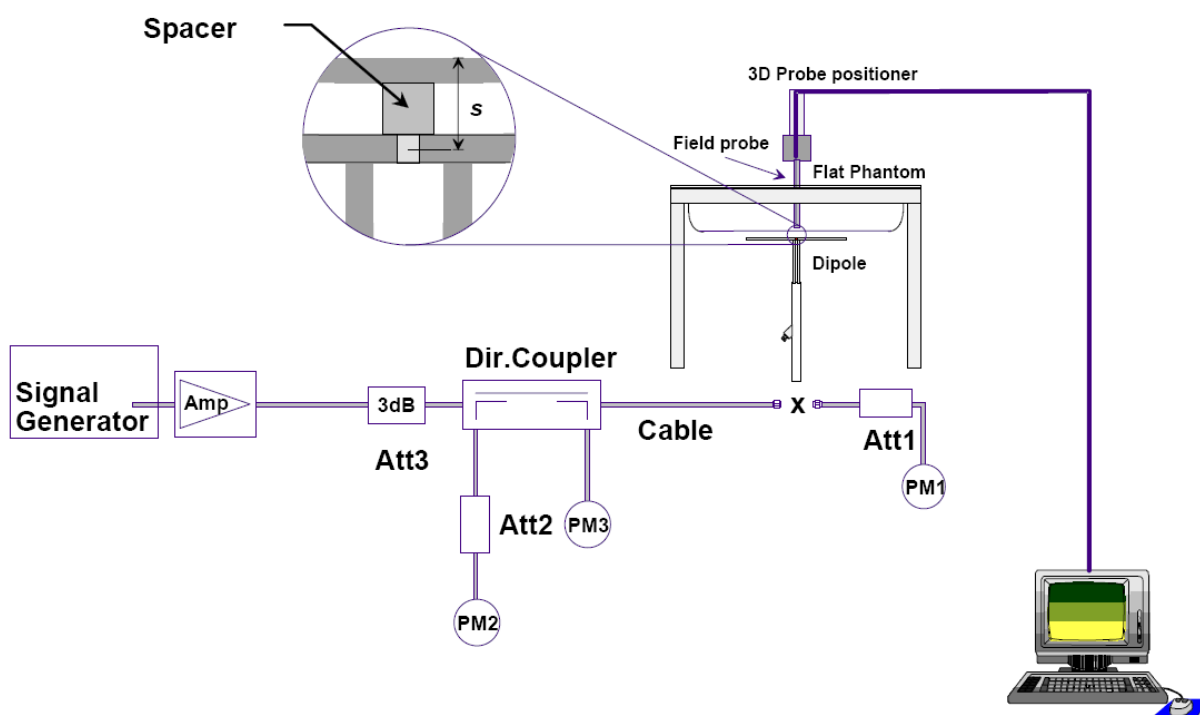

Picture 8.1 System Setup for System Evaluation

For the dipole below 3GHz, the output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

For the dipole above 3GHz, the output power on dipole port must be calibrated to 20 dBm (100mW) before dipole is connected.

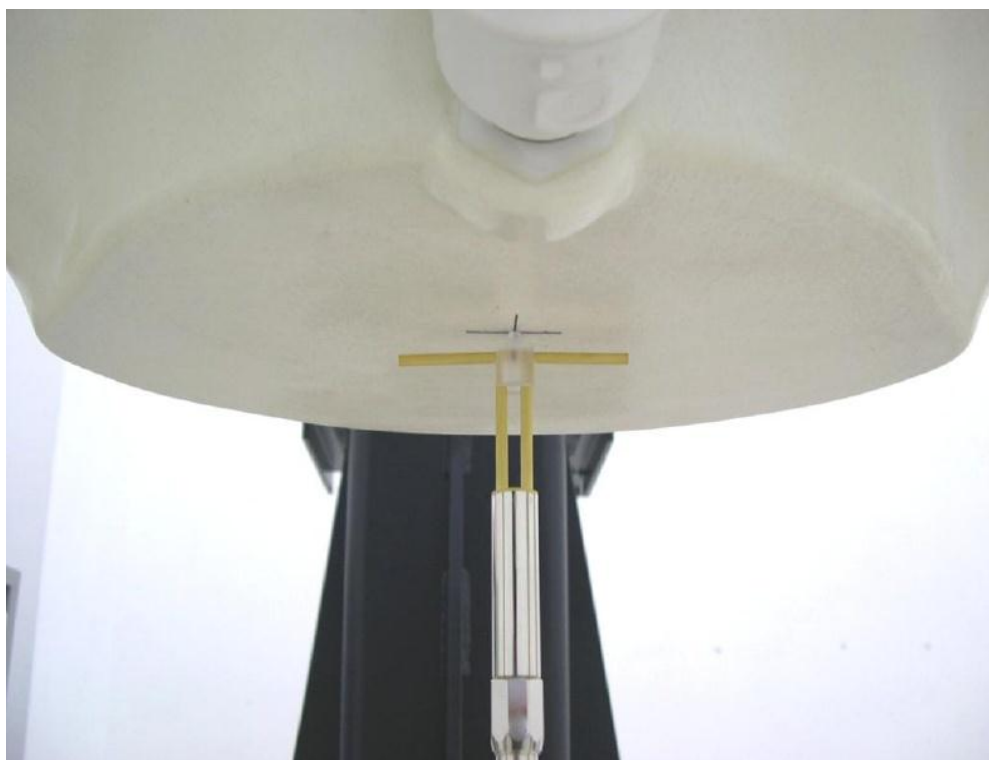

Picture 8.2 Photo of Dipole Setup

8.2. System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

Table 8.1: System Verification of Head

Measurement Date	Frequency (MHz)	Target value (W/kg)		Measured value (W/kg)				Deviation (%)	
				/		Normalize to 1W			
		10 g	1 g	10 g	1 g	10 g	1 g	10 g	1 g
2020-12-04	750	5.70	8.53	1.44	2.18	5.76	8.72	1.05	2.23
2020-12-07	835	6.29	9.62	1.62	2.51	6.48	10.04	3.02	4.37
2020-12-24	1750	19.30	36.40	4.78	8.92	19.12	35.68	-0.93	-1.98
2020-12-22	1900	21.00	40.50	5.38	10.5	21.52	42.00	2.48	3.70
2020-12-10	2450	24.10	52.00	6.19	13.5	24.76	54.00	2.74	3.85
2020-12-16	2550	26.50	57.80	6.83	15.1	27.32	60.40	3.09	4.50
2020-12-26	5250	22.70	79.50	2.32	8.34	23.20	83.40	2.20	4.91
2020-12-27	5600	22.30	78.00	2.17	7.45	21.70	74.50	-2.69	-4.49
2020-12-28	5750	22.20	78.40	2.19	7.53	21.90	75.30	-1.35	-3.95

9. Measurement Procedures

9.1. Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_C > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

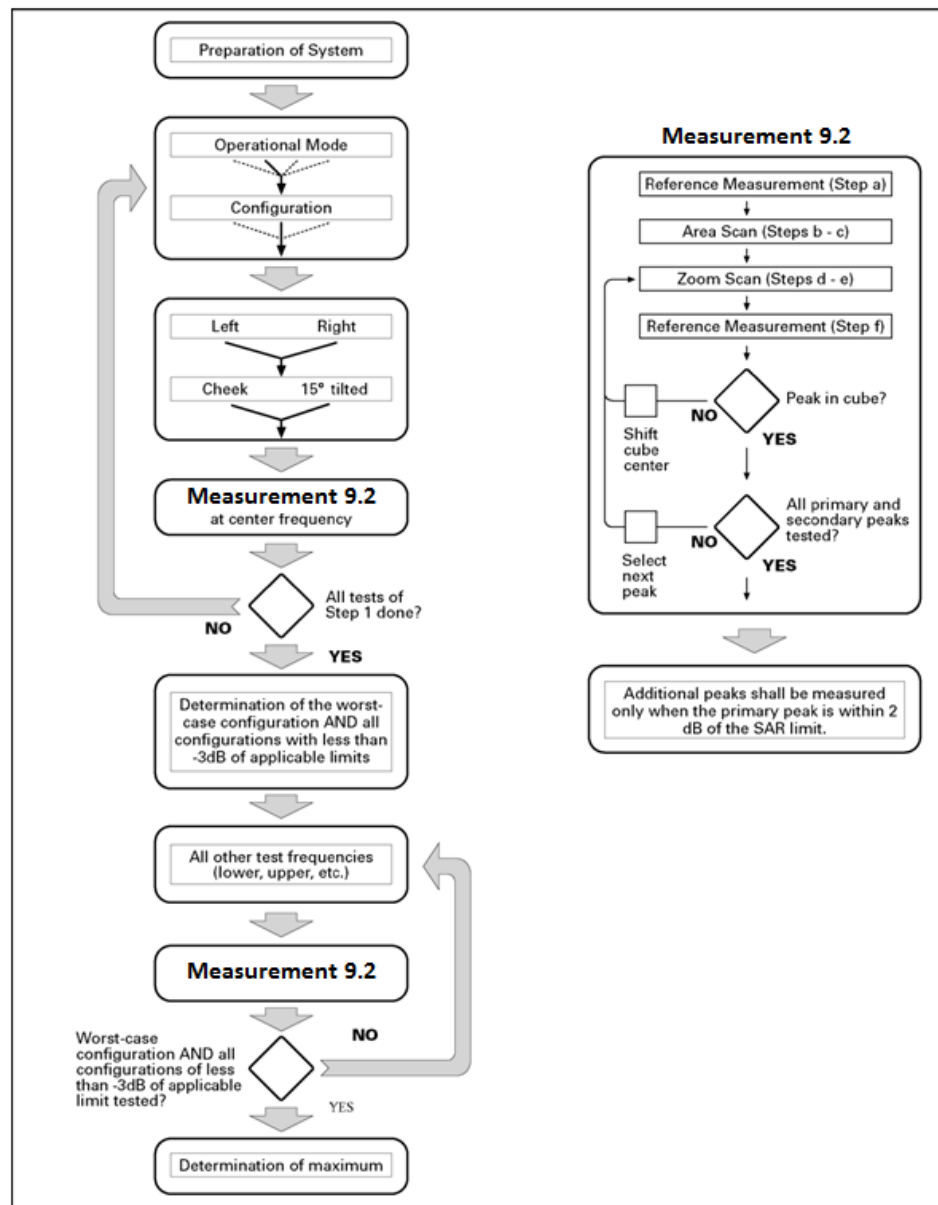

Picture 9.1 Block diagram of the tests to be performed

9.2. General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{4} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3. WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	3.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.0	0.0	21	81

9.4. LTE Measurement Procedures for SAR

SAR tests for LTE are performed with a base station simulator, Anristu MT8820C. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the Anristu MT8820C. It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 41 support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times$ (T_s) $\times$ # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

Where

$T_s = 1/(15000 \times 2048)$ seconds

Note:

1. From May 2017 TCB Workshop, HPUE does not support uplink-downlink configurations 0 and 6.
2. This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% (Power Class 3) and configuration 1 at 43.3% (Power Class 2) duty cycle.

9.6. Bluetooth & WLAN Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.7. Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10. Conducted Output Power

10.1. GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 10.1: The conducted power measurement results for GSM

Top Antenna - Full Power				
GSM 850MHz	Tune up	Conducted Power (dBm)		
		Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	33.5	32.48	32.43	32.44
GSM 1900MHz	Tune up	Conducted Power(dBm)		
		Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel512(1850.2MHz)
	30.5	29.22	29.24	29.20
Bottom Antenna - Full Power				
GSM 850MHz	Tune up	Conducted Power (dBm)		
		Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	33.5	32.48	32.36	32.25
GSM 1900MHz	Tune up	Conducted Power(dBm)		
		Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel512(1850.2MHz)
	30.5	29.46	29.45	29.37

Top Antenna - Reduced power level 1				
GSM 850MHz	Tune up	Conducted Power (dBm)		
		Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.5	32.05	32.00	31.98
GSM 1900MHz	Tune up	Conducted Power(dBm)		
		Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel512(1850.2MHz)
	25.5	24.74	24.76	24.87
Top Antenna - Reduced power level 2				
GSM 850MHz	Tune up	Conducted Power (dBm)		
		Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.0	31.44	31.43	31.37
GSM 1900MHz	Tune up	Conducted Power(dBm)		
		Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel512(1850.2MHz)
	24.5	23.73	23.76	23.86

Top Antenna - Reduced power level 3				
GSM 1900MHz	Tune up	Conducted Power(dBm)		
		Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel512(1850.2MHz)
	29.5	28.70	28.83	28.98
Top Antenna - Reduced power level 5				
GSM 1900MHz	Tune up	Conducted Power(dBm)		
		Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel512(1850.2MHz)
	28.5	27.75	27.87	27.96

Table 10.2: The conducted power measurement results for GPRS and EGPRS

Top Antenna - Full Power								
GPRS850/ EGPRS850	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	33.5	32.46	32.41	32.42	-9.03dB	23.43	23.38	23.39
2Tx-slots	31.7	30.84	30.76	30.78	-6.02dB	24.82	24.74	24.76
3Tx-slots	30.7	29.83	29.76	29.77	-4.26dB	25.57	25.50	25.51
4Tx-slots	29.7	28.81	28.79	28.80	-3.01dB	25.80	25.78	25.79
EGPRS 850 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	28.0	26.84	26.85	26.93	-9.03dB	17.81	17.82	17.90
2Tx-slots	25.5	24.41	24.42	24.34	-6.02dB	18.39	18.40	18.32
3Tx-slots	24.5	23.23	23.20	23.15	-4.26dB	18.97	18.94	18.89
4Tx-slots	23.0	22.05	21.98	21.98	-3.01dB	19.04	18.97	18.97
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	30.5	29.20	29.23	29.21	-9.03dB	20.17	20.20	20.18
2Tx-slots	28.7	27.52	27.56	27.58	-6.02dB	21.50	21.54	21.56
3Tx-slots	27.7	26.49	26.55	26.57	-4.26dB	22.23	22.29	22.31
4Tx-slots	26.7	25.44	25.50	25.56	-3.01dB	22.43	22.49	22.55
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	26.0	24.87	24.88	24.93	-9.03dB	15.84	15.85	15.90
2Tx-slots	24.5	23.23	23.34	23.38	-6.02dB	17.21	17.32	17.36
3Tx-slots	23.5	22.16	22.28	22.30	-4.26dB	17.90	18.02	18.04
4Tx-slots	22.5	21.01	21.19	21.17	-3.01dB	18.00	18.18	18.16

Bottom Antenna - Full Power								
GPRS850/ EGPRS850	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	33.5	32.46	32.35	32.25	-9.03dB	23.43	23.32	23.22
2Tx-slots	31.7	30.77	30.71	30.66	-6.02dB	24.75	24.69	24.64
3Tx-slots	30.7	29.78	29.70	29.68	-4.26dB	25.52	25.44	25.42
4Tx-slots	29.7	28.79	28.73	28.70	-3.01dB	25.78	25.72	25.69
EGPRS 850 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	28.0	26.88	26.81	26.77	-9.03dB	17.85	17.78	17.74
2Tx-slots	25.5	24.39	24.29	24.24	-6.02dB	18.37	18.27	18.22
3Tx-slots	24.5	23.22	23.21	23.08	-4.26dB	18.96	18.95	18.82
4Tx-slots	23.0	22.02	21.92	21.84	-3.01dB	19.01	18.91	18.83
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	30.5	29.44	29.43	29.35	-9.03dB	20.41	20.40	20.32
2Tx-slots	28.7	27.80	27.77	27.71	-6.02dB	21.78	21.75	21.69
3Tx-slots	27.7	26.79	26.76	26.69	-4.26dB	22.53	22.50	22.43
4Tx-slots	26.7	25.75	25.72	25.68	-3.01dB	22.74	22.71	22.67
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	26.0	25.18	25.15	25.12	-9.03dB	16.15	16.12	16.09
2Tx-slots	24.5	23.64	23.66	23.50	-6.02dB	17.62	17.64	17.48
3Tx-slots	23.5	22.52	22.62	22.48	-4.26dB	18.26	18.36	18.22
4Tx-slots	22.5	21.34	21.48	21.46	-3.01dB	18.33	18.47	18.45

Top Antenna - Reduced power level 1								
GPRS850/ EGPRS850	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	32.5	32.05	32.00	31.98	-9.03dB	23.02	22.97	22.95
2Tx-slots	30.5	29.49	29.42	29.43	-6.02dB	23.47	23.40	23.41
3Tx-slots	28.5	27.77	27.73	27.74	-4.26dB	23.51	23.47	23.48
4Tx-slots	27.5	26.53	26.51	26.48	-3.01dB	23.52	23.50	23.47
EGPRS 850 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	27.5	26.45	26.46	26.42	-9.03dB	17.42	17.43	17.39
2Tx-slots	24.5	23.44	23.22	23.24	-6.02dB	17.42	17.20	17.22
3Tx-slots	22.0	21.38	21.29	21.25	-4.26dB	17.12	17.03	16.99
4Tx-slots	20.5	19.97	19.84	19.73	-3.01dB	16.96	16.83	16.72
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	25.5	24.74	24.76	24.87	-9.03dB	15.71	15.73	15.84
2Tx-slots	22.5	21.72	21.75	21.86	-6.02dB	15.70	15.73	15.84
3Tx-slots	21.0	19.98	20.01	20.13	-4.26dB	15.72	15.75	15.87
4Tx-slots	19.5	18.68	18.72	18.84	-3.01dB	15.67	15.71	15.83
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	20.5	19.76	19.81	19.86	-9.03dB	10.73	10.78	10.83
2Tx-slots	17.5	16.67	16.61	16.63	-6.02dB	10.65	10.59	10.61
3Tx-slots	15.5	14.75	14.73	14.71	-4.26dB	10.49	10.47	10.45
4Tx-slots	14.5	13.48	13.36	13.32	-3.01dB	10.47	10.35	10.31

Top Antenna - Reduced power level 2								
GPRS850/ EGPRS850	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	32.0	31.44	31.43	31.37	-9.03dB	22.41	22.40	22.34
2Tx-slots	29.5	28.53	28.54	28.51	-6.02dB	22.51	22.52	22.49
3Tx-slots	27.5	26.78	26.80	26.75	-4.26dB	22.52	22.54	22.49
4Tx-slots	26.5	25.45	25.48	25.44	-3.01dB	22.44	22.47	22.43
EGPRS 850 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		251	190	128		251	190	128
1Tx-slots	26.5	25.54	25.41	25.35	-9.03dB	16.51	16.38	16.32
2Tx-slots	23.0	22.29	22.16	22.11	-6.02dB	16.27	16.14	16.09
3Tx-slots	21.0	20.31	20.22	20.13	-4.26dB	16.05	15.96	15.87
4Tx-slots	19.5	18.85	18.81	18.78	-3.01dB	15.84	15.80	15.77
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	24.5	23.73	23.76	23.86	-9.03dB	14.70	14.73	14.83
2Tx-slots	21.5	20.76	20.79	20.90	-6.02dB	14.74	14.77	14.88
3Tx-slots	20.0	19.01	19.04	19.15	-4.26dB	14.75	14.78	14.89
4Tx-slots	18.5	17.63	17.73	17.84	-3.01dB	14.62	14.72	14.83
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	19.5	18.81	18.77	18.81	-9.03dB	9.78	9.74	9.78
2Tx-slots	16.5	15.72	15.58	15.65	-6.02dB	9.70	9.56	9.63
3Tx-slots	14.5	13.84	13.75	13.68	-4.26dB	9.58	9.49	9.42
4Tx-slots	13.5	12.48	12.38	12.26	-3.01dB	9.47	9.37	9.25

Top Antenna - Reduced power level 3								
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	29.5	28.70	28.83	28.98	-9.03dB	19.67	19.80	19.95
2Tx-slots	26.5	25.67	25.80	25.98	-6.02dB	19.65	19.78	19.96
3Tx-slots	25.0	23.95	24.10	24.23	-4.26dB	19.69	19.84	19.97
4Tx-slots	24.0	22.70	22.79	22.99	-3.01dB	19.69	19.78	19.98
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	24.5	23.71	23.77	23.95	-9.03dB	14.68	14.74	14.92
2Tx-slots	21.5	20.62	20.69	20.70	-6.02dB	14.60	14.67	14.68
3Tx-slots	19.5	18.79	18.72	18.81	-4.26dB	14.53	14.46	14.55
4Tx-slots	18.5	17.36	17.31	17.37	-3.01dB	14.35	14.30	14.36
Top Antenna - Reduced power level 5								
GPRS1900/ EGPRS1900	Tune up	Measured Power (dBm)			calculation	Average Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	28.5	27.75	27.87	27.96	-9.03dB	18.72	18.84	18.93
2Tx-slots	25.5	24.66	24.79	24.98	-6.02dB	18.64	18.77	18.96
3Tx-slots	24.0	22.97	23.06	23.21	-4.26dB	18.71	18.80	18.95
4Tx-slots	23.0	21.69	21.77	21.99	-3.01dB	18.68	18.76	18.98
EGPRS 1900 (8PSK)	Tune up	Measured Power (dBm)			calculation	Measured Power (dBm)		
		810	661	512		810	661	512
1Tx-slots	23.5	22.68	22.73	22.94	-9.03dB	13.65	13.70	13.91
2Tx-slots	20.5	19.59	19.71	19.71	-6.02dB	13.57	13.69	13.69
3Tx-slots	18.5	17.78	17.74	17.79	-4.26dB	13.52	13.48	13.53
4Tx-slots	17.5	16.31	16.30	16.34	-3.01dB	13.30	13.29	13.33

Notes:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for 850MHz and 1900MHz.

10.2. WCDMA Measurement result

Table 10.3: T The conducted power measurement results WCDMA

Top Antenna - Full Power					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	1	24.3	23.1	23.1	23.2
HSUPA	1	22.0	20.5	20.5	20.8
	2	21.0	19.7	19.6	19.8
	3	22.0	20.6	20.6	20.8
	4	20.0	19.1	19.0	19.3
	5	23.0	22.0	22.0	22.4
HSDPA	1	23.0	22.6	22.5	22.8
	2	23.0	22.5	22.5	22.7
	3	22.5	22.0	22.0	22.3
	4	22.5	22.0	22.0	22.2
DC-HSDPA	1	23.0	22.6	22.6	22.7
	2	23.0	22.5	22.6	22.7
	3	22.5	22.1	22.2	22.3
	4	22.5	22.1	22.1	22.2
Bottom Antenna - Full Power					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	1	24.3	22.9	22.8	23.0
HSUPA	1	22.0	20.6	20.5	20.7
	2	21.0	19.7	19.7	19.8
	3	22.0	20.7	20.6	20.8
	4	20.0	19.2	19.0	19.3
	5	23.0	22.1	22.1	22.4
HSDPA	1	23.0	22.6	22.5	22.7
	2	23.0	22.6	22.6	22.7
	3	22.5	22.1	22.1	22.3
	4	22.5	22.1	22.0	22.2
DC-HSDPA	1	23.0	22.4	22.5	22.7
	2	23.0	22.5	22.5	22.7
	3	22.5	22.2	22.2	22.2
	4	22.5	22.1	22.1	22.1

Top Antenna - Reduced power level 1					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	16.8	15.6	15.6	15.7
HSUPA	1	14.5	13.0	13.0	13.3
	2	13.5	12.2	12.1	12.3
	3	14.5	13.1	13.1	13.3
	4	12.5	11.6	11.5	11.8
	5	15.5	14.5	14.5	14.9
HSDPA	1	15.5	15.1	15.0	15.3
	2	15.5	15.0	15.0	15.2
	3	15.0	14.5	14.5	14.8
	4	15.0	14.5	14.5	14.7
DC-HSDPA	1	15.5	15.1	15.1	15.2
	2	15.5	15.0	15.1	15.2
	3	15.0	14.6	14.7	14.8
	4	15.0	14.6	14.6	14.7
Top Antenna - Reduced power level 2					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	\	15.8	14.7	14.6	14.7
HSUPA	1	13.5	12.0	12.0	12.3
	2	12.5	11.2	11.1	11.3
	3	13.5	12.1	12.1	12.3
	4	11.5	10.6	10.5	10.8
	5	14.5	13.5	13.5	13.9
HSDPA	1	14.5	14.1	14.0	14.3
	2	14.5	14.0	14.0	14.2
	3	14.0	13.5	13.5	13.8
	4	14.0	13.5	13.5	13.7
DC-HSDPA	1	14.5	14.1	14.1	14.2
	2	14.5	14.0	14.1	14.2
	3	14.0	13.6	13.7	13.8
	4	14.0	13.6	13.6	13.7

Top Antenna - Reduced power level 3					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	1	21.8	20.6	20.6	20.7
HSUPA	1	19.5	18.0	18.0	18.3
	2	18.5	17.2	17.1	17.3
	3	19.5	18.1	18.1	18.3
	4	17.5	16.6	16.5	16.8
	5	20.5	19.5	19.5	19.9
HSDPA	1	20.5	20.1	20.0	20.3
	2	20.5	20.0	20.0	20.2
	3	20.0	19.5	19.5	19.8
	4	20.0	19.5	19.5	19.7
DC-HSDPA	1	20.5	20.1	20.1	20.2
	2	20.5	20.0	20.1	20.2
	3	20.0	19.6	19.7	19.8
	4	20.0	19.6	19.6	19.7
Top Antenna - Reduced power level 5					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	1	19.8	18.7	18.8	18.9
HSUPA	1	17.5	16.0	16.0	16.3
	2	16.5	15.2	15.1	15.3
	3	17.5	16.1	16.1	16.3
	4	15.5	14.6	14.5	14.8
	5	18.5	17.5	17.5	17.9
HSDPA	1	18.5	18.1	18.0	18.3
	2	18.5	18.0	18.0	18.2
	3	18.0	17.5	17.5	17.8
	4	18.0	17.5	17.5	17.7
DC-HSDPA	1	18.5	18.1	18.1	18.2
	2	18.5	18.0	18.1	18.2
	3	18.0	17.6	17.7	17.8
	4	18.0	17.6	17.6	17.7

Bottom Antenna - Reduced power level 4					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	1	22.8	21.4	21.3	21.5
HSUPA	1	20.5	19.1	19.0	19.2
	2	19.5	18.2	18.2	18.3
	3	20.5	19.2	19.1	19.3
	4	18.5	17.7	17.5	17.8
	5	21.5	20.6	20.6	20.9
HSDPA	1	21.5	21.1	21.0	21.2
	2	21.5	21.1	21.1	21.2
	3	21.0	20.6	20.6	20.8
	4	21.0	20.6	20.5	20.7
DC-HSDPA	1	21.5	20.9	21.0	21.2
	2	21.5	21.0	21.0	21.2
	3	21.0	20.7	20.7	20.7
	4	21.0	20.6	20.6	20.6
Bottom Antenna - Reduced power level 6					
Item	band	WCDMA Band 2 result			
	ARFCN	Tune up	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)
WCDMA	1	21.8	20.4	20.4	20.5
HSUPA	1	19.5	18.1	18.0	18.2
	2	18.5	17.2	17.2	17.3
	3	19.5	18.2	18.1	18.3
	4	17.5	16.7	16.5	16.8
	5	20.5	19.6	19.6	19.9
HSDPA	1	20.5	20.1	20.0	20.2
	2	20.5	20.1	20.1	20.2
	3	20.0	19.6	19.6	19.8
	4	20.0	19.6	19.5	19.7
DC-HSDPA	1	20.5	19.9	20.0	20.2
	2	20.5	20.0	20.0	20.2
	3	20.0	19.7	19.7	19.7
	4	20.0	19.6	19.6	19.6

Top Antenna - Full Power					
Item	band	WCDMA Band 4 result			
	ARFCN	Tune up	1513 (1752.6MHz)	1413 (1732.6MHz)	1312 (1712.4MHz)
WCDMA	1	24.3	23.2	23.1	23.3
HSUPA	1	22.0	20.7	20.6	20.8
	2	21.0	19.7	19.6	19.8
	3	22.0	20.7	20.6	20.8
	4	20.0	19.2	19.1	19.3
	5	23.0	22.3	22.1	22.3
HSDPA	1	23.0	22.2	22.1	22.4
	2	23.0	22.1	22.0	22.3
	3	22.5	21.7	21.5	21.8
	4	22.5	21.6	21.5	21.8
DC-HSDPA	1	23.0	22.2	22.2	22.4
	2	23.0	22.2	22.0	22.2
	3	22.5	21.6	21.6	21.8
	4	22.5	21.5	21.4	21.6
Bottom Antenna - Full Power					
Item	band	WCDMA Band 4 result			
	ARFCN	Tune up	1513 (1752.6MHz)	1413 (1732.6MHz)	1312 (1712.4MHz)
WCDMA	1	24.3	23.1	23.0	23.1
HSUPA	1	22.0	20.7	20.6	20.7
	2	21.0	19.6	19.6	19.8
	3	22.0	20.6	20.5	20.7
	4	20.0	19.2	19.2	19.2
	5	23.0	22.2	22.1	22.3
HSDPA	1	23.0	22.2	22.2	22.3
	2	23.0	22.1	22.0	22.3
	3	22.5	21.6	21.5	21.8
	4	22.5	21.5	21.5	21.7
DC-HSDPA	1	23.0	22.3	22.2	22.3
	2	23.0	22.2	22.1	22.2
	3	22.5	21.7	21.6	21.8
	4	22.5	21.6	21.5	21.6

Top Antenna - Reduced power level 1					
Item	band	WCDMA Band 4 result			
	ARFCN	Tune up	1513 (1752.6MHz)	1413 (1732.6MHz)	1312 (1712.4MHz)
WCDMA	\	17.8	16.8	16.7	16.8
HSUPA	1	15.5	14.2	14.1	14.3
	2	14.5	13.2	13.1	13.3
	3	15.5	14.2	14.1	14.3
	4	13.5	12.7	12.6	12.8
	5	16.5	15.8	15.6	15.8
HSDPA	1	16.5	15.7	15.6	15.9
	2	16.5	15.6	15.5	15.8
	3	16.0	15.2	15.0	15.3
	4	16.0	15.1	15.0	15.3
DC-HSDPA	1	16.5	15.7	15.7	15.9
	2	16.5	15.7	15.5	15.7
	3	16.0	15.1	15.1	15.3
	4	16.0	15.0	14.9	15.1
Top Antenna - Reduced power level 2					
Item	band	WCDMA Band 4 result			
	ARFCN	Tune up	1513 (1752.6MHz)	1413 (1732.6MHz)	1312 (1712.4MHz)
WCDMA	\	16.8	15.8	15.8	15.8
HSUPA	1	14.5	13.2	13.1	13.3
	2	13.5	12.2	12.1	12.3
	3	14.5	13.2	13.1	13.3
	4	12.5	11.7	11.6	11.8
	5	15.5	14.8	14.6	14.8
HSDPA	1	15.5	14.7	14.6	14.9
	2	15.5	14.6	14.5	14.8
	3	15.0	14.2	14.0	14.3
	4	15.0	14.1	14.0	14.3
DC-HSDPA	1	15.5	14.7	14.7	14.9
	2	15.5	14.7	14.5	14.7
	3	15.0	14.1	14.1	14.3
	4	15.0	14.0	13.9	14.1

Top Antenna - Reduced power level 3					
Item	band	WCDMA Band 4 result			
	ARFCN	Tune up	1513 (1752.6MHz)	1413 (1732.6MHz)	1312 (1712.4MHz)
WCDMA	1	22.3	21.2	21.2	21.3
HSUPA	1	20.0	18.7	18.6	18.8
	2	19.0	17.7	17.6	17.8
	3	20.0	18.7	18.6	18.8
	4	18.0	17.2	17.1	17.3
	5	21.0	20.3	20.1	20.3
HSDPA	1	21.0	20.2	20.1	20.4
	2	21.0	20.1	20.0	20.3
	3	20.5	19.7	19.5	19.8
	4	20.5	19.6	19.5	19.8
DC-HSDPA	1	21.0	20.2	20.2	20.4
	2	21.0	20.2	20.0	20.2
	3	20.5	19.6	19.6	19.8
	4	20.5	19.5	19.4	19.6
Top Antenna - Reduced power level 5					
Item	band	WCDMA Band 4 result			
	ARFCN	Tune up	1513 (1752.6MHz)	1413 (1732.6MHz)	1312 (1712.4MHz)
WCDMA	1	21.3	20.2	20.2	20.3
HSUPA	1	19.0	17.7	17.6	17.8
	2	18.0	16.7	16.6	16.8
	3	19.0	17.7	17.6	17.8
	4	17.0	16.2	16.1	16.3
	5	20.0	19.3	19.1	19.3
HSDPA	1	20.0	19.2	19.1	19.4
	2	20.0	19.1	19.0	19.3
	3	19.5	18.7	18.5	18.8
	4	19.5	18.6	18.5	18.8
DC-HSDPA	1	20.0	19.2	19.2	19.4
	2	20.0	19.2	19.0	19.2
	3	19.5	18.6	18.6	18.8
	4	19.5	18.5	18.4	18.6

Top Antenna - Full Power					
Item	band	WCDMA Band 5 result			
	ARFCN	Tune up	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	1	24.5	23.4	23.5	23.4
HSUPA	1	23.0	21.9	22.0	22.0
	2	22.0	21.4	21.5	21.5
	3	23.0	22.4	22.5	22.5
	4	22.0	20.9	21.0	21.0
	5	23.0	22.4	22.5	22.5
HSDPA	1	23.0	22.4	22.5	22.5
	2	23.0	22.3	22.4	22.5
	3	22.5	21.8	22.0	22.0
	4	22.5	21.8	21.9	21.9
DC-HSDPA	1	23.0	22.4	22.5	22.3
	2	23.0	22.3	22.4	22.4
	3	22.5	21.8	22.0	21.8
	4	22.5	21.8	21.8	21.8
Bottom Antenna - Full Power					
Item	band	WCDMA Band 5 result			
	ARFCN	Tune up	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)
WCDMA	1	24.5	23.3	23.3	23.4
HSUPA	1	23.0	22.0	22.0	22.0
	2	22.0	21.4	21.4	21.5
	3	23.0	22.3	22.4	22.5
	4	22.0	21.0	21.0	21.0
	5	23.0	22.4	22.5	22.5
HSDPA	1	23.0	22.5	22.5	22.5
	2	23.0	22.3	22.4	22.5
	3	22.5	21.8	21.9	22.0
	4	22.5	21.8	21.8	21.9
DC-HSDPA	1	23.0	22.4	22.5	22.5
	2	23.0	22.3	22.4	22.4
	3	22.5	21.9	22.0	21.8
	4	22.5	21.7	21.8	21.9

10.3. LTE Measurement result

According to April 2015 TCB workshop, SAR Test exclusion can be applied for testing overlapping LTE Bands as follows:

- The maximum out power, including tolerance, for the smaller band must be $\leq$ the larger band to qualify for SAR test exclusion.
- The channel bandwidth and other operating parameters for the smaller band must be fully supported by the larger band.

LTE Band 5 (824-849MHz) is covered by LTE Band 26 (814-849MHz)

LTE Band 17 (704-716MHz) is covered by LTE Band 12 (699-716MHz)

LTE Band 18 (815-830MHz) is covered by LTE Band 26 (814-849MHz)

LTE Band 19 (830-845MHz) is covered by LTE Band 26 (814-849MHz)

Table 10.4: The conducted Power for LTE

Top Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
1.4 MHz	1RB_5	1909.3	22.74	21.57	21.02	24.0	22.5	22.0
		1880.0	22.77	21.62	21.05	24.0	22.5	22.0
		1850.7	22.77	21.55	21.14	24.0	22.5	22.0
	1RB_3	1909.3	22.81	21.65	21.07	24.0	22.5	22.0
		1880.0	22.86	21.68	21.20	24.0	22.5	22.0
		1850.7	22.83	21.65	21.18	24.0	22.5	22.0
	1RB_0	1909.3	22.77	21.59	21.06	24.0	22.5	22.0
		1880.0	22.76	21.57	21.18	24.0	22.5	22.0
		1850.7	22.74	21.55	21.12	24.0	22.5	22.0
	3RB_3	1909.3	22.86	21.38	21.13	24.0	22.5	22.0
		1880.0	22.90	21.51	21.17	24.0	22.5	22.0
		1850.7	22.85	21.32	21.15	24.0	22.5	22.0
	3RB_1	1909.3	22.89	21.47	21.16	24.0	22.5	22.0
		1880.0	22.93	21.48	21.16	24.0	22.5	22.0
		1850.7	22.89	21.32	21.17	24.0	22.5	22.0
	3RB_0	1909.3	22.88	21.41	21.13	24.0	22.5	22.0
		1880.0	22.92	21.47	21.14	24.0	22.5	22.0
		1850.7	22.88	21.33	21.14	24.0	22.5	22.0
	6RB_0	1909.3	21.49	20.61	20.00	22.5	21.5	21.0
		1880.0	21.48	20.57	20.08	22.5	21.5	21.0
		1850.7	21.44	20.51	19.99	22.5	21.5	21.0

Top Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3 MHz	1RB_14	1908.5	22.63	21.49	21.03	24.0	22.5	22.0
		1880.0	22.72	21.49	20.99	24.0	22.5	22.0
		1851.5	22.67	21.52	20.84	24.0	22.5	22.0
	1RB_7	1908.5	22.76	21.62	21.13	24.0	22.5	22.0
		1880.0	22.81	21.70	20.98	24.0	22.5	22.0
		1851.5	22.76	21.65	21.00	24.0	22.5	22.0
	1RB_0	1908.5	22.69	21.52	21.00	24.0	22.5	22.0
		1880.0	22.66	21.60	20.94	24.0	22.5	22.0
		1851.5	22.65	21.51	20.86	24.0	22.5	22.0
	8RB_7	1908.5	21.42	20.48	19.92	22.5	21.5	21.0
		1880.0	21.39	20.51	19.96	22.5	21.5	21.0
		1851.5	21.40	20.44	19.92	22.5	21.5	21.0
	8RB_4	1908.5	21.50	20.55	19.98	22.5	21.5	21.0
		1880.0	21.48	20.54	20.04	22.5	21.5	21.0
		1851.5	21.43	20.46	19.98	22.5	21.5	21.0
	8RB_0	1908.5	21.39	20.52	19.91	22.5	21.5	21.0
		1880.0	21.40	20.51	19.98	22.5	21.5	21.0
		1851.5	21.35	20.42	19.90	22.5	21.5	21.0
	15RB_0	1908.5	21.42	20.41	19.93	22.5	21.5	21.0
		1880.0	21.36	20.39	19.98	22.5	21.5	21.0
		1851.5	21.36	20.39	19.83	22.5	21.5	21.0

Top Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	1907.5	22.86	21.71	21.17	24.0	22.5	22.0
		1880.0	22.93	21.82	21.13	24.0	22.5	22.0
		1852.5	22.87	21.69	21.11	24.0	22.5	22.0
	1RB_12	1907.5	23.05	21.91	21.30	24.0	22.5	22.0
		1880.0	23.06	21.84	21.27	24.0	22.5	22.0
		1852.5	23.02	21.83	21.22	24.0	22.5	22.0
	1RB_0	1907.5	22.95	21.78	21.19	24.0	22.5	22.0
		1880.0	22.96	21.72	21.17	24.0	22.5	22.0
		1852.5	22.90	21.72	21.13	24.0	22.5	22.0
	12RB_13	1907.5	21.53	20.57	20.07	22.5	21.5	21.0
		1880.0	21.50	20.50	20.08	22.5	21.5	21.0
		1852.5	21.50	20.53	20.01	22.5	21.5	21.0
	12RB_6	1907.5	21.58	20.57	20.18	22.5	21.5	21.0
		1880.0	21.54	20.59	20.16	22.5	21.5	21.0
		1852.5	21.52	20.53	20.07	22.5	21.5	21.0
	12RB_0	1907.5	21.49	20.48	19.99	22.5	21.5	21.0
		1880.0	21.50	20.50	20.08	22.5	21.5	21.0
		1852.5	21.45	20.46	19.96	22.5	21.5	21.0
	25RB_0	1907.5	21.52	20.49	20.06	22.5	21.5	21.0
		1880.0	21.52	20.53	20.07	22.5	21.5	21.0
		1852.5	21.51	20.50	20.02	22.5	21.5	21.0

Top Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	1905.0	22.99	21.82	21.21	24.0	22.5	22.0
		1880.0	23.02	21.89	21.26	24.0	22.5	22.0
		1855.0	22.98	21.81	21.29	24.0	22.5	22.0
	1RB_24	1905.0	23.05	21.92	21.28	24.0	22.5	22.0
		1880.0	23.09	21.96	21.30	24.0	22.5	22.0
		1855.0	23.08	21.89	21.37	24.0	22.5	22.0
	1RB_0	1905.0	23.02	21.91	21.26	24.0	22.5	22.0
		1880.0	23.06	21.91	21.27	24.0	22.5	22.0
		1855.0	23.07	21.84	21.30	24.0	22.5	22.0
	25RB_25	1905.0	21.54	20.56	20.10	22.5	21.5	21.0
		1880.0	21.50	20.59	20.11	22.5	21.5	21.0
		1855.0	21.55	20.56	20.04	22.5	21.5	21.0
	25RB_12	1905.0	21.56	20.60	20.08	22.5	21.5	21.0
		1880.0	21.54	20.60	20.16	22.5	21.5	21.0
		1855.0	21.50	20.56	20.05	22.5	21.5	21.0
	25RB_0	1905.0	21.52	20.56	20.07	22.5	21.5	21.0
		1880.0	21.50	20.54	20.11	22.5	21.5	21.0
		1855.0	21.42	20.46	19.97	22.5	21.5	21.0
	50RB_0	1905.0	21.59	20.58	20.07	22.5	21.5	21.0
		1880.0	21.51	20.52	20.06	22.5	21.5	21.0
		1855.0	21.51	20.51	20.00	22.5	21.5	21.0

Top Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15 MHz	1RB_74	1902.5	22.95	21.78	21.18	24.0	22.5	22.0
		1880.0	23.02	21.82	21.13	24.0	22.5	22.0
		1857.5	22.98	21.76	21.10	24.0	22.5	22.0
	1RB_37	1902.5	23.05	21.91	21.31	24.0	22.5	22.0
		1880.0	23.10	21.89	21.21	24.0	22.5	22.0
		1857.5	23.03	21.89	21.18	24.0	22.5	22.0
	1RB_0	1902.5	23.01	21.81	21.24	24.0	22.5	22.0
		1880.0	23.07	21.76	21.15	24.0	22.5	22.0
		1857.5	23.04	21.80	21.15	24.0	22.5	22.0
	36RB_38	1902.5	21.52	20.58	20.06	22.5	21.5	21.0
		1880.0	21.55	20.53	20.18	22.5	21.5	21.0
		1857.5	21.52	20.52	20.08	22.5	21.5	21.0
	36RB_19	1902.5	21.54	20.58	20.11	22.5	21.5	21.0
		1880.0	21.52	20.58	20.18	22.5	21.5	21.0
		1857.5	21.51	20.51	20.12	22.5	21.5	21.0
	36RB_0	1902.5	21.57	20.59	20.14	22.5	21.5	21.0
		1880.0	21.51	20.54	20.15	22.5	21.5	21.0
		1857.5	21.45	20.47	20.04	22.5	21.5	21.0
	75RB_0	1902.5	21.55	20.58	20.07	22.5	21.5	21.0
		1880.0	21.55	20.56	20.10	22.5	21.5	21.0
		1857.5	21.51	20.52	20.02	22.5	21.5	21.0

Top Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20 MHz	1RB_99	1900.0	22.96	21.74	21.18	24.0	22.5	22.0
		1880.0	22.98	21.70	21.18	24.0	22.5	22.0
		1860.0	22.90	21.69	21.18	24.0	22.5	22.0
	1RB_50	1900.0	23.11	21.94	21.39	24.0	22.5	22.0
		1880.0	23.08	21.87	21.41	24.0	22.5	22.0
		1860.0	23.07	21.93	21.34	24.0	22.5	22.0
	1RB_0	1900.0	22.99	21.81	21.25	24.0	22.5	22.0
		1880.0	23.01	21.77	21.27	24.0	22.5	22.0
		1860.0	22.97	21.81	21.20	24.0	22.5	22.0
	50RB_50	1900.0	21.56	20.58	20.08	22.5	21.5	21.0
		1880.0	21.63	20.61	20.13	22.5	21.5	21.0
		1860.0	21.58	20.53	20.07	22.5	21.5	21.0
	50RB_25	1900.0	21.60	20.61	20.12	22.5	21.5	21.0
		1880.0	21.58	20.57	20.15	22.5	21.5	21.0
		1860.0	21.60	20.57	20.09	22.5	21.5	21.0
	50RB_0	1900.0	21.57	20.58	20.13	22.5	21.5	21.0
		1880.0	21.57	20.55	20.12	22.5	21.5	21.0
		1860.0	21.48	20.41	19.96	22.5	21.5	21.0
	100RB_0	1900.0	21.58	20.61	20.14	22.5	21.5	21.0
		1880.0	21.60	20.58	20.16	22.5	21.5	21.0
		1860.0	21.51	20.49	20.02	22.5	21.5	21.0

Bottom Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
1.4 MHz	1RB_5	1909.3	22.63	21.47	21.01	24.0	22.5	22.0
		1880.0	22.67	21.59	21.00	24.0	22.5	22.0
		1850.7	22.68	21.47	20.96	24.0	22.5	22.0
	1RB_3	1909.3	22.75	21.54	21.06	24.0	22.5	22.0
		1880.0	22.77	21.63	21.04	24.0	22.5	22.0
		1850.7	22.73	21.54	21.03	24.0	22.5	22.0
	1RB_0	1909.3	22.68	21.51	20.95	24.0	22.5	22.0
		1880.0	22.66	21.61	21.03	24.0	22.5	22.0
		1850.7	22.67	21.48	20.99	24.0	22.5	22.0
	3RB_3	1909.3	22.79	21.26	20.99	24.0	22.5	22.0
		1880.0	22.81	21.30	21.07	24.0	22.5	22.0
		1850.7	22.79	21.31	21.05	24.0	22.5	22.0
	3RB_1	1909.3	22.85	21.28	20.98	24.0	22.5	22.0
		1880.0	22.82	21.37	21.09	24.0	22.5	22.0
		1850.7	22.79	21.32	21.00	24.0	22.5	22.0
	3RB_0	1909.3	22.79	21.28	20.96	24.0	22.5	22.0
		1880.0	22.79	21.29	21.09	24.0	22.5	22.0
		1850.7	22.79	21.32	20.98	24.0	22.5	22.0
	6RB_0	1909.3	21.36	20.48	19.93	22.5	21.5	21.0
		1880.0	21.40	20.50	19.92	22.5	21.5	21.0
		1850.7	21.40	20.50	19.86	22.5	21.5	21.0

Bottom Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3 MHz	1RB_14	1908.5	22.56	21.37	20.80	24.0	22.5	22.0
		1880.0	22.58	21.46	20.92	24.0	22.5	22.0
		1851.5	22.52	21.37	20.96	24.0	22.5	22.0
	1RB_7	1908.5	22.69	21.51	20.91	24.0	22.5	22.0
		1880.0	22.68	21.54	21.02	24.0	22.5	22.0
		1851.5	22.67	21.50	21.02	24.0	22.5	22.0
	1RB_0	1908.5	22.57	21.45	20.85	24.0	22.5	22.0
		1880.0	22.56	21.39	20.93	24.0	22.5	22.0
		1851.5	22.54	21.34	20.91	24.0	22.5	22.0
	8RB_7	1908.5	21.31	20.38	19.90	22.5	21.5	21.0
		1880.0	21.29	20.38	19.93	22.5	21.5	21.0
		1851.5	21.31	20.33	19.86	22.5	21.5	21.0
	8RB_4	1908.5	21.34	20.43	19.97	22.5	21.5	21.0
		1880.0	21.35	20.44	19.99	22.5	21.5	21.0
		1851.5	21.32	20.36	19.90	22.5	21.5	21.0
	8RB_0	1908.5	21.30	20.41	19.90	22.5	21.5	21.0
		1880.0	21.26	20.39	19.95	22.5	21.5	21.0
		1851.5	21.26	20.31	19.84	22.5	21.5	21.0
	15RB_0	1908.5	21.28	20.32	19.90	22.5	21.5	21.0
		1880.0	21.27	20.35	19.83	22.5	21.5	21.0
		1851.5	21.24	20.30	19.78	22.5	21.5	21.0

Bottom Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	1907.5	22.80	21.62	21.04	24.0	22.5	22.0
		1880.0	22.82	21.69	20.99	24.0	22.5	22.0
		1852.5	22.78	21.69	20.90	24.0	22.5	22.0
	1RB_12	1907.5	22.91	21.75	21.19	24.0	22.5	22.0
		1880.0	22.92	21.82	21.03	24.0	22.5	22.0
		1852.5	22.91	21.81	21.05	24.0	22.5	22.0
	1RB_0	1907.5	22.83	21.61	21.07	24.0	22.5	22.0
		1880.0	22.86	21.70	20.98	24.0	22.5	22.0
		1852.5	22.81	21.66	20.94	24.0	22.5	22.0
	12RB_13	1907.5	21.37	20.40	19.96	22.5	21.5	21.0
		1880.0	21.36	20.39	19.94	22.5	21.5	21.0
		1852.5	21.38	20.40	19.92	22.5	21.5	21.0
	12RB_6	1907.5	21.44	20.44	19.99	22.5	21.5	21.0
		1880.0	21.41	20.45	19.95	22.5	21.5	21.0
		1852.5	21.39	20.44	19.92	22.5	21.5	21.0
	12RB_0	1907.5	21.39	20.40	19.94	22.5	21.5	21.0
		1880.0	21.37	20.38	19.98	22.5	21.5	21.0
		1852.5	21.34	20.33	19.83	22.5	21.5	21.0
	25RB_0	1907.5	21.44	20.42	19.93	22.5	21.5	21.0
		1880.0	21.37	20.39	19.97	22.5	21.5	21.0
		1852.5	21.41	20.38	19.91	22.5	21.5	21.0

Bottom Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	1905.0	22.93	21.73	21.17	24.0	22.5	22.0
		1880.0	22.91	21.73	21.14	24.0	22.5	22.0
		1855.0	22.87	21.67	21.12	24.0	22.5	22.0
	1RB_24	1905.0	22.96	21.82	21.22	24.0	22.5	22.0
		1880.0	22.98	21.80	21.18	24.0	22.5	22.0
		1855.0	22.94	21.74	21.14	24.0	22.5	22.0
	1RB_0	1905.0	22.96	21.82	21.25	24.0	22.5	22.0
		1880.0	22.93	21.78	21.16	24.0	22.5	22.0
		1855.0	22.93	21.65	21.13	24.0	22.5	22.0
	25RB_25	1905.0	21.42	20.42	19.92	22.5	21.5	21.0
		1880.0	21.38	20.44	19.95	22.5	21.5	21.0
		1855.0	21.44	20.45	19.99	22.5	21.5	21.0
	25RB_12	1905.0	21.45	20.47	19.98	22.5	21.5	21.0
		1880.0	21.46	20.48	20.06	22.5	21.5	21.0
		1855.0	21.44	20.46	19.96	22.5	21.5	21.0
	25RB_0	1905.0	21.44	20.50	19.93	22.5	21.5	21.0
		1880.0	21.41	20.42	19.97	22.5	21.5	21.0
		1855.0	21.32	20.35	19.85	22.5	21.5	21.0
	50RB_0	1905.0	21.46	20.43	19.98	22.5	21.5	21.0
		1880.0	21.42	20.45	19.98	22.5	21.5	21.0
		1855.0	21.41	20.42	19.94	22.5	21.5	21.0

Bottom Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15 MHz	1RB_74	1902.5	22.87	21.79	21.10	24.0	22.5	22.0
		1880.0	22.91	21.75	21.14	24.0	22.5	22.0
		1857.5	22.89	21.73	21.10	24.0	22.5	22.0
	1RB_37	1902.5	22.95	21.89	21.20	24.0	22.5	22.0
		1880.0	22.98	21.85	21.25	24.0	22.5	22.0
		1857.5	23.01	21.87	21.19	24.0	22.5	22.0
	1RB_0	1902.5	22.93	21.82	21.12	24.0	22.5	22.0
		1880.0	22.98	21.77	21.17	24.0	22.5	22.0
		1857.5	22.94	21.86	21.15	24.0	22.5	22.0
	36RB_38	1902.5	21.39	20.43	20.00	22.5	21.5	21.0
		1880.0	21.43	20.49	19.99	22.5	21.5	21.0
		1857.5	21.46	20.48	19.98	22.5	21.5	21.0
	36RB_19	1902.5	21.43	20.46	19.94	22.5	21.5	21.0
		1880.0	21.45	20.47	20.06	22.5	21.5	21.0
		1857.5	21.39	20.43	20.00	22.5	21.5	21.0
	36RB_0	1902.5	21.41	20.49	20.01	22.5	21.5	21.0
		1880.0	21.47	20.50	20.00	22.5	21.5	21.0
		1857.5	21.42	20.39	19.91	22.5	21.5	21.0
	75RB_0	1902.5	21.46	20.46	19.97	22.5	21.5	21.0
		1880.0	21.49	20.48	20.03	22.5	21.5	21.0
		1857.5	21.42	20.42	19.90	22.5	21.5	21.0

Bottom Antenna - Full Power								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20 MHz	1RB_99	1900.0	22.82	21.70	21.08	24.0	22.5	22.0
		1880.0	22.89	21.75	21.11	24.0	22.5	22.0
		1860.0	22.82	21.59	21.14	24.0	22.5	22.0
	1RB_50	1900.0	23.01	21.91	21.26	24.0	22.5	22.0
		1880.0	23.01	21.82	21.28	24.0	22.5	22.0
		1860.0	22.98	21.72	21.27	24.0	22.5	22.0
	1RB_0	1900.0	22.88	21.75	21.09	24.0	22.5	22.0
		1880.0	22.90	21.73	21.19	24.0	22.5	22.0
		1860.0	22.85	21.62	21.14	24.0	22.5	22.0
	50RB_50	1900.0	21.41	20.44	19.93	22.5	21.5	21.0
		1880.0	21.49	20.47	20.00	22.5	21.5	21.0
		1860.0	21.49	20.46	19.98	22.5	21.5	21.0
	50RB_25	1900.0	21.54	20.51	20.02	22.5	21.5	21.0
		1880.0	21.50	20.48	20.05	22.5	21.5	21.0
		1860.0	21.49	20.45	19.99	22.5	21.5	21.0
	50RB_0	1900.0	21.45	20.42	19.99	22.5	21.5	21.0
		1880.0	21.53	20.51	20.07	22.5	21.5	21.0
		1860.0	21.35	20.30	19.82	22.5	21.5	21.0
	100RB_0	1900.0	21.45	20.44	19.96	22.5	21.5	21.0
		1880.0	21.51	20.51	20.05	22.5	21.5	21.0
		1860.0	21.42	20.43	19.95	22.5	21.5	21.0

Top Antenna - Reduced power level 1								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
1.4 MHz	1RB_5	1909.3	15.97	16.32	16.33	17.0	17.0	17.0
		1880.0	16.01	16.30	16.36	17.0	17.0	17.0
		1850.7	15.95	16.30	16.38	17.0	17.0	17.0
	1RB_3	1909.3	16.07	16.39	16.40	17.0	17.0	17.0
		1880.0	16.09	16.38	16.45	17.0	17.0	17.0
		1850.7	16.04	16.35	16.46	17.0	17.0	17.0
	1RB_0	1909.3	16.02	16.32	16.34	17.0	17.0	17.0
		1880.0	16.03	16.34	16.45	17.0	17.0	17.0
		1850.7	15.96	16.29	16.29	17.0	17.0	17.0
	3RB_3	1909.3	16.13	16.20	16.37	17.0	17.0	17.0
		1880.0	16.12	16.25	16.48	17.0	17.0	17.0
		1850.7	16.11	16.13	16.44	17.0	17.0	17.0
	3RB_1	1909.3	16.10	16.18	16.41	17.0	17.0	17.0
		1880.0	16.20	16.24	16.48	17.0	17.0	17.0
		1850.7	16.09	16.17	16.48	17.0	17.0	17.0
	3RB_0	1909.3	16.09	16.18	16.38	17.0	17.0	17.0
		1880.0	16.12	16.21	16.48	17.0	17.0	17.0
		1850.7	16.12	16.11	16.45	17.0	17.0	17.0
	6RB_0	1909.3	16.23	16.37	16.27	17.0	17.0	17.0
		1880.0	16.22	16.40	16.31	17.0	17.0	17.0
		1850.7	16.16	16.30	16.27	17.0	17.0	17.0

Top Antenna - Reduced power level 1								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3 MHz	1RB_14	1908.5	15.84	16.26	16.16	17.0	17.0	17.0
		1880.0	15.92	16.37	16.29	17.0	17.0	17.0
		1851.5	15.79	16.23	16.15	17.0	17.0	17.0
	1RB_7	1908.5	15.99	16.35	16.32	17.0	17.0	17.0
		1880.0	16.00	16.50	16.37	17.0	17.0	17.0
		1851.5	15.97	16.40	16.30	17.0	17.0	17.0
	1RB_0	1908.5	15.81	16.29	16.14	17.0	17.0	17.0
		1880.0	15.88	16.31	16.29	17.0	17.0	17.0
		1851.5	15.83	16.21	16.20	17.0	17.0	17.0
	8RB_7	1908.5	16.11	16.21	16.24	17.0	17.0	17.0
		1880.0	16.12	16.22	16.29	17.0	17.0	17.0
		1851.5	16.07	16.17	16.18	17.0	17.0	17.0
	8RB_4	1908.5	16.18	16.26	16.30	17.0	17.0	17.0
		1880.0	16.16	16.27	16.29	17.0	17.0	17.0
		1851.5	16.12	16.23	16.26	17.0	17.0	17.0
	8RB_0	1908.5	16.09	16.19	16.24	17.0	17.0	17.0
		1880.0	16.15	16.23	16.22	17.0	17.0	17.0
		1851.5	16.07	16.17	16.19	17.0	17.0	17.0
	15RB_0	1908.5	16.13	16.13	16.17	17.0	17.0	17.0
		1880.0	16.14	16.21	16.16	17.0	17.0	17.0
		1851.5	16.08	16.15	16.16	17.0	17.0	17.0

Top Antenna - Reduced power level 1								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	1907.5	16.10	16.39	16.38	17.0	17.0	17.0
		1880.0	16.13	16.44	16.39	17.0	17.0	17.0
		1852.5	16.05	16.29	16.30	17.0	17.0	17.0
	1RB_12	1907.5	16.25	16.52	16.54	17.0	17.0	17.0
		1880.0	16.29	16.56	16.43	17.0	17.0	17.0
		1852.5	16.20	16.51	16.40	17.0	17.0	17.0
	1RB_0	1907.5	16.11	16.36	16.38	17.0	17.0	17.0
		1880.0	16.16	16.43	16.43	17.0	17.0	17.0
		1852.5	16.09	16.40	16.33	17.0	17.0	17.0
	12RB_13	1907.5	16.19	16.28	16.33	17.0	17.0	17.0
		1880.0	16.20	16.28	16.29	17.0	17.0	17.0
		1852.5	16.12	16.19	16.26	17.0	17.0	17.0
	12RB_6	1907.5	16.21	16.32	16.34	17.0	17.0	17.0
		1880.0	16.25	16.32	16.38	17.0	17.0	17.0
		1852.5	16.19	16.27	16.29	17.0	17.0	17.0
	12RB_0	1907.5	16.16	16.22	16.23	17.0	17.0	17.0
		1880.0	16.23	16.26	16.30	17.0	17.0	17.0
		1852.5	16.14	16.20	16.23	17.0	17.0	17.0
	25RB_0	1907.5	16.23	16.25	16.25	17.0	17.0	17.0
		1880.0	16.21	16.29	16.30	17.0	17.0	17.0
		1852.5	16.16	16.23	16.21	17.0	17.0	17.0

Top Antenna - Reduced power level 1								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	1905.0	16.20	16.62	16.47	17.0	17.0	17.0
		1880.0	16.24	16.60	16.46	17.0	17.0	17.0
		1855.0	16.14	16.51	16.42	17.0	17.0	17.0
	1RB_24	1905.0	16.25	16.62	16.53	17.0	17.0	17.0
		1880.0	16.29	16.66	16.49	17.0	17.0	17.0
		1855.0	16.19	16.58	16.33	17.0	17.0	17.0
	1RB_0	1905.0	16.25	16.64	16.48	17.0	17.0	17.0
		1880.0	16.24	16.61	16.46	17.0	17.0	17.0
		1855.0	16.22	16.56	16.40	17.0	17.0	17.0
	25RB_25	1905.0	16.24	16.31	16.32	17.0	17.0	17.0
		1880.0	16.20	16.24	16.29	17.0	17.0	17.0
		1855.0	16.19	16.25	16.28	17.0	17.0	17.0
	25RB_12	1905.0	16.23	16.31	16.31	17.0	17.0	17.0
		1880.0	16.27	16.34	16.34	17.0	17.0	17.0
		1855.0	16.16	16.23	16.26	17.0	17.0	17.0
	25RB_0	1905.0	16.21	16.26	16.33	17.0	17.0	17.0
		1880.0	16.20	16.27	16.30	17.0	17.0	17.0
		1855.0	16.13	16.17	16.16	17.0	17.0	17.0
	50RB_0	1905.0	16.24	16.27	16.29	17.0	17.0	17.0
		1880.0	16.25	16.30	16.29	17.0	17.0	17.0
		1855.0	16.19	16.18	16.20	17.0	17.0	17.0

Top Antenna - Reduced power level 1								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
15 MHz	1RB_74	1902.5	16.18	16.54	16.49	17.0	17.0	17.0
		1880.0	16.25	16.56	16.60	17.0	17.0	17.0
		1857.5	16.17	16.42	16.47	17.0	17.0	17.0
	1RB_37	1902.5	16.24	16.59	16.54	17.0	17.0	17.0
		1880.0	16.30	16.64	16.62	17.0	17.0	17.0
		1857.5	16.20	16.45	16.52	17.0	17.0	17.0
	1RB_0	1902.5	16.22	16.60	16.59	17.0	17.0	17.0
		1880.0	16.25	16.60	16.60	17.0	17.0	17.0
		1857.5	16.21	16.48	16.44	17.0	17.0	17.0
	36RB_38	1902.5	16.22	16.31	16.37	17.0	17.0	17.0
		1880.0	16.25	16.30	16.31	17.0	17.0	17.0
		1857.5	16.19	16.24	16.29	17.0	17.0	17.0
	36RB_19	1902.5	16.23	16.30	16.34	17.0	17.0	17.0
		1880.0	16.24	16.30	16.34	17.0	17.0	17.0
		1857.5	16.19	16.21	16.24	17.0	17.0	17.0
	36RB_0	1902.5	16.23	16.29	16.31	17.0	17.0	17.0
		1880.0	16.24	16.31	16.33	17.0	17.0	17.0
		1857.5	16.16	16.21	16.21	17.0	17.0	17.0
	75RB_0	1902.5	16.23	16.21	16.29	17.0	17.0	17.0
		1880.0	16.28	16.33	16.29	17.0	17.0	17.0
		1857.5	16.19	16.19	16.20	17.0	17.0	17.0

Top Antenna - Reduced power level 1								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
20 MHz	1RB_99	1900.0	16.21	16.55	16.45	17.0	17.0	17.0
		1880.0	16.18	16.55	16.52	17.0	17.0	17.0
		1860.0	16.11	16.47	16.44	17.0	17.0	17.0
	1RB_50	1900.0	16.25	16.64	16.59	17.0	17.0	17.0
		1880.0	16.28	16.68	16.61	17.0	17.0	17.0
		1860.0	16.20	16.60	16.52	17.0	17.0	17.0
	1RB_0	1900.0	16.21	16.62	16.52	17.0	17.0	17.0
		1880.0	16.20	16.55	16.55	17.0	17.0	17.0
		1860.0	16.16	16.56	16.47	17.0	17.0	17.0
	50RB_50	1900.0	16.23	16.22	16.26	17.0	17.0	17.0
		1880.0	16.22	16.30	16.33	17.0	17.0	17.0
		1860.0	16.24	16.31	16.29	17.0	17.0	17.0
	50RB_25	1900.0	16.29	16.33	16.29	17.0	17.0	17.0
		1880.0	16.30	16.35	16.36	17.0	17.0	17.0
		1860.0	16.22	16.28	16.28	17.0	17.0	17.0
	50RB_0	1900.0	16.28	16.33	16.35	17.0	17.0	17.0
		1880.0	16.28	16.33	16.33	17.0	17.0	17.0
		1860.0	16.10	16.13	16.13	17.0	17.0	17.0
	100RB_0	1900.0	16.24	16.27	16.30	17.0	17.0	17.0
		1880.0	16.27	16.30	16.33	17.0	17.0	17.0
		1860.0	16.15	16.20	16.22	17.0	17.0	17.0

Top Antenna - Reduced power level 2								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
1.4 MHz	1RB_5	1909.3	15.02	15.37	15.44	16.0	16.0	16.0
		1880.0	15.05	15.40	15.45	16.0	16.0	16.0
		1850.7	15.01	15.32	15.29	16.0	16.0	16.0
	1RB_3	1909.3	15.07	15.46	15.49	16.0	16.0	16.0
		1880.0	15.11	15.44	15.55	16.0	16.0	16.0
		1850.7	15.09	15.40	15.36	16.0	16.0	16.0
	1RB_0	1909.3	15.05	15.31	15.45	16.0	16.0	16.0
		1880.0	15.05	15.37	15.48	16.0	16.0	16.0
		1850.7	15.00	15.29	15.31	16.0	16.0	16.0
	3RB_3	1909.3	15.13	15.21	15.36	16.0	16.0	16.0
		1880.0	15.18	15.22	15.51	16.0	16.0	16.0
		1850.7	15.08	15.17	15.37	16.0	16.0	16.0
	3RB_1	1909.3	15.13	15.24	15.43	16.0	16.0	16.0
		1880.0	15.16	15.21	15.39	16.0	16.0	16.0
		1850.7	15.12	15.17	15.39	16.0	16.0	16.0
	3RB_0	1909.3	15.10	15.17	15.41	16.0	16.0	16.0
		1880.0	15.13	15.23	15.46	16.0	16.0	16.0
		1850.7	15.08	15.17	15.41	16.0	16.0	16.0
	6RB_0	1909.3	15.20	15.37	15.23	16.0	16.0	16.0
		1880.0	15.23	15.37	15.30	16.0	16.0	16.0
		1850.7	15.17	15.33	15.23	16.0	16.0	16.0

Top Antenna - Reduced power level 2								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
3 MHz	1RB_14	1908.5	14.89	15.27	15.30	16.0	16.0	16.0
		1880.0	14.89	15.34	15.28	16.0	16.0	16.0
		1851.5	14.82	15.25	15.17	16.0	16.0	16.0
	1RB_7	1908.5	14.97	15.36	15.28	16.0	16.0	16.0
		1880.0	15.02	15.48	15.40	16.0	16.0	16.0
		1851.5	14.97	15.34	15.30	16.0	16.0	16.0
	1RB_0	1908.5	14.82	15.22	15.14	16.0	16.0	16.0
		1880.0	14.88	15.34	15.29	16.0	16.0	16.0
		1851.5	14.81	15.25	15.22	16.0	16.0	16.0
	8RB_7	1908.5	15.15	15.21	15.27	16.0	16.0	16.0
		1880.0	15.15	15.22	15.22	16.0	16.0	16.0
		1851.5	15.06	15.20	15.19	16.0	16.0	16.0
	8RB_4	1908.5	15.19	15.25	15.29	16.0	16.0	16.0
		1880.0	15.23	15.27	15.31	16.0	16.0	16.0
		1851.5	15.14	15.21	15.23	16.0	16.0	16.0
	8RB_0	1908.5	15.12	15.21	15.26	16.0	16.0	16.0
		1880.0	15.14	15.23	15.23	16.0	16.0	16.0
		1851.5	15.08	15.18	15.18	16.0	16.0	16.0
	15RB_0	1908.5	15.10	15.19	15.18	16.0	16.0	16.0
		1880.0	15.11	15.17	15.23	16.0	16.0	16.0
		1851.5	15.09	15.16	15.14	16.0	16.0	16.0

Top Antenna - Reduced power level 2								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
5 MHz	1RB_24	1907.5	15.15	15.44	15.35	16.0	16.0	16.0
		1880.0	15.16	15.49	15.39	16.0	16.0	16.0
		1852.5	15.08	15.33	15.33	16.0	16.0	16.0
	1RB_12	1907.5	15.27	15.66	15.52	16.0	16.0	16.0
		1880.0	15.31	15.66	15.56	16.0	16.0	16.0
		1852.5	15.21	15.43	15.45	16.0	16.0	16.0
	1RB_0	1907.5	15.14	15.45	15.30	16.0	16.0	16.0
		1880.0	15.16	15.55	15.45	16.0	16.0	16.0
		1852.5	15.11	15.40	15.37	16.0	16.0	16.0
	12RB_13	1907.5	15.23	15.29	15.32	16.0	16.0	16.0
		1880.0	15.22	15.23	15.32	16.0	16.0	16.0
		1852.5	15.21	15.22	15.25	16.0	16.0	16.0
	12RB_6	1907.5	15.23	15.30	15.35	16.0	16.0	16.0
		1880.0	15.24	15.33	15.32	16.0	16.0	16.0
		1852.5	15.25	15.29	15.32	16.0	16.0	16.0
	12RB_0	1907.5	15.17	15.21	15.26	16.0	16.0	16.0
		1880.0	15.22	15.34	15.32	16.0	16.0	16.0
		1852.5	15.13	15.26	15.24	16.0	16.0	16.0
	25RB_0	1907.5	15.25	15.27	15.28	16.0	16.0	16.0
		1880.0	15.26	15.30	15.28	16.0	16.0	16.0
		1852.5	15.18	15.26	15.26	16.0	16.0	16.0

Top Antenna - Reduced power level 2								
LTE Band 2			Actual output Power (dBm)			Tune up		
Band -width	RB No. / RB offset	Frequency (MHz)	Modulation			Modulation		
			QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
10 MHz	1RB_49	1905.0	15.22	15.68	15.42	16.0	16.0	16.0
		1880.0	15.26	15.67	15.49	16.0	16.0	16.0
		1855.0	15.17	15.59	15.45	16.0	16.0	16.0
	1RB_24	1905.0	15.21	15.70	15.46	16.0	16.0	16.0
		1880.0	15.32	15.71	15.59	16.0	16.0	16.0
		1855.0	15.17	15.65	15.48	16.0	16.0	16.0
	1RB_0	1905.0	15.26	15.72	15.48	16.0	16.0	16.0
		1880.0	15.27	15.66	15.58	16.0	16.0	16.0
		1855.0	15.21	15.64	15.48	16.0	16.0	16.0
	25RB_25	1905.0	15.23	15.33	15.35	16.0	16.0	16.0
		1880.0	15.22	15.28	15.31	16.0	16.0	16.0
		1855.0	15.18	15.31	15.27	16.0	16.0	16.0
	25RB_12	1905.0	15.26	15.27	15.29	16.0	16.0	16.0
		1880.0	15.28	15.35	15.36	16.0	16.0	16.0
		1855.0	15.20	15.25	15.28	16.0	16.0	16.0
	25RB_0	1905.0	15.20	15.31	15.27	16.0	16.0	16.0
		1880.0	15.24	15.29	15.31	16.0	16.0	16.0
		1855.0	15.14	15.19	15.22	16.0	16.0	16.0
	50RB_0	1905.0	15.27	15.28	15.31	16.0	16.0	16.0
		1880.0	15.26	15.27	15.29	16.0	16.0	16.0
		1855.0	15.22	15.24	15.22	16.0	16.0	16.0