

# FCC TEST REPORT

**FCC ID: 2AY3H-I069**

**Report No.** : SSP24010019-1E

**Prepared For** : Shenzhen Ajazz Tongchuang Electronic Technology Co., Ltd.

**Product Name** : Wireless Mouse

**Model Name** : I069

**FCC Rule** : FCC Part 15.249

**Date of Issue** : 2024-01-18

**Prepared By** : Shenzhen CCUT Quality Technology Co., Ltd.







**Shenzhen CCUT Quality Technology Co., Ltd.**

1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen,  
Guangdong, China; (Tel.: +86-755-23406590 website: [www.ccuttest.com](http://www.ccuttest.com))

This test report is limited to the above client company and the product model only. It may not be duplicated  
without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.

**Test Report Basic Information**

<b>Applicant</b> .....:	Shenzhen Ajazz Tongchuang Electronic Technology Co., Ltd. 2104-1, Block A, CIMC Low Orbit Satellite Internet of Things Industrial Park, Dongkeng Community, Fenghuang Street, Guangming District, Shenzhen, Address of Applicant.....: Guangdong, China	
<b>Manufacturer</b> .....:	Shenzhen Ajazz Tongchuang Electronic Technology Co., Ltd. 2104-1, Block A, CIMC Low Orbit Satellite Internet of Things Industrial Park, Dongkeng Community, Fenghuang Street, Guangming District, Shenzhen, Address of Manufacturer.....: Guangdong, China	
<b>Product Name</b> .....:	Wireless Mouse	
<b>Brand Name</b> .....:	AJAZZ	
<b>Main Model</b> .....:	I069	
<b>Series Models</b> .....:	I069 PRO	
<b>Test Standard</b> .....:	FCC Part 15 Subpart C ANSI C63.10-2013	
<b>Date of Test</b> .....	2024-01-05 to 2024-01-16	
<b>Test Result</b> .....:	PASS	
<b>Tested Engineer</b> .....	 (Lorzix Luo)	
<b>Project Manager</b> .....:	 (Lieber Ouyang)	
<b>Authorized Signatory</b> .....:	 (Lahm Peng)	
<b>Note :</b> This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen CCUT Quality Technology Co., Ltd.. All test data presented in this test report is only applicable to presented test sample.		

## CONTENTS

<b>1. General Information.....</b>	<b>5</b>
1.1 Product Information .....	5
1.2 Test Setup Information.....	6
1.3 Compliance Standards.....	7
1.4 Test Facilities.....	7
1.5 List of Measurement Instruments .....	8
1.6 Measurement Uncertainty .....	8
<b>2. Summary of Test Results .....</b>	<b>9</b>
<b>3. Antenna Requirement .....</b>	<b>10</b>
3.1 Standard and Limit.....	10
3.2 Test Result .....	10
<b>4. Conducted Emissions .....</b>	<b>11</b>
4.1 Standard and Limit.....	11
4.2 Test Procedure.....	11
4.3 Test Data and Results .....	12
<b>5. Radiated Emissions .....</b>	<b>15</b>
5.1 Standard and Limit.....	15
5.2 Test Procedure.....	15
5.3 Test Data and Results .....	17
<b>6. Out of Band Emissions.....</b>	<b>22</b>
6.1 Standard and Limit.....	22
6.2 Test Procedure.....	22
6.3 Test Data and Results .....	22
<b>7. Occupied Bandwidth .....</b>	<b>27</b>
7.1 Standard and Limit.....	27
7.2 Test Procedure.....	27
7.3 Test Data and Results .....	27

Revision History

Revision	Issue Date	Description	Revised By
V1.0	2024-01-18	Initial Release	Lahm Peng

## 1. General Information

### 1.1 Product Information

Product Name:	Wireless Mouse
Trade Name:	AJAZZ
Main Model:	I069
Series Models:	I069 PRO
Rated Voltage:	DC 3.7V by Battery, USB 5V Charging
Hardware Version:	V1.0
Software Version:	V1.0
Note 1: The test data is gathered from a production sample, provided by the manufacturer.	
Note 2: The color of appearance and model name of series models listed are different from the main model, but the circuit and the electronic construction are the same, declared by the manufacturer.	

Wireless Specification	
Wireless Standard:	2.4G RF
Operating Frequency:	2405 ~ 2470 MHz
Max. Field Strength:	94.52dBuV/m
Quantity of Channel:	16
Channel Separation:	2MHz
Modulation:	GFSK
Antenna Gain:	0dBi
Type of Antenna:	PCB Antenna
Type of Device:	<input checked="" type="checkbox"/> Portable Device <input type="checkbox"/> Mobile Device <input type="checkbox"/> Modular Device

## 1.2 Test Setup Information

List of Test Modes			
Test Mode	Description	Remark	
TM1	Lowest Channel	2405MHz	
TM2	Middle Channel	2445MHz	
TM3	Highest Channel	2470MHz	
List and Details of Auxiliary Cable			
Description	Length (cm)	Shielded/Unshielded	With/Without Ferrite
-	-	-	-
List and Details of Auxiliary Equipment			
Description	Manufacturer	Model	Serial Number
-	-	-	-

List of Channels							
No. of Channel	Frequency MHz	No. of Channel	Frequency MHz	No. of Channel	Frequency MHz	No. of Channel	Frequency MHz
01	2405	05	2422	09	2440	13	2460
02	2409	06	2426	10	2445	14	2465
03	2413	07	2430	11	2450	15	2467
04	2417	08	2435	12	2455	16	2470

### 1.3 Compliance Standards

Compliance Standards	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
All measurements contained in this report were conducted with all above standards	
According to standards for test methodology	
FCC Part 15 Subpart C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY DEVICES, Intentional Radiators
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the product, which result is lowering the emission, should be checked to ensure compliance has been maintained.	

### 1.4 Test Facilities

Laboratory Name:	<b>Shenzhen CCUT Quality Technology Co., Ltd.</b> 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China
CNAS Laboratory No.:	L18863
A2LA Certificate No.:	6893.01
FCC Registration No:	583813
ISED Registration No.:	CN0164
All measurement facilities used to collect the measurement data are located at 1F, Building 35, Changxing Technology Industrial Park, Yutang Street, Guangming District, Shenzhen, Guangdong, China.	

## 1.5 List of Measurement Instruments

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
<b>Conducted Emissions</b>					
AMN	ROHDE&SCHWARZ	ENV216	101097	2023-10-21	2024-10-20
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100242	2023-07-31	2024-07-30
<b>Radiated Emissions</b>					
EMI Test Receiver	ROHDE&SCHWARZ	ESPI	100154	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	MY48030972	2023-07-31	2024-07-30
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40-N	101692	2023-07-31	2024-07-30
Amplifier	SCHWARZBECK	BBV 9743B	00251	2023-07-31	2024-07-30
Amplifier	HUABO	YXL0518-2.5-45	--	2023-07-31	2024-07-30
Amplifier	COM-MW	DLAN-18G-4G-02	10229104	2023-07-31	2024-07-30
Loop Antenna	DAZE	ZN30900C	21104	2023-08-07	2024-08-06
Broadband Antenna	SCHWARZBECK	VULB 9168	01320	2023-08-07	2024-08-06
Horn Antenna	SCHWARZBECK	BBHA 9120D	02553	2023-08-07	2024-08-06
Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2023-08-07	2024-08-06
<b>Conducted RF Testing</b>					
RF Test System	MWRFTTest	MW100-RFCB	220418SQS-37	2023-07-31	2024-07-30
Spectrum Analyzer	KEYSIGHT	N9020A	ATO-90521	2023-07-31	2024-07-30

## 1.6 Measurement Uncertainty

Test Item	Conditions	Uncertainty
Conducted Emissions	9kHz ~ 30MHz	±1.64 dB
Radiated Emissions	9kHz ~ 30MHz	±2.88 dB
	30MHz ~ 1GHz	±3.32 dB
	1GHz ~ 18GHz	±3.50 dB
	18GHz ~ 40GHz	±3.66 dB
Occupied Bandwidth	9kHz ~ 26GHz	±4.0 %

## 2. Summary of Test Results

FCC Rule	Description of Test Item	Result
FCC Part 15.203	Antenna Requirement	Passed
FCC Part 15.207	Conducted Emissions	Passed
FCC Part 15.209, 15.249(a)&(d)	Radiated Emissions	Passed
FCC Part 15.249(d)	Out of Band Emissions	Passed
FCC Part 15.215(c)	Occupied Bandwidth	Passed
Passed: The EUT complies with the essential requirements in the standard Failed: The EUT does not comply with the essential requirements in the standard N/A: Not applicable		

### **3. Antenna Requirement**

---

#### **3.1 Standard and Limit**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an PCB antenna, fulfill the requirement of this section.

## 4. Conducted Emissions

### 4.1 Standard and Limit


According to the rule FCC Part 15.207, Conducted emissions limit, the limit for a wireless device as below:

Frequency of Emission (MHz)	Conducted emissions (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz  
 Note 2: The lower limit applies at the band edges

### 4.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.2.

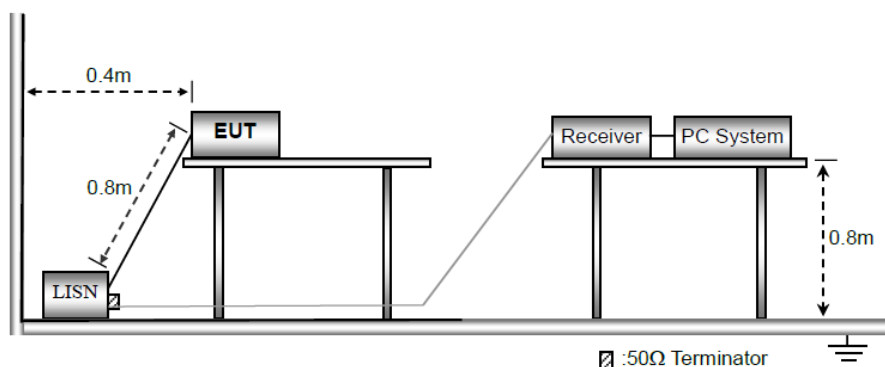

Test Setup Block Diagram

a) The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b) The following is the setting of the receiver

Attenuation: 10dB

Start Frequency: 0.15MHz

Stop Frequency: 30MHz

IF Bandwidth: 9kHz

c) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

d) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

e) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

f) LISN is at least 80 cm from nearest part of EUT chassis.

g) For the actual test configuration, please refer to the related Item - photographs of the test setup.


### **4.3 Test Data and Results**

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

## Test Plots and Data of Conducted Emissions

Tested Mode:	TM1
Test Voltage:	AC 120V/60Hz
Test Power Line:	Neutral
Remark:	

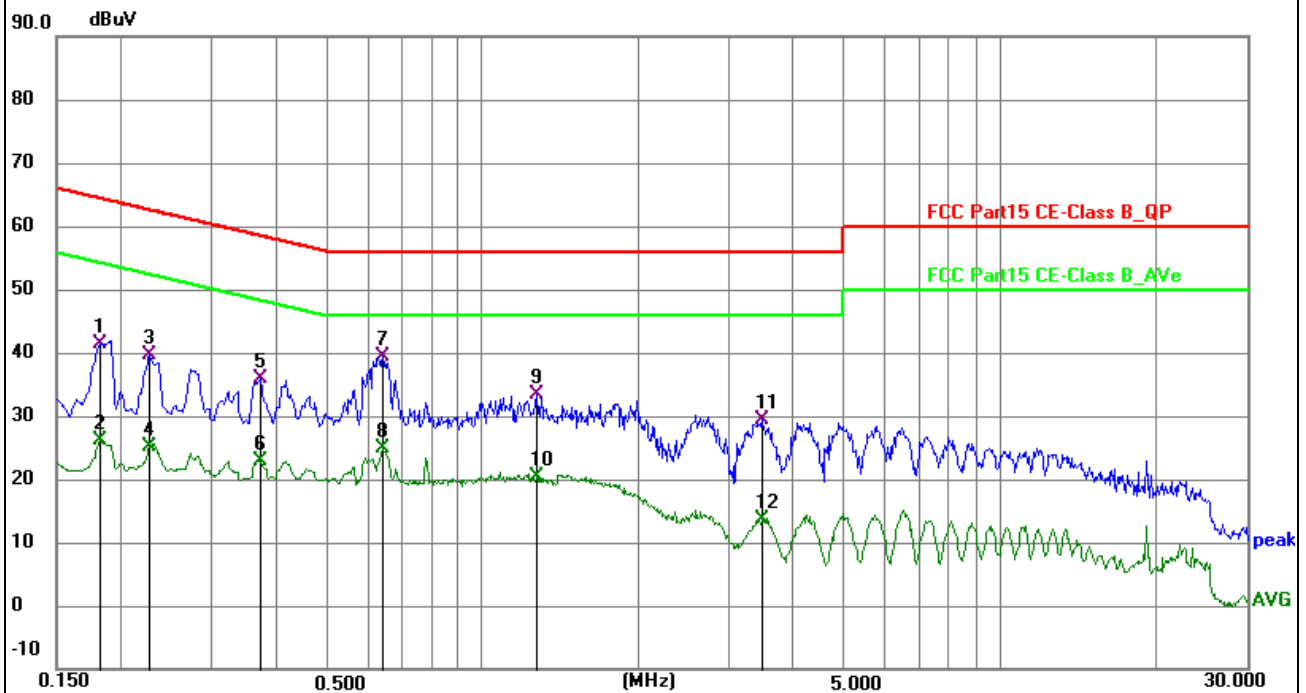

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1815	32.15	9.32	41.47	64.42	-22.95	QP	P	
2	0.1815	16.87	9.32	26.19	54.42	-28.23	AVG	P	
3	0.2265	29.98	9.63	39.61	62.58	-22.97	QP	P	
4	0.2265	15.62	9.63	25.25	52.58	-27.33	AVG	P	
5	0.3704	26.33	9.60	35.93	58.49	-22.56	QP	P	
6	0.3704	13.22	9.60	22.82	48.49	-25.67	AVG	P	
7 *	0.6405	29.65	9.67	39.32	56.00	-16.68	QP	P	
8	0.6405	15.11	9.67	24.78	46.00	-21.22	AVG	P	
9	1.2705	23.45	10.01	33.46	56.00	-22.54	QP	P	
10	1.2705	10.32	10.01	20.33	46.00	-25.67	AVG	P	
11	3.4575	19.28	10.12	29.40	56.00	-26.60	QP	P	
12	3.4575	3.42	10.12	13.54	46.00	-32.46	AVG	P	


## Test Plots and Data of Conducted Emissions

Tested Mode: TM1

Test Voltage: AC 120V/60Hz

Test Power Line: Live

Remark:

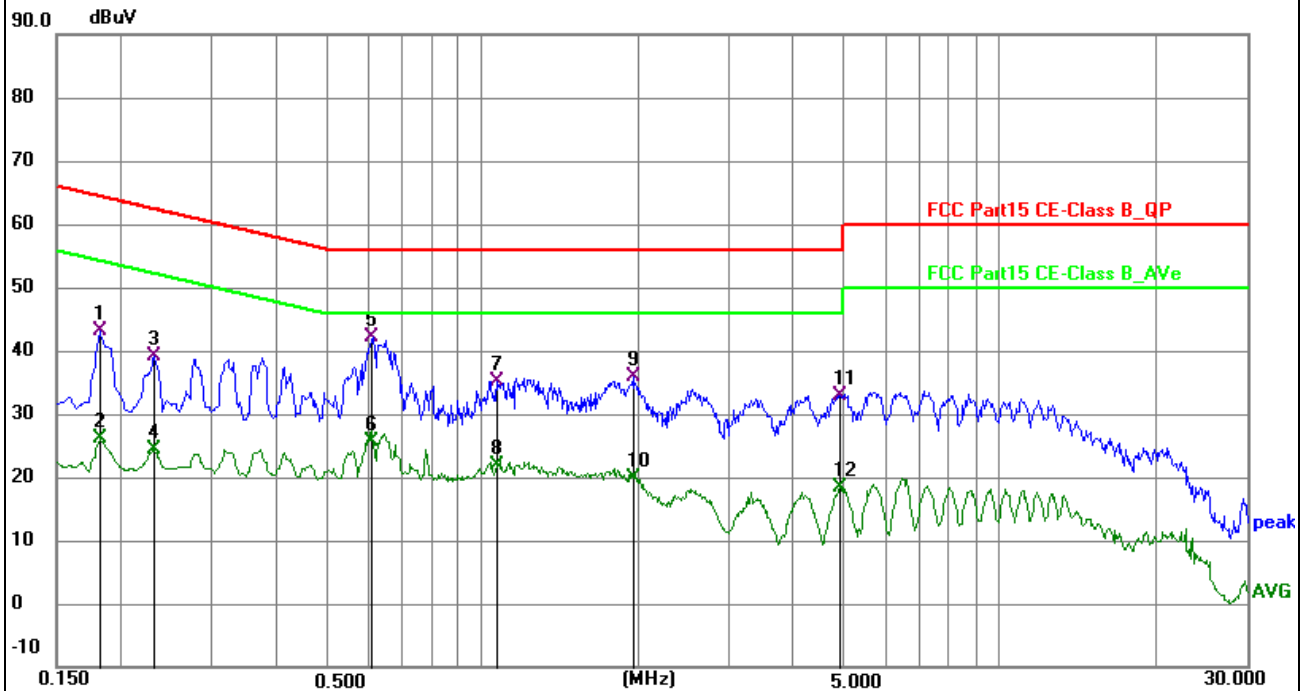

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1815	34.12	9.02	43.14	64.42	-21.28	QP	P	
2	0.1815	17.04	9.02	26.06	54.42	-28.36	AVG	P	
3	0.2310	29.73	9.31	39.04	62.41	-23.37	QP	P	
4	0.2310	15.19	9.31	24.50	52.41	-27.91	AVG	P	
5 *	0.6134	32.21	9.94	42.15	56.00	-13.85	QP	P	
6	0.6134	15.57	9.94	25.51	46.00	-20.49	AVG	P	
7	1.0680	25.02	9.99	35.01	56.00	-20.99	QP	P	
8	1.0680	11.94	9.99	21.93	46.00	-24.07	AVG	P	
9	1.9545	25.82	10.05	35.87	56.00	-20.13	QP	P	
10	1.9545	9.80	10.05	19.85	46.00	-26.15	AVG	P	
11	4.9020	22.59	10.22	32.81	56.00	-23.19	QP	P	
12	4.9020	8.07	10.22	18.29	46.00	-27.71	AVG	P	

## 5. Radiated Emissions

### 5.1 Standard and Limit

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

According to §15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

According to the rule FCC Part 15.209, Radiated emission limit for a wireless device as below:


Frequency of emission (MHz)	Radiated emissions (3m)
	Quasi-peak (dBuV/m)
30-88	40
88-216	43.5
216-960	46
Above 960	54
Note: The more stringent limit applies at transition frequencies.	

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


*Note: Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.*

### 5.2 Test Procedure


Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

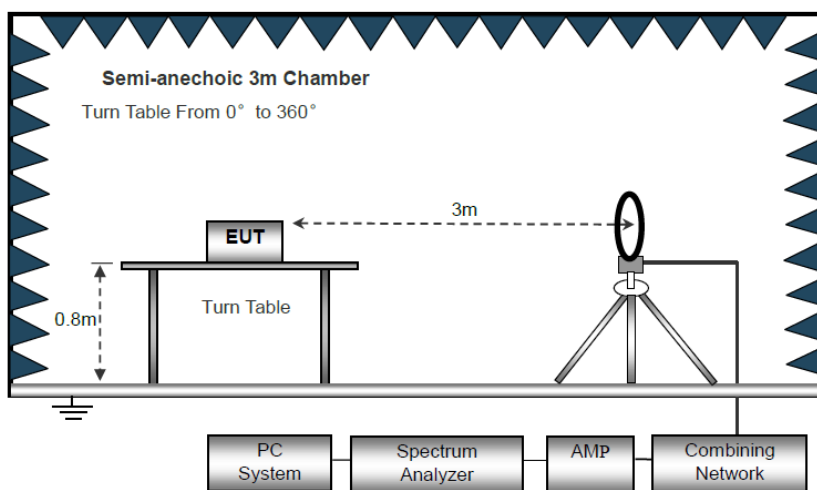

Block Diagram of Radiated Emission Below 30MHz

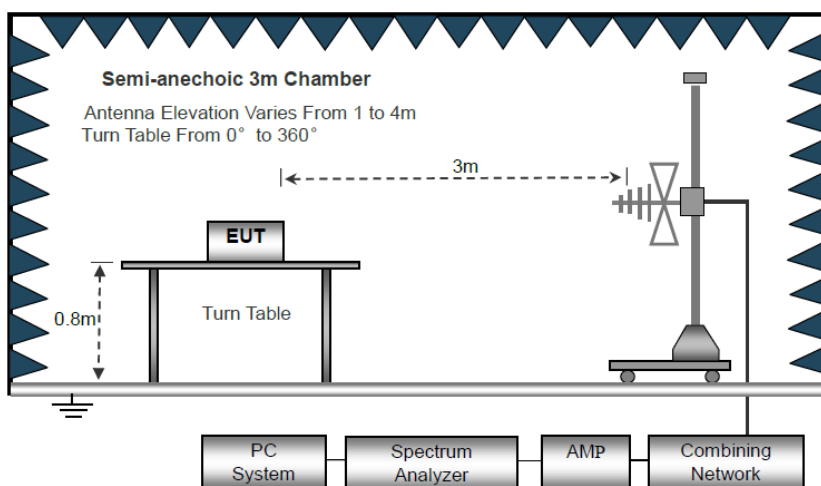

Block Diagram of Radiated Emission From 30MHz to 1GHz

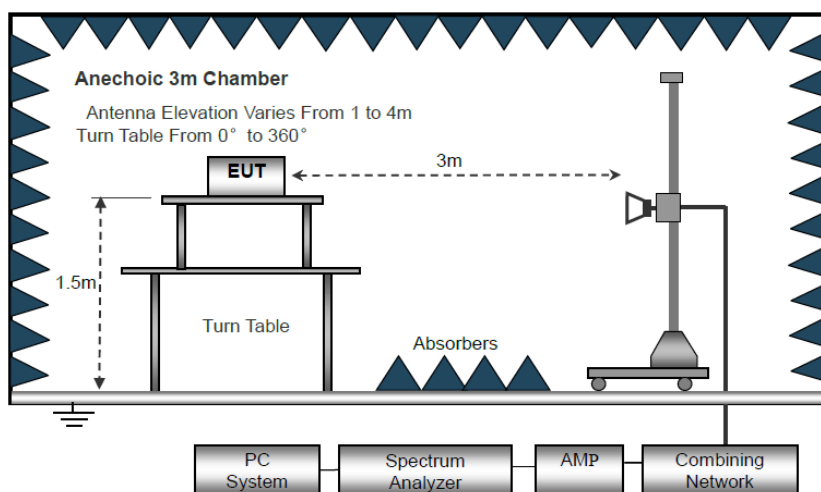

Block Diagram of Radiated Emission Above 1GHz

- a) The EUT is placed on a turntable, which is 0.8m above ground plane for test frequency range below 1GHz, and 1.5m above ground plane for test frequency range above 1GHz.
- b) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- c) Use the following spectrum analyzer settings:  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz for  $f \geq 1\text{GHz}$ , 100 kHz for  $f < 1\text{GHz}$ , 10kHz for  $f < 30\text{MHz}$   
VBW  $\geq$  RBW, Sweep = auto  
Detector function = peak  
Trace = max hold
- d) Follow the guidelines in ANSI C63.4-2014 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- e) The peak level, once corrected, must comply with the limit specified in Section 15.209. Set the RBW = 1MHz, VBW = 10Hz, Detector = PK for AV value, while maintaining all of the other instrument settings.
- f) For the actual test configuration, please refer to the related item - EUT test photos.

### 5.3 Test Data and Results


Based on all tested data, the EUT complied with the FCC Part 15.249 standard limit for a wireless device, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Note: For 9kHz-30MHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Remark:	

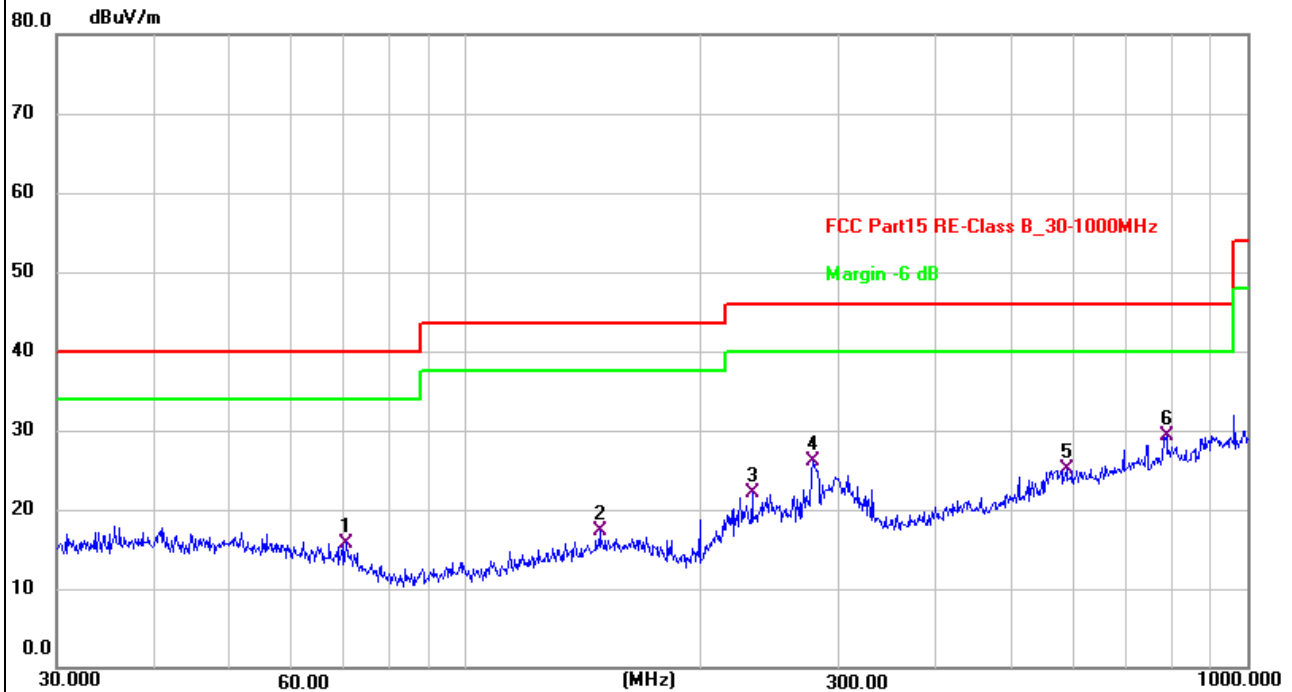


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	70.3365	26.82	-11.02	15.80	40.00	-24.20	QP	100	114	P	
2	148.4410	26.17	-8.83	17.34	43.50	-26.16	QP	100	44	P	
3	232.5318	32.48	-10.47	22.01	46.00	-23.99	QP	100	308	P	
4	278.0668	34.95	-8.92	26.03	46.00	-19.97	QP	100	297	P	
5	586.8437	26.55	-1.50	25.05	46.00	-20.95	QP	100	196	P	
6 *	787.8513	27.25	2.07	29.32	46.00	-16.68	QP	100	206	P	

## Radiated Emission Test Data (30MHz to 1GHz)

Tested Mode: TM1

Test Antenna Polarization: Vertical

Remark:

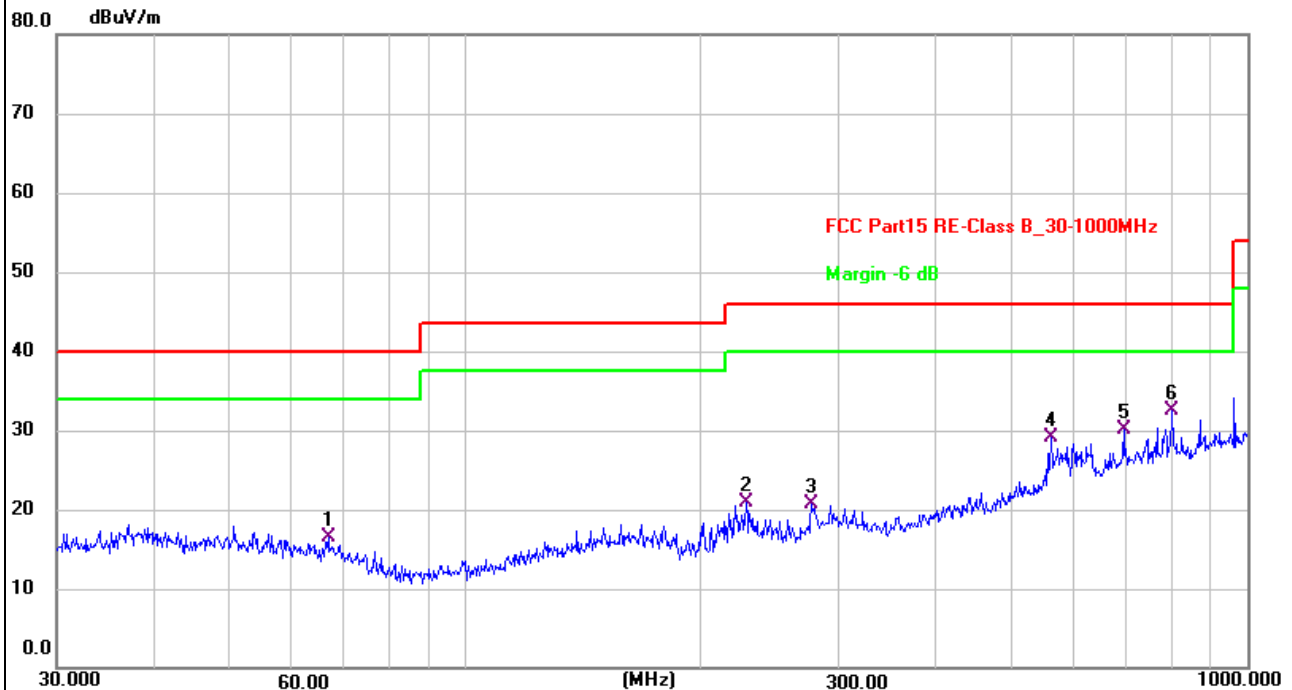

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	66.7325	27.13	-10.60	16.53	40.00	-23.47	QP	100	351	P	
2	228.4904	31.63	-10.73	20.90	46.00	-25.10	QP	100	11	P	
3	277.0935	29.62	-8.96	20.66	46.00	-25.34	QP	100	52	P	
4	560.6928	31.59	-2.49	29.10	46.00	-16.90	QP	100	183	P	
5	694.4174	29.67	0.53	30.20	46.00	-15.80	QP	100	233	P	
6 *	801.7863	30.02	2.46	32.48	46.00	-13.52	QP	100	183	P	

Radiated Emission Test Data (Above 1GHz)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Lowest Channel (2405MHz)							
2405	114.47	-20.89	93.58	114	-20.42	H	PK
2405	92.25	-20.89	71.36	94	-22.64	H	AV
4810	75.96	-14.72	61.24	74	-12.76	H	PK
4810	61.11	-14.72	46.39	54	-7.61	H	AV
7215	63.58	-8.38	55.2	74	-18.8	H	PK
7215	45.77	-8.38	37.39	54	-16.61	H	AV
2405	105.98	-20.89	85.09	114	-28.91	V	PK
2405	91.13	-20.89	70.24	94	-23.76	V	AV
4810	77.85	-14.72	63.13	74	-10.87	V	PK
4810	59.67	-14.72	44.95	54	-9.05	V	AV
7215	62.74	-8.38	54.36	74	-19.64	V	PK
7215	45.56	-8.38	37.18	54	-16.82	V	AV
Middle Channel (2445MHz)							
2445	114.42	-20.64	93.78	114	-20.22	H	PK
2445	91.22	-20.64	70.58	94	-23.42	H	AV
4890	77.13	-14.64	62.49	74	-11.51	H	PK
4890	61.48	-14.64	46.84	54	-7.16	H	AV
7335	63.61	-8.28	55.33	74	-18.67	H	PK
7335	47.09	-8.28	38.81	54	-15.19	H	AV
2445	103.15	-20.64	82.51	114	-31.49	V	PK
2445	89.33	-20.64	68.69	94	-25.31	V	AV
4890	77.86	-14.64	63.22	74	-10.78	V	PK
4890	59.21	-14.64	44.57	54	-9.43	V	AV
7335	65.8	-8.28	57.52	74	-16.48	V	PK
7335	48.02	-8.28	39.74	54	-14.26	V	AV

Radiated Emission Test Data (Above 1GHz)							
Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	H/V	PK/AV
Highest Channel (2470MHz)							
2470	115.10	-20.58	94.52	114	-19.48	H	PK
2470	94.23	-20.58	73.65	94	-20.35	H	AV
4940	75.33	-14.54	60.79	74	-13.21	H	PK
4940	59.15	-14.54	44.61	54	-9.39	H	AV
7410	63.56	-8.14	55.42	74	-18.58	H	PK
7410	47.75	-8.14	39.61	54	-14.39	H	AV
2470	110.43	-20.58	89.85	114	-24.15	V	PK
2470	106.96	-20.58	86.38	94	-7.62	V	AV
4940	73.86	-14.53	59.33	74	-14.67	V	PK
4940	58.7	-14.53	44.17	54	-9.83	V	AV
7410	63.89	-8.13	55.76	74	-18.24	V	PK
7410	46.4	-8.13	38.27	54	-15.73	V	AV

Note 1: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Note 2: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The measurements greater than 20dB below the limit from 9kHz to 30MHz.


## 6. Out of Band Emissions

### 6.1 Standard and Limit

According to §15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 6.2 Test Procedure

Test is conducting under the description of ANSI C63.10 - 2013 section 6.3 to 6.6.

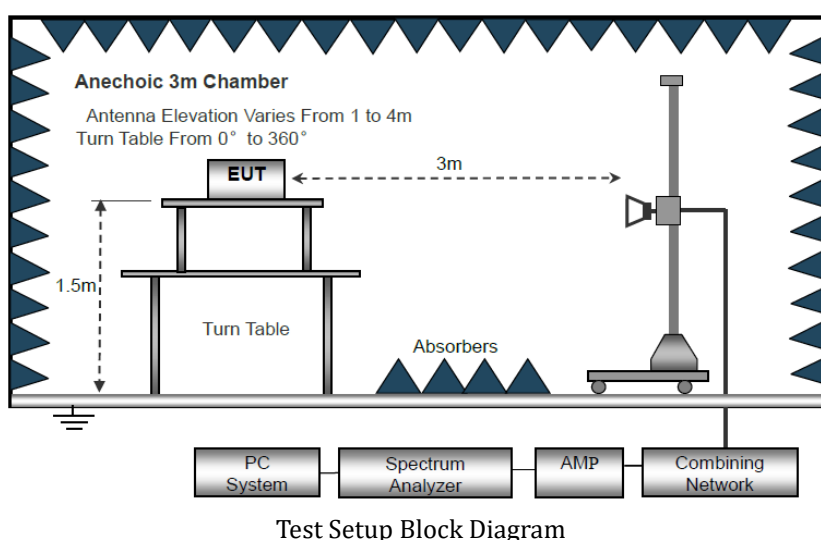

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

### 6.3 Test Data and Results


Based on all tested data, the EUT complied with the FCC Part 15.249 standard limit, and with the worst case as below:

Remark: Level = Reading + Factor, Margin = Level - Limit

Test Mode	Frequency	Limit	Result
	MHz	dBuV/dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	>50 dBc	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

## Test Plots and Data of Out of Band Emissions


Tested Mode:	TM1
Test Antenna Polarization:	Horizontal
Test Band-edge:	Lowest band-edge
Remark:	

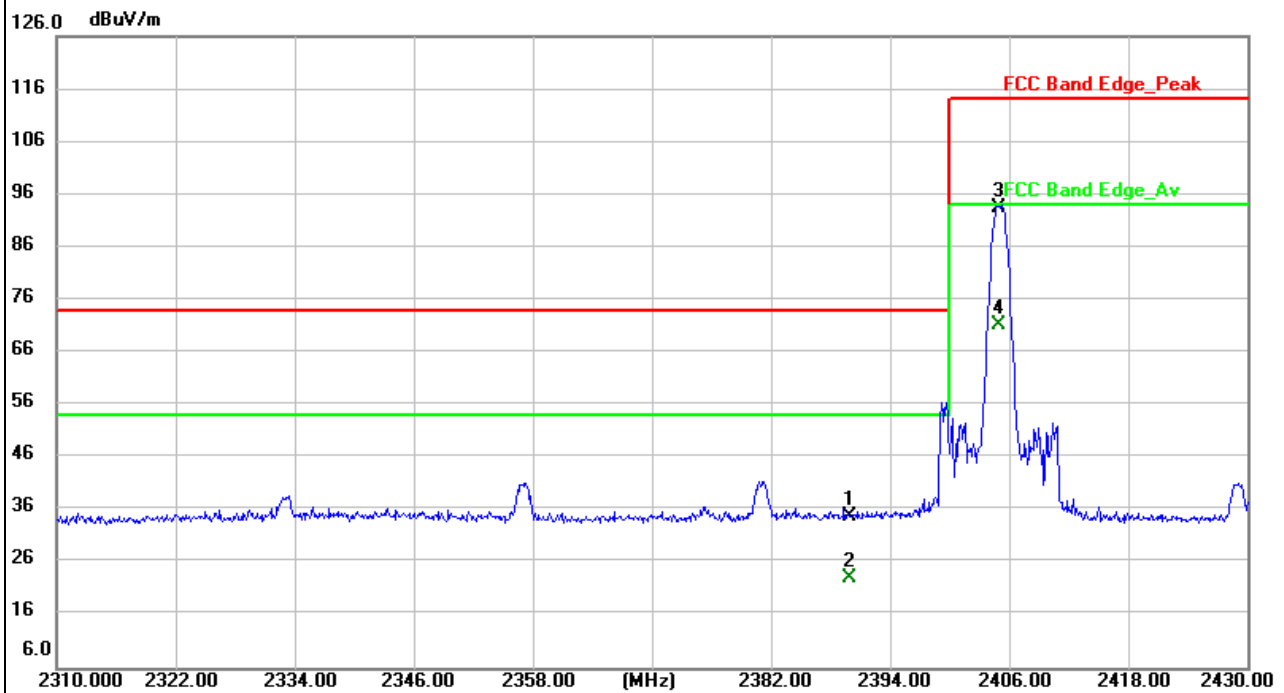

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	55.89	-20.96	34.93	74.00	-39.07	peak	150	338	P	
2	2390.000	44.06	-20.96	23.10	54.00	-30.90	AVG	150	338	P	
3 *	2405.000	114.47	-20.89	93.58	114.00	-20.42	peak	150	70	P	
4	2405.000	92.25	-20.89	71.36	94.00	-22.64	AVG	150	70	P	

## Test Plots and Data of Out of Band Emissions

Tested Mode:	TM1
Test Antenna Polarization:	Vertical
Test Band-edge:	Lowest band-edge
Remark:	

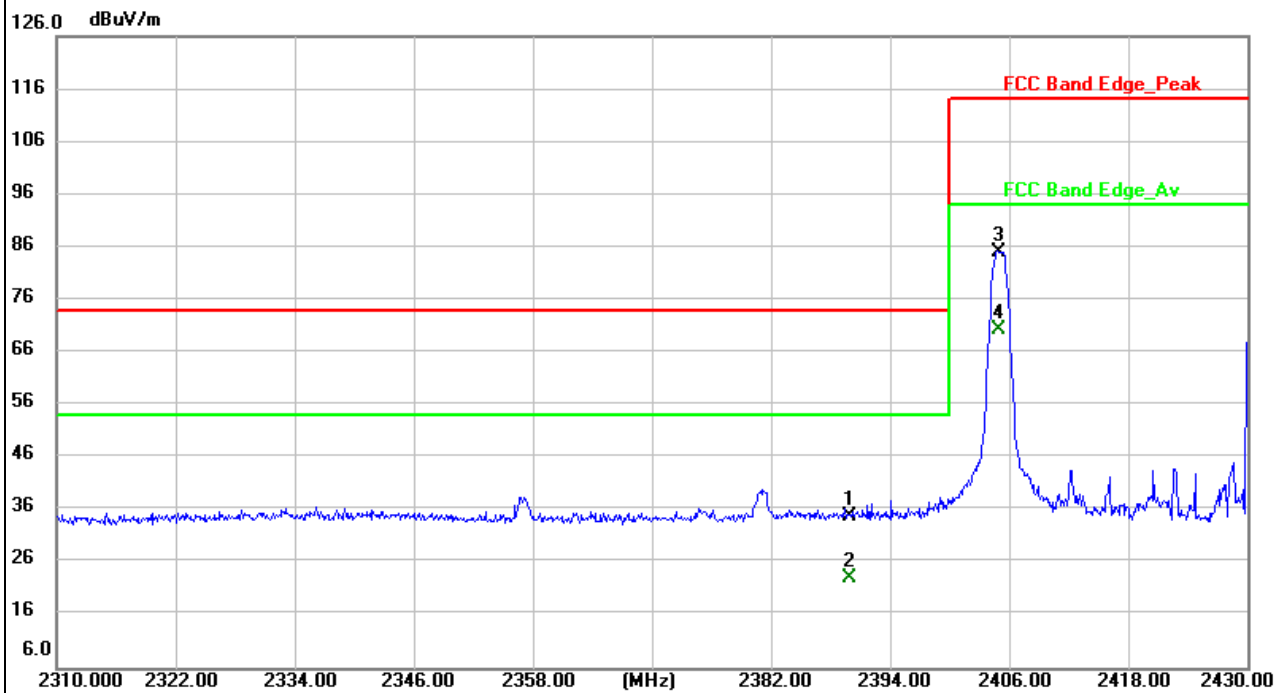

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2390.000	55.86	-20.96	34.90	74.00	-39.10	peak	150	62	P	
2	2390.000	44.12	-20.96	23.16	54.00	-30.84	AVG	150	62	P	
3	2405.000	105.98	-20.89	85.09	114.00	-28.91	peak	150	245	P	
4 *	2405.000	91.13	-20.89	70.24	94.00	-23.76	AVG	150	245	P	


## Test Plots and Data of Out of Band Emissions

Tested Mode: TM3

Test Antenna Polarization: Horizontal

Test Band-edge: Highest band-edge


Remark:

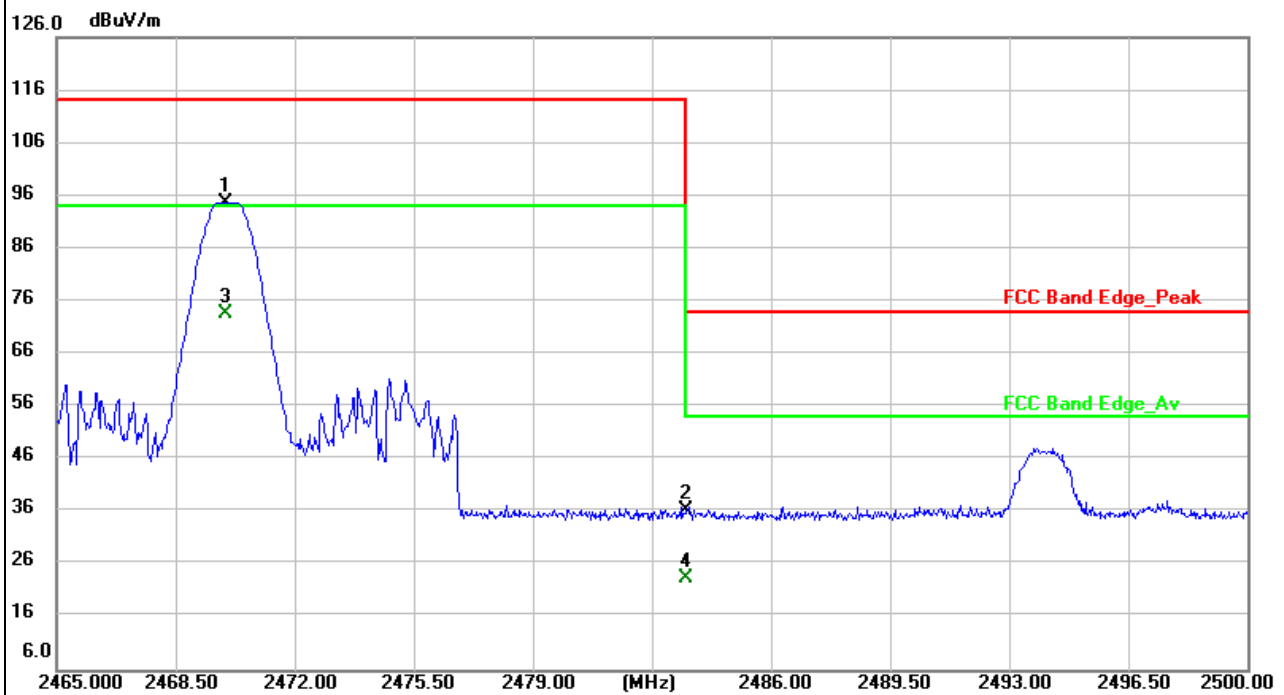

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	2470.000	115.10	-20.58	94.52	114.00	-19.48	peak	150	34	P	
2	2483.500	56.93	-20.51	36.42	74.00	-37.58	peak	150	86	P	
3	2470.000	94.23	-20.58	73.65	94.00	-20.35	AVG	150	34	P	
4	2483.500	44.01	-20.51	23.50	54.00	-30.50	AVG	150	86	P	

## Test Plots and Data of Out of Band Emissions

Tested Mode:	TM3
Test Antenna Polarization:	Vertical
Test Band-edge:	Highest band-edge
Remark:	

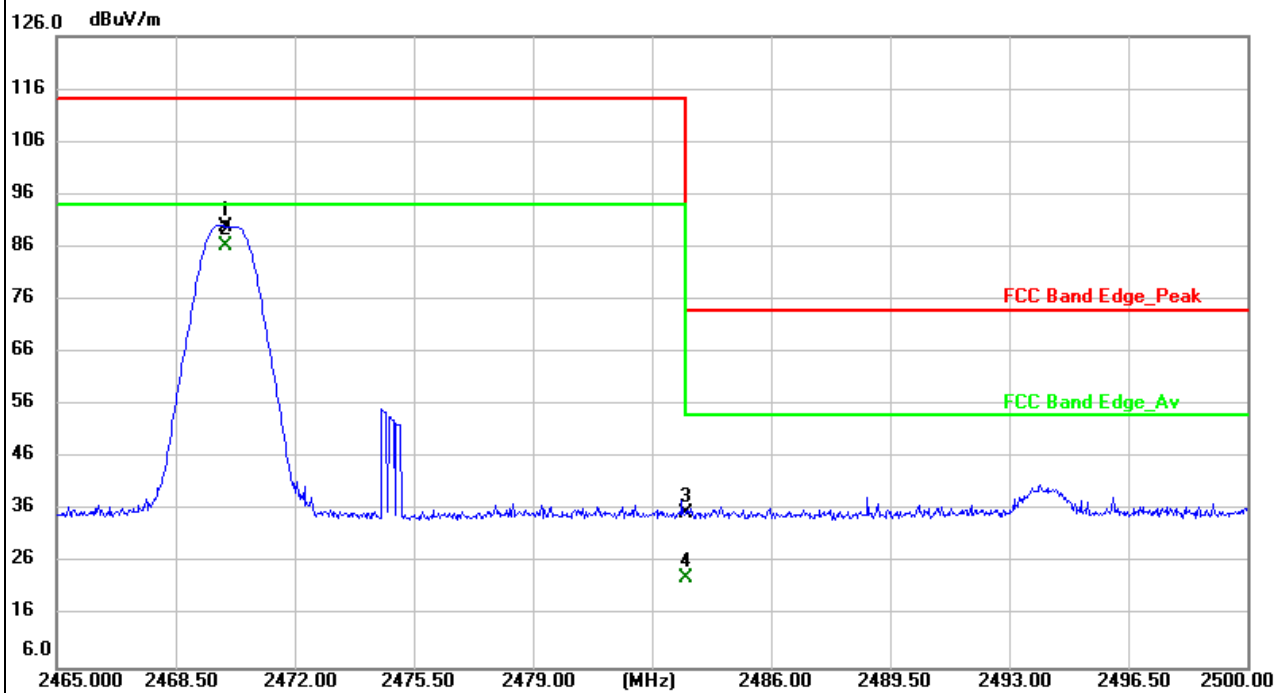

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2470.000	110.43	-20.58	89.85	114.00	-24.15	peak	150	328	P	
2 *	2470.000	106.96	-20.58	86.38	94.00	-7.62	AVG	150	328	P	
3	2483.500	55.97	-20.51	35.46	74.00	-38.54	peak	150	30	P	
4	2483.500	43.90	-20.51	23.39	54.00	-30.61	AVG	150	30	P	

## 7. Occupied Bandwidth

### 7.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 7.2 Test Procedure

According to the ANSI 63.10-2013, section 6.9, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 2MHz, centered on a transmitting channel

RBW  $\geq$  1% 20dB Bandwidth, VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.




Test Setup Block Diagram

### 7.3 Test Data and Results


Test Channel	Test Frequency	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Lowest Channel	2405MHz	2.345	2.0365
Middle Channel	2445MHz	2.346	2.0509
Highest Channel	2470MHz	2.299	2.0412

## Test Plots of Occupied Bandwidth


2405MHz

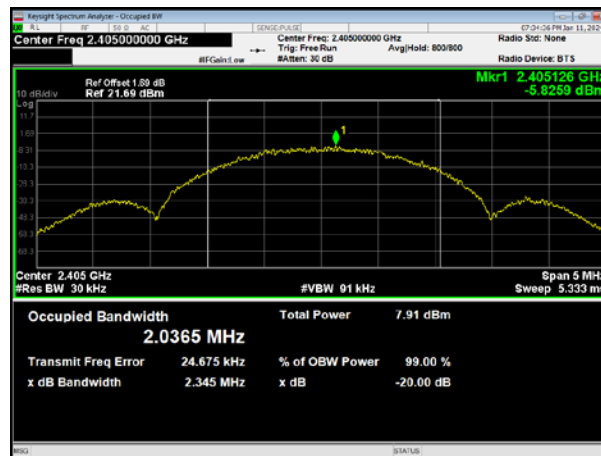

2445MHz

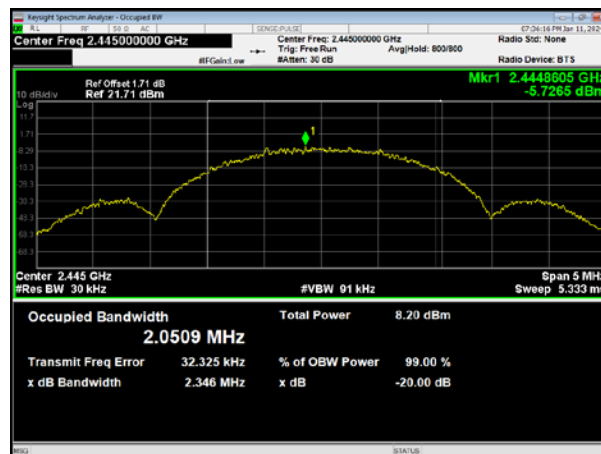

2470MHz

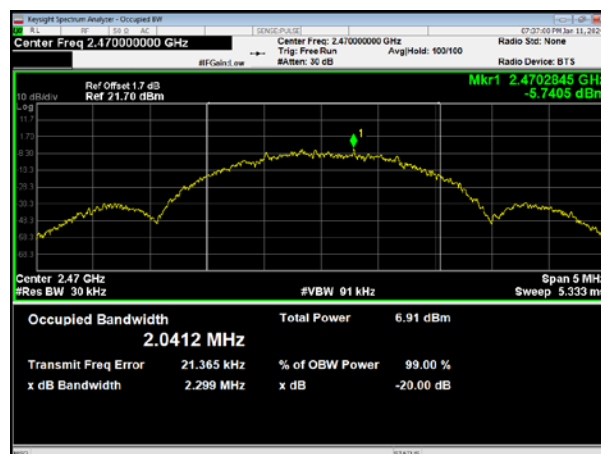

\*\*\*\*\* END OF REPORT \*\*\*\*\*