

#01_GSM850_GPRS (2 Tx slots)_Right Cheek_0mm_Ch128

Communication System: GPRS-FDD; Frequency: 824.200 MHz; Duty Cycle: 1:4.15

Medium: HSL_850_230925 Medium parameters used: $f = 824.200$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: GSM, 10024-DAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.802 W/kg; SAR (10g) = 0.496 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.749 W/kg; SAR (8g) = 0.439 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 67.8 %

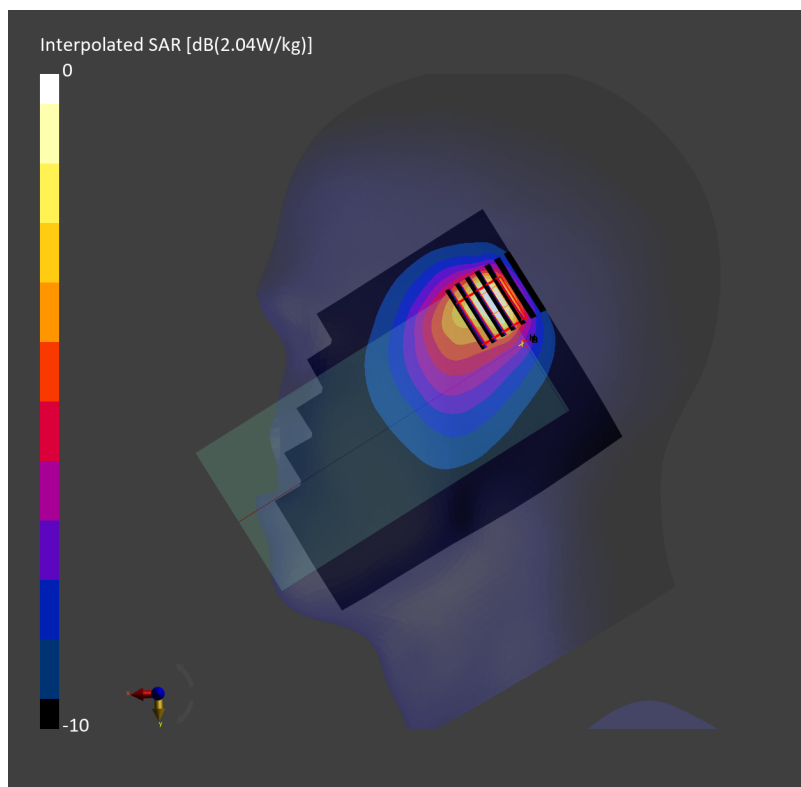

#02_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21350


Communication System: LTE-FDD; Frequency: 2560.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230924 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 37.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.96, 7.96, 7.96); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.543 W/kg; SAR (10g) = 0.274 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.18 dB
SAR (1g) = 0.579 W/kg; SAR (8g) = 0.334 W/kg; SAR (10g) = 0.308 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 84.2 %

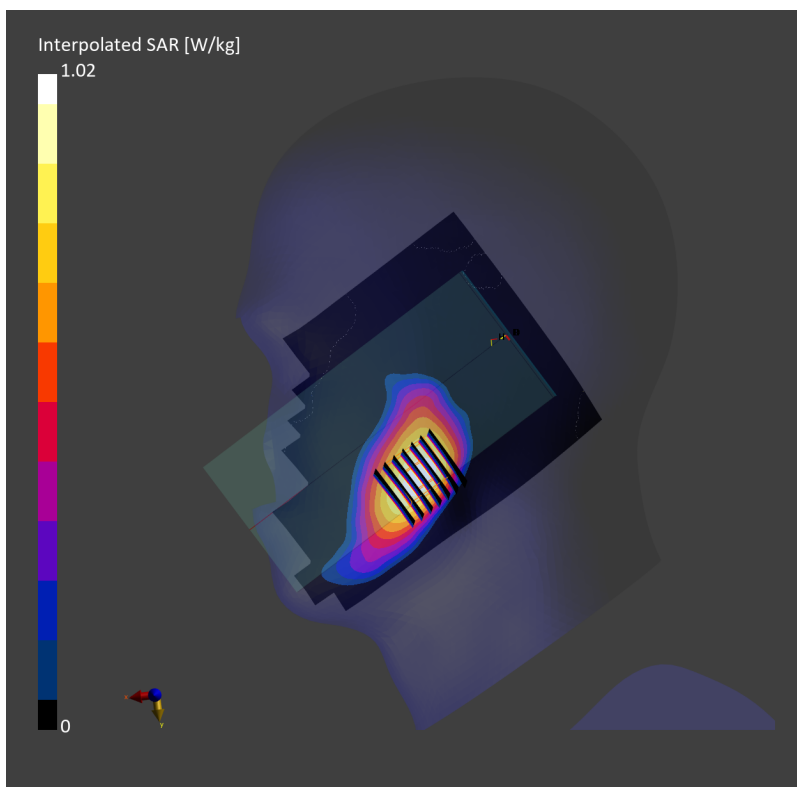

#03_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095


Communication System: LTE-FDD; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230923 Medium parameters used: $f=707.500$ MHz; $\sigma=0.883$ S/m; $\epsilon_r=42.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.58, 10.58, 10.58); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.680 W/kg; SAR (10g) = 0.411 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.2 mm x 5.2 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.632 W/kg; SAR (8g) = 0.356 W/kg; SAR (10g) = 0.331 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 63.7 %

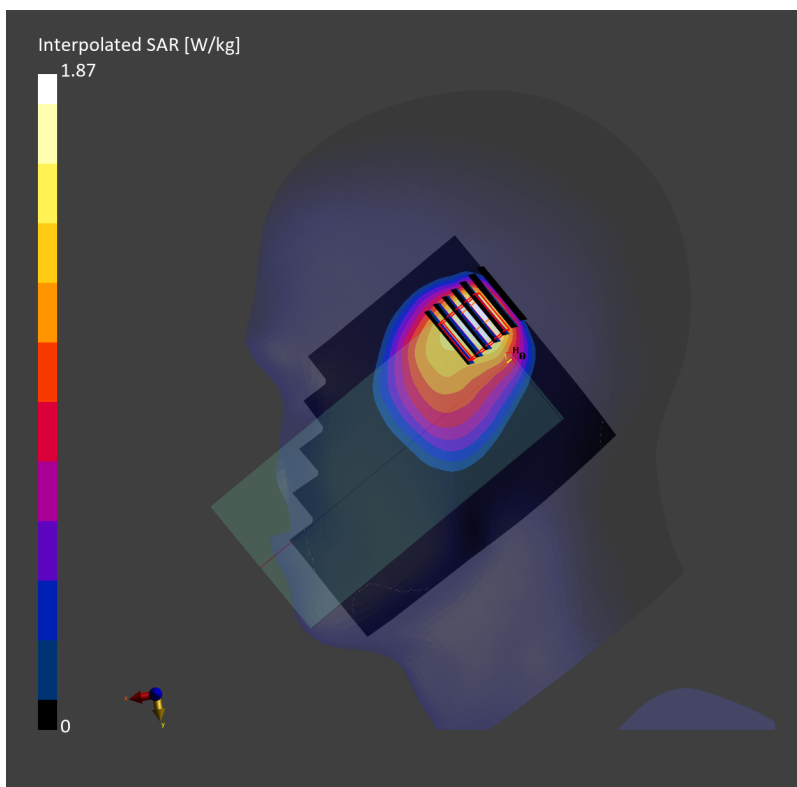

#04_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL_850_230925 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 41.4$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.489 W/kg; SAR (10g) = 0.302 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.7 mm x 5.7 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.438 W/kg; SAR (8g) = 0.269 W/kg; SAR (10g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 70.9 %

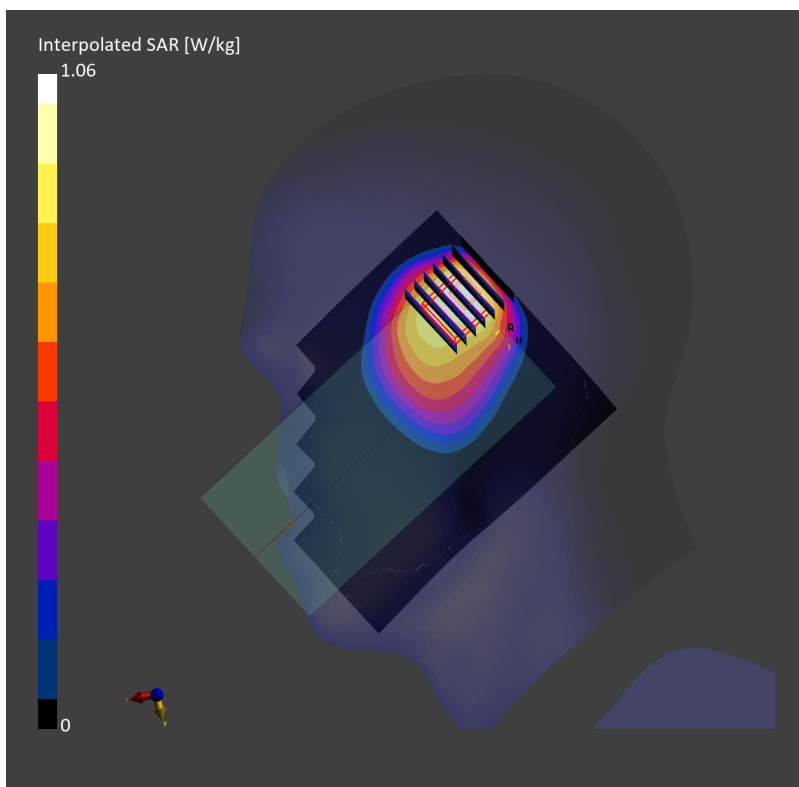

#05_LTE Band 41_20M_QPSK_1_0_Right Cheek_0mm_Ch41490


Communication System: LTE-TDD; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_230924 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.07$ S/m; $\epsilon_r = 37.5$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.96, 7.96, 7.96); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.569 W/kg; SAR (10g) = 0.286 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.16 dB
SAR (1g) = 0.610 W/kg; SAR (8g) = 0.344 W/kg; SAR (10g) = 0.316 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 82.6 %

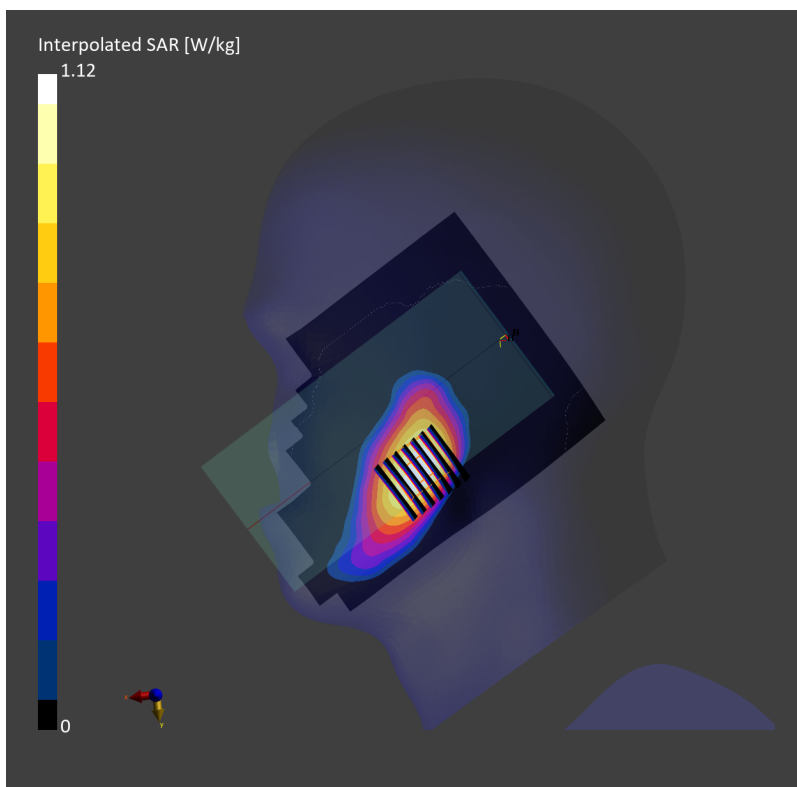

#06_FR1 n7_50M_BPSK_1_1_Right Cheek_0mm_Ch507000


Communication System: 5G NR; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230928 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.96, 7.96, 7.96); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.598 W/kg; SAR (10g) = 0.306 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.04 dB
SAR (1g) = 0.638 W/kg; SAR (8g) = 0.374 W/kg; SAR (10g) = 0.345 W/kg
Smallest distance from peaks to all points 3 dB below = 9.7 mm
Ratio of SAR at M2 to SAR at M1 = 83.9 %

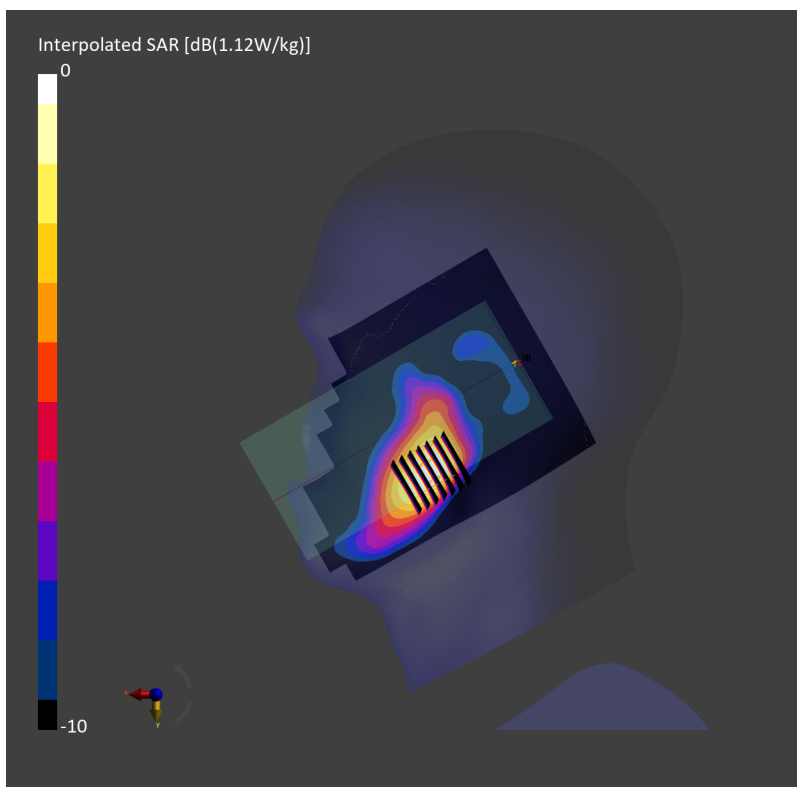

#07_FR1 n12_15M_BPSK_1_1_Right Cheek_0mm_Ch141500


Communication System: 5G NR; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_231016 Medium parameters used: $f=707.500$ MHz; $\sigma=0.884$ S/m; $\epsilon_r=42.1$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.58, 10.58, 10.58); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.645 W/kg; SAR (10g) = 0.390 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.623 W/kg; SAR (8g) = 0.342 W/kg; SAR (10g) = 0.316 W/kg
Smallest distance from peaks to all points 3 dB below = 6.2 mm
Ratio of SAR at M2 to SAR at M1 = 65.1 %

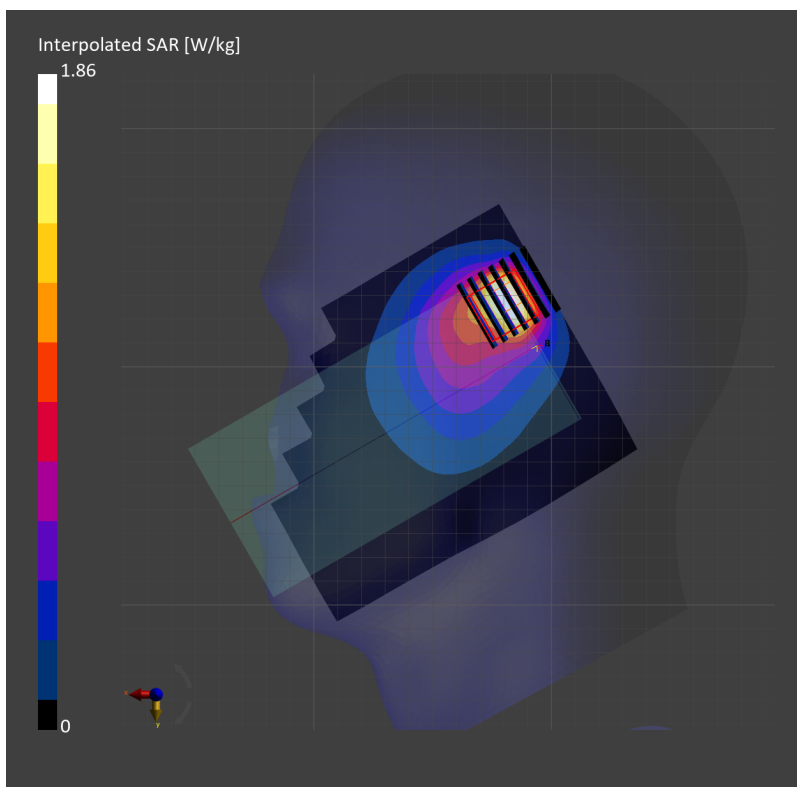

#08_FR1 n26_20M_BPSK_1_1_Right Cheek_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_850_231013 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.721 W/kg; SAR (10g) = 0.450 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.712 W/kg; SAR (8g) = 0.415 W/kg; SAR (10g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

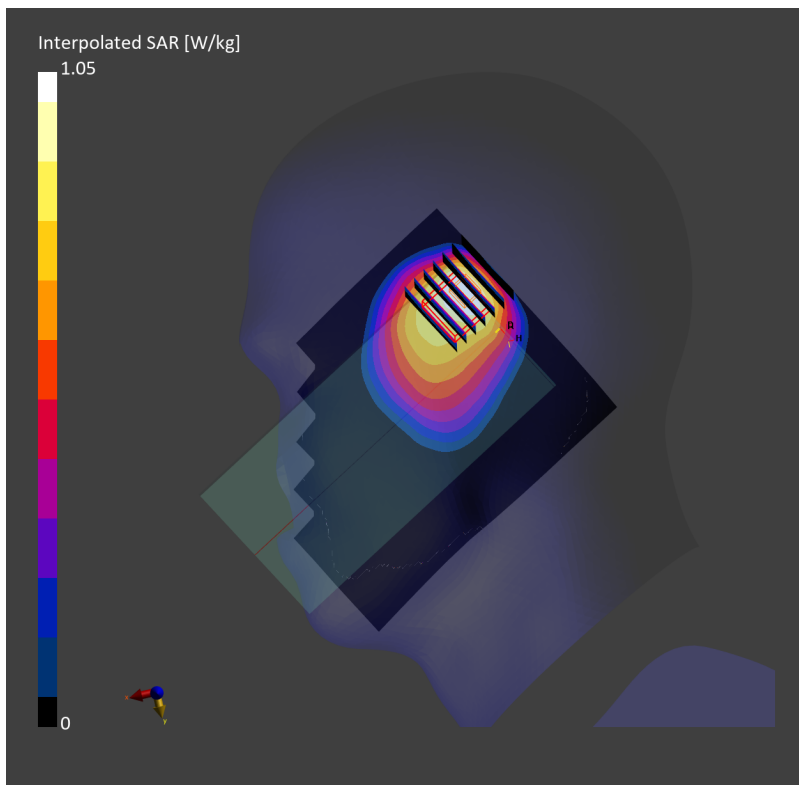

#09_FR1 n41_100M_BPSK_135_0_Right Cheek_0mm_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL_2600_231012 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.2$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.96, 7.96, 7.96); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.489 W/kg; SAR (10g) = 0.250 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.515 W/kg; SAR (8g) = 0.300 W/kg; SAR (10g) = 0.276 W/kg
Smallest distance from peaks to all points 3 dB below = 9.6 mm
Ratio of SAR at M2 to SAR at M1 = 86.3 %

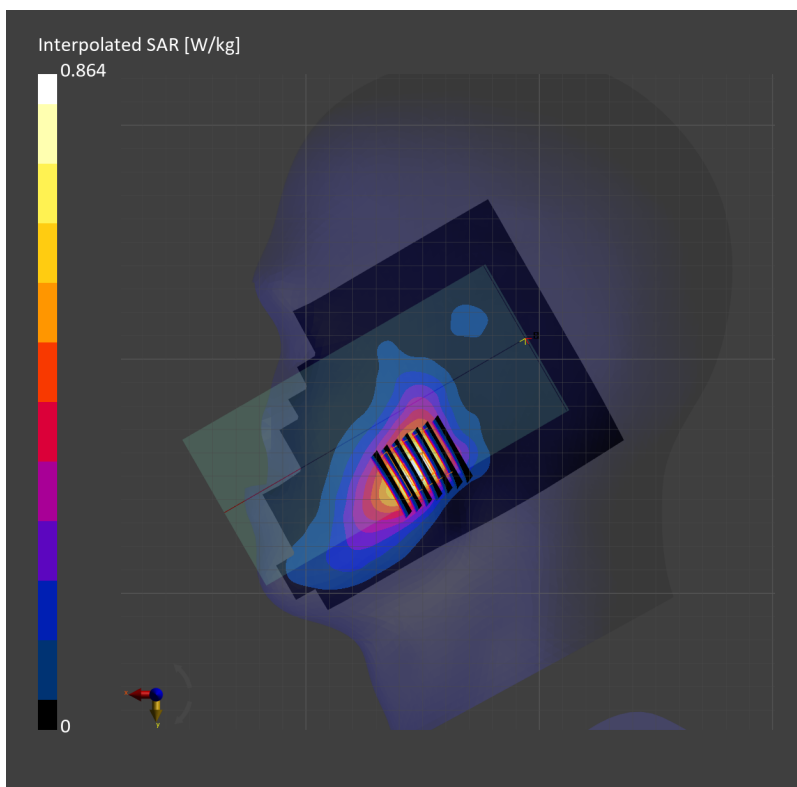

#10_FR1 n77_100M_BPSK_1_1_Right Cheek_0mm_Ch633332

Communication System: 5G NR ; Frequency: 3499.980 MHz; Duty Cycle: 1:1

Medium: HSL_3500_231007 Medium parameters used: $f=3499.980$ MHz; $\sigma=2.95$ S/m; $\epsilon_r=37.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7692; ConvF(7.1, 6.9, 8.02); Calibrated: 2023-07-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn661; Calibrated: 2023-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.661 W/kg; SAR (10g) = 0.297 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.696 W/kg; SAR (8g) = 0.355 W/kg; SAR (10g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

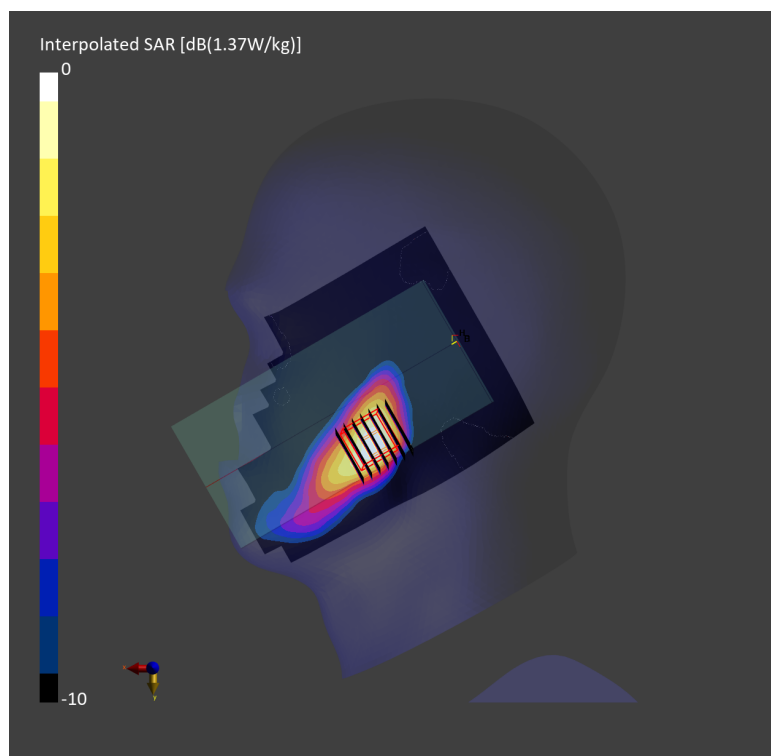

#11_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch12


Communication System: IEEE 802.11b; Frequency: 2467.000 MHz; Duty Cycle: 1:1.012
Medium: HSL_2450_231007 Medium parameters used: $f = 2467.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.6, 7.35, 6.64); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.748 W/kg; SAR (10g) = 0.276 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.741 W/kg; SAR (8g) = 0.314 W/kg; SAR (10g) = 0.277 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 79.6 %

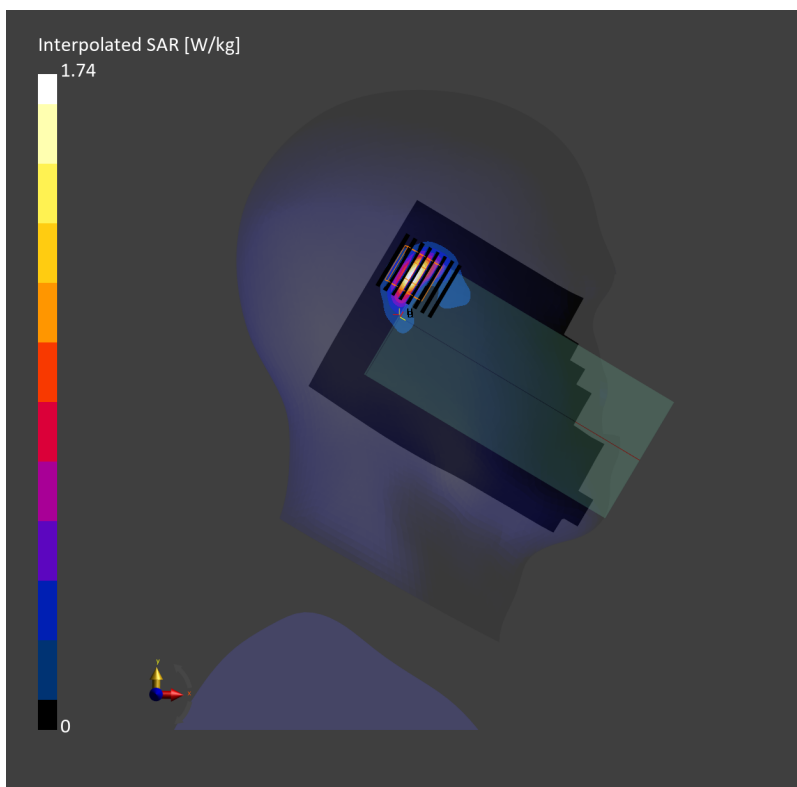

#12_WLAN5GHz_802.11a 6Mbps_Right Cheek_0mm_Ch52

Communication System: IEEE 802.11a; Frequency: 5260.000 MHz; Duty Cycle: 1:1.07
Medium: HSL_5G_231014 Medium parameters used: $f = 5260.000$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(5.18, 5.03, 5.06); Calibrated: 2023-01-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.820 W/kg; SAR (10g) = 0.288 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.14 dB
SAR (1g) = 0.171 W/kg; SAR (8g) = 0.060 W/kg; SAR (10g) = 0.052 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 66.3 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.14 dB
SAR (1g) = 0.946 W/kg; SAR (8g) = 0.345 W/kg; SAR (10g) = 0.3 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 66.3 %

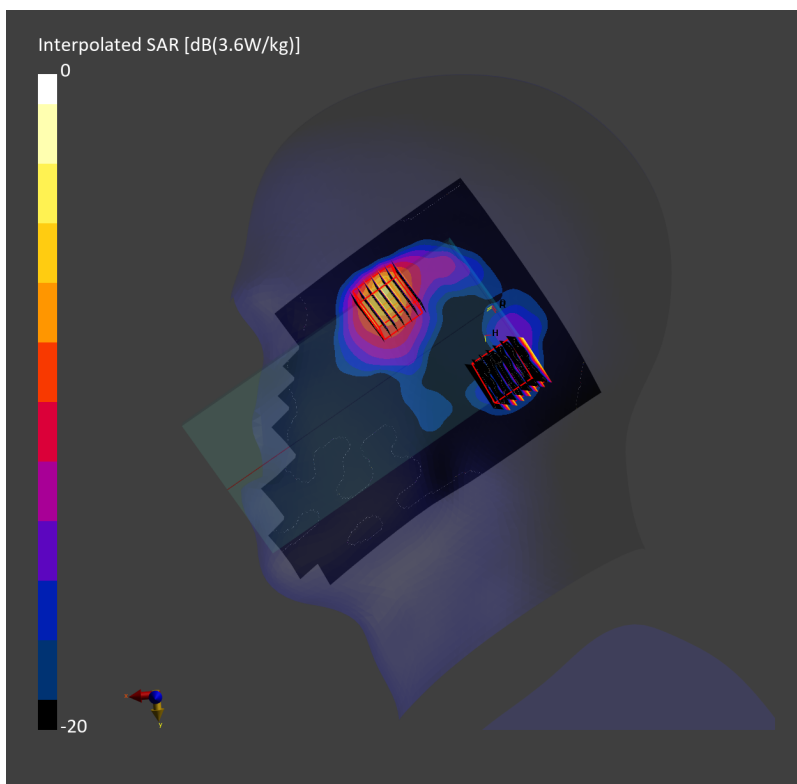

#13_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch122

Communication System: IEEE 802.11ac; Frequency: 5610.000 MHz; Duty Cycle: 1:1.112
Medium: HSL_5G_231014 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 36.4$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.43, 4.27, 4.42); Calibrated: 2023-01-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10626-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.559 W/kg; SAR (10g) = 0.195 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 0.124 W/kg; SAR (8g) = 0.033 W/kg; SAR (10g) = 0.026 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 69.5 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 0.681 W/kg; SAR (8g) = 0.218 W/kg; SAR (10g) = 0.185 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 69.5 %

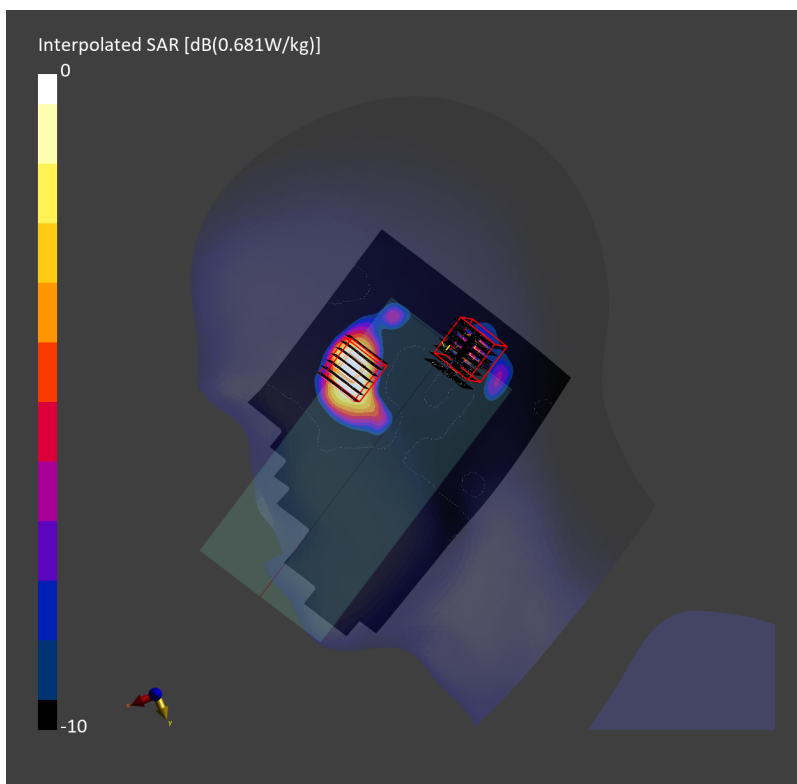

#14_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch155

Communication System: IEEE 802.11ac; Frequency: 5775.000 MHz; Duty Cycle: 1:1.112
Medium: HSL_5G_231014 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.32$ S/m; $\epsilon_r = 36.2$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(4.56, 4.37, 4.41); Calibrated: 2023-01-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10626-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.599 W/kg; SAR (10g) = 0.206 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 0.215 W/kg; SAR (8g) = 0.079 W/kg; SAR (10g) = 0.068 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 64.9 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.03 dB
SAR (1g) = 0.648 W/kg; SAR (8g) = 0.223 W/kg; SAR (10g) = 0.188 W/kg
Smallest distance from peaks to all points 3 dB below = 5.7 mm
Ratio of SAR at M2 to SAR at M1 = 64.9 %

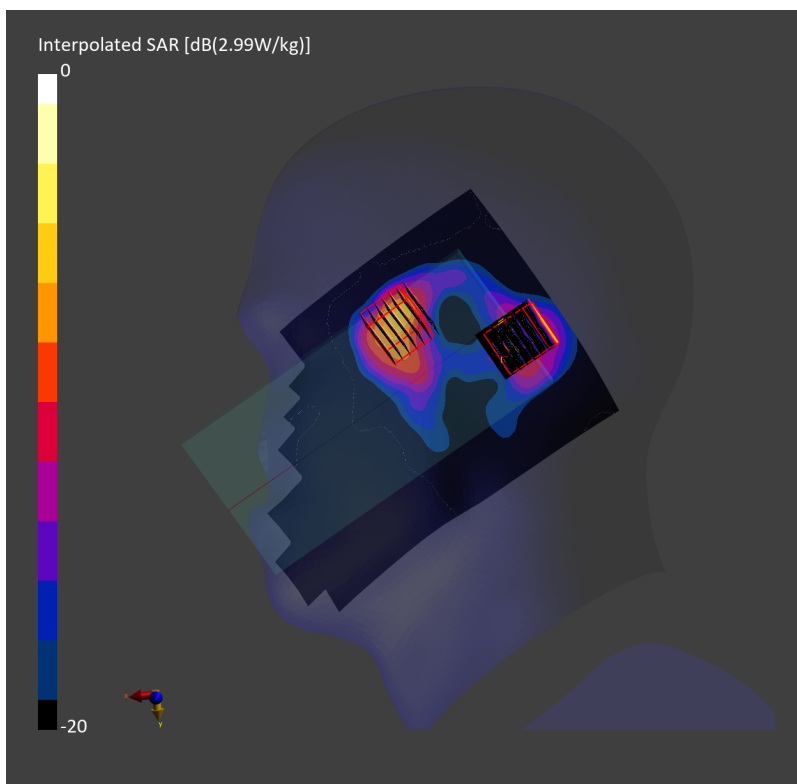

#15_WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch171

Communication System: IEEE 802.11ac ; Frequency: 5855.000 MHz; Duty Cycle: 1:1.112
Medium: HSL_5G_231017 Medium parameters used: $f = 5855.000$ MHz; $\sigma = 5.45$ S/m; $\epsilon_r = 35.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(4.95, 4.95, 4.95); Calibrated: 2023-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10626-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.575 W/kg; SAR (10g) = 0.170 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.211 W/kg; SAR (8g) = 0.085 W/kg; SAR (10g) = 0.073 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 65.5 %

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.583 W/kg; SAR (8g) = 0.187 W/kg; SAR (10g) = 0.162 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 65.5 %

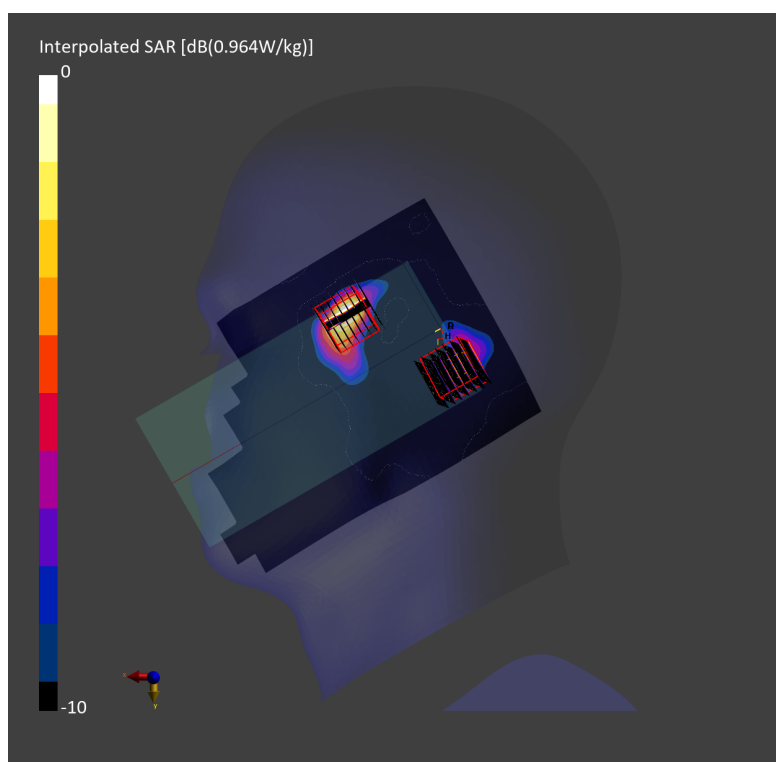

#16_WLAN6GHz_802.11ax-HE80 MCS0_Right Cheek_0mm_Ch71

Communication System: IEEE 802.11ax ; Frequency: 6305.000 MHz; Duty Cycle: 1:1.149
Medium: HSL_6G_231014 Medium parameters used: $f = 6305.000$ MHz; $\sigma = 5.75$ S/m; $\epsilon_r = 34.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C


DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.07, 5.47, 4.84); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: RightHead
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10719-AAC

Area Scan (102.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 0.298 W/kg; SAR (10g) = 0.106 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 0.048 W/kg; SAR (8g) = 0.019 W/kg; SAR (10g) = 0.009 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 58.7 %
psAPD (1.0cm², sq) = 0.486 [W/m²]; psAPD (4.0cm², sq) = 0.212 [W/m²]

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 0.316 W/kg; SAR (8g) = 0.103 W/kg; SAR (10g) = 0.064 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 58.7 %
psAPD (1.0cm², sq) = 3.16 [W/m²]; psAPD (4.0cm², sq) = 1.51 [W/m²]

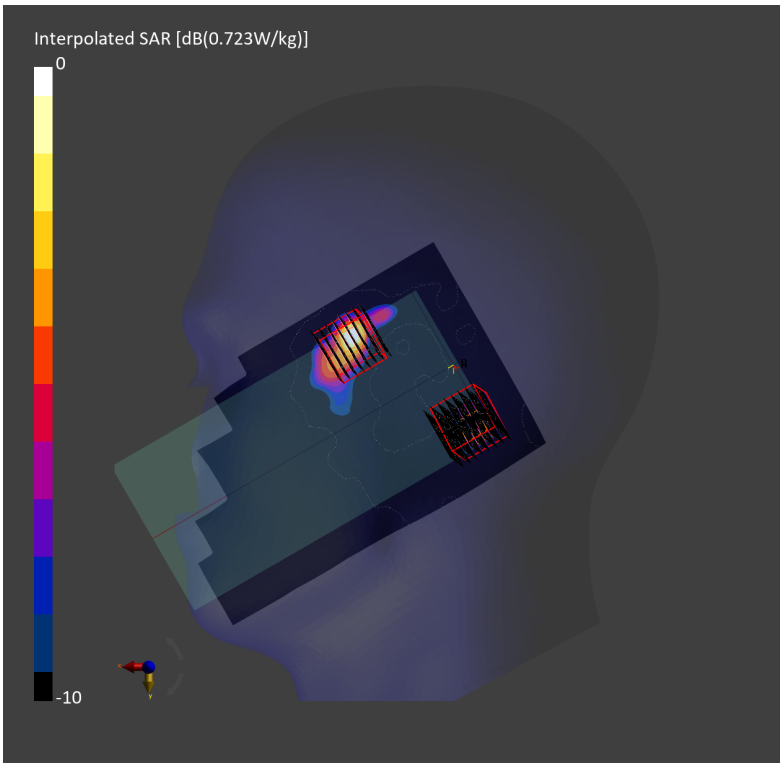

#17_Bluetooth_1Mbps_Left Cheek_0mm_Ch39


Communication System: IEEE Bluetooth; Frequency: 2441.000 MHz; Duty Cycle: 1:1.298
Medium: HSL_2450_231007 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.6, 7.35, 6.64); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: LeftHead
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.178 W/kg; SAR (10g) = 0.066 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.175 W/kg; SAR (8g) = 0.073 W/kg; SAR (10g) = 0.064 W/kg
Smallest distance from peaks to all points 3 dB below = 5.6 mm
Ratio of SAR at M2 to SAR at M1 = 79.4 %

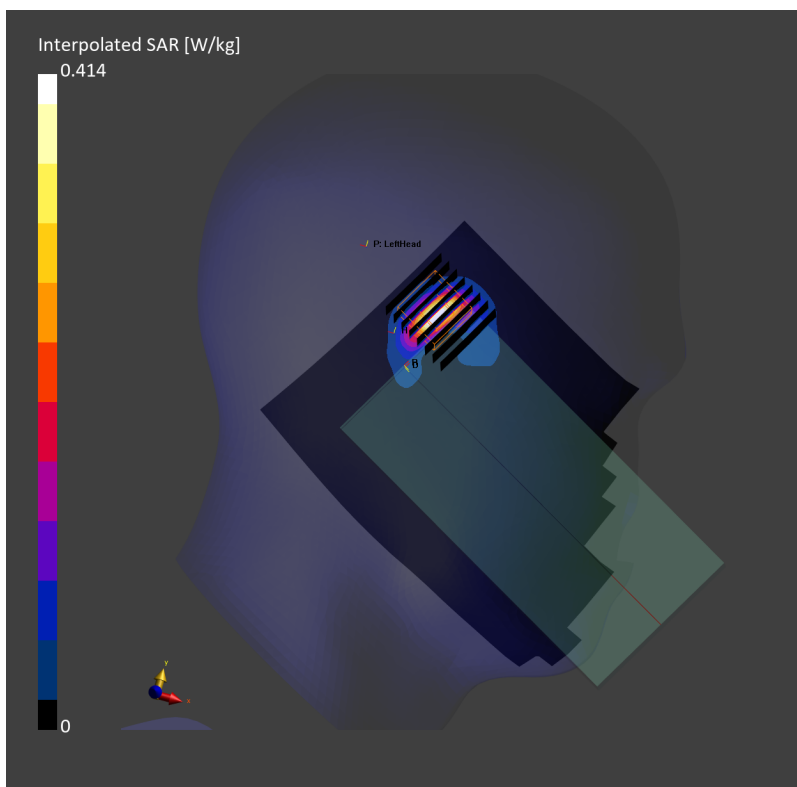

#18_GSM850_GPRS (3 Tx slots)_Left Side_10mm_Ch251

Communication System: GPRS; Frequency: 848.800 MHz; Duty Cycle: 1:2.77

Medium: HSL_850_230919 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: GSM, 10027-DAC

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.625 W/kg; SAR (10g) = 0.421 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.632 W/kg; SAR (8g) = 0.453 W/kg; SAR (10g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.5 %

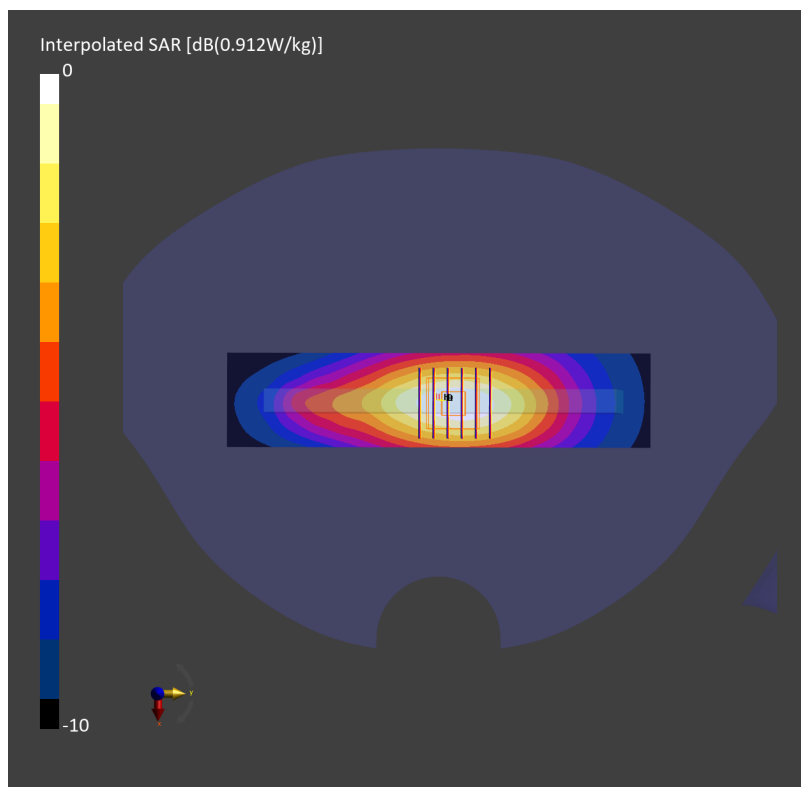

#19_LTE Band 7_20M_QPSK_1_0_Left Side_10mm_Ch20850


Communication System: LTE-FDD; Frequency: 2510.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230928 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.96, 7.96, 7.96); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10169-CAF

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.584 W/kg; SAR (10g) = 0.283 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 0.607 W/kg; SAR (8g) = 0.320 W/kg; SAR (10g) = 0.291 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 81.2 %

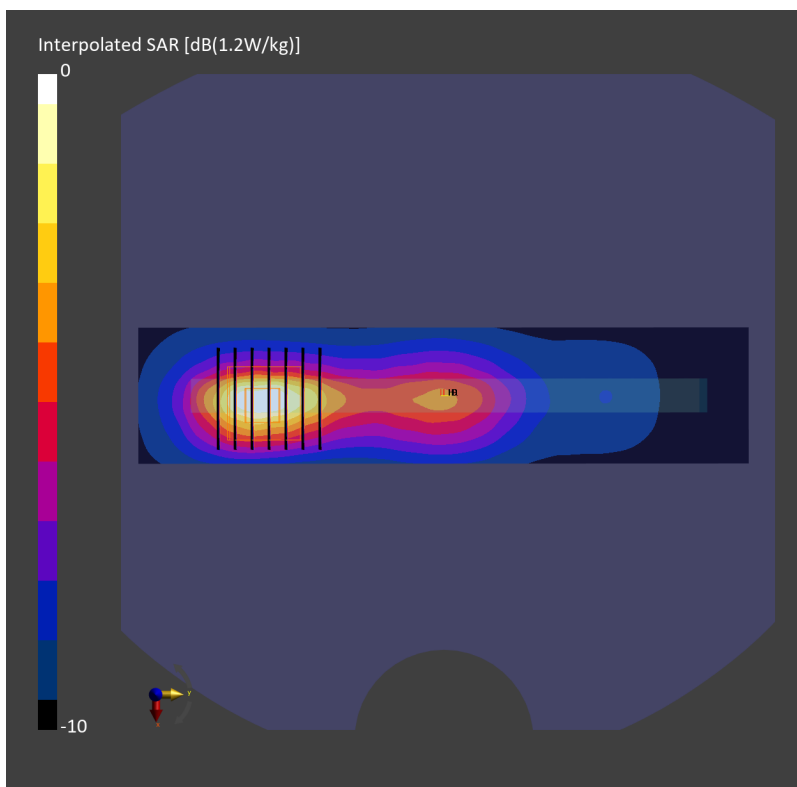

#20_LTE Band 12_10M_QPSK_1_0_Left Side_10mm_Ch23095


Communication System: LTE-FDD; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL_750_230918 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 41.9$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.58, 10.58, 10.58); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10175-CAH

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 15.0 mm
SAR (1g) = 0.376 W/kg; SAR (10g) = 0.256 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.372 W/kg; SAR (8g) = 0.270 W/kg; SAR (10g) = 0.258 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 89.5 %

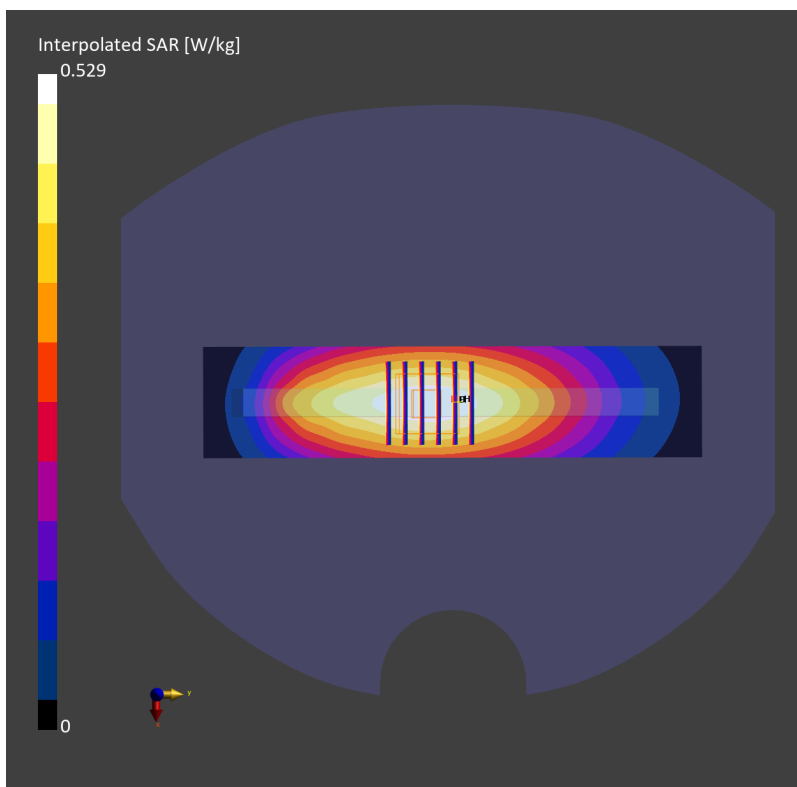

#21_LTE Band 26_15M_QPSK_1_0_Left Side_10mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL_850_230919 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 41.6$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-FDD, 10181-CAF

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.534 W/kg; SAR (10g) = 0.358 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.00 dB

SAR (1g) = 0.532 W/kg; SAR (8g) = 0.381 W/kg; SAR (10g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 89.3 %

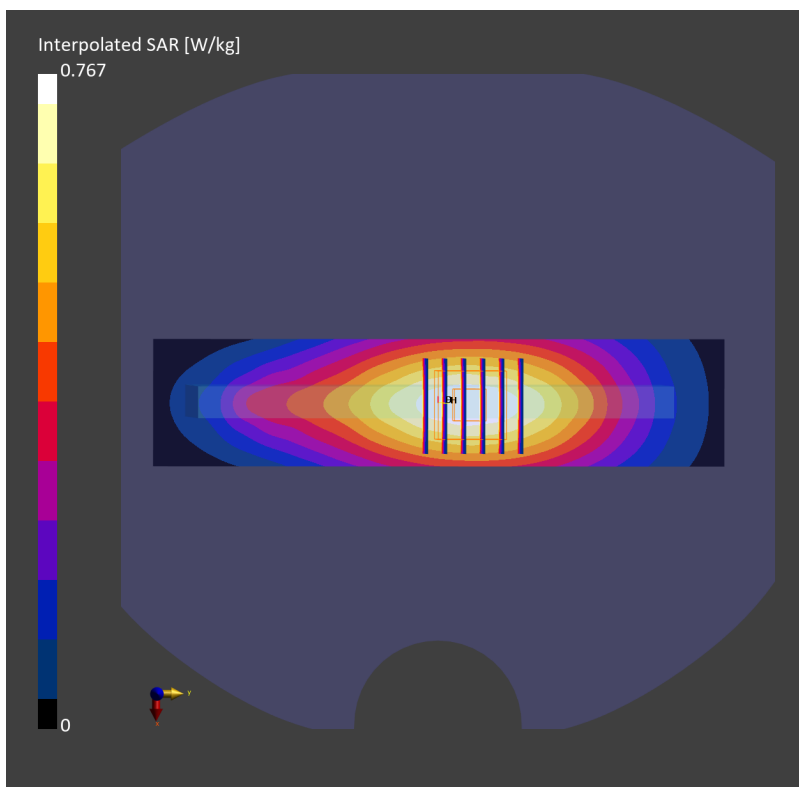

#22_LTE Band 41_20M_QPSK_1_0_Right Side_10mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.5 MHz; Duty Cycle: 1:1.59
Medium: HSL_2600_231004 Medium parameters used: $f = 2549.5$ MHz; $\sigma = 2.06$ S/m; $\epsilon_r = 37.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.96, 7.96, 7.96); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: LTE-TDD, 10435-AAG

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.481 W/kg; SAR (10g) = 0.229 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.474 W/kg; SAR (8g) = 0.252 W/kg; SAR (10g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

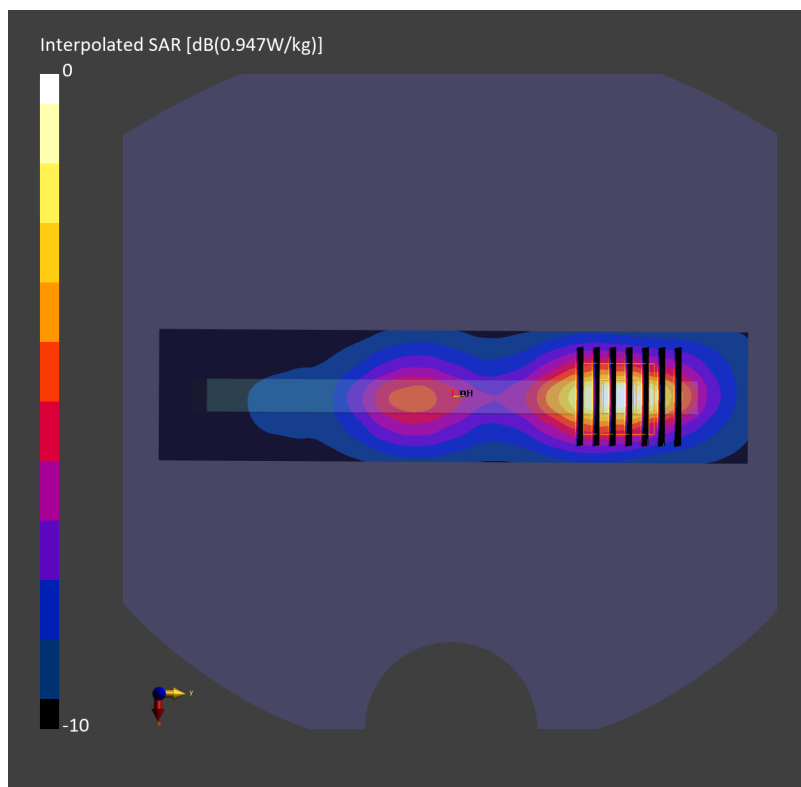

#23_FR1 n7_50M_BPSK_1_1_Left Side_10mm_Ch507000


Communication System: 5G NR Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_230926 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(7.4, 7.4, 7.4); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.715 W/kg; SAR (10g) = 0.344 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.738 W/kg; SAR (8g) = 0.404 W/kg; SAR (10g) = 0.370 W/kg
Smallest distance from peaks to all points 3 dB below = 10.0 mm
Ratio of SAR at M2 to SAR at M1 = 81.5 %

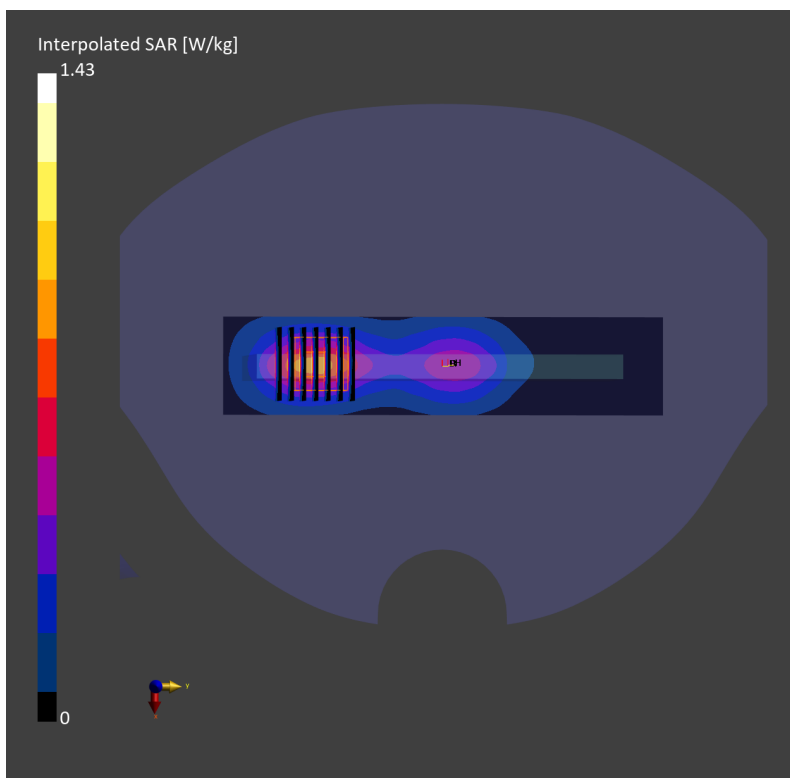

#24_FR1 n12_15M_BPSK_1_1_Left Side_10mm_Ch141500

Communication System: 5G NR Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_230912 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(10.51, 10.51, 10.51); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.318 W/kg; SAR (10g) = 0.219 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.323 W/kg; SAR (8g) = 0.236 W/kg; SAR (10g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.0 %

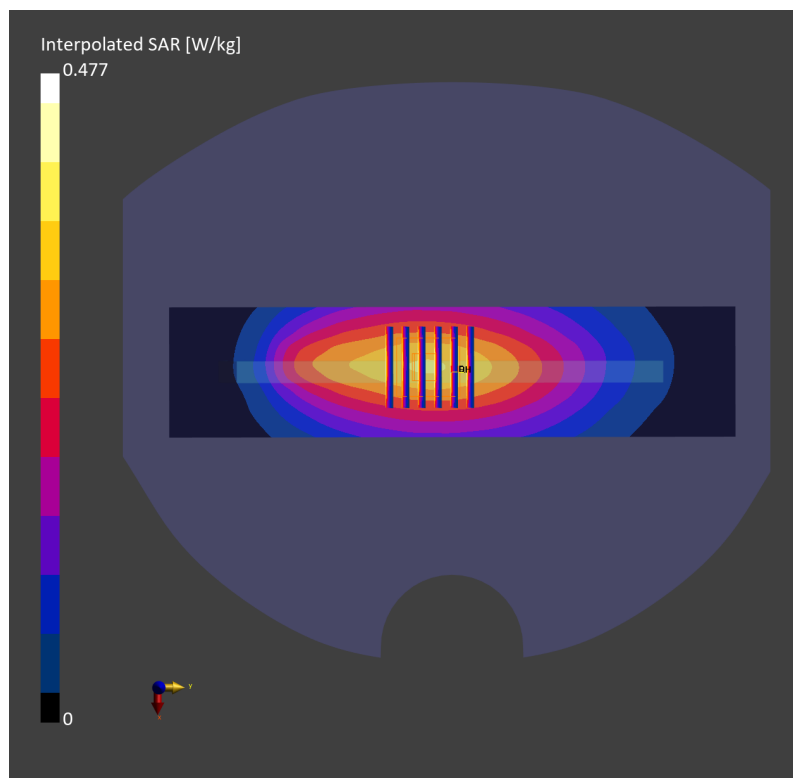

#25_FR1 n26_20M_BPSK_1_1_Left Side_10mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_850_231013 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(10.36, 10.36, 10.36); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_For Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 15.0 mm

SAR (1g) = 0.501 W/kg; SAR (10g) = 0.339 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.487 W/kg; SAR (8g) = 0.351 W/kg; SAR (10g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 90.6 %

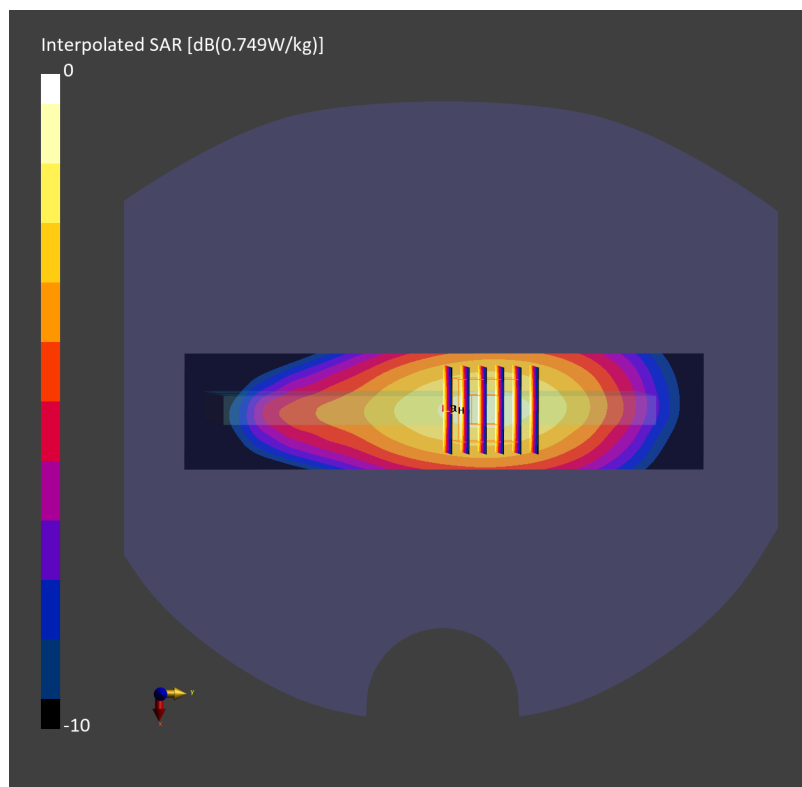

#26_FR1 n41_100M_BPSK_1_1_Left Side_10mm_Ch518598


Communication System: 5G NR; Frequency: 2592.990 MHz; Duty Cycle: 1:1
Medium: HSL_2600_231010 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 38.1$
Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(7.96, 7.96, 7.96); Calibrated: 2023-01-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1707; Calibrated: 2022-12-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.497 W/kg; SAR (10g) = 0.241 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.518 W/kg; SAR (8g) = 0.274 W/kg; SAR (10g) = 0.250 W/kg
Smallest distance from peaks to all points 3 dB below = 9.9 mm
Ratio of SAR at M2 to SAR at M1 = 81.4 %

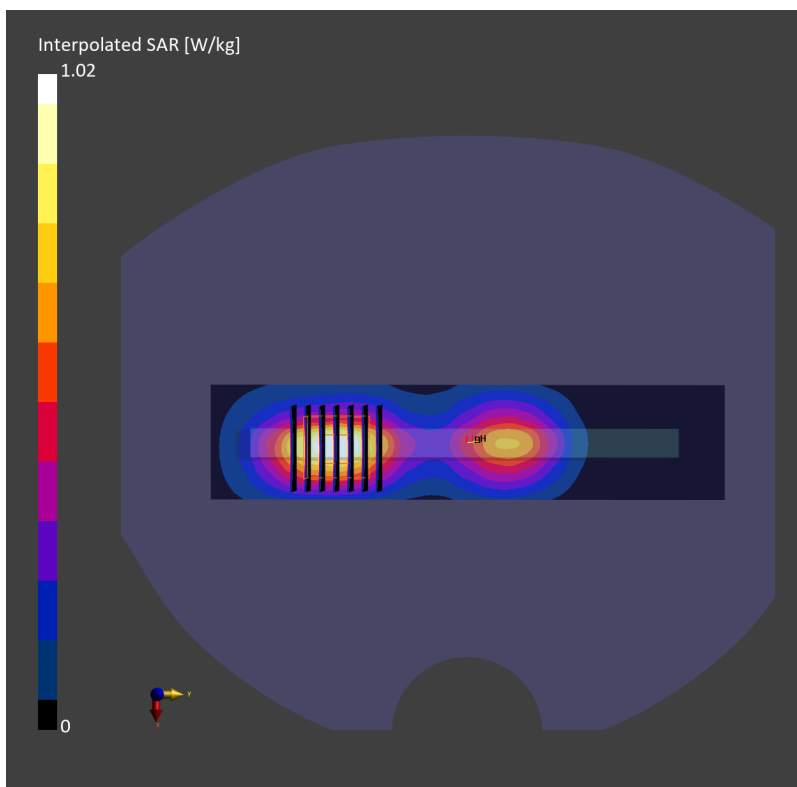

#27_FR1 n77_100M_BPSK_1_1_Left Side_10mm_Ch656000


Communication System: 5G NR Frequency: 3840.000 MHz; Duty Cycle: 1:1
Medium: HSL_3900_231001 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.19$ S/m; $\epsilon_r = 37.4$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(6.57, 6.57, 6.57); Calibrated: 2022-10-31
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1696; Calibrated: 2022-11-09
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2079_Gap; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (40.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.390 W/kg; SAR (10g) = 0.168 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.01 dB
SAR (1g) = 0.406 W/kg; SAR (8g) = 0.194 W/kg; SAR (10g) = 0.176 W/kg
Smallest distance from peaks to all points 3 dB below = 9.1 mm
Ratio of SAR at M2 to SAR at M1 = 76.3 %

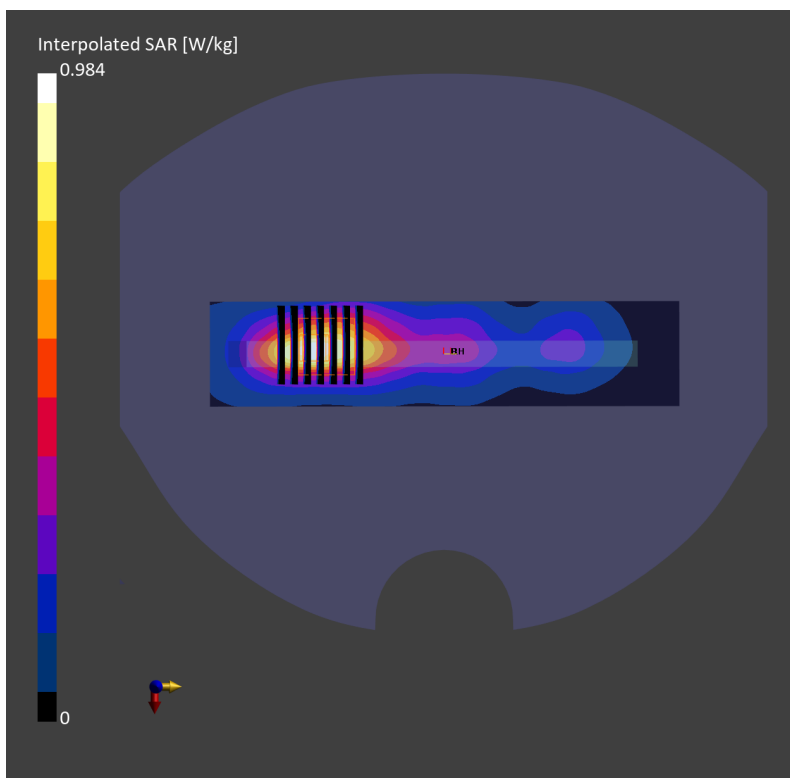

#28_WLAN2.4GHz_802.11b 1Mbps_Top Side_10mm_Ch12

Communication System: IEEE 802.11b; Frequency: 2467.000 MHz; Duty Cycle: 1:1.012
Medium: HSL_2450_231018 Medium parameters used: $f = 2467.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7785; ConvF(6.78, 6.52, 6.53); Calibrated: 2023-01-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn699; Calibrated: 2023-02-22
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1919; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10012-CAB

Area Scan (54.0 mm x 120.0 mm): Measurement Grid: 9.0 mm x 10.0 mm

SAR (1g) = 0.445 W/kg; SAR (10g) = 0.196 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.461 W/kg; SAR (8g) = 0.232 W/kg; SAR (10g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

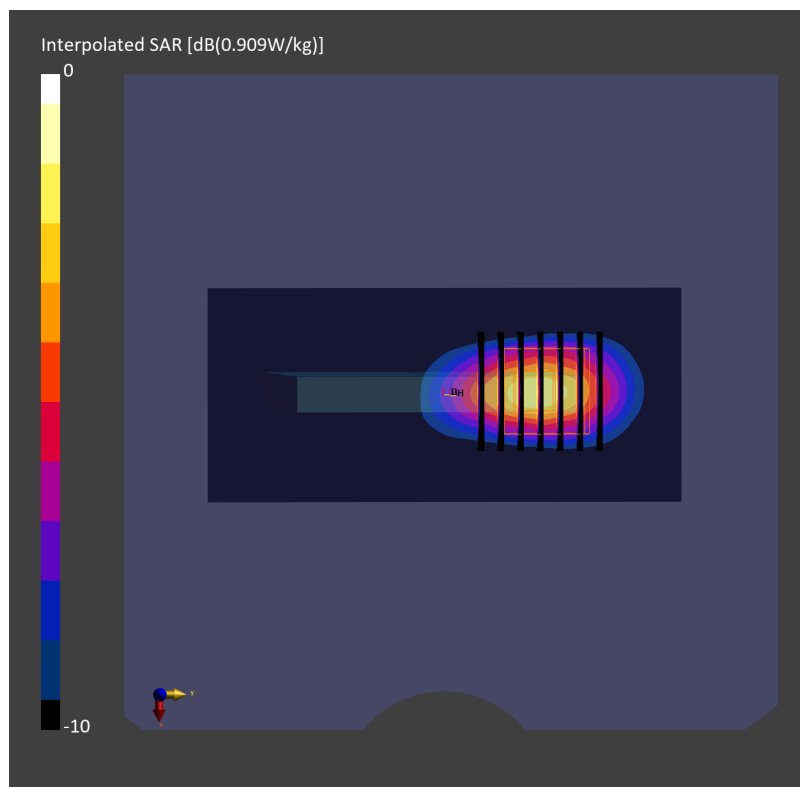

#29_WLAN5GHz_802.11a 6Mbps_Right Side_10mm_Ch48


Communication System: IEEE 802.11a ; Frequency: 5240.000 MHz; Duty Cycle: 1:1.070
Medium: HSL_5G_231016 Medium parameters used: $f = 5240.000$ MHz; $\sigma = 4.81$ S/m; $\epsilon_r = 36.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.93, 5.47, 4.85); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (40.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.311 W/kg; SAR (10g) = 0.111 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.18 dB
SAR (1g) = 0.316 W/kg; SAR (8g) = 0.123 W/kg; SAR (10g) = 0.107 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 64.9 %

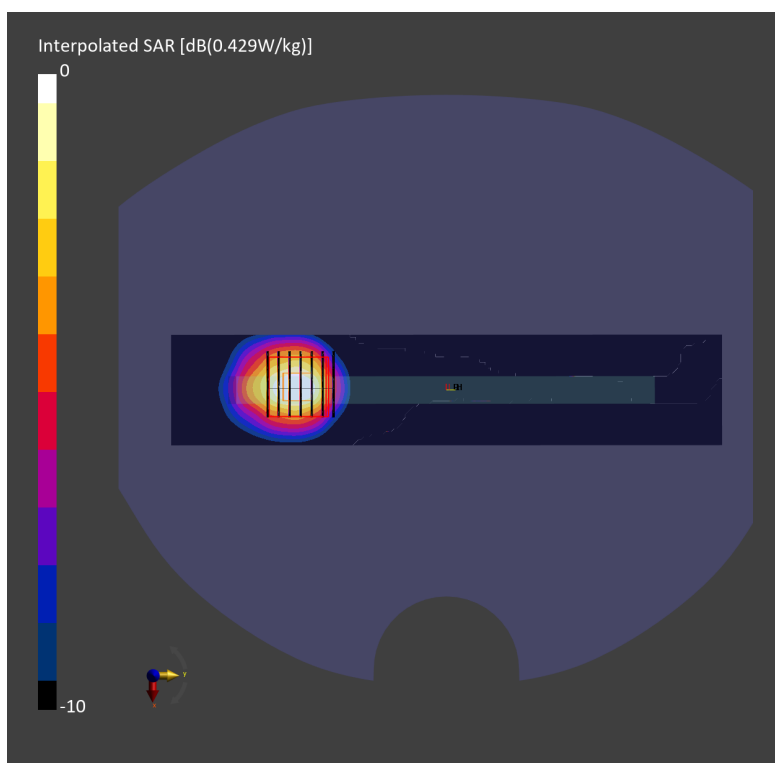

#30_WLAN5GHz_802.11a_6Mbps_Back_10mm_Ch157


Communication System: IEEE 802.11a ; Frequency: 5785.000 MHz; Duty Cycle: 1:1.070
Medium: HSL_5G_231016 Medium parameters used: $f = 5785.000$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 35.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.44, 4.92, 4.4); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.237 W/kg; SAR (10g) = 0.093 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.13 dB
SAR (1g) = 0.229 W/kg; SAR (8g) = 0.097 W/kg; SAR (10g) = 0.085 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 61.5 %

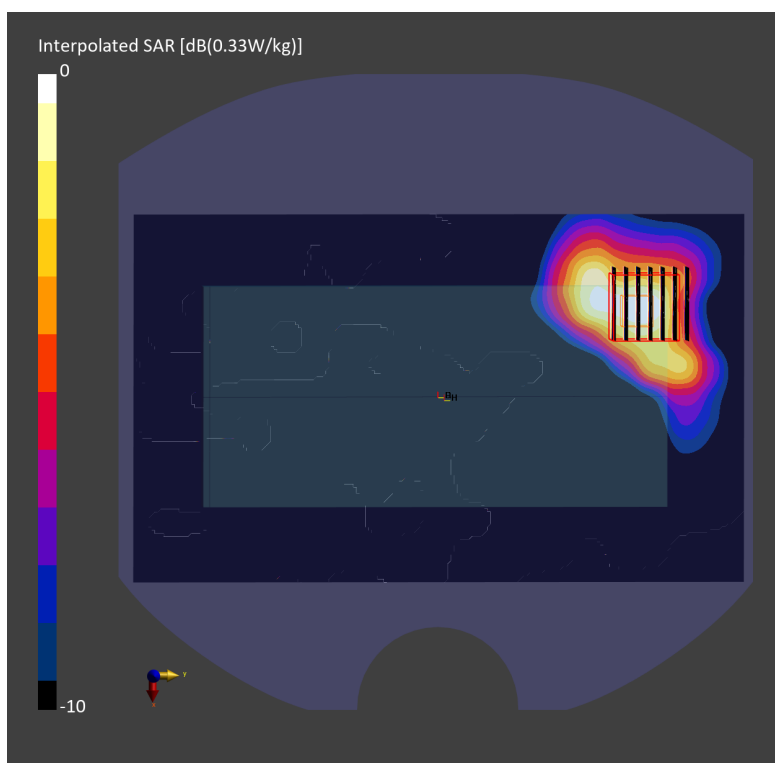

#31_Bluetooth_1Mbps_Left Side_10mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth ; Frequency: 2480.000 MHz; Duty Cycle: 1:1.298

Medium: HSL_2450_231012 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.6, 7.35, 6.64); Calibrated: 2023-02-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1697; Calibrated: 2022-12-15
- Phantom: Twin-SAM V4.0 (30deg probe tilt); Serial: 1488; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (40.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.384 W/kg; SAR (10g) = 0.178 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.409 W/kg; SAR (8g) = 0.210 W/kg; SAR (10g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

