







ISO/IEC17025Accredited Lab.

Report No.: FCC 1408164-03 File reference No.: 2014-09-05

Applicant: Supper sonic INC

Product: Mobile

Model No.: SC-155, SC-150, SV-6, SV-7, SC-151, SC-152, SC-153,

SC-145, SC-140, SC-159, SC-160, SC-166

Trademark: OBO

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

Paragraph 15.247 regulations for the evaluation o

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: Sep 05, 2014

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (+86 755)8344 8688 Fax (+86 755)8344 2996 Email:info@timewaytech.com

Report No: 1408164-03 Page 2 of 87

Date: 2014-09-05



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 87

Report No: 1408164-03

Date: 2014-09-05



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth Measurement	22
8.0	Maximum Peak Output Power	34
9.0	Carrier Frequency Separation.	37
10.0	Number of Hopping Channel	41
11.0	Time of Occupancy (Dwell Time).	45
12.0	Out of Band Measurement.	57
13.0	Antenna Requirement	71
14.0	FCC Label	72
15.0	Photo of Test Setup and EUT View.	73

Date: 2014-09-05



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Supper sonic INC

Address: 6555 Bandini Blvd. Commerce CA 90400

Telephone: 323-201-5060 Fax: 323-201-5069

1.3 Description of EUT

Product: Mobile

Manufacturer: ShenZhen Jingwah-Kaoge Communication Technology Co., Ltd.

Address: Floor5th, Bldg 4, Jingwah Square, NO1, Huafa Road, Futian District, Shenzhen,

China

Brand Name: OBO Model Number: SC-155

Additional Model Name SC-150, SV-6, SV-7, SC-151, SC-152, SC-153, SC-145, SC-140, SC-159,

SC-160, SC-166

Additional Trade Name N/A

Type of Modulation GFSK, 月/4DQPSK, 8DPSK

Frequency range 2402-2480MHz

Number of Channel 79

Frequency Selection By software

Antenna type Integral Antenna used, the antenna gain is 1.0dBi

Power Supply: Model No.: S050-100-US

Input: 100-240V, 50/60Hz, 0.2A; Output: 5.0V, 1.0A

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1408164-03 Page 5 of 87

Date: 2014-09-05



1.4 Submitted Sample: 1 Sample

1.5 Test Duration:

2014-08-28 to 2014-09-04

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Report No: 1408164-03 Page 6 of 87

Date: 2014-09-05



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2014-08-21	2015-08-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2014-08-22	2015-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2014-08-22	2015-08-21
Ultra Broadband ANT	R&S	HL562	100157	2014-08-23	2015-08-22
ESDV Test Receiver	R&S	ESDV	100008	2014-08-22	2015-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2014-08-21	2015-08-20
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21
ESPI Test Receiver	R&S	ESI26	838786/013	2014-08-22	2015-08-21
3m OATS	-		N/A	2014-08-21	2015-08-20
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2014-08-23	2015-08-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2014-08-23	2015-08-22
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-23	2015-08-22
LISN	AFJ	LS16C	10010947251	2014-08-21	2015-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21
9*6*6 Anechoic			N/A	2014-08-21	2015-08-20
EMI Test Receiver	RS	ESCS30	100139	2014-08-22	2015-08-21

Report No: 1408164-03 Page 7 of 87

Date: 2014-09-05



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and	15.247(d),15.205(a),	PASS	Complies
Restricted bands	15.209 (a),15.109		
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Report No: 1408164-03 Page 8 of 87

Date: 2014-09-05



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~60Hz Block diagram of Test setup

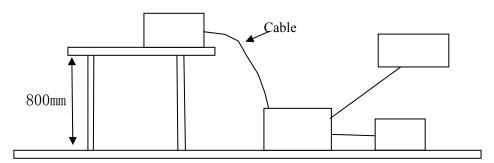

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

Page 9 of 87

Report No: 1408164-03

Date: 2014-09-05



A. EUT

Device	Manufacturer	Model	FCC ID
Mobile	ShenZhen Jingwah-Kaoge Communication Technology Co., Ltd.	SC-155, SC-150, SV-6, SV-7, SC-151, SC-152, SC-153, SC-145, SC-140, SC-159, SC-160, SC-166	2AC5R-SC155

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	requency Class A Limits (dB μ V) Class		Class B Lim	nits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

The report refers only to the sample tested and does not apply to the bulk.

Date: 2014-09-05

Report No: 1408164-03



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

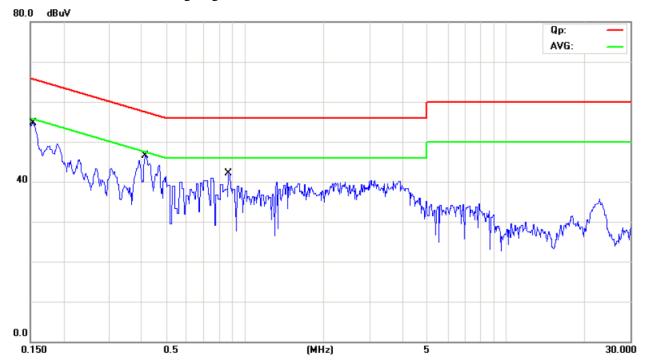

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1525	40.50	11.00	51.50	65.86	-14.36	QP	
2	0.1525	9.60	11.00	20.60	55.86	-35.26	AVG	
3	0.4130	31.30	11.28	42.58	57.59	-15.01	QP	
4	0.4130	-1.00	11.28	10.28	47.59	-37.31	AVG	
5	0.8644	23.70	11.76	35.46	56.00	-20.54	QP	
6	0.8644	-6.00	11.76	5.76	46.00	-40.24	AVG	

Date: 2014-09-05



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging and Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

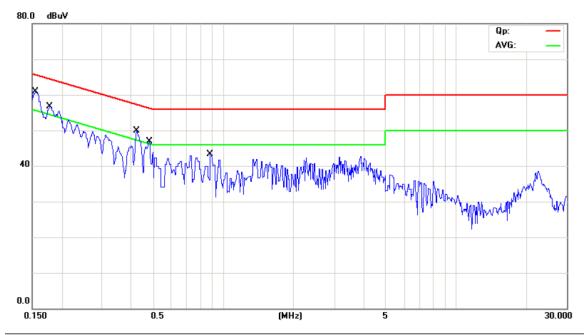

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1552	43.30	11.01	54.31	65.72	-11.41	QP	
2	0.1552	12.40	11.01	23.41	55.72	-32.31	AVG	
3	0.1780	36.00	11.03	47.03	64.58	-17.55	QP	
4	0.1780	5.40	11.03	16.43	54.58	-38.15	AVG	
5 *	0.4170	36.90	11.28	48.18	57.51	-9.33	QP	
6	0.4170	6.00	11.28	17.28	47.51	-30.23	AVG	
7	0.4703	29.50	11.34	40.84	56.51	-15.67	QP	
8	0.4703	3.80	11.34	15.14	46.51	-31.37	AVG	
9	0.8711	29.20	11.76	40.96	56.00	-15.04	QP	
10	0.8711	-2.60	11.76	9.16	46.00	-36.84	AVG	

Report No: 1408164-03 Page 12 of 87

Date: 2014-09-05



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier Furn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1408164-03 Page 13 of 87

Date: 2014-09-05



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.109. 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. After pre-scanning, **GFSK** was the worse case. The test data of this mode was recorded.

Report No: 1408164-03 Page 14 of 87

Date: 2014-09-05



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/ In Vertical (30MHz----1000MHz)

EUT set Condition: Charging and Keep Bluetooth Transmitting

Results: Pass


Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
31.920	28.07	Н	40.00
393.920	41.68	Н	46.00
31.960	26.53	V	40.00
384.960	41.22	V	46.00

Report No: 1408164-03 Page 15 of 87

Date: 2014-09-05



Test Figure:

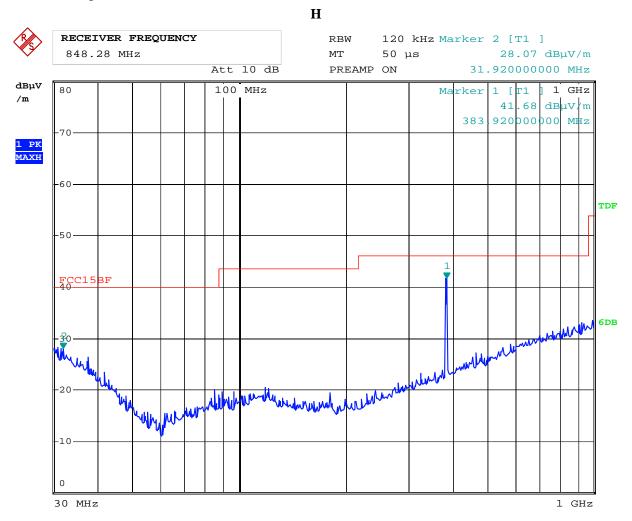


Date: 29.AUG.2014 16:01:41

Report No: 1408164-03 Page 16 of 87

Date: 2014-09-05



Test Figure:

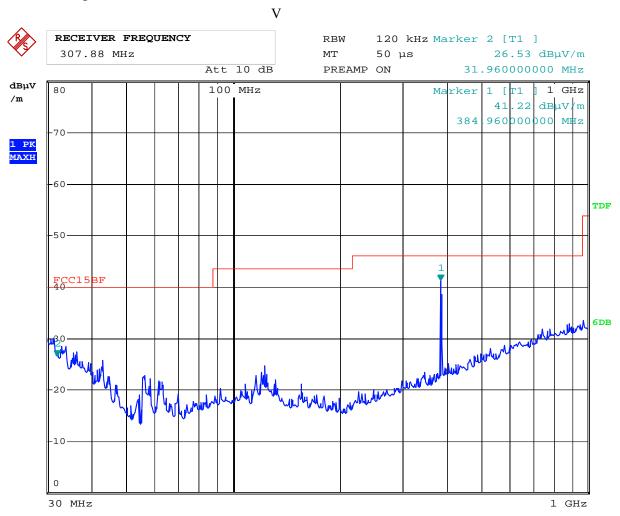

Date: 29.AUG.2014 16:03:33

Report No: 1408164-03 Page 17 of 87

Date: 2014-09-05



Operation Mode: Transmitting under Low Channel (2402MHz)

	0		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2402	87.42(PK)	Н	Fundamental Frequency
2402	87.37(PK)	V	rundamentai riequency
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

	T		,
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2441	89.36(PK)	Н	Fundamental Frequency
2441	89.35(PK)	V	Fundamental Frequency
4882		Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: 1408164-03 Page 18 of 87

Date: 2014-09-05



Operation Mode: Transmitting under High Channel (2480MHz)

E () (III)	I 100 (ID III)	A . D.1	I: ::02 (ID III)
Frequency (MHz)	Level@3m (dB \mu V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2480	88.48(PK)	Н	Fundamental Frequency
2480	88.32(PK)	V	Fundamental Frequency
4960.		Н	74(Peak)/ 54(AV)
4960.		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured


Report No: 1408164-03

Date: 2014-09-05




Please refer to the following test plots for details:

Low Channel: Horizontal

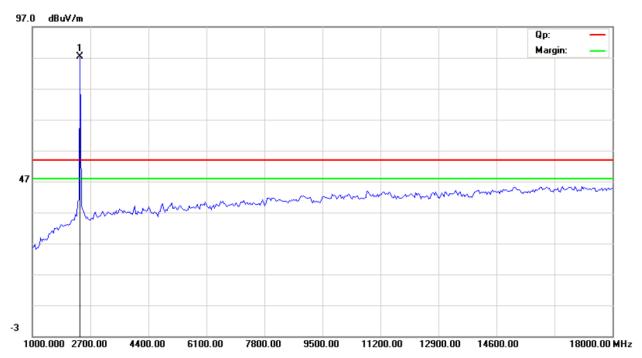

Low Channel: Vertical

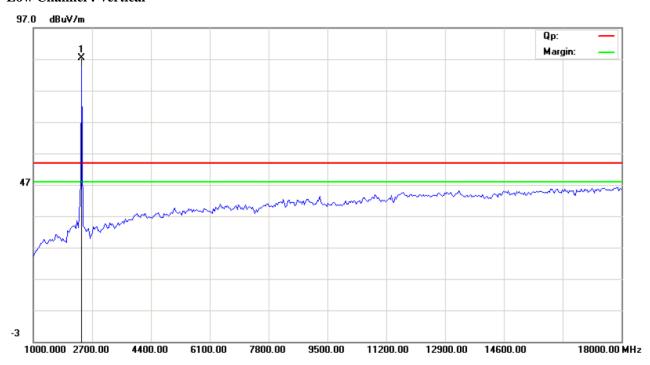

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 20 of 87

Report No: 1408164-03


Date: 2014-09-05



Middle Channel: Horizontal

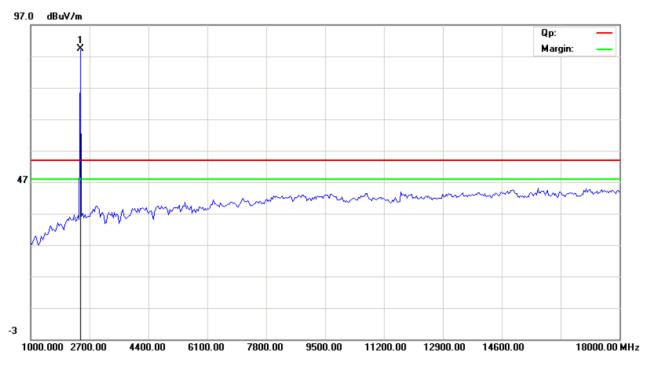

Middle Channel: Vertical

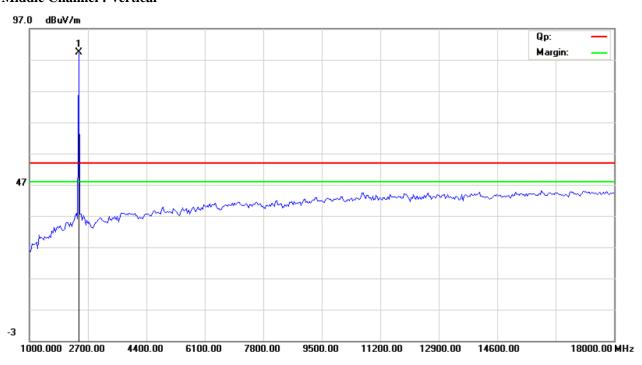

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1408164-03


Date: 2014-09-05



High Channel: Horizontal

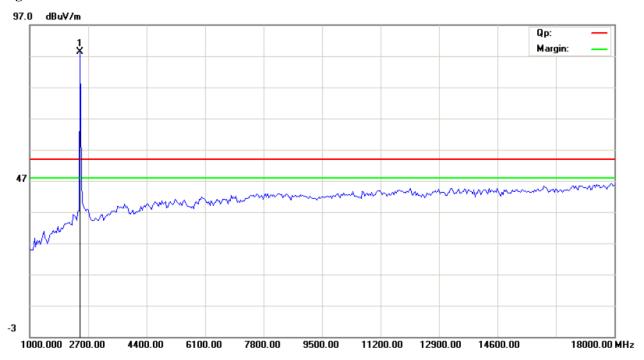

High Channel: Vertical

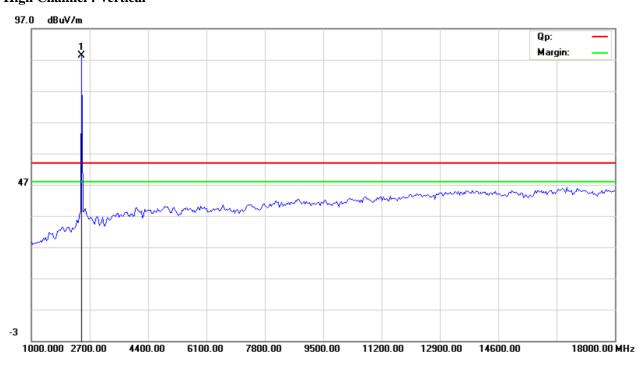

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1408164-03 Page 22 of 87

Date: 2014-09-05



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =5MHz, VBW =30kHz, RBW=100kHz, Sweep = auto Detector function = peak ,Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

EUT		Mobile		SC-155
Mode	K	Keep Transmitting		DC3.7V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	774		Pass
Middle	2441	774		Pass
High	2480	918		Pass


Report No: 1408164-03 Page 23 of 87

Date: 2014-09-05



Test Figure:

1. Condition: Low Channel

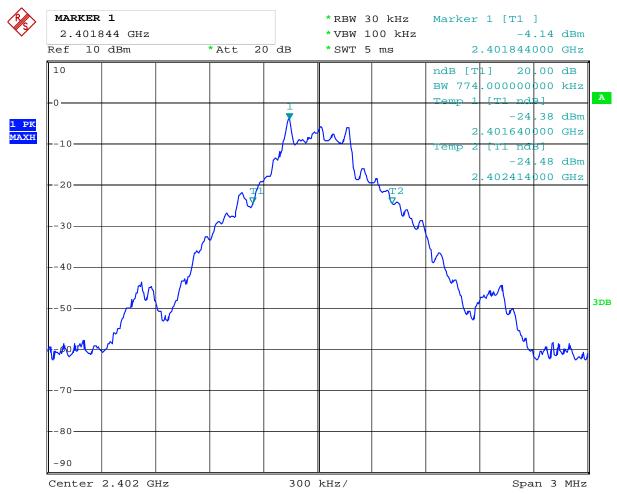


Date: 1.SEP.2014 12:15:47

Report No: 1408164-03 Page 24 of 87

Date: 2014-09-05



2. Condition: Middle Channel

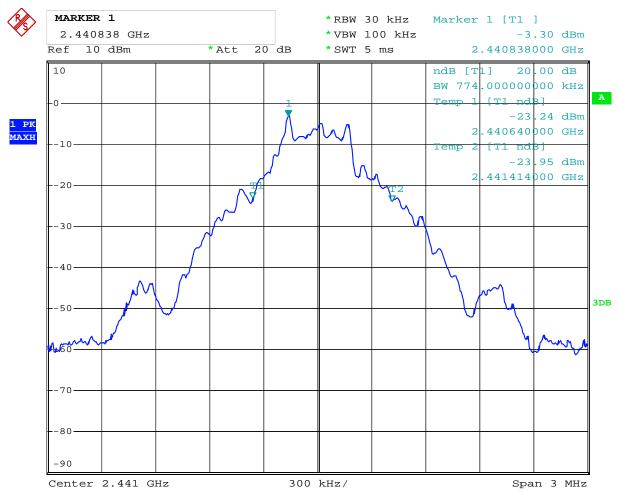


Date: 1.SEP.2014 12:31:38

Report No: 1408164-03 Page 25 of 87

Date: 2014-09-05



3. High Channel

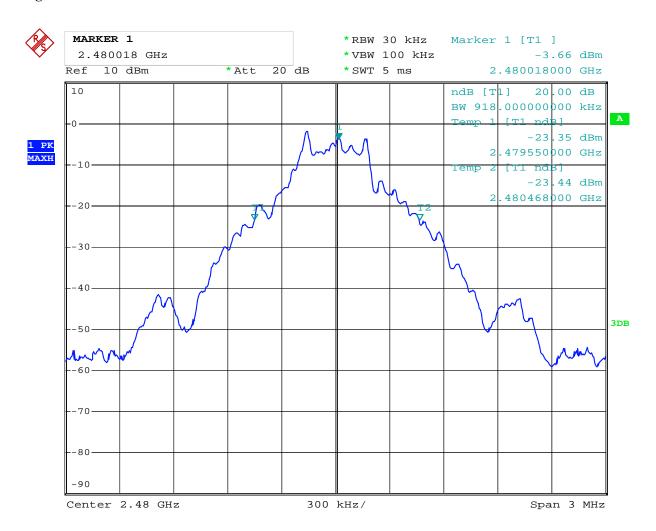

Date: 1.SEP.2014 12:35:48

Report No: 1408164-03 Page 26 of 87

Date: 2014-09-05



Test Result

Type of Modulation: Л/4DQPSK

EUT		Mobile		SC-155
Mode	Ko	Keep Transmitting		DC3.7V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	984		Pass
Middle	2441	1152		Pass
High	2480	1152		Pass


Report No: 1408164-03 Page 27 of 87

Date: 2014-09-05



Test Figure:

1. Condition: Low Channel

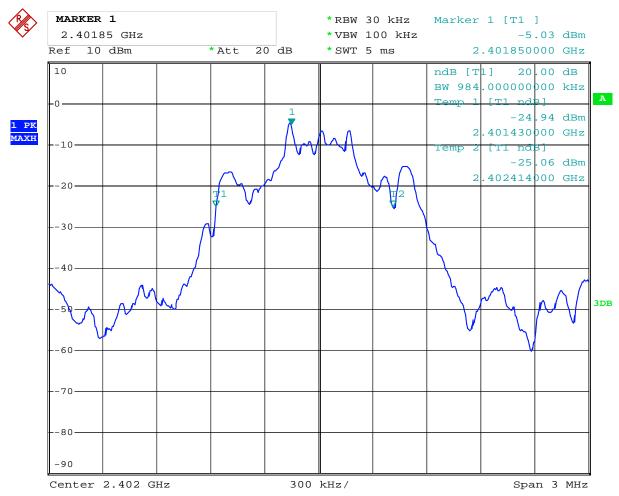


Date: 1.SEP.2014 12:19:35

Report No: 1408164-03 Page 28 of 87

Date: 2014-09-05



2. Condition: Middle Channel

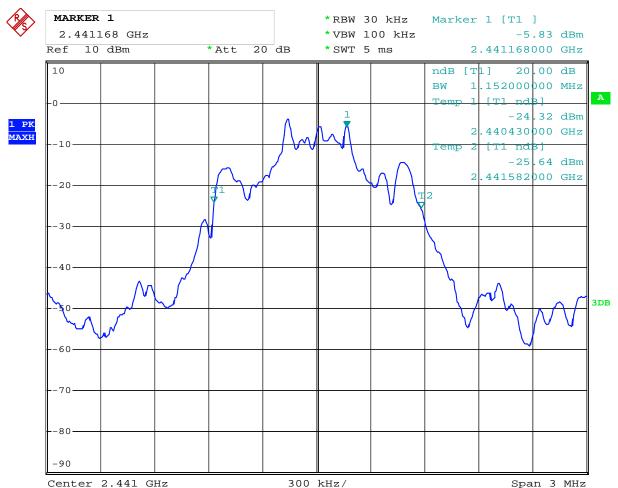


Date: 1.SEP.2014 12:28:10

Report No: 1408164-03 Page 29 of 87

Date: 2014-09-05



3. High Channel

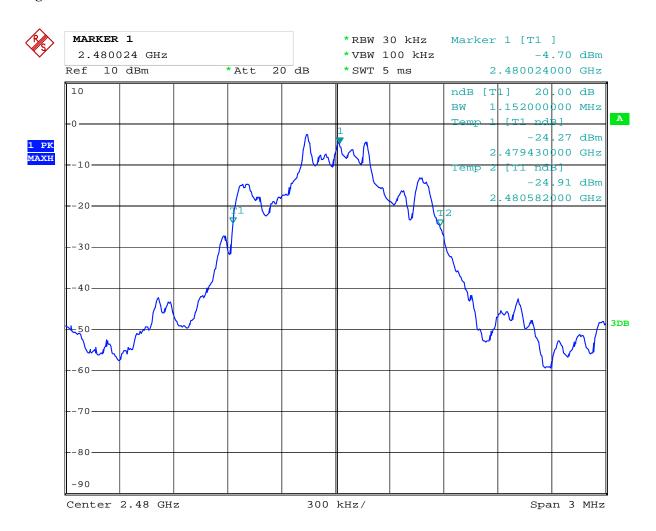

Date: 1.SEP.2014 12:39:16

Report No: 1408164-03 Page 30 of 87

Date: 2014-09-05



Test Result

Type of Modulation: 8DPSK

EUT		Mobile		SC-155
Mode	Ke	Keep Transmitting		DC3.7V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1164		Pass
Middle	2441	1158		Pass
High	2480	1164	-	Pass


Report No: 1408164-03 Page 31 of 87

Date: 2014-09-05



Test Figure:

1. Condition: Low Channel

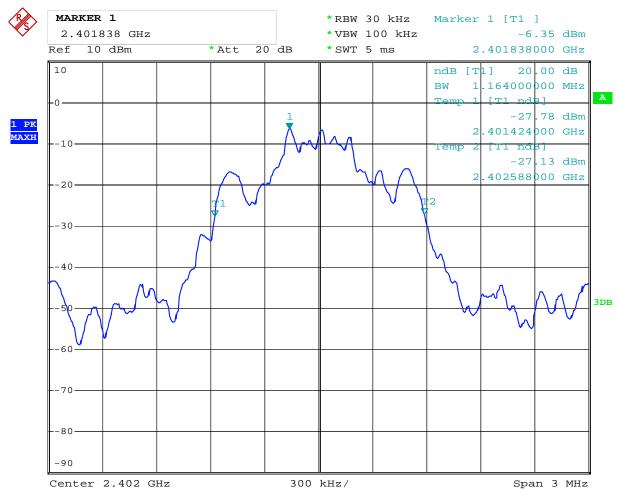

Date: 1.SEP.2014 12:23:27

Report No: 1408164-03 Page 32 of 87

Date: 2014-09-05



2. Condition: Middle Channel




Date: 1.SEP.2014 12:25:13

Report No: 1408164-03 Page 33 of 87

Date: 2014-09-05



3. High Channel

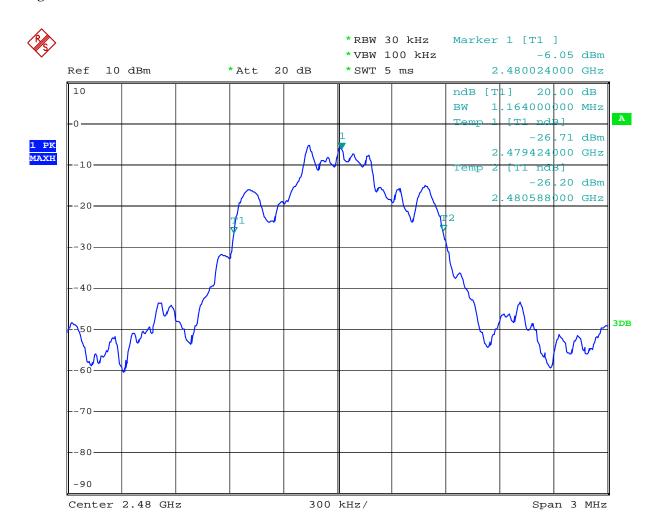

Date: 1.SEP.2014 12:40:17

Report No: 1408164-03 Page 34 of 87

Date: 2014-09-05



8. Maximum Peak Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 35 of 87

Report No: 1408164-03

Date: 2014-09-05



8.4Test Results

Type of Modulation: GFSK

EUT		Mobile		SC-155
Mode	Ke	eep Transmitting	Input Voltage	DC3.7V
Temperatu	re	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	2.154	30	Pass
Middle	2441	1.966	30	Pass
High	2480	1.292	30	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. Worse case was recorded

Type of Modulation: √1/4DQPSK

EUT		Mobile		SC-155
Mode	Ke	Keep Transmitting		DC3.7V
Temperatur	re	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Lin (dBm)	nit Pass/ Fail
Low	2402	0.532	30	Pass
Middle	2441	0.381	30	Pass
High	2480	-0.165	30	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. Worse case was recorded

Report No: 1408164-03 Page 36 of 87

Date: 2014-09-05



Type of Modulation: 8DPSK

EUT		Mobile		SC-155
Mode	K	Keep Transmitting		DC3.7V
Temperatur	re	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	0.521	30	Pass
Middle	2441	0.367	30	Pass
High	2480	-0.176	30	Pass

Note: 1. the result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

2. Worse case was recorded

Date: 2014-09-05



Page 37 of 87

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 87

Report No: 1408164-03

Date: 2014-09-05




9.4Test Result

Type of Modulation: GFSK

EUT	Mobile	Model		SC-155	
Mode	Hopping On		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity		56% RH
Carrier Frequency Separation		Limit			Pass/ Fail
1000kHz		≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass

Test Plots

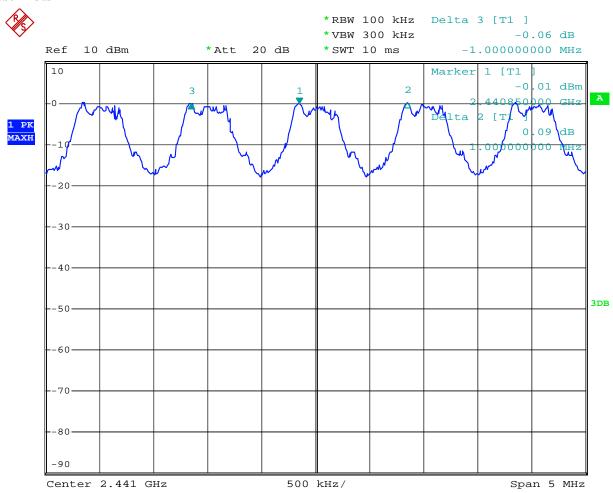

Date: 30.AUG.2014 17:22:40

Report No: 1408164-03 Page 39 of 87


Date: 2014-09-05



Type of Modulation: Л/4DQPSK

EUT	Mobile	Model		SC-155	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,	24 deg. C,			56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
1000 kHz		≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

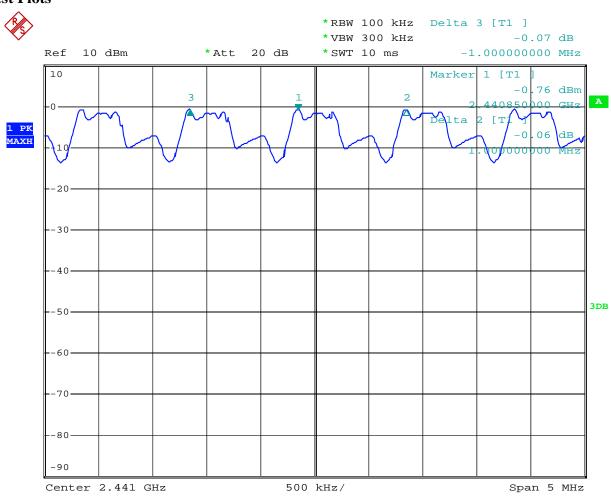

Date: 30.AUG.2014 17:15:52

Page 40 of 87

Report No: 1408164-03


Date: 2014-09-05



Type of Modulation: 8DPSK

EUT	Mobile	Model		SC-155	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
	1000 kHz	≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass

Test Plots

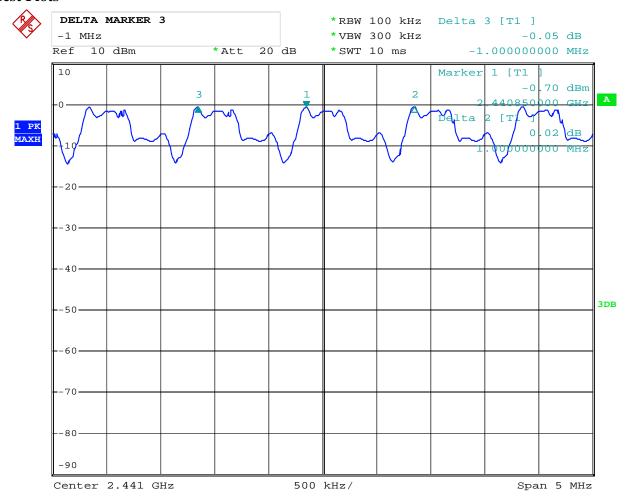

Date: 30.AUG.2014 17:04:11

Date: 2014-09-05



Page 41 of 87

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW= 100 kHz;

Sweep = auto; Detector function = peak; Trace = max hold

3. Record the number of hopping channels.

Date: 2014-09-05




10.4Test Result

Type of Modulation: GFSK

EUT	Mobile		M	odel		SC-155	
Mode	Hopping On		Input	Voltage		DC3.7V	
Temperature	24 deg. C,		Humidity			56% RH	
Operating Frequency		Number of hoppi channels		Lin	nit	Pass/ Fail	
2402-2480MHz		79		≥ 1	.5	Pass	

Test Plot

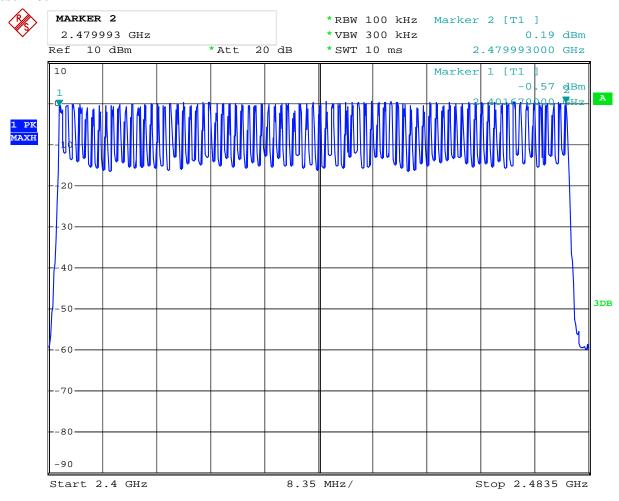

Date: 30.AUG.2014 16:28:58

Report No: 1408164-03 Page 43 of 87


Date: 2014-09-05



Type of Modulation: JI/4DQPSK

EUT	Mobile		Model			SC-155	
Mode	Hopping On		Input Voltage			DC3.7V	
Temperature	24 deg. C,		Humidity			56% RH	
Operating Frequ	requency Number of hopp channels		ing	Lin	nit	Pass/ Fail	
2402-2480MHz		79		≥ 1	.5	Pass	

Test Plot

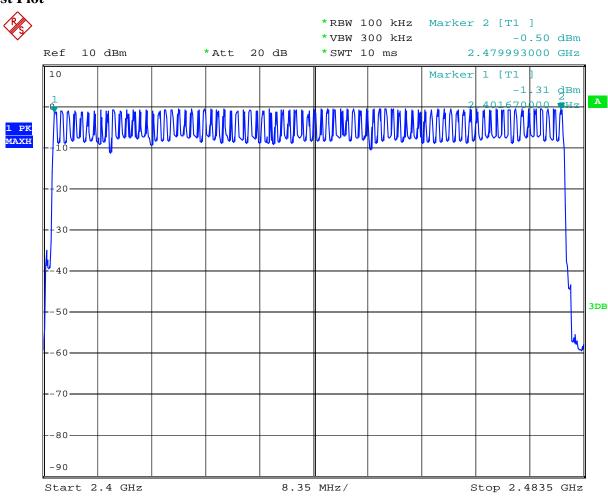

Date: 30.AUG.2014 16:40:24

Report No: 1408164-03 Page 44 of 87


Date: 2014-09-05



Type of Modulation: 8DPSK

EUT	Mobile		M	odel		SC-155
Mode	Hopping On		Input	put Voltage DC3.7		DC3.7V
Temperature	24 deg. C,		Humidity			56% RH
Operating Frequency Number of hopp channels		ing	Lin	nit	Pass/ Fail	
2402-2480MHz		79		≥ 1	.5	Pass

Test Plot

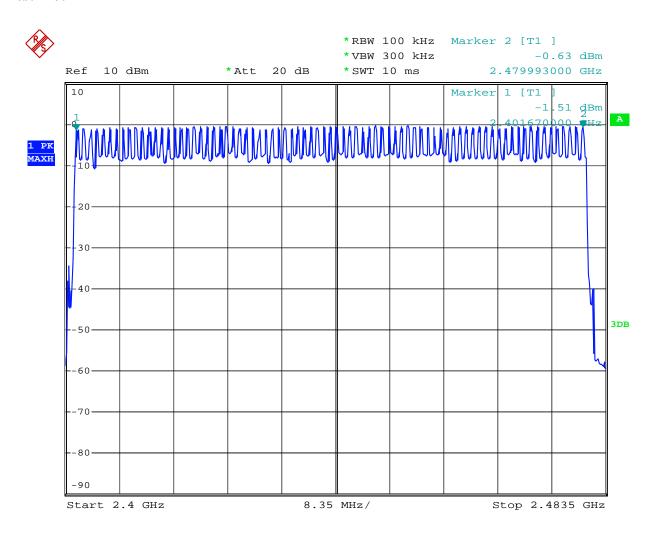

Date: 30.AUG.2014 16:51:17

Date: 2014-09-05



Page 45 of 87

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak;

Trace = max hold

- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No: 1408164-03 Page 46 of 87

Date: 2014-09-05



11.4 Test Result

Type of Modulation: GFSK

EUT	Me	Mobile			SC-155			
Mode	Keep Tr	Keep Transmitting		ansmitting Input Voltage		I	DC3.7V	
Temperatur	re 24 d	leg. C,	Humidity	5	66% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit			
Low	0.240	266.66	7 hop/s	0.0256	0.4s			
Middle	0.240	266.66	7 hop/s	0.0256	0.4s			
High	0.240	266.66	7 hop/s	0.0256	0.4s			

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case


Report No: 1408164-03 Page 47 of 87

Date: 2014-09-05



Test Plots:

Low Channel:

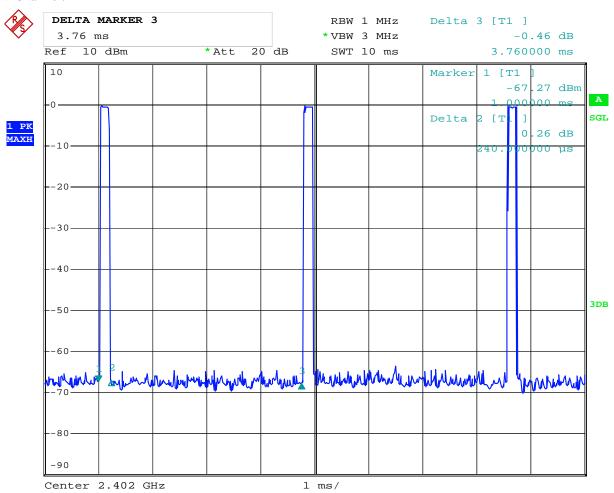


Date: 1.SEP.2014 12:53:10

Report No: 1408164-03 Page 48 of 87

Date: 2014-09-05



Middle Channel:

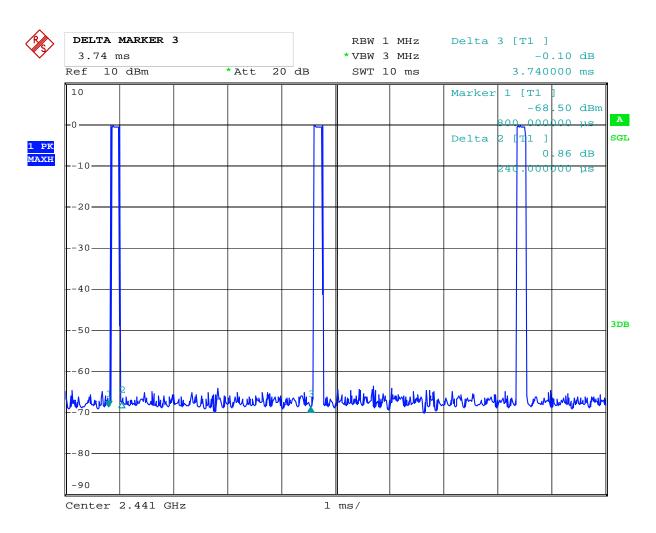

Date: 1.SEP.2014 12:56:38


Page 49 of 87

Date: 2014-09-05

Report No: 1408164-03



High Channel

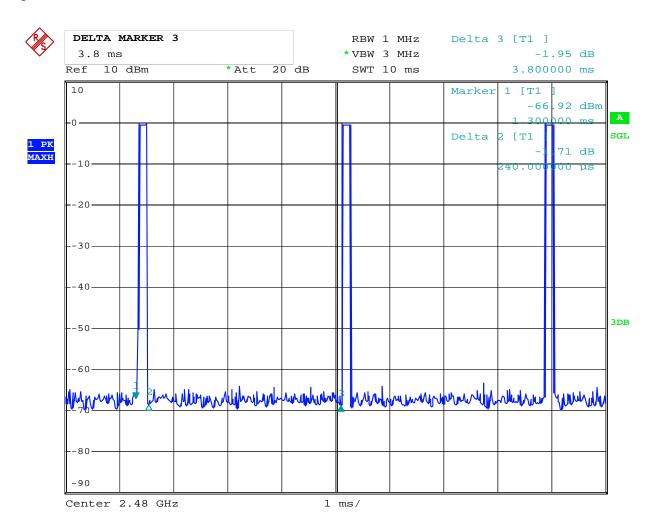

Date: 1.SEP.2014 12:57:17

Report No: 1408164-03 Page 50 of 87

Date: 2014-09-05



Test Result

Type of Modulation: Л/4DQPSK

EUT	M	Mobile			\$	SC-155
Mode	Keep Tr	Keep Transmitting		age	Ι	DC3.7V
Temperatur	re 24 c	deg. C, Humidity		56% RH		
Channel	Reading	Hoping R	ate		Actual	Limit
Low	0.220	266.667 ho	pp/s		0.0235	0.4s
Middle	0.240	266.667 ho	pp/s		0.0256	0.4s
High	0.240	266.667 ho	pp/s		0.0256	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period ,Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case


Report No: 1408164-03 Page 51 of 87

Date: 2014-09-05



Test Plots:

Low Channel:

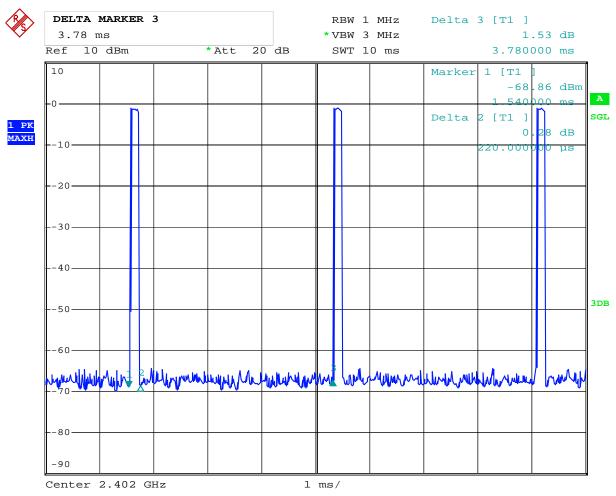


Date: 1.SEP.2014 12:53:52

Report No: 1408164-03 Page 52 of 87

Date: 2014-09-05



Middle Channel:

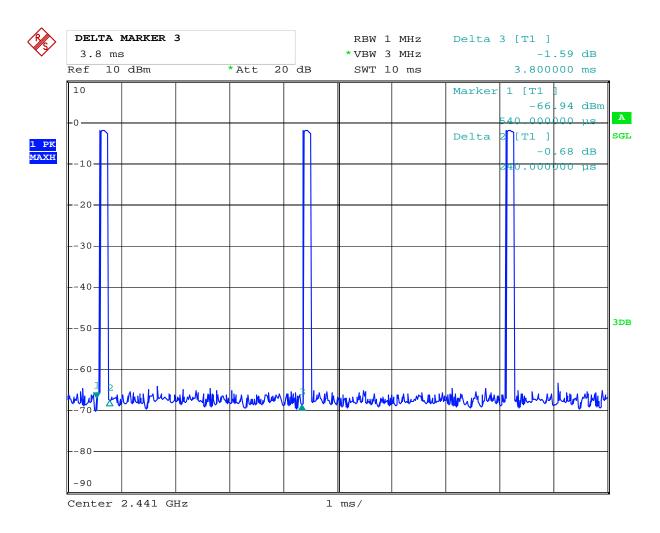


Date: 1.SEP.2014 12:55:59

Report No: 1408164-03 Page 53 of 87

Date: 2014-09-05



High Channel

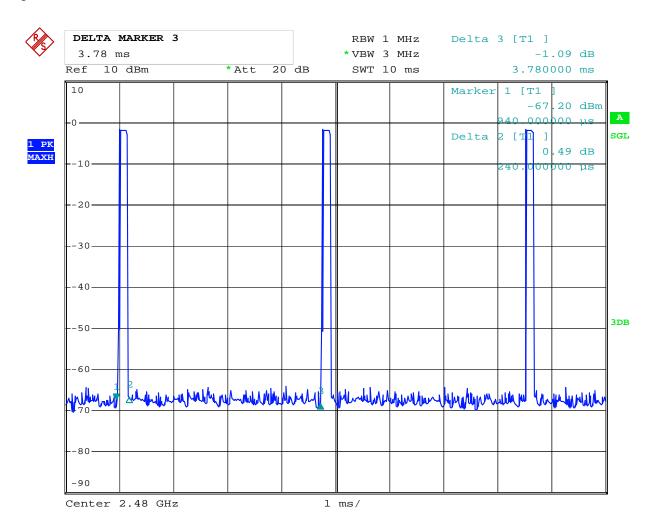

Date: 1.SEP.2014 12:57:54

Report No: 1408164-03 Page 54 of 87

Date: 2014-09-05



Type of Modulation: 8DPSK

EUT	M	Mobile				SC-155
Mode	Keep Tr	Keep Transmitting		ge]	DC3.7V
Temperatur	re 24 d	24 deg. C, Humidity		7	56% RH	
Channel	Reading	Hoping R	ate	Act	ual	Limit
Low	0.200	266.667 ho	op/s	0.02	213	0.4s
Middle	0.200	266.667 hop/s		0.02	213	0.4s
High	0.260	266.667 ho	pp/s	0.02	277	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels. A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

Note: DH5 was the worse case

Page 55 of 87


Report No: 1408164-03

Date: 2014-09-05



Test Plots:

Low Channel:

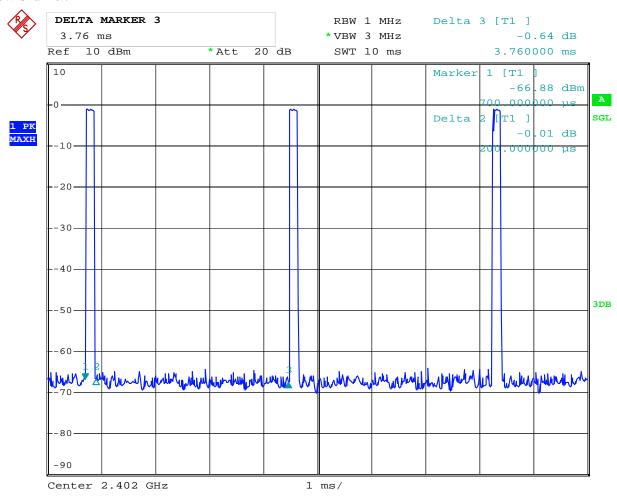


Date: 1.SEP.2014 12:54:28

Report No: 1408164-03 Page 56 of 87

Date: 2014-09-05



Middle Channel:

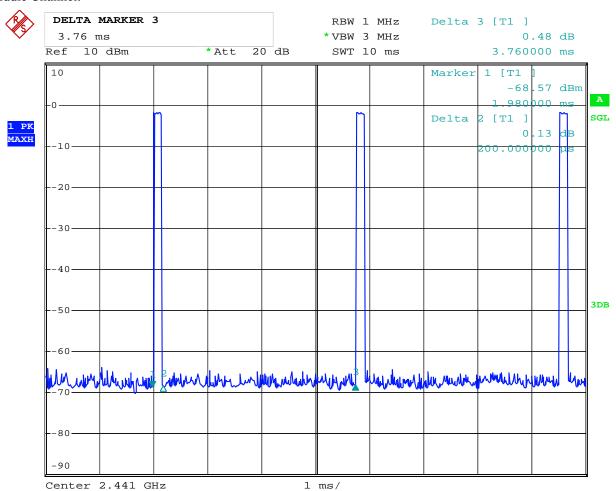


Date: 1.SEP.2014 12:55:16

Report No: 1408164-03 Page 57 of 87

Date: 2014-09-05



High Channel

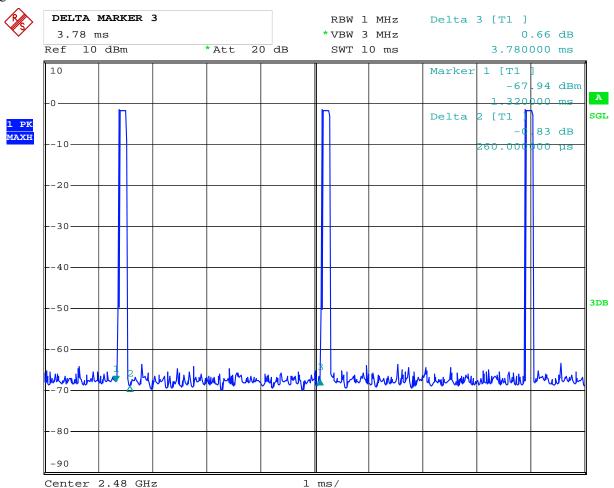

Date: 1.SEP.2014 12:58:23


Date: 2014-09-05



Page 58 of 87

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Page 59 of 87

Report No: 1408164-03

Date: 2014-09-05




Type of Modulation: GFSK

Out of Band Test Result 12.4

Product:	Mobile		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBµV/m)	38.2		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:



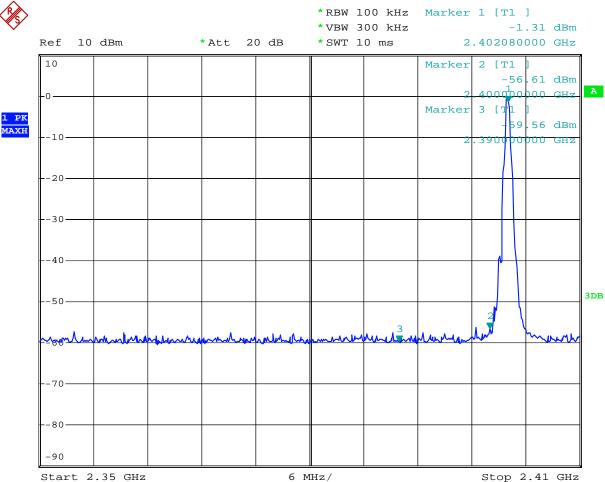

Date: 1.SEP.2014 11:31:45

Page 60 of 87

Report No: 1408164-03

Date: 2014-09-05




Type of Modulation: GFSK

Out of Band Test Result 12.4

Product:	Mobile		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	38.6		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:



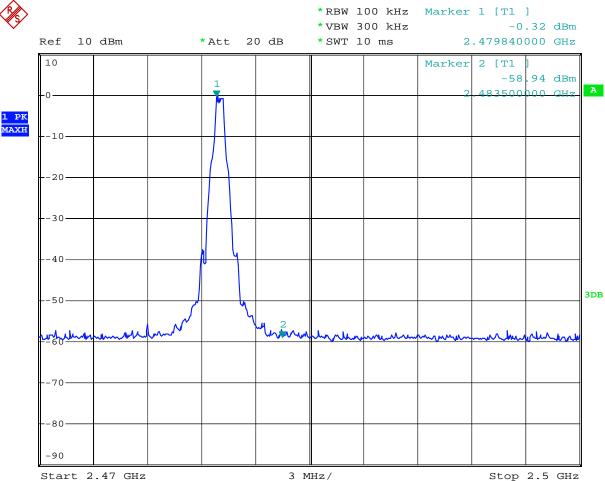

Date: 1.SEP.2014 11:54:39

Page 61 of 87

Report No: 1408164-03

Date: 2014-09-05




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:		Mobile	Test Mode:	Hopping mode
Mode	Kee	ping Transmitting	Input Voltage	DC3.7V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	37.5		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$	V(dBμV/m)		$54(dB\mu V/m)$
2390MHz				

Test Figure:

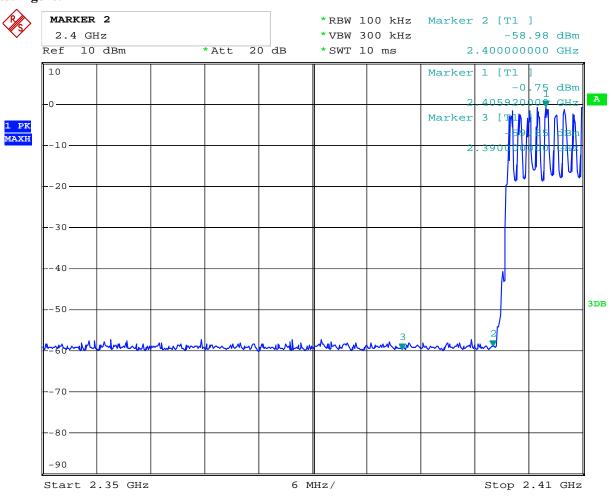

Date: 1.SEP.2014 11:59:15

Date: 2014-09-05




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Mobile		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	38.2		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

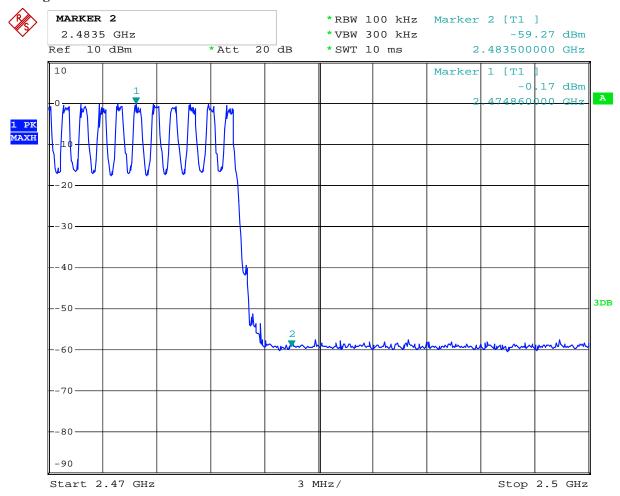

Date: 1.SEP.2014 11:34:53

Page 63 of 87

Report No: 1408164-03

Date: 2014-09-05




Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:	Mobile		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 36.7			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:



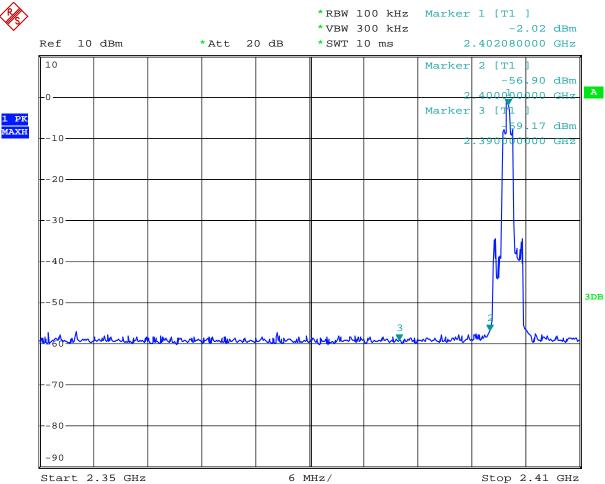

Date: 1.SEP.2014 11:29:16

Date: 2014-09-05




Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:	Mobile		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 38.3			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:



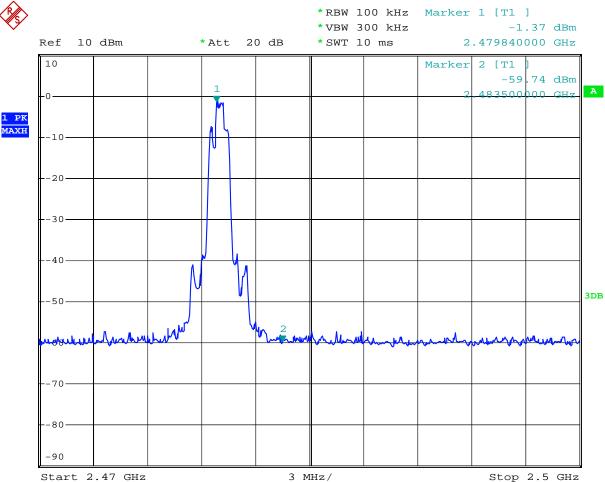

Date: 1.SEP.2014 11:50:21

Date: 2014-09-05




Type of Modulation: JI/4DQPSK

12.4 Out of Band Test Result

Product:	Mobile		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:

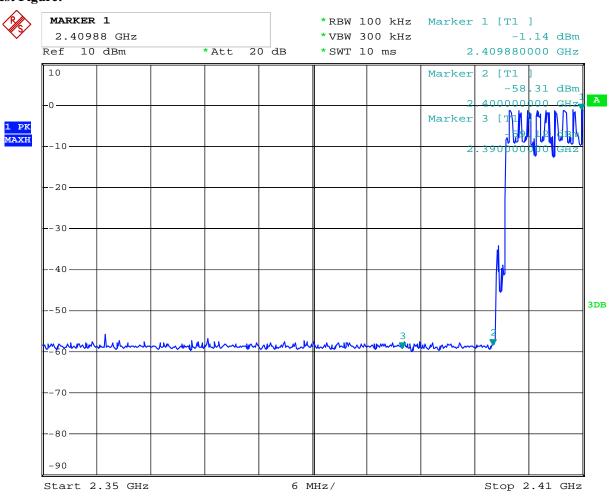

Date: 1.SEP.2014 10:59:27

Date: 2014-09-05




Type of Modulation: JI/4DQPSK

12.4 Out of Band Test Result

Product:	Mobile		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	38.2		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

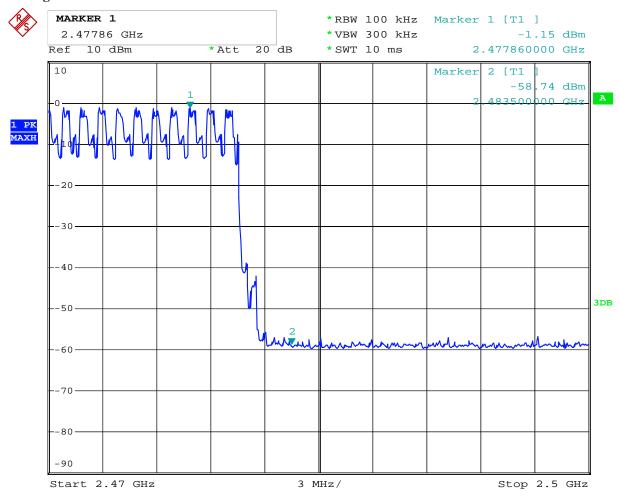

Date: 1.SEP.2014 11:40:21

Page 67 of 87

Report No: 1408164-03

Date: 2014-09-05




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Mobile		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2390MHz				

Test Figure:

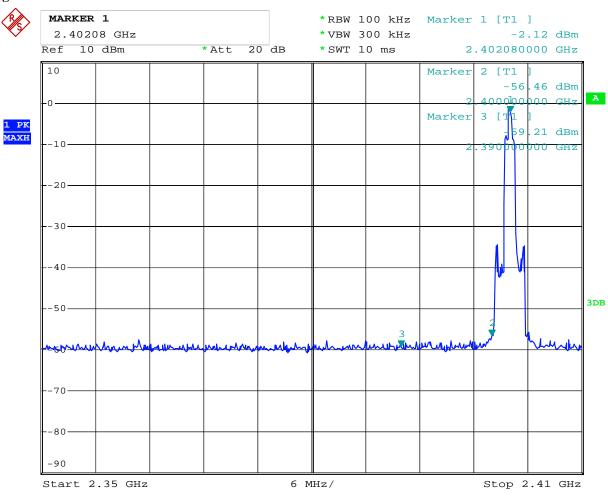

Date: 1.SEP.2014 11:25:03

Date: 2014-09-05




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Mobile		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.9			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

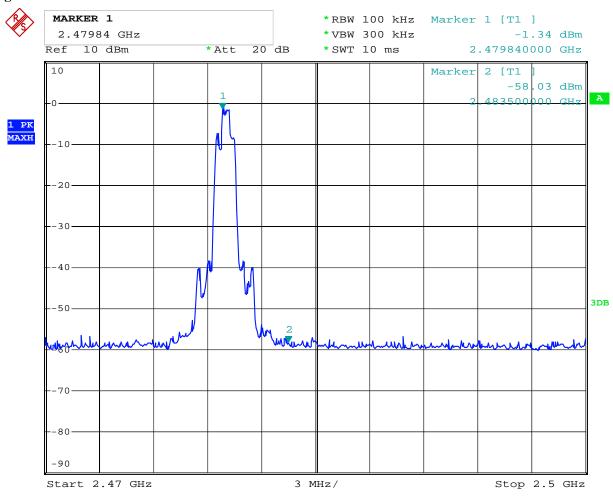

Date: 1.SEP.2014 11:49:23

Page 69 of 87

Report No: 1408164-03

Date: 2014-09-05




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Mobile		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.5			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

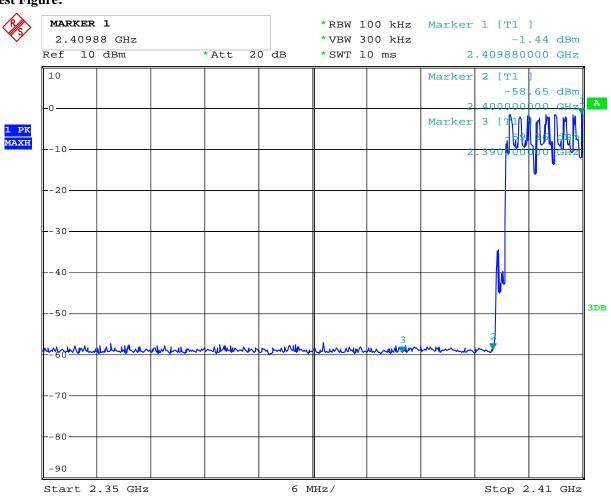

Date: 1.SEP.2014 11:23:11

Date: 2014-09-05




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Mobile		Test Mode:	Hopping mode
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 38.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

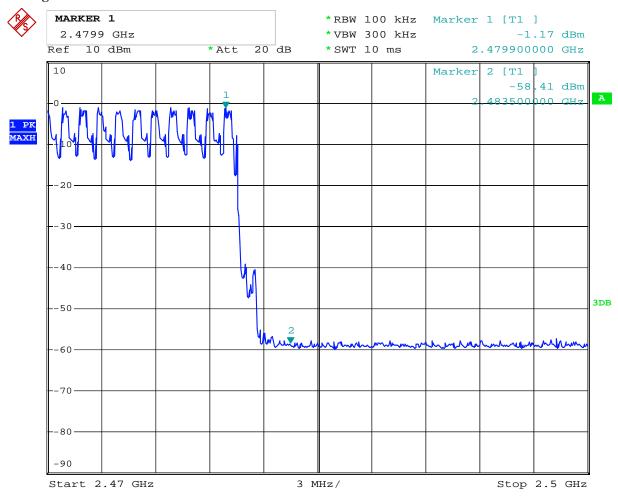

Date: 1.SEP.2014 11:46:45

Date: 2014-09-05



Page 71 of 87

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral Antenna used. The maximum Gain of this antenna is 1.0dBi

Report No: 1408164-03 Page 72 of 87

Date: 2014-09-05




14.0 FCC ID Label

FCC ID: 2AC5R-SC155

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

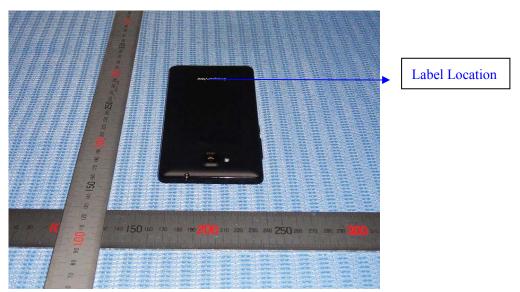


Report No: 1408164-03 Page 73 of 87

Date: 2014-09-05



15.0 Photo of testing

Conducted Emission Test Setup:

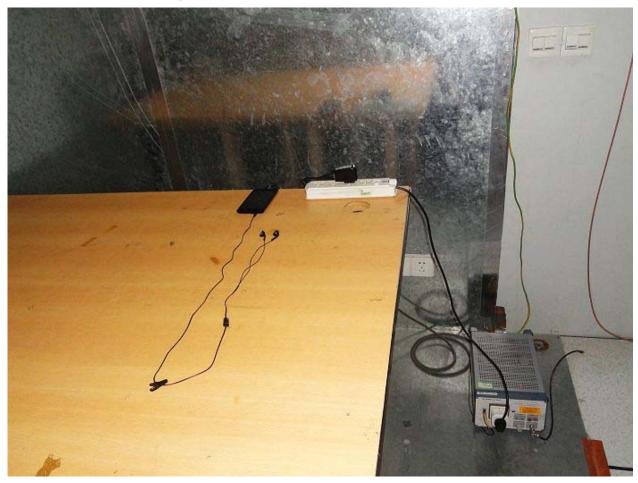

Page 74 of 87

Report No: 1408164-03

Date: 2014-09-05



Radiated Emission Test Setup:





Date: 2014-09-05



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Date: 2014-09-05



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2014-09-05



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 78 of 87

Report No: 1408164-03

Date: 2014-09-05



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Date: 2014-09-05



Outside view



Inside view



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2014-09-05



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Date: 2014-09-05



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 82 of 87


Report No: 1408164-03

Date: 2014-09-05



Inside view



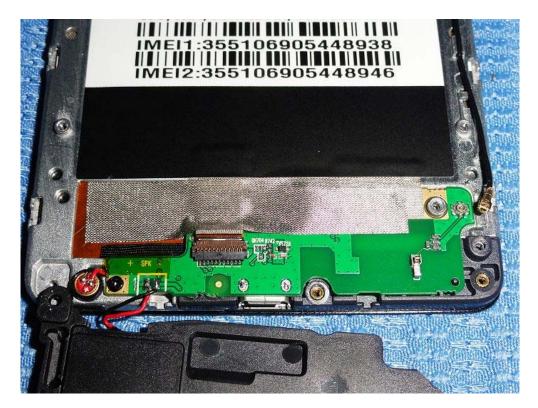

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Date: 2014-09-05



Inside view



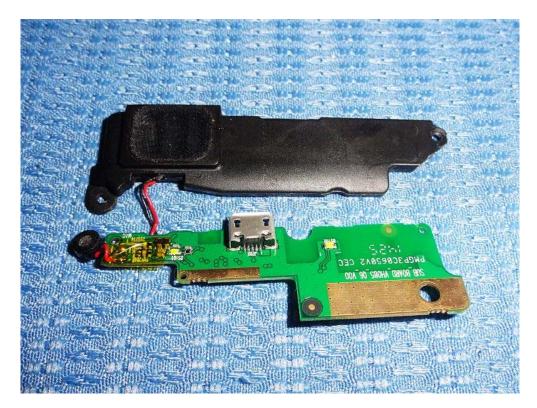

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 84 of 87

Report No: 1408164-03

Date: 2014-09-05



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2014-09-05



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2014-09-05



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Date: 2014-09-05



Inside view





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd vill not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.