

FCC Test Report

FCC ID	:	DMOSCBT5
Equipment	:	BT Stereo Headset
Model No.	:	SCBT5
Brand Name	:	Sennheiser
Applicant	:	Sennheiser Communications A/S
Address	:	Industriparken 27, Ballerup 2750, Denmark
Standard	:	47 CFR FCC Part 15.247
Received Date	:	Dec. 01, 2015
Tested Date	:	Dec. 08 ~ Dec. 10, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Along Chen / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	Unwanted Emissions into Restricted Frequency Bands	14
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	30
3.4	Conducted Output Power	35
3.5	Number of Hopping Frequency	36
3.6	20dB and Occupied Bandwidth	39
3.7	Channel Separation	41
3.8	Number of Dwell Time	40
		43



Release Record

Report No.	Version	Description	Issued Date
FR5D0103AD	Rev. 01	Initial issue	Feb. 01, 2016



FCC Rules	Test Items	Measured	Result	
15.207	Conducted Emissions	[dBuV]: 0.153MHz 50.05 (Margin -15.77dB) - QP	Pass	
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 32.91MHz	Pass	
15.209	Radialed Emissions	33.90 (Margin -6.10dB) - PK	r a55	
15.247(d)	Band Edge	Meet the requirement of limit	Pass	
15.247(b)(1)	Conducted Output Power	Power [dBm]: 5.2	Pass	
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass	
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass	
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass	
15.203	Antenna Requirement	Meet the requirement of limit	Pass	

Summary of Test Results



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information						
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate		
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps		
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps		
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps		
Note 1: Bluetooth BR uses a GFSK.						

Note 2: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.

1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remark
1	Inverted F	4.2	N/A	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type 3.7Vdc from battery	
HW Version	Beta 1.1
SW Version	1.05

1.1.4 Accessories

	Accessories					
No.	No. Equipment Description					
1	1 USB cable 1.8m non-shielded cable without core.					
2	2 Audio cable 1.2m audio cable.					



1.1.5 Channel List

	Frequency	band (MHz)		2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

1.1.6 Test Tool and Duty Cycle

Test Tool BlueTest3, Version: 2.5.0.93
--

1.1.7 Power Setting


Modulation Mode	Test Frequency (MHz)			
	2402	2441	2480	
GFSK/1Mbps	4	4	4	
8DPSK/3Mbps	4	4	4	



1.2 Local Support Equipment List

Support Equipment List					
No. Equipment Brand Model FCC ID Signal cable / Length (m)					
1	Notebook	DELL	Latitude E5420	DoC	USB, 1.8m non-shielded.

1.3 Test Setup Chart

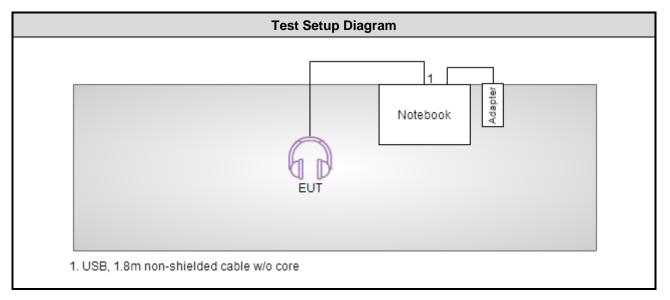



1.4 The Equipment List

Conducted Emission					
Conduction room 1 / (CO01-WS)				
Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until	
R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016	
SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016	
SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2015	Nov. 25, 2016	
Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015	
NA	50	04	Apr. 15, 2015	Apr. 14, 2016	
AUDIX	e3	6.120210k	NA	NA	
	Conduction room 1 / (Manufacturer R&S SCHWARZBECK SCHWARZBECK Woken NA	Conduction room 1 / (CO01-WS) Manufacturer Model No. R&S ESCS 30 SCHWARZBECK Schwarzbeck 8127 SCHWARZBECK Schwarzbeck 8127 Woken CFD200-NL NA 50	Conduction room 1 / (CO01-WS)ManufacturerModel No.Serial No.R&SESCS 30100169SCHWARZBECKSchwarzbeck 81278127-667SCHWARZBECKSchwarzbeck 81278127-666WokenCFD200-NLCFD200-NL-001NA5004	Conduction room 1 / (CO01-WS) Manufacturer Model No. Serial No. Calibration Date R&S ESCS 30 100169 Oct. 21, 2015 SCHWARZBECK Schwarzbeck 8127 8127-667 Nov. 13, 2015 SCHWARZBECK Schwarzbeck 8127 8127-666 Nov. 26, 2015 Woken CFD200-NL CFD200-NL-001 Dec. 31, 2014 NA 50 04 Apr. 15, 2015	

Test Item	Radiated Emission							
Test Site	966 chamber 2 / (03C	966 chamber 2 / (03CH02-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015			
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-523	Nov. 09, 2015	Nov. 08, 2016			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 07, 2015	Oct. 06, 2016			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016			
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 16, 2015	Nov. 15, 2016			
Preamplifier	Burgeon	BPA-530	100218	Nov. 03, 2015	Nov. 02, 2016			
Preamplifier	Agilent	83017A	MY39501309	Sep. 22, 2015	Sep. 21, 2016			
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015			
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015			
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015			
LF cable 10M	EMCC	CFD400-E	CFD400-001	Jun. 17, 2015	Jun. 16, 2016			
Measurement Software	AUDIX	e3	6.120210g	NA	NA			
Note: Calibration Inte	rval of instruments liste	d above is one year.	11					



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 FCC Public notice DA 00-705 ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.134 Hz			
Conducted power	±0.808 dB			
Power density	±0.463 dB			
Conducted emission	±2.670 dB			
AC conducted emission	±2.90 dB			
Radiated emission ≤ 1GHz	±3.62 dB			
Radiated emission > 1GHz	±5.60 dB			



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 56%	Peter Lin
Radiated Emissions	03CH02-WS	21°C / 67%	Morgan Chen
RF Conducted	TH01-WS	23°C / 65%	Alex Huang

➢ FCC site registration No.: 657002

➢ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	GFSK	2480	1Mbps	
Radiated Emissions ≤ 1GHz	GFSK	2480	1Mbps	
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	
Conducted Output Power	GFSK л /4 QDPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps 3Mbps	
Number of Hopping Channels	GFSK 8DPSK	2402~2480 2402~2480	1Mbps 3Mbps	
Hopping Channel Separation	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	
Dwell Time	GFSK 8DPSK	2402 2402	1Mbps 3Mbps	
NOTE: The EUT was pretested wit and Z-plane. The X-plane results				easurement – X, Y,



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit				
Frequency Emission (MHz)	Quasi-Peak	Average		
0.15-0.5	66 - 56 *	56 - 46 *		
0.5-5	56	46		
5-30	60	50		
Note 1: * Decreases with the logarith	nm of the frequency.	•		

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

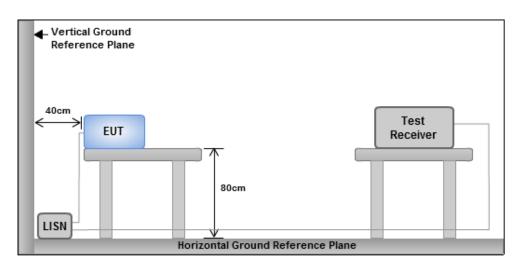

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



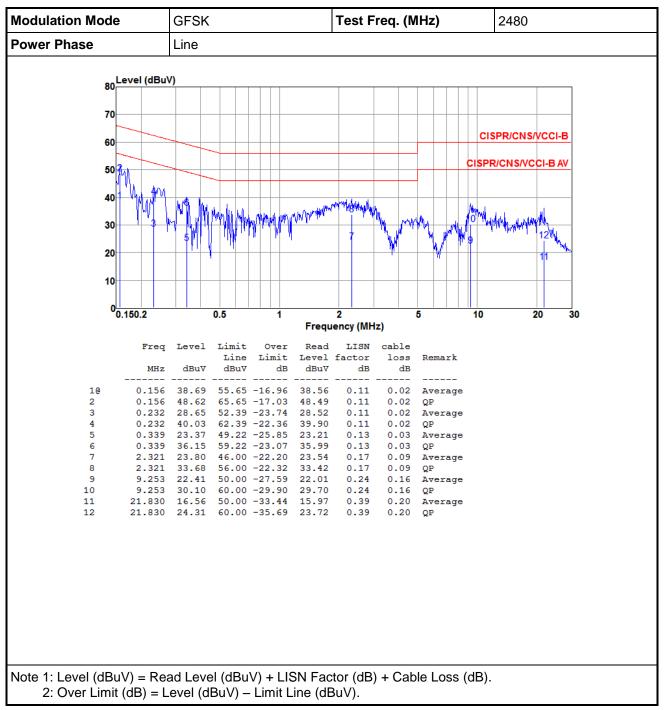

3.1.4 Test Result of Conducted Emissions



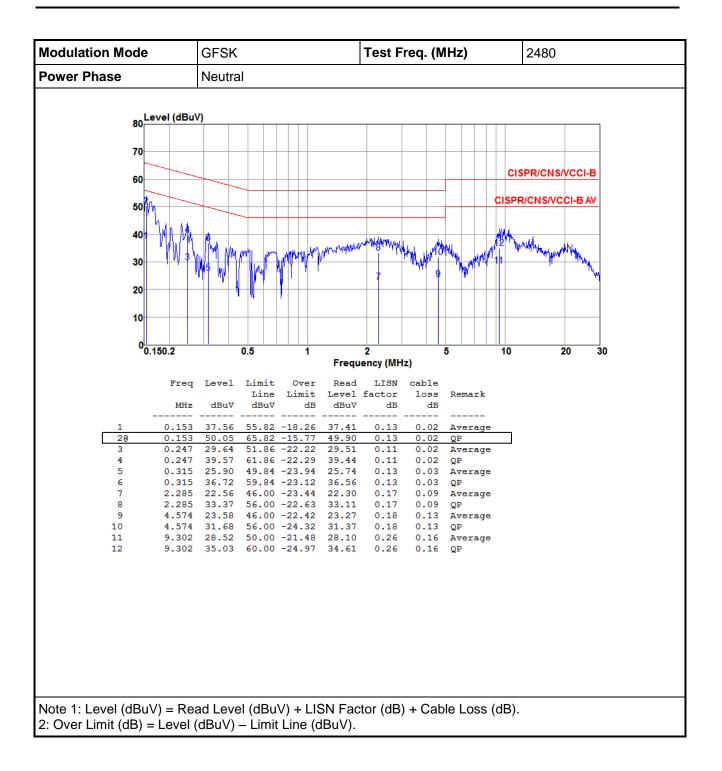



3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit						
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)			
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300			
0.490~1.705	24000/F(kHz)	33.8 - 23	30			
1.705~30.0	30	29	30			
30~88	100	40	3			
88~216	150	43.5	3			
216~960	200	46	3			
Above 960	500	54	3			

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Radiated emission above 1GHz / Peak value RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:

3.


20log (Duty cycle) = 20log $\frac{1s / 1600 * 5}{100 \text{ ms}}$ = -30.1dB

4. Radiated emission above 1GHz / Average value for other emissions


4. RBW=1MHz, VBW=1/T and Peak detector



3.2.3 Test Setup

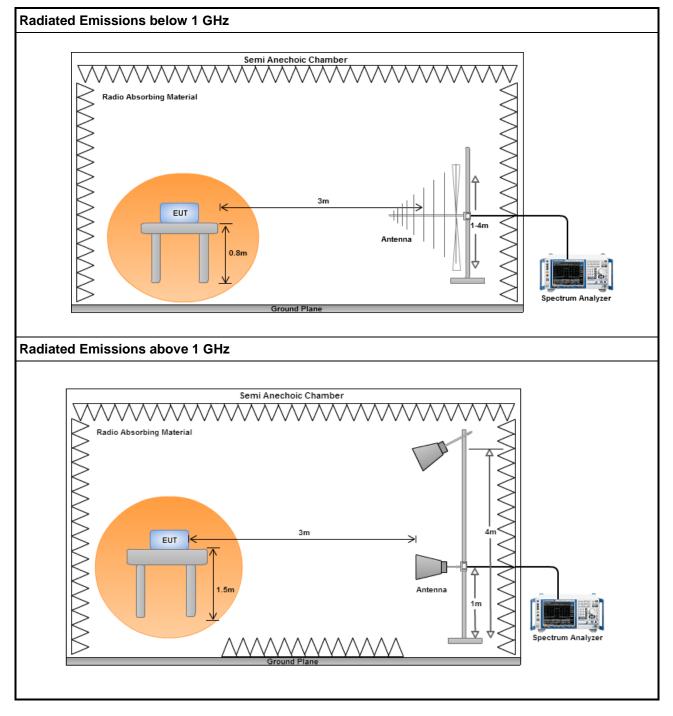




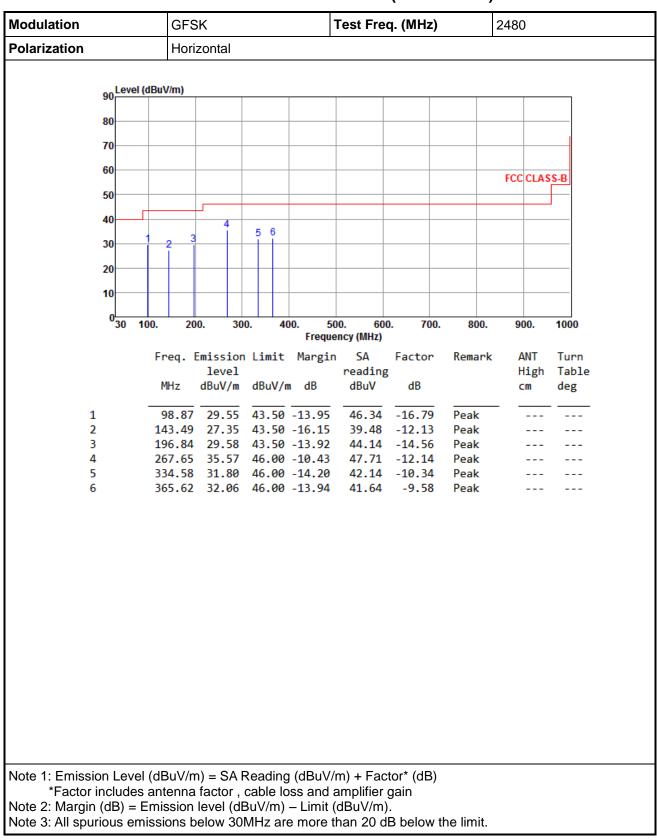


3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)



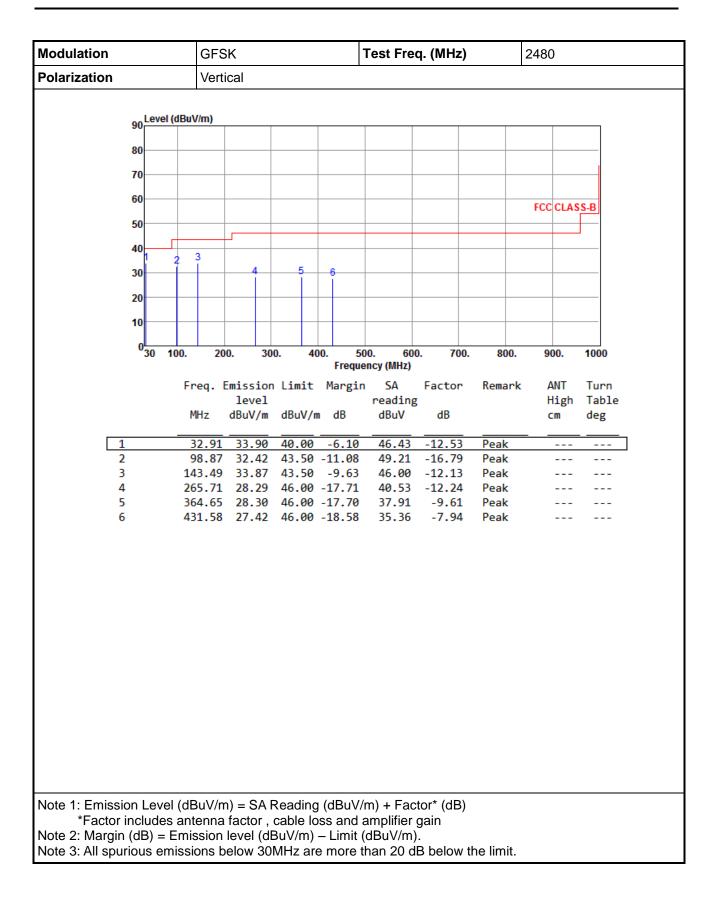




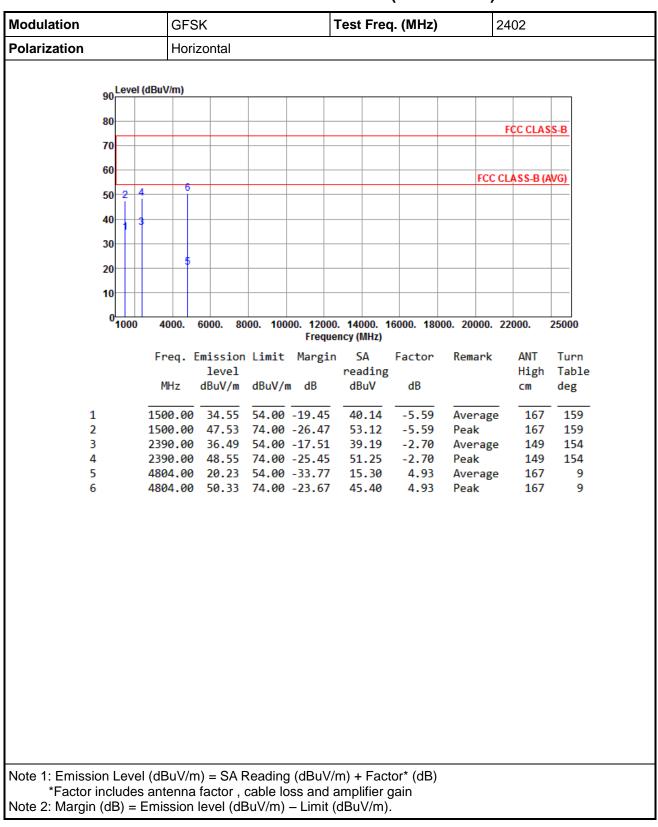


3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK




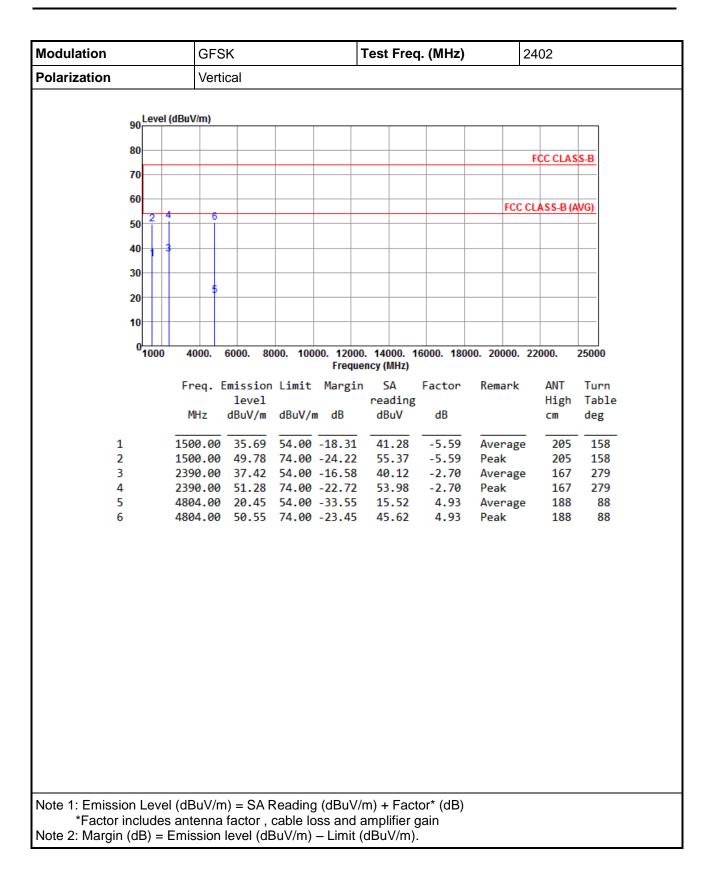




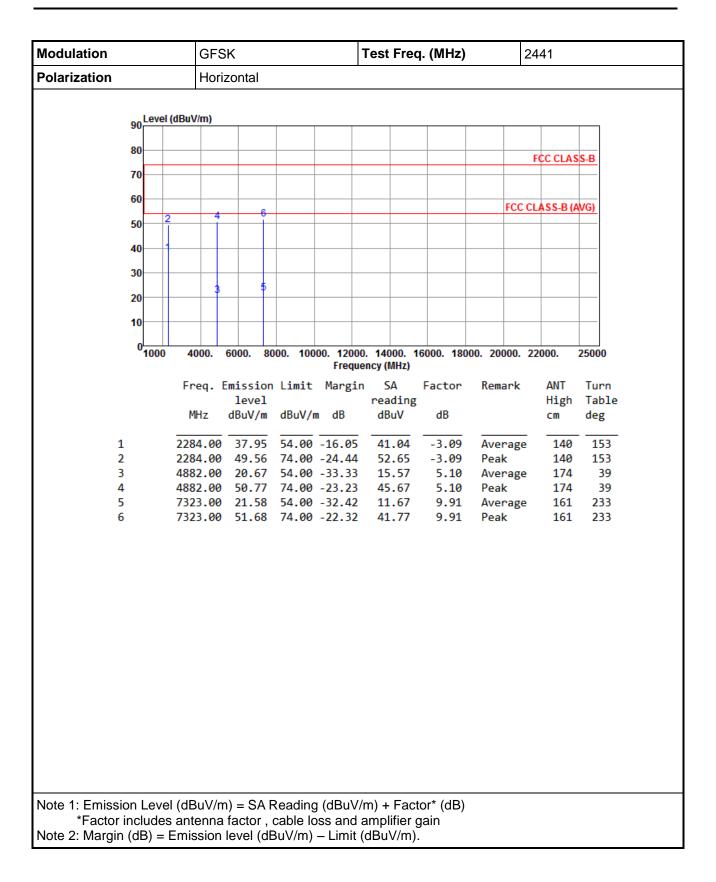




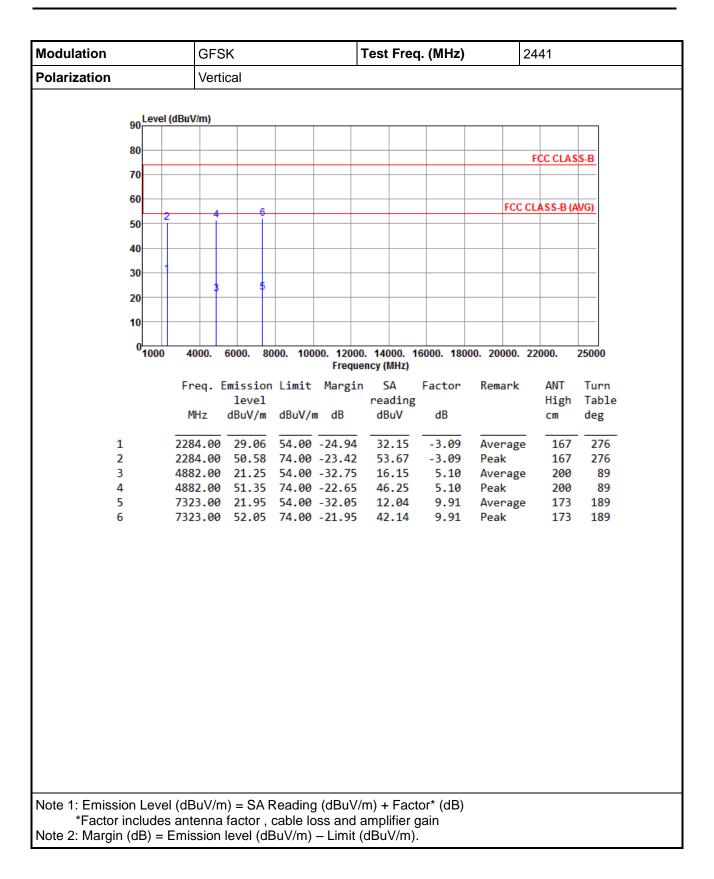




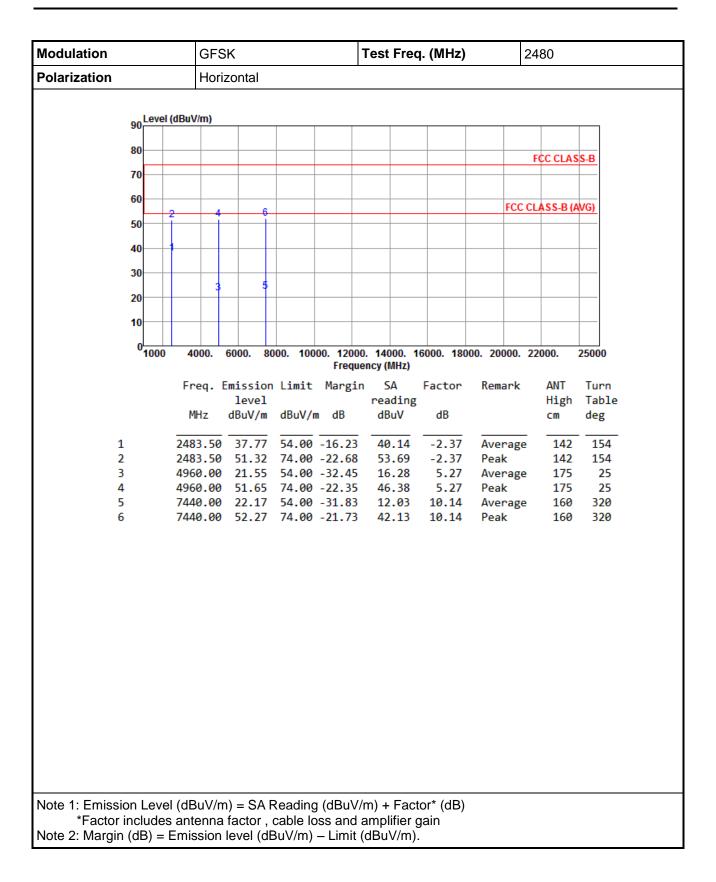



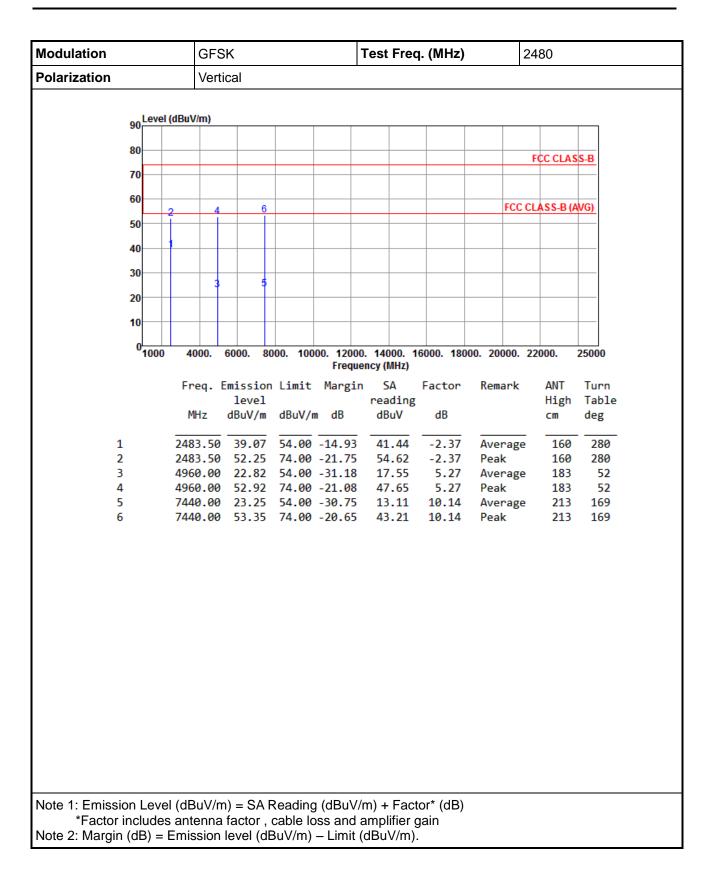




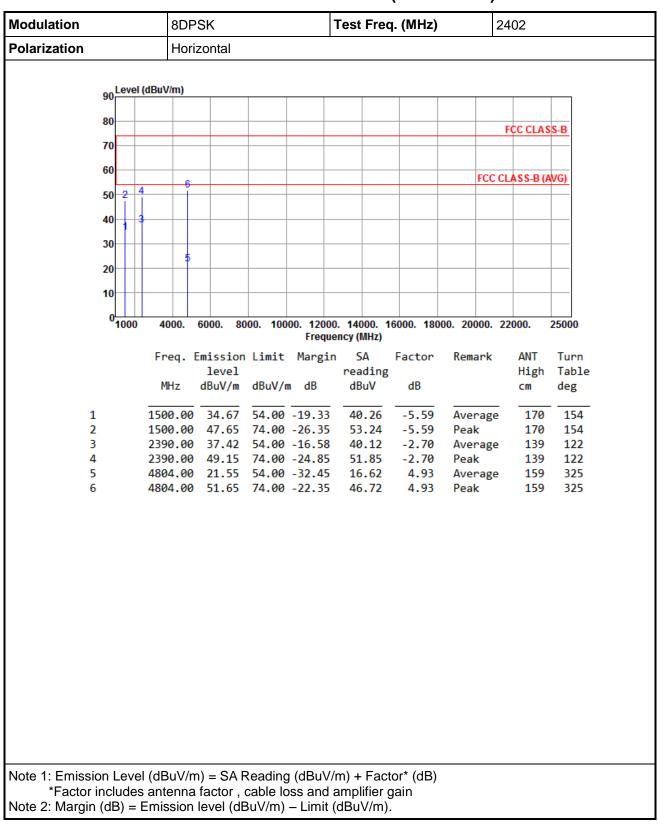


3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK




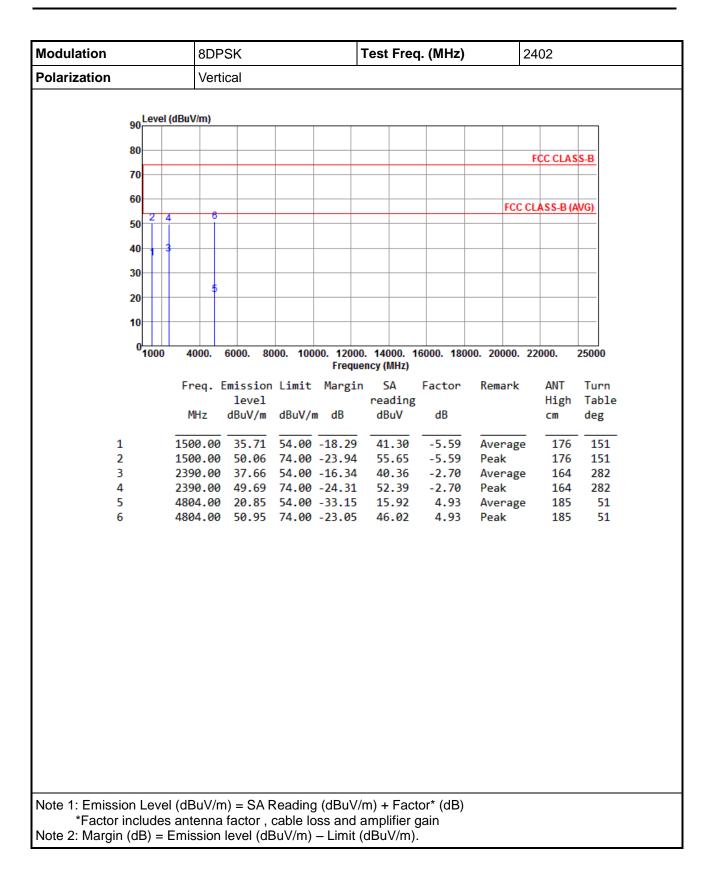




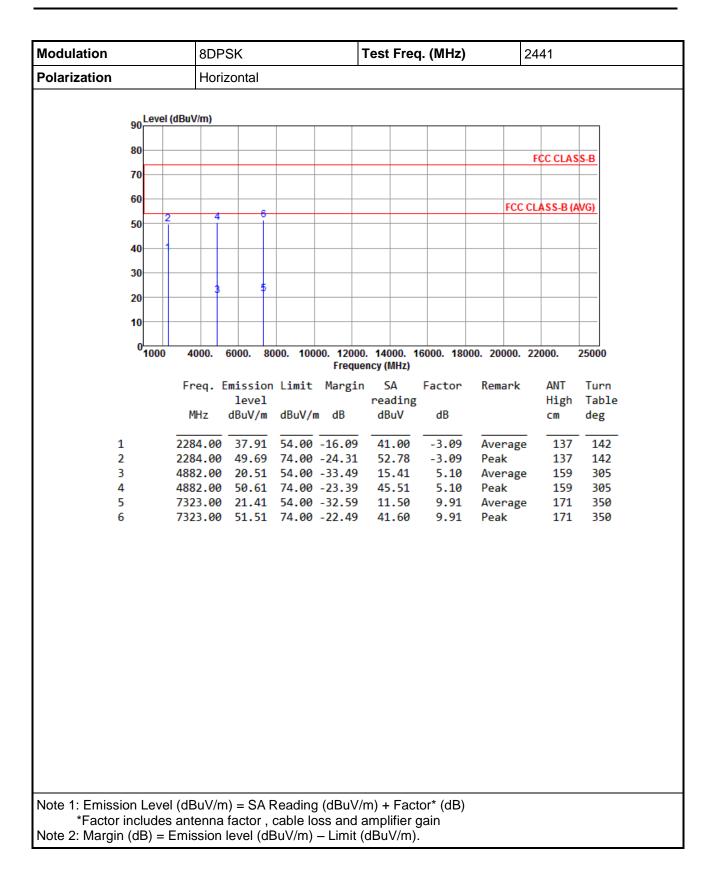




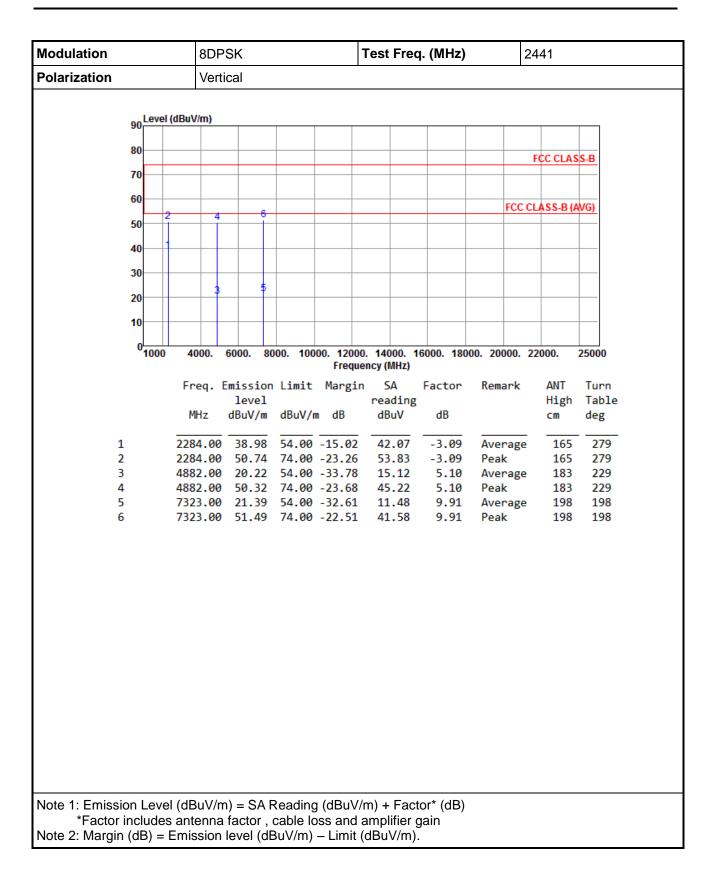



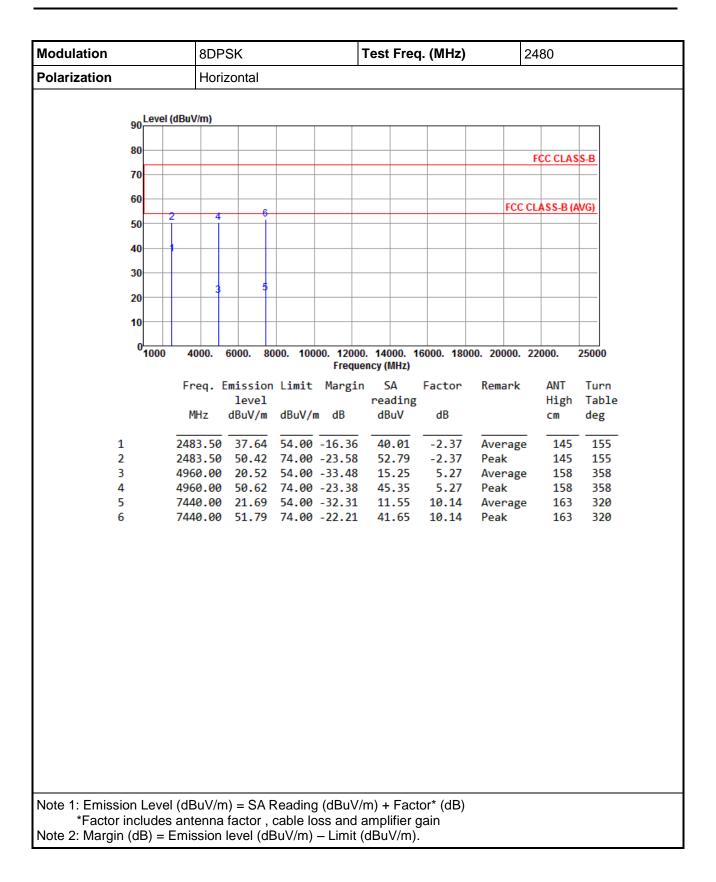



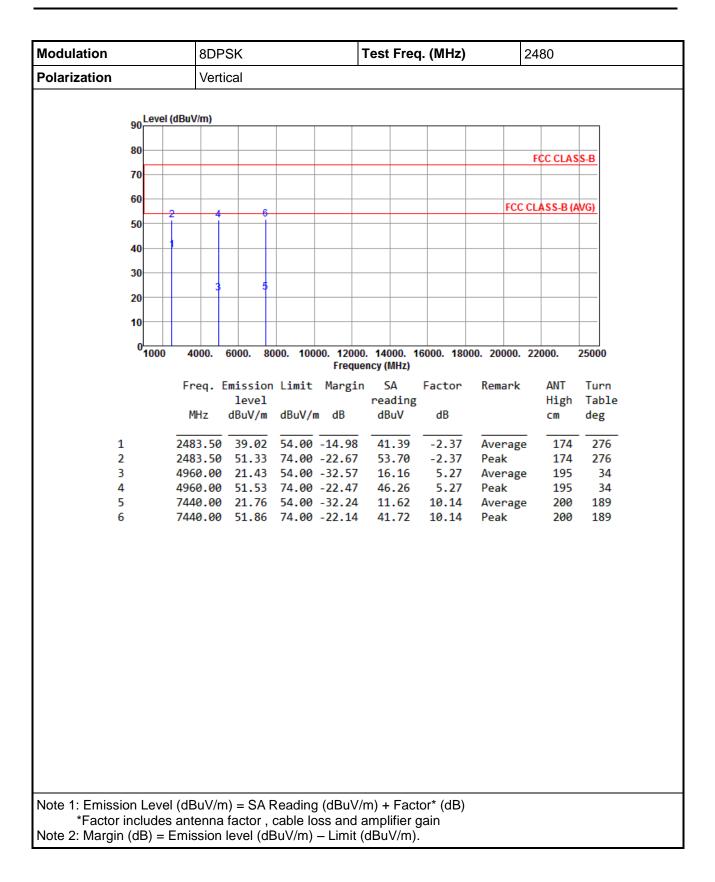



3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.3.3 Test Setup






3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

GFSK

Hopping on	Hopping off			
30MHz~25GHz (down 20dBc)	TX Freq 2402MHz / 30MHz~25GHz (down 20dB			
ipectrum Ref Level 20.00 dBm Offset 10.80 dB 🖷 RBW 100 kHz	Ref Level 20.00 dBm Offset 10.80 dB . RBW 100 kHz			
Att 20 dB SWT 32.1 ms VBW 300 kHz Mode Sweep 1Pk View	Att 20 dB SWT 32.1 ms VBW 300 kHz Mode Sweep IPk View			
0 dBm 01 4.470 dBm 01 4.470 dBm 01 4.470 dBm 02 4.770 8420 0CH 2.47708429 0CH 2.47708429 0CH 2.47708429 0CH 2.47708429 0CH 2.47000000 CH 2.470000000 CH 2.47000000 CH 2.470000000 CH 2.47000000 CH 2.470000000 CH 2.47000000000000000000000000000000000000	Hz 10 dBm M1 M1[1] 2.48350000 3.69			
00 dBm - 02 -15,530 dBm - 02 -15,500 dBm	-10 dBm			
10 dbm	-30 dBm			
50 dBm - Mt - Bally Room - Ba				
70 dBm F1 F2	-70 dBm F1 F2			
Vart Z = 3200 pts 3200 pts 300 pts 300 pts orker Trc X-value Y-value Function Function Result M1 1 2.4778429 GHz 4.47 dBm M2 1 2.4 GHz -57.88 dBm	Z Start 2.35 GHZ 32001 pts stop 2.35 Marker Type Ref Trc X-value Y-value Function M1 1 2.4021702 GHZ 3.69 dBm Function Result M2 1 2.4 GHZ -54.50 dBm Function			
RefLevel 20.00 dBm Offset 10.80 dB ● RBW 100 kHz Att 20 dB SWT 250 ms ● VBW 300 kHz Node Sweep	mp Spectrum Ref Level 20.00 dBm Offset 10.80 dB RBW 100 kHz Att 20 dB SWT 250 ms VBW 300 kHz			
New M1[1] -47.33 dBr IB2 View M1[1] 18.237630 GH				
D1 4.470 dBm	10 dBm			
48m	0 dBm			
D2 -15.530 d8m	-20 dBm			
10 dBm	-30 dBm			
	-S0 dBm			
0,d8m line in the second se				
	-70 dBm			
00 dbm-				



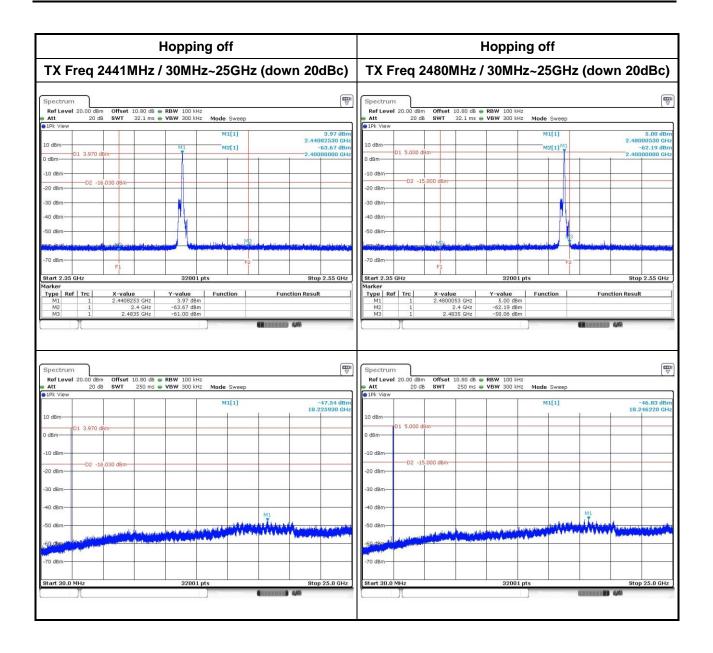




8DPSK

Hopping on			Hopping off						
30MHz~25GH	lz (down 20	dBc)	TX Freq 2402MHz / 30MHz~25GHz (down 20d				Bc)		
Spectrum Ref Level 20.00 dBm Offset 10.80 dB 🖷 RBW 1	00 kHz		Spectrum Ref Level 20.00 dBn	n Offset 10.80 dB #	RBW 100 kHz				Ę
	00 kHz Mode Sweep		Att 20 db Discrete	3 SWT 32.1 ms 🕯	VBW 300 kHz N	lode Sweep			
0 dBm	M1[1]	2.64 dBm 2.47300550 GHz -42.23 dBm 2.4000000 GHz	10 dBm	641		M3[1] M1[1]		2.48350	1.35 dB
dBm D1 2:640 dBm dBm utpling to the set of	te an and all all all all the birth of the International and a second second International and a second		-10 dBm	8.650 dBm					
i0 dBm			-30 dBm	M2					
10 dBm	13		-40 dBm			1 1			
70 dBm F1	F2		-70 dBm	F1		F2			
tart 2.35 GHz 3 arker	2001 pts	Stop 2.55 GHz	Start 2.35 GHz Marker		32001 pts	E.		Stop 2	.55 GH
M3 1 2.4835 GHz -60.1	1 dBm	1	M3 1	2.4835 GHz	-63.30 dBm		B ARRAN BARRAN	649	_
pectrum Ref Level 20.00 dBm Offset 10.80 dB = RBW 1	00 kHz	((((((((((((((((((((((((((((((((((((((Spectrum Ref Level 20.00 dBn	n Offset 10.80 dB	RBW 100 kHz	Mee (1999) 11		498	[1
ipectrum Ref Level 20.00 dBm Offset 10.80 dB @ RBW 1 Att 20 dB SWT 250 ms @ VBW 3	00 kHz 00 kHz 00 kHz Mode Sweep		Spectrum	n Offset 10.80 dB			(Internet)	6/8	
spectrum Ref Level 20.00 dBm Offset 10.80 dB = RBW 1 Att 20 dB SWT 250 ms = VBW 3 JPk View	00 kHz	-46.54 dBm 10.236070 GHz	Spectrum Ref Level 20.00 dBn Att 20 db	n Offset 10.80 dB	RBW 100 kHz	lode Sweep M1[1]	••••••		7.27 dB
pectrum Ref Level 20.00 dBm Offset 10.80 dB = RBW 1 Att 20 dB SWT 250 ms VBW 3 JPk View	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm	Spectrum Ref Level 20.00 dBm Att 20 dt	n Offset 10.80 dB	RBW 100 kHz				7.27 dB
Pectrum Ref Level 20.00 dBm Offset 10.80 dB • RBW 1 Att 20 dB SWT 250 ms • VBW 3 IPK View 0 dBm 01 2 540 dBm	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm	Spectrum Ref Level 20.00 dBn Att 20 db	n Offset 10.80 dB # 3 SWT 250 ms #	RBW 100 kHz				7.27 dE
pectrum Offset 10.80 d8 RBW 1 Ref Level 20.00 d8m Offset 10.80 d8 RBW 1 Att 20 d8 SWT 250 ms WBW 3 JPk View 0 d8m 0 1 2.640 dsm 0 1<	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm	Spectrum Ref Level 20.00 dBm Att 20 df @ IPk View 10 dBm	n Offset 10.80 dB # 3 SWT 250 ms #	RBW 100 kHz				7.27 dE
pectrum Offset 10.80 dB RBW 1 Ref Level 20 dB SWT 250 ms VBW 3 JPk View	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm	Spectrum Ref Level 20.00 dBn Att 20 dl 9 IPk View 10 dBm 0 dBm 0 dBm	n Offset 10.80 dB # 3 SWT 250 ms #	RBW 100 kHz				7.27 dE
Spectrum Spectrum Ref Level 20.00 dBm Offset 10.80 dB 8 BW 1 Att 20 dB SWT 250 ms 9 UBW 3 JPk View 0 dBm 0 0 dBm 0 dBm 01 2.640 dBm 0 0 0 10 dBm 02 -17,380 dBm 0 0 0	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm	Spectrum Rof Level 20.00 dBm Att 20 db ID dBm 01 dBm ID dBm 01 1.350 db -10 dBm 02 -10	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz				7.27 dB
Spectrum Spectrum Ref Level 20.00 dBm Offset 10.80 dB 8 BW 1 Att 20 dB SWT 250 ms 9 UBW 3 JPk View 0 dBm 0 0 dBm 0 dBm 01 2.640 dBm 0 0 0 10 dBm 02 -17,380 dBm 0 0 0	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm	Spectrum Ref Level 20.00 dBn Att 20 dl 9 IPk View 10 dBm 0 dBm 0 dBm	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz				7.27 dB
Spectrum Spectrum Ref Level 20.00 dBm Offset 10.80 dB • RBW 1 Att 20 dB SWT 250 ms • VBW 3 JPk View 0 0 dBm 01 2.640 dBm 00 dBm 02 -17,360 dBm 20 dBm 02 -17,360 dBm	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm 18.236070 GHz	Spectrum Rof Level 20.00 dBm Att 20 db ID dBm 01 dBm ID dBm 01 1.350 db -10 dBm 02 -10	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz	M1[1]			7.27 dB
Spectrum Offset 10.80 dB = RBW 1 Ref Level 20.00 dBm 00 dB SWT 250 ms = VBW 3 Dir View 0 dBm 0 dBm 01 2.640 dBm 00 dBm 01 4.640 dBm 00 dBm 02 -17,360 dBm 00 dBm 02 -17,360 dBm	00 kHz 00 kHz 00 kHz Mode Sweep M1[1]	-46.54 dBm	Spectrum Rof Level 20.00 dBn Att 20 dB ID dBm ID dBm ID dBm -10 dBm -20 dBm -30 dBm	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz				7.27 dB
Spectrum Offset 10.80 dB = RBW 1 Rof Level 20.00 dBm Offset 10.80 dB = RBW 1 Att 20 dB SWT 250 ms = VBW 3 JRk View 0 0 dBm 0 0 dBm 0 250 dB m 0 0 dBm 0 2.540 dBm 0 0 dBm 0 20 dB m 0 00 dBm 0 -17,360 dB m 0 00 dBm 0 -17,360 dB m 0 00 dBm 50 dB m 0 0	00 kHz 00 kHz 00 kHz Mode Sweep	-46.54 dBm 18.236070 GHz	Spectrum Ref Level 20.00 dBm Att 20 dbm ID dBm D1 1.350 dbm -10 dBm D2 -11 -20 dBm D2 -11 -30 dBm -50 dBm	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz	M1[1]			7.27 dB
Spectrum Offset 10.80 dB = RBW 1 Rof Level 20.00 dBm Offset 10.80 dB = RBW 1 Att 20 dB SWT 250 ms = VBW 3 JRk View 0 0 dBm 0 0 dBm 0 250 dB m 0 0 dBm 0 2.540 dBm 0 0 dBm 0 20 dB m 0 00 dBm 0 -17,360 dB m 0 00 dBm 0 -17,360 dB m 0 00 dBm 50 dB m 0 0	00 kHz 00 kHz 00 kHz Mode Sweep M1[1]	-46.54 dBm 18.236070 GHz	Spectrum Ref Level 20.00 dBn Att 20 db 10 dBm 0 dBm 0 dBm 0 dBm -10 dBm -20 dBm -30 dBm	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz	M1[1]			7.27 dB
Spectrum Image: Spectrum Rof Level 20.00 dBm Offset 10.80 dB • RBW 1 Att 20 dB SWT 250 ms • VBW 3 JIPk View 0 dBm	00 kHz 00 kHz 00 kHz Mode Sweep M1[1]	-46.54 dBm 18.236070 GHz	Spectrum Ref Level 20.00 dBm Att 20 dbm ID dBm D1 1.350 dbm -10 dBm D2 -11 -20 dBm D2 -11 -30 dBm -50 dBm	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz	M1[1]			7.27 dB
Spectrum Offset 10.80 dB = RBW 1 Ref Level 20.00 dBm 250 dB SWT 250 ms = VBW 3 JDk View 10 dBm 10 dBm 10 dBm 10 dBm 01 2.640 dBm 0 10 dBm 10 dBm 10 dBm 01 2.640 dBm 0 10 dBm 10 dBm 10 dBm 10 dBm 01 2.640 dBm 0 10 dBm 0 10 dBm 10 dBm 10 dBm 02 -17, 360 dBm 0	00 kHz 00 kHz 00 kHz Mode Sweep M1[1]	-46.54 dBm 18.236070 GHz	Spectrum Rof Level 20.00 dBn Att 20 db 0 BPK View 10 dBm 0 dBm 0 dBm 0 dBm -10 dBm -20 dBm -20 dBm -30 dBm -50 dBm -50 dBm	n Offset 10,80 dB & 3 SWT 250 ms #	RBW 100 kHz	M1[1]			(q 7.27 dB 3100 GH



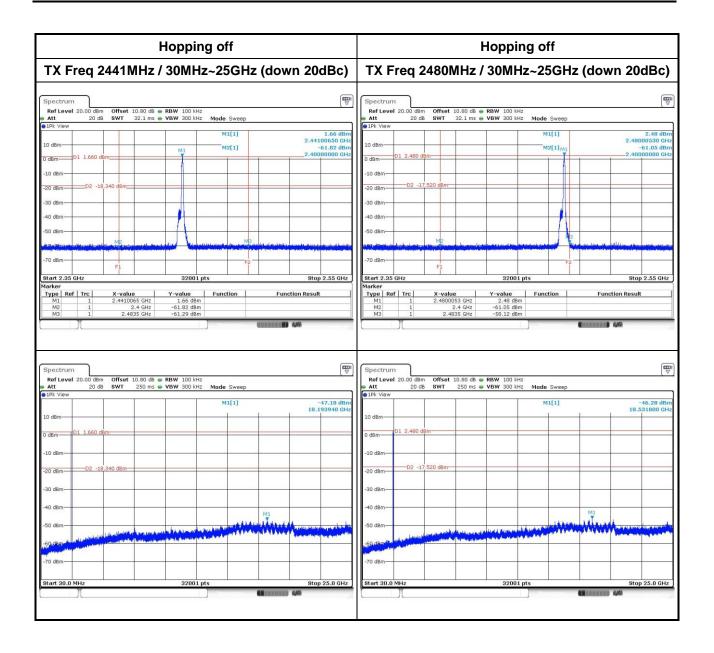



3.4 Conducted Output Power

3.4.1 Limit of Conducted Output Power

1 Watt

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.

🛛 0.125 Watt

For all other frequency hopping systems in the 2400–2483.5 MHz band.

0.125 Watt

For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

- 1. A wideband power meter is used for power measurement. Bandwidth of power senor and meter is 50MHz
- 2 If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup





Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	2.35	3.71	125
GFSK	2441	2.81	4.48	125
GFSK	2480	3.31	5.20	125
л /4 DQPSK	2402	1.91	2.81	125
л /4 DQPSK	2441	2.14	3.30	125
л /4 DQPSK	2480	2.60	4.15	125
8DPSK	2402	2.07	3.17	125
8DPSK	2441	2.38	3.77	125
8DPSK	2480	2.85	4.55	125

3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	2.10	3.22
GFSK	2441	2.48	3.95
GFSK	2480	2.94	4.69
л /4 DQPSK	2402	1.09	0.38
л /4 DQPSK	2441	1.22	0.85
л /4 DQPSK	2480	1.49	1.72
8DPSK	2402	1.10	0.40
8DPSK	2441	1.22	0.87
8DPSK	2480	1.49	1.74

Note: Average power is for reference only.



3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


3.5.2 Test Procedures

- 1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
- 2 Allow trace to stabilize.

3.5.3 Test Setup





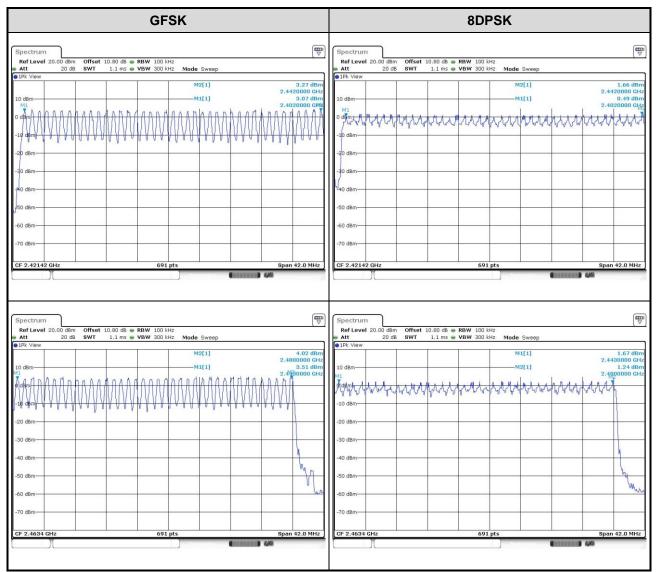

3.5.4 Test Result of Number of Hopping Frequency



3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

- 1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak, Trace max hold
- 2 Allow trace to stabilize
- 3 Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- 1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Sample, Trace max hold
- 2 Allow trace to stabilize
- 3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup





Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.939	0.868
GFSK	2441	0.948	0.860
GFSK	2480	0.939	0.864
8DPSK	2402	1.252	1.155
8DPSK	2441	1.257	1.155
8DPSK	2480	1.265	1.155

3.6.3 Test result of 20dB and Occupied Bandwidth

Worst Plot of 20dB Bandwidth				Worst Plot of Occupied Bandwidth									
Spectrum Ref Level 20.00 dBm Offset Att 20 dB SWT	10.80 dB • RBW 30 kH 1.1 ms • VBW 100 kH				Spectrum Ref Level Att	20.00 dBm 20 dB			RBW 30 kHz VBW 100 kHz	Mode Sweep			Ţ
10 dBm		M1[1] ——Occ Bw D1[1]	2.4793 1.16353	17.98 dBm 86087 GHz 1114 MHz -0.81 dB 86522 MHz	10 dBm				MI	M1[1] Occ Bw	1		1.19 dB 000430 GH 48046 MH
0 dBm 01 1.108 dBm	forment	many		0012	-10 dBm		P	Zm	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	2 Long	TR		
20 dBm D2 -18.892 dBm 30 dBm					-30 dBm	h	m				h	n.	~
40 dBm			mm	hann	-60 dBm						_		m
-60 dBm					CF 2.48 GHz Marker				691 pt			Spa	in 3.0 MH
-70 dBm		F2			Type Ref M1 T1	1 1	X-value 2.480004 2.4794182	3 GHz 3 GHz	Y-value 1.19 dBm -15.35 dBm	Function Occ Bw	Fun	ction Result	t 48046 MHz
CF 2.48 GHz	691 p	ts 🔲	Span	3.0 MHz	T2		2.4805730	8 GHz	-14.83 dBm				8



3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

- 1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
- 2 Allow trace to stabilize
- 3 Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup





Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.939	0.626
GFSK	2441	1.003	0.948	0.632
GFSK	2480	1.003	0.939	0.626
8DPSK	2402	1.003	1.252	0.835
8DPSK	2441	1.003	1.257	0.838
8DPSK	2480	1.003	1.265	0.843

3.7.4 Test result of Channel Separation

Worst Plots									
Spectrum							₽		
Ref Level 20.00 dBm	Offset 10.80 dB 🖷	RBW 100 k	Hz				(*)		
🖷 Att 🛛 20 dB SWT 1 ms 🖷 VBW 300 kHz Mode Sweep									
●1Pk View●2Pk View									
			D2	2[2]			-0.01 dB		
10 40			5.0	1[1]		-1.0	2.64 dBm		
10 dBm	12/21		191.	M1		2.480	00360 GHz		
0 dBm		<u></u>		$\sim \lambda$					
		\sim	\sim						
-10 dBm									
-20 dBm		1							
-30 dBm		1		h			V		
-40-d8m-~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Dur.				Low Mary	un			
-50 dBm							~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		
-60 dBm									
-70 dBm									
CF 2.4795 GHz		691	pts		l	Spa	n 3.0 MHz		
			Mea	suring		1/1			



3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

- 1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
- 2 Enable gating and trigger function of spectrum analyzer to measure burst on time.
- 3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.
- 4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
- 5 The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds


3.8.3 Test Setup






3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.43188	320	0.138	0.4
GFSK-DH3	2402	1.68913	160	0.270	0.4
GFSK-DH5	2402	2.95217	106.6	0.315	0.4
8DPSK-DH1	2402	0.46304	320	0.148	0.4
8DPSK-DH3	2402	1.70217	160	0.272	0.4
8DPSK-DH5	2402	2.95725	106.6	0.315	0.4

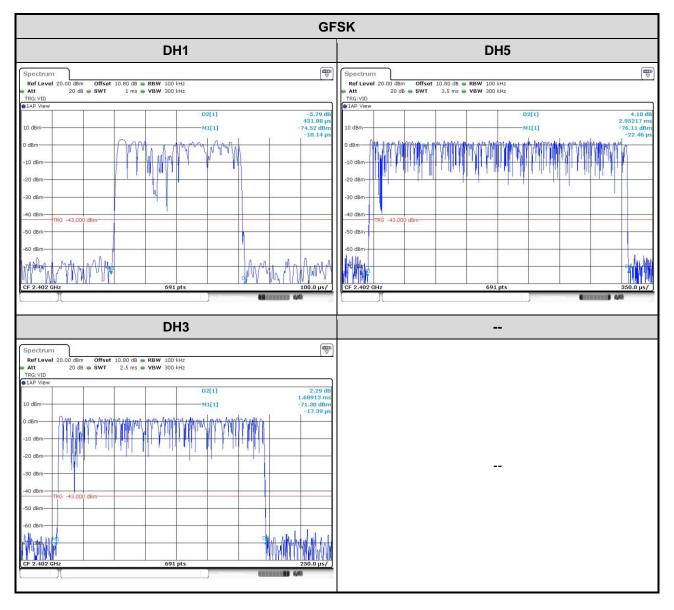



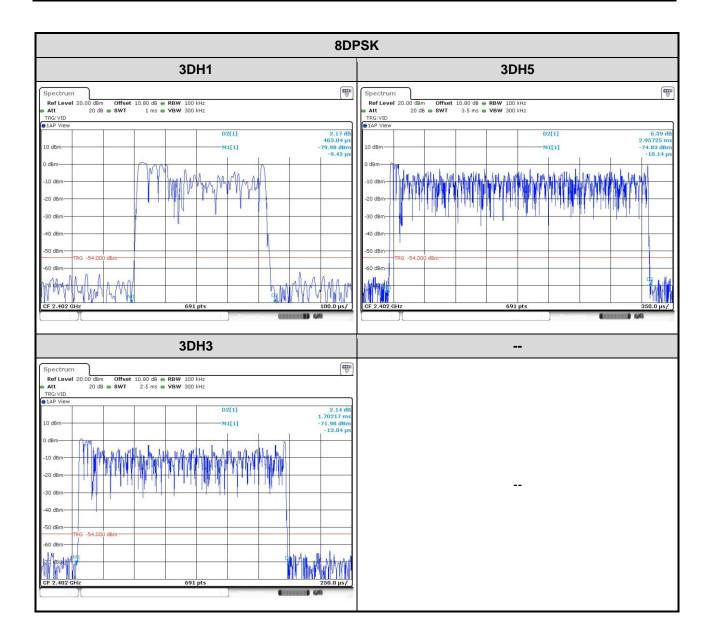



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640 No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

—END—