

FCC C2PC Test Report

FCC ID : SQG-SSD50NBT

Equipment : 802.11abgn 2x2 and Bluetooth 4.0 module

Model No. : SSD50NBT

Brand Name : Laird

Applicant : Laird Connectivity

Address : W66N220 Commerce Court, Cedarburg,

Wisconsin 53012, USA

Standard : 47 CFR FCC Part 15.407

Received Date : Nov. 12, 2019

Tested Date : Nov. 15 ~ Nov. 18, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Cheid/ Assistant Manager Gary Chang / Manager

Testing Laboratory

Page: 1 of 56

Report No.: FR5D1002-02 Report Version: Rev. 01



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Testing Applied Standards	9
1.6	Deviation from Test Standard and Measurement Procedure	9
1.7	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS	12
3.1	Conducted Emissions	12
3.2	Emission Bandwidth	15
3.3	RF Output Power	19
3.4	Peak Power Spectral Density	23
3.5	Transmitter Radiated and Band Edge Emissions	27
3.6	Frequency Stability	54
4	TEST LABORATORY INFORMATION	56



Release Record

Report No.	Version	Description	Issued Date
FR5D1002-02	Rev. 01	Initial issue	Jan. 03, 2020

Report No.: FR5D1002-02 Page: 3 of 56



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.204MHz 60.08 (Margin -3.37dB) - QP	Pass
15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 17160.00MHz	Pass
15.209	Nadiated Liffissions	67.72 (Margin -0.48dB) - PK	F 433
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 21.15	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR5D1002-02 Page: 4 of 56



1 General Description

1.1 Information

This is a Class II Permissive Change report (C2PC).

This report is issued as a supplementary report to original ICC report no. FR5D1002AN. The modification is concerned with following item:

♦ CH144 (5720MHz) & CH142 (5710MHz) are activated by software.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS		
5470-5725	а	5720	144 [1]	1 2	6-54 Mbps		
5470-5725	n (HT20)	5720	144 [1]	1 2 2	MCS 0-7 MCS 0-7 MCS 8-15		
5470-5725	n (HT40)	5710	142 [1]	1 2 2	MCS 0-7 MCS 0-7 MCS 8-15		

Note 1: RF output power specifies that Maximum Conducted Output Power.

Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

Note 3: The device supports TX antenna diversity function. The conducted power of single chain is same for 1TX and 2TX operating mode. Therefore, Ant1+Ant2 configuration is chosen for final testing.

Note 4: S/W version: WB50_RDVK_plus_Ch144.

1.1.2 Antenna Details

Ant.	Model	Туре	Connector	Operatii	ng Frequen	cies (MHz) /	Antenna Ga	ain (dBi)
No.	Woder	турс	Connector	2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	Laird MAF94051	Dipole	RP-SMA	2.1	2.4	2.6	3.4	3.4
2	Laird NanoBlade-IP04	PCB Dipole	IPEX MHF	2	3.9	3.9	4	4
3	Laird MAF95310 Mini NanoBlade Flex	PCB Dipole	IPEX MHF	2.79	3.38	3.38	3.38	3.38
4	Laird NanoBlue-IP04	PCB Dipole	IPEX MHF	2				
5	Ethertronics WLAN_1000146	Isolated Magnetic Dipole	IPEX MHF	2.5	3.5	3.5	3.5	3.5

Note: Ant. No. 1, 2 & 5 were for 5G final test.

Report No.: FR5D1002-02 Page: 5 of 56



1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type 3.3Vdc from host	
------------------------------------	--

1.1.4 Accessories

N/A

1.1.5 Channel List

802.11 a	a / HT20	НТ	⁻ 40
Channel Frequency(MHz)		Channel	Frequency(MHz)
144	5720	142	5710

1.1.6 Test Tool and Duty Cycle

Test Tool	ART2 GUI, V2.3					
	Mode	Duty cycle (%)	Duty factor (dB)			
Duty Cycle and Duty Footer	11a	99.16%	0.04			
Duty Cycle and Duty Factor	HT20	99.10%	0.04			
	HT40	98.05%	0.09			

1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11a	5720	20
HT20	5720	20
HT40	5710	21

Report No.: FR5D1002-02 Page: 6 of 56




1.2 Local Support Equipment List

	Support Equipment List								
No. Equipment Brand Model S/N FCC ID Signal cable / Le									
1	DC Power Supply	GW INSTEK	GPC-3060D	EM884797					
2	Notebook	DELL	Latitude E6430	9ZFB4X1	DoC				
3	Fixture								

Note: Fixture is provided by applicant.

1.3 Test Setup Chart

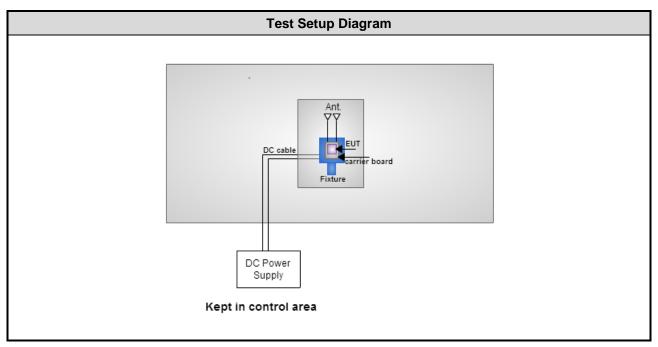

Note: The support notebook was disconnected from EUT and removed from test table when EUT is set to transmit continuously.

Report No.: FR5D1002-02 Page: 7 of 56



1.4 The Equipment List

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)						
Instrument Manufacturer Model No. Serial No. Calibration Date Calibration Until								
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020			
LISN	R&S	ENV216	101579	Mar. 08, 2019	Mar. 07, 2020			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020			
Measurement Software AUDIX e3 6.120210k NA NA								
Note: Calibration Interval of instruments listed above is one year.								

Test Item	Radiated Emission	Radiated Emission						
Test Site	966 chamber 3 / (03C	:H03-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020			
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 17, 2019	Apr. 16, 2020			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 07, 2019	Jan. 06, 2020			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Dec. 22, 2018	Dec. 21, 2019			
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020			
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020			
Preamplifier	EMC	EMC02325	980187	Aug. 14, 2019	Aug. 13, 2020			
Preamplifier	Agilent	83017A	MY53270014	Aug. 07, 2019	Aug. 06, 2020			
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020			
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/ 4	Sep. 27, 2019	Sep. 26, 2020			
RF cable-8M	EMC	EMC104-SM-SM-80 00	181107	Sep. 27, 2019	Sep. 26, 2020			
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 27, 2019	Sep. 26, 2020			
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Sep. 27, 2019	Sep. 26, 2020			
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Sep. 27, 2019	Sep. 26, 2020			
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Sep. 27, 2019	Sep. 26, 2020			
Measurement Software	AUDIX	e3	6.120210g	NA	NA			
Note: Calibration Inter	rval of instruments liste	d above is one year.						

Report No.: FR5D1002-02 Page: 8 of 56



Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 05, 2018	Dec. 04, 2019
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
Measurement Software	ICC	SENSE-15407_NII	V5.10	NA	NA

1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.6 Deviation from Test Standard and Measurement Procedure

None

Report No.: FR5D1002-02 Page: 9 of 56



1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.130 Hz			
Conducted power	±0.808 dB			
Frequency error	±1x10 ⁻⁹			
Power density	±0.583 dB			
Conducted emission	±2.715 dB			
AC conducted emission	±2.92 dB			
Radiated emission ≤ 1GHz	±3.96 dB			
Radiated emission > 1GHz	±4.51 dB			
Time	±0.1%			
Temperature	±0.4 °C			

Report No.: FR5D1002-02 Page: 10 of 56



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 68%	Akun Chung
Radiated Emissions	03CH03-WS	22°C / 61-65%	Roger Lu
RF Conducted	TH01-WS	21°C / 64%	Brad Wu

FCC Designation No.: TW0009FCC site registration No.: 207696

➤ ISED#: 10807A

> CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	HT40	5710	MCS 0	2
Radiated Emissions ≤1GHz	HT40	5710	MCS 0	1, 2, 3
	11a	5720	6 Mbps	
Radiated Emissions >1GHz	HT20	5720	MCS 0	1, 2, 3
	HT40	5710	MCS 0	
RF Output Power	11a	5720	6 Mbps	
Emission Bandwidth	HT20	5720	MCS 0	2
Peak Power Spectral Density	HT40	5710	MCS 0	
Frequency Stability	Un-modulation	5720		

NOTE:

- 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.
- 2. The following antennas are used for final testing for this module: (See item 1.1.2 for more details.)

1) Configuration 1 : Dipole antenna

2) Configuration 2 : PCB Dipole antenna

3) Configuration 3: Isolated Magnetic Dipole antenna

Report No.: FR5D1002-02 Page: 11 of 56



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit						
Frequency Emission (MHz) Quasi-Peak Average						
0.15-0.5 66 - 56 * 56 - 46 *						
0.5-5 56 46						
5-30 60 50						
Note 1: * Decreases with the logarithm of the frequency.						

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup

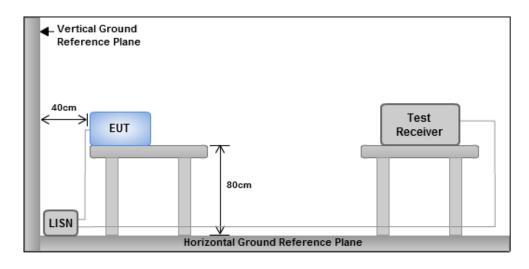


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR5D1002-02 Page: 12 of 56




3.1.4 Test Result of Conducted Emissions

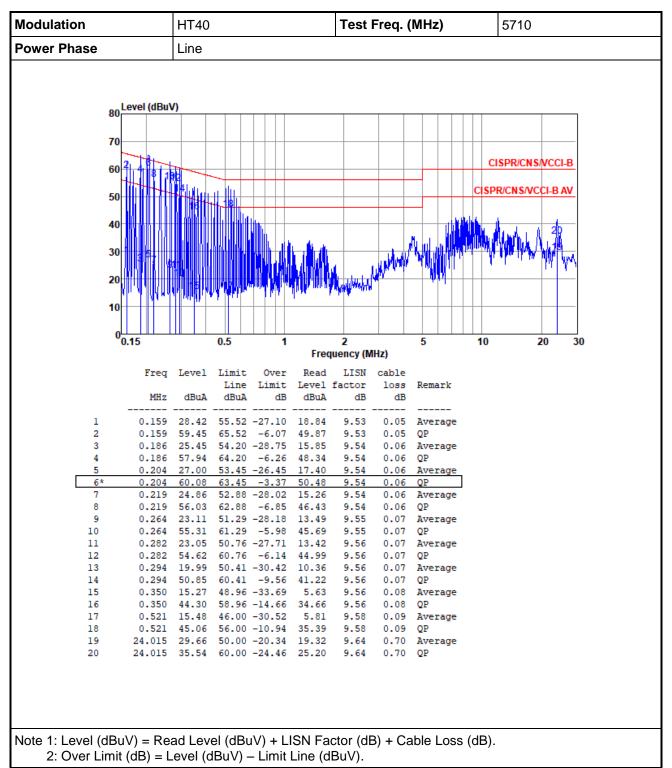

Report No.: FR5D1002-02 Page: 13 of 56



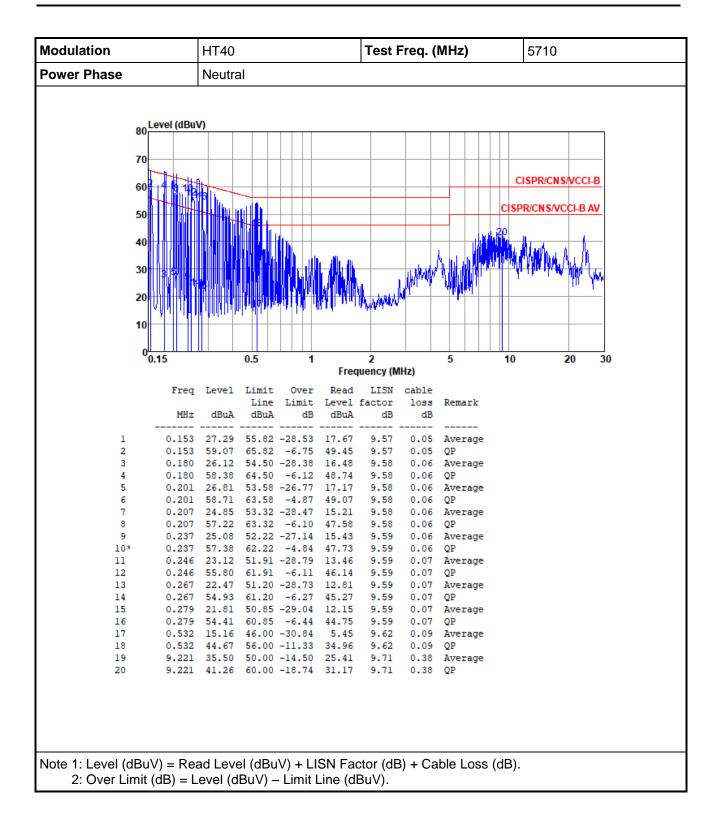

Report No.: FR5D1002-02 Page: 14 of 56



3.2 Emission Bandwidth

3.2.1 Test Procedures


26dB Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW, Detector = Peak.
- 3. Trace mode = max hold.
- 4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.

Occupied Bandwidth

- 1. Set RBW = 1 % to 5 % of the OBW.
- 2. Set VBW ≥ 3 RBW.
- 3. Sample detection and single sweep mode shall be used.
- 4. Use the 99 % power bandwidth function of the instrument.

3.2.2 Test Setup



Report No.: FR5D1002-02 Page: 15 of 56



3.2.3 Test Result of Emission Bandwidth

Summary

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.826M	13.719M	13M7D1D	17.261M	13.372M
802.11n HT20_Nss1,(MCS0)_2TX	19.522M	14.11M	14M1D1D	16.652M	13.98M
802.11n HT40_Nss1,(MCS0)_2TX	48.899M	33.227M	33M2D1D	40.986M	32.923M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	3.072M	9.551M	9M55D1D	3.072M	7.641M
802.11n HT20_Nss1,(MCS0)_2TX	3.71M	8.278M	8M28D1D	3.652M	7.41M
802.11n HT40_Nss1,(MCS0)_2TX	3.072M	22.981M	23M0D1D	3.072M	21.592M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

Min-OBW = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit	Port 1-N dB	Port 1-OBW	Port 2-N dB	Port 2-OBW
		(Hz)	(Hz)	(Hz)	(Hz)	(Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	17.261M	13.372M	19.826M	13.719M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.072M	7.641M	3.072M	9.551M
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	ı	-
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.652M	13.98M	19.522M	14.11M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.71M	7.41M	3.652M	8.278M
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	40.986M	32.923M	48.899M	33.227M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.072M	21.592M	3.072M	22.981M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band

Port X-OBW = Port X 99% occupied bandwidth;


Report No.: FR5D1002-02 Page: 16 of 56



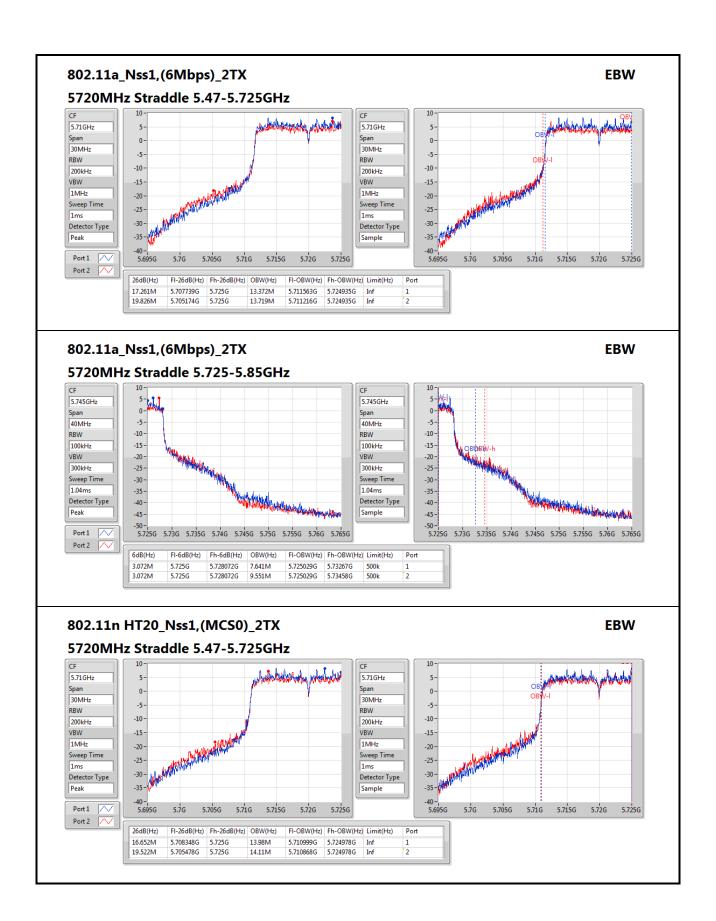

Report No.: FR5D1002-02 Page: 17 of 56



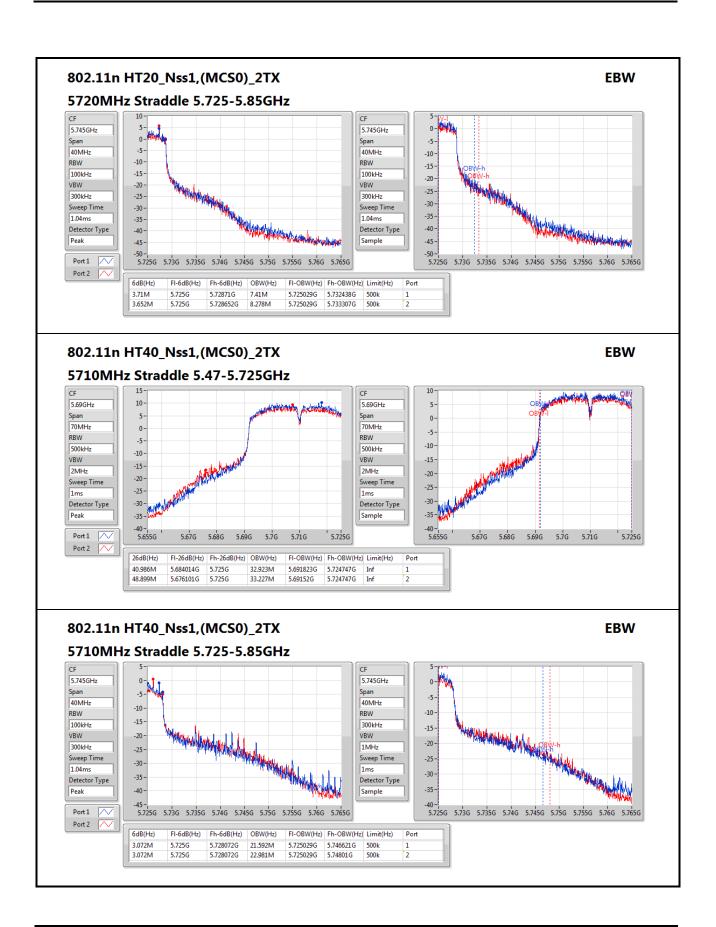

Report No.: FR5D1002-02 Page: 18 of 56



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Frequency Band (MHz)		Limit				
\boxtimes	5470 ~ 5725	Conducted Power: 250mW or 11dBm+10 log B				
		Conducted Power: 1 W				
Note	Note: "B" is the 26dB emission bandwidth in MHz.					

3.3.2 Test Procedures


Method PM-G (Measurement using a gated RF average power meter)

Measurements is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

Spectrum analyzer (For channel that extends across the 5.725 GHz boundary)

- 1. Set RBW = 1MHz, VBW = 3MHz, Sweep time = Auto, Detector = RMS.
- 2. Trace average at least 100 traces in power averaging mode.
- 3. Compute power by integrating the spectrum across the 26 dB EBW.
- 4. Add 10 log(1/X, X:duty cycle) if duty cycle is <98%).

3.3.3 Test Setup

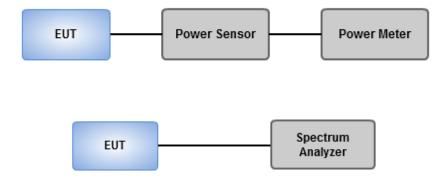

Report No.: FR5D1002-02 Page: 19 of 56



3.3.4 Test Result of Maximum Conducted Output Power

Summary

Mode	Total Power	Total Power	EIRP	EIRP
	(dBm)	(W)	(dBm)	(W)
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.35	0.08610	23.35	0.21627
802.11n HT20_Nss1,(MCS0)_2TX	19.41	0.08730	23.41	0.21928
802.11n HT40_Nss1,(MCS0)_2TX	21.15	0.13032	25.15	0.32734
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	12.58	0.01811	16.58	0.04550
802.11n HT20_Nss1,(MCS0)_2TX	13.28	0.02128	17.28	0.05346
802.11n HT40_Nss1,(MCS0)_2TX	7.68	0.00586	11.68	0.01472


Result

Mode	Result	DG	Port 1	Port 2	Total Power	Power Limit	EIRP	EIRP Limit
		(dBi)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	4.00	16.97	15.61	19.35	23.37	23.35	29.37
5720MHz Straddle 5.725-5.85GHz	Pass	4.00	10.19	8.85	12.58	30.00	16.58	36.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	4.00	16.84	15.91	19.41	23.21	23.41	29.21
5720MHz Straddle 5.725-5.85GHz	Pass	4.00	10.93	9.50	13.28	30.00	17.28	36.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	4.00	18.47	17.78	21.15	24.00	25.15	30.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.00	5.26	3.98	7.68	30.00	11.68	36.00

DG = Directional Gain;**Port X** = Port X output power


Report No.: FR5D1002-02 Page: 20 of 56



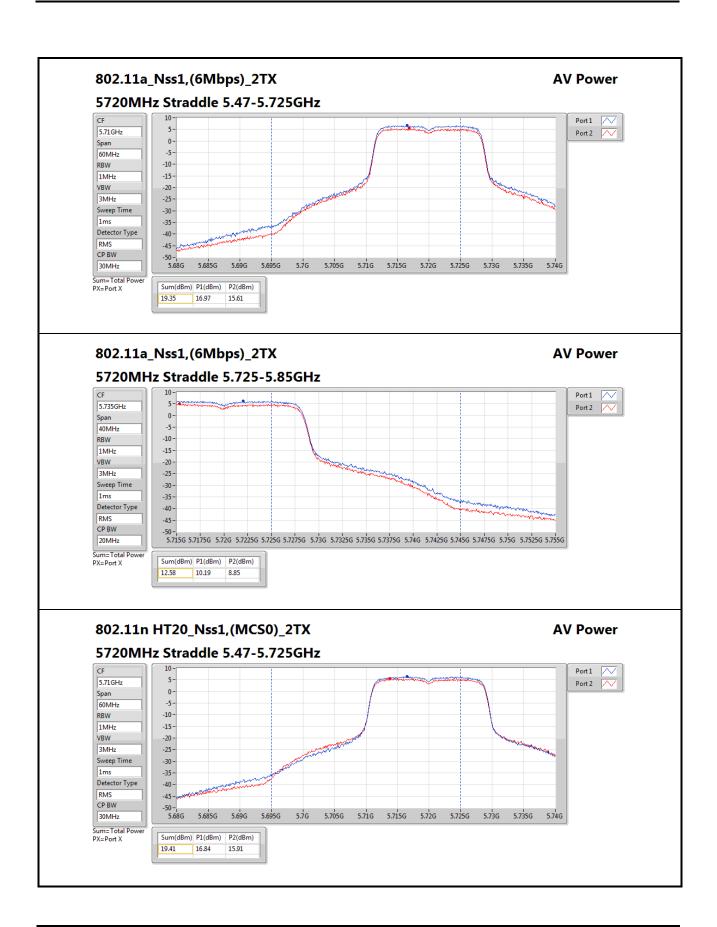

Report No.: FR5D1002-02 Page: 21 of 56



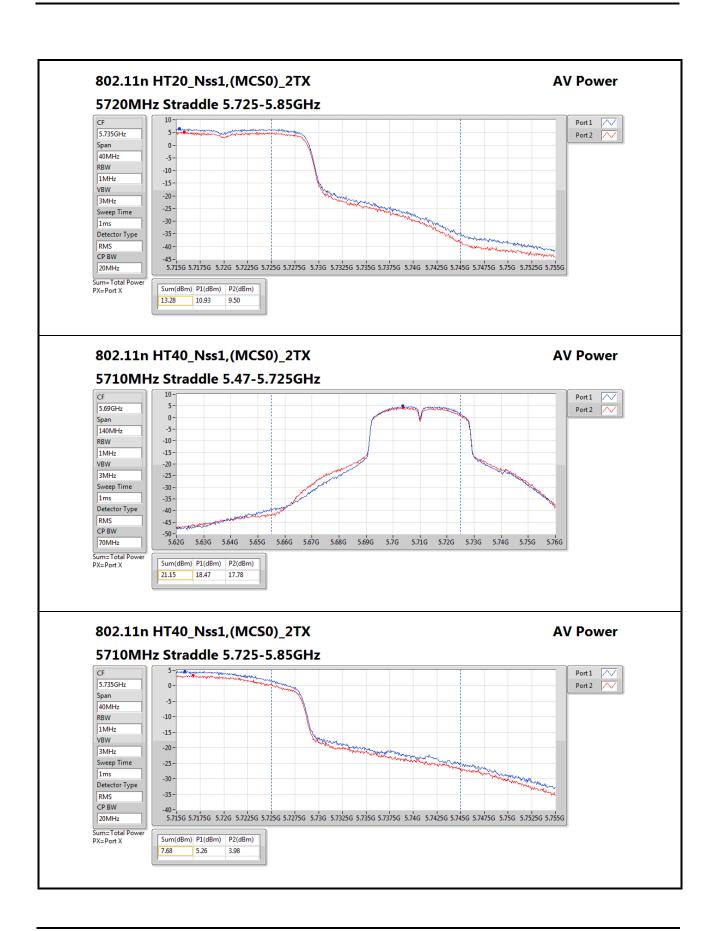

Report No.: FR5D1002-02 Page: 22 of 56



3.4 Peak Power Spectral Density

3.4.1 Limit of Peak Power Spectral Density

Frequency Band (MHz)		Limit
\boxtimes	5470 ~ 5725	11 dBm / MHz
\boxtimes	5725 ~ 5850	30 dBm / 500 kHz

3.4.2 Test Procedures

For 5470 ~ 5725 MHz

Duty cycle ≥ 98 %

- 1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
- 2. Trace average 100 traces.
- 3. Use the peak marker function to determine the maximum amplitude level.

Duty cycle < 98 %

- 1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
- 2. Set sweep time ≥ 10 * (number of points in sweep) * (total on/off period of the transmitted signal).
- 3. Perform a single sweep.
- 4. Use the peak marker function to determine the maximum amplitude level.
- 5. Add $10 \log(1/x)$, where x is the duty cycle.

For 5725 ~ 5850 MHz


Duty cycle ≥ 98 %

- 1. Set RBW = 500 kHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
- 2. Trace average 100 traces.
- 3. Use the peak marker function to determine the maximum amplitude level.

Duty cycle < 98 %

- 1. Set RBW = 500 kHz, VBW = 3 MHz, Detector = RMS.
- 2. Set sweep time ≥ 10 * (number of points in sweep) * (total on/off period of the transmitted signal).
- 3. Perform a single sweep.
- 4. Use the peak marker function to determine the maximum amplitude level.
- 5. Add 10 log(1/x), where x is the duty cycle.

3.4.3 Test Setup



Report No.: FR5D1002-02 Page: 23 of 56



3.4.4 Test Result of Peak Power Spectral Density

Summary

Summary		
Mode	PD	EIRP PD
	(dBm/RBW)	(dBm/RBW)
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	7.93	14.94
802.11n HT20_Nss1,(MCS0)_2TX	7.37	14.38
802.11n HT40_Nss1,(MCS0)_2TX	5.93	12.94
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	5.79	12.80
802.11n HT20_Nss1,(MCS0)_2TX	5.47	12.48
802.11n HT40_Nss1,(MCS0)_2TX	0.77	7.78

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG	Port 1	Port 2	PD	PD Limit	EIRP PD	EIRP PD Limit
		(dBi)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	7.01	5.46	4.58	7.93	9.99	14.94	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	7.01	3.42	2.37	5.79	28.99	12.80	36.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5720MHz Straddle 5.47-5.725GHz	Pass	7.01	4.85	4.02	7.37	9.99	14.38	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	7.01	3.09	1.81	5.47	28.99	12.48	36.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5710MHz Straddle 5.47-5.725GHz	Pass	7.01	3.39	2.60	5.93	9.99	12.94	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	7.01	-1.80	-2.48	0.77	28.99	7.78	36.00

 $[\]textbf{DG} = \text{Directional Gain}; \ \textbf{RBW} = 500 \text{kHz for } 5.725\text{-}5.85 \text{GHz band} \ / \ 1 \text{MHz for other band};$

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port Xpower density;


Directional gain = 4 + 10 * log(2/1) = 7.01 dBi > 6 dBi

For $5.47 \sim 5.725$ GHz, PD limit shall be reduced to 11 dBm – (7.01 dBi – 6 dBi) = 9.99 dBm

For $5.725 \sim 5.85$ GHz, PD limit shall be reduced to 30 dBm - (7.01 dBi - 6 dBi) = 28.99 dBm


Report No.: FR5D1002-02 Page: 24 of 56



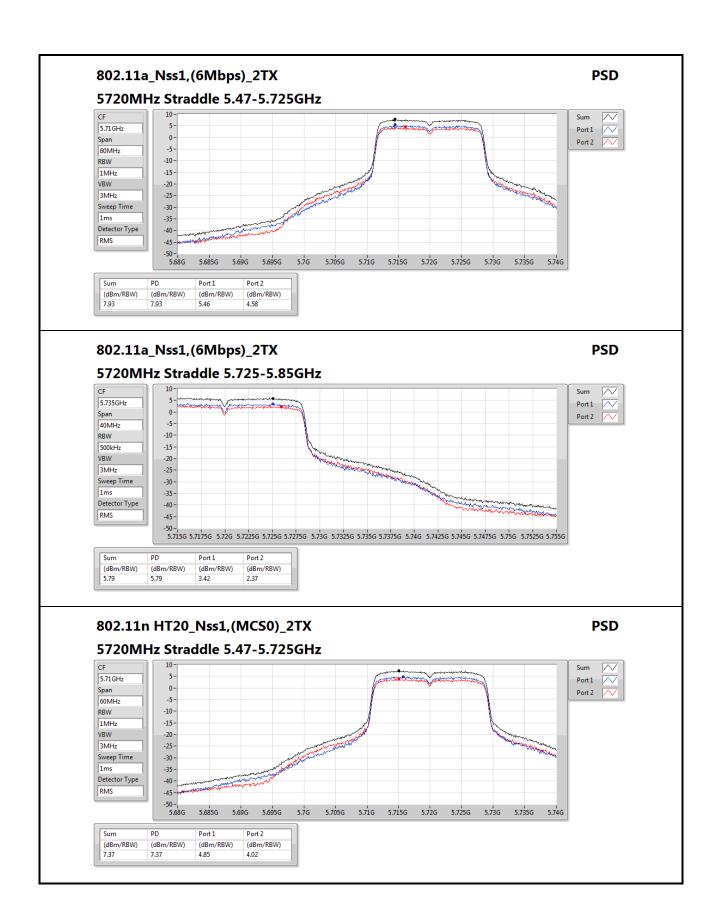

Report No.: FR5D1002-02 Page: 25 of 56



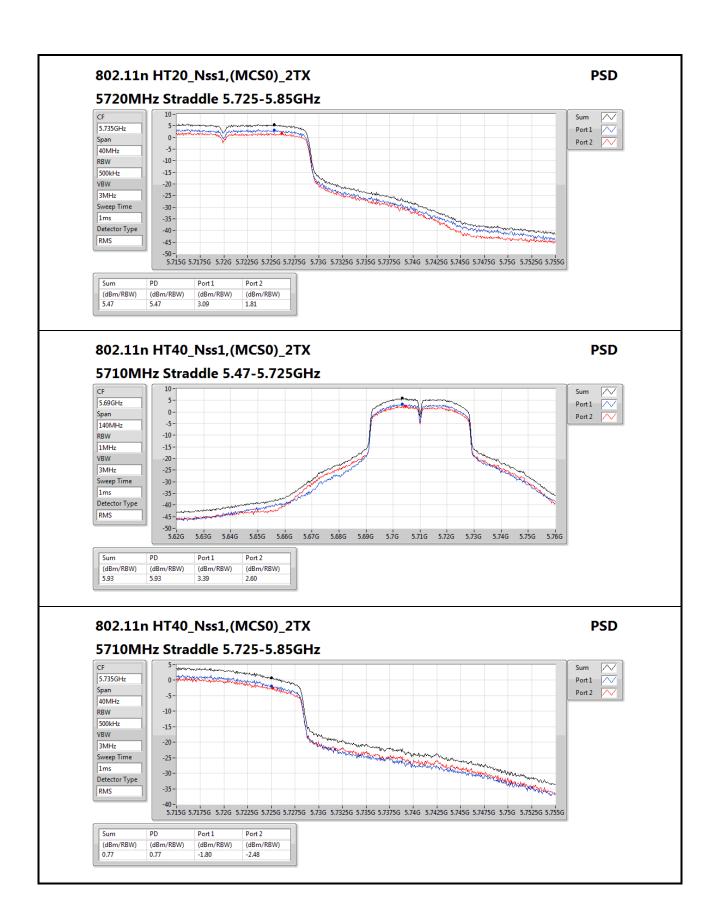

Report No.: FR5D1002-02 Page: 26 of 56



3.5 Transmitter Radiated and Band Edge Emissions

3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit									
Frequency Range (MHz) Field Strength (uV/m)		Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit					
Operating Band	Limit				
5.47 - 5.725 GHz	e.i.r.p27 dBm [68.2 dBuV/m@3m]				
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Report No.: FR5D1002-02 Page: 27 of 56



3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR5D1002-02 Page: 28 of 56



3.5.3 Test Setup

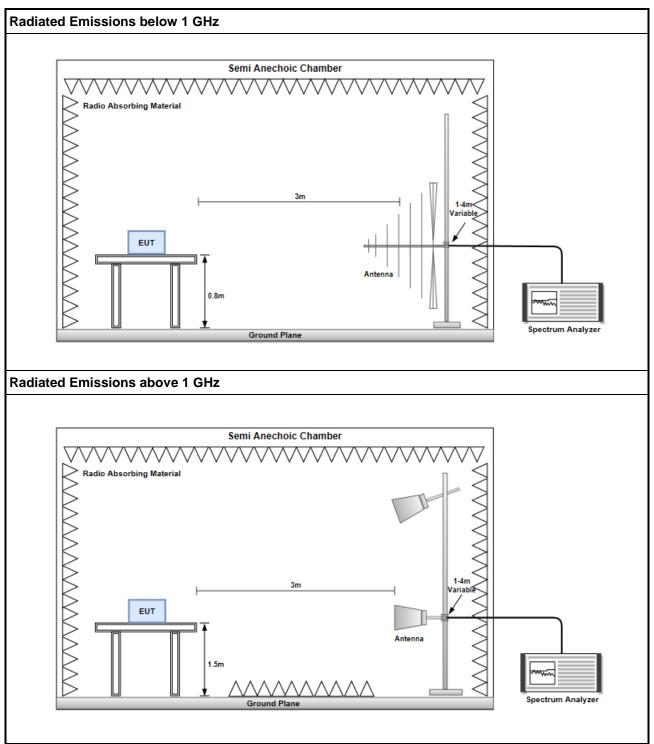


Report No.: FR5D1002-02 Page: 29 of 56



Test Configuration 1: Dipole antenna

3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

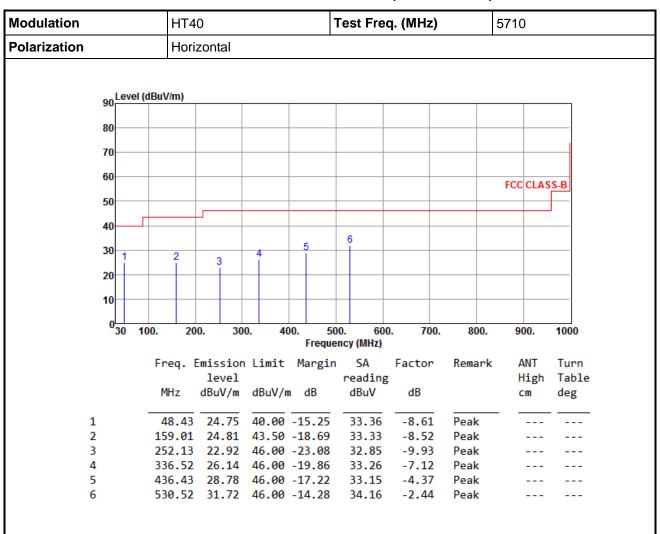

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5D1002-02 Page: 30 of 56



Modulation	HT40		Test Freq. (MHz)			5710	5710		
Polarization	Vertical								
90 Level (dBuV/m)									
90									
80			+						

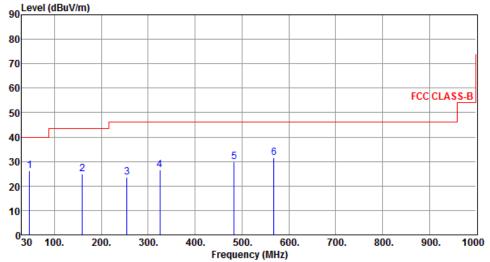

	Freq.	Emission level	Limit	Margin	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	46.49	26.09	40.00	-13.91	34.69	-8.60	Peak		
2	159.01	24.96	43.50	-18.54	33.48	-8.52	Peak		
3	255.04	23.66	46.00	-22.34	33.58	-9.92	Peak		
4	324.88	26.42	46.00	-19.58	33.81	-7.39	Peak		
5	482.99	29.81	46.00	-16.19	33.23	-3.42	Peak		
6	568.35	31.65	46.00	-14.35	33.38	-1.73	Peak		

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5D1002-02 Page: 31 of 56



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

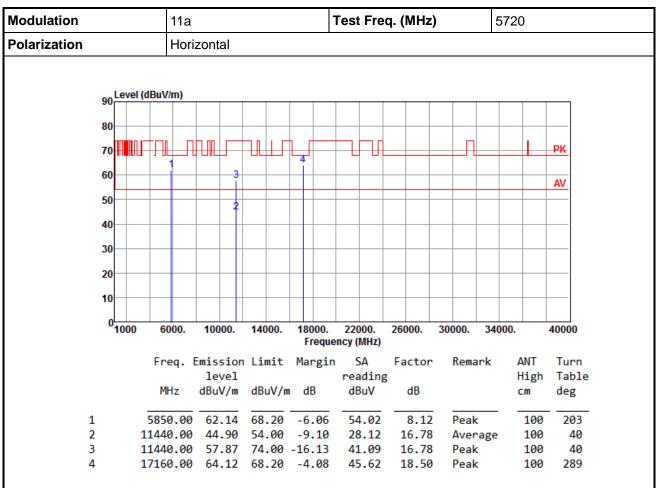


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 32 of 56



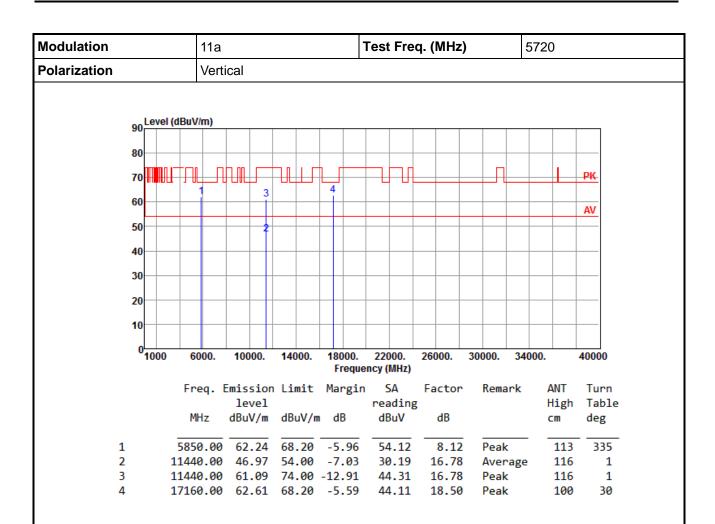

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 33 of 56



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

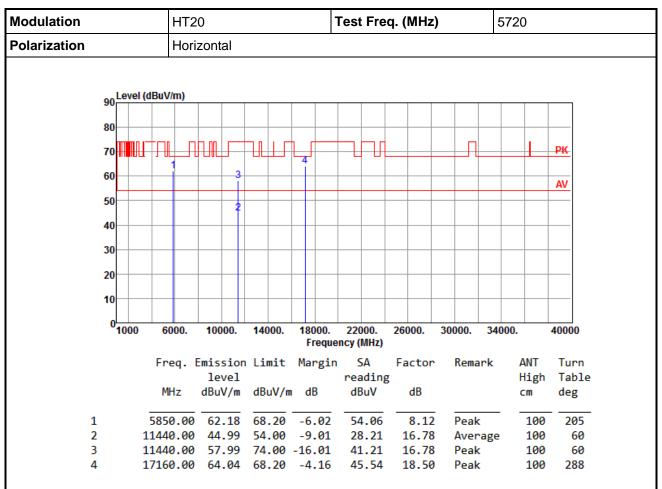


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 34 of 56



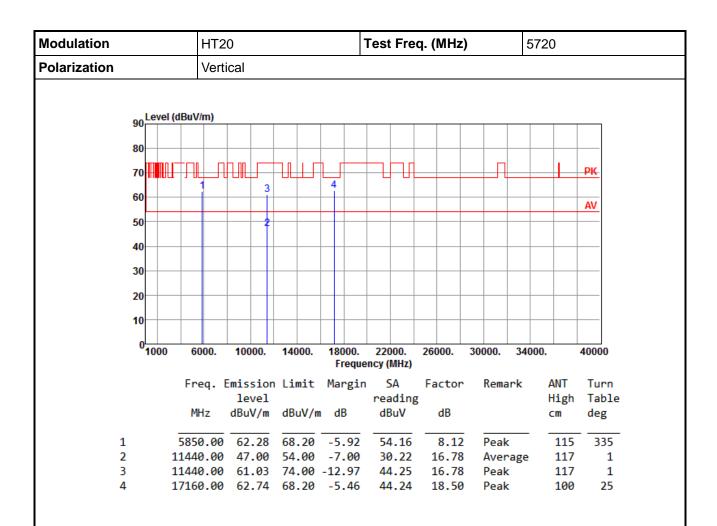

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 35 of 56



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

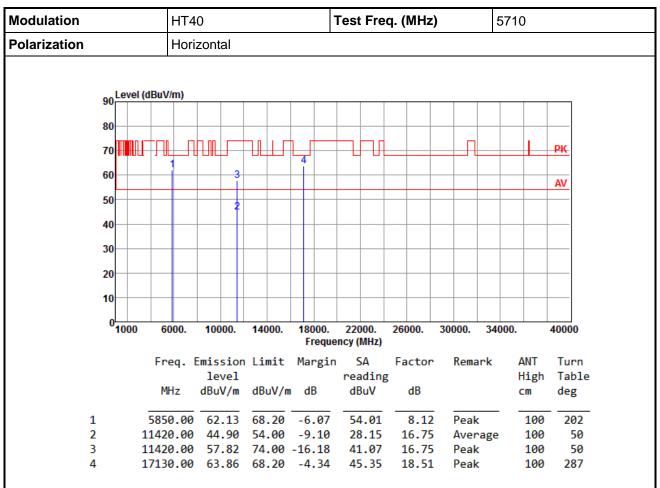


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 36 of 56



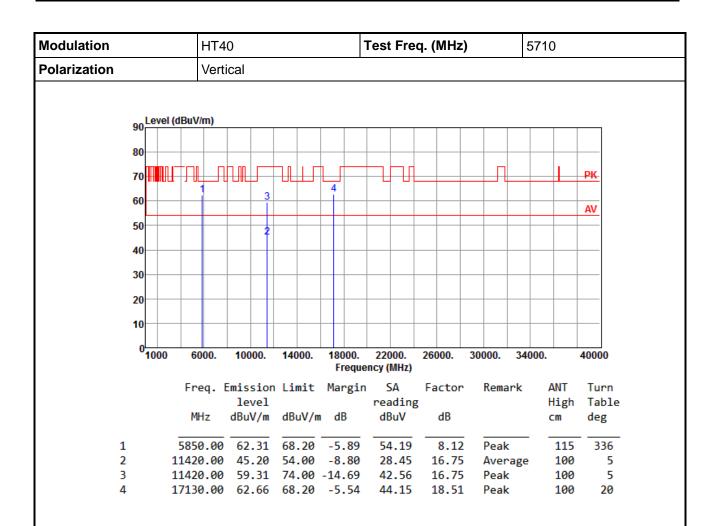

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 37 of 56



Test Configuration 2 : PCB Dipole antenna

3.5.8 Transmitter Radiated Unwanted Emissions (Below 1GHz)

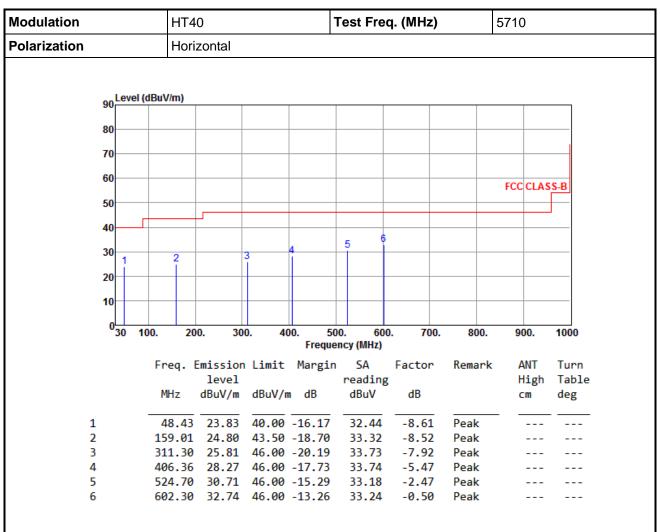

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5D1002-02 Page: 38 of 56



3

4

5

6

Modulation	_	_	HT4	0			Test Fre	q. (MHz)		5710	
Polarization			Verti	ical							
		evel (dBuV/m)								
	90										
	80										
	70										
	-										
	60									FCC CLA	SS-B
	50										_
	40										
	30-					4	5 6				
		1	2	3	}						
	20										
	10										
	03										
	3	0 10	00. 20	0. 300). 40		00. 60 ency (MHz)	0. 700.	800.	900.	1000
			Frea. E	mission	Limit			Factor	Remark	ANT	Turn
				level			reading			High	
			MHz	dBuV/m	dBuV/n	n dB	dBuV	dB		cm	deg
1	L		51.34	24.44	40.00	-15.56	33.10	-8.66	Peak		
2				24.40				-8.75	Peak		

-8.09

-4.16

-2.89

-1.28

33.10

Peak

Peak

Peak

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

307.42 25.04 46.00 -20.96 33.13

442.25 29.02 46.00 -16.98 33.18


506.27 30.97 46.00 -15.03 33.86

583.87 31.82 46.00 -14.18

Report No.: FR5D1002-02 Page: 39 of 56



3.5.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

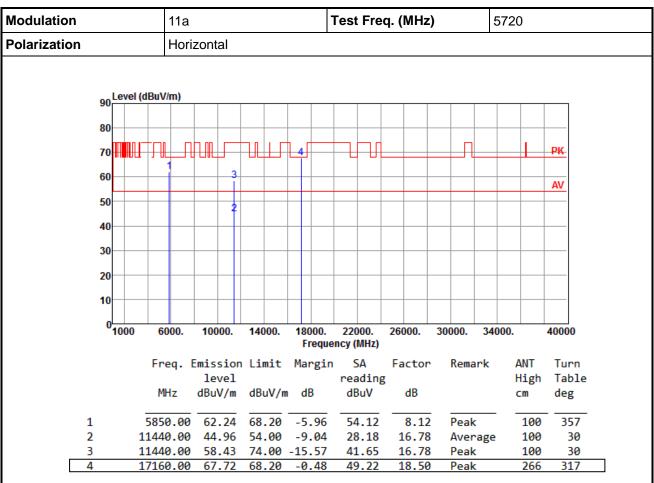


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 40 of 56



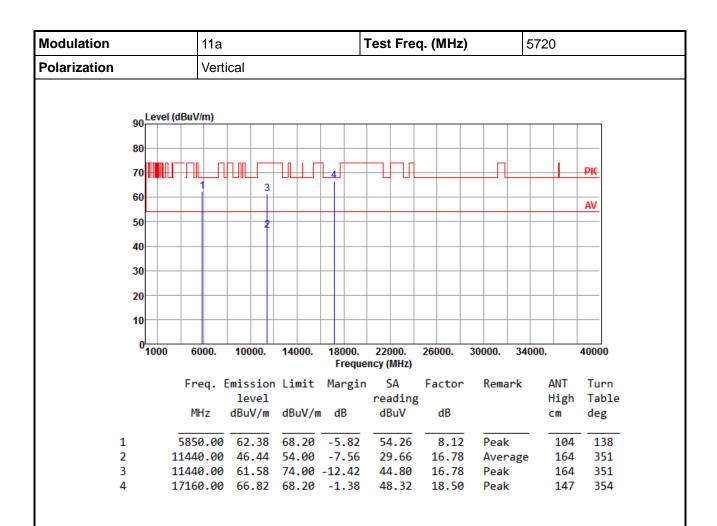


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 41 of 56



3.5.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

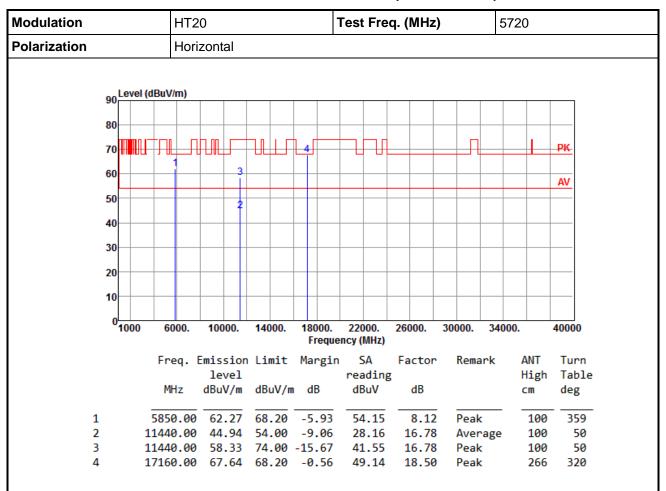


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 42 of 56



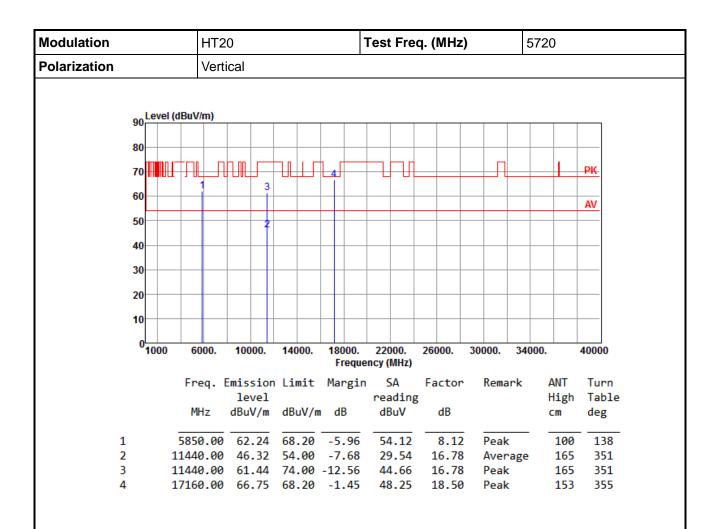


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 43 of 56



3.5.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

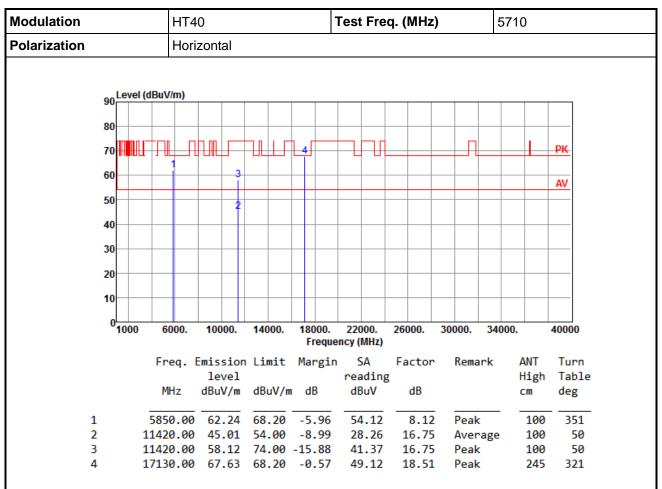


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 44 of 56



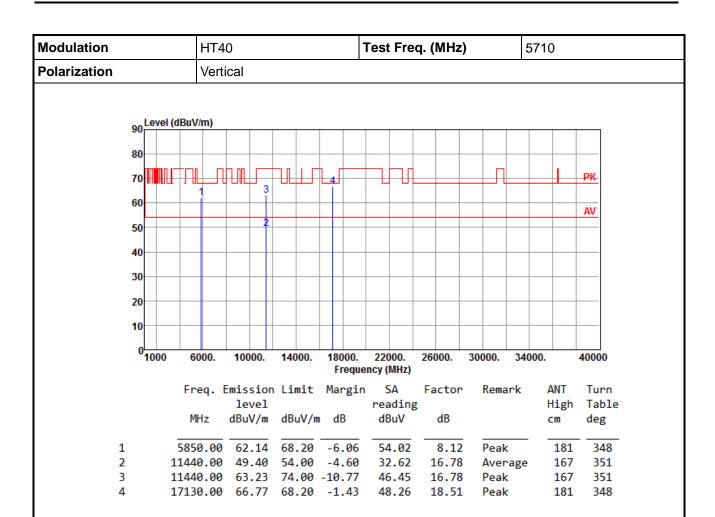

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 45 of 56



Test Configuration 3 : Isolated Magnetic Dipole antenna

3.5.12 Transmitter Radiated Unwanted Emissions (Below 1GHz)

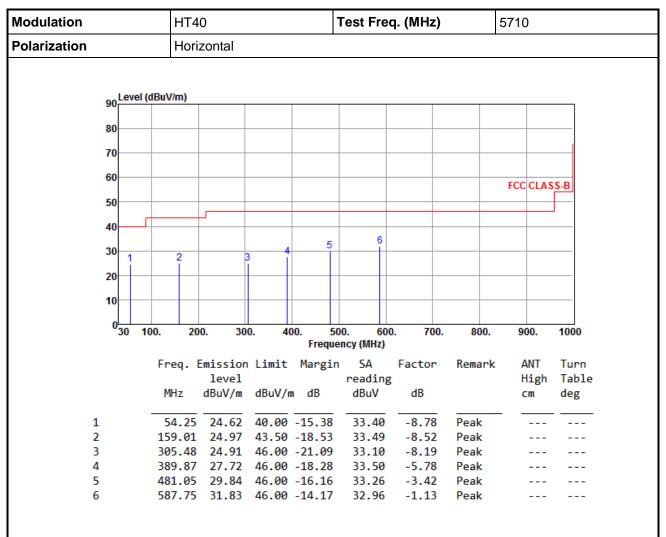

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5D1002-02 Page: 46 of 56



Modulation	HT40	Test Freq. (MHz)	5710
Polarization	Vertical		

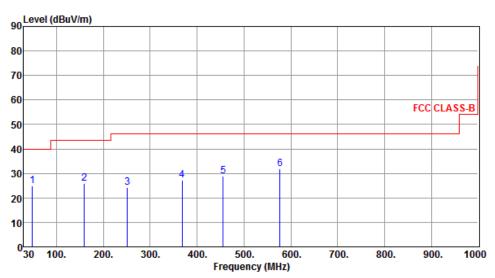

	Freq.	Emission level dBuV/m		J	SA reading dBuV		Remark	ANT High	Turn Table
	MITZ	ubuv/III	ubuv/III	ub	ubuv	ub		cm	deg
1	48.43	24.82	40.00	-15.18	33.43	-8.61	Peak		
2	159.01	25.87	43.50	-17.63	34.39	-8.52	Peak		
3	251.16	24.26	46.00	-21.74	34.20	-9.94	Peak		
4	368.53	27.11	46.00	-18.89	33.61	-6.50	Peak		
5	455.83	28.78	46.00	-17.22	32.59	-3.81	Peak		
6	577.08	31.94	46.00	-14.06	33.44	-1.50	Peak		


*Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR5D1002-02 Page: 47 of 56



3.5.13 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

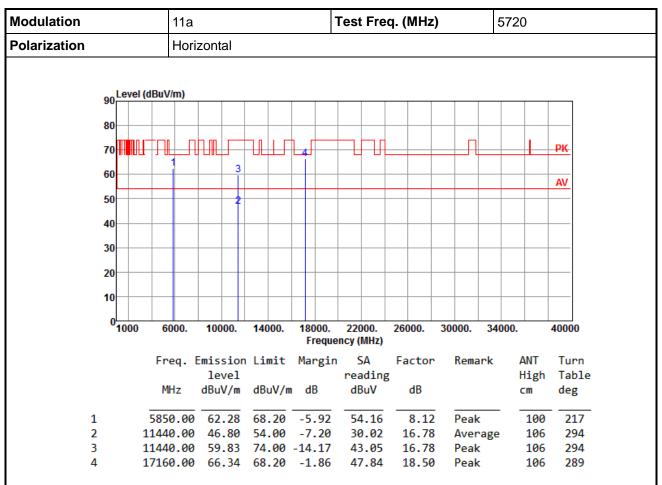


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 48 of 56



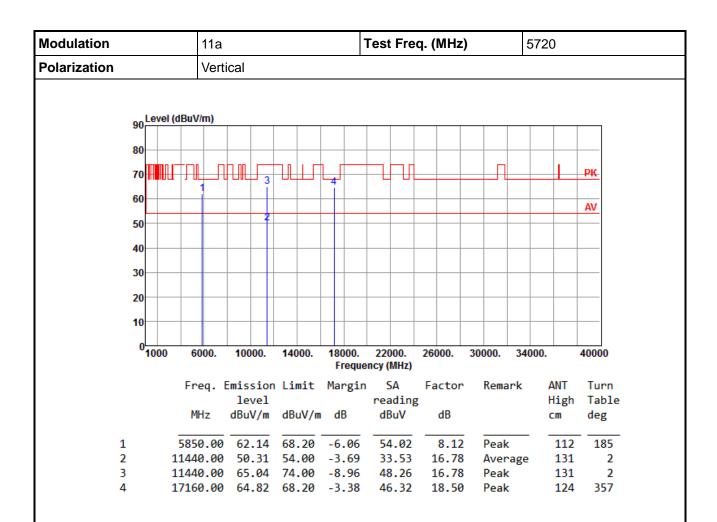


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 49 of 56



3.5.14 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

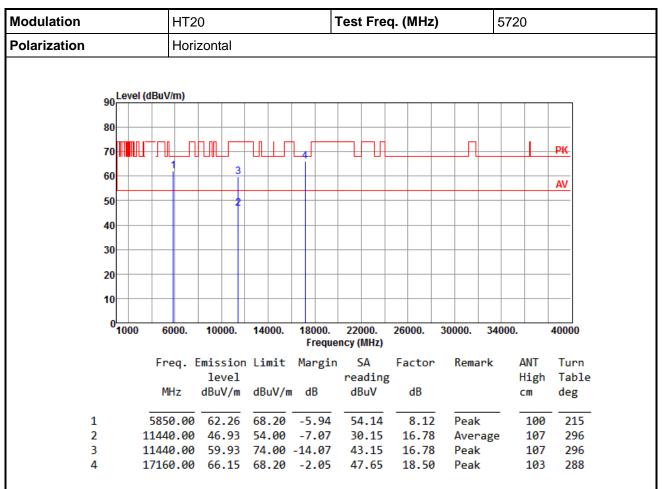


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 50 of 56



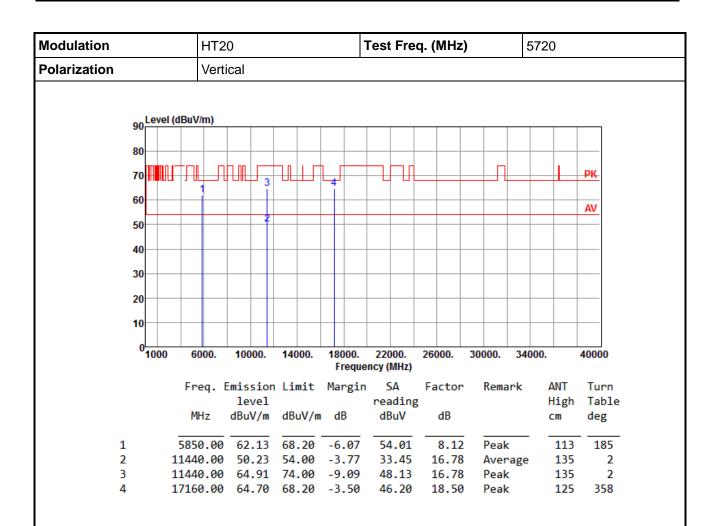


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 51 of 56



3.5.15 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

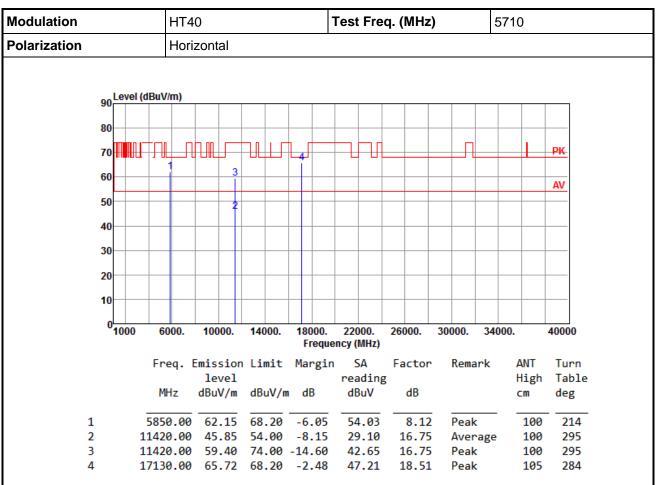


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page : 52 of 56



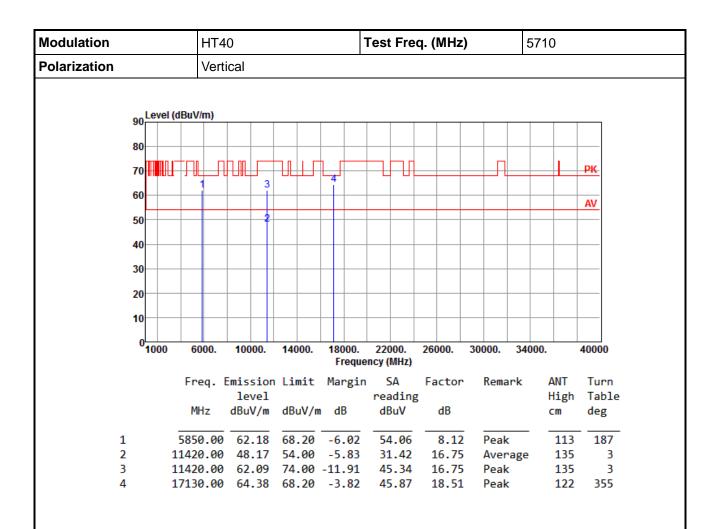

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR5D1002-02 Page: 53 of 56



3.6 Frequency Stability


3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2 Test Procedures

- 1. The EUT is installed in an environment test chamber with external power source.
- Set the chamber to operate at 20 centigrade and external power source to output at nominal voltage of EUT.
- 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
- 4. When temperature is stabled, measure the frequency stability.
- 5. The test shall be performed under normal and extreme condition for temperature and voltage.

3.6.3 Test Setup



Report No.: FR5D1002-02 Page: 54 of 56



3.6.4 Test Result of Frequency Stability

Frequency: 5720 MHz	Frequency Drift (ppm)								
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes					
T20°CVmax	-0.09	0.13	-0.24	0.23					
T20°CVmin	0.14	0.40	0.53	0.05					
T85°CVnom	-0.25	-0.38	0.08	-0.19					
T80°CVnom	0.30	0.46	0.08	0.61					
T70°CVnom	0.63	0.93	0.85	1.22					
T60°CVnom	-0.75	-0.39	-0.08	-0.86					
T50CVnom	0.21	-0.19	0.41	0.20					
T40°CVnom	-0.24	-0.58	0.06	0.58					
T30°CVnom	-0.74	-1.05	-0.71	-0.64					
T20°CVnom	0.14	0.21	0.32	0.09					
T10°CVnom	-2.95	-3.13	-3.04	-2.62					
T0°CVnom	-4.46	-4.78	-4.54	-4.08					
T-10°CVnom	-2.19	-2.67	-1.93	-2.13					
T-20°CVnom	-6.31	-6.36	-6.08	-6.26					
T-30°CVnom	-8.80	-8.68	-8.77	-9.16					
T-40°CVnom	-8.25	-7.95	-7.95	-8.46					
Vnom [Vdc]: 3.3		Vmax [Vdc]: 3.795	Vmin [Vdc]: 2.805						
Tnom [°C]: 20		Tmax [°C]: 85	Tmin [°C]: -40						

Report No.: FR5D1002-02 Page: 55 of 56



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640 No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==

Report No.: FR5D1002-02 Page : 56 of 56