**CETECOM™****CETECOM ICT Services**  
consulting - testing - certification >>>

## TEST REPORT

Test report no.: 1-0438/15-01-05-B

Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

### Testing laboratory

**CETECOM ICT Services GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

### Applicant

**peiker acustic GmbH & Co. KG**

Max-Planck Str. 28-32

61381 Friedrichsdorf / GERMANY

Phone: -/-

Fax: +49 6172-767-220

Contact: Philippe Seguret

e-mail: [philippe.seguret@peiker.de](mailto:philippe.seguret@peiker.de)

Phone: +49 6172 767- 1754

### Manufacturer

**peiker acustic GmbH & Co. KG**

Max-Planck Str. 28-32

61381 Friedrichsdorf / GERMANY

### Test standard/s

47 CFR Part 27

Title 47 of the Code of Federal Regulations; Chapter I; Part 27 - Miscellaneous wireless communications services

RSS - 199 Issue 2

Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** NAD Module**Model name:** V1140-104-1**FCC ID:** QWY-V1140-104-1

Frequency: LTE Band 7 FDD 2500 MHz to 2690 MHz

Technology tested: LTE FDD

Antenna: External antenna

Power supply: 3.8 V DC

Temperature range: -30°C to +50°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Andreas Luckenbill  
Lab Manager  
Radio Communications & EMC

### Test performed:

Tobias Wittenmeier  
Testing Manager  
Radio Communications & EMC

## 1 Table of contents

1	Table of contents.....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details.....	3
3	Test standard/s .....	3
3.1	Measurement guidance.....	3
4	Test environment.....	4
5	Test item .....	4
5.1	General description .....	4
5.2	Additional information .....	4
6	Test laboratories sub-contracted .....	4
7	Description of the test setup.....	5
7.1	Shielded fully anechoic chamber .....	6
7.2	Radiated measurements > 12.75 GHz.....	7
7.3	Conducted measurements normal and extreme conditions.....	8
8	Measurement uncertainty .....	9
9	Sequence of testing .....	10
9.1	Sequence of testing radiated spurious 9 kHz to 30 MHz.....	10
9.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	11
9.3	Sequence of testing radiated spurious 1 GHz to 12.75 GHz .....	12
9.4	Sequence of testing radiated spurious above 12.75 GHz .....	13
10	Summary of measurement results.....	14
10.1	LTE band VII .....	14
11	RF measurements.....	15
11.1	LTE technologies supported by EUT .....	15
11.2	Results LTE – Band 7 .....	16
11.2.1	RF output power .....	16
11.2.2	Frequency stability .....	23
11.2.3	Spurious emissions radiated.....	25
11.2.4	Spurious emissions conducted .....	31
11.2.5	Block edge compliance .....	52
11.2.6	Occupied bandwidth .....	61
12	Observations .....	71
Annex A	Document history .....	72
Annex B	Further information.....	72
Annex C	Accreditation Certificate .....	73

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-0438/15-01-05-A and dated 2015-05-12**

### 2.2 Application details

Date of receipt of order:	2015-09-28
Date of receipt of test item:	2015-09-28
Start of test:	2015-10-01
End of test:	2015-10-28
Person(s) present during the test:	-/-

## 3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 27		Title 47 of the Code of Federal Regulations; Chapter I; Part 27 - Miscellaneous wireless communications services
RSS - 199 Issue 2	October 2014	Broadband Radio Service (BRS) Equipment Operating in the Band 2500-2690 MHz

### 3.1 Measurement guidance

Guidance	Version	Description
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz

## 4 Test environment

Temperature	:	$T_{nom}$ $T_{max}$ $T_{min}$	+22 °C during room temperature tests +50 °C during high temperature tests -30 °C during low temperature tests
Relative humidity content	:		55 %
Barometric pressure	:		not relevant for this kind of testing
Power supply	:	$V_{nom}$ $V_{max}$ $V_{min}$	3.8 V DC by external power supply The module does only operate with an external stabilized power supply

## 5 Test item

### 5.1 General description

Kind of test item	:	NAD Module
Type identification	:	V1140-104-1
PMN	:	LTE-NAD
HVIN	:	V1140-104-1
FVIN	:	-/-
HMN	:	-/-
S/N serial number	:	No information available
HW hardware status	:	HW1215, V1140-104 Rev.005
SW software status	:	M9615A-CETWTDZM-6.3.100105
Frequency band	:	LTE Band 7 FDD 2500 MHz to 2690 MHz
Type of radio transmission	:	OFDM
Use of frequency spectrum	:	
Type of modulation	:	QPSK, 16 – QAM
Antenna	:	External antenna
Power supply	:	3.8 V DC by external power supply
Temperature range	:	-30°C to +50°C

### 5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report: 1-0438\_15-01-01\_AnnexA  
1-0438\_15-01-01\_AnnexC

## 6 Test laboratories sub-contracted

None

## 7 Description of the test setup


Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

**Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 7.1 Shielded fully anechoic chamber

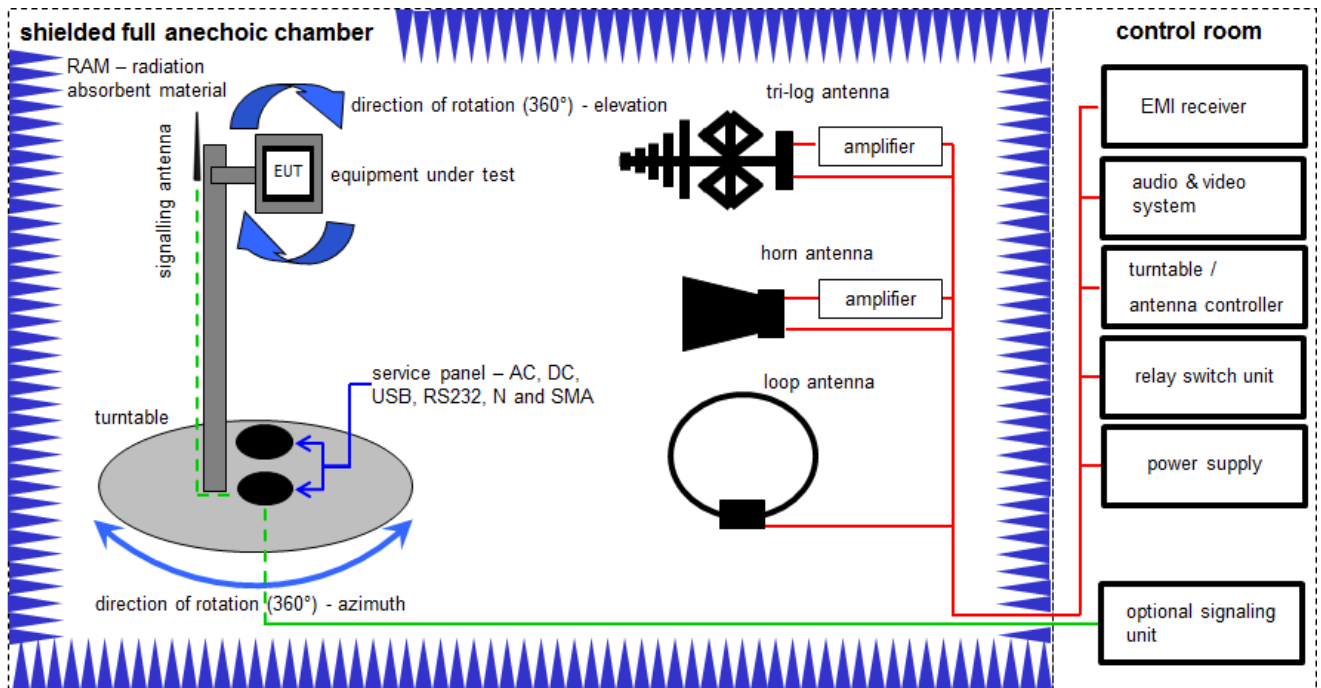

$$OP = AV + D - G + CA$$

(OP-output power; AV-analyzer value; D-distance; G-antenna gain+amplifier gain; CA-loss signal path)

### Example calculation:


$$OP \text{ [dBm]} = -11.0 \text{ [dBm]} + 47 \text{ [dB]} - 8 \text{ [dB]} + 5 \text{ [dB]} = 33 \text{ [dBm]} (2 \text{ W})$$

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Power Supply 0-20V	6632A	HP	2851A01814	300000924	ne	09.11.2005	
2	A	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9709-5290	300000212	k	13.08.2015	13.08.2017
3	A	EMI Test Receiver 20Hz-26.5GHz	ESU26	R&S	100037	300003555	k	22.01.2015	22.01.2016
4	A.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	37	400000148	ne		
5	A	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	318	300003696	k	22.04.2014	22.04.2017
7	A	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000032	300004510	ne		
8	A	Messrechner und Monitor	Intel Core i3 3220/3,3 GHz, Prozessor	Agilent Technologies	2V2403033A54 21	300004591	ne		
9	A	NEXIO EMV-Software	BAT EMC	EMCO	2V2403033A54 21	300004682	ne		
10	A	Active Loop Antenna 10 kHz to 30 MHz	6502	EMCO/2	8905-2342	300000256	k	24.06.2015	24.06.2017
11	A	Wideband Radio Communication Tester	CMW500	R&S	102375	300004187	k	28.01.2015	28.01.2017

## 7.2 Radiated measurements > 12.75 GHz

### Radiated measurements > 12.75 GHz

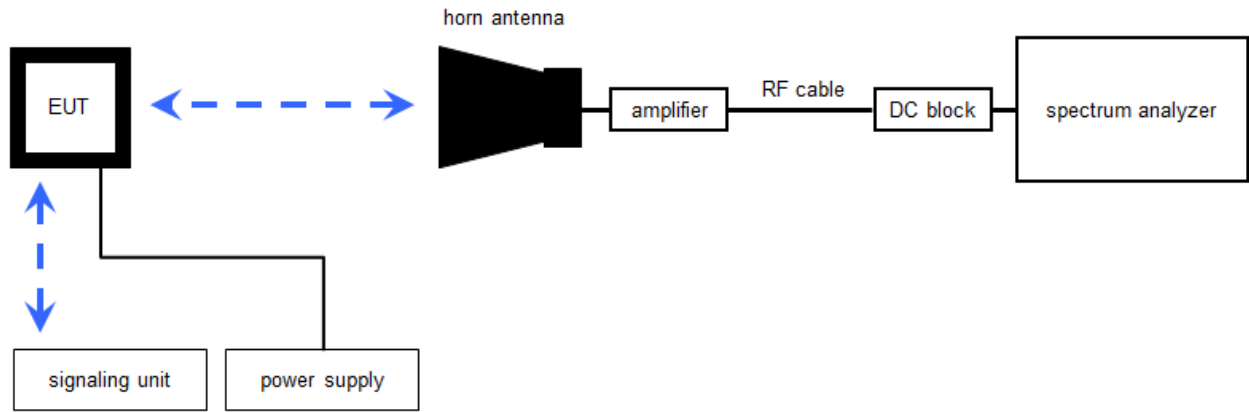

Measurement distance: horn antenna 25 cm

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)


#### Example calculation:

$$OP [dBm] = -59.0 [dBm] + 44.0 [dB] - 20.0 [dBi] + 5.0 [dB] = -30 [dBm] (1 \mu W)$$

#### Equipment table:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	22.01.2015	22.01.2016
2	A	Power Supply 0-20V, 0-5A	6632B	Agilent Technologies	GB42110541	400000562	vIKI!	10.01.2013	10.01.2016
3	A	Amplifier 2-40 GHz	JS32-02004000-57-5P	MITEQ	1777200	300004541	ev		
4	A	RF-Cable	ST18/SMAm/SMAm/60	Huber & Suhner	Batch no. 606844	400001181	ev		
5	A	RF-Cable	ST18/SMAm/SMAm/48	Huber & Suhner	Batch no. 600918	400001182	ev		
6	A	DC-Blocker 0.1-40 GHz	8141A	Inmet	Batch no. 600918	400001185	ev		
7	A	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda	8402	300000787	k	14.08.2015	14.08.2017
8	A	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda	8205	300002442	k	19.07.2015	19.07.2017
9	A	Wideband Radio Communication Tester	CMW500	R&S	102375	300004187	k	28.01.2015	28.01.2017

### 7.3 Conducted measurements normal and extreme conditions

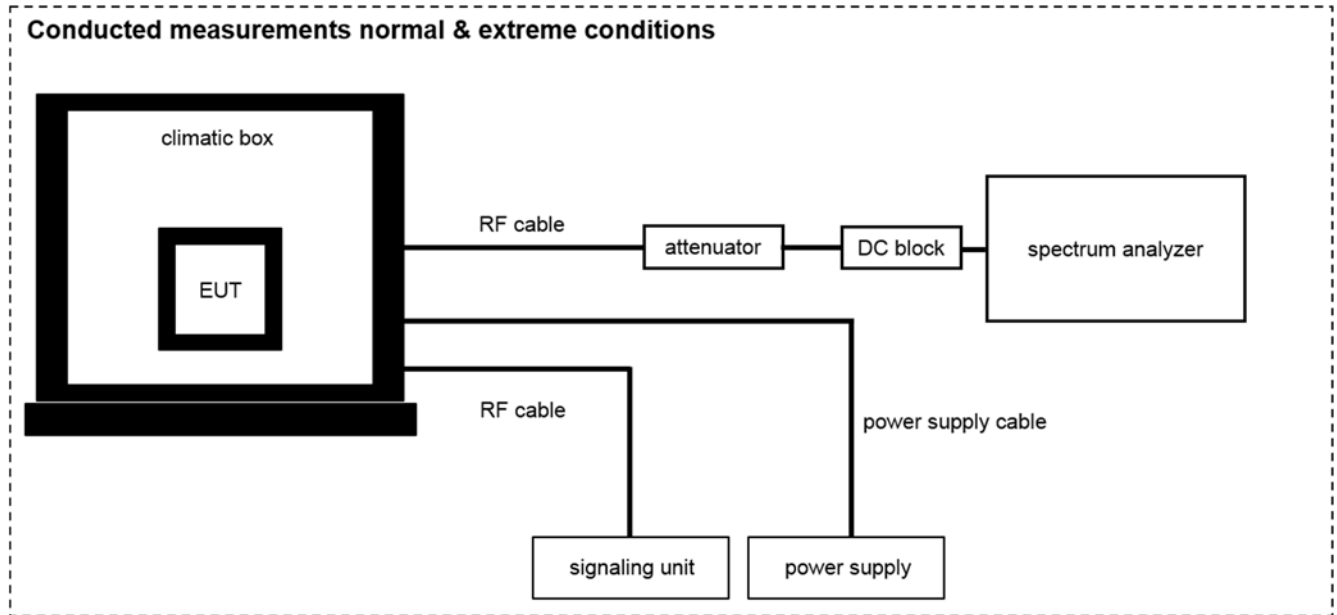

$$OP = AV + CA$$

(OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

$$OP \text{ [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} \text{ (58.88 mW)}$$

Equipment table:

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	A, B	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
2	A, B	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	22.01.2015	22.01.2016
3	A, B	Power Supply 0-20V; 0-5A	6632B	HP	US37478366	400000117	vIKI!	20.01.2015	20.01.2017
4	A, B	Wideband Radio Communication Tester	CMW500	R&S	102375	300004187	vIKI!	28.01.2015	28.01.2017
5	B	Temperature Test Chamber	VT 4002	Heraeus Voetsch	521/83761	300002326	Ve	26.09.2015	26.09.2017
6	A, B	RF-Cable	ST18/SMAm/SMAm/72	Huber & Suhner	Batch no. 699714	400001184	ev		
7	A, B	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev		
8	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits		400001186	ev		



**8 Measurement uncertainty**

Measurement uncertainty	
Test case	Uncertainty
RF output power conducted	± 1 dB
RF output power radiated	± 3 dB
Frequency stability	± 20 Hz
Spurious emissions radiated below 30 MHz	± 3 dB
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB
Spurious emissions radiated above 12.75 GHz	± 4.5 dB
Spurious emissions conducted	± 3 dB
Block edge compliance	± 3 dB
Occupied bandwidth	± RBW

## **9 Sequence of testing**

### **9.1 Sequence of testing radiated spurious 9 kHz to 30 MHz**

#### **Setup**

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### **Premeasurement**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### **Final measurement**

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

## 9.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

### 9.3 Sequence of testing radiated spurious 1 GHz to 12.75 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 9.4 Sequence of testing radiated spurious above 12.75 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.25 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 27 RSS-199	passed	2016-05-31	-/-

### 10.1 LTE band VII

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Nominal & Extreme	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:** C – Compliant; NC – Not compliant; NA = Not applicable; NP = Not performed

**11 RF measurements****11.1 LTE technologies supported by EUT****Channel bandwidth**

	Band 4	Band 7	Band 13	Band 17
[MHz]				
1.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Antenna**

SISO	<input checked="" type="checkbox"/>
SIMO	<input type="checkbox"/>
MISO	<input type="checkbox"/>
MIMO	<input type="checkbox"/>

## 11.2 Results LTE – Band 7

The EUT was set to transmit the maximum power.

### 11.2.1 RF output power

#### Description:

This paragraph contains average power, peak output power, PAPR and ERP measurements for the mobile station.

The plots in this test report represents only an example of the measurements. All plots of this chapter are available on request.

The red line in the measurements indicates the ideal Gaussian distribution for the measured amplitude range.

#### Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Detector:	Sample
AQT:	15.6 ms
Resolution bandwidth:	40 MHz
Used equipment:	see chapter 7.1 – A and chapter 7.3 – A
Measurement uncertainty:	see chapter 8

#### Limits:

FCC	IC
Max Output Power	
+30.00 dBm	





**Results:**

Output Power (conducted)								
Bandwidth (MHz)	Frequency (MHz)	Resource block allocation	Peak Output Power (dBm) QPSK	Average Output Power (dBm) QPSK	Peak to Average Ratio (dB) CCDF	Peak Output Power (dBm) 16-QAM	Average Output Power (dBm) 16-QAM	Peak to Average Ratio (dB) CCDF
5	2502.5	1 RB low	28.02	22.6	5.2	28.01	21.7	6.1
		1 RB high	27.75	22.5	5.0	27.80	21.5	6.1
		50% RB mid	27.82	21.4	5.6	27.87	20.5	6.5
		100% RB	27.83	21.5	5.6	27.94	20.5	6.4
	2535	1 RB low	28.83	22.4	5.7	28.91	21.6	6.7
		1 RB high	28.64	22.5	5.5	28.81	21.7	6.5
		50% RB mid	28.57	21.5	5.9	28.74	20.5	6.8
		100% RB	28.52	21.4	6.0	28.56	20.5	6.8
	2567.5	1 RB low	28.60	22.5	5.7	28.70	21.5	7.0
		1 RB high	28.25	22.5	5.5	28.30	21.3	6.7
		50% RB mid	28.42	21.5	5.9	28.60	20.5	6.8
		100% RB	28.43	21.3	5.9	28.54	20.3	6.7
10	2505	1 RB low	27.80	22.4	5.2	27.84	21.3	6.4
		1 RB high	27.87	22.6	5.0	27.84	21.5	6.1
		50% RB mid	27.74	21.4	5.5	27.79	20.5	6.3
		100% RB	27.76	21.2	5.6	27.81	20.3	6.4
	2535	1 RB low	28.58	22.3	5.5	28.81	21.4	6.8
		1 RB high	28.68	22.5	5.8	28.81	21.7	6.8
		50% RB mid	28.53	21.5	5.9	28.72	20.4	6.8
		100% RB	28.43	21.3	6.0	28.61	20.3	6.8
	2565	1 RB low	28.64	22.2	5.9	28.68	21.0	7.2
		1 RB high	28.31	22.4	5.4	28.37	21.5	6.6
		50% RB mid	28.53	21.4	5.9	28.58	20.4	6.8
		100% RB	28.30	21.2	5.9	28.58	20.2	6.8
15	2507.5	1 RB low	27.55	22.2	5.1	27.63	21.2	6.2
		1 RB high	27.80	22.4	5.0	28.02	21.4	6.3
		50% RB mid	27.74	21.4	5.5	27.80	20.4	6.3
		100% RB	27.83	21.3	5.8	28.05	20.2	6.5
	2535	1 RB low	28.18	21.9	5.7	28.47	20.9	6.6
		1 RB high	28.50	22.5	5.7	28.56	21.4	6.8
		50% RB mid	28.71	21.3	5.9	28.76	20.3	6.9
		100% RB	28.51	21.2	6.2	28.52	20.2	6.8
	2562.5	1 RB low	28.44	22.0	5.9	28.50	21.0	7.2
		1 RB high	28.15	22.3	5.4	28.33	21.2	6.8
		50% RB mid	28.37	21.1	6.1	28.81	20.1	6.9
		100% RB	28.32	21.3	5.9	28.40	20.2	6.8


20	2510	1 RB low	27.35	22.0	5.1	27.45	21.1	6.2
		1 RB high	27.92	22.0	5.4	27.99	21.2	6.3
		50% RB mid	27.73	21.3	5.5	27.83	20.2	6.5
		100% RB	27.74	21.2	5.6	27.97	20.2	6.5
	2535	1 RB low	27.67	21.7	5.5	27.92	20.5	6.7
		1 RB high	28.42	22.1	5.8	28.40	21.1	7.0
		50% RB mid	28.58	21.3	6.0	28.58	20.2	6.8
		100% RB	28.40	21.2	6.0	28.75	20.2	6.8
	2560	1 RB low	28.03	21.8	5.9	28.16	20.9	6.9
		1 RB high	27.97	22.1	5.5	28.18	21.1	6.7
		50% RB mid	28.66	21.1	6.0	28.69	20.0	6.9
		100% RB	28.33	21.1	5.8	28.50	20.1	6.8

The radiated output power is measured in the mode with the highest conducted output power.


Output Power (radiated)			
Bandwidth (MHz)	Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM
5	2502.5	15.7	14.8
	2535	14.8	14.0
	2567.5	16.2	15.2
10	2505	15.7	14.6
	2535	14.8	14.0
	2565	16.1	15.2
15	2507.5	15.5	14.5
	2535	14.8	13.7
	2562.5	16.0	14.9
20	2510	15.1	14.3
	2535	14.4	13.4
	2560	15.8	14.8
Measurement uncertainty		± 3.0 dB	

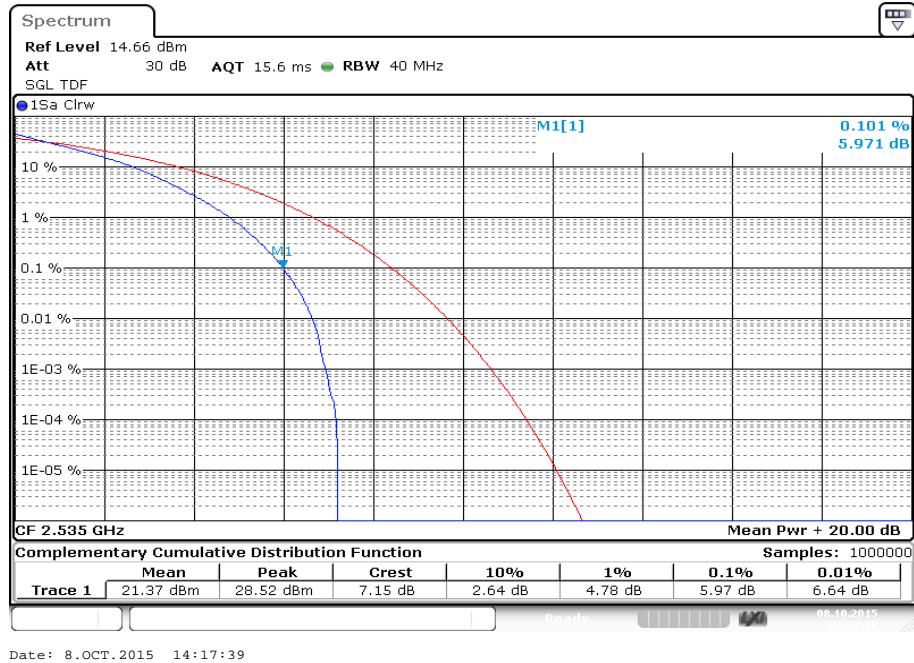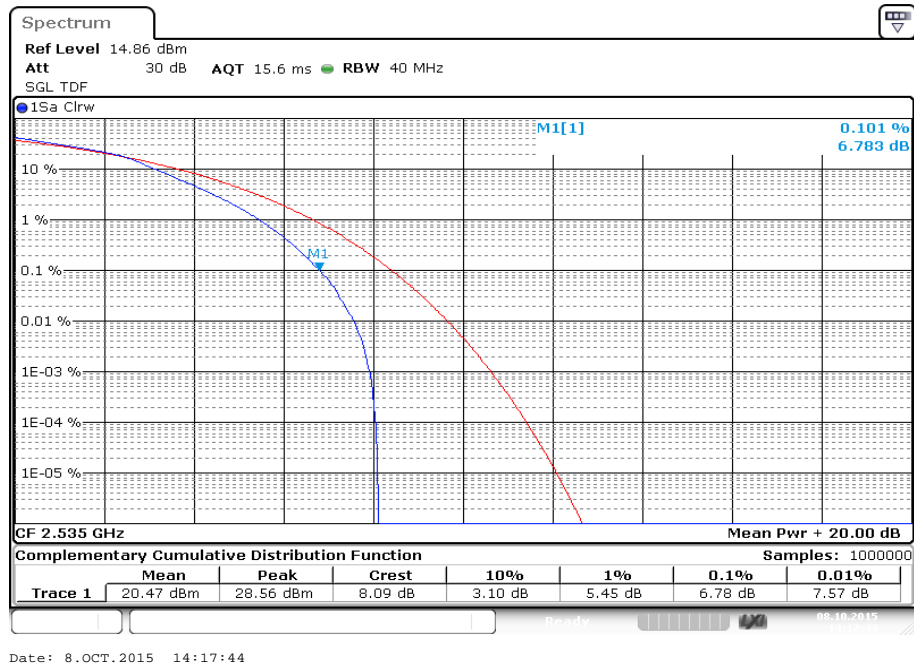**Plots:****Plot 1:** 5 MHz cell bandwidth, mid channel, 100% #RB, QPSK**Plot 2:** 5 MHz cell bandwidth, mid channel, 100% #RB, 16-QAM


**Plot 3:** 10 MHz cell bandwidth, mid channel, 100% #RB, QPSK

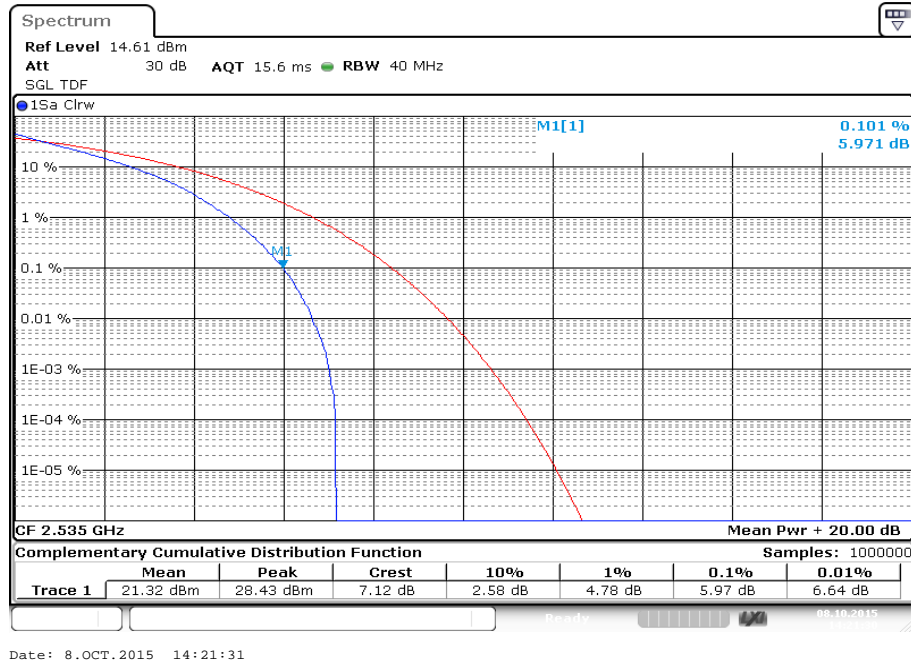


**Plot 4:** 10 MHz cell bandwidth, mid channel, 100% #RB, 16-QAM


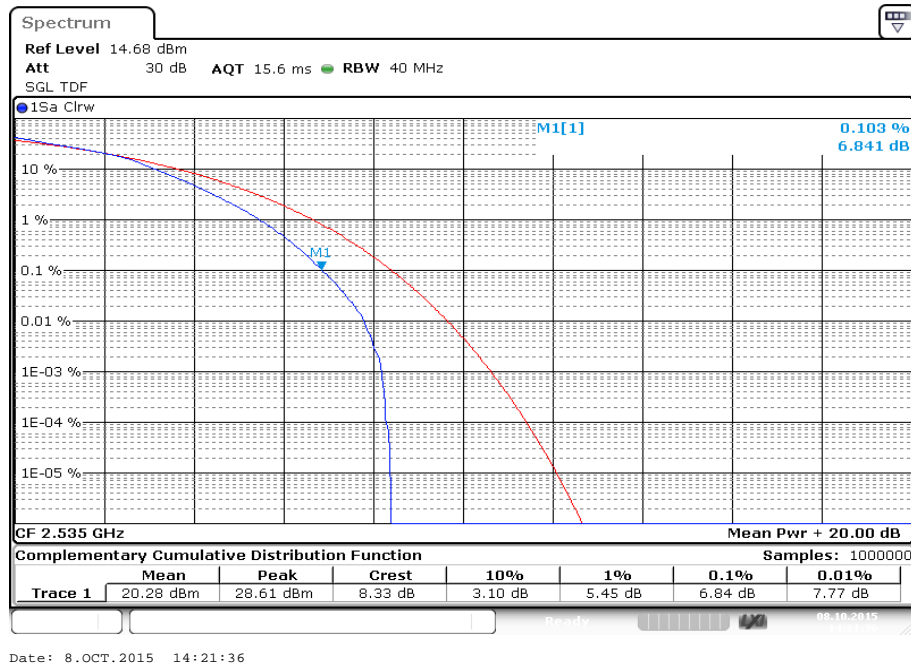


Plot 5: 15 MHz cell bandwidth, mid channel, 100% #RB, QPSK

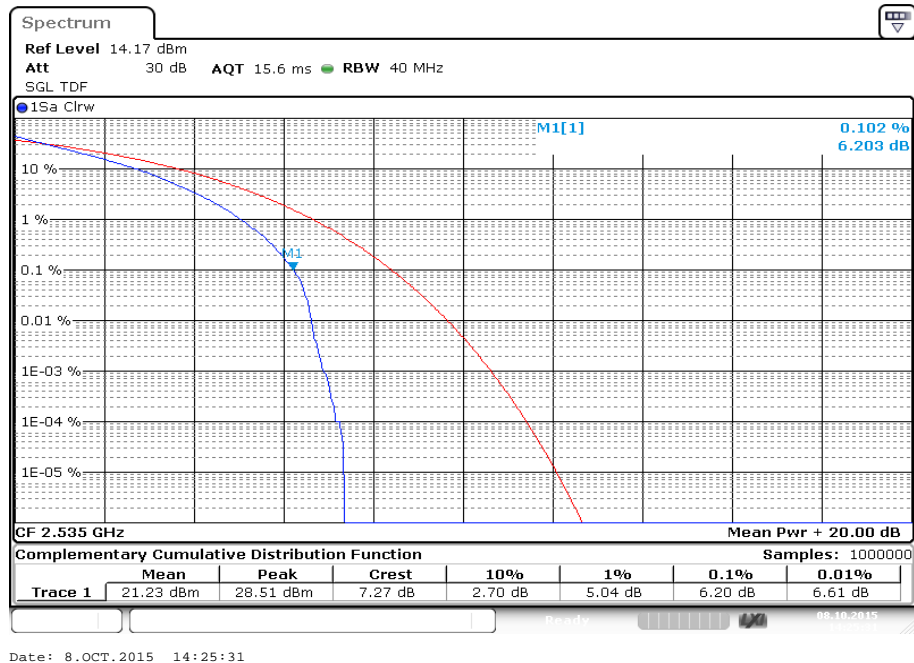

Plot 6: 15 MHz cell bandwidth, mid channel, 100% #RB, 16-QAM

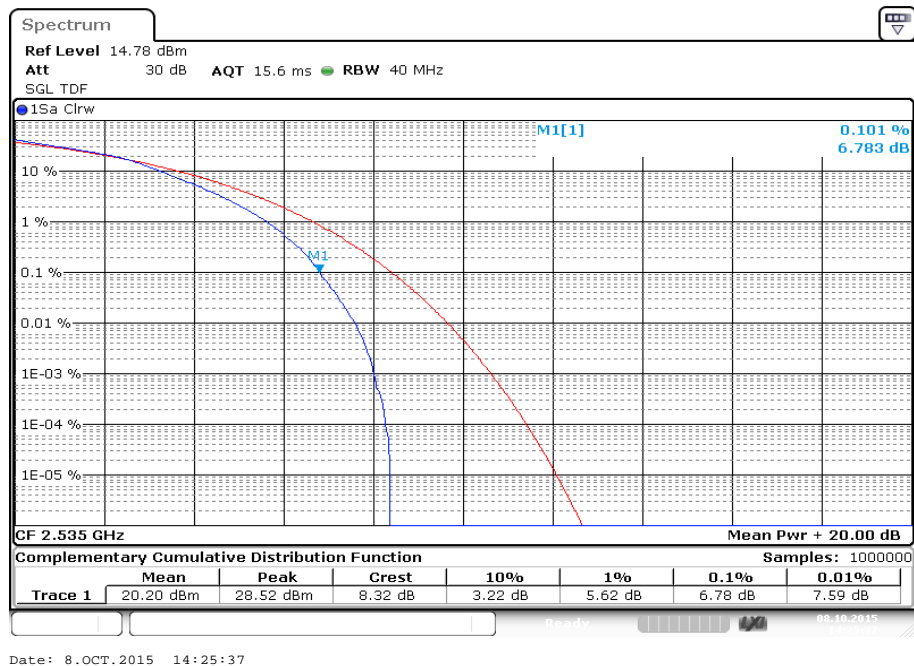

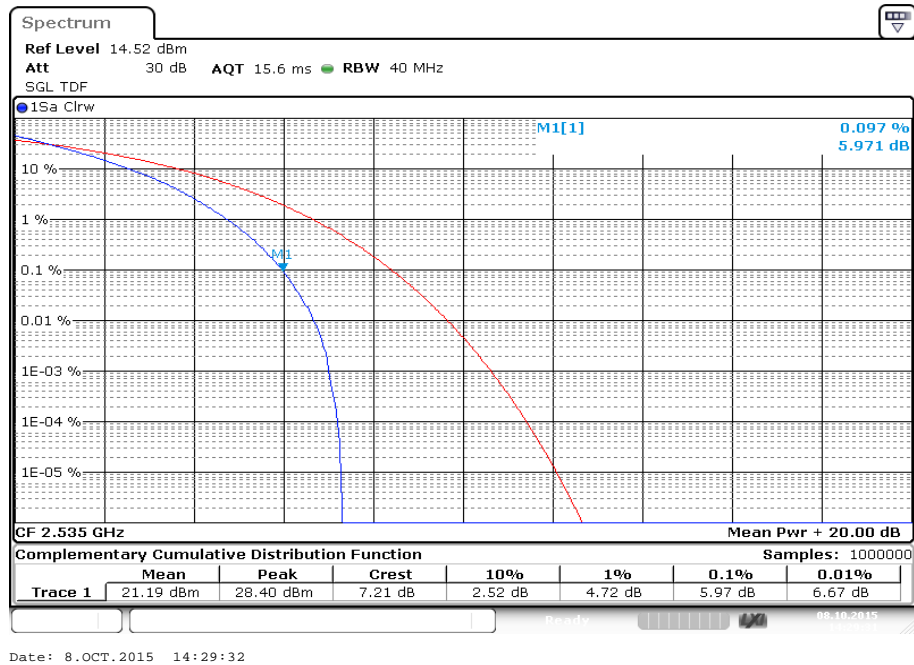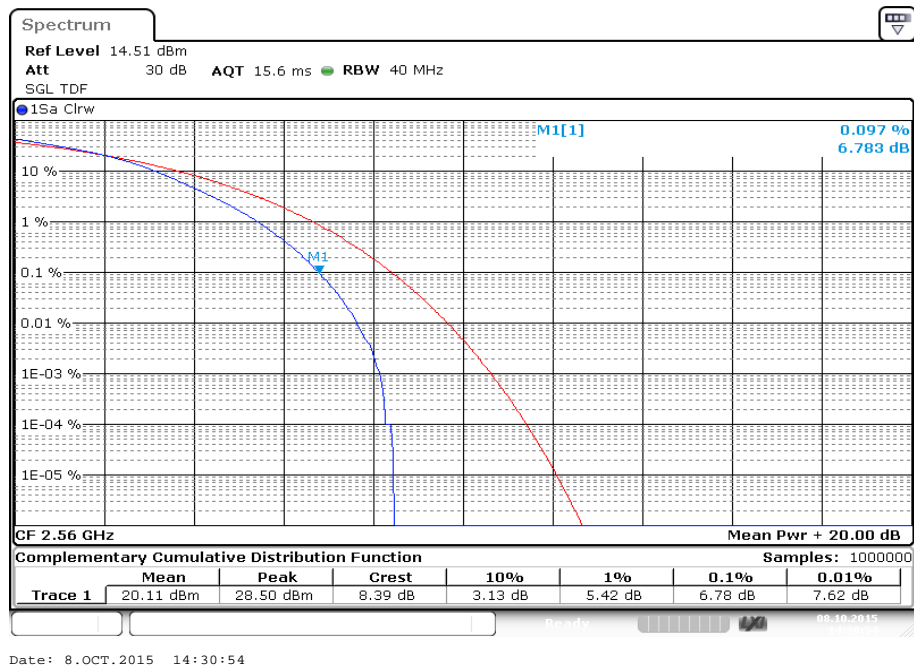**Plot 7:** 20 MHz cell bandwidth, mid channel, 100% #RB, QPSK**Plot 8:** 20 MHz cell bandwidth, mid channel, 100% #RB, 16-QAM

## 11.2.2 Frequency stability

### Description:

In order to measure the carrier frequency under normal conditions it is necessary to make measurements with the mobile station connected to R&S CMW500 Wideband Radio Communication Tester.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 °C.
3. With the mobile station, powered with  $V_{nom}$  connected to the CMW500 on the centre channel with channel bandwidth of 10 MHz, measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 15 minutes at each temperature, unpowered, before making measurements.
5. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### Measurement:

Measurement parameters	
Detector:	Measured with CMW500
Sweep time:	
Video bandwidth:	
Resolution bandwidth:	
Span:	
Trace-Mode:	
Test setup:	see chapter 7.3 – B
Measurement uncertainty:	see chapter 8

### Limits:

FCC	IC
Frequency Stability	
± 2.5 ppm	

**Results:****FREQ ERROR versus VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.8	-11	-0.00000043	-0.0043

\* The module requires an external stabilized power supply.

**FREQ ERROR versus TEMPERATURE**

Temperature (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	-20	-0.00000079	-0.0079
-20	-15	-0.00000059	-0.0059
-10	-13	-0.00000051	-0.0051
± 0	-14	-0.00000055	-0.0055
10	-11	-0.00000043	-0.0043
20	-13	-0.00000051	-0.0051
30	-15	-0.00000059	-0.0059
40	-10	-0.00000039	-0.0039
50	-19	-0.00000074	-0.0074



### 11.2.3 Spurious emissions radiated

#### Description:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2014 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 2569.3 MHz. This was rounded up to 26 GHz. The resolution bandwidth is set as outlined in Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE band 7.

#### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	2 sec.
Video bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Resolution bandwidth:	Below 1 GHz: 100 kHz Above 1 GHz: 1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold
Used equipment:	see chapter 7.1 – A & 7.2A
Measurement uncertainty:	see chapter 8

#### Limits:

FCC	IC
Spurious Emissions Radiated	
Attenuation $\geq 43 + 10\log(P)$ (P. Power in Watts)	
-13 dBm	

#### Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the LTE band 7. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE band 7 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.  
All measurements were done in horizontal and vertical polarization; the plots show the worst case.  
The plots show only the middle channel with 10 MHz bandwidth and full resource blocks. If spurious were detected, the lowest and highest channel and all supported channel bandwidths were checked, too.



As can be seen from this data, the emissions from the test item were within the specification limit.



**QPSK**



Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5010.0	-	5070.0	-	5130.0	-
7515.0	-	7605.0	-	7695.0	-
10020.0	-	10140.0	-	10260.0	-
12525.0	-	12675.0	-	12825.0	-
15030.0	-	15210.0	-	15390.0	-
17535.0	-	17745.0	-	17955.0	-
20040.0	-	20280.0	-	20520.0	-
22545.0	-	22815.0	-	23085.0	-
25050.0	-	25350.0	-	25650.0	-
Measurement uncertainty			± 3dB		

**16-QAM**


Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5010.0	-	5070.0	-	5130.0	-
7515.0	-	7605.0	-	7695.0	-
10020.0	-	10140.0	-	10260.0	-
12525.0	-	12675.0	-	12825.0	-
15030.0	-	15210.0	-	15390.0	-
17535.0	-	17745.0	-	17955.0	-
20040.0	-	20280.0	-	20520.0	-
22545.0	-	22815.0	-	23085.0	-
25050.0	-	25350.0	-	25650.0	-
Measurement uncertainty			± 3dB		

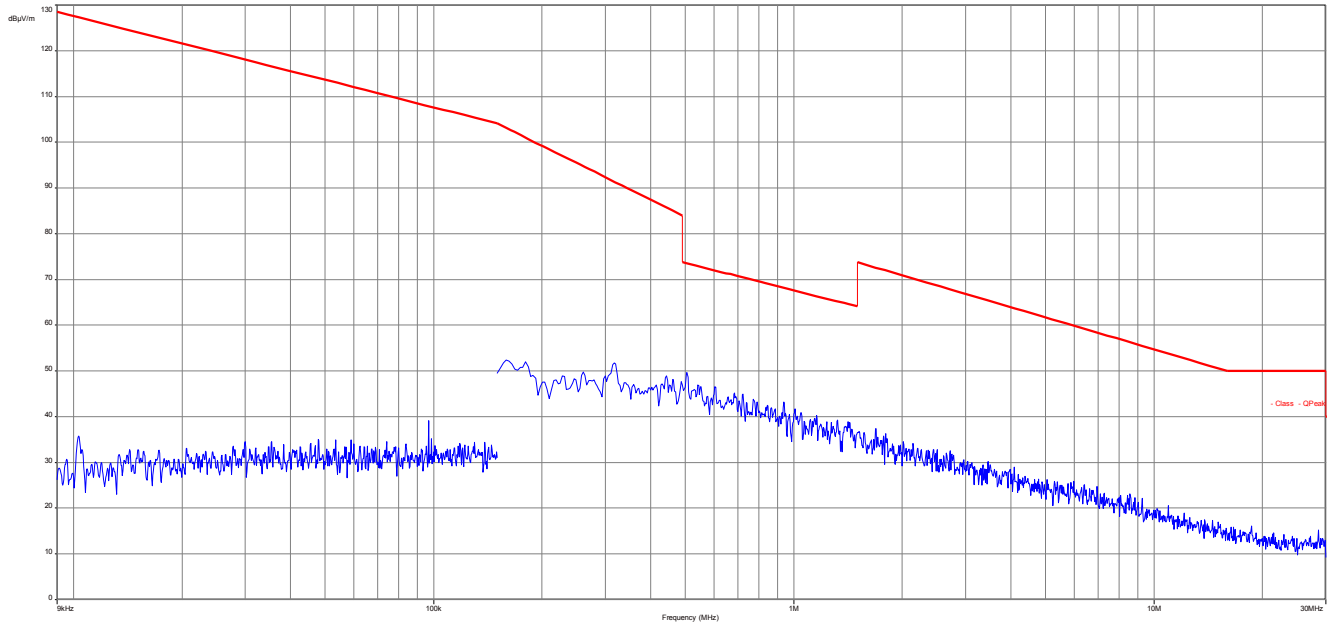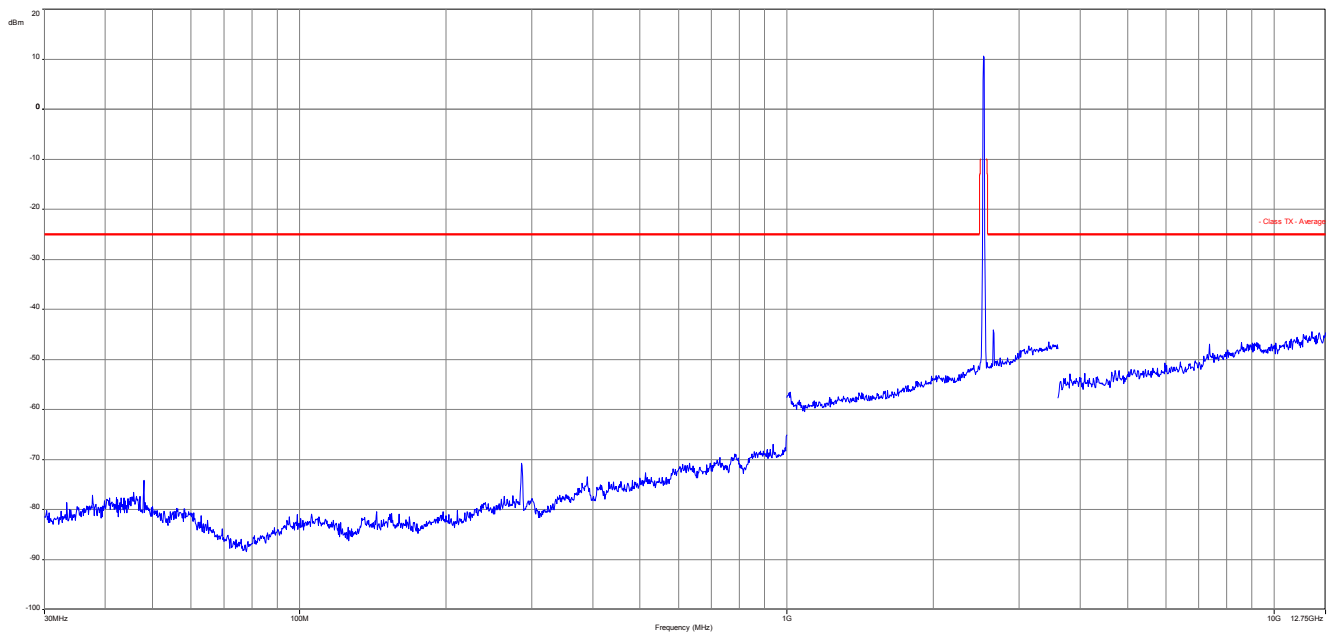**QPSK with 10 MHz channel bandwidth****Plot 1: Middle channel, up to 30 MHz****Plot 2: Middle channel, 30 MHz to 12.75 GHz**

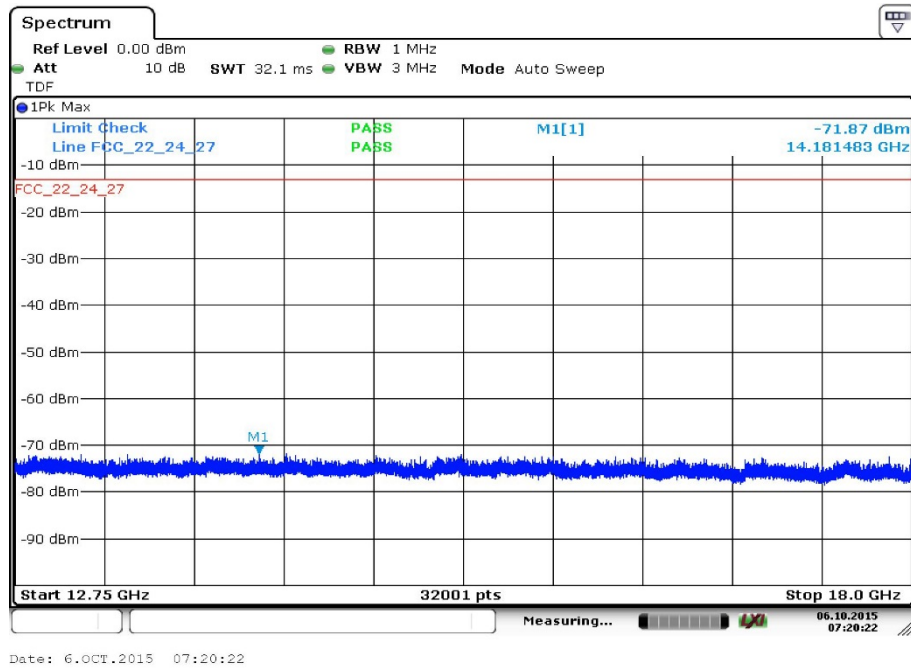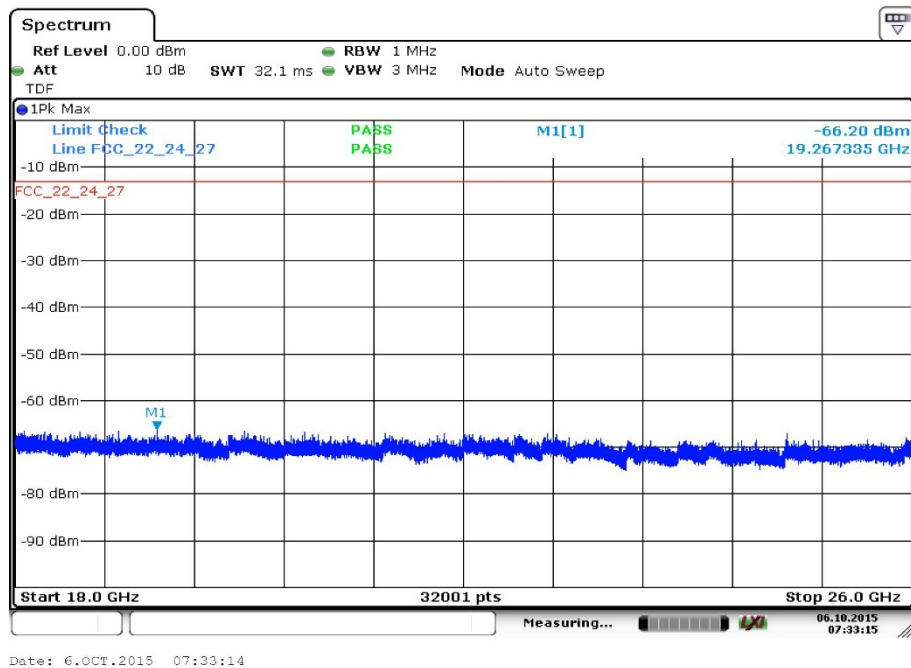
**Plot 3: Middle channel, 12.75 GHz to 18 GHz****Plot 4: Middle channel, 18 GHz to 26 GHz**

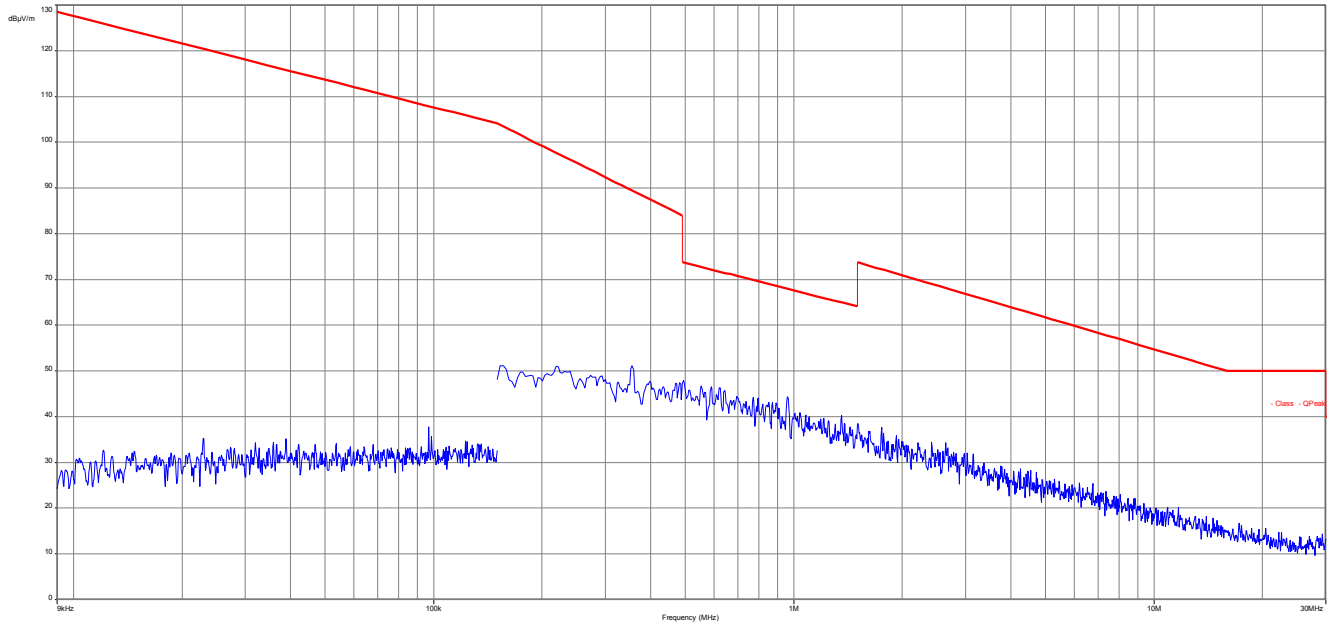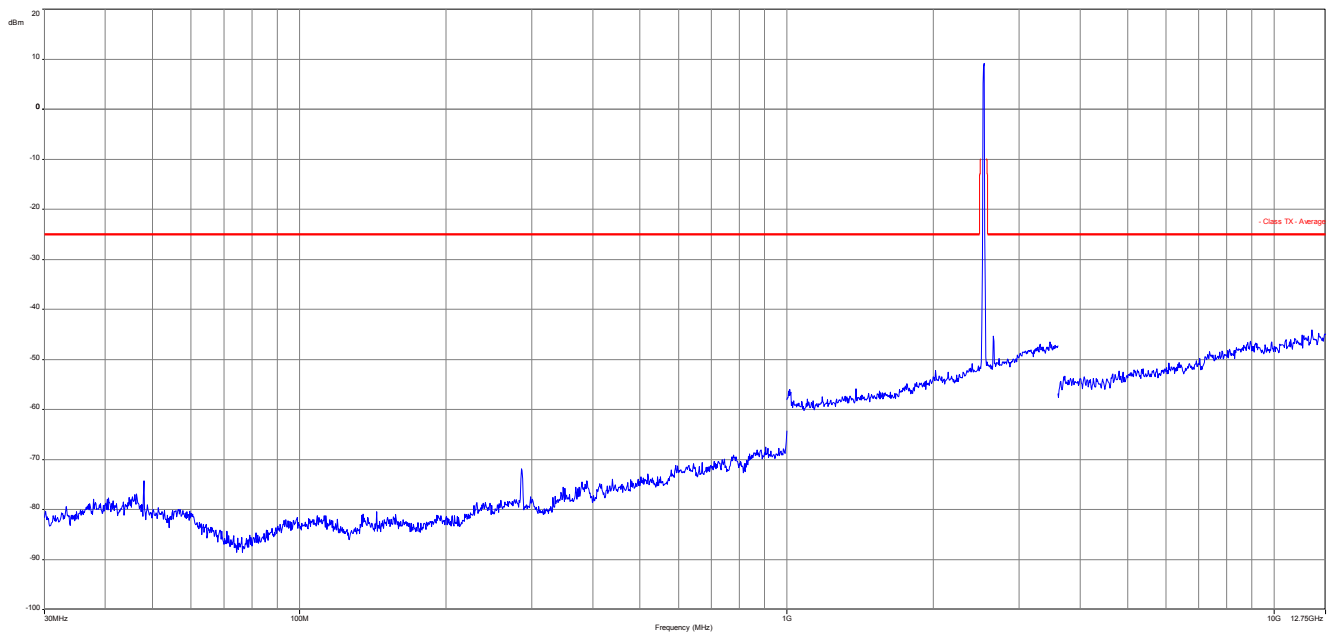**16-QAM with 10 MHz channel bandwidth****Plot 5: Middle channel, up to 30 MHz****Plot 6: Middle channel, 30 MHz to 12.75 GHz**

Plot 7: Middle channel, 12.75 GHz to 18 GHz

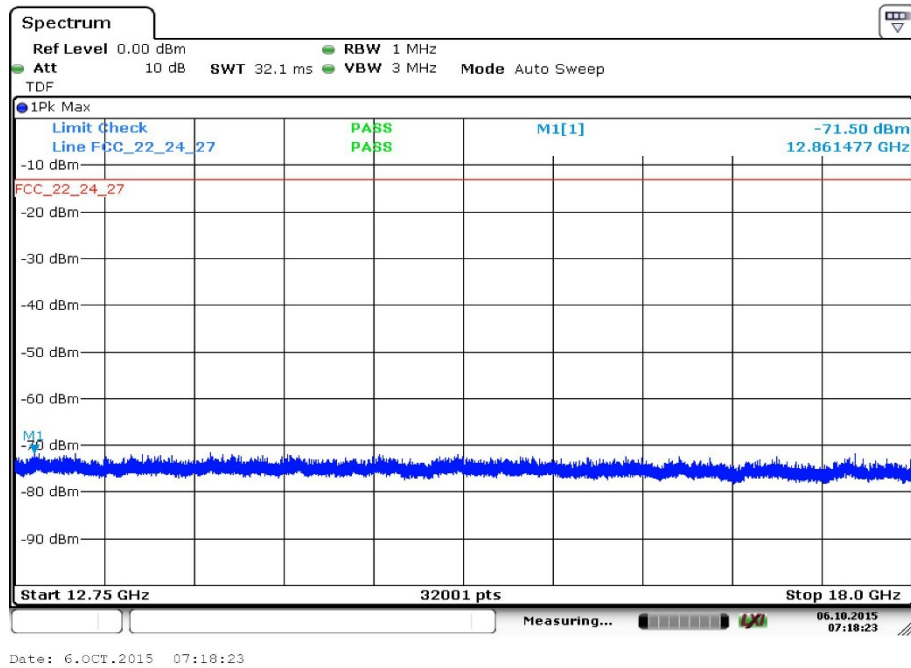

Plot 8: Middle channel, 18 GHz to 26 GHz

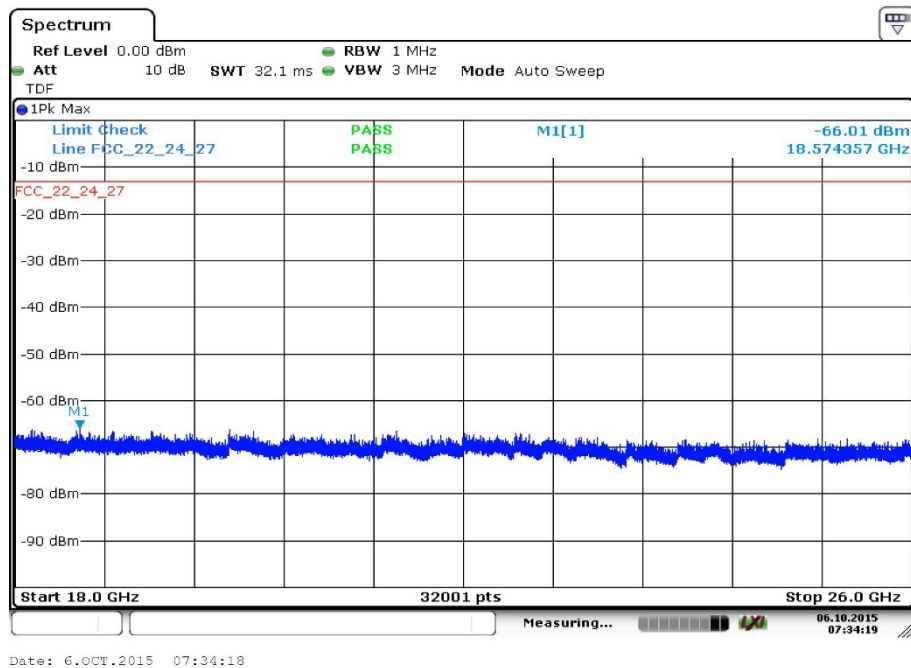

#### 11.2.4 Spurious emissions conducted

##### Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

For the measurement the lowest, middle and highest channel bandwidth was used. If spurious were found the other bandwidths were measured, too.

##### Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz
Resolution bandwidth:	Pre-measurement with 1 MHz On spurious detection re-measurement below 1 GHz with 100 kHz Above 1 GHz with 1 MHz
Span:	10 MHz – 26 GHz
Trace-Mode:	Max Hold
Used equipment:	see chapter 7.3 - A
Measurement uncertainty:	see chapter 8

##### Limits:

FCC	IC
Spurious Emissions Conducted	
Attenuation $\geq 43 + 10\log(P)$ (P. Power in Watts)	
-13 dBm	

**Results:** for 5 MHz channel bandwidth

**QPSK**

Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5005.0	-	5070.0	-	5135.0	-
7507.5	-	7605.0	-	7702.5	-
10010.0	-	10140.0	-	10270.0	-
12512.5	-	12675.0	-	12837.5	-
15015.0	-	15210.0	-	15405.0	-
17517.5	-	17745.0	-	17972.5	-
20020.0	-	20280.0	-	20540.0	-
22522.5	-	22815.0	-	23107.5	-
25025.0	-	25350.0	-	25675.0	-
Measurement uncertainty			± 3dB		

**16-QAM**

Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5005.0	-	5070.0	-	5135.0	-
7507.5	-	7605.0	-	7702.5	-
10010.0	-	10140.0	-	10270.0	-
12512.5	-	12675.0	-	12837.5	-
15015.0	-	15210.0	-	15405.0	-
17517.5	-	17745.0	-	17972.5	-
20020.0	-	20280.0	-	20540.0	-
22522.5	-	22815.0	-	23107.5	-
25025.0	-	25350.0	-	25675.0	-
Measurement uncertainty			± 3dB		



**Results:** for 10 MHz channel bandwidth

**QPSK**

Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5010.0	-	5070.0	-	5130.0	-
7515.0	-	7605.0	-	7695.0	-
10020.0	-	10140.0	-	10260.0	-
12525.0	-	12675.0	-	12825.0	-
15030.0	-	15210.0	-	15390.0	-
17535.0	-	17745.0	-	17955.0	-
20040.0	-	20280.0	-	20520.0	-
22545.0	-	22815.0	-	23085.0	-
25050.0	-	25350.0	-	25650.0	-
Measurement uncertainty			± 3dB		

**16-QAM**

Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5010.0	-	5070.0	-	5130.0	-
7515.0	-	7605.0	-	7695.0	-
10020.0	-	10140.0	-	10260.0	-
12525.0	-	12675.0	-	12825.0	-
15030.0	-	15210.0	-	15390.0	-
17535.0	-	17745.0	-	17955.0	-
20040.0	-	20280.0	-	20520.0	-
22545.0	-	22815.0	-	23085.0	-
25050.0	-	25350.0	-	25650.0	-
Measurement uncertainty			± 3dB		

**Results:** for 15 MHz channel bandwidth

**QPSK**

Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5015.0	-	5070.0	-	5125.0	-
7522.5	-	7605.0	-	7687.5	-
10030.0	-	10140.0	-	10250.0	-
12537.5	-	12675.0	-	12812.5	-
15045.0	-	15210.0	-	15375.0	-
17552.5	-	17745.0	-	17937.5	-
20060.0	-	20280.0	-	20500.0	-
22567.5	-	22815.0	-	23062.5	-
25075.0	-	25350.0	-	25625.0	-
Measurement uncertainty			± 3dB		

**16-QAM**

Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5015.0	-	5070.0	-	5125.0	-
7522.5	-	7605.0	-	7687.5	-
10030.0	-	10140.0	-	10250.0	-
12537.5	-	12675.0	-	12812.5	-
15045.0	-	15210.0	-	15375.0	-
17552.5	-	17745.0	-	17937.5	-
20060.0	-	20280.0	-	20500.0	-
22567.5	-	22815.0	-	23062.5	-
25075.0	-	25350.0	-	25625.0	-
Measurement uncertainty			± 3dB		



**Results:** for 20 MHz channel bandwidth


**QPSK**



Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5015.0	-	5070.0	-	5125.0	-
7522.5	-	7605.0	-	7687.5	-
10030.0	-	10140.0	-	10250.0	-
12537.5	-	12675.0	-	12812.5	-
15045.0	-	15210.0	-	15375.0	-
17552.5	-	17745.0	-	17937.5	-
20060.0	-	20280.0	-	20500.0	-
22567.5	-	22815.0	-	23062.5	-
25075.0	-	25350.0	-	25625.0	-
Measurement uncertainty			± 3dB		


**16-QAM**



Spurious Emission Level (dBm)					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
5015.0	-	5070.0	-	5125.0	-
7522.5	-	7605.0	-	7687.5	-
10030.0	-	10140.0	-	10250.0	-
12537.5	-	12675.0	-	12812.5	-
15045.0	-	15210.0	-	15375.0	-
17552.5	-	17745.0	-	17937.5	-
20060.0	-	20280.0	-	20500.0	-
22567.5	-	22815.0	-	23062.5	-
25075.0	-	25350.0	-	25625.0	-
Measurement uncertainty			± 3dB		

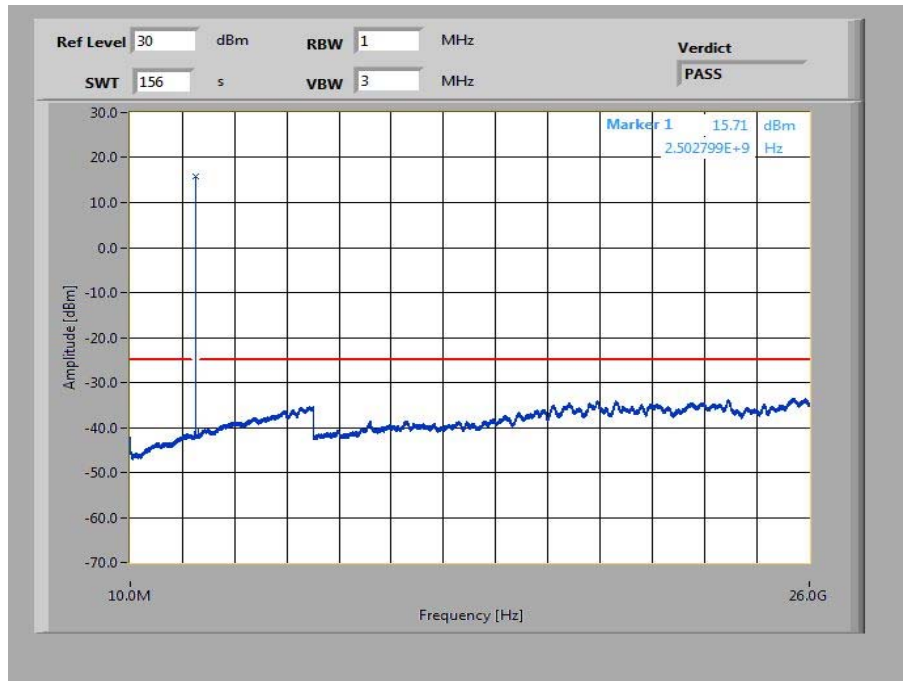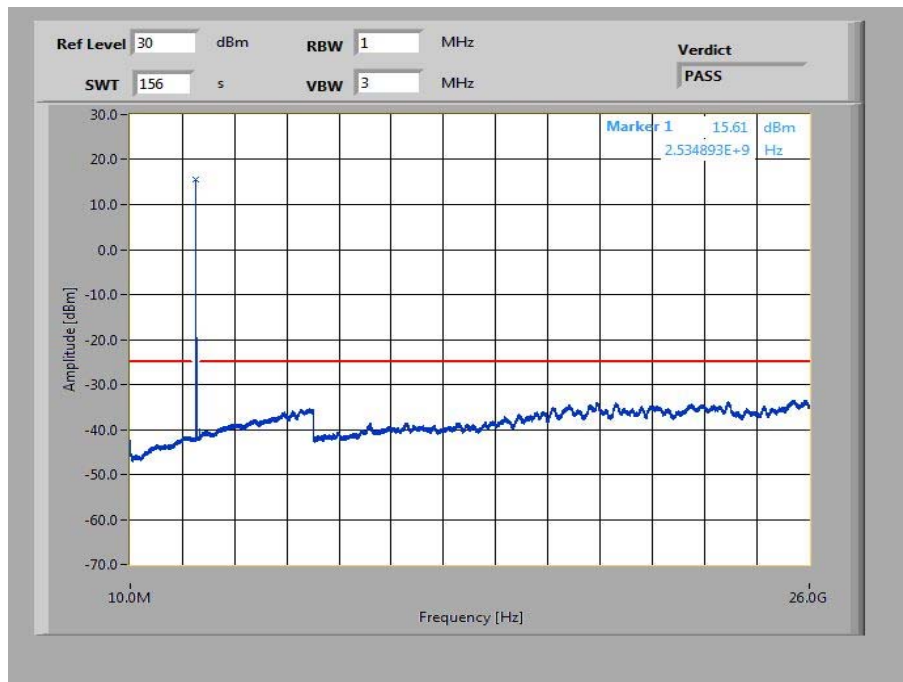**Plots for 5 MHz channel bandwidth - QPSK****Plot 1: Lowest channel. 10 MHz to 26 GHz****Plot 2: Middle channel. 10 MHz to 26 GHz**

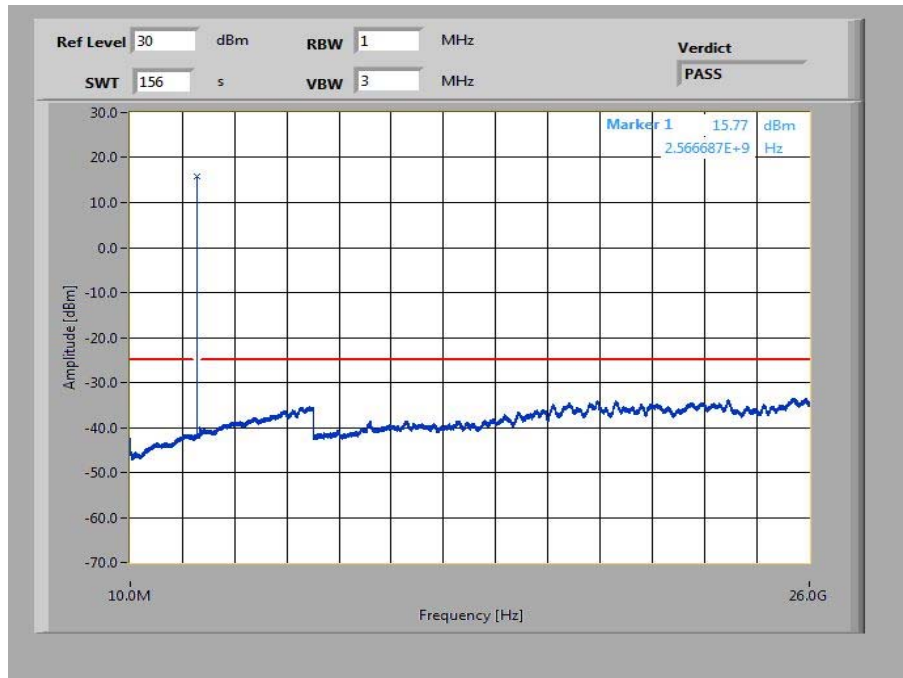
**Plot 3:** Highest channel. 10 MHz to 26 GHz

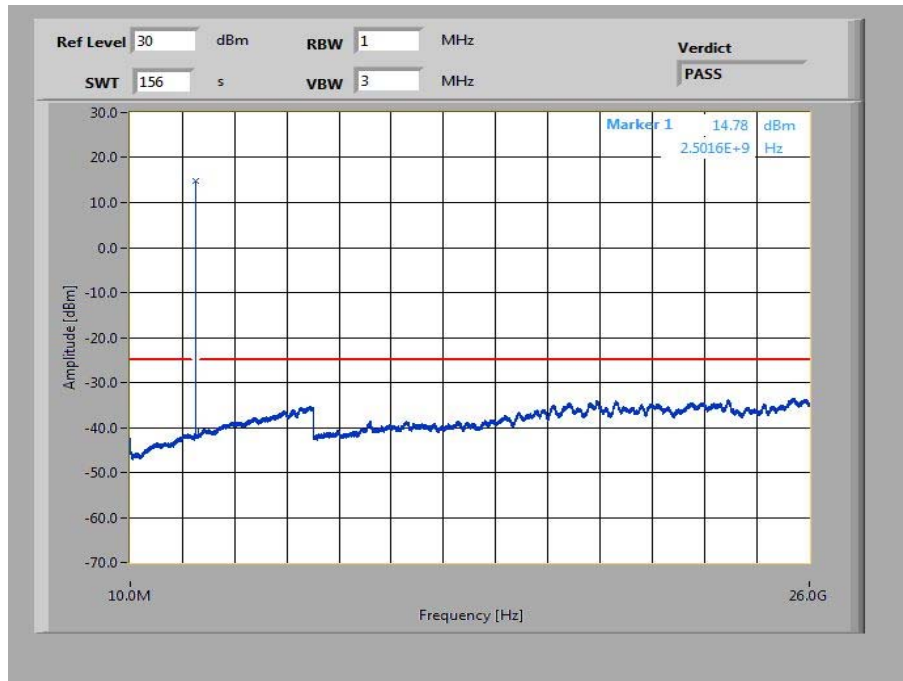
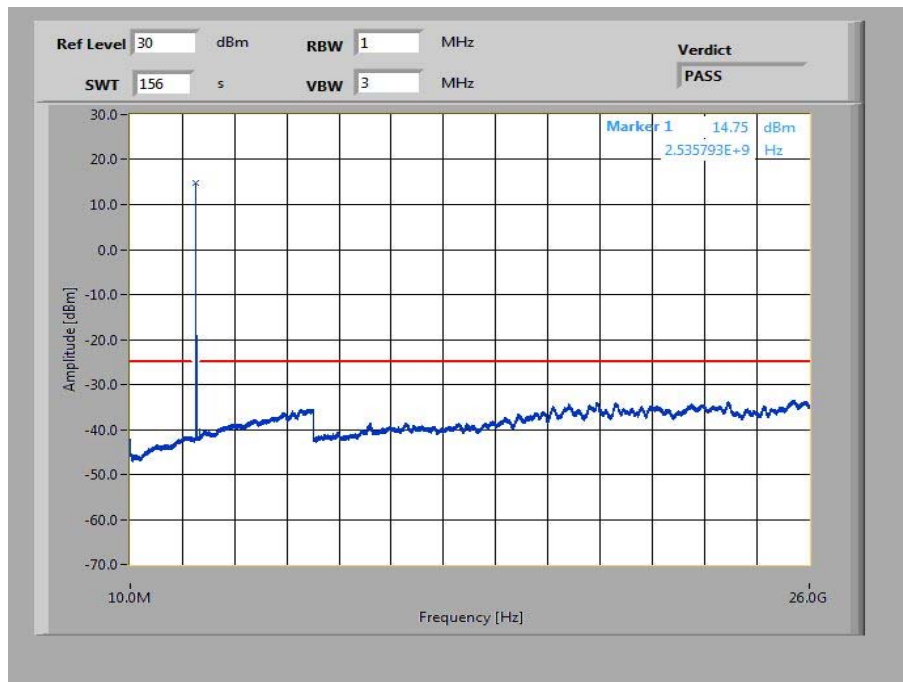
**Plots for 5 MHz channel bandwidth - 16-QAM****Plot 4:** Lowest channel. 10 MHz to 26 GHz**Plot 5:** Middle channel. 10 MHz to 26 GHz

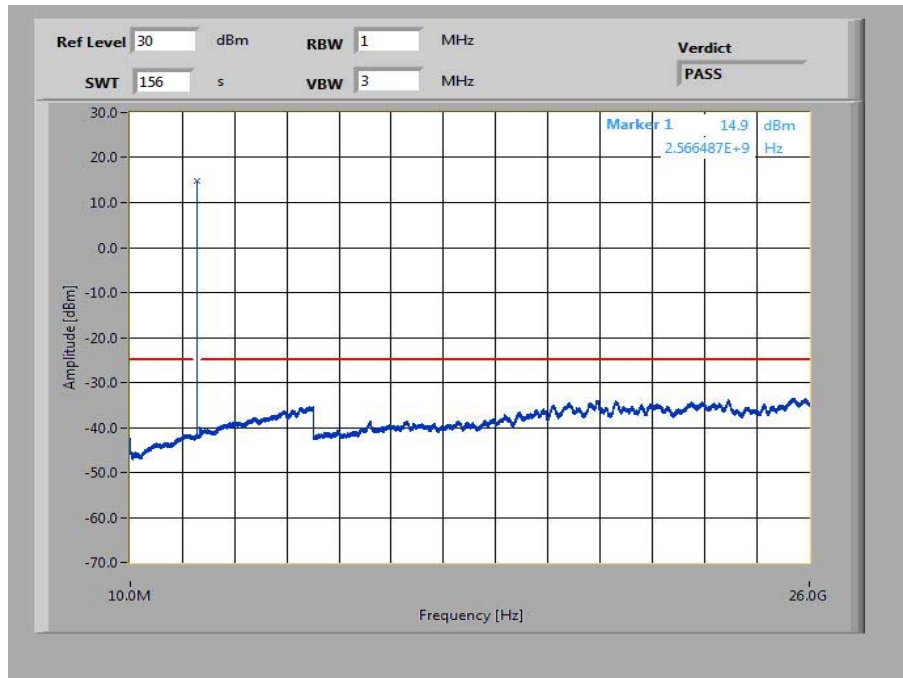
**Plot 6:** Highest channel. 10 MHz to 26 GHz

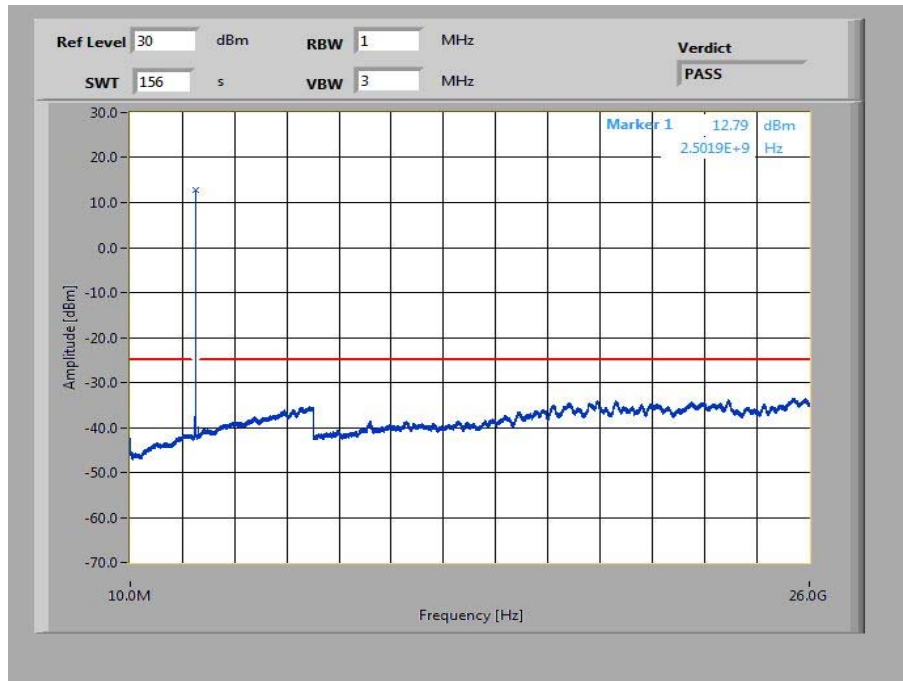
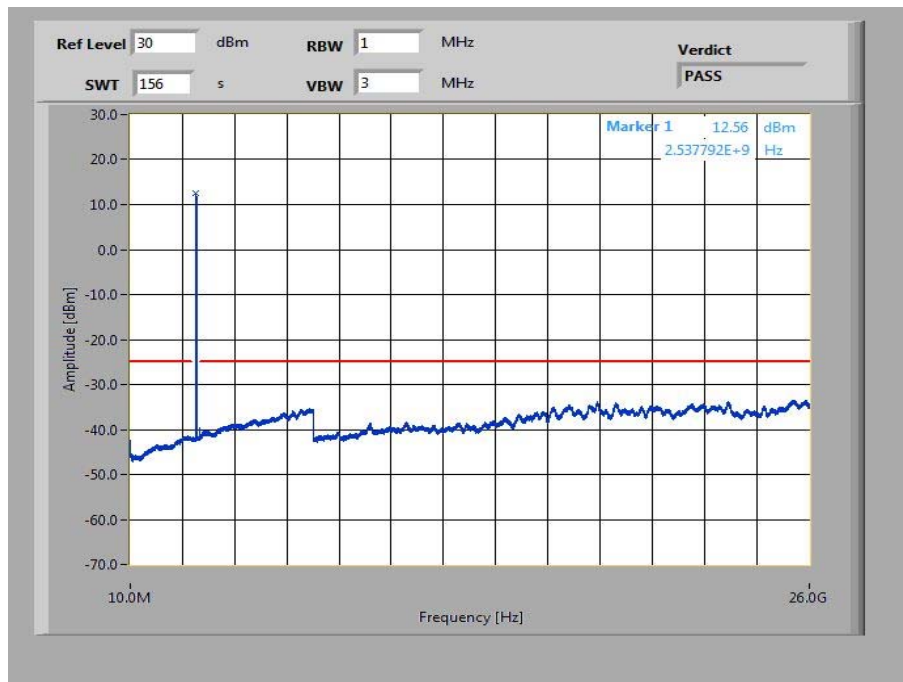
**Plots for 10 MHz channel bandwidth - QPSK****Plot 1: Lowest channel. 10 MHz to 26 GHz****Plot 2: Middle channel. 10 MHz to 26 GHz**

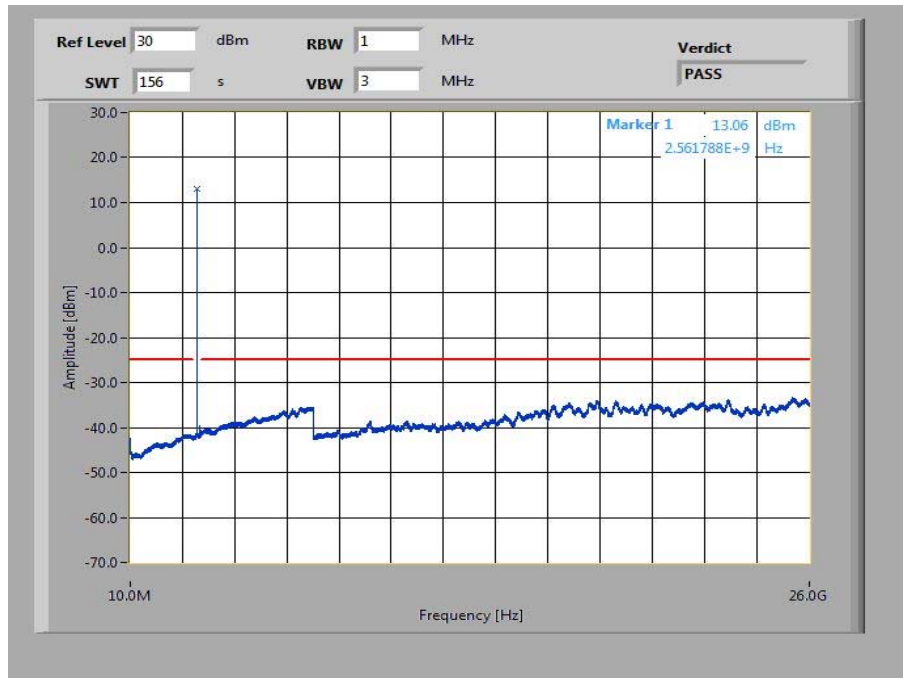




**Plot 3:** Highest channel. 10 MHz to 26 GHz

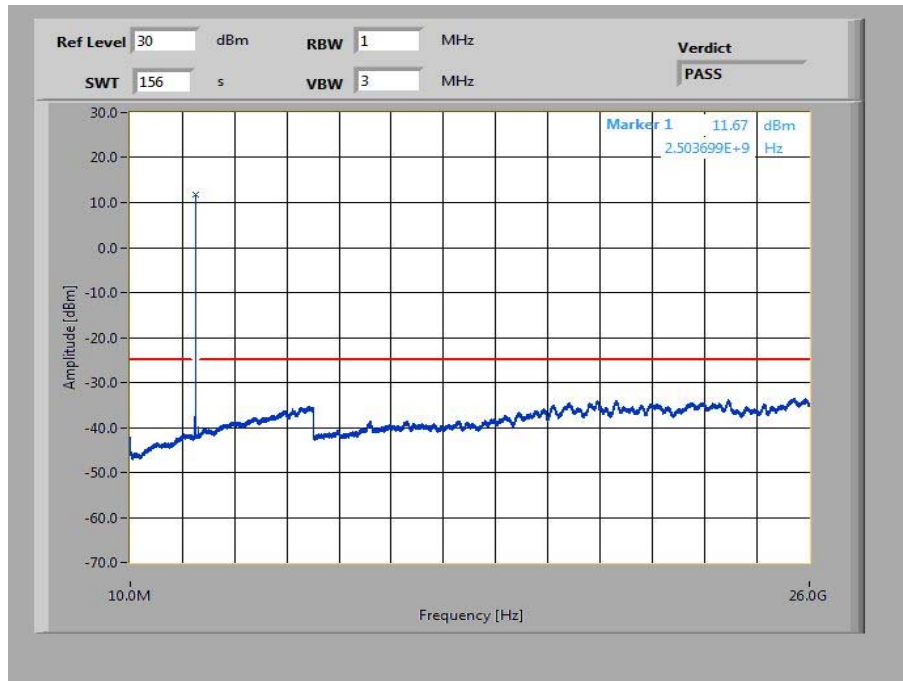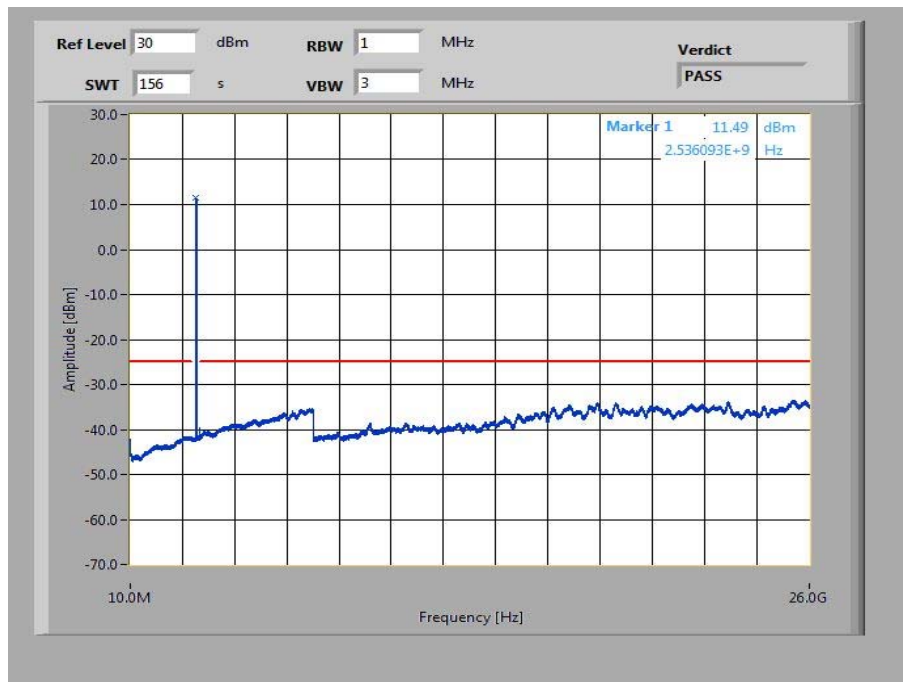
**Plots for 10 MHz channel bandwidth - 16-QAM****Plot 4: Lowest channel. 10 MHz to 26 GHz****Plot 5: Middle channel. 10 MHz to 26 GHz**


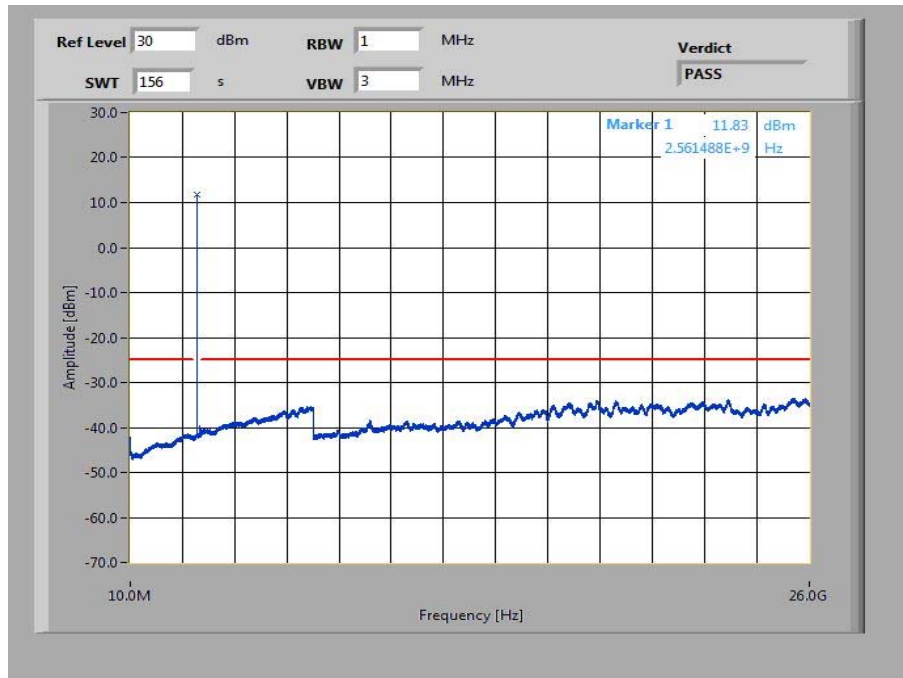
**Plot 6:** Highest channel. 10 MHz to 26 GHz

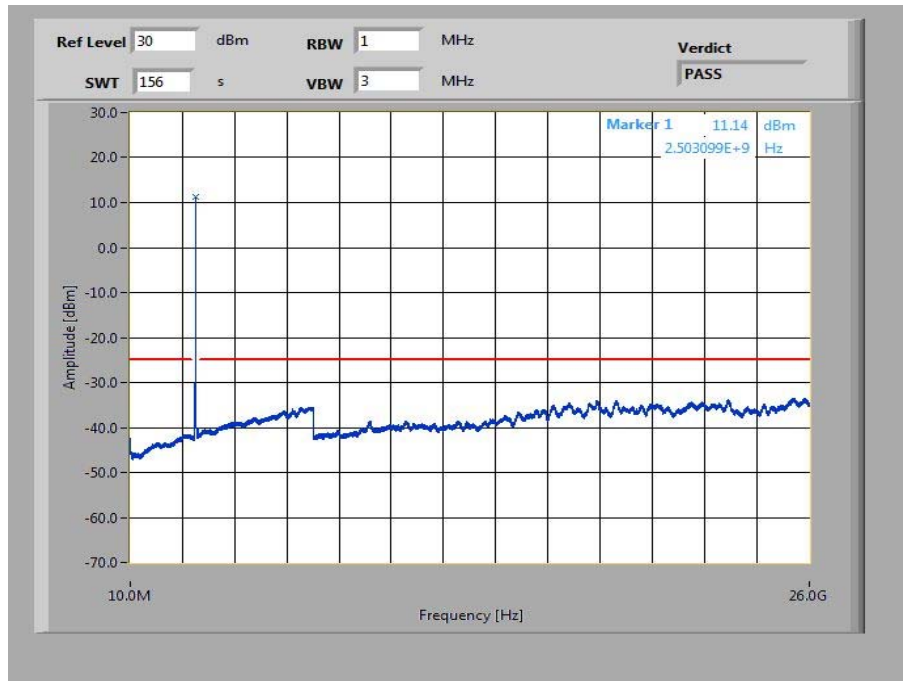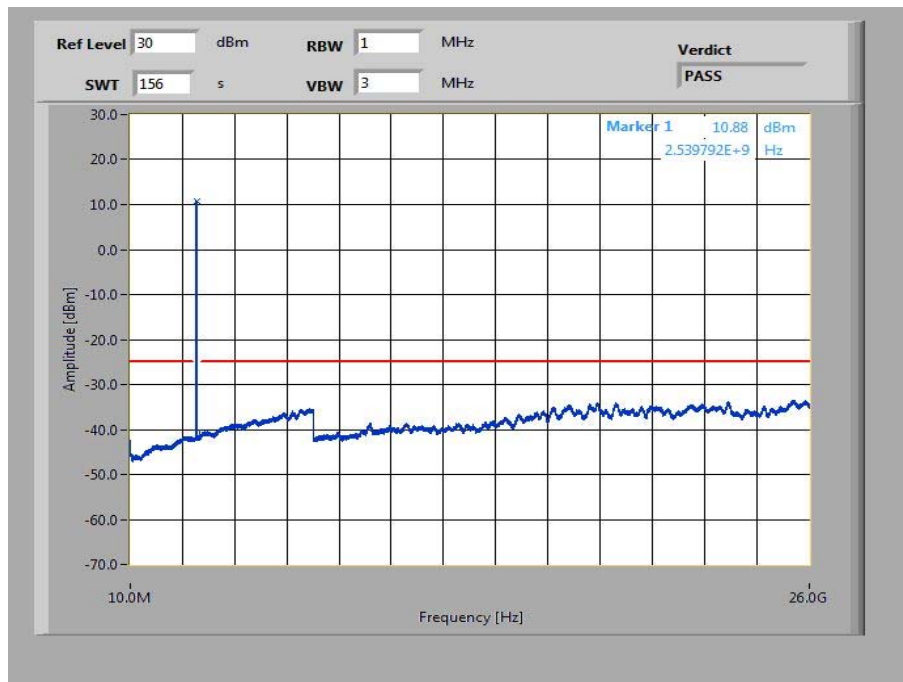**Plots for 15 MHz channel bandwidth. QPSK****Plot 1: Lowest channel. 10 MHz to 26 GHz****Plot 2: Middle channel. 10 MHz to 26 GHz**

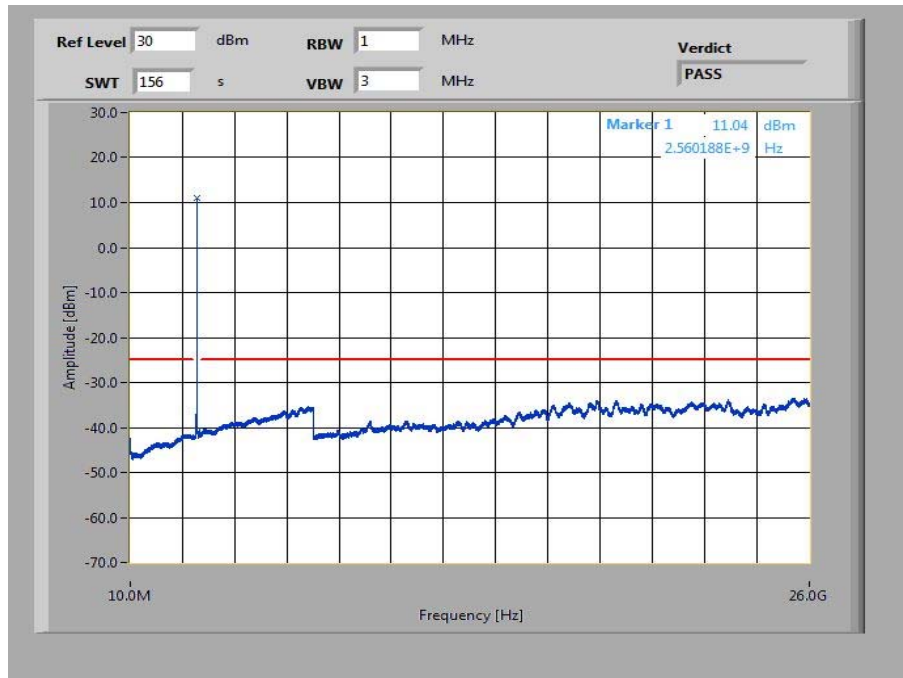
**Plot 3:** Highest channel. 10 MHz to 26 GHz

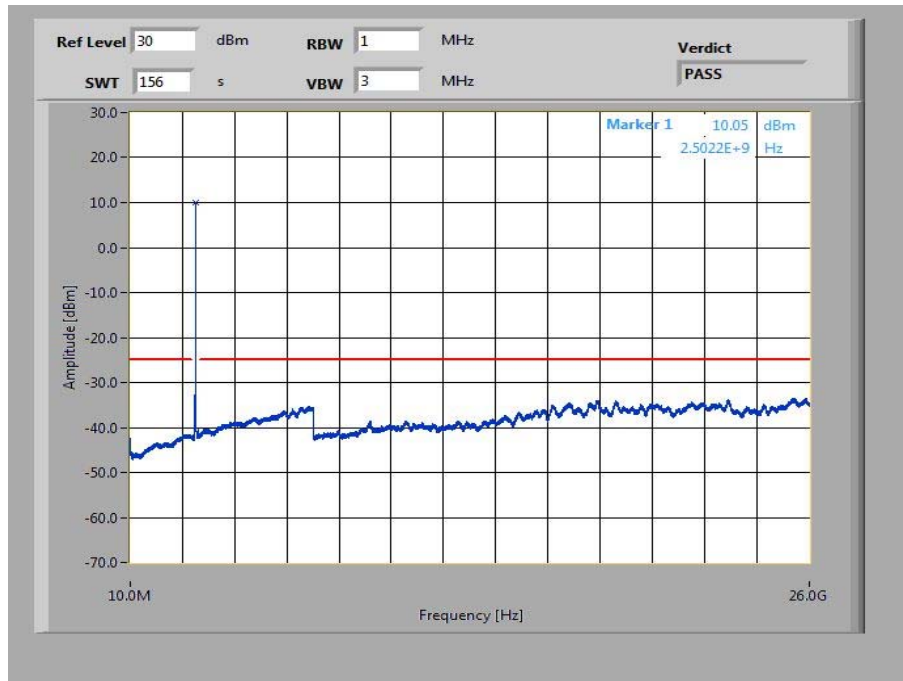
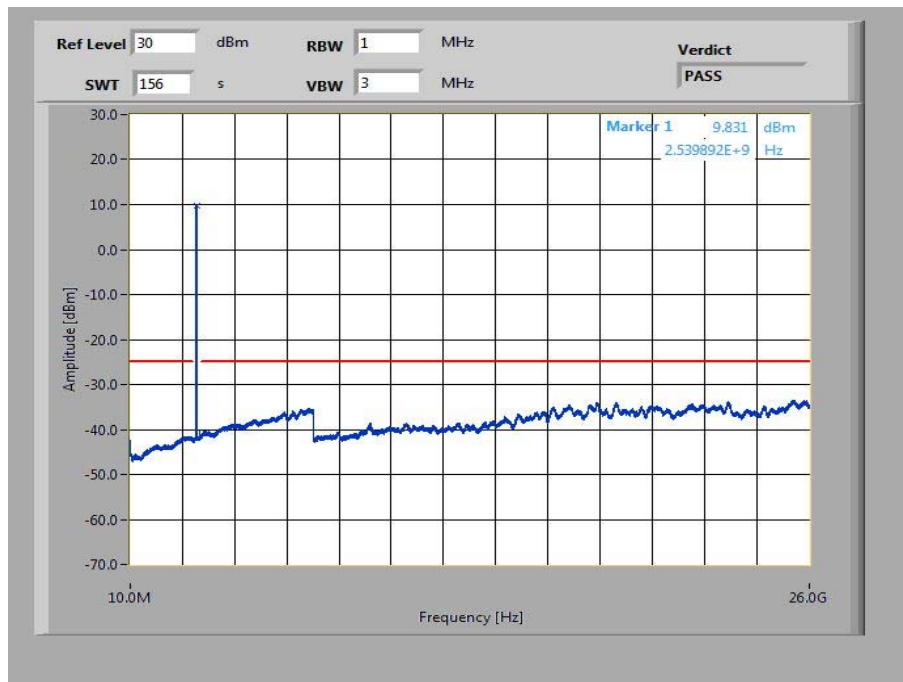
**Plots for 15 MHz channel bandwidth. 16-QAM****Plot 4: Lowest channel. 10 MHz to 26 GHz****Plot 5: Middle channel. 10 MHz to 26 GHz**

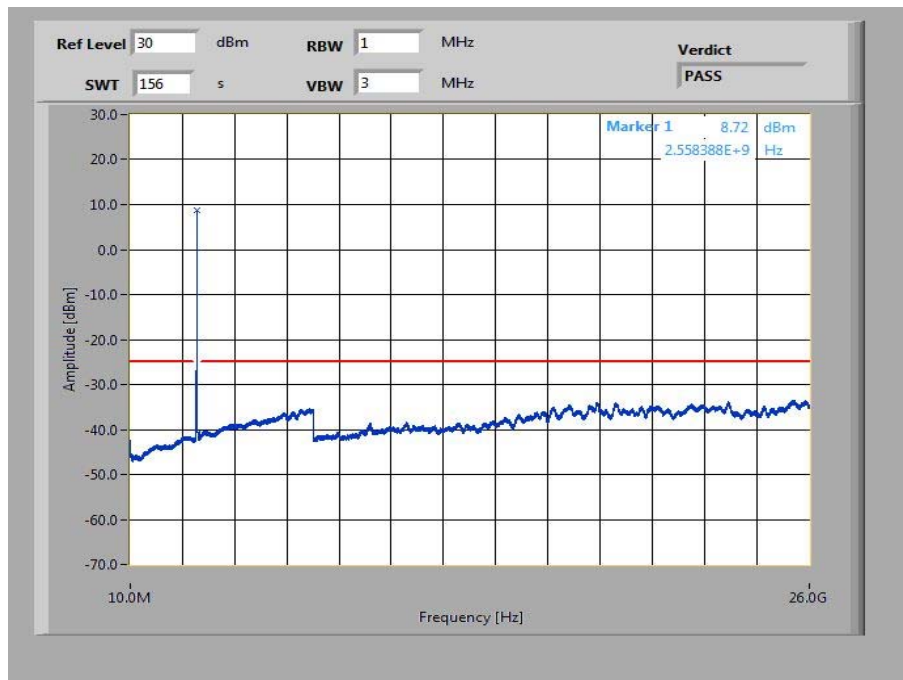
**Plot 6:** Highest channel. 10 MHz to 26 GHz

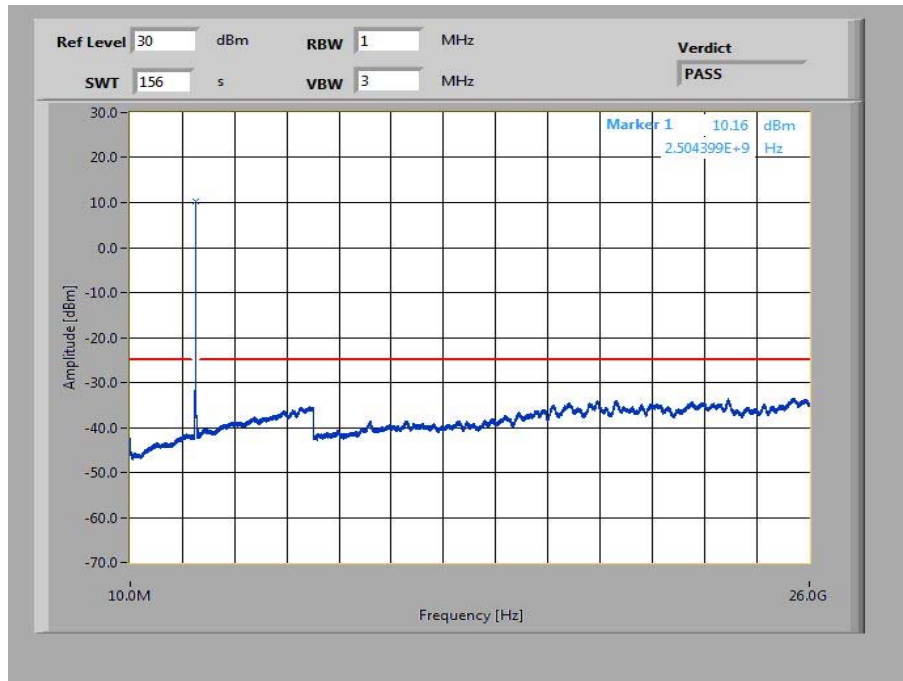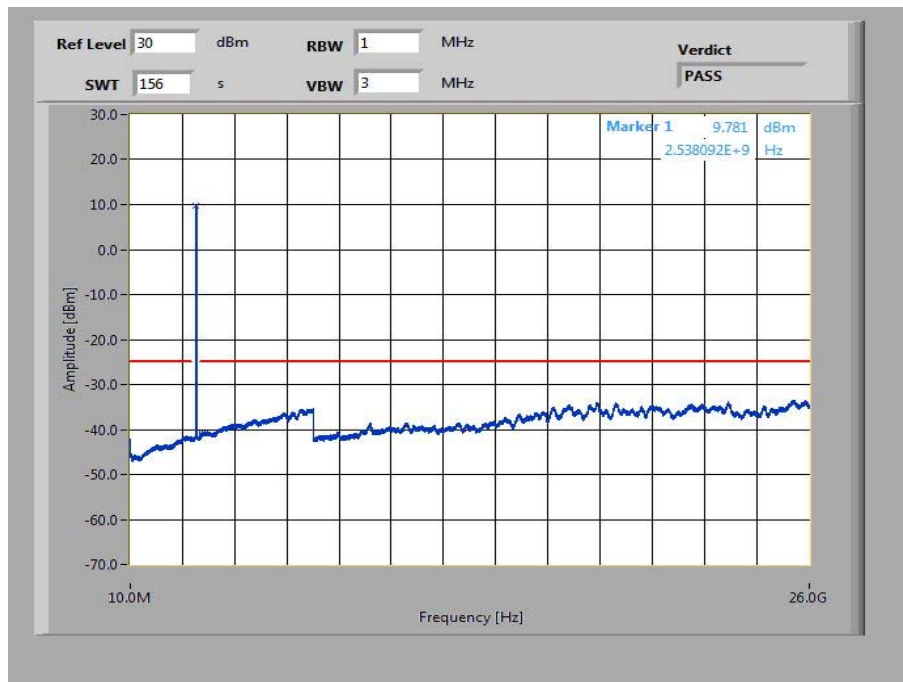**Plots for 20 MHz channel bandwidth. QPSK****Plot 1: Lowest channel. 10 MHz to 26 GHz****Plot 2: Middle channel. 10 MHz to 26 GHz**

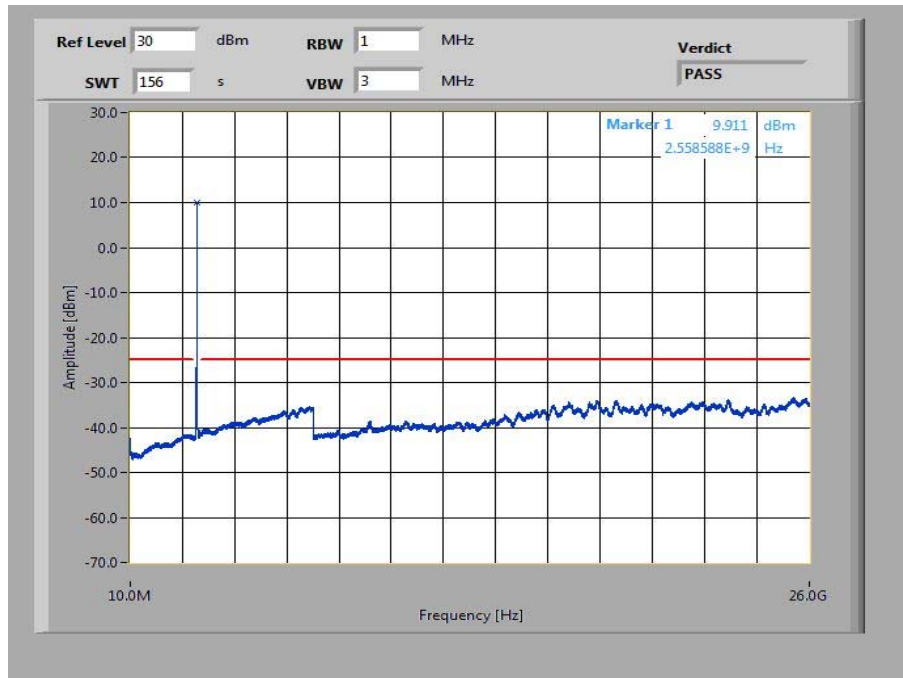

**Plot 3:** Highest channel. 10 MHz to 26 GHz

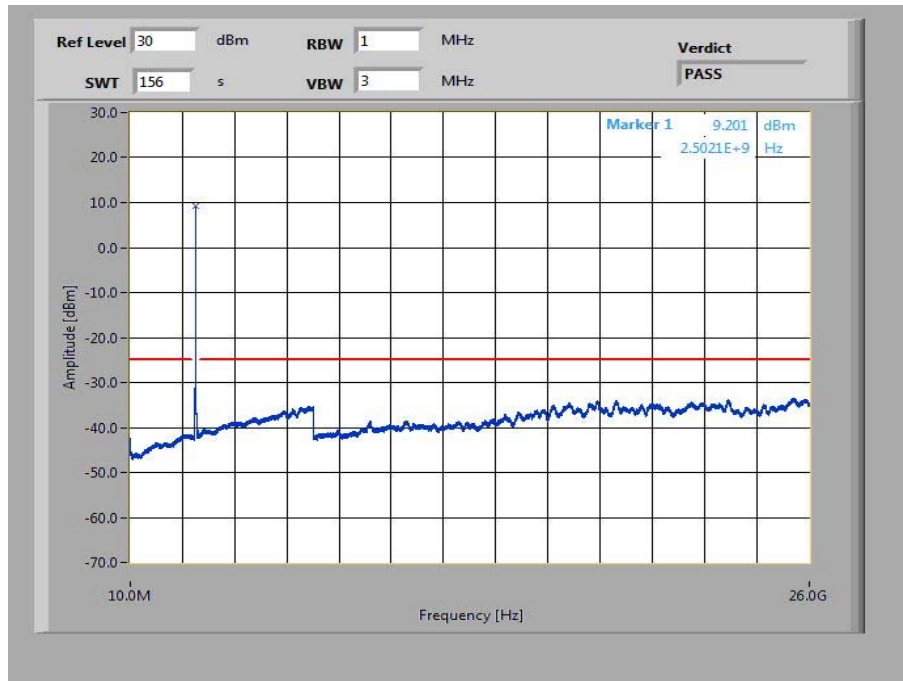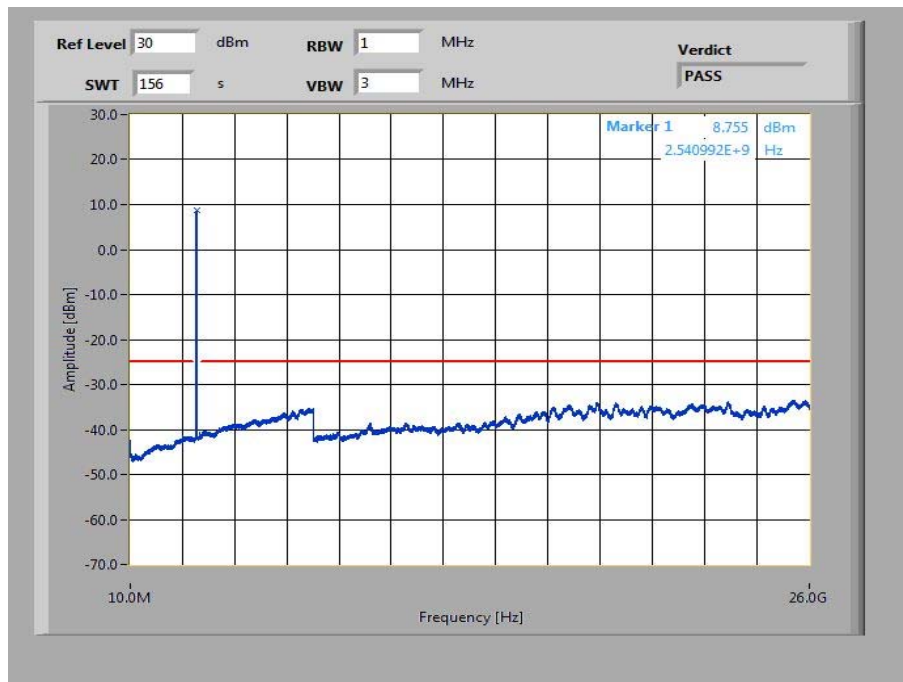**Plots for 20 MHz channel bandwidth. 16-QAM****Plot 4: Lowest channel. 10 MHz to 26 GHz****Plot 5: Middle channel. 10 MHz to 26 GHz**

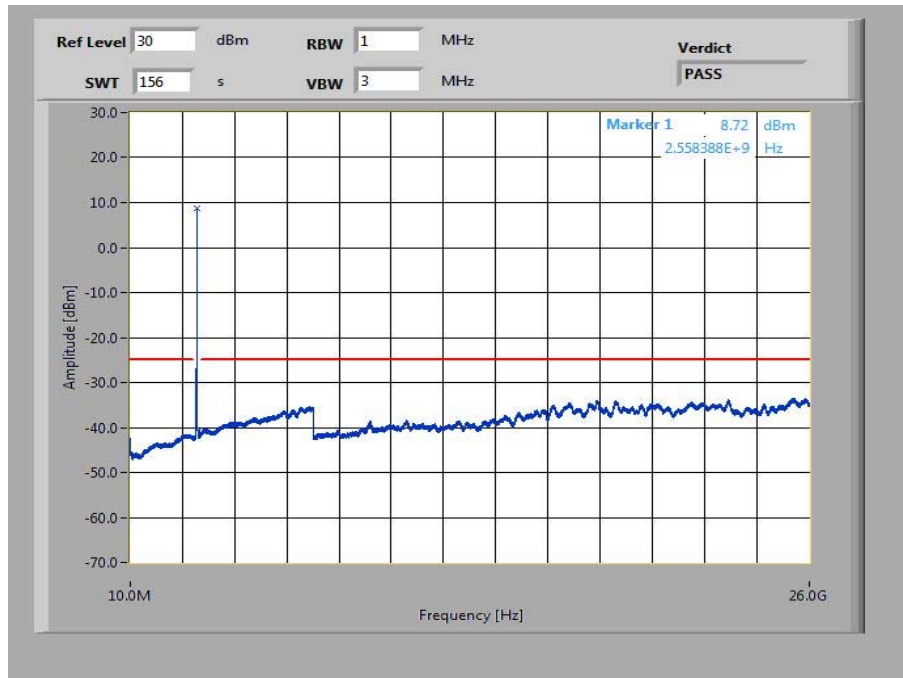**Plot 6:** Highest channel. 10 MHz to 26 GHz

### 11.2.5 Block edge compliance

#### Description:

The spectrum at the band edges must comply with the spurious emissions limits.

For the measurement the lowest and highest channel bandwidth was used. If spurious were found the other bandwidths were measured, too.

#### Measurement:


Measurement parameters	
Detector:	RMS
Sweep time:	30 sec.
Video bandwidth:	1% - 5% of the OBW
Resolution bandwidth:	$\geq 3 \times \text{RBW}$
Span:	5 MHz
Trace-Mode:	Max Hold
Used equipment:	see chapter 7.3 - A
Measurement uncertainty:	see chapter 8

#### Limits:


FCC	IC
Block Edge Compliance	
Equipment shall comply with the following unwanted emissions limits:	
<ol style="list-style-type: none"> <li>For base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least <math>43 + 10 \log_{10} p</math></li> <li>For mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least: <ol style="list-style-type: none"> <li><math>40 + 10 \log_{10} p</math> from the channel edges to 5 MHz away,</li> <li><math>43 + 10 \log_{10} p</math> between 5 MHz and X MHz from the channel edges, and</li> <li><math>55 + 10 \log_{10} p</math> at X MHz and beyond from the channel edges.</li> <li>in addition, the attenuation shall be not be less than <math>43 + 10 \log_{10} p</math> on all frequencies between 2490.5 MHz and 2496 MHz and <math>55 + 10 \log_{10} p</math> at or below 2490.5 MHz.</li> </ol> </li> </ol> <p>where p in (a) and (b) is the transmitter power measured in watts and X is 6 MHz or the equipment occupied bandwidth, whichever is greater.</p>	
-13 dBm	

## Results: 5 MHz channel bandwidth


### Plot 1: Lowest channel. QPSK modulation

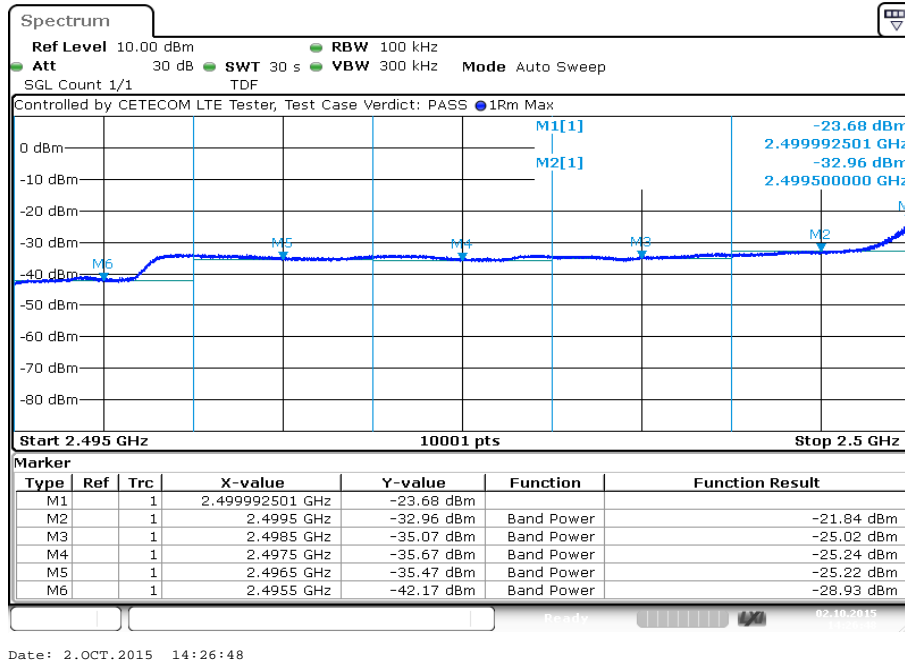


### Plot 2: Highest channel. QPSK modulation

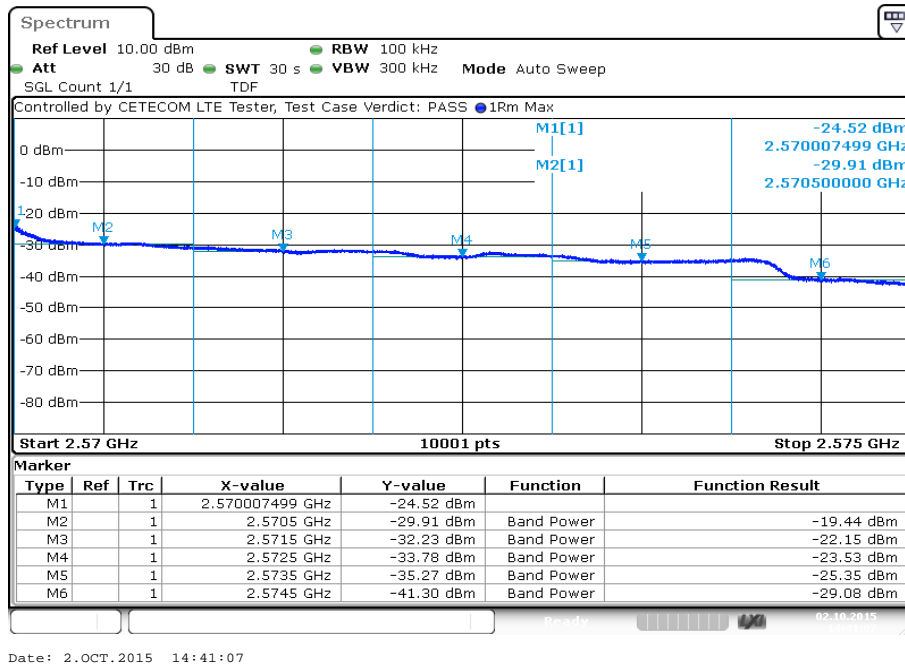

Plot 3: Lowest channel. 16 – QAM modulation

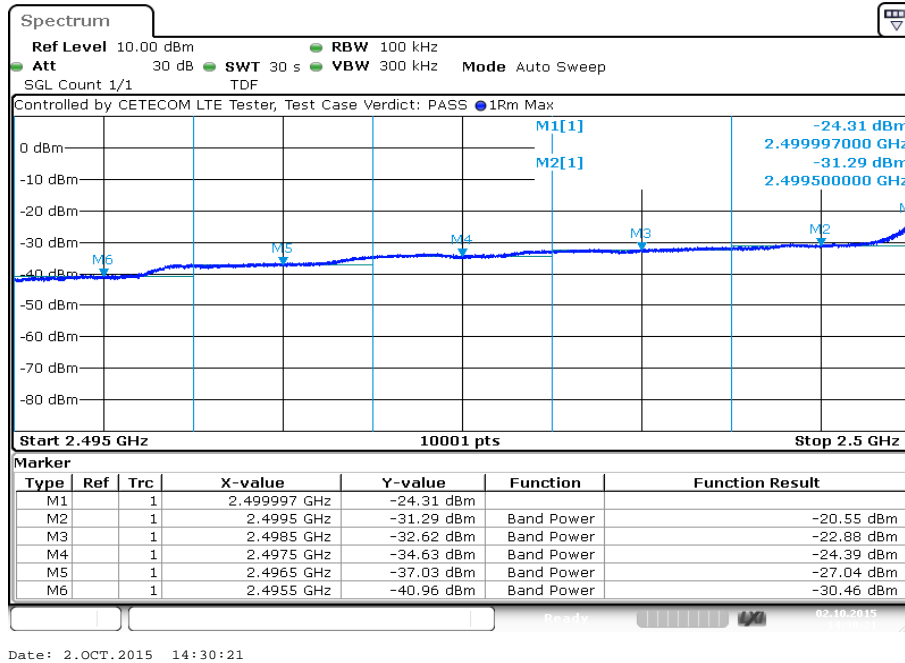


Plot 4: Highest channel. 16 – QAM modulation

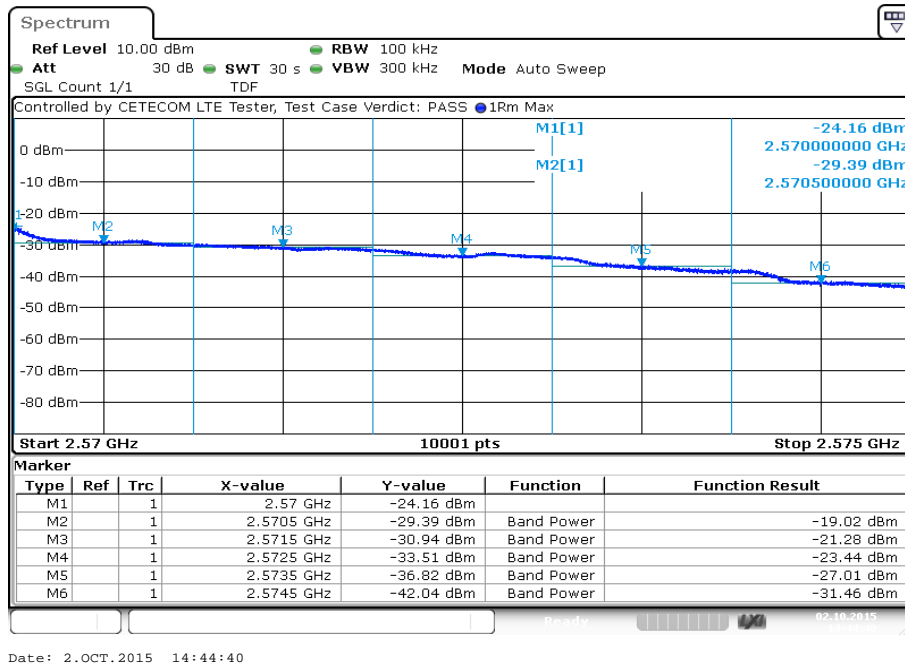


## Results: 10 MHz channel bandwidth


### Plot 1: Lowest channel. QPSK modulation

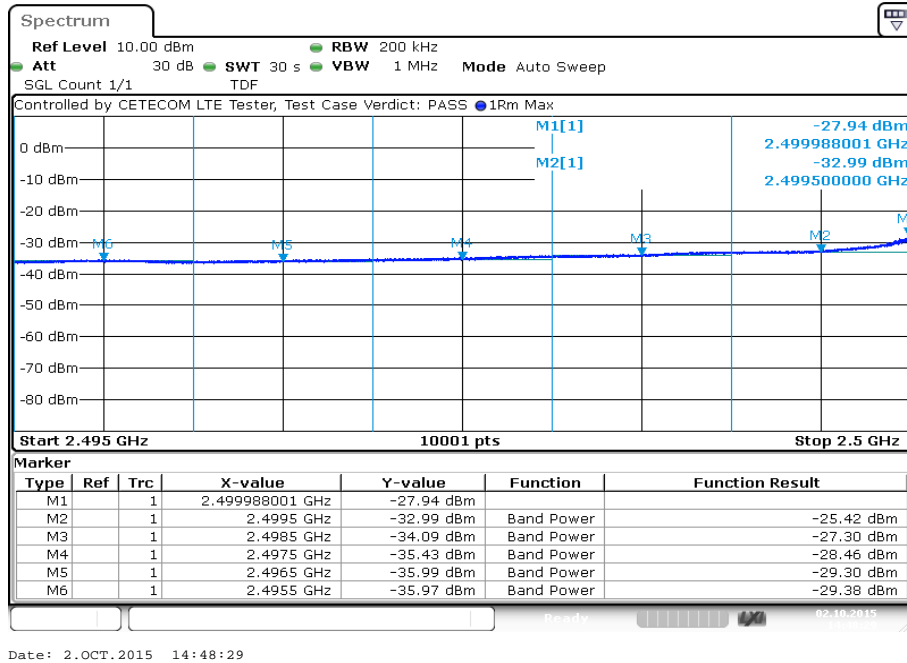


### Plot 2: Highest channel. QPSK modulation

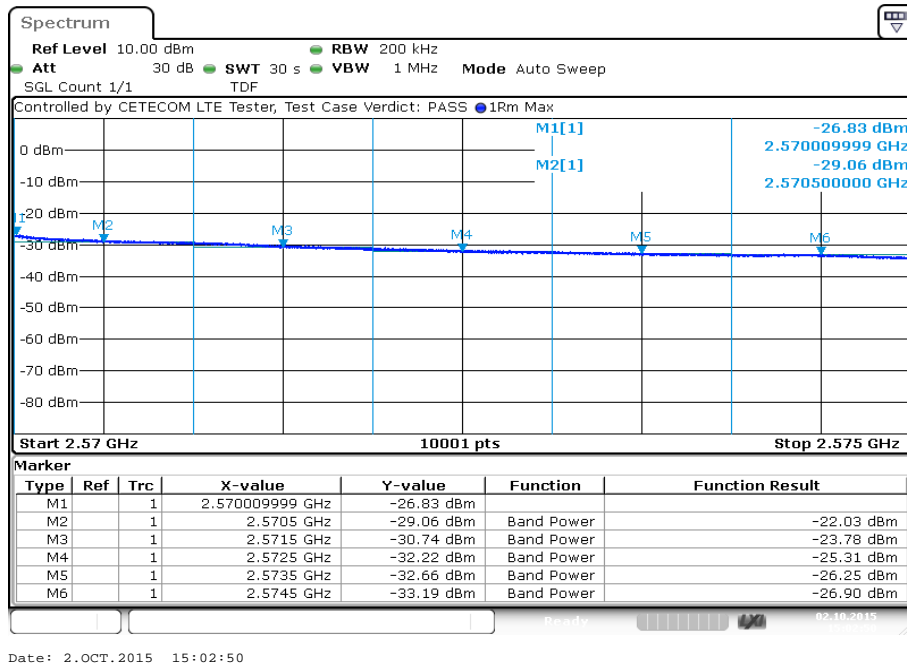

Plot 3: Lowest channel. 16 – QAM modulation

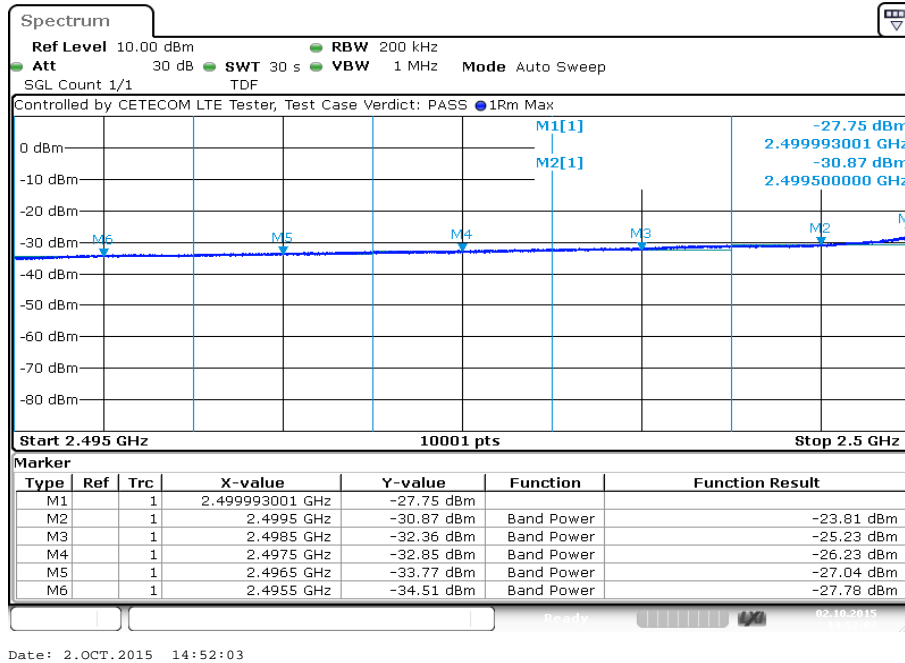


Plot 4: Highest channel. 16 – QAM modulation

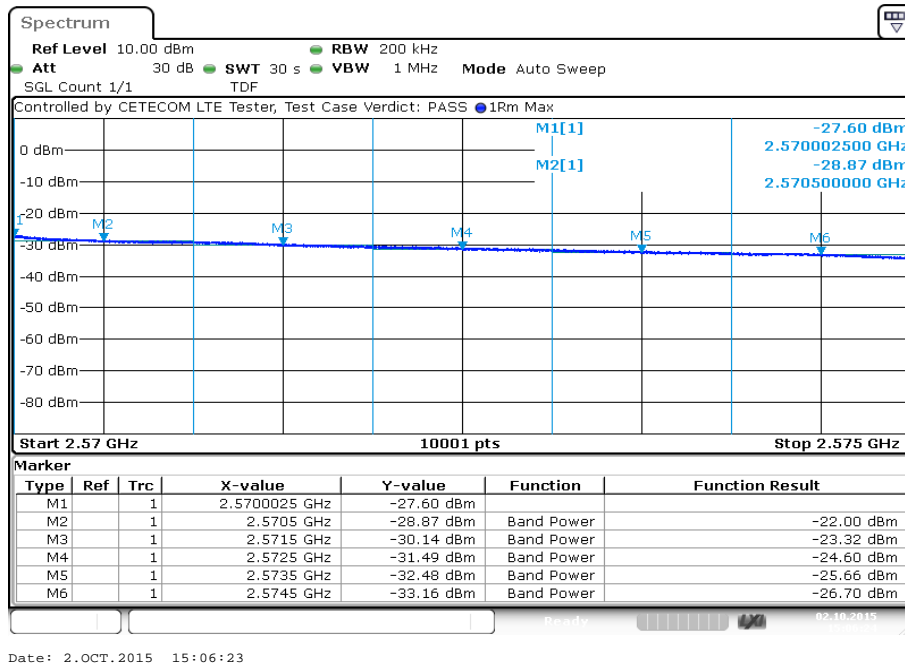




## Results: 15 MHz channel bandwidth


### Plot 1: Lowest channel. QPSK modulation

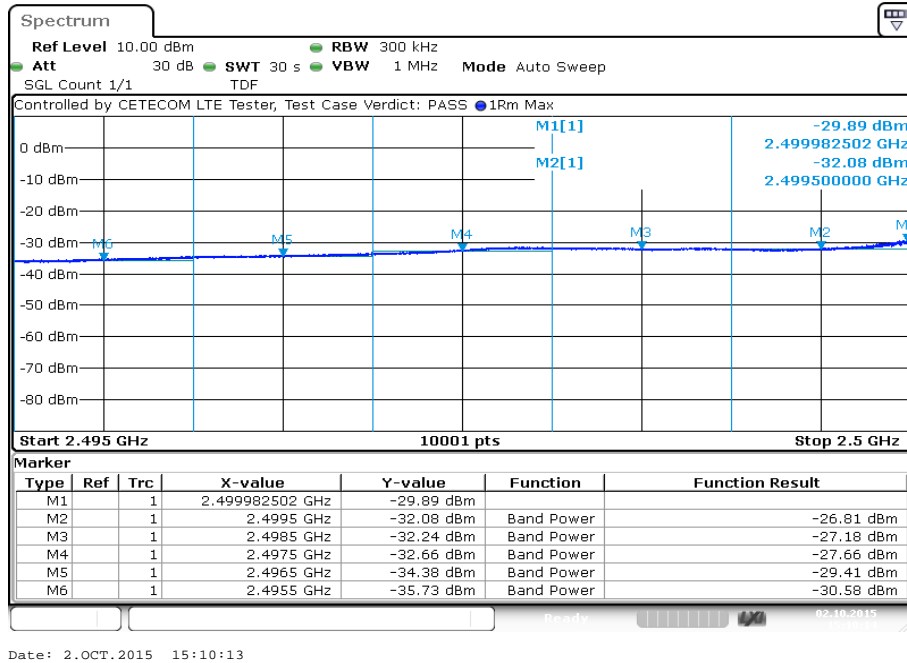


### Plot 2: Highest channel. QPSK modulation

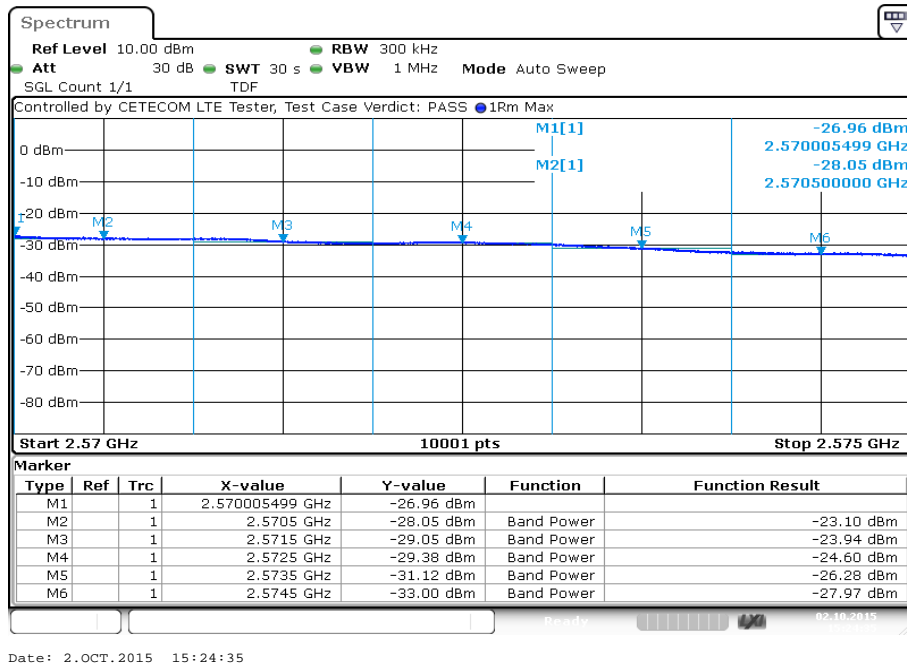

Plot 3: Lowest channel. 16 – QAM modulation

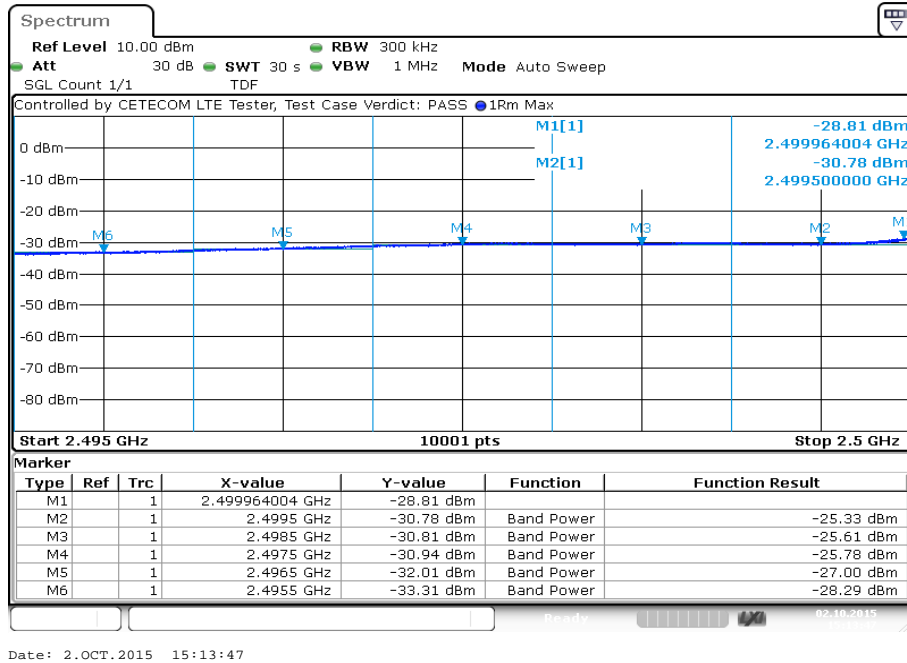


Plot 4: Highest channel. 16 – QAM modulation

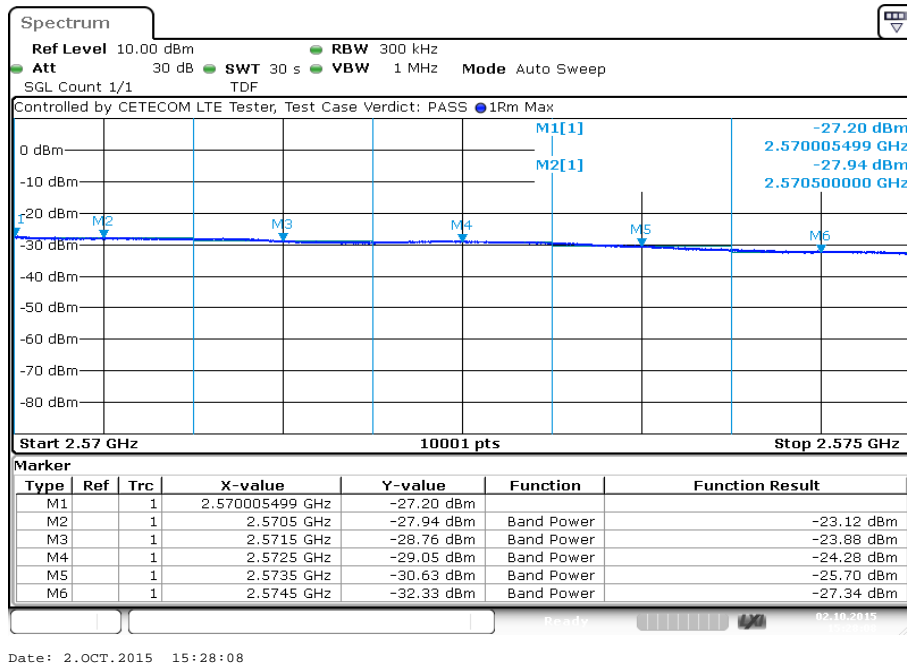


## Results: 20 MHz channel bandwidth


### Plot 1: Lowest channel. QPSK modulation

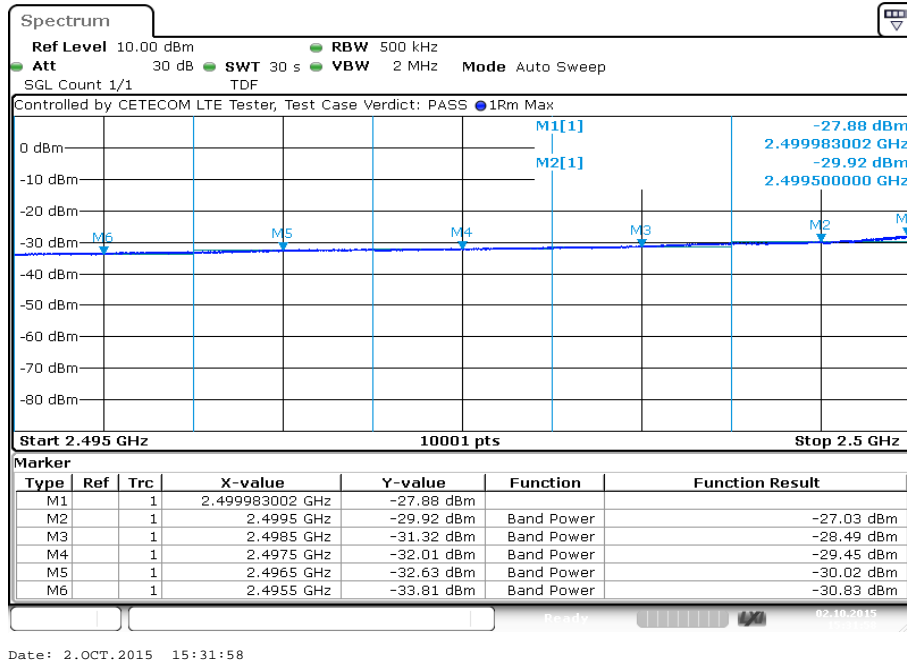


### Plot 2: Highest channel. QPSK modulation

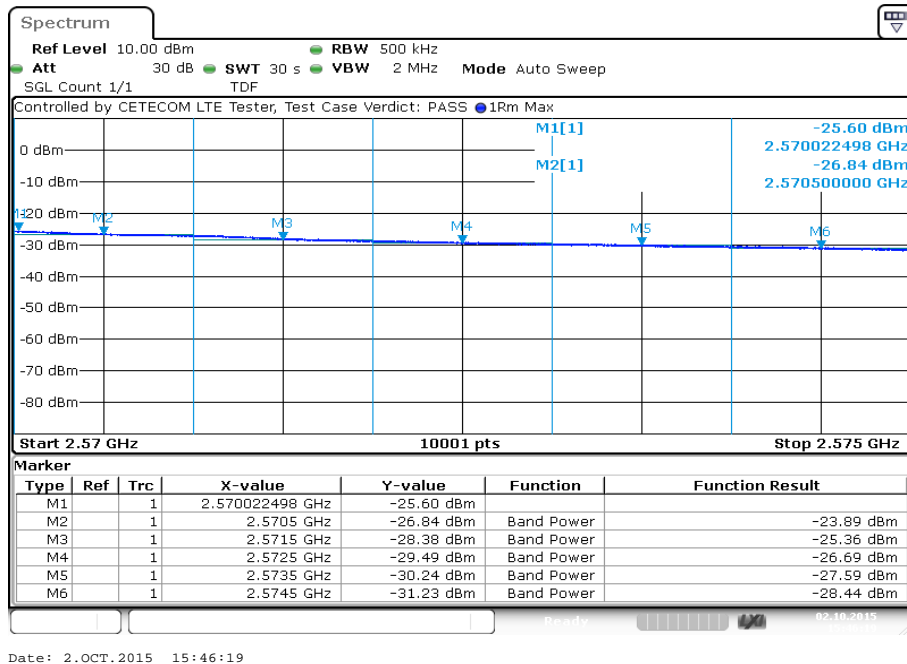

Plot 3: Lowest channel. 16 – QAM modulation

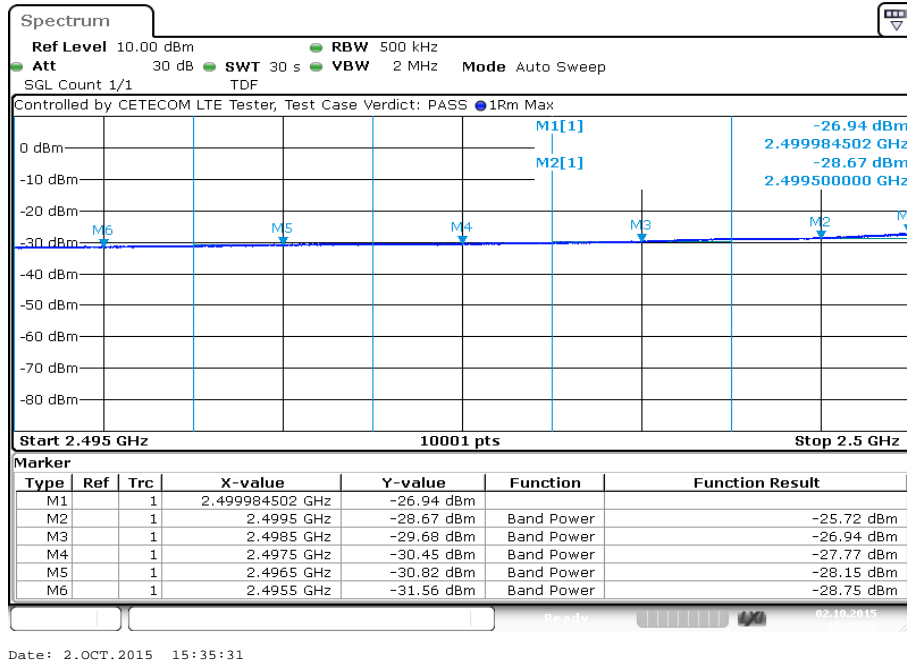

Plot 4: Highest channel. 16 – QAM modulation

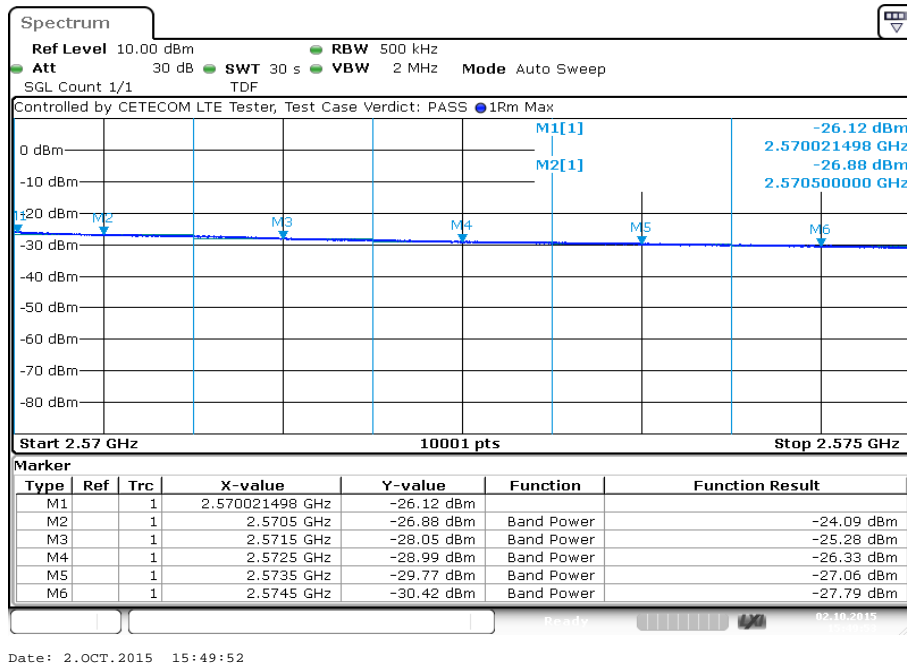

**11.2.6 Occupied bandwidth****Description:**

Measurement of the occupied bandwidth of the transmitted signal.

**Measurement:**

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the mid frequencies of the LTE band 7. The table below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Measurement parameters	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1% - 5% of the OBW
Video bandwidth:	≥ 3xRBW
Span:	2 x nominal BW
Trace-Mode:	Max Hold
Used equipment:	see chapter 7.3-A
Measurement uncertainty:	see chapter 8



**Limits:**

FCC	IC
Occupied Bandwidth	
Spectrum must fall completely in the specified band	


**Results:**

Occupied Bandwidth - QPSK		
Bandwidth [MHz]	99% OBW (kHz)	-26 dBc BW (kHz)
5	5139.47	4978.5
10	10196.98	10031.0
15	15166.48	14752.5
20	20093.99	19826.0
Measurement uncertainty	± 100 kHz	


Occupied Bandwidth – 16-QAM		
Bandwidth [MHz]	99% OBW (kHz)	-26 dBc BW (kHz)
5	5131.49	4969.5
10	10256.97	9181.0
15	15142.49	14686.5
20	20085.99	19842.0
Measurement uncertainty	± 100 kHz	

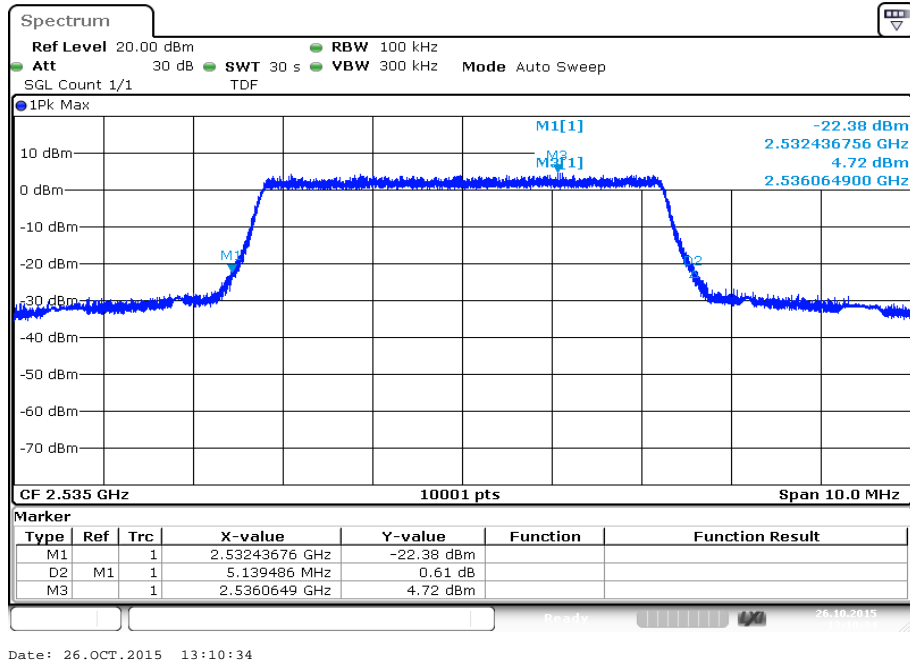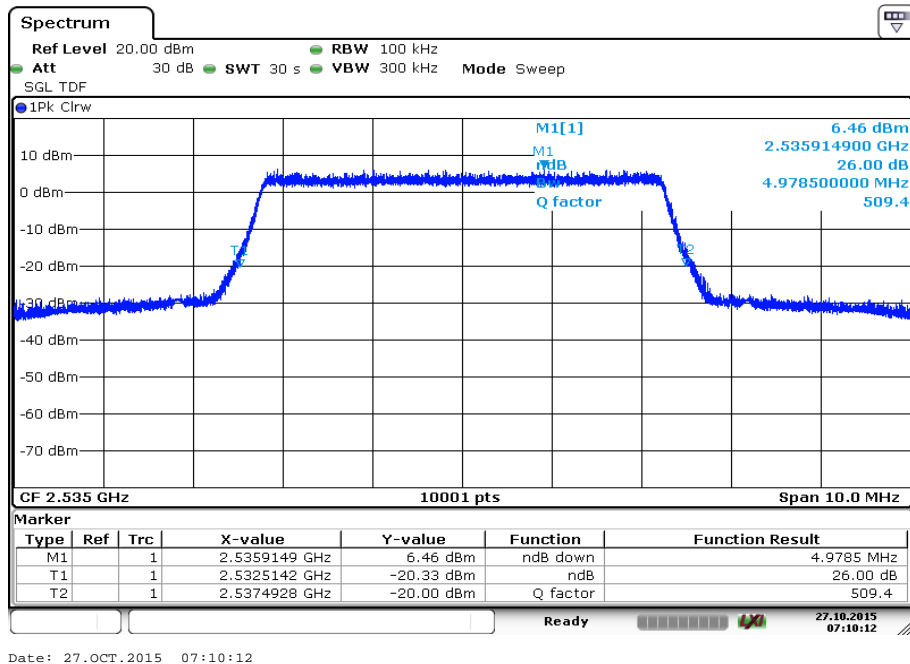**Plots: QPSK****Plot 1: 5 MHz, 99% OBW****Plot 2: 5 MHz, -26 dBc OBW**

Plot 3: 10 MHz, 99% OBW

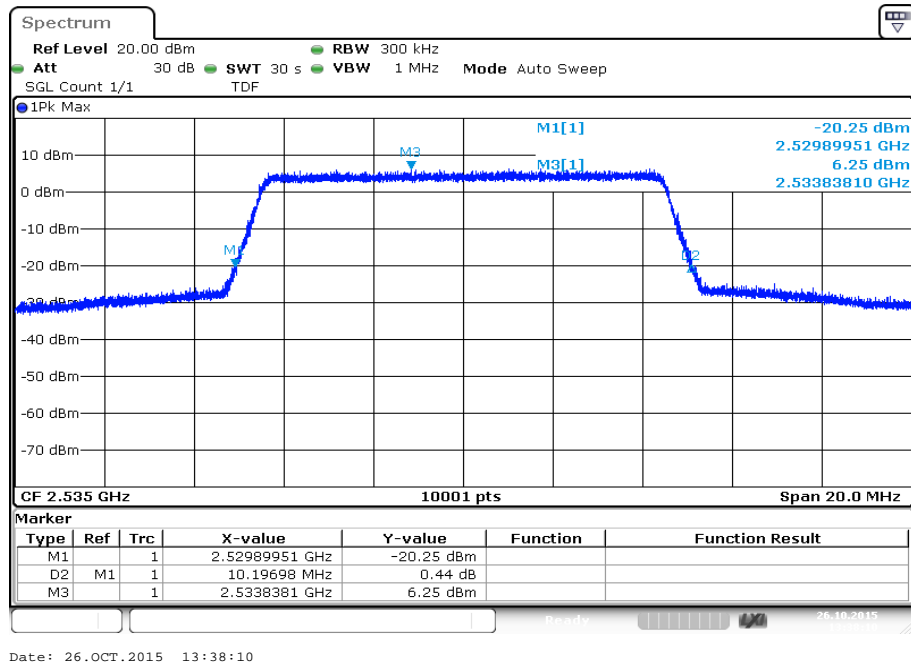


Plot 4: 10 MHz, -26 dBc OBW

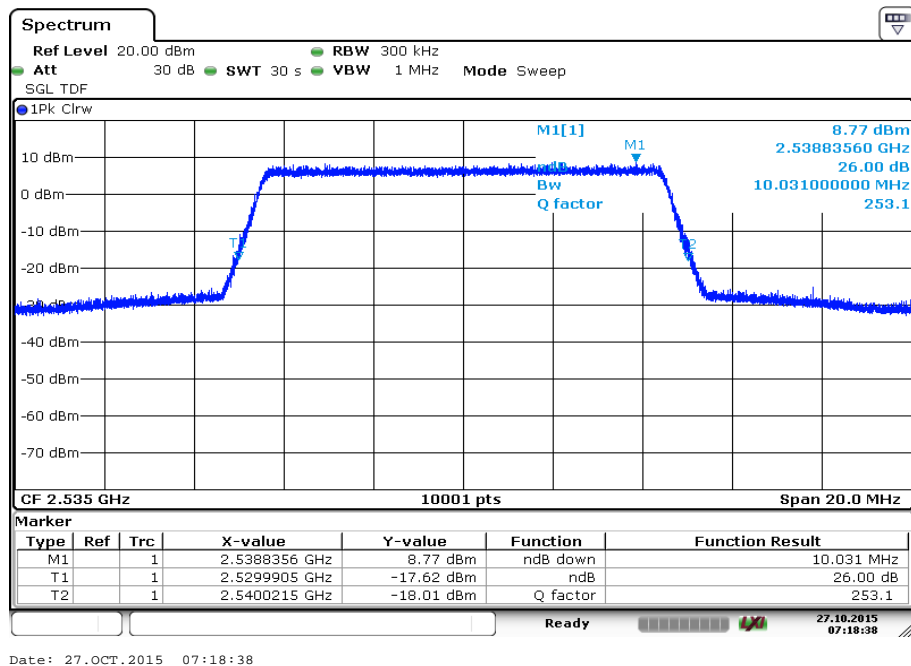





Plot 5: 15 MHz, 99% OBW

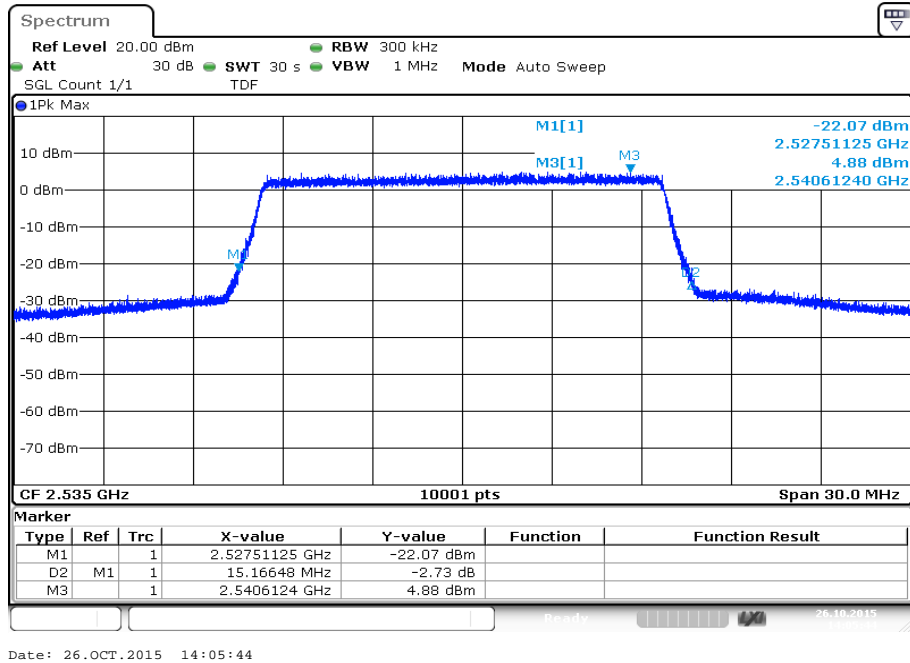


Plot 6: 15 MHz, -26 dBc OBW


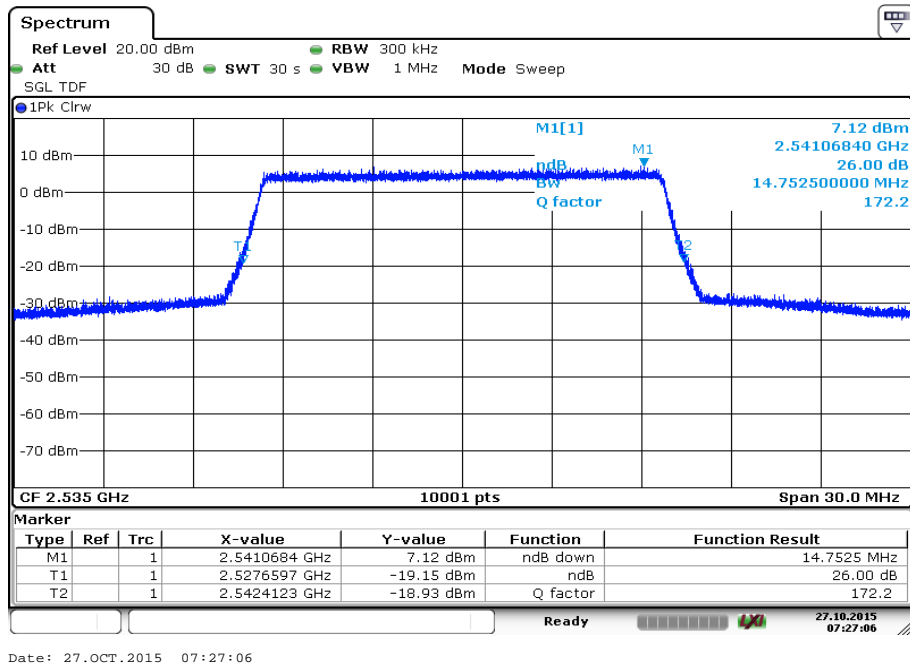


Plot 7: 20 MHz, 99% OBW

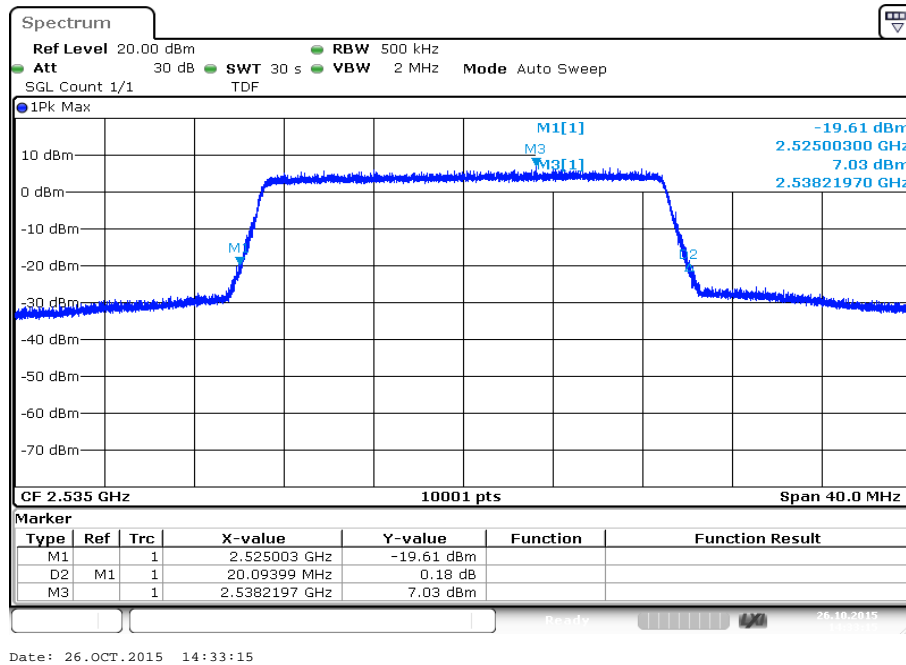


Plot 8: 20 MHz, -26 dBc OBW

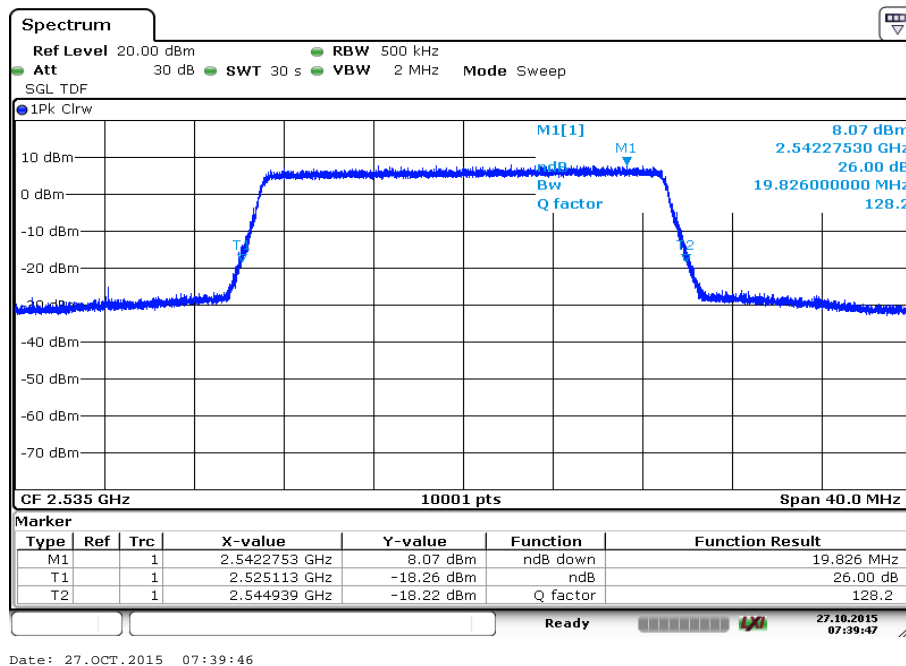


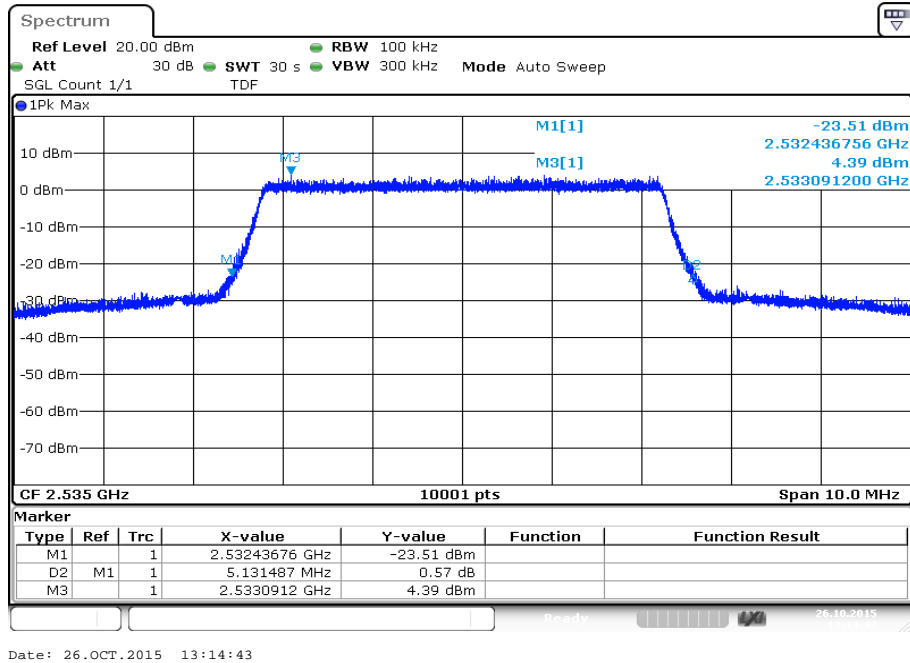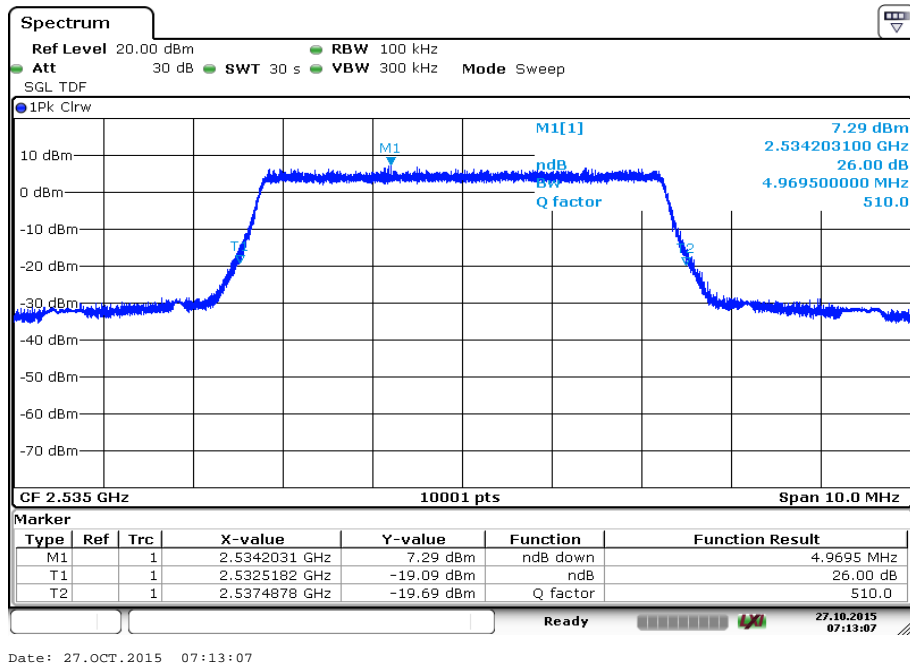**Plots: 16-QAM****Plot 1: 5 MHz, 99% OBW****Plot 2: 5 MHz, -26 dBc OBW**


Plot 3: 10 MHz, 99% OBW

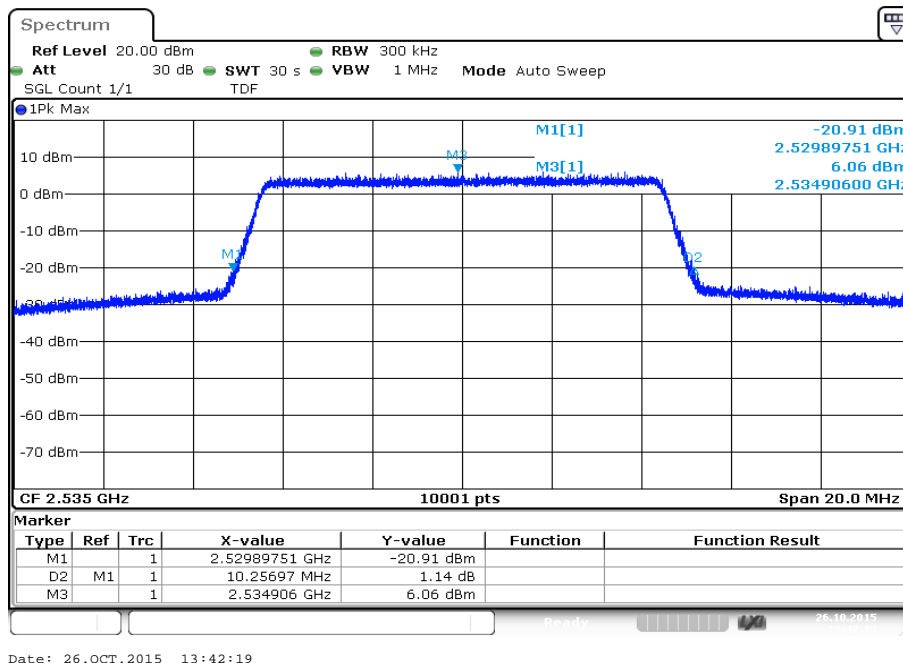


Plot 4: 10 MHz, -26 dBc OBW

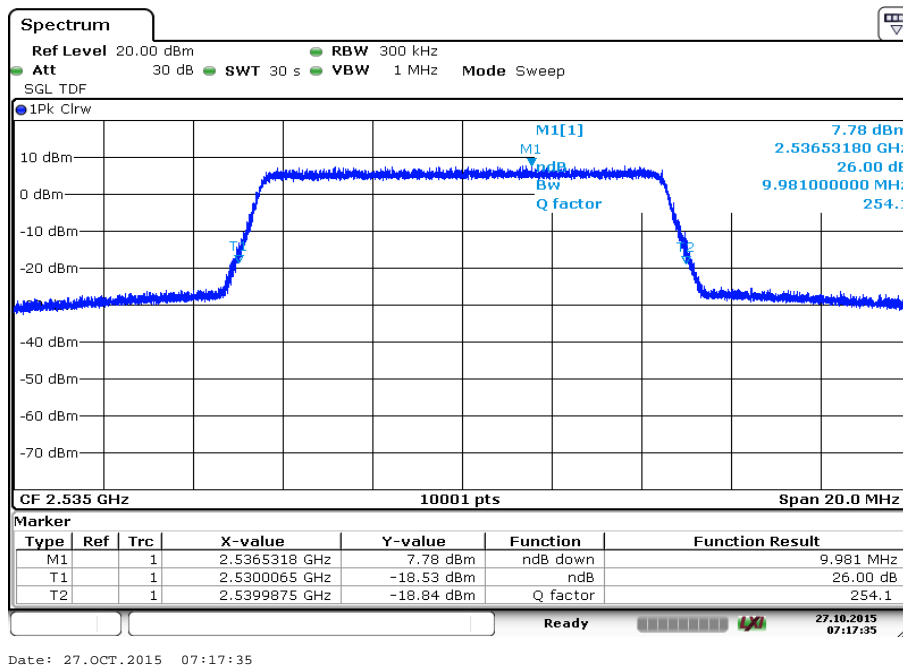


Plot 5: 15 MHz, 99% OBW

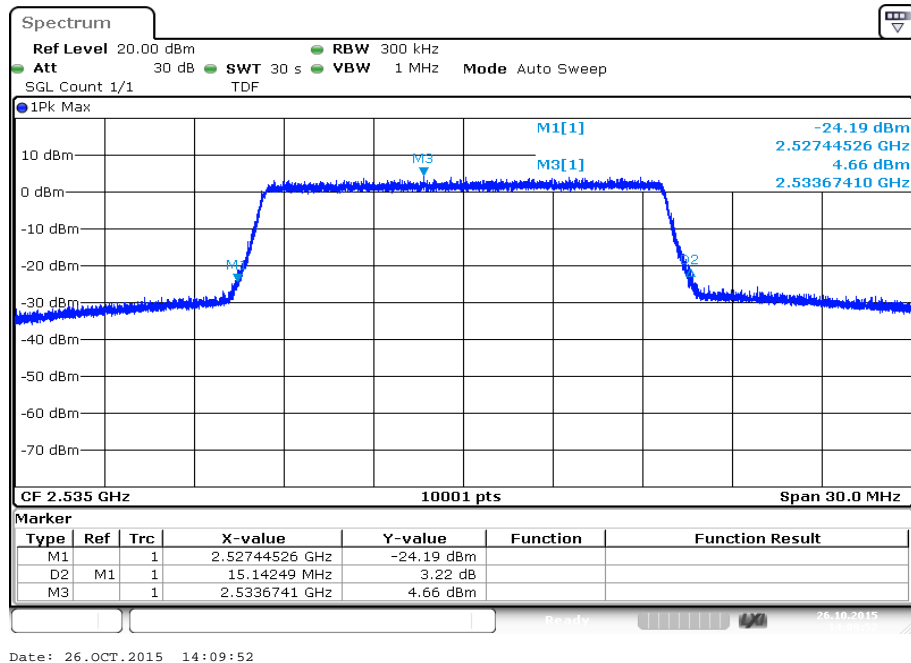


Plot 6: 15 MHz, -26 dBc OBW

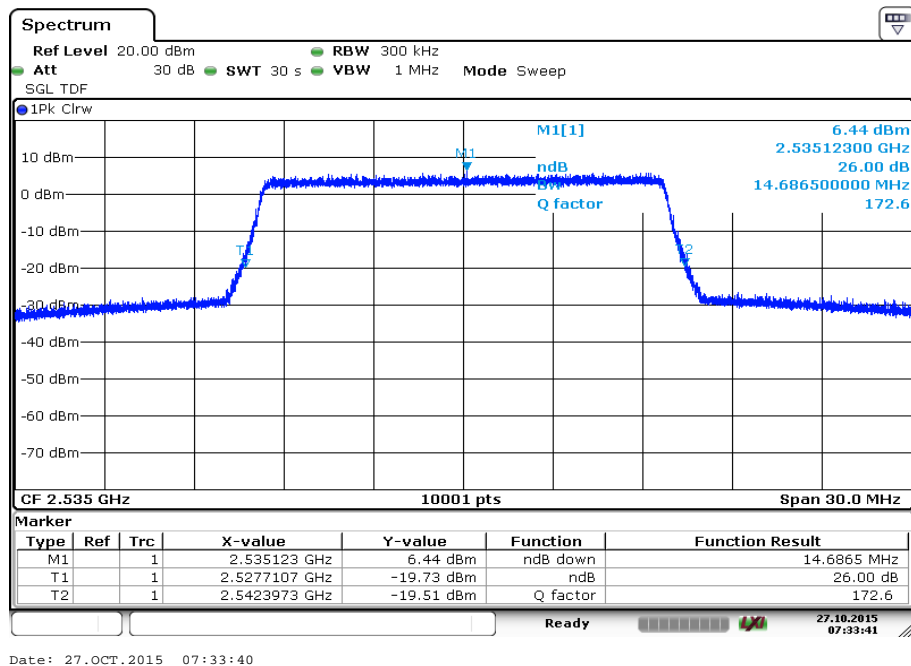

Plot 7: 20 MHz, 99% OBW

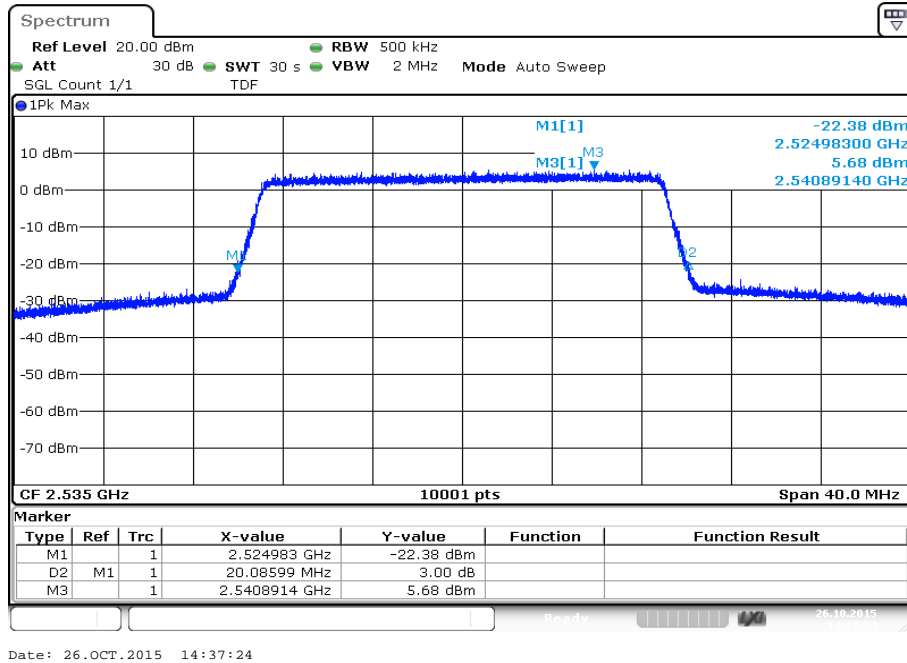

Plot 8: 20 MHz, -26 dBc OBW

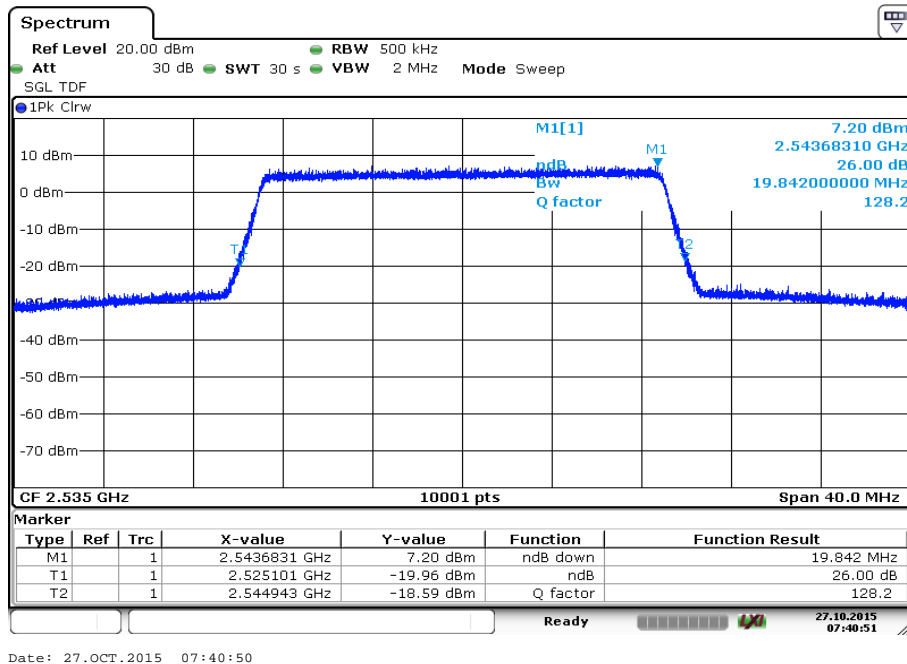

## 12 Observations

No observations except those reported with the single test cases have been made.

**Annex A Document history**

Version	Applied changes	Date of release
	Initial release	2015-11-12
-A	IC number removed; contact person changed	2016-05-12
-B		2016-05-31

**Annex B Further information****Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
PMN		Product marketing name
HMN		Host marketing name
HVIN		Hardware version identification number
FVIN		Firmware version identification number



## Annex C Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Beliehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
Unterzeichnerin der Multilateralen Abkommen  
von EA, ILAC und IAF zur gegenseitigen Anerkennung

### Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CETECOM ICT Services GmbH**  
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

**Funk**  
Mobilfunk (GSM / DCS) + OTA  
Elektromagnetische Verträglichkeit (EMV)  
Produktsicherheit  
SAR / EMF  
Umwelt  
Smart Card Technology  
Bluetooth®  
Automotive  
Wi-Fi-Services  
Kanadische Anforderungen  
US-Anforderungen  
Akustik  
Near Field Communication (NFC)

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 04.05.2016 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt, 04.05.2016

Siehe Hinweise auf der Rückseite

  
Im Auftrag Dipl.-Ing. (FH) Ralf Eigner  
Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
Spittelmarkt 10  
10117 Berlin

Standort Frankfurt am Main  
Europa-Allee 52  
60327 Frankfurt am Main

Standort Braunschweig  
Bundesallee 100  
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abl. L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iaf.nu](http://www.iaf.nu)

### Note:

The current certificate including annex can be received from CETECOM ICT Services GmbH on request.