



# SAR Test Report


## For


**Applicant Name:** Xwireless LLC  
**Address:** 11565 Old Georgetown Road, Rockville, MD, USA  
**EUT Name:** Tablet PC  
**Brand Name:** N/A  
**Model Number:** T10M

## Issued By

**Company Name:** BTF Testing Lab (Shenzhen) Co., Ltd.  
**Address:** F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

**Report Number:** BTF-SZ230303R-004  
47 CFR Part 2.1093 IEEE1528-2013 IEEE C95.1-2019  
KDB 447498 D01 KDB 447498 D04 KDB 865664 D01  
**Test Standards:** KDB 865664 D02 KDB 941225 D01 KDB 941225 D05  
KDB 941225 D06 KDB 248227 D01 KDB 616217 D04  
KDB 648474 D04 KDB 690783 D01  
**FCC ID:** 2ADLJ-T10M  
**Test Conclusion:** Pass  
**Test Date:** 2023-03-18 to 2023-03-20  
**Date of Issue:** 2023-03-21

**Prepared By:**   
Monica Zhou / Project Engineer  
**Date:** 2023-03-21  
**Approved By:**   
Ryan.CJ / EMC Manager  
**Date:** 2023-03-21



*Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.*

| Revision History |                                                                              |                   |
|------------------|------------------------------------------------------------------------------|-------------------|
| Version          | Issue Date                                                                   | Revisions Content |
| R_V0             | 2023-03-21                                                                   | Original          |
|                  |                                                                              |                   |
| Note:            | Once the revision has been made, then previous versions reports are invalid. |                   |

**Table of Contents**

|                                                              |     |
|--------------------------------------------------------------|-----|
| 1. Introduction .....                                        | 4   |
| 1.1 Identification of Testing Laboratory .....               | 4   |
| 1.2 Identification of the Responsible Testing Location ..... | 4   |
| 1.3 Laboratory Condition .....                               | 4   |
| 1.4 Announcement .....                                       | 4   |
| 2. Product Information .....                                 | 5   |
| 2.1 Application Information .....                            | 5   |
| 2.2 Manufacturer Information .....                           | 5   |
| 2.3 Factory Information .....                                | 5   |
| 2.4 General Description of Equipment under Test (EUT) .....  | 5   |
| 2.5 Equipment under Test Ancillary Equipment .....           | 5   |
| 2.6 Technical Information .....                              | 5   |
| 3. Summary of Test Results .....                             | 7   |
| 3.1 Test Standards .....                                     | 7   |
| 3.2 Device Category and SAR Limit .....                      | 7   |
| 3.3 Test Result Summary .....                                | 8   |
| 3.4 Test Uncertainty .....                                   | 9   |
| 4. Measurement System .....                                  | 11  |
| 4.1 Specific Absorption Rate (SAR) Definition .....          | 11  |
| 4.2 MVG SAR System .....                                     | 11  |
| 5. System Verification .....                                 | 15  |
| 5.1 Purpose of System Check .....                            | 15  |
| 5.2 System Check Setup .....                                 | 16  |
| 6. TEST POSITION CONFIGURATIONS .....                        | 16  |
| 6.1 Head Exposure Conditions .....                           | 16  |
| 6.2 Body-worn Position Conditions .....                      | 18  |
| 6.3 Hotspot Mode Exposure Position Conditions .....          | 19  |
| 6.4 Product Specific 10g Exposure Consideration .....        | 19  |
| 7. Measurement Procedure .....                               | 20  |
| 7.1 Measurement Process Diagram .....                        | 20  |
| 7.2 SAR Scan General Requirement .....                       | 21  |
| 7.3 Measurement Procedure .....                              | 22  |
| 7.4 Area & Zoom Scan Procedure .....                         | 22  |
| 8. Conducted RF Output Power .....                           | 23  |
| 8.1 GSM .....                                                | 23  |
| 8.2 WCDMA .....                                              | 24  |
| 8.3 LTE .....                                                | 25  |
| 8.4 Wi-Fi .....                                              | 38  |
| 8.5 Bluetooth .....                                          | 39  |
| 9. Test Exclusion Consideration .....                        | 40  |
| 9.1 SAR Test Exclusion Consideration Table .....             | 41  |
| 10. Test Result .....                                        | 41  |
| Hotspot(Body) 1g SAR Data .....                              | 41  |
| 11. Simultaneous Transmission .....                          | 43  |
| 11.1 Simultaneous Transmission Mode Considerations .....     | 43  |
| 11.2 Sum SAR of Simultaneous Transmission .....              | 43  |
| 12. SAR Measurement Variability .....                        | 45  |
| 13. Test Equipment List .....                                | 46  |
| ANNEX A Simulating Liquid Verification Result .....          | 47  |
| ANNEX B System Check Result .....                            | 47  |
| ANNEX C Test Data .....                                      | 68  |
| ANNEX D SAR Test Setup Photos .....                          | 108 |
| ANNEX E EUT External and Internal Photos .....               | 109 |
| ANNEX F Calibration Report .....                             | 109 |

## 1. Introduction

### 1.1 Identification of Testing Laboratory

|               |                                                                                                                                     |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Company Name: | BTF Testing Lab (Shenzhen) Co., Ltd.                                                                                                |
| Address:      | F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China |
| Phone Number: | +86-0755-23146130                                                                                                                   |
| Fax Number:   | +86-0755-23146130                                                                                                                   |

### 1.2 Identification of the Responsible Testing Location

|                         |                                                                                                                                                                                                                    |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Location:          | BTF Testing Lab (Shenzhen) Co., Ltd.                                                                                                                                                                               |
| Address:                | F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China                                                                                |
| Description:            | All measurement facilities used to collect the measurement data are located at F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China |
| FCC Registration Number | 518915                                                                                                                                                                                                             |
| Designation Number      | CN1330                                                                                                                                                                                                             |

### 1.3 Laboratory Condition

|                            |                    |
|----------------------------|--------------------|
| Ambient Temperature:       | 21°C to 25°C       |
| Ambient Relative Humidity: | 48% to 59%         |
| Ambient Pressure:          | 100 kPa to 102 kPa |

### 1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2. Product Information

### 2.1 Application Information

|               |                                               |
|---------------|-----------------------------------------------|
| Company Name: | Xwireless LLC                                 |
| Address:      | 11565 Old Georgetown Road, Rockville, MD, USA |

### 2.2 Manufacturer Information

|               |                                               |
|---------------|-----------------------------------------------|
| Company Name: | Xwireless LLC                                 |
| Address:      | 11565 Old Georgetown Road, Rockville, MD, USA |

### 2.3 Factory Information

|               |                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------|
| Company Name: | ZTECH COMMUNICATION(SZ) CO LTD                                                                       |
| Address:      | FL 7 BLOCK D BAO'AN ZHIGU INNOVATION PARK YIN'TIAN ROAD NO. 4 XI'XIANG STR. BAO'AN DISTRICT SZ CHINA |

### 2.4 General Description of Equipment under Test (EUT)

|                       |                     |
|-----------------------|---------------------|
| EUT Name              | Tablet PC           |
| Under Test Model Name | T10M                |
| Sample No.            | BTFSN230302E004-1/4 |

### 2.5 Equipment under Test Ancillary Equipment

|                       |                      |         |
|-----------------------|----------------------|---------|
| Ancillary Equipment 1 | Rechargeable Battery |         |
|                       | Capacity             | 5000mAh |
|                       | Rated Voltage        | 3.8V    |

### 2.6 Technical Information

|                                   |                                                                 |
|-----------------------------------|-----------------------------------------------------------------|
| Network and Wireless connectivity | 2G Network GSM/GPRS/EGPRS 850/1900 MHz                          |
|                                   | 3G Network WCDMA/HSDPA/HSUPA Band 2/5                           |
|                                   | 4G Network FDD LTE Band 2/4/5/12/13/25/26/66/71 TDD LTE Band 41 |
|                                   | 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/HT40)                  |
|                                   | 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80)        |
|                                   | Bluetooth (EDR+BLE)                                             |

The requirement for the following technical information of the EUT was tested in this report:

|                   |                                                              |                                                         |                     |
|-------------------|--------------------------------------------------------------|---------------------------------------------------------|---------------------|
| Operating Mode    | GSM, WCDMA, LTE, WLAN, Bluetooth                             |                                                         |                     |
| Frequency Range   | GSM 850                                                      | TX: 824 ~ 849 MHz                                       | RX: 869 ~ 894 MHz   |
|                   | GSM 1900                                                     | TX: 1850 ~ 1910 MHz                                     | RX: 1930 ~ 1990 MHz |
|                   | WCDMA Band 2                                                 | TX: 1850 ~ 1910 MHz                                     | RX: 1930 ~ 1990 MHz |
|                   | WCDMA Band 5                                                 | TX: 824 ~ 849 MHz                                       | RX: 869 ~ 894 MHz   |
|                   | LTE Band 2                                                   | TX: 1850 ~ 1910 MHz                                     | RX: 1930 ~ 1990 MHz |
|                   | LTE Band 4                                                   | TX: 1710 ~ 1755 MHz                                     | RX: 2110 ~ 2155 MHz |
|                   | LTE Band 5                                                   | TX: 824 ~ 849 MHz                                       | RX: 869 ~ 894 MHz   |
|                   | LTE Band 12                                                  | TX: 698 ~ 716 MHz                                       | RX: 728 ~ 746 MHz   |
|                   | LTE Band 13                                                  | TX: 777 ~ 787 MHz                                       | RX: 746 ~ 756 MHz   |
|                   | LTE Band 25                                                  | TX: 1850 ~ 1915MHz                                      | RX: 1930 ~ 1995 MHz |
|                   | LTE Band 26                                                  | TX: 814 ~ 849 MHz                                       | RX: 859 ~ 894 MHz   |
|                   | LTE Band 66                                                  | TX: 1710 ~ 1780 MHz                                     | RX: 2110 ~ 2200 MHz |
|                   | LTE Band 71                                                  | TX: 663 ~ 698 MHz                                       | RX: 617 ~ 652 MHz   |
|                   | LTE Band 41                                                  | 2496 ~ 2690 MHz                                         |                     |
|                   | 802.11b/g/n(HT20)                                            | 2412 ~ 2462 MHz                                         |                     |
|                   | 802.11n(HT40)                                                | 2422 ~ 2452 MHz                                         |                     |
|                   | 802.11a/802.11n(HT20/HT40)/<br>802.11ac(VHT20/VHT40/VHT80)   | 5150 ~ 5250 MHz                                         |                     |
|                   |                                                              | 5250 ~ 5350 MHz                                         |                     |
|                   |                                                              | 5470 ~ 5725 MHz                                         |                     |
|                   |                                                              | 5725 ~ 5850 MHz                                         |                     |
|                   | Bluetooth                                                    | 2402 ~ 2480 MHz                                         |                     |
| Antenna Type      | WWAN: PIFA Antenna<br>WLAN: PIFA Antenna<br>BT: PIFA Antenna |                                                         |                     |
| Hotspot Function  | Support                                                      |                                                         |                     |
| Power Reduction   | Not Support                                                  |                                                         |                     |
| Exposure Category | General Population/Uncontrolled exposure                     |                                                         |                     |
| EUT Stage         | Portable Device                                              |                                                         |                     |
| Product           | Type                                                         |                                                         |                     |
|                   | <input type="checkbox"/> Production unit                     | <input checked="" type="checkbox"/> Identical prototype |                     |

### 3. Summary of Test Results

#### 3.1 Test Standards

| No. | Identity           | Document Title                                                                                                                                                        |
|-----|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 47 CFR Part 2.1093 | Radiofrequency radiation exposure evaluation: portable devices                                                                                                        |
| 2   | IEEE1528-2013      | Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate in the Human Head from Wireless Communications Devices: Measurement Techniques |
| 3   | IEEE C95.1-2019    | IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz                                     |
| 4   | KDB 447498 D01     | General RF Exposure Guidance v06                                                                                                                                      |
| 5   | KDB 447498 D04     | Interim General RF Exposure Guidance v01                                                                                                                              |
| 6   | KDB 865664 D01     | SAR measurement 100MHz to 6GHz v01r04                                                                                                                                 |
| 7   | KDB 865664 D02     | RF Exposure Reporting v01r02                                                                                                                                          |
| 8   | KDB 941225 D01     | 3G SAR Procedures v03r01                                                                                                                                              |
| 9   | KDB 941225 D05     | SAR for LTE Devices v02r05                                                                                                                                            |
| 10  | KDB 941225 D06     | Hotspot Mode v02r01                                                                                                                                                   |
| 11  | KDB 248227 D01     | 802.11 Wi-Fi SAR v02r02                                                                                                                                               |
| 12  | KDB 616217 D04     | SAR for laptop and tablets v01r02                                                                                                                                     |
| 13  | KDB 648474 D04     | Handset SAR v01r03                                                                                                                                                    |
| 14  | KDB 690783 D01     | SAR Listings on Grant v01r03                                                                                                                                          |

#### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

| Body Position                                                                    | SAR Value (W/Kg)                             |                                      |
|----------------------------------------------------------------------------------|----------------------------------------------|--------------------------------------|
|                                                                                  | General Population/<br>Uncontrolled Exposure | Occupational/<br>Controlled Exposure |
| Whole-Body SAR<br>(averaged over the entire body)                                | 0.08                                         | 0.4                                  |
| Partial-Body SAR<br>(averaged over any 1 gram of tissue)                         | 1.60                                         | 8.0                                  |
| SAR for hands, wrists, feet and ankles<br>(averaged over any 10 grams of tissue) | 4.0                                          | 20.0                                 |

**NOTE:**

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure. In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### 3.3 Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported standalone SAR Summary>

| Exposure Position                      | Frequency Band | Reported SAR (W/kg) | Equipment Class | Highest Reported SAR (W/kg) |
|----------------------------------------|----------------|---------------------|-----------------|-----------------------------|
| Hotspot(Body)<br>1-g SAR<br>(0 mm Gap) | GSM 850        | 0.696               | PCB             | 0.787                       |
|                                        | GSM 1900       | 0.787               |                 |                             |
|                                        | WCDMA Band II  | 0.591               |                 |                             |
|                                        | WCDMA Band V   | 0.437               |                 |                             |
|                                        | LTE Band 2     | 0.555               |                 |                             |
|                                        | LTE Band 4     | 0.725               |                 |                             |
|                                        | LTE Band 5     | 0.329               |                 |                             |
|                                        | LTE Band 12    | 0.441               |                 |                             |
|                                        | LTE Band 13    | 0.430               |                 |                             |
|                                        | LTE Band 25    | 0.701               |                 |                             |
|                                        | LTE Band 26    | 0.418               |                 |                             |
|                                        | LTE Band 41    | 0.396               |                 |                             |
|                                        | LTE Band 66    | 0.755               |                 |                             |
|                                        | LTE Band 71    | 0.553               |                 |                             |
|                                        | WLAN 2.4 GHz   | 0.405               | DTS             |                             |
|                                        | Bluetooth      | 0.113               | DSS             |                             |
|                                        | WLAN 5.2 GHz   | 0.725               | NII             |                             |
|                                        | WLAN 5.3 GHz   | 0.731               |                 |                             |
|                                        | WLAN 5.6 GHz   | 0.640               |                 |                             |
|                                        | WLAN 5.8 GHz   | 0.513               |                 |                             |

This device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC47 CFR part 2(2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.

<Highest Reported Simultaneous SAR>

| Exposure Position                   | Simultaneous Configuration | Highest Reported Simultaneous Transmission SAR (W/kg) | Limit (W/kg) | Verdict |
|-------------------------------------|----------------------------|-------------------------------------------------------|--------------|---------|
| Hotspot(Body)<br>1-g SAR (0 mm Gap) | GSM 1900 + 5G WIFI         | 1.202                                                 | 1.6          | Pass    |



### 3.4 Test Uncertainty

#### 3.4.1 Measurement uncertainty evaluation for SAR test

##### Measurement uncertainty evaluation for SAR test (300MHz to 6GHz)

| Uncertainty Component                                                           | Tol<br>(+- %) | Prob.<br>Dist. | Div.       | Ci<br>(1g)   | Ci<br>(10g)  | 1g Ui (+-<br>%) | 10 g Ui<br>(+-%) | Vi veff |
|---------------------------------------------------------------------------------|---------------|----------------|------------|--------------|--------------|-----------------|------------------|---------|
| <b>Measurement System</b>                                                       |               |                |            |              |              |                 |                  |         |
| Probe calibration                                                               | 5.8           | N              | 1          | 1            | 1            | 5.80            | 5.80             | ∞       |
| Axial Isotropy                                                                  | 3.5           | R              | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 1.43            | 1.43             | ∞       |
| Hemispherical Isotropy                                                          | 5.9           | R              | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 2.41            | 2.41             | ∞       |
| Boundary effect                                                                 | 1.0           | R              | $\sqrt{3}$ | 1            | 1            | 0.58            | 0.58             | ∞       |
| Linearity                                                                       | 4.7           | R              | $\sqrt{3}$ | 1            | 1            | 2.71            | 2.71             | ∞       |
| System detection limits                                                         | 1.0           | R              | $\sqrt{3}$ | 1            | 1            | 0.58            | 0.58             | ∞       |
| Modulation response                                                             | 3.0           | R              | $\sqrt{3}$ | 1            | 1            | 1.73            | 1.73             | ∞       |
| Readout Electronics                                                             | 0.5           | N              | 1          | 1            | 1            | 0.50            | 0.50             | ∞       |
| Response Time                                                                   | 0             | R              | $\sqrt{3}$ | 1            | 1            | 0.00            | 0.00             | ∞       |
| Integration Time                                                                | 1.4           | R              | $\sqrt{3}$ | 1            | 1            | 0.81            | 0.81             | ∞       |
| RF ambient Conditions - Noise                                                   | 3.0           | R              | $\sqrt{3}$ | 1            | 1            | 1.73            | 1.73             | ∞       |
| RF ambient Conditions - Reflections                                             | 3.0           | R              | $\sqrt{3}$ | 1            | 1            | 1.73            | 1.73             | ∞       |
| Probe positioner Mechanical Tolerance                                           | 1.4           | R              | $\sqrt{3}$ | 1            | 1            | 0.81            | 0.81             | ∞       |
| Probe positioning with respect to Phantom Shell                                 | 1.4           | R              | $\sqrt{3}$ | 1            | 1            | 0.81            | 0.81             | ∞       |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | 2.3           | R              | $\sqrt{3}$ | 1            | 1            | 1.33            | 1.33             | ∞       |
| <b>Test sample Related</b>                                                      |               |                |            |              |              |                 |                  |         |
| Test sample positioning                                                         | 2.6           | N              | 1          | 1            | 1            | 2.60            | 2.60             | 11      |
| Device Holder Uncertainty                                                       | 3.0           | N              | 1          | 1            | 1            | 3.00            | 3.00             | 7       |
| Output power Variation - SAR drift measurement                                  | 5.0           | R              | $\sqrt{3}$ | 1            | 1            | 2.89            | 2.89             | ∞       |
| SAR scaling                                                                     | 2.0           | R              | $\sqrt{3}$ | 1            | 1            | 1.15            | 1.15             | ∞       |
| <b>Phantom and Tissue Parameters</b>                                            |               |                |            |              |              |                 |                  |         |
| Phantom Shell Uncertainty - Shape, Thickness and Permittivity                   | 4             | R              | $\sqrt{3}$ | 1            | 1            | 2.31            | 2.31             | ∞       |
| Uncertainty in SAR correction for deviation in permittivity and conductivity    | 2.0           | N              | 1          | 1            | 0.84         | 2.00            | 1.68             | ∞       |
| Liquid conductivity measurement                                                 | 4.0           | N              | 1          | 0.78         | 0.71         | 3.12            | 2.84             | 5       |
| Liquid permittivity measurement                                                 | 5.0           | N              | 1          | 0.23         | 0.26         | 1.15            | 1.30             | 5       |
| Liquid Conductivity - Temperature Uncertainty                                   | 2.5           | R              | $\sqrt{3}$ | 0.78         | 0.71         | 1.13            | 1.02             | ∞       |
| Liquid permittivity - Temperature Uncertainty                                   | 2.5           | R              | $\sqrt{3}$ | 0.23         | 0.26         | 0.33            | 0.38             | ∞       |
| Combined Standard Uncertainty                                                   |               | RSS            |            |              |              | 10.47           | 10.34            |         |
| Expanded Uncertainty (95% Confidence interval)                                  |               | k              |            |              |              | 20.95           | 20.69            |         |

\* This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.4.2 Measurement uncertainty evaluation for system check

| Uncertainty Component                                                           | Tol (+-%) | Prob. Dist. | Div.       | Ci (1g) | Ci (10 g) | 1g Ui (+-%) | 10 g Ui (+-%) | Vi veff |
|---------------------------------------------------------------------------------|-----------|-------------|------------|---------|-----------|-------------|---------------|---------|
| <b>Measurement System</b>                                                       |           |             |            |         |           |             |               |         |
| Probe calibration                                                               | 5.8       | N           | 1          | 1       | 1         | 5.80        | 5.80          | ∞       |
| Axial Isotropy                                                                  | 3.5       | R           | $\sqrt{3}$ | 1       | 1         | 2.02        | 2.02          | ∞       |
| Hemispherical Isotropy                                                          | 5.9       | R           | $\sqrt{3}$ | 0       | 0         | 0.00        | 0.00          | ∞       |
| Boundary effect                                                                 | 1         | R           | $\sqrt{3}$ | 1       | 1         | 0.58        | 0.58          | ∞       |
| Linearity                                                                       | 4.7       | R           | $\sqrt{3}$ | 1       | 1         | 2.71        | 2.71          | ∞       |
| System detection limits                                                         | 1         | R           | $\sqrt{3}$ | 1       | 1         | 0.58        | 0.58          | ∞       |
| Modulation response                                                             | 0         | N           | $\sqrt{3}$ | 0       | 0         | 0.00        | 0.00          | ∞       |
| Readout Electronics                                                             | 0.5       | N           | 1          | 1       | 1         | 0.50        | 0.50          | ∞       |
| Response Time                                                                   | 0         | R           | $\sqrt{3}$ | 0       | 0         | 0.00        | 0.00          | ∞       |
| Integration Time                                                                | 1.4       | R           | $\sqrt{3}$ | 0       | 0         | 0.00        | 0.00          | ∞       |
| RF ambient Conditions - Noise                                                   | 3         | R           | $\sqrt{3}$ | 1       | 1         | 1.73        | 1.73          | ∞       |
| RF ambient Conditions - Reflections                                             | 3         | R           | $\sqrt{3}$ | 1       | 1         | 1.73        | 1.73          | ∞       |
| Probe positioner Mechanical Tolerance                                           | 1.4       | R           | $\sqrt{3}$ | 1       | 1         | 0.81        | 0.81          | ∞       |
| Probe positioning with respect to Phantom Shell                                 | 1.4       | R           | $\sqrt{3}$ | 1       | 1         | 0.81        | 0.81          | ∞       |
| Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation | 2.3       | R           | $\sqrt{3}$ | 1       | 1         | 1.33        | 1.33          | ∞       |
| <b>Dipole</b>                                                                   |           |             |            |         |           |             |               |         |
| Deviation of experimental source from numerical source                          | 5         | N           | 1          | 1       | 1         | 5.00        | 5.00          | ∞       |
| Input Power and SAR drift measurement                                           | 0.5       | R           | $\sqrt{3}$ | 1       | 1         | 0.29        | 0.29          | ∞       |
| Dipole Axis to Liquid Dist.                                                     | 2.0       | R           | $\sqrt{3}$ | 1       | 1         | 1.15        | 1.15          | ∞       |
| <b>Phantom and Tissue Parameters</b>                                            |           |             |            |         |           |             |               |         |
| Phantom Shell Uncertainty - Shape, Thickness and Permittivity                   | 4         | R           | $\sqrt{3}$ | 1       | 1         | 2.31        | 2.31          | ∞       |
| Uncertainty in SAR correction for deviation in permittivity and conductivity    | 2.0       | N           | 1          | 1       | 0.84      | 2.00        | 1.68          | ∞       |
| Liquid conductivity measurement                                                 | 4         | N           | 1          | 0.78    | 0.71      | 3.12        | 2.84          | 5       |
| Liquid permittivity measurement                                                 | 5.0       | N           | 1          | 0.23    | 0.26      | 1.15        | 1.30          | 5       |
| Liquid Conductivity - Temperature Uncertainty                                   | 2.5       | R           | $\sqrt{3}$ | 0.78    | 0.71      | 1.13        | 1.02          | ∞       |
| Liquid permittivity - Temperature Uncertainty                                   | 2.5       | R           | $\sqrt{3}$ | 0.23    | 0.26      | 0.33        | 0.38          | ∞       |
| Combined Standard Uncertainty                                                   |           | RSS         |            |         |           | 10.16       | 10.03         |         |
| Expanded Uncertainty (95% Confidence interval)                                  |           | k           |            |         |           | 20.32       | 20.06         |         |

## 4. Measurement System

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,  
ρ is the mass density of the tissue and E is the RMS electrical field strength.

### 4.2 MVG SAR System

#### 4.2.1 SAR system diagram

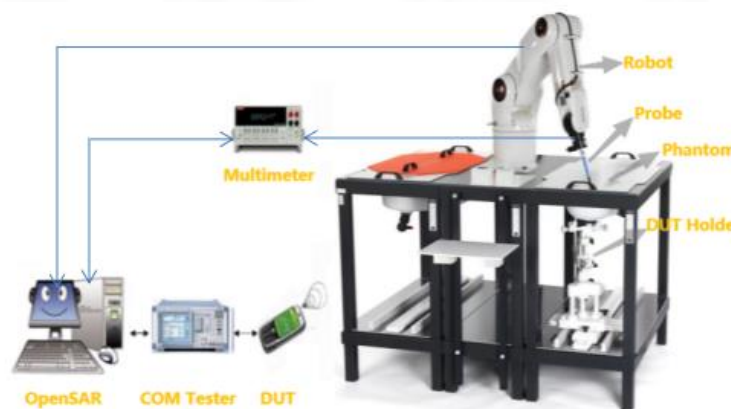

#### 4.2.2 Robot



A standard high precision 6-axis robot (Denso) with teaches pendant with Scanning System

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal of the surface of the phantom ( $\pm 30^\circ$ ).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

#### 4.2.3 E-Field Probe

For the measurements, the Specific Dosimetric SSE2 E-Field Probe with following specifications is used:

- Dynamic range: 0.01-100 W/kg
- Tip diameter: 2mm for SSE2
- Distance between probe tip and sensor centre: 1mm for SSE2
- Distance between sensor centre and the inner phantom surface: 2mm for  $f \geq 4\text{GHz}$ .
- Probe linearity:  $<0.25\text{dB}$ .
- Axial Isotropy:  $<0.25\text{dB}$ .
- Spherical Isotropy:  $<0.50\text{dB}$ .
- Calibration range: 150 to 6000 MHz for head & body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than  $20^\circ$ .



#### 4.2.4 Phantoms

##### **SAM Phantom**

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The probe scanning of the E-Field is done in the 2 halves of the normalized head. The normalized shape of the phantom corresponds to the dimensions of 90% of an adult head size. It enables the dosimetric evaluation of left and right-hand phone usage and includes an additional flat phantom part for the simplified body performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



**SAM Phantom**

The thickness of the phantom amounts to  $2\text{ mm} \pm 0.2\text{ mm}$ . The materials for the phantom do not affect the radiation of the device under test (DUT) :  $\epsilon_r' < 5$   
The head is filled with tissue simulating liquid. The hand do not have to be modeled.

#### TWIN SAM phantom

|                   | Mechanical                              | Electrical            |      |
|-------------------|-----------------------------------------|-----------------------|------|
| Overall thickness | $2 \pm 0.2\text{ mm}$ (except ear area) | Relative permittivity | 3.4  |
| Dimensions        | 1000 mm(L) x 500 mm(W) x 200 mm(H)      | Loss tangent          | 0.02 |
| Maximum volume    | 27 L                                    |                       |      |
| Material          | Fiberglass based                        |                       |      |

#### ELLIPTICAL Phantom

The phantom is for Body performance check filled with tissue-equivalent liquid to a depth of at least 150 mm, whose shell material is resistant to damage or reaction with tissue-equivalent liquid chemicals.




**ELLI Phantom**

The shape of the phantom is an ellipse with length  $600\text{ mm} \pm 5\text{ mm}$  and width  $400\text{ mm} \pm 5\text{ mm}$ . The phantom shell is made of low-loss and low-permittivity material, having loss tangent  $\tan \delta \leq 0.05$  and relative permittivity:  
 $\epsilon_r' \leq 5$  for  $f \leq 3\text{ GHz}$   
 $3 \leq \epsilon_r' \leq 5$  for  $f > 3\text{ GHz}$   
The thickness of the bottom-wall of the flat phantom is 2.0 mm with a tolerance of  $\pm 0.2\text{ mm}$ .

#### Technical & mechanical characteristics

|                 |                                 |
|-----------------|---------------------------------|
| Shell thickness | $2\text{ mm} \pm 0.2\text{ mm}$ |
| Filling volume  | 25 L                            |
| Dimensions      | 600 mm x 400 mm x 200mm         |
| Permittivity    | 4.4                             |
| Loss tangent    | 0.017                           |

#### 4.2.5 Device Holder

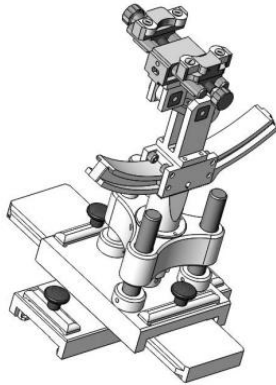

| System Material | Permittivity | Loss tangent |
|-----------------|--------------|--------------|
| Delrin          | 3.7          | 0.005        |


(The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.)

| System Material | Permittivity | Loss tangent |
|-----------------|--------------|--------------|
| PMMA            | 2.9          | 0.028        |


#### 4.2.6 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

Head Liquid Depth

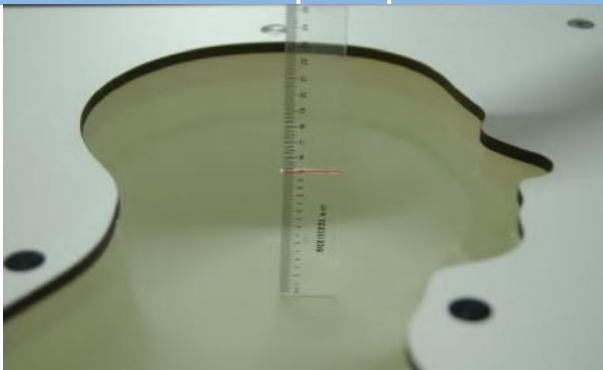

Body Liquid Depth

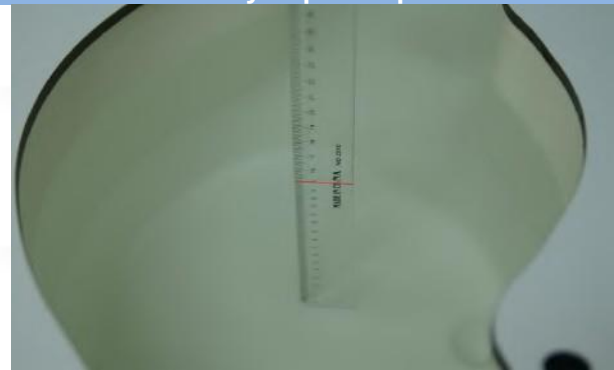



The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.


| Head (Reference IEEE1528)           |              |                       |                  |             |                     |             |                                |                            |
|-------------------------------------|--------------|-----------------------|------------------|-------------|---------------------|-------------|--------------------------------|----------------------------|
| Frequency<br>(MHz)                  | Water<br>(%) | Sugar<br>(%)          | Cellulose<br>(%) | Salt<br>(%) | Preventol<br>(%)    | DGBE<br>(%) | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 750                                 | 41.1         | 57.0                  | 0.2              | 1.4         | 0.2                 | 0           | 0.89                           | 41.9                       |
| 835                                 | 40.3         | 57.9                  | 0.2              | 1.4         | 0.2                 | 0           | 0.90                           | 41.5                       |
| 900                                 | 40.3         | 57.9                  | 0.2              | 1.4         | 0.2                 | 0           | 0.97                           | 41.5                       |
| 1800, 1900, 2000                    | 55.2         | 0                     | 0                | 0.3         | 0                   | 44.5        | 1.4                            | 40.0                       |
| 2450                                | 55.0         | 0                     | 0                | 0.1         | 0                   | 44.9        | 1.80                           | 39.2                       |
| 2600                                | 54.9         | 0                     | 0                | 0.1         | 0                   | 45.0        | 1.96                           | 39.0                       |
| Frequency<br>(MHz)                  | Water<br>(%) | Hexyl Carbitol<br>(%) |                  |             | Triton X-100<br>(%) |             | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 5200                                | 62.52        | 17.24                 |                  |             | 17.24               |             | 4.66                           | 36.0                       |
| 5800                                | 62.52        | 17.24                 |                  |             | 17.24               |             | 5.27                           | 35.3                       |
| Body (From instrument manufacturer) |              |                       |                  |             |                     |             |                                |                            |
| Frequency<br>(MHz)                  | Water<br>(%) | Sugar<br>(%)          | Cellulose<br>(%) | Salt<br>(%) | Preventol<br>(%)    | DGBE<br>(%) | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 750                                 | 51.7         | 47.2                  | 0                | 0.9         | 0.1                 | 0           | 0.96                           | 55.5                       |
| 835                                 | 50.8         | 48.2                  | 0                | 0.9         | 0.1                 | 0           | 0.97                           | 55.2                       |
| 900                                 | 50.8         | 48.2                  | 0                | 0.9         | 0.1                 | 0           | 1.05                           | 55.0                       |
| 1800, 1900, 2000                    | 70.2         | 0                     | 0                | 0.4         | 0                   | 29.4        | 1.52                           | 53.3                       |
| 2450                                | 68.6         | 0                     | 0                | 0.1         | 0                   | 31.3        | 1.95                           | 52.7                       |
| 2600                                | 68.2         | 0                     | 0                | 0.1         | 0                   | 31.7        | 2.16                           | 52.5                       |
| Frequency(MHz)                      | Water        | DGBE<br>(%)           |                  |             | Salt<br>(%)         |             | Conductivity<br>$\sigma$ (S/m) | Permittivity<br>$\epsilon$ |
| 5200                                | 78.60        | 21.40                 |                  |             | /                   |             | 5.30                           | 49.00                      |
| 5800                                | 78.50        | 21.40                 |                  |             | 0.1                 |             | 6.00                           | 48.20                      |

## 5. System Verification

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. The setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

## 5.2 System Check Setup

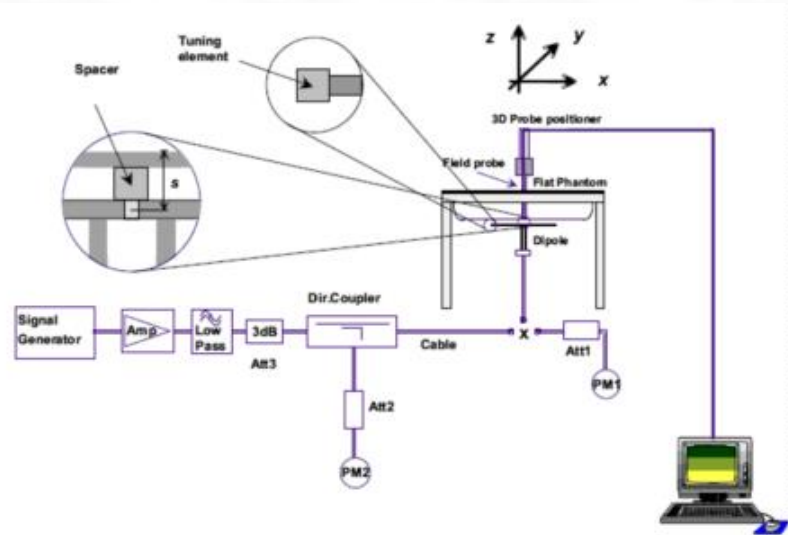

## 6. TEST POSITION CONFIGURATIONS

According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.


### 6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.

#### 6.1.1 Two Imaginary Lines on the Handset

- The vertical center line passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- The horizontal line is perpendicular to the vertical center line and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



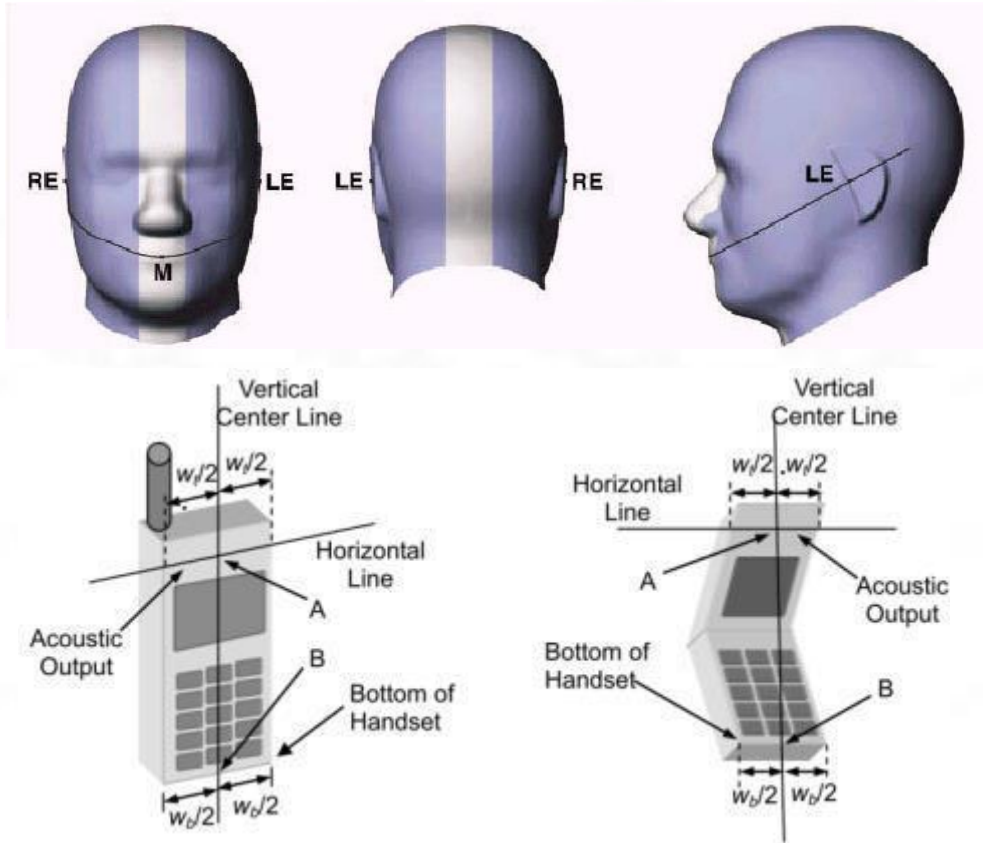


### 6.1.2 Two Imaginary Lines on the Handset

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.



### 6.1.3 Titled Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

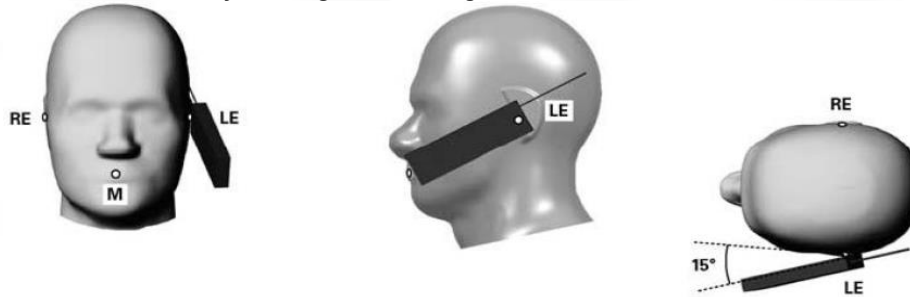


## 6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance  $\leq 5$  mm to support compliance.

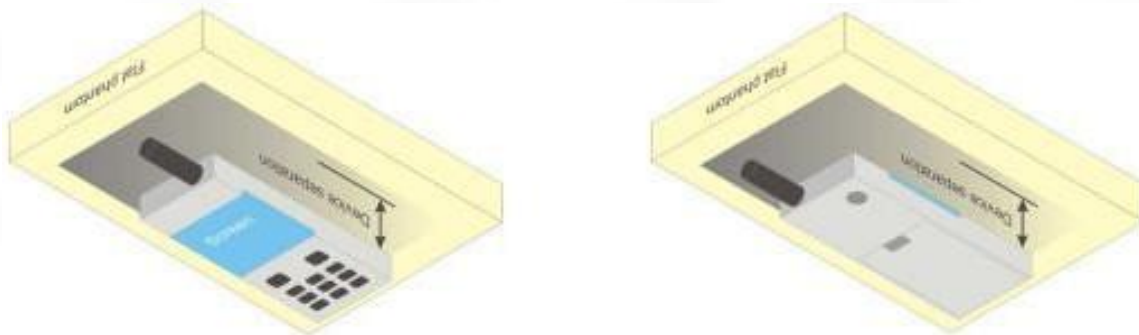

### 6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

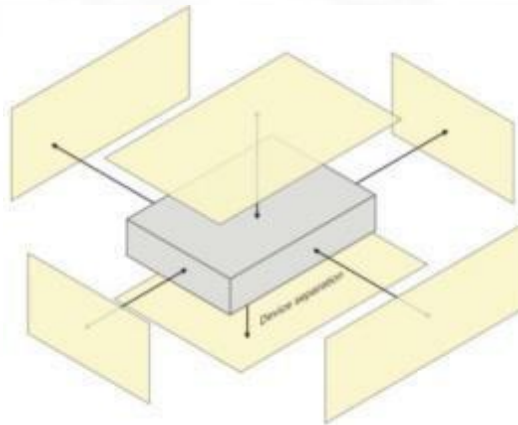

### 6.4 Product Specific 10g Exposure Consideration


According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

## 7. Measurement Procedure

### 7.1 Measurement Process Diagram

Body SAR

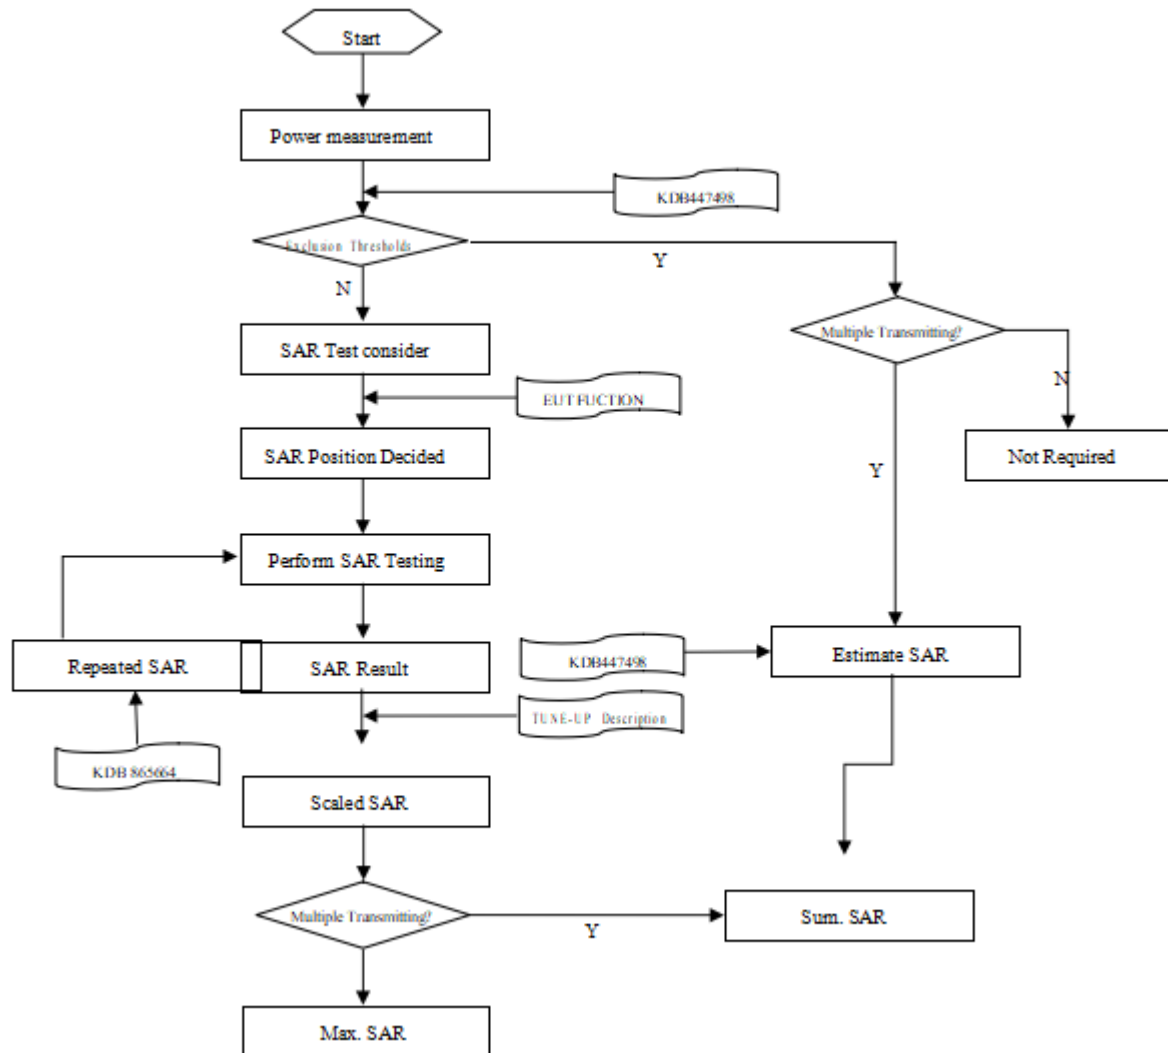

## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

|                                                                                                                                                          |                                          |                                                                | ≤3GHz                                                                                                                                                                                                                                                             | >3GHz                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface                                                   |                                          |                                                                | 5±1 mm                                                                                                                                                                                                                                                            | ½·δ·ln(2)±0.5 mm                       |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location                                                                |                                          |                                                                | 30°±1°                                                                                                                                                                                                                                                            | 20°±1°                                 |
| Maximum area scan spatial resolution: Δx Area , Δy Area                                                                                                  |                                          |                                                                | ≤ 2 GHz: ≤ 15 mm<br>2 – 3 GHz: ≤ 12 mm                                                                                                                                                                                                                            | 3–4 GHz: ≤ 12 mm<br>4 – 6 GHz: ≤ 10 mm |
|                                                                                                                                                          |                                          |                                                                | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                        |
| Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom                                                                                                  |                                          |                                                                | ≤ 2 GHz: ≤ 8 mm<br>2 – 3 GHz: ≤ 5 mm*                                                                                                                                                                                                                             | 3–4 GHz: ≤ 5 mm*<br>4 – 6 GHz: ≤ 4 mm* |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                          | uniform grid: Δz Zoom (n)                |                                                                | ≤ 5 mm                                                                                                                                                                                                                                                            | 3–4 GHz: ≤ 4 mm                        |
|                                                                                                                                                          |                                          |                                                                |                                                                                                                                                                                                                                                                   | 4–5 GHz: ≤ 3 mm                        |
|                                                                                                                                                          |                                          |                                                                |                                                                                                                                                                                                                                                                   | 5–6 GHz: ≤ 2 mm                        |
|                                                                                                                                                          | graded grid                              | Δz Zoom (1): between 1st two points closest to phantom surface | ≤ 4 mm                                                                                                                                                                                                                                                            | 3–4 GHz: ≤ 3 mm                        |
|                                                                                                                                                          |                                          |                                                                |                                                                                                                                                                                                                                                                   | 4–5 GHz: ≤ 2.5 mm                      |
|                                                                                                                                                          |                                          |                                                                |                                                                                                                                                                                                                                                                   | 5–6 GHz: ≤ 2 mm                        |
|                                                                                                                                                          | Δz Zoom (n>1): between subsequent points | ≤ 1.5·Δz Zoom (n-1)                                            |                                                                                                                                                                                                                                                                   |                                        |
| Minimum zoom scan volume                                                                                                                                 | x, y, z                                  |                                                                | ≥30 mm                                                                                                                                                                                                                                                            | 3–4 GHz: ≥ 28 mm                       |
|                                                                                                                                                          |                                          |                                                                |                                                                                                                                                                                                                                                                   | 4–5 GHz: ≥ 25 mm                       |
|                                                                                                                                                          |                                          |                                                                |                                                                                                                                                                                                                                                                   | 5–6 GHz: ≥ 22 mm                       |
| Note:                                                                                                                                                    |                                          |                                                                |                                                                                                                                                                                                                                                                   |                                        |
| 1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528- 2011 for details.                 |                                          |                                                                |                                                                                                                                                                                                                                                                   |                                        |
| 2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB                                       |                                          |                                                                |                                                                                                                                                                                                                                                                   |                                        |
| 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                          |                                                                |                                                                                                                                                                                                                                                                   |                                        |

### 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.



## 8. Conducted RF Output Power

### 8.1 GSM

| Mode: GSM850                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |           | Maximum Tune-up(dBm) | Burst Average Power (dBm) |              |           | Division Factors | Frame-Average Power (dBm) |              |           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------|---------------------------|--------------|-----------|------------------|---------------------------|--------------|-----------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |                      | CH128                     | CH190        | CH251     |                  | CH128                     | CH190        | CH251     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |                      | 824.2MHz                  | 836.6MHz     | 848.8MHz  |                  | 824.2MHz                  | 836.6MHz     | 848.8MHz  |
| GPRS (GMSK)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1Tx slot  | 32.00                | 31.92                     | 31.81        | 31.82     | -9.03            | 22.89                     | 22.78        | 22.79     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2Tx slots | 31.50                | 31.28                     | 31.33        | 31.30     | -6.02            | 25.26                     | 25.31        | 25.28     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 3Tx slots | 30.00                | 29.51                     | 29.61        | 29.54     | -4.26            | 25.25                     | 25.35        | 25.28     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 4Tx slots | <b>28.50</b>         | 28.28                     | <b>28.40</b> | 28.35     | -3.01            | 25.27                     | <b>25.39</b> | 25.34     |
| EGPRS (8PSK)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1Tx slot  | 26.00                | 25.73                     | 25.11        | 25.34     | -9.03            | 16.70                     | 16.08        | 16.31     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2Tx slots | 26.50                | 26.18                     | 24.23        | 24.47     | -6.02            | 20.16                     | 18.21        | 18.45     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 3Tx slots | 24.00                | 23.92                     | 21.44        | 21.63     | -4.26            | 19.66                     | 17.18        | 17.37     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 4Tx slots | 19.50                | 19.07                     | 18.86        | 19.05     | -3.01            | 16.06                     | 15.85        | 16.04     |
| Mode: GSM1900                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |           | Maximum Tune-up(dBm) | Burst Average Power (dBm) |              |           | Division Factors | Frame-Average Power (dBm) |              |           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |                      | CH512                     | CH661        | CH810     |                  | CH512                     | CH661        | CH810     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |                      | 1850.2MHz                 | 1880.0MHz    | 1909.8MHz |                  | 1850.2MHz                 | 1880.0MHz    | 1909.8MHz |
| GPRS (GMSK)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1Tx slot  | 27.00                | 27.72                     | 26.97        | 26.83     | -9.03            | 18.69                     | 17.94        | 17.80     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2Tx slots | 25.50                | 26.98                     | 26.25        | 26.09     | -6.02            | 20.96                     | 20.23        | 20.07     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 3Tx slots | 24.50                | 25.25                     | 24.39        | 24.16     | -4.26            | 20.99                     | 20.13        | 19.90     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 4Tx slots | <b>26.00</b>         | <b>24.06</b>              | 23.15        | 22.91     | -3.01            | <b>21.05</b>              | 20.14        | 19.90     |
| EGPRS (8PSK)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1Tx slot  | 24.50                | 25.59                     | 24.48        | 24.03     | -9.03            | 16.56                     | 15.45        | 15.00     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2Tx slots | 23.00                | 24.40                     | 23.67        | 23.20     | -6.02            | 18.38                     | 17.65        | 17.18     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 3Tx slots | 21.00                | 22.52                     | 21.69        | 21.19     | -4.26            | 18.26                     | 17.43        | 16.93     |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 4Tx slots | 28.00                | 20.68                     | 20.22        | 19.33     | -3.01            | 17.67                     | 17.21        | 16.32     |
| Note:<br>1) Division Factors<br>To average the power, the division factor is as follows:<br>1Tx-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB<br>2Tx-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB<br>3Tx-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB<br>4Tx-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB |           |                      |                           |              |           |                  |                           |              |           |



## 8.2 WCDMA

| Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           | Maximum Tune-up(dBm) | WCDMA Band II         |        |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------|-----------------------|--------|--------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          |           |                      | Conducted Power (dBm) |        |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          |           |                      | CH9262                | CH9400 | CH9538 |
| RMC 12.2K                                                                                                                                                                                                                                                                                                                                                                                                                                                |           | 22.00                | 21.62                 | 21.42  | 21.46  |
| HSDPA                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Subtest-1 | 19.50                | 19.32                 | 19.07  | 19.16  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-2 | 19.50                | 19.31                 | 19.06  | 19.21  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-3 | 19.50                | 19.29                 | 19.04  | 19.15  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-4 | 19.50                | 19.30                 | 19.05  | 19.13  |
| HSUPA                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Subtest-1 | 17.50                | 17.10                 | 16.89  | 17.20  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-2 | 17.50                | 17.33                 | 17.10  | 16.71  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-3 | 17.50                | 17.31                 | 16.91  | 16.71  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-4 | 17.50                | 16.79                 | 17.11  | 16.68  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-5 | 17.50                | 17.12                 | 17.11  | 17.01  |
| Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                     |           | Maximum Tune-up(dBm) | WCDMA Band V          |        |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          |           |                      | Conducted Power (dBm) |        |        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          |           |                      | CH4132                | CH4182 | CH4233 |
| RMC 12.2K                                                                                                                                                                                                                                                                                                                                                                                                                                                |           | 23.50                | 23.26                 | 23.43  | 23.48  |
| HSDPA                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Subtest-1 | 21.50                | 20.98                 | 21.07  | 21.16  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-2 | 21.50                | 20.98                 | 21.07  | 21.15  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-3 | 21.50                | 20.98                 | 21.09  | 21.17  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-4 | 21.50                | 20.98                 | 21.10  | 21.17  |
| HSUPA                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Subtest-1 | 19.50                | 18.99                 | 18.92  | 19.21  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-2 | 19.00                | 18.50                 | 18.98  | 18.74  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-3 | 19.50                | 18.50                 | 19.16  | 18.73  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-4 | 19.50                | 18.75                 | 18.99  | 19.02  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Subtest-5 | 19.00                | 18.98                 | 18.92  | 18.67  |
| Per KDB 941225 D01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/2$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2$ W/kg, SAR measurement is not required for the secondary mode. |           |                      |                       |        |        |

### 8.3 LTE

#### Band 2

| LTE-FDD Band 2 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                    |                    |
|----------------|------------|---------------|-----------|----------------------|----------------------|--------------------|--------------------|
| Bandwidth      | Modulation | RB allocation | RB offset |                      | 18607<br>1850.7MHz   | 18900<br>1880.0MHz | 19193<br>1909.3MHz |
| 1.4MHz         | QPSK       | 1             | 0         | 22.50                | 22.19                | 21.35              | 21.34              |
|                |            |               | 2         | 22.50                | 22.31                | 21.48              | 21.48              |
|                |            |               | 5         | 22.50                | 22.17                | 21.38              | 21.39              |
|                |            | 3             | 0         | 22.50                | 22.26                | 21.52              | 21.51              |
|                |            |               | 2         | 22.50                | 22.28                | 21.53              | 21.51              |
|                |            |               | 3         | 22.50                | 22.28                | 21.49              | 21.45              |
|                | 16QAM      | 6             | 0         | 21.00                | 20.98                | 20.48              | 20.42              |
|                |            |               | 0         | 21.00                | 20.77                | 20.53              | 20.37              |
|                |            |               | 2         | 21.00                | 20.84                | 20.67              | 20.53              |
|                |            | 1             | 5         | 21.00                | 20.75                | 20.55              | 20.37              |
|                |            |               | 0         | 21.00                | 20.82                | 20.47              | 20.63              |
|                |            |               | 2         | 21.00                | 20.85                | 20.52              | 20.70              |
|                |            | 3             | 3         | 21.00                | 20.83                | 20.49              | 20.65              |
|                |            |               | 0         | 20.00                | 19.67                | 19.51              | 19.45              |
|                |            | 6             | 0         | 20.00                | 19.67                | 19.51              | 19.45              |
|                |            |               | 0         | 20.00                | 19.67                | 19.51              | 19.45              |
|                |            |               | 0         | 20.00                | 19.67                | 19.51              | 19.45              |
| 3MHz           | QPSK       | 1             | 0         | 22.50                | 21.92                | 21.48              | 22.33              |
|                |            |               | 7         | 22.50                | 21.90                | 21.66              | 22.48              |
|                |            |               | 14        | 22.50                | 21.69                | 21.49              | 22.30              |
|                |            | 8             | 0         | 21.50                | 20.76                | 20.51              | 21.33              |
|                |            |               | 4         | 21.50                | 20.75                | 21.44              | 21.35              |
|                |            |               | 7         | 21.50                | 20.69                | 21.39              | 21.32              |
|                |            | 15            | 0         | 21.50                | 20.73                | 21.33              | 21.33              |
|                |            |               | 0         | 22.00                | 20.81                | 21.40              | 21.50              |
|                |            |               | 7         | 22.00                | 20.91                | 21.56              | 21.67              |
|                |            | 1             | 14        | 21.50                | 20.73                | 21.40              | 21.47              |
|                |            |               | 0         | 20.50                | 19.83                | 20.42              | 20.32              |
|                |            |               | 4         | 20.50                | 19.86                | 20.48              | 20.39              |
|                | 16QAM      | 8             | 7         | 20.50                | 19.79                | 20.44              | 20.32              |
|                |            |               | 0         | 20.50                | 19.79                | 20.42              | 20.32              |
|                |            |               | 0         | 20.50                | 19.79                | 20.42              | 20.32              |
|                |            | 15            | 0         | 20.50                | 19.79                | 20.42              | 20.32              |
|                |            |               | 0         | 20.50                | 19.79                | 20.42              | 20.32              |
|                |            |               | 0         | 20.50                | 19.79                | 20.42              | 20.32              |
| 5MHz           | QPSK       | 1             | 0         | 23.00                | 22.58                | 21.77              | 21.74              |
|                |            |               | 13        | 23.00                | 22.70                | 21.89              | 21.93              |
|                |            |               | 24        | 22.50                | 22.48                | 21.78              | 21.77              |
|                |            | 12            | 0         | 22.00                | 21.63                | 20.80              | 20.87              |
|                |            |               | 6         | 22.00                | 21.66                | 20.88              | 20.90              |
|                |            |               | 13        | 22.00                | 21.55                | 20.94              | 20.79              |
|                |            | 25            | 0         | 22.00                | 21.59                | 20.98              | 20.83              |
|                |            |               | 0         | 22.00                | 21.62                | 21.02              | 20.59              |
|                |            |               | 13        | 21.50                | 21.49                | 21.13              | 20.72              |
|                |            | 1             | 24        | 21.50                | 21.24                | 21.04              | 20.65              |
|                |            |               | 0         | 20.50                | 20.13                | 19.88              | 19.87              |
|                |            |               | 6         | 20.50                | 20.32                | 20.05              | 19.89              |
|                | 16QAM      | 12            | 13        | 20.50                | 20.09                | 19.87              | 19.84              |
|                |            |               | 0         | 20.50                | 20.27                | 19.88              | 19.88              |
|                |            |               | 0         | 20.50                | 20.27                | 19.88              | 19.88              |
|                |            | 25            | 0         | 20.50                | 20.27                | 19.88              | 19.88              |
|                |            |               | 0         | 20.50                | 20.27                | 19.88              | 19.88              |
|                |            |               | 0         | 20.50                | 20.27                | 19.88              | 19.88              |

| LTE-FDD Band 2 |            |               |           | Maximum Tune-up(dBm) | 18650        | 18900     | 19150     |
|----------------|------------|---------------|-----------|----------------------|--------------|-----------|-----------|
| Bandwidth      | Modulation | RB allocation | RB offset |                      | 1855.0MHz    | 1880.0MHz | 1905.0MHz |
| 10MHz          | QPSK       | 1             | 0         | 22.50                | 22.19        | 21.81     | 21.78     |
|                |            |               | 25        | 22.50                | 22.21        | 21.95     | 21.93     |
|                |            |               | 49        | 22.50                | 22.04        | 21.76     | 21.76     |
|                |            | 25            | 0         | 21.50                | 21.13        | 20.93     | 21.02     |
|                |            |               | 13        | 21.50                | 21.07        | 20.88     | 20.84     |
|                |            |               | 25        | 21.50                | 21.11        | 20.85     | 20.74     |
|                | 16QAM      | 50            | 0         | 21.50                | 21.10        | 20.90     | 20.92     |
|                |            |               | 0         | 21.50                | 21.12        | 20.97     | 21.26     |
|                |            |               | 25        | 21.50                | 21.23        | 21.19     | 21.47     |
|                |            | 1             | 49        | 21.50                | 20.99        | 20.97     | 21.38     |
|                |            |               | 0         | 20.50                | 20.23        | 19.96     | 20.07     |
|                |            |               | 13        | 20.50                | 20.14        | 19.90     | 19.92     |
|                |            | 25            | 25        | 20.50                | 20.19        | 19.94     | 19.78     |
|                |            |               | 0         | 20.50                | 20.14        | 19.94     | 19.90     |
|                |            |               | 0         | 20.50                | 20.14        | 19.94     | 19.90     |
| Bandwidth      | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 18675        | 18900     | 19125     |
| 15MHz          | QPSK       | 1             | 0         | 22.00                | 22.00        | 21.72     | 21.68     |
|                |            |               | 38        | 22.50                | 22.01        | 21.80     | 21.79     |
|                |            |               | 74        | 22.00                | 21.82        | 21.69     | 21.72     |
|                |            | 36            | 0         | 21.50                | 21.13        | 20.95     | 20.99     |
|                |            |               | 18        | 21.50                | 21.07        | 20.92     | 20.95     |
|                |            |               | 39        | 21.50                | 21.10        | 20.87     | 20.70     |
|                | 16QAM      | 75            | 0         | 21.50                | 21.10        | 20.94     | 20.85     |
|                |            |               | 0         | 21.50                | 21.43        | 20.87     | 21.22     |
|                |            |               | 38        | 21.50                | 21.41        | 21.02     | 21.37     |
|                |            | 1             | 74        | 21.50                | 21.15        | 20.92     | 21.35     |
|                |            |               | 0         | 20.50                | 20.10        | 19.93     | 19.92     |
|                |            |               | 18        | 20.50                | 20.04        | 19.90     | 19.87     |
|                |            | 36            | 39        | 20.50                | 20.10        | 19.91     | 19.77     |
|                |            |               | 0         | 20.50                | 20.06        | 19.93     | 19.81     |
|                |            |               | 0         | 20.50                | 20.06        | 19.93     | 19.81     |
| Bandwidth      | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 18700        | 18900     | 19100     |
| 20MHz          | QPSK       | 1             | 0         | 22.00                | 21.88        | 21.65     | 21.65     |
|                |            |               | 50        | 22.50                | <b>22.14</b> | 22.03     | 22.07     |
|                |            |               | 99        | 22.00                | 21.61        | 21.62     | 21.69     |
|                |            | 50            | 0         | 21.50                | 21.02        | 21.00     | 20.82     |
|                |            |               | 25        | 21.50                | 21.04        | 20.92     | 20.88     |
|                |            |               | 50        | 21.50                | <b>21.09</b> | 20.85     | 20.50     |
|                | 16QAM      | 100           | 0         | 21.50                | 21.09        | 21.01     | 20.66     |
|                |            |               | 0         | 21.50                | 21.42        | 20.77     | 20.92     |
|                |            |               | 50        | 22.00                | 21.71        | 21.26     | 21.34     |
|                |            | 1             | 99        | 21.50                | 21.13        | 20.86     | 20.99     |
|                |            |               | 0         | 20.50                | 20.02        | 19.99     | 19.79     |
|                |            |               | 25        | 20.50                | 20.03        | 19.89     | 19.87     |
|                |            | 50            | 50        | 20.50                | 20.08        | 19.86     | 19.54     |
|                |            |               | 0         | 20.50                | 20.09        | 19.96     | 19.73     |
|                |            |               | 0         | 20.50                | 20.09        | 19.96     | 19.73     |

## Band 4

| LTE-FDD Band 4 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                    |                    |
|----------------|------------|---------------|-----------|----------------------|----------------------|--------------------|--------------------|
| Bandwidth      | Modulation | RB allocation | RB offset |                      | 19957<br>1710.7MHz   | 20176<br>1732.5MHz | 20393<br>1754.3MHz |
| 1.4MHz         | QPSK       | 1             | 0         | 24.00                | 23.52                | 23.39              | 22.99              |
|                |            |               | 2         | 23.50                | 23.41                | 23.26              | 22.98              |
|                |            |               | 5         | 23.50                | 23.24                | 23.27              | 23.00              |
|                |            | 3             | 0         | 24.00                | 23.67                | 23.65              | 23.51              |
|                |            |               | 2         | 24.00                | 23.67                | 23.67              | 23.51              |
|                |            |               | 3         | 24.00                | 23.67                | 23.65              | 23.51              |
|                | 16QAM      | 6             | 0         | 23.00                | 22.85                | 22.85              | 22.62              |
|                |            |               | 0         | 23.00                | 22.53                | 22.51              | 22.17              |
|                |            |               | 2         | 23.00                | 22.53                | 22.50              | 22.15              |
|                |            | 1             | 5         | 23.00                | 22.52                | 22.49              | 22.18              |
|                |            |               | 0         | 23.00                | 22.76                | 22.76              | 22.80              |
|                |            |               | 2         | 23.00                | 22.78                | 22.78              | 22.82              |
|                |            | 3             | 3         | 23.00                | 22.77                | 22.78              | 22.83              |
|                |            |               | 0         | 22.00                | 21.90                | 21.87              | 21.61              |
| 3MHz           | QPSK       | 1             | 0         | 23.50                | 23.28                | 23.26              | 23.17              |
|                |            |               | 7         | 23.50                | 23.25                | 23.26              | 23.14              |
|                |            |               | 14        | 23.50                | 23.27                | 23.27              | 23.14              |
|                |            | 8             | 0         | 23.00                | 22.81                | 22.82              | 22.57              |
|                |            |               | 4         | 23.00                | 22.80                | 22.80              | 22.53              |
|                |            |               | 7         | 23.00                | 22.81                | 22.81              | 22.52              |
|                |            | 15            | 0         | 23.00                | 22.85                | 22.81              | 22.58              |
|                |            |               | 0         | 23.00                | 22.40                | 22.54              | 22.56              |
|                |            |               | 7         | 23.00                | 22.37                | 22.50              | 22.50              |
|                | 16QAM      | 1             | 14        | 23.00                | 22.40                | 22.49              | 22.53              |
|                |            |               | 0         | 22.00                | 21.91                | 21.78              | 21.82              |
|                |            |               | 4         | 22.00                | 21.89                | 21.80              | 21.79              |
|                |            | 8             | 7         | 22.00                | 21.92                | 21.80              | 21.78              |
|                |            |               | 0         | 22.00                | 21.90                | 21.78              | 21.67              |
|                |            | 15            | 0         | 22.00                | 19976                | 20176              | 20375              |
|                |            |               | 0         | 23.50                | 1712.5MHz            | 1732.5MHz          | 1752.5MHz          |
|                |            |               | 13        | 23.50                | 23.46                | 23.30              | 23.43              |
|                | QPSK       | 1             | 24        | 23.50                | 23.33                | 23.28              | 23.32              |
|                |            |               | 0         | 23.00                | 22.82                | 22.80              | 22.64              |
|                |            |               | 6         | 23.00                | 22.79                | 22.80              | 22.59              |
|                |            | 12            | 13        | 23.00                | 22.84                | 22.85              | 22.53              |
|                |            |               | 0         | 23.00                | 22.81                | 22.84              | 22.62              |
|                |            |               | 0         | 23.00                | 22.55                | 22.62              | 22.12              |
|                | 16QAM      | 1             | 13        | 23.00                | 22.40                | 22.57              | 22.01              |
|                |            |               | 24        | 23.00                | 22.51                | 22.64              | 22.11              |
|                |            |               | 0         | 22.00                | 21.83                | 21.84              | 21.74              |
|                |            | 12            | 6         | 22.00                | 21.82                | 21.83              | 21.66              |
|                |            |               | 13        | 22.00                | 21.89                | 21.88              | 21.59              |
|                |            |               | 0         | 22.00                | 21.84                | 21.84              | 21.71              |

| LTE-FDD Band 4 |            |               |           | Maximum Tune-up(dBm) | 20000     | 20176     | 20350     |
|----------------|------------|---------------|-----------|----------------------|-----------|-----------|-----------|
| Bandwidth      | Modulation | RB allocation | RB offset |                      | 1715.0MHz | 1732.5MHz | 1750.0MHz |
| 10MHz          | QPSK       | 1             | 0         | 23.50                | 23.35     | 23.36     | 23.29     |
|                |            |               | 25        | 23.50                | 23.30     | 23.30     | 23.20     |
|                |            |               | 49        | 23.50                | 23.35     | 23.34     | 23.20     |
|                |            | 25            | 0         | 23.00                | 22.80     | 22.79     | 22.64     |
|                |            |               | 13        | 23.00                | 22.85     | 22.81     | 22.61     |
|                |            |               | 25        | 23.00                | 22.88     | 22.88     | 22.60     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.82     | 22.87     | 22.61     |
|                |            |               | 25        | 23.00                | 22.41     | 22.63     | 22.68     |
|                |            |               | 49        | 23.00                | 22.36     | 22.50     | 22.56     |
|                |            | 25            | 0         | 22.00                | 22.45     | 22.58     | 22.60     |
|                |            |               | 13        | 22.00                | 21.88     | 21.85     | 21.70     |
|                |            |               | 25        | 22.00                | 21.94     | 21.87     | 21.68     |
| 15MHz          | QPSK       | 1             | 0         | 23.50                | 23.22     | 23.19     | 23.20     |
|                |            |               | 38        | 23.50                | 23.25     | 23.28     | 23.19     |
|                |            |               | 74        | 23.50                | 23.20     | 23.22     | 23.09     |
|                |            | 36            | 0         | 23.00                | 22.74     | 22.76     | 22.58     |
|                |            |               | 18        | 23.00                | 22.76     | 22.77     | 22.64     |
|                |            |               | 39        | 23.00                | 22.71     | 22.84     | 22.56     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.73     | 22.84     | 22.58     |
|                |            |               | 38        | 23.00                | 22.61     | 22.42     | 22.69     |
|                |            |               | 74        | 23.00                | 22.60     | 22.49     | 22.59     |
|                |            | 36            | 0         | 22.00                | 22.58     | 22.40     | 22.49     |
|                |            |               | 18        | 22.00                | 21.77     | 21.81     | 21.60     |
|                |            |               | 39        | 22.00                | 21.81     | 21.83     | 21.69     |
| 20MHz          | QPSK       | 1             | 0         | 23.50                | 23.27     | 23.19     | 23.21     |
|                |            |               | 50        | 23.50                | 23.24     | 23.31     | 23.10     |
|                |            |               | 99        | 23.50                | 23.27     | 23.21     | 22.99     |
|                |            | 50            | 0         | 23.00                | 22.84     | 22.87     | 22.59     |
|                |            |               | 25        | 23.00                | 22.86     | 22.83     | 22.71     |
|                |            |               | 50        | 23.00                | 22.71     | 22.96     | 22.58     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.77     | 22.94     | 22.60     |
|                |            |               | 50        | 23.00                | 22.93     | 22.51     | 22.52     |
|                |            |               | 99        | 23.00                | 22.90     | 22.52     | 22.39     |
|                |            | 50            | 0         | 22.00                | 22.96     | 22.43     | 22.27     |
|                |            |               | 25        | 22.00                | 21.83     | 21.86     | 21.55     |
|                |            |               | 50        | 22.00                | 21.84     | 21.82     | 21.69     |
| 10MHz          | QPSK       | 1             | 0         | 23.50                | 23.35     | 23.36     | 23.29     |
|                |            |               | 25        | 23.50                | 23.30     | 23.30     | 23.20     |
|                |            |               | 49        | 23.50                | 23.35     | 23.34     | 23.20     |
|                |            | 25            | 0         | 23.00                | 22.80     | 22.79     | 22.64     |
|                |            |               | 13        | 23.00                | 22.85     | 22.81     | 22.61     |
|                |            |               | 25        | 23.00                | 22.88     | 22.88     | 22.60     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.82     | 22.87     | 22.61     |
|                |            |               | 25        | 23.00                | 22.41     | 22.63     | 22.68     |
|                |            |               | 49        | 23.00                | 22.36     | 22.50     | 22.56     |
|                |            | 25            | 0         | 22.00                | 22.45     | 22.58     | 22.60     |
|                |            |               | 13        | 22.00                | 21.88     | 21.85     | 21.70     |
|                |            |               | 25        | 22.00                | 21.94     | 21.87     | 21.68     |
| 15MHz          | QPSK       | 1             | 0         | 23.50                | 23.22     | 23.19     | 23.20     |
|                |            |               | 38        | 23.50                | 23.25     | 23.28     | 23.19     |
|                |            |               | 74        | 23.50                | 23.20     | 23.22     | 23.09     |
|                |            | 36            | 0         | 23.00                | 22.74     | 22.76     | 22.58     |
|                |            |               | 18        | 23.00                | 22.76     | 22.77     | 22.64     |
|                |            |               | 39        | 23.00                | 22.71     | 22.84     | 22.56     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.73     | 22.84     | 22.58     |
|                |            |               | 38        | 23.00                | 22.61     | 22.42     | 22.69     |
|                |            |               | 74        | 23.00                | 22.60     | 22.49     | 22.59     |
|                |            | 36            | 0         | 22.00                | 22.58     | 22.40     | 22.49     |
|                |            |               | 18        | 22.00                | 21.77     | 21.81     | 21.60     |
|                |            |               | 39        | 22.00                | 21.81     | 21.83     | 21.69     |
| 20MHz          | QPSK       | 1             | 0         | 23.50                | 23.27     | 23.19     | 23.21     |
|                |            |               | 50        | 23.50                | 23.24     | 23.31     | 23.10     |
|                |            |               | 99        | 23.50                | 23.27     | 23.21     | 22.99     |
|                |            | 50            | 0         | 23.00                | 22.84     | 22.87     | 22.59     |
|                |            |               | 25        | 23.00                | 22.86     | 22.83     | 22.71     |
|                |            |               | 50        | 23.00                | 22.71     | 22.96     | 22.58     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.77     | 22.94     | 22.60     |
|                |            |               | 50        | 23.00                | 22.93     | 22.51     | 22.52     |
|                |            |               | 99        | 23.00                | 22.90     | 22.52     | 22.39     |
|                |            | 50            | 0         | 22.00                | 22.96     | 22.43     | 22.27     |
|                |            |               | 25        | 22.00                | 21.83     | 21.86     | 21.55     |
|                |            |               | 50        | 22.00                | 21.84     | 21.82     | 21.69     |
| 10MHz          | QPSK       | 1             | 0         | 23.50                | 23.35     | 23.36     | 23.29     |
|                |            |               | 25        | 23.50                | 23.30     | 23.30     | 23.20     |
|                |            |               | 49        | 23.50                | 23.35     | 23.34     | 23.20     |
|                |            | 25            | 0         | 23.00                | 22.80     | 22.79     | 22.64     |
|                |            |               | 13        | 23.00                | 22.85     | 22.81     | 22.61     |
|                |            |               | 25        | 23.00                | 22.88     | 22.88     | 22.60     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.82     | 22.87     | 22.61     |
|                |            |               | 25        | 23.00                | 22.41     | 22.63     | 22.68     |
|                |            |               | 49        | 23.00                | 22.36     | 22.50     | 22.56     |
|                |            | 25            | 0         | 22.00                | 22.45     | 22.58     | 22.60     |
|                |            |               | 13        | 22.00                | 21.88     | 21.85     | 21.70     |
|                |            |               | 25        | 22.00                | 21.94     | 21.87     | 21.68     |
| 15MHz          | QPSK       | 1             | 0         | 23.50                | 23.22     | 23.19     | 23.20     |
|                |            |               | 38        | 23.50                | 23.25     | 23.28     | 23.19     |
|                |            |               | 74        | 23.50                | 23.20     | 23.22     | 23.09     |
|                |            | 36            | 0         | 23.00                | 22.74     | 22.76     | 22.58     |
|                |            |               | 18        | 23.00                | 22.76     | 22.77     | 22.64     |
|                |            |               | 39        | 23.00                | 22.71     | 22.84     | 22.56     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.73     | 22.84     | 22.58     |
|                |            |               | 38        | 23.00                | 22.61     | 22.42     | 22.69     |
|                |            |               | 74        | 23.00                | 22.60     | 22.49     | 22.59     |
|                |            | 36            | 0         | 22.00                | 22.58     | 22.40     | 22.49     |
|                |            |               | 18        | 22.00                | 21.77     | 21.81     | 21.60     |
|                |            |               | 39        | 22.00                | 21.81     | 21.83     | 21.69     |
| 20MHz          | QPSK       | 1             | 0         | 23.50                | 23.27     | 23.19     | 23.21     |
|                |            |               | 50        | 23.50                | 23.24     | 23.31     | 23.10     |
|                |            |               | 99        | 23.50                | 23.27     | 23.21     | 22.99     |
|                |            | 50            | 0         | 23.00                | 22.84     | 22.87     | 22.59     |
|                |            |               | 25        | 23.00                | 22.86     | 22.83     | 22.71     |
|                |            |               | 50        | 23.00                | 22.71     | 22.96     | 22.58     |
|                | 16QAM      | 1             | 0         | 23.00                | 22.77     | 22.94     | 22.60     |
|                |            |               | 50        | 23.00                | 22.93     | 22.51     | 22.52     |
|                |            |               | 99        | 23.00                | 22.90     | 22.52     | 22.39     |
|                |            | 50            | 0         | 22.00                | 22.96     | 22.43     | 22.27     |
|                |            |               | 25        | 22.00                | 21.83     | 21.86     | 21.55     |
|                |            |               | 50        | 22.00                | 21.84     | 21.82     | 21.69     |

## Band 5

| LTE-FDD Band 5 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                   |                   |
|----------------|------------|---------------|-----------|----------------------|----------------------|-------------------|-------------------|
| Bandwidth      | Modulation | RB allocation | RB offset |                      | 20407<br>824.7MHz    | 20252<br>836.5MHz | 20643<br>848.3MHz |
| 1.4MHz         | QPSK       | 1             | 0         | 24.50                | 24.15                | 23.84             | 23.78             |
|                |            |               | 2         | 24.50                | 24.30                | 23.83             | 23.82             |
|                |            |               | 5         | 24.50                | 24.19                | 23.84             | 23.84             |
|                |            | 3             | 0         | 24.50                | 24.14                | 24.05             | 23.94             |
|                |            |               | 2         | 24.50                | 24.16                | 24.04             | 23.99             |
|                |            |               | 3         | 24.50                | 24.06                | 23.96             | 23.98             |
|                | 16QAM      | 1             | 0         | 23.50                | 23.02                | 22.97             | 22.96             |
|                |            |               | 2         | 23.50                | 23.08                | 23.06             | 22.92             |
|                |            |               | 5         | 23.50                | 23.03                | 23.01             | 22.93             |
|                |            | 3             | 0         | 23.50                | 23.07                | 23.06             | 23.00             |
|                |            |               | 2         | 23.50                | 23.03                | 23.14             | 22.91             |
|                |            |               | 3         | 23.50                | 23.02                | 23.14             | 22.95             |
| 3MHz           | QPSK       | 1             | 0         | 24.00                | 23.93                | 23.76             | 23.49             |
|                |            |               | 7         | 24.00                | 23.95                | 23.69             | 23.44             |
|                |            |               | 14        | 24.50                | 24.05                | 23.51             | 23.45             |
|                |            | 8             | 0         | 23.50                | 23.01                | 23.01             | 22.81             |
|                |            |               | 4         | 23.50                | 23.02                | 23.02             | 22.85             |
|                |            |               | 7         | 23.50                | 23.02                | 23.01             | 22.83             |
|                | 16QAM      | 1             | 0         | 23.50                | 23.05                | 23.01             | 22.90             |
|                |            |               | 7         | 23.00                | 22.86                | 22.72             | 22.89             |
|                |            |               | 14        | 23.00                | 22.94                | 22.76             | 22.85             |
|                |            | 8             | 0         | 22.50                | 22.81                | 22.64             | 22.85             |
|                |            |               | 4         | 22.50                | 22.12                | 21.97             | 22.08             |
|                |            |               | 7         | 22.50                | 22.12                | 22.00             | 22.15             |
| 5MHz           | QPSK       | 1             | 0         | 24.50                | 24.12                | 23.52             | 23.61             |
|                |            |               | 13        | 24.50                | 24.04                | 23.40             | 23.58             |
|                |            |               | 24        | 24.50                | 24.05                | 23.42             | 23.69             |
|                |            | 12            | 0         | 23.50                | 23.04                | 23.04             | 22.89             |
|                |            |               | 6         | 23.50                | 23.03                | 23.00             | 22.85             |
|                |            |               | 13        | 23.50                | 23.04                | 22.93             | 22.80             |
|                | 16QAM      | 1             | 0         | 23.50                | 23.07                | 22.96             | 22.89             |
|                |            |               | 13        | 23.00                | 22.61                | 22.76             | 22.32             |
|                |            |               | 24        | 23.00                | 22.57                | 22.68             | 22.25             |
|                |            | 12            | 0         | 22.50                | 22.69                | 22.70             | 22.34             |
|                |            |               | 6         | 22.50                | 22.06                | 22.05             | 21.99             |
|                |            |               | 13        | 22.50                | 22.02                | 22.01             | 21.94             |
| 10MHz          | QPSK       | 1             | 0         | 24.00                | 24.00                | 23.50             | 23.48             |
|                |            |               | 25        | 24.00                | 23.91                | 23.43             | 23.45             |
|                |            |               | 49        | 24.00                | 23.60                | 23.44             | 23.51             |
|                |            | 25            | 0         | 23.50                | 23.05                | 22.98             | 22.98             |
|                |            |               | 13        | 23.50                | 23.03                | 22.95             | 22.93             |
|                |            |               | 25        | 23.50                | 23.10                | 22.92             | 22.85             |
|                | 16QAM      | 1             | 0         | 23.50                | 23.08                | 22.99             | 22.94             |
|                |            |               | 25        | 23.00                | 22.55                | 22.75             | 22.92             |
|                |            |               | 49        | 23.00                | 22.58                | 22.66             | 22.94             |
|                |            | 25            | 0         | 22.50                | 22.56                | 22.67             | 22.93             |
|                |            |               | 13        | 22.50                | 22.12                | 22.03             | 22.04             |
|                |            |               | 25        | 22.50                | 22.12                | 22.00             | 21.99             |
| 10MHz          | QPSK       | 1             | 0         | 24.00                | 24.00                | 23.50             | 23.48             |
|                |            |               | 25        | 24.00                | 23.91                | 23.43             | 23.45             |
|                |            |               | 49        | 24.00                | 23.60                | 23.44             | 23.51             |
|                |            | 25            | 0         | 23.50                | 23.05                | 22.98             | 22.98             |
|                |            |               | 13        | 23.50                | 23.03                | 22.95             | 22.93             |
|                |            |               | 25        | 23.50                | 23.10                | 22.92             | 22.85             |
|                | 16QAM      | 1             | 0         | 23.50                | 23.08                | 22.99             | 22.94             |
|                |            |               | 25        | 23.00                | 22.55                | 22.75             | 22.92             |
|                |            |               | 49        | 23.00                | 22.58                | 22.66             | 22.94             |
|                |            | 25            | 0         | 22.50                | 22.56                | 22.67             | 22.93             |
|                |            |               | 13        | 22.50                | 22.12                | 22.03             | 22.04             |
|                |            |               | 25        | 22.50                | 22.12                | 22.00             | 21.99             |
| 10MHz          | QPSK       | 1             | 0         | 24.00                | 24.00                | 23.50             | 23.48             |
|                |            |               | 25        | 24.00                | 23.91                | 23.43             | 23.45             |
|                |            |               | 49        | 24.00                | 23.60                | 23.44             | 23.51             |
|                |            | 25            | 0         | 23.50                | 23.05                | 22.98             | 22.98             |
|                |            |               | 13        | 23.50                | 23.03                | 22.95             | 22.93             |
|                |            |               | 25        | 23.50                | 23.10                | 22.92             | 22.85             |
|                | 16QAM      | 1             | 0         | 23.50                | 23.08                | 22.99             | 22.94             |
|                |            |               | 25        | 23.00                | 22.55                | 22.75             | 22.92             |
|                |            |               | 49        | 23.00                | 22.58                | 22.66             | 22.94             |
|                |            | 25            | 0         | 22.50                | 22.56                | 22.67             | 22.93             |
|                |            |               | 13        | 22.50                | 22.12                | 22.03             | 22.04             |
|                |            |               | 25        | 22.50                | 22.12                | 22.00             | 21.99             |

## Band 12

| LTE-FDD Band 12 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                   |                   |
|-----------------|------------|---------------|-----------|----------------------|----------------------|-------------------|-------------------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 23017<br>699.7MHz    | 23095<br>707.5MHz | 23173<br>715.3MHz |
| 1.4MHz          | QPSK       | 1             | 0         | 24.50                | 24.31                | 24.40             | 24.48             |
|                 |            |               | 2         | 25.00                | 24.43                | 24.43             | 24.67             |
|                 |            |               | 5         | 25.00                | 24.32                | 24.33             | 24.55             |
|                 |            | 3             | 0         | 24.50                | 24.39                | 24.41             | 24.49             |
|                 |            |               | 2         | 25.00                | 24.40                | 24.44             | 24.51             |
|                 |            |               | 3         | 24.50                | 24.38                | 24.39             | 24.44             |
|                 | 16QAM      | 6             | 0         | 24.00                | 23.39                | 23.44             | 23.58             |
|                 |            |               | 0         | 23.50                | 23.30                | 23.32             | 23.39             |
|                 |            |               | 2         | 24.00                | 23.44                | 23.55             | 23.53             |
|                 |            | 1             | 5         | 23.50                | 23.34                | 23.48             | 23.44             |
|                 |            |               | 0         | 23.50                | 23.41                | 23.31             | 23.48             |
|                 |            |               | 2         | 23.50                | 23.41                | 23.34             | 23.46             |
| 3MHz            | QPSK       | 3             | 3         | 23.50                | 23.40                | 23.30             | 23.43             |
|                 |            |               | 0         | 23.50                | 22.32                | 22.40             | 22.46             |
|                 |            |               | 0         | 25.00                | 24.06                | 24.37             | 24.51             |
|                 |            | 1             | 7         | 25.00                | 24.54                | 24.52             | 24.67             |
|                 |            |               | 14        | 25.00                | 24.45                | 24.34             | 24.62             |
|                 |            |               | 0         | 24.00                | 23.40                | 23.37             | 23.52             |
|                 | 16QAM      | 8             | 4         | 24.00                | 23.45                | 23.44             | 23.57             |
|                 |            |               | 7         | 24.00                | 23.38                | 23.38             | 23.59             |
|                 |            |               | 0         | 24.00                | 23.37                | 23.34             | 23.50             |
|                 |            | 1             | 0         | 24.00                | 23.36                | 23.81             | 23.46             |
|                 |            |               | 7         | 24.00                | 23.56                | 23.96             | 23.57             |
|                 |            |               | 14        | 224.00               | 23.42                | 23.88             | 23.52             |
| 5MHz            | QPSK       | 1             | 0         | 22.50                | 22.46                | 22.45             | 22.36             |
|                 |            |               | 4         | 23.00                | 22.45                | 22.54             | 22.38             |
|                 |            |               | 7         | 23.00                | 22.40                | 22.52             | 22.40             |
|                 |            | 8             | 0         | 22.50                | 22.39                | 22.38             | 22.31             |
|                 |            |               | 0         | 24.00                | 23.035               | 23.095            | 23.155            |
|                 |            |               | 0         | 24.00                | 701.5MHz             | 707.5MHz          | 713.5MHz          |
| 10MHz           | QPSK       | 1             | 0         | 24.00                | 23.49                | 23.99             | 23.98             |
|                 |            |               | 13        | 24.50                | 23.63                | 24.10             | 24.18             |
|                 |            |               | 24        | 24.00                | 23.50                | 23.96             | 23.98             |
|                 |            | 12            | 0         | 23.50                | 22.90                | 22.90             | 23.23             |
|                 |            |               | 6         | 23.50                | 23.13                | 23.07             | 23.01             |
|                 |            |               | 13        | 23.00                | 22.66                | 22.91             | 22.91             |
| 10MHz           | 16QAM      | 25            | 0         | 23.50                | 23.12                | 22.87             | 22.85             |
|                 |            |               | 0         | 23.50                | 22.59                | 23.16             | 22.66             |
|                 |            |               | 13        | 23.50                | 22.97                | 23.29             | 22.54             |
|                 |            | 1             | 24        | 23.50                | 22.84                | 23.20             | 22.25             |
|                 |            |               | 0         | 22.50                | 22.15                | 21.90             | 21.42             |
|                 |            |               | 6         | 22.50                | 22.09                | 22.07             | 21.31             |
| 10MHz           | QPSK       | 12            | 13        | 22.50                | 22.07                | 21.91             | 21.39             |
|                 |            |               | 0         | 22.50                | 22.12                | 21.85             | 21.45             |
|                 |            |               | 0         | 22.50                | 23.060               | 23.095            | 23.130            |
|                 |            | 25            | 0         | 24.00                | 704.0MHz             | 707.5MHz          | 711.0MHz          |
|                 |            |               | 0         | 24.00                | 23.54                | 23.38             | 23.61             |
|                 |            |               | 25        | 24.00                | 23.51                | 23.44             | 23.69             |
| 10MHz           | 16QAM      | 49            | 23.50     | 23.18                | 23.27                | 23.41             | 23.41             |
|                 |            |               | 0         | 22.50                | 22.33                | 21.83             | 22.43             |
|                 |            |               | 13        | 22.50                | 22.33                | 22.15             | 22.23             |
|                 |            | 25            | 25        | 23.00                | 22.63                | 21.94             | 22.17             |
|                 |            |               | 0         | 23.00                | 22.57                | 22.15             | 22.39             |
|                 |            |               | 0         | 23.00                | 22.61                | 22.33             | 22.10             |
| 10MHz           | QPSK       | 1             | 0         | 23.00                | 22.81                | 22.46             | 22.33             |
|                 |            |               | 25        | 23.00                | 22.70                | 22.33             | 22.14             |
|                 |            |               | 0         | 21.50                | 21.39                | 20.90             | 21.48             |
|                 |            | 25            | 13        | 21.50                | 21.36                | 21.22             | 21.33             |
|                 |            |               | 25        | 22.00                | 21.71                | 21.08             | 21.23             |
|                 |            |               | 0         | 22.00                | 21.66                | 21.19             | 21.36             |



# Band 13

| LTE-FDD Band 12 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                   |                   |
|-----------------|------------|---------------|-----------|----------------------|----------------------|-------------------|-------------------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 23205<br>779.5MHz    | 23230<br>782.0MHz | 23255<br>784.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 24.50                | 24.03                | 24.01             | 23.95             |
|                 |            |               | 13        | 24.50                | 23.04                | 24.12             | 24.07             |
|                 |            |               | 24        | 24.00                | 23.98                | 23.96             | 23.91             |
|                 |            | 12            | 0         | 23.50                | 23.04                | 23.06             | 23.04             |
|                 |            |               | 6         | 23.50                | 23.12                | 23.10             | 23.09             |
|                 |            |               | 13        | 23.50                | 23.10                | 23.05             | 23.02             |
|                 | 16QAM      | 25            | 0         | 23.50                | 23.06                | 23.00             | 23.04             |
|                 |            |               | 0         | 23.50                | 23.09                | 22.84             | 23.04             |
|                 |            |               | 13        | 23.50                | 23.20                | 22.93             | 23.17             |
|                 |            | 1             | 24        | 23.50                | 23.07                | 22.79             | 23.01             |
|                 |            |               | 0         | 22.50                | 21.97                | 22.03             | 22.06             |
|                 |            |               | 6         | 22.50                | 22.10                | 22.07             | 22.04             |
|                 |            | 12            | 13        | 22.50                | 22.07                | 22.04             | 21.99             |
|                 |            |               | 0         | 22.50                | 22.07                | 22.06             | 22.06             |
|                 |            |               | 25        | 22.50                | 22.07                | 22.06             | 22.06             |
| Bandwidth       | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 23230<br>782.0MHz    |                   |                   |
| 10MHz           | QPSK       | 1             | 0         | 24.50                | 24.13                |                   |                   |
|                 |            |               | 25        | 24.50                | 24.18                |                   |                   |
|                 |            |               | 49        | 24.00                | 23.96                |                   |                   |
|                 |            | 25            | 0         | 23.50                | 23.03                |                   |                   |
|                 |            |               | 13        | 23.50                | 23.07                |                   |                   |
|                 |            |               | 25        | 23.50                | 23.03                |                   |                   |
|                 | 16QAM      | 50            | 0         | 23.50                | 23.04                |                   |                   |
|                 |            |               | 0         | 23.50                | 23.24                |                   |                   |
|                 |            |               | 25        | 23.50                | 23.33                |                   |                   |
|                 |            | 1             | 49        | 23.50                | 23.13                |                   |                   |
|                 |            |               | 0         | 22.50                | 22.07                |                   |                   |
|                 |            |               | 13        | 22.50                | 22.08                |                   |                   |
|                 |            | 25            | 25        | 22.50                | 22.06                |                   |                   |
|                 |            |               | 0         | 22.50                | 22.06                |                   |                   |
|                 |            |               | 50        | 22.50                | 22.06                |                   |                   |

# Band 25

| LTE-FDD Band 25 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                    |                    |
|-----------------|------------|---------------|-----------|----------------------|----------------------|--------------------|--------------------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 26047<br>1850.7MHz   | 26365<br>1882.5MHz | 26683<br>1914.3MHz |
| 1.4MHz          | QPSK       | 1             | 0         | 24.50                | 24.18                | 24.16              | 23.42              |
|                 |            |               | 2         | 24.50                | 24.21                | 23.79              | 23.36              |
|                 |            |               | 5         | 24.50                | 24.21                | 23.84              | 23.36              |
|                 |            | 3             | 0         | 24.50                | 24.30                | 24.37              | 24.09              |
|                 |            |               | 2         | 24.50                | 24.32                | 24.35              | 24.08              |
|                 |            |               | 3         | 24.50                | 24.31                | 24.32              | 24.06              |
|                 | 16QAM      | 6             | 0         | 23.50                | 23.41                | 23.38              | 22.99              |
|                 |            |               | 0         | 23.50                | 23.42                | 23.16              | 22.76              |
|                 |            |               | 2         | 23.50                | 23.36                | 23.14              | 22.73              |
|                 |            | 1             | 5         | 23.50                | 23.42                | 23.16              | 22.70              |
|                 |            |               | 0         | 23.50                | 23.43                | 23.33              | 23.22              |
|                 |            |               | 2         | 23.50                | 23.42                | 23.28              | 23.24              |
|                 |            | 3             | 3         | 23.50                | 23.42                | 23.28              | 23.24              |
|                 |            |               | 0         | 23.50                | 22.33                | 22.56              | 22.17              |
|                 |            |               | 6         | 23.50                | 22.33                | 22.56              | 22.17              |
| Bandwidth       | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 26055<br>1851.5MHz   | 26365<br>1882.5MHz | 26675<br>1913.5MHz |
| 3MHz            | QPSK       | 1             | 0         | 24.50                | 24.25                | 23.86              | 23.82              |
|                 |            |               | 7         | 24.50                | 24.18                | 23.80              | 23.71              |
|                 |            |               | 14        | 24.50                | 24.21                | 23.86              | 23.67              |
|                 |            | 8             | 0         | 23.50                | 23.41                | 23.42              | 23.23              |
|                 |            |               | 4         | 23.50                | 23.39                | 23.36              | 23.05              |
|                 |            |               | 7         | 23.50                | 23.41                | 23.40              | 23.01              |
|                 | 16QAM      | 15            | 0         | 23.50                | 23.43                | 23.37              | 23.25              |
|                 |            |               | 0         | 23.50                | 22.95                | 23.22              | 23.21              |
|                 |            |               | 7         | 23.50                | 22.95                | 23.19              | 23.12              |
|                 |            | 1             | 14        | 23.50                | 22.99                | 23.20              | 23.09              |
|                 |            |               | 0         | 23.00                | 22.49                | 22.53              | 22.52              |
|                 |            |               | 4         | 23.00                | 22.48                | 22.51              | 22.49              |
|                 |            | 8             | 7         | 23.00                | 22.48                | 22.50              | 22.43              |
|                 |            |               | 0         | 23.00                | 22.48                | 22.50              | 22.33              |
|                 |            |               | 15        | 23.00                | 22.48                | 22.50              | 22.33              |

| LTE-FDD Band 25 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                    |                    |
|-----------------|------------|---------------|-----------|----------------------|----------------------|--------------------|--------------------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 26065<br>1852.5MHz   | 26365<br>1882.5MHz | 26665<br>1912.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 25.00                | 24.55                | 24.12              | 24.20              |
|                 |            |               | 13        | 24.50                | 24.15                | 23.81              | 23.89              |
|                 |            |               | 24        | 24.50                | 24.26                | 24.17              | 24.02              |
|                 |            | 12            | 0         | 24.00                | 23.46                | 23.50              | 23.32              |
|                 |            |               | 6         | 23.50                | 23.42                | 23.39              | 23.28              |
|                 |            |               | 13        | 23.50                | 23.46                | 23.42              | 23.07              |
|                 | 16QAM      | 1             | 0         | 23.50                | 23.45                | 23.45              | 23.26              |
|                 |            |               | 13        | 23.50                | 23.10                | 23.35              | 22.86              |
|                 |            |               | 24        | 23.50                | 23.04                | 23.23              | 22.73              |
|                 |            | 12            | 0         | 23.00                | 23.11                | 23.37              | 22.73              |
|                 |            |               | 6         | 23.00                | 22.45                | 22.61              | 22.42              |
|                 |            |               | 13        | 23.00                | 22.43                | 22.58              | 22.36              |
| 10MHz           | QPSK       | 1             | 0         | 23.00                | 22.48                | 22.57              | 22.24              |
|                 |            |               | 25        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            | 25            | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 25        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            | 50            | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 25        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 | 16QAM      | 1             | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 25        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 49        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            | 25            | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 13        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 25        | 23.00                | 22.50                | 22.59              | 22.36              |
| 15MHz           | QPSK       | 1             | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 38        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 74        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            | 36            | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 18        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 39        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 | 16QAM      | 1             | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 38        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 74        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            | 36            | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 18        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 39        | 23.00                | 22.50                | 22.59              | 22.36              |
| 20MHz           | QPSK       | 1             | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 50        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 99        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            | 50            | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 25        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 50        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 | 16QAM      | 1             | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 50        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 99        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            | 50            | 0         | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 25        | 23.00                | 22.50                | 22.59              | 22.36              |
|                 |            |               | 50        | 23.00                | 22.50                | 22.59              | 22.36              |

## Band 26

| LTE-FDD Band 26 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                   |                   |
|-----------------|------------|---------------|-----------|----------------------|----------------------|-------------------|-------------------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 26697<br>814.7MHz    | 26740<br>819.0MHz | 26783<br>823.3MHz |
| 1.4MHz          | QPSK       | 1             | 0         | 24.50                | 23.83                | 23.72             | 24.14             |
|                 |            |               | 2         | 24.50                | 23.91                | 24.09             | 24.40             |
|                 |            |               | 5         | 24.50                | 23.83                | 24.03             | 24.37             |
|                 |            | 3             | 0         | 24.50                | 23.89                | 24.08             | 24.18             |
|                 |            |               | 2         | 24.50                | 23.96                | 24.16             | 24.22             |
|                 |            |               | 3         | 24.50                | 24.03                | 24.14             | 24.10             |
|                 | 16QAM      | 1             | 0         | 23.50                | 22.96                | 23.10             | 23.38             |
|                 |            |               | 2         | 23.50                | 23.16                | 23.21             | 23.14             |
|                 |            |               | 5         | 23.50                | 22.99                | 23.14             | 23.12             |
|                 |            | 3             | 0         | 23.50                | 23.04                | 23.05             | 23.16             |
|                 |            |               | 2         | 23.50                | 22.88                | 23.07             | 23.26             |
|                 |            |               | 3         | 23.50                | 22.90                | 23.17             | 23.11             |
| 3MHz            | QPSK       | 1             | 0         | 23.50                | 22.91                | 23.32             | 23.07             |
|                 |            |               | 2         | 22.50                | 21.88                | 22.11             | 22.19             |
|                 |            |               | 7         | 24.50                | 24.13                | 23.98             | 23.70             |
|                 |            | 8             | 14        | 24.50                | 24.33                | 23.69             | 23.85             |
|                 |            |               | 0         | 24.50                | 24.15                | 23.64             | 23.86             |
|                 |            |               | 4         | 23.50                | 23.13                | 22.58             | 22.79             |
|                 | 16QAM      | 1             | 7         | 23.50                | 23.18                | 22.65             | 22.77             |
|                 |            |               | 0         | 23.50                | 23.17                | 22.59             | 22.68             |
|                 |            |               | 0         | 23.50                | 23.06                | 22.62             | 22.69             |
|                 |            | 8             | 0         | 23.50                | 23.12                | 22.74             | 23.18             |
|                 |            |               | 7         | 24.00                | 23.63                | 22.79             | 23.01             |
|                 |            |               | 14        | 23.50                | 23.22                | 23.12             | 22.67             |
| 5MHz            | QPSK       | 1             | 0         | 22.50                | 22.12                | 21.61             | 21.92             |
|                 |            |               | 4         | 22.50                | 22.24                | 21.72             | 21.74             |
|                 |            |               | 7         | 22.50                | 22.07                | 21.75             | 21.70             |
|                 |            | 12            | 0         | 22.50                | 22.06                | 21.58             | 21.77             |
|                 |            |               | 13        | 24.00                | 23.63                | 22.79             | 23.01             |
|                 |            |               | 24        | 23.50                | 23.22                | 23.12             | 22.67             |
|                 | 16QAM      | 1             | 0         | 22.50                | 22.12                | 21.61             | 21.92             |
|                 |            |               | 4         | 22.50                | 22.24                | 21.72             | 21.74             |
|                 |            |               | 7         | 22.50                | 22.07                | 21.75             | 21.70             |
|                 |            | 12            | 0         | 22.50                | 22.06                | 21.58             | 21.77             |
|                 |            |               | 13        | 24.00                | 23.63                | 22.79             | 23.01             |
|                 |            |               | 24        | 23.50                | 23.22                | 23.12             | 22.67             |
| 10MHz           | QPSK       | 1             | 0         | 24.00                | 23.53                | 23.43             | 23.59             |
|                 |            |               | 13        | 24.00                | 23.64                | 23.59             | 23.65             |
|                 |            |               | 24        | 24.00                | 23.50                | 23.51             | 23.71             |
|                 |            | 12            | 0         | 23.00                | 22.52                | 22.70             | 22.63             |
|                 |            |               | 6         | 23.00                | 22.60                | 22.61             | 22.72             |
|                 |            |               | 13        | 23.00                | 22.60                | 22.46             | 22.40             |
|                 | 16QAM      | 1             | 0         | 23.00                | 22.52                | 22.59             | 22.49             |
|                 |            |               | 0         | 23.00                | 22.55                | 22.75             | 22.39             |
|                 |            |               | 13        | 23.00                | 22.41                | 22.71             | 22.89             |
|                 |            | 12            | 24        | 23.00                | 22.67                | 22.37             | 22.64             |
|                 |            |               | 0         | 22.00                | 21.39                | 21.68             | 21.50             |
|                 |            |               | 6         | 22.00                | 21.55                | 21.61             | 21.71             |
| 15MHz           | QPSK       | 1             | 13        | 22.00                | 21.60                | 21.47             | 21.37             |
|                 |            |               | 0         | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            |               | 25        | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            | 12            | 0         | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            |               | 13        | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            |               | 25        | 22.00                | 21.53                | 21.62             | 21.56             |
|                 | 16QAM      | 1             | 0         | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            |               | 13        | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            |               | 25        | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            | 12            | 0         | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            |               | 13        | 22.00                | 21.53                | 21.62             | 21.56             |
|                 |            |               | 25        | 22.00                | 21.53                | 21.62             | 21.56             |

| LTE-FDD Band 26 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                   |                    |
|-----------------|------------|---------------|-----------|----------------------|----------------------|-------------------|--------------------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 26840<br>1855.0MHz   | 26915<br>814.0MHz | 26990<br>1910.0MHz |
| 10MHz           | QPSK       | 1             | 0         | 24.50                | 24.09                | 23.51             | 23.57              |
|                 |            |               | 25        | 24.00                | 23.81                | 23.73             | 23.83              |
|                 |            |               | 49        | 24.00                | 23.53                | 23.73             | 23.77              |
|                 |            | 25            | 0         | 23.00                | 22.47                | 22.80             | 22.49              |
|                 |            |               | 13        | 23.00                | 22.59                | 22.61             | 22.67              |
|                 |            |               | 25        | 23.00                | 22.69                | 22.51             | 22.48              |
|                 | 16QAM      | 1             | 0         | 23.00                | 22.57                | 22.70             | 22.47              |
|                 |            |               | 0         | 23.00                | 22.97                | 22.58             | 22.68              |
|                 |            |               | 25        | 23.50                | 23.15                | 23.23             | 22.90              |
|                 |            | 25            | 49        | 23.50                | 23.18                | 22.75             | 22.80              |
|                 |            |               | 0         | 22.00                | 21.51                | 21.88             | 21.50              |
|                 |            |               | 13        | 22.00                | 21.61                | 21.67             | 21.67              |
| 15MHz           | QPSK       | 1             | 25        | 22.00                | 21.72                | 21.53             | 21.47              |
|                 |            |               | 0         | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            |               | 50        | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            | 25            | 0         | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            |               | 13        | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            |               | 50        | 22.00                | 21.56                | 21.70             | 21.48              |
|                 | 16QAM      | 1             | 0         | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            |               | 13        | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            |               | 50        | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            | 25            | 0         | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            |               | 13        | 22.00                | 21.56                | 21.70             | 21.48              |
|                 |            |               | 50        | 22.00                | 21.56                | 21.70             | 21.48              |

| Bandwidth | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 26765     | 26865    | 26965     |
|-----------|------------|---------------|-----------|----------------------|-----------|----------|-----------|
|           |            |               |           |                      | 1857.5MHz | 814.0MHz | 1907.5MHz |
| 15MHz     | QPSK       | 1             | 0         | 24.00                | 23.46     | 23.53    | 23.44     |
|           |            |               | 38        | 24.00                | 23.59     | 23.55    | 23.72     |
|           |            |               | 74        | 24.00                | 23.49     | 23.45    | 23.60     |
|           |            | 36            | 0         | 23.00                | 22.70     | 22.51    | 22.82     |
|           |            |               | 18        | 23.00                | 22.65     | 22.64    | 22.81     |
|           |            |               | 39        | 23.00                | 22.72     | 22.43    | 22.83     |
|           |            | 75            | 0         | 23.00                | 22.73     | 22.46    | 22.86     |
|           |            |               | 0         | 23.00                | 22.94     | 22.72    | 22.64     |
|           |            |               | 38        | 23.00                | 23.07     | 22.93    | 22.73     |
|           | 16QAM      | 1             | 74        | 23.00                | 22.92     | 22.76    | 22.69     |
|           |            | 36            | 0         | 22.00                | 21.67     | 21.42    | 21.75     |
|           |            |               | 18        | 22.00                | 21.61     | 21.56    | 21.66     |
|           |            |               | 39        | 22.00                | 21.66     | 21.36    | 21.69     |
|           |            | 75            | 0         | 22.00                | 21.68     | 21.42    | 21.78     |

## Band 41

| LTE-TDD Band 41 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |       |       |
|-----------------|------------|---------------|-----------|----------------------|----------------------|-------|-------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 39675                | 40620 | 41565 |
| 5MHz            | QPSK       | 1             | 0         | 24.50                | 23.79                | 24.23 | 24.22 |
|                 |            |               | 13        | 24.50                | 23.88                | 24.39 | 24.48 |
|                 |            |               | 24        | 24.50                | 23.80                | 24.31 | 24.32 |
|                 |            | 12            | 0         | 23.50                | 22.76                | 23.45 | 23.40 |
|                 |            |               | 6         | 24.00                | 22.83                | 23.53 | 23.30 |
|                 |            |               | 13        | 23.50                | 22.91                | 23.29 | 23.15 |
|                 |            | 25            | 0         | 23.50                | 22.90                | 23.32 | 23.22 |
|                 | 16QAM      | 1             | 0         | 24.00                | 22.76                | 23.45 | 23.56 |
|                 |            |               | 13        | 24.00                | 22.99                | 23.50 | 23.66 |
|                 |            |               | 24        | 23.50                | 22.79                | 23.32 | 23.11 |
|                 |            | 12            | 0         | 22.50                | 21.66                | 22.35 | 22.12 |
|                 |            |               | 6         | 22.50                | 21.74                | 22.35 | 22.19 |
|                 |            |               | 13        | 22.50                | 21.86                | 22.32 | 22.07 |
|                 |            | 25            | 0         | 22.50                | 21.82                | 22.26 | 22.31 |
| Bandwidth       | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 39700                | 40620 | 41540 |
| 10MHz           | QPSK       | 1             | 0         | 24.50                | 23.87                | 24.36 | 24.24 |
|                 |            |               | 25        | 25.00                | 24.11                | 24.61 | 24.59 |
|                 |            |               | 49        | 24.50                | 23.92                | 24.40 | 24.15 |
|                 |            | 25            | 0         | 23.50                | 22.83                | 23.42 | 23.26 |
|                 |            |               | 13        | 23.50                | 22.94                | 23.32 | 23.22 |
|                 |            |               | 25        | 23.50                | 22.92                | 23.45 | 23.32 |
|                 |            | 50            | 0         | 23.50                | 22.81                | 23.39 | 23.18 |
|                 |            |               | 0         | 23.50                | 22.84                | 23.23 | 22.92 |
|                 |            |               | 25        | 23.50                | 23.04                | 23.32 | 23.69 |
|                 | 16QAM      | 1             | 49        | 23.50                | 22.68                | 23.15 | 22.79 |
|                 |            |               | 0         | 22.50                | 21.78                | 22.32 | 22.36 |
|                 |            |               | 13        | 22.50                | 21.85                | 22.32 | 22.21 |
|                 |            | 25            | 25        | 22.50                | 21.89                | 22.33 | 22.12 |
|                 |            |               | 0         | 22.50                | 21.82                | 22.25 | 22.29 |
|                 |            |               | 0         | 22.50                | 21.82                | 22.25 | 22.29 |
| Bandwidth       | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 39725                | 40620 | 41515 |
| 15MHz           | QPSK       | 1             | 0         | 25.00                | 24.50                | 23.80 | 24.34 |
|                 |            |               | 38        | 25.00                | 25.00                | 23.95 | 24.54 |
|                 |            |               | 74        | 25.00                | 24.50                | 23.78 | 24.30 |
|                 |            | 36            | 0         | 24.00                | 23.50                | 22.93 | 23.48 |
|                 |            |               | 18        | 24.00                | 23.50                | 22.93 | 23.46 |
|                 |            |               | 39        | 24.00                | 24.00                | 23.03 | 23.52 |
|                 |            | 75            | 0         | 24.00                | 23.50                | 22.86 | 23.42 |
|                 |            |               | 0         | 24.00                | 23.50                | 22.73 | 23.11 |
|                 |            |               | 38        | 24.00                | 23.50                | 22.86 | 23.17 |
|                 | 16QAM      | 1             | 74        | 24.00                | 23.50                | 22.76 | 23.11 |
|                 |            | 36            | 0         | 23.00                | 22.50                | 21.78 | 22.40 |
|                 |            |               | 18        | 23.00                | 22.50                | 21.85 | 22.45 |
|                 |            |               | 39        | 23.00                | 22.50                | 21.87 | 22.31 |
|                 |            | 75            | 0         | 23.00                | 22.50                | 21.88 | 22.31 |

| Bandwidth | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 39750     | 40620     | 41490     |
|-----------|------------|---------------|-----------|----------------------|-----------|-----------|-----------|
|           |            |               |           |                      | 2506.0MHz | 2593.0MHz | 2680.0MHz |
| 20MHz     | QPSK       | 1             | 0         | 24.50                | 23.67     | 24.01     | 24.33     |
|           |            |               | 50        | 25.00                | 24.16     | 24.70     | 24.63     |
|           |            |               | 99        | 24.50                | 23.75     | 24.27     | 24.03     |
|           |            | 50            | 0         | 23.50                | 22.75     | 23.32     | 23.24     |
|           |            |               | 25        | 23.50                | 22.78     | 23.26     | 23.24     |
|           |            |               | 50        | 23.50                | 22.82     | 23.37     | 23.29     |
|           |            | 100           | 0         | 23.50                | 22.79     | 23.34     | 23.31     |
|           | 16QAM      | 1             | 0         | 23.50                | 22.51     | 23.13     | 23.18     |
|           |            |               | 50        | 24.00                | 22.96     | 23.63     | 23.55     |
|           |            |               | 99        | 23.00                | 22.62     | 22.78     | 22.97     |
|           |            | 50            | 0         | 22.50                | 21.63     | 22.20     | 22.37     |
|           |            |               | 25        | 22.50                | 21.75     | 22.29     | 22.39     |
|           |            |               | 50        | 22.50                | 21.80     | 22.24     | 22.24     |
|           |            | 100           | 0         | 22.50                | 21.76     | 22.30     | 22.30     |

## Band 66

| LTE-FDD Band 66 |            |               |           |                      | Conducted Power(dBm) |           |           |
|-----------------|------------|---------------|-----------|----------------------|----------------------|-----------|-----------|
| Bandwidth       | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 131979               | 132322    | 132665    |
|                 |            |               |           |                      | 1710.7MHz            | 1745.0MHz | 1779.3MHz |
| 1.4MHz          | QPSK       | 1             | 0         | 23.00                | 22.98                | 22.81     | 22.66     |
|                 |            |               | 2         | 23.50                | 23.18                | 23.03     | 22.87     |
|                 |            |               | 5         | 23.00                | 22.99                | 22.80     | 22.63     |
|                 |            | 3             | 0         | 23.50                | 23.01                | 22.87     | 22.50     |
|                 |            |               | 2         | 23.00                | 22.96                | 22.90     | 22.56     |
|                 |            |               | 3         | 23.00                | 23.00                | 22.88     | 22.47     |
|                 |            | 6             | 0         | 22.50                | 22.06                | 21.96     | 21.43     |
|                 | 16QAM      | 1             | 0         | 22.50                | 22.20                | 21.67     | 21.34     |
|                 |            |               | 2         | 22.50                | 22.40                | 21.64     | 21.62     |
|                 |            |               | 5         | 22.50                | 22.16                | 21.41     | 21.43     |
|                 |            | 3             | 0         | 22.00                | 21.97                | 21.61     | 21.45     |
|                 |            |               | 2         | 22.00                | 21.95                | 21.51     | 21.51     |
|                 |            |               | 3         | 22.00                | 21.97                | 21.52     | 21.49     |
|                 |            | 6             | 0         | 21.00                | 20.98                | 20.56     | 20.65     |
|                 |            | 15            | 0         | 22.00                | 21.86                | 21.29     | 21.69     |
|                 |            |               | 7         | 22.00                | 21.74                | 21.17     | 21.66     |
|                 |            |               | 14        | 22.00                | 21.72                | 21.20     | 21.73     |
| 3MHz            | QPSK       | 1             | 0         | 23.00                | 22.96                | 22.70     | 22.35     |
|                 |            |               | 7         | 23.00                | 22.87                | 22.39     | 22.24     |
|                 |            |               | 14        | 23.00                | 22.93                | 22.39     | 22.25     |
|                 |            | 8             | 0         | 22.00                | 21.96                | 21.32     | 21.47     |
|                 |            |               | 4         | 22.00                | 22.00                | 21.39     | 21.42     |
|                 |            |               | 7         | 22.00                | 21.90                | 21.36     | 21.34     |
|                 | 16QAM      | 15            | 0         | 22.00                | 21.85                | 21.30     | 21.38     |
|                 |            |               | 0         | 22.00                | 21.86                | 21.29     | 21.69     |
|                 |            |               | 7         | 22.00                | 21.74                | 21.17     | 21.66     |
|                 |            | 8             | 14        | 22.00                | 21.72                | 21.20     | 21.73     |
|                 |            |               | 0         | 21.00                | 20.83                | 20.31     | 20.35     |
|                 |            |               | 4         | 21.00                | 20.87                | 20.30     | 20.50     |
|                 |            | 15            | 7         | 21.00                | 20.84                | 20.24     | 20.46     |
|                 |            |               | 0         | 21.00                | 20.77                | 20.29     | 20.56     |
|                 |            |               | 15        | 21.00                | 20.77                | 20.29     | 20.56     |
| 5MHz            | QPSK       | 1             | 0         | 23.00                | 22.68                | 22.28     | 22.06     |
|                 |            |               | 13        | 23.00                | 22.71                | 22.37     | 22.18     |
|                 |            |               | 24        | 22.50                | 22.47                | 22.18     | 22.01     |
|                 |            | 12            | 0         | 22.00                | 21.59                | 21.30     | 21.13     |
|                 |            |               | 6         | 22.00                | 21.76                | 21.35     | 21.20     |
|                 |            |               | 13        | 22.00                | 21.73                | 21.26     | 21.13     |
|                 | 16QAM      | 25            | 0         | 22.00                | 21.65                | 21.30     | 21.13     |
|                 |            |               | 0         | 22.00                | 21.40                | 21.63     | 20.96     |
|                 |            |               | 13        | 22.00                | 21.57                | 21.70     | 21.14     |
|                 |            | 12            | 24        | 21.50                | 21.41                | 21.49     | 20.95     |
|                 |            |               | 0         | 21.00                | 20.58                | 20.24     | 20.22     |
|                 |            |               | 6         | 21.00                | 20.70                | 20.30     | 20.33     |
|                 |            | 25            | 13        | 21.00                | 20.66                | 20.25     | 20.16     |
|                 |            |               | 0         | 21.00                | 20.67                | 20.25     | 20.20     |
|                 |            |               | 25        | 21.00                | 20.67                | 20.25     | 20.20     |

| LTE-FDD Band 66 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                     |                     |       |
|-----------------|------------|---------------|-----------|----------------------|----------------------|---------------------|---------------------|-------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 132022<br>1715.0MHz  | 132322<br>1745.0MHz | 132622<br>1775.0MHz |       |
| 10MHz           | QPSK       | 1             | 0         | 23.00                | 22.89                | 22.43               | 22.23               |       |
|                 |            |               | 25        | 23.00                | 22.69                | 22.49               | 22.31               |       |
|                 |            |               | 49        | 23.00                | 22.78                | 22.37               | 22.16               |       |
|                 |            | 25            | 0         | 22.00                | 21.75                | 21.36               | 21.18               |       |
|                 |            |               | 13        | 22.00                | 21.92                | 21.33               | 21.15               |       |
|                 |            |               | 25        | 22.00                | 21.73                | 21.35               | 21.16               |       |
|                 | 50         | 0             | 22.00     | 21.85                | 21.36                | 21.16               |                     |       |
|                 |            | 16QAM         | 1         | 0                    | 21.50                | 21.38               | 21.28               | 21.41 |
|                 |            |               |           | 25                   | 22.00                | 21.53               | 21.27               | 21.55 |
|                 |            |               |           | 49                   | 22.00                | 21.54               | 21.14               | 21.46 |
|                 |            |               | 25        | 0                    | 21.00                | 20.75               | 20.41               | 20.15 |
|                 |            |               |           | 13                   | 21.00                | 20.89               | 20.36               | 20.28 |
| 25              | 21.00      |               |           | 20.76                | 20.38                | 20.23               |                     |       |
| 50              | 0          | 21.00         | 20.75     | 20.35                | 20.24                |                     |                     |       |
| Bandwidth       | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 132047<br>1717.5MHz  | 132322<br>1745.0MHz | 132597<br>1772.5MHz |       |
| 15MHz           | QPSK       | 1             | 0         | 23.00                | 22.72                | 22.38               | 22.24               |       |
|                 |            |               | 38        | 23.00                | 22.64                | 22.40               | 22.24               |       |
|                 |            |               | 74        | 23.00                | 22.53                | 22.26               | 22.00               |       |
|                 |            | 36            | 0         | 22.00                | 21.68                | 21.40               | 21.30               |       |
|                 |            |               | 18        | 22.00                | 21.74                | 21.39               | 21.29               |       |
|                 |            |               | 39        | 22.00                | 21.59                | 21.42               | 21.21               |       |
|                 | 75         | 0             | 22.00     | 21.61                | 21.43                | 21.26               |                     |       |
|                 |            | 16QAM         | 1         | 0                    | 21.50                | 21.44               | 21.27               | 20.90 |
|                 |            |               |           | 38                   | 22.00                | 21.50               | 21.26               | 21.06 |
|                 |            |               |           | 74                   | 21.50                | 21.39               | 20.98               | 20.97 |
|                 |            |               | 36        | 0                    | 20.50                | 20.42               | 20.37               | 20.18 |
|                 |            |               |           | 18                   | 21.00                | 20.61               | 20.30               | 20.20 |
| 39              | 21.00      |               |           | 20.67                | 20.33                | 20.17               |                     |       |
| 75              | 0          | 21.00         | 20.74     | 20.38                | 20.19                |                     |                     |       |
| Bandwidth       | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 132072<br>1720.0MHz  | 132322<br>1745.0MHz | 132572<br>1770.0MHz |       |
| 20MHz           | QPSK       | 1             | 0         | 22.50                | 22.14                | 22.19               | 21.99               |       |
|                 |            |               | 50        | 23.00                | 22.50                | 22.41               | 22.31               |       |
|                 |            |               | 99        | 22.50                | 22.13                | 21.98               | 21.84               |       |
|                 |            | 50            | 0         | 21.50                | 21.35                | 21.36               | 21.06               |       |
|                 |            |               | 25        | 21.50                | 21.39                | 21.36               | 21.10               |       |
|                 |            |               | 50        | 21.50                | 21.33                | 21.30               | 21.09               |       |
|                 | 100        | 0             | 21.50     | 21.36                | 21.30                | 21.06               |                     |       |
|                 |            | 16QAM         | 1         | 0                    | 22.00                | 21.50               | 21.04               | 20.79 |
|                 |            |               |           | 50                   | 22.00                | 21.88               | 21.22               | 21.16 |
|                 |            |               |           | 99                   | 22.00                | 21.53               | 20.75               | 20.85 |
|                 |            |               | 50        | 0                    | 20.50                | 20.33               | 20.37               | 19.96 |
|                 |            |               |           | 25                   | 20.50                | 20.43               | 20.30               | 20.03 |
| 50              | 20.50      |               |           | 20.35                | 20.25                | 20.04               |                     |       |
| 100             | 0          | 20.50         | 20.33     | 20.33                | 20.02                |                     |                     |       |

## Band 71

| LTE-FDD Band 71 |            |               |           | Maximum Tune-up(dBm) | Conducted Power(dBm) |                    |                    |
|-----------------|------------|---------------|-----------|----------------------|----------------------|--------------------|--------------------|
| Bandwidth       | Modulation | RB allocation | RB offset |                      | 133147<br>665.5MHz   | 133297<br>680.5MHz | 133447<br>695.5MHz |
| 5MHz            | QPSK       | 1             | 0         | 23.00                | 22.68                | 22.70              | 22.70              |
|                 |            |               | 13        | 23.00                | 22.69                | 22.74              | 22.88              |
|                 |            |               | 24        | 23.00                | 22.60                | 22.61              | 22.83              |
|                 |            | 12            | 0         | 22.00                | 21.64                | 21.69              | 21.79              |
|                 |            |               | 6         | 22.00                | 21.77                | 21.77              | 21.90              |
|                 |            |               | 13        | 22.00                | 21.78                | 21.68              | 21.90              |
|                 | 16QAM      | 25            | 0         | 22.00                | 21.64                | 21.73              | 21.96              |
|                 |            |               | 0         | 22.00                | 21.67                | 21.97              | 21.60              |
|                 |            |               | 13        | 22.50                | 21.80                | 22.10              | 21.80              |
|                 |            | 1             | 24        | 22.50                | 21.71                | 22.02              | 21.73              |
|                 |            |               | 0         | 21.00                | 20.60                | 20.72              | 20.86              |
|                 |            |               | 6         | 21.00                | 20.74                | 20.86              | 20.96              |
| 10MHz           | QPSK       | 12            | 13        | 21.50                | 20.70                | 20.74              | 21.08              |
|                 |            |               | 0         | 21.50                | 20.63                | 20.88              | 21.16              |
|                 |            | 25            | 0         | 21.50                | 20.63                | 20.88              | 21.16              |

| Bandwidth | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 133172<br>668.0MHz | 133297<br>680.5MHz | 133422<br>693.0MHz |
|-----------|------------|---------------|-----------|----------------------|--------------------|--------------------|--------------------|
| 10MHz     | QPSK       | 1             | 0         | 23.50                | 23.05              | 22.76              | 22.76              |
|           |            |               | 25        | 23.00                | 22.75              | 22.92              | 22.95              |
|           |            |               | 49        | 23.00                | 22.70              | 22.77              | 22.93              |
|           |            | 25            | 0         | 22.00                | 21.70              | 21.74              | 21.83              |
|           |            |               | 13        | 22.00                | 21.85              | 21.74              | 21.92              |
|           |            |               | 25        | 22.00                | 21.83              | 21.73              | 21.84              |
|           |            | 50            | 0         | 22.00                | 21.71              | 21.69              | 21.85              |
|           |            |               | 0         | 22.50                | 21.69              | 21.63              | 22.05              |
|           |            |               | 25        | 22.50                | 21.76              | 21.71              | 22.19              |
|           | 16QAM      | 1             | 49        | 22.50                | 21.74              | 21.64              | 22.27              |
|           |            |               | 0         | 21.00                | 20.74              | 20.81              | 20.83              |
|           |            |               | 13        | 21.00                | 20.83              | 20.84              | 20.87              |
|           |            | 25            | 25        | 21.00                | 20.81              | 20.83              | 20.98              |
|           |            |               | 0         | 21.00                | 20.68              | 20.86              | 20.98              |
|           |            |               | 0         | 21.00                | 20.68              | 20.86              | 20.98              |
|           |            | 50            | 0         | 21.00                | 20.68              | 20.86              | 20.98              |
|           |            |               | 0         | 21.00                | 20.68              | 20.86              | 20.98              |
|           |            |               | 0         | 21.00                | 20.68              | 20.86              | 20.98              |
| Bandwidth | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 133197<br>670.5MHz | 133297<br>680.5MHz | 133397<br>690.5MHz |
| 15MHz     | QPSK       | 1             | 0         | 23.50                | 22.90              | 22.87              | 23.19              |
|           |            |               | 38        | 23.50                | 22.73              | 23.36              | 23.32              |
|           |            |               | 74        | 23.50                | 22.67              | 23.23              | 23.36              |
|           |            | 36            | 0         | 22.50                | 21.84              | 22.29              | 22.34              |
|           |            |               | 18        | 22.50                | 21.85              | 22.35              | 22.38              |
|           |            |               | 39        | 22.50                | 21.87              | 22.28              | 22.42              |
|           |            | 75            | 0         | 22.50                | 21.87              | 22.29              | 22.41              |
|           |            |               | 0         | 22.50                | 21.57              | 22.18              | 22.10              |
|           |            |               | 38        | 22.50                | 21.75              | 22.23              | 22.29              |
|           | 16QAM      | 1             | 74        | 22.50                | 22.12              | 22.13              | 22.33              |
|           |            |               | 0         | 21.50                | 20.73              | 21.25              | 21.33              |
|           |            |               | 18        | 21.50                | 20.70              | 21.35              | 21.33              |
|           |            | 36            | 39        | 21.50                | 20.85              | 21.26              | 21.40              |
|           |            |               | 0         | 21.50                | 20.87              | 21.25              | 21.42              |
|           |            |               | 0         | 21.50                | 20.87              | 21.25              | 21.42              |
|           |            | 75            | 0         | 21.50                | 20.87              | 21.25              | 21.42              |
|           |            |               | 0         | 21.50                | 20.87              | 21.25              | 21.42              |
|           |            |               | 0         | 21.50                | 20.87              | 21.25              | 21.42              |
| Bandwidth | Modulation | RB allocation | RB offset | Maximum Tune-up(dBm) | 133222<br>673.0MHz | 133322<br>683.0MHz | 133372<br>688.0MHz |
| 20MHz     | QPSK       | 1             | 0         | 23.50                | 23.02              | 23.05              | 22.98              |
|           |            |               | 50        | 23.50                | 23.36              | 23.33              | 23.36              |
|           |            |               | 99        | 23.50                | 23.02              | 23.11              | 23.14              |
|           |            | 50            | 0         | 22.50                | 22.34              | 22.23              | 22.34              |
|           |            |               | 25        | 22.50                | 22.32              | 22.28              | 22.29              |
|           |            |               | 50        | 22.50                | 22.35              | 22.25              | 22.28              |
|           |            | 100           | 0         | 22.50                | 22.31              | 22.23              | 22.32              |
|           |            |               | 0         | 22.50                | 22.41              | 21.90              | 22.00              |
|           |            |               | 50        | 23.00                | 22.73              | 22.19              | 22.31              |
|           | 16QAM      | 1             | 99        | 22.50                | 22.44              | 21.95              | 22.16              |
|           |            |               | 0         | 21.50                | 21.40              | 21.24              | 21.35              |
|           |            |               | 25        | 21.50                | 21.33              | 21.30              | 21.30              |
|           |            | 50            | 50        | 21.50                | 21.39              | 21.28              | 21.28              |
|           |            |               | 0         | 21.50                | 21.35              | 21.27              | 21.36              |
|           |            |               | 0         | 21.50                | 21.35              | 21.27              | 21.36              |
|           |            | 100           | 0         | 21.50                | 21.35              | 21.27              | 21.36              |
|           |            |               | 0         | 21.50                | 21.35              | 21.27              | 21.36              |
|           |            |               | 0         | 21.50                | 21.35              | 21.27              | 21.36              |



## 8.4 Wi-Fi

| Band (GHz)          | Mode          | Channel | Freq. (MHz) | Average Power (dBm) | Maximum Tune-up(dBm) | SAR Test Require. |
|---------------------|---------------|---------|-------------|---------------------|----------------------|-------------------|
| 2.4<br>(2.4~2.4835) | 802.11b       | 1       | 2412        | <b>15.91</b>        | 16.00                | Yes               |
|                     |               | 6       | 2437        | 15.65               | 16.00                | No                |
|                     |               | 11      | 2462        | 15.76               | 16.00                | No                |
|                     | 802.11g       | 1       | 2412        | 20.96               | 21.00                | No                |
|                     |               | 6       | 2437        | 20.95               | 21.00                | No                |
|                     |               | 11      | 2462        | 21.05               | 21.50                | No                |
|                     | 802.11n(HT20) | 1       | 2412        | 19.79               | 20.00                | No                |
|                     |               | 6       | 2437        | 19.13               | 19.50                | No                |
|                     |               | 11      | 2462        | 18.83               | 19.00                | No                |
|                     | 802.11n(HT40) | 3       | 2422        | 20.38               | 20.50                | No                |
|                     |               | 6       | 2437        | 19.44               | 19.50                | No                |
|                     |               | 9       | 2452        | 19.49               | 19.50                | No                |

Note: SAR is not required for the following 2.4 GHz OFDM conditions as the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2\text{W/kg}$ .

| Band (GHz)               | Mode            | Channel | Freq. (MHz) | Average Power (dBm) | Maximum Tune-up(dBm) | SAR Test Require. |
|--------------------------|-----------------|---------|-------------|---------------------|----------------------|-------------------|
| U-NII-1<br>(5.150~5.250) | 802.11a         | 36      | 5180        | 14.05               | 14.50                | No                |
|                          |                 | 40      | 5200        | 14.52               | 15.00                | No                |
|                          |                 | 48      | 5240        | 14.22               | 14.50                | No                |
|                          | 802.11n(HT20)   | 36      | 5180        | 13.99               | 14.00                | No                |
|                          |                 | 40      | 5200        | 14.12               | 14.50                | No                |
|                          |                 | 48      | 5240        | 14.29               | 14.50                | No                |
|                          | 802.11ac(VHT20) | 36      | 5180        | 14.01               | 14.50                | No                |
|                          |                 | 40      | 5200        | 14.22               | 14.50                | No                |
|                          |                 | 48      | 5240        | 14.33               | 14.50                | No                |
|                          | 802.11n(HT40)   | 38      | 5190        | 14.33               | 14.50                | No                |
|                          |                 | 46      | 5230        | 14.36               | 14.50                | No                |
|                          | 802.11ac(VHT40) | 38      | 5190        | 14.38               | 14.50                | No                |
|                          |                 | 46      | 5230        | 14.31               | 14.50                | No                |
|                          | 802.11ac(VHT80) | 42      | 5210        | <b>14.89</b>        | <b>15.00</b>         | Yes               |

| Band (GHz)                | Mode            | Channel | Freq. (MHz) | Average Power (dBm) | Maximum Tune-up(dBm) | SAR Test Require. |
|---------------------------|-----------------|---------|-------------|---------------------|----------------------|-------------------|
| U-NII-2a<br>(5.250~5.350) | 802.11a         | 52      | 5260        | 14.38               | 14.50                | No                |
|                           |                 | 60      | 5300        | 14.21               | 14.50                | No                |
|                           |                 | 64      | 5320        | 14.23               | 14.50                | No                |
|                           | 802.11n(HT20)   | 52      | 5260        | 14.64               | 15.00                | No                |
|                           |                 | 60      | 5300        | 14.80               | 15.00                | No                |
|                           |                 | 64      | 5320        | 14.79               | 15.00                | No                |
|                           | 802.11ac(VHT20) | 52      | 5260        | 14.51               | 15.00                | No                |
|                           |                 | 60      | 5300        | 14.19               | 14.50                | No                |
|                           |                 | 64      | 5320        | 14.33               | 14.50                | No                |
|                           | 802.11n(HT40)   | 54      | 5270        | 14.21               | 14.50                | No                |
|                           |                 | 62      | 5310        | 14.41               | 14.50                | No                |
|                           | 802.11ac(VHT40) | 54      | 5270        | 14.77               | 15.00                | No                |
|                           |                 | 62      | 5310        | 14.35               | 14.50                | No                |
|                           | 802.11ac(VHT80) | 58      | 5290        | <b>14.96</b>        | <b>15.00</b>         | Yes               |

| Band (GHz)                | Mode            | Channel | Freq. (MHz) | Average Power (dBm) | Maximum Tune-up(dBm) | SAR Test Require. |
|---------------------------|-----------------|---------|-------------|---------------------|----------------------|-------------------|
| U-NII-2c<br>(5.470~5.725) | 802.11a         | 100     | 5500        | 15.02               | 15.50                | No                |
|                           |                 | 116     | 5580        | 14.52               | 15.00                | No                |
|                           |                 | 140     | 5700        | 15.19               | 15.50                | No                |
|                           | 802.11n(HT20)   | 100     | 5500        | 14.64               | 15.00                | No                |
|                           |                 | 116     | 5580        | 14.68               | 15.00                | No                |
|                           |                 | 140     | 5700        | 15.17               | 15.50                | No                |
|                           | 802.11ac(VHT20) | 100     | 5500        | 14.65               | 15.00                | No                |
|                           |                 | 116     | 5580        | 14.60               | 15.00                | No                |
|                           |                 | 140     | 5700        | 15.13               | 15.50                | No                |
|                           | 802.11n(HT40)   | 102     | 5510        | 14.49               | 14.50                | No                |
|                           |                 | 110     | 5550        | 14.49               | 14.50                | No                |
|                           |                 | 134     | 5670        | 15.09               | 15.50                | No                |
|                           | 802.11ac(VHT40) | 102     | 5510        | 14.54               | 15.00                | No                |
|                           |                 | 110     | 5550        | 14.58               | 15.00                | No                |
|                           |                 | 134     | 5670        | <b>15.21</b>        | <b>15.50</b>         | Yes               |
|                           | 802.11ac(VHT80) | 106     | 5530        | 14.52               | 15.00                | No                |
|                           |                 | 122     | 5610        | 14.95               | 15.00                | No                |

| Band (GHz)               | Mode            | Channel | Freq. (MHz) | Average Power (dBm) | Maximum Tune-up(dBm) | SAR Test Require. |
|--------------------------|-----------------|---------|-------------|---------------------|----------------------|-------------------|
| U-NII-3<br>(5.725~5.850) | 802.11a         | 149     | 5745        | 14.97               | 15.00                | No                |
|                          |                 | 157     | 5785        | 15.08               | 15.50                | No                |
|                          |                 | 165     | 5825        | 15.19               | 15.50                | No                |
|                          | 802.11n(HT20)   | 149     | 5745        | 14.98               | 15.00                | No                |
|                          |                 | 157     | 5785        | 15.19               | 15.50                | No                |
|                          |                 | 165     | 5825        | 15.32               | 15.50                | No                |
|                          | 802.11ac(VHT20) | 149     | 5745        | 15.04               | 15.50                | No                |
|                          |                 | 157     | 5785        | 15.17               | 15.50                | No                |
|                          |                 | 165     | 5825        | 15.36               | 15.50                | No                |
|                          | 802.11n(HT40)   | 151     | 5755        | 15.22               | 15.50                | No                |
|                          |                 | 159     | 5795        | 15.40               | 15.50                | Yes               |
|                          |                 | 151     | 5755        | 15.14               | 15.50                | No                |
|                          | 802.11ac(VHT40) | 159     | 5795        | 15.32               | 15.50                | No                |
|                          |                 | 155     | 5775        | 15.24               | 15.50                | No                |

## 8.5 Bluetooth

| EDR | Mode    | Maximum Tune-up(dBm) | Average Conducted Output Power (dBm) |         |         |
|-----|---------|----------------------|--------------------------------------|---------|---------|
|     |         |                      | 0                                    | 39      | 78      |
|     |         |                      | 2402MHz                              | 2441MHz | 2480MHz |
|     | GFSK    | 7.00                 | 6.18                                 | 6.63    | 6.79    |
|     | π/4QPSK | 6.50                 | 5.48                                 | 5.90    | 6.03    |
| BLE | 8DPSK   | 6.00                 | 5.31                                 | 5.74    | 5.85    |
|     | Mode    | Maximum Tune-up(dBm) | Average Conducted Output Power (dBm) |         |         |
|     |         |                      | 0                                    | 20      | 39      |
|     |         |                      | 2402MHz                              | 2440MHz | 2480MHz |
|     | 1Mbps   | -2.50                | -2.35                                | -2.04   | -2.02   |
|     | 2Mbps   | -3.00                | -2.51                                | -2.21   | -2.19   |

| Channel | Frequency (GHz) | Max. Tune-up Power (dBm) | Max. Power (mW) | Test distance (mm) | Exclusion thresholds for 1-g SAR | RF exposure evaluation required |
|---------|-----------------|--------------------------|-----------------|--------------------|----------------------------------|---------------------------------|
| 1       | 2.480           | 7.00                     | 5.01            | 0                  | 2.72                             | Yes                             |

### Note

- Per KDB 447498 D04 Interim General RF Exposure Guidance v01, the 1-g SAR test exclusion thresholds for 300 MHz to 6 GHz at test separation distances  $\leq 40$  cm are determined by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B. 2})$$

where

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B. 1})$$

$$x = -\log_{10} \left( \frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$


and  $f$  is in GHz,  $d$  is the separation distance (cm), and  $ERP_{20 \text{ cm}}$  is per Formula (B.1).

\*When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine estimated SAR.

- Per KDB 248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were prescan, just the worst case (the lowest data rate) of all mode were shown in report.

## 9. Test Exclusion Consideration

Antenna information :

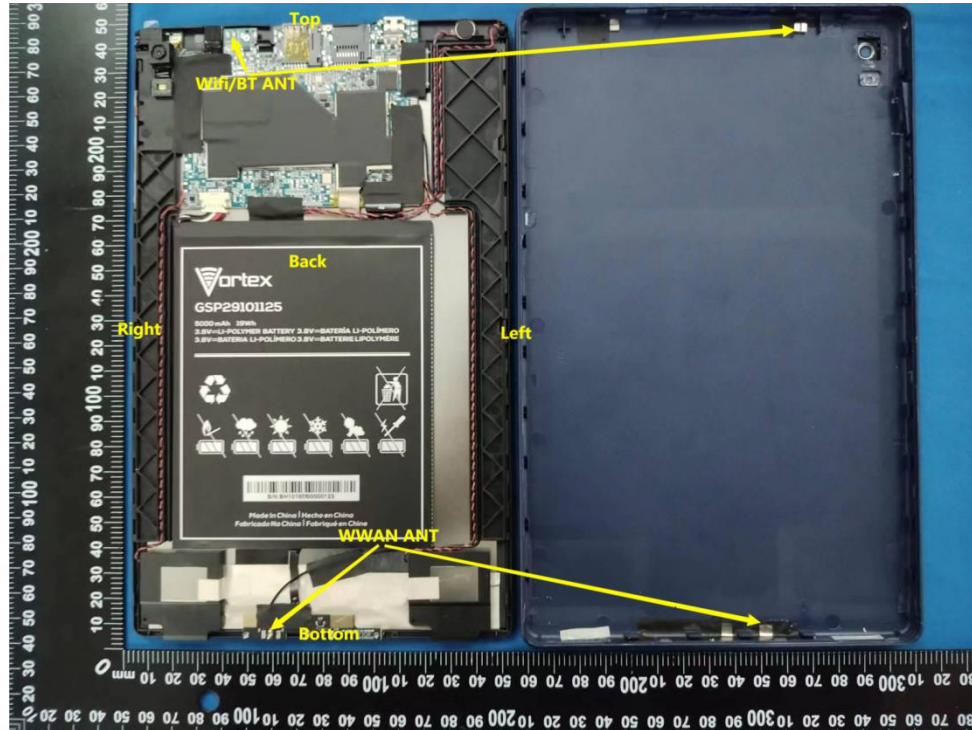

|                                                                                                                                                                                                                                                                                                                                                                                            |                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| WWAN Main Antenna                                                                                                                                                                                                                                                                                                                                                                          | GSM/WCDMA/LTE TX/RX |
| WLAN/BT Antenna                                                                                                                                                                                                                                                                                                                                                                            | WLAN/BT TX/RX       |
| Note:<br>1. KDB 447498 D01v06, particular DUT edges were not required to be evaluated for SAR if the antenna-to-edge distance is greater than 2.5cm.<br>2. KDB 616217 D04 SAR for laptop and tablets v01r02, it doesn't require SAR evaluation for the front surface of a tablet.<br>3. Per KDB648474 D04.10-g extremity SAR is not required when Body-Worn mode 1-g reported SAR<1.2W/Kg. |                     |

| Distance of The Antenna to the EUT surface and edge (mm) |                    |                   |                   |                    |                  |                     |
|----------------------------------------------------------|--------------------|-------------------|-------------------|--------------------|------------------|---------------------|
| Antenna                                                  | Front Side<br>(mm) | Back Side<br>(mm) | Left Edge<br>(mm) | Right Edge<br>(mm) | Top Edge<br>(mm) | Bottom Edge<br>(mm) |
| WWAN                                                     | <25                | <25               | 96                | 56                 | 242              | <25                 |
| BT/Wifi                                                  | <25                | <25               | 119               | 33                 | <25              | 240                 |

| Positions for SAR tests: Hotspot mode |                    |                   |                   |                    |                  |                     |
|---------------------------------------|--------------------|-------------------|-------------------|--------------------|------------------|---------------------|
| Antenna                               | Front Side<br>(mm) | Back Side<br>(mm) | Left Edge<br>(mm) | Right Edge<br>(mm) | Top Edge<br>(mm) | Bottom Edge<br>(mm) |
| WWAN                                  | No                 | Yes               | No                | No                 | No               | Yes                 |
| BT/Wifi                               | No                 | Yes               | No                | No                 | Yes              | No                  |

## 9.1 SAR Test Exclusion Consideration Table

Per KDB 447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following format to determine simultaneous transmission SAR test exclusion:

$$(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances  $\leq 50$  mm;

where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

0.4 W/Kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm

Per FCC KDB 447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is  $\leq 1.6$  W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

## 10. Test Result

### General Notes:

The maximum SAR Value of each test band is marked bold.

The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ( $< 1.0$  W/kg), testing at the high and low channels is optional apart for the worst case configuration.

SAR plot is provided only for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \cdot 10^{(\text{P}_{\text{target}} - \text{P}_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(\text{P}_{\text{target}} - \text{P}_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} \cdot \text{Scaling factor}$$

Where

$\text{P}_{\text{target}}$  is the power of manufacturing upper limit;

$\text{P}_{\text{measured}}$  is the measured power;

Measured SAR is measured SAR at measured power which including power drift.

Reported(Scaled) SAR which including Power Drift and Scaling factor.

### Hotspot(Body) 1g SAR Data

| Band          | Mode        | Test Position with 0 mm | CH.  | Freq. (MHz) | Ave. Power (dBm) | Tune-Up Limit (dBm) | Power Drift (%) | Meas. SAR1g (W/kg) | Scaling Factor | Reported SAR1g (W/kg) | Limit (W/Kg) |
|---------------|-------------|-------------------------|------|-------------|------------------|---------------------|-----------------|--------------------|----------------|-----------------------|--------------|
| GSM 850       | GPRS 4slots | Back                    | 190  | 836.6       | 28.40            | 28.50               | -3.770          | 0.680              | 1.023          | <b>0.696</b>          | 1.60         |
|               |             | Bottom                  | 190  | 836.6       | 28.40            | 28.50               | -2.420          | 0.423              | 1.023          | 0.433                 |              |
| GSM 1900      | GPRS 4slots | Back                    | 512  | 1850.2      | 24.06            | 24.50               | -1.990          | 0.711              | 1.107          | <b>0.787</b>          |              |
|               |             | Bottom                  | 512  | 1850.2      | 24.06            | 24.50               | -3.310          | 0.512              | 1.107          | 0.567                 |              |
| WCDMA Band II | RMC         | Back                    | 9262 | 1852.4      | 21.62            | 22.00               | 1.910           | 0.542              | 1.091          | <b>0.591</b>          |              |
|               |             | Bottom                  | 9262 | 1852.4      | 21.62            | 22.00               | 2.210           | 0.330              | 1.091          | 0.360                 |              |
| WCDMA Band V  | RMC         | Back                    | 4233 | 846.6       | 23.48            | 23.50               | -3.920          | 0.435              | 1.005          | <b>0.437</b>          |              |
|               |             | Bottom                  | 4233 | 846.6       | 23.48            | 23.50               | -1.930          | 0.244              | 1.005          | 0.245                 |              |
| 2.4G          | 802.11b     | Back                    | 1    | 2412        | 15.91            | 16.00               | -1.550          | 0.397              | 1.021          | <b>0.405</b>          |              |
|               |             | Top                     | 1    | 2412        | 15.91            | 16.00               | 2.730           | 0.340              | 1.021          | 0.347                 |              |

|      |                  |      |     |      |       |       |        |       |       |              |  |
|------|------------------|------|-----|------|-------|-------|--------|-------|-------|--------------|--|
| 5.2G | 802.11ac (VHT80) | Back | 42  | 5210 | 14.89 | 15.00 | -1.306 | 0.301 | 1.026 | 0.309        |  |
|      |                  | Top  | 42  | 5210 | 14.89 | 15.00 | 1.240  | 0.707 | 1.026 | <b>0.725</b> |  |
| 5.3G | 802.11ac (VHT80) | Back | 58  | 5290 | 14.96 | 15.00 | 0.522  | 0.411 | 1.009 | 0.415        |  |
|      |                  | Top  | 58  | 5290 | 14.96 | 15.00 | -1.220 | 0.724 | 1.009 | <b>0.731</b> |  |
| 5.6G | 802.11ac (VHT40) | Back | 134 | 5670 | 15.21 | 15.50 | 3.500  | 0.266 | 1.069 | 0.284        |  |
|      |                  | Top  | 134 | 5670 | 15.21 | 15.50 | -1.440 | 0.599 | 1.069 | <b>0.640</b> |  |
| 5.8G | 802.11n (HT40)   | Back | 159 | 5795 | 15.40 | 15.50 | -0.109 | 0.195 | 1.023 | 0.199        |  |
|      |                  | Top  | 159 | 5795 | 15.40 | 15.50 | 2.110  | 0.501 | 1.023 | <b>0.513</b> |  |
| BT   | GFSK             | Back | 79  | 2480 | 6.79  | 7.00  | -1.970 | 0.108 | 1.050 | <b>0.113</b> |  |
|      |                  | Top  | 79  | 2480 | 6.79  | 7.00  | 2.460  | 0.072 | 1.050 | 0.076        |  |

| Band        | Mode         | Test Position with 0 mm | CH.    | Freq. (MHz) | RB allocation | RB offset | Ave. Power (dBm) | Tune-Up Limit (dBm) | Power Drift (%) | Meas. SAR1g (W/kg) | Scaling Factor | Reported SAR1g (W/kg) | Limit (W/Kg) |
|-------------|--------------|-------------------------|--------|-------------|---------------|-----------|------------------|---------------------|-----------------|--------------------|----------------|-----------------------|--------------|
| LTE Band 2  | QPSK (20MHz) | Back                    | 18700  | 1860        | 1             | 50        | 22.14            | 22.50               | -1.220          | 0.511              | 1.086          | <b>0.555</b>          | 1.60         |
|             |              |                         |        |             | 50            | 50        | 21.09            | 21.50               | -1.200          | 0.428              | 1.099          | 0.470                 |              |
|             |              | Bottom                  | 18700  | 1860        | 1             | 50        | 22.14            | 22.50               | 1.110           | 0.344              | 1.086          | 0.374                 |              |
|             |              |                         |        |             | 50            | 50        | 21.09            | 21.50               | 0.800           | 0.298              | 1.099          | 0.328                 |              |
| LTE Band 4  | QPSK (20MHz) | Back                    | 20175  | 1732.5      | 1             | 50        | 23.31            | 23.50               | -4.350          | 0.694              | 1.045          | <b>0.725</b>          |              |
|             |              |                         |        |             | 50            | 50        | 22.96            | 23.00               | 0.520           | 0.328              | 1.009          | 0.331                 |              |
|             |              | Bottom                  | 20175  | 1732.5      | 1             | 50        | 23.31            | 23.50               | -4.350          | 0.529              | 1.045          | 0.553                 |              |
|             |              |                         |        |             | 50            | 50        | 22.96            | 23.00               | 1.260           | 0.266              | 1.009          | 0.268                 |              |
| LTE Band 5  | QPSK (10MHz) | Back                    | 20450  | 829         | 1             | 0         | 24.00            | 24.00               | -2.240          | 0.329              | 1.000          | <b>0.329</b>          |              |
|             |              |                         |        |             | 25            | 25        | 23.10            | 23.50               | -1.200          | 0.188              | 1.096          | 0.206                 |              |
|             |              | Bottom                  | 20450  | 829         | 1             | 0         | 24.00            | 24.00               | -3.980          | 0.281              | 1.000          | 0.281                 |              |
|             |              |                         |        |             | 25            | 25        | 23.10            | 23.50               | 1.003           | 0.133              | 1.096          | 0.146                 |              |
| LTE Band 12 | QPSK (10MHz) | Back                    | 23130  | 711         | 1             | 25        | 23.69            | 24.00               | -3.970          | 0.411              | 1.074          | <b>0.441</b>          |              |
|             |              |                         |        |             | 25            | 0         | 22.43            | 22.50               | -1.100          | 0.231              | 1.016          | 0.235                 |              |
|             |              | Bottom                  | 23130  | 711         | 1             | 25        | 23.69            | 24.00               | 2.620           | 0.318              | 1.074          | 0.342                 |              |
|             |              |                         |        |             | 25            | 0         | 22.43            | 22.50               | -0.553          | 0.119              | 1.016          | 0.121                 |              |
| LTE Band 13 | QPSK (10MHz) | Back                    | 23230  | 782         | 1             | 25        | 24.18            | 24.50               | -3.480          | 0.400              | 1.076          | <b>0.430</b>          |              |
|             |              |                         |        |             | 25            | 13        | 23.07            | 23.50               | 2.078           | 0.231              | 1.104          | 0.255                 |              |
|             |              | Bottom                  | 23230  | 782         | 1             | 25        | 24.18            | 24.50               | 2.511           | 0.356              | 1.076          | 0.383                 |              |
|             |              |                         |        |             | 25            | 13        | 23.07            | 23.50               | 0.802           | 0.156              | 1.104          | 0.172                 |              |
| LTE Band 25 | QPSK (20MHz) | Back                    | 26140  | 1860        | 1             | 0         | 24.17            | 24.50               | -2.950          | 0.650              | 1.079          | <b>0.701</b>          |              |
|             |              |                         |        |             | 50            | 50        | 23.52            | 24.00               | 1.260           | 0.512              | 1.117          | 0.572                 |              |
|             |              | Bottom                  | 26140  | 1860        | 1             | 0         | 24.17            | 24.50               | -2.880          | 0.438              | 1.079          | 0.473                 |              |
|             |              |                         |        |             | 50            | 50        | 23.52            | 24.00               | -2.450          | 0.385              | 1.117          | 0.430                 |              |
| LTE Band 26 | QPSK (15MHz) | Back                    | 26965  | 841.5       | 1             | 38        | 23.72            | 25.00               | -1.760          | 0.311              | 1.343          | <b>0.418</b>          |              |
|             |              |                         |        |             | 36            | 39        | 22.83            | 23.00               | 1.003           | 0.289              | 1.040          | 0.301                 |              |
|             |              | Bottom                  | 26965  | 841.5       | 1             | 38        | 23.72            | 25.00               | -4.360          | 0.140              | 1.343          | 0.188                 |              |
|             |              |                         |        |             | 36            | 39        | 22.83            | 23.00               | 2.360           | 0.130              | 1.040          | 0.135                 |              |
| LTE Band 41 | QPSK (20MHz) | Back                    | 40620  | 2593        | 1             | 50        | 24.70            | 25.00               | -1.470          | 0.369              | 1.072          | <b>0.396</b>          |              |
|             |              |                         |        |             | 50            | 50        | 23.37            | 23.50               | 1.025           | 0.331              | 1.030          | 0.341                 |              |
|             |              | Bottom                  | 40620  | 2593        | 1             | 50        | 24.70            | 25.00               | -1.160          | 0.217              | 1.072          | 0.233                 |              |
|             |              |                         |        |             | 50            | 50        | 23.37            | 23.50               | 1.209           | 0.195              | 1.030          | 0.201                 |              |
| LTE Band 66 | QPSK (20MHz) | Back                    | 132072 | 1720        | 1             | 50        | 22.50            | 23.00               | -1.370          | 0.673              | 1.122          | <b>0.755</b>          |              |
|             |              |                         |        |             | 50            | 25        | 21.39            | 21.50               | 1.054           | 0.461              | 1.026          | 0.473                 |              |
|             |              | Bottom                  | 132072 | 1720        | 1             | 50        | 22.50            | 23.00               | -1.370          | 0.561              | 1.122          | 0.629                 |              |
|             |              |                         |        |             | 50            | 25        | 21.39            | 21.50               | 0.221           | 0.352              | 1.026          | 0.361                 |              |
| LTE Band 71 | QPSK (20MHz) | Back                    | 133372 | 688         | 1             | 50        | 23.36            | 23.50               | -2.280          | 0.535              | 1.033          | <b>0.553</b>          |              |
|             |              |                         |        |             | 50            | 0         | 22.34            | 22.50               | 0.221           | 0.397              | 1.038          | 0.412                 |              |
|             |              | Bottom                  | 133372 | 688         | 1             | 50        | 23.36            | 23.50               | 2.006           | 0.316              | 1.033          | 0.326                 |              |
|             |              |                         |        |             | 50            | 0         | 22.34            | 22.50               | -0.955          | 0.230              | 1.038          | 0.239                 |              |

#### Note:

- Per KDB 447498 D01 v06, for each exposure position, if the highest output power channel Reported SAR  $\leq 0.8W/kg$ , other channels SAR testing is not necessary.
- Per KDB 447498 D01 v06, body use is evaluated with the device positioned at 0mm from a flat phantom respectively filled with body tissue-equivalent medium.
- Per KDB 616217 D04 where SAR test considerations for tablets are based on a composite test separation distance of 0 mm from the back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices.
- Per KDB 447498 D01 v06, the report SAR is measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor= $10^{[(\text{tune-up limit power(dBm)} - \text{Ave.power power (dBm)})/10]}$ , where tune-up limit is the maximum rated power among all production units.  
Reported SAR(W/kg)=Measured SAR (W/kg)\*Scaling Factor.
- Per KDB865664D01 v01r04 perform a second repeated measurement only the ratio of largest to smallest SAR for the original and first repeated measurement is  $>1.20$  or when the original or repeated measurement is  $\geq 1.45W/kg$ .
- Perform a second measurement only if the original, first and second repeated measurement is  $\geq 1.5w/kg$  and the ratio of largest to smallest SAR for the original, first and second repeated measurement is  $>1.20$ .
- When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).



## 11. Simultaneous Transmission

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

### 11.1 Simultaneous Transmission Mode Considerations

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. The device has 2 Tx antennas, WWAN main antenna, Wifi/BT antenna supports 2.4G Wi-Fi and BT. The 2 antennas can always transmit simultaneously. The work mode combination is showed as below table.

Application Simultaneous Transmission information:

| NO. | Configuration   | Body-worn |
|-----|-----------------|-----------|
| 1   | WWAN+WIFI(2.4g) | Yes       |
| 2   | WWAN+WIFI(5g)   | Yes       |
| 3   | WWAN+BT         | Yes       |

### 11.2 Sum SAR of Simultaneous Transmission

Hotspot(body-worn)

| Band                  | Test Position | Scaled SAR   |              |              |              | $\Sigma$ SAR (W/kg)<br>WWAN +<br>WIFI 2.4G | $\Sigma$ SAR (W/kg)<br>WWAN +<br>WIFI 5G | $\Sigma$ SAR (W/kg)<br>WWAN + BT | SPLSR | Remark |
|-----------------------|---------------|--------------|--------------|--------------|--------------|--------------------------------------------|------------------------------------------|----------------------------------|-------|--------|
|                       |               | WWAN         | WIFI 2.4G    | WIFI 5G      | BT           |                                            |                                          |                                  |       |        |
| GSM850 (GPRS 4slots)  | Back          | <b>0.696</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 1.101                                      | 1.111                                    | 0.809                            | N/A   | N/A    |
|                       | Top           | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                       | Bottom        | 0.433        | /            | /            | /            | 0.433                                      | 0.433                                    | 0.433                            | N/A   | N/A    |
| GSM1900 (GPRS 4slots) | Back          | <b>0.787</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 1.192                                      | <b>1.202</b>                             | 0.900                            | N/A   | N/A    |
|                       | Top           | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                       | Bottom        | 0.567        | /            | /            | /            | 0.567                                      | 0.567                                    | 0.567                            | N/A   | N/A    |
| WCDMA Band II         | Back          | <b>0.591</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.996                                      | 1.006                                    | 0.704                            | N/A   | N/A    |
|                       | Top           | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                       | Bottom        | 0.360        | /            | /            | /            | 0.360                                      | 0.360                                    | 0.360                            | N/A   | N/A    |
| WCDMA Band V          | Back          | <b>0.437</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.842                                      | 0.852                                    | 0.550                            | N/A   | N/A    |
|                       | Top           | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                       | Bottom        | 0.245        | /            | /            | /            | 0.245                                      | 0.245                                    | 0.245                            | N/A   | N/A    |

| Band                    | Test Position | RB allocation | Scaled       |              |              |              | $\Sigma$ SAR (W/kg)<br>WWAN +<br>WIFI 2.4G | $\Sigma$ SAR (W/kg)<br>WWAN +<br>WIFI 5G | $\Sigma$ SAR (W/kg)<br>WWAN + BT | SPLSR | Remark |
|-------------------------|---------------|---------------|--------------|--------------|--------------|--------------|--------------------------------------------|------------------------------------------|----------------------------------|-------|--------|
|                         |               |               | WWAN         | WIFI 2.4G    | WIFI 5G      | Bluetooth    |                                            |                                          |                                  |       |        |
| LTE Band 2 QPSK (20MHz) | Back          | 1             | <b>0.555</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.960                                      | 0.970                                    | 0.668                            | N/A   | N/A    |
|                         |               | 50            | 0.470        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.875                                      | 0.885                                    | 0.583                            | N/A   | N/A    |
|                         | Top           | 1             | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                         |               | 50            | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                         | Bottom        | 1             | 0.374        | /            | /            | /            | 0.374                                      | 0.374                                    | 0.374                            | N/A   | N/A    |
|                         |               | 50            | 0.328        | /            | /            | /            | 0.328                                      | 0.328                                    | 0.328                            | N/A   | N/A    |
| LTE Band 4 QPSK (20MHz) | Back          | 1             | <b>0.725</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 1.130                                      | 1.140                                    | 0.838                            | N/A   | N/A    |
|                         |               | 50            | 0.331        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.736                                      | 0.746                                    | 0.444                            | N/A   | N/A    |
|                         | Top           | 1             | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                         |               | 50            | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347                                      | 0.731                                    | 0.076                            | N/A   | N/A    |
|                         | Bottom        | 1             | 0.553        | /            | /            | /            | 0.553                                      | 0.553                                    | 0.553                            | N/A   | N/A    |
|                         |               | 50            | 0.268        | /            | /            | /            | 0.268                                      | 0.268                                    | 0.268                            | N/A   | N/A    |

|                                |        |    |              |              |              |              |       |       |       |     |     |
|--------------------------------|--------|----|--------------|--------------|--------------|--------------|-------|-------|-------|-----|-----|
| LTE Band 5<br>QPSK<br>(10MHz)  | Back   | 1  | <b>0.329</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.734 | 0.744 | 0.442 | N/A | N/A |
|                                |        | 25 | 0.206        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.611 | 0.621 | 0.319 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 25 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.281        | /            | /            | /            | 0.281 | 0.281 | 0.281 | N/A | N/A |
|                                |        | 25 | 0.146        | /            | /            | /            | 0.146 | 0.146 | 0.146 | N/A | N/A |
| LTE Band 12<br>QPSK<br>(10MHz) | Back   | 1  | <b>0.441</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.846 | 0.856 | 0.554 | N/A | N/A |
|                                |        | 25 | 0.235        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.640 | 0.650 | 0.348 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 25 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.342        | /            | /            | /            | 0.342 | 0.342 | 0.342 | N/A | N/A |
|                                |        | 25 | 0.121        | /            | /            | /            | 0.121 | 0.121 | 0.121 | N/A | N/A |
| LTE Band 13<br>QPSK<br>(10MHz) | Back   | 1  | <b>0.430</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.835 | 0.845 | 0.543 | N/A | N/A |
|                                |        | 25 | 0.255        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.660 | 0.670 | 0.368 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 25 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.383        | /            | /            | /            | 0.383 | 0.383 | 0.383 | N/A | N/A |
|                                |        | 25 | 0.172        | /            | /            | /            | 0.172 | 0.172 | 0.172 | N/A | N/A |
| LTE Band 25<br>QPSK<br>(20MHz) | Back   | 1  | <b>0.701</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 1.106 | 1.116 | 0.814 | N/A | N/A |
|                                |        | 50 | 0.572        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.977 | 0.987 | 0.685 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 50 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.473        | /            | /            | /            | 0.473 | 0.473 | 0.473 | N/A | N/A |
|                                |        | 50 | 0.430        | /            | /            | /            | 0.430 | 0.430 | 0.430 | N/A | N/A |
| LTE Band 26<br>QPSK<br>(15MHz) | Back   | 1  | <b>0.418</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.823 | 0.833 | 0.531 | N/A | N/A |
|                                |        | 36 | 0.301        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.706 | 0.716 | 0.414 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 36 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.188        | /            | /            | /            | 0.188 | 0.188 | 0.188 | N/A | N/A |
|                                |        | 36 | 0.135        | /            | /            | /            | 0.135 | 0.135 | 0.135 | N/A | N/A |
| LTE Band 41<br>QPSK<br>(20MHz) | Back   | 1  | <b>0.396</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.801 | 0.811 | 0.509 | N/A | N/A |
|                                |        | 50 | 0.341        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.746 | 0.756 | 0.454 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 50 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.233        | /            | /            | /            | 0.233 | 0.233 | 0.233 | N/A | N/A |
|                                |        | 50 | 0.201        | /            | /            | /            | 0.201 | 0.201 | 0.201 | N/A | N/A |
| LTE Band 66<br>QPSK<br>(20MHz) | Back   | 1  | <b>0.755</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 1.160 | 1.170 | 0.868 | N/A | N/A |
|                                |        | 50 | 0.473        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.878 | 0.888 | 0.586 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 50 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.629        | /            | /            | /            | 0.629 | 0.629 | 0.629 | N/A | N/A |
|                                |        | 50 | 0.361        | /            | /            | /            | 0.361 | 0.361 | 0.361 | N/A | N/A |
| LTE Band 71<br>QPSK<br>(20MHz) | Back   | 1  | <b>0.553</b> | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.958 | 0.968 | 0.666 | N/A | N/A |
|                                |        | 50 | 0.412        | <b>0.405</b> | 0.415        | <b>0.113</b> | 0.817 | 0.827 | 0.525 | N/A | N/A |
|                                | Top    | 1  | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                |        | 50 | /            | 0.347        | <b>0.731</b> | 0.076        | 0.347 | 0.731 | 0.076 | N/A | N/A |
|                                | Bottom | 1  | 0.326        | /            | /            | /            | 0.326 | 0.326 | 0.326 | N/A | N/A |
|                                |        | 50 | 0.239        | /            | /            | /            | 0.239 | 0.239 | 0.239 | N/A | N/A |



## 12. SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Note: For 1g SAR, the highest measured 1g SAR is  $0.787 < 0.80$  W/kg, repeated measurement is not required.

### 13. Test Equipment List

| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Manufacturer      | Model         | Serial No./Version  | Cal. Date  | Cal. Due   |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------|---------------------|------------|------------|
| E-Field Probe                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | MVG               | SSE2          | 04/22 EPG0365       | 2023/02/06 | 2024/02/05 |
| 6 1/2 Digital Multimeter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Keithley          | DMM6500       | 4527164             | 2022/11/24 | 2023/11/23 |
| Wideband Radio Communication Tester                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ROHDE & SCHWARZ   | CMW500        | 161997              | 2022/11/24 | 2023/11/23 |
| MXG Vector Signal Generator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Agilent           | N5182A        | MY46240163          | 2022/11/24 | 2023/11/23 |
| E-Series Avg. Power Sensor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | KEYSIGHT          | E9300A        | MY55050017          | 2022/03/26 | 2023/03/25 |
| EPM Series Power Meter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | KEYSIGHT          | E4418B        | MY41293435          | 2022/03/26 | 2023/03/25 |
| 10dB Attenuator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | MIDWEST MICROWAVE | 263-10dB      | /                   | 2022/03/26 | 2023/03/25 |
| Coupler                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | MERRIMAC          | CWM-10R-10.8G | LOT-83391           | 2022/03/26 | 2023/03/25 |
| 750MHz Validation Dipole                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MVG               | SID750        | 07/22 DIP 0G835-655 | 2023/02/06 | 2024/02/05 |
| 835MHz Validation Dipole                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MVG               | SID835        | 07/22 DIP 0G835-656 | 2023/02/06 | 2024/02/05 |
| 1800MHz Validation Dipole                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | MVG               | SID1800       | 07/22 DIP 1G800-657 | 2023/02/06 | 2024/02/05 |
| 1900MHz Validation Dipole                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | MVG               | SID1900       | 07/22 DIP 1G900-658 | 2023/02/06 | 2024/02/05 |
| 2450MHz Validation Dipole                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | MVG               | SID2450       | 07/22 DIP 2G450-662 | 2023/02/06 | 2024/02/05 |
| 2600MHz Validation Dipole                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | MVG               | SID2600       | 07/22 DIP 2G600-663 | 2023/02/06 | 2024/02/05 |
| 5200MHz-5800MHz Validation Dipole                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | MVG               | SID5000       | 07/22 DIP5G000-670  | 2023/02/06 | 2024/02/05 |
| LIMESAR Dielectric Probe                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MVG               | SCLMP         | 06/22 OCPG88        | /          | /          |
| ENA Series Network Analyzer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Agilent           | E5071B        | MY42301221          | 2022/11/24 | 2023/11/23 |
| Thermometer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Riters            | DT-232        | 21A11               | 2022/03/26 | 2023/03/25 |
| Antenna network emulator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MVG               | ANTA 74       | 07/22 ANTA 74       | /          | /          |
| SAM Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | MVG               | SAM           | 07/22 SAM149        | /          | /          |
| Mobile Phone Positioning System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | MVG               | MSH 118       | 07/22 MSH 118       | /          | /          |
| Mechanical Calibration Kit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | PNA               | /             | /                   | /          | /          |
| Open SAR test software                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | MVG               | /             | V5.3.5              | /          | /          |
| <p>Note: For dipole antennas, BTF has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:</p> <ol style="list-style-type: none"> <li>1. There is no physical damage on the dipole;</li> <li>2. System validation with specific dipole is within 10% of calibrated value;</li> <li>3. Return-loss in within 20% of calibrated measurement.</li> <li>4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.</li> </ol> |                   |               |                     |            |            |

## ANNEX A Simulating Liquid Verification Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

| Dielectric performance of tissue simulating liquid |              |          |                |          |                           |                       |       |              |           |
|----------------------------------------------------|--------------|----------|----------------|----------|---------------------------|-----------------------|-------|--------------|-----------|
| Frequency<br>(MHz)                                 | $\epsilon_r$ |          | $\sigma$ (s/m) |          | Delta<br>( $\epsilon_r$ ) | Delta<br>( $\sigma$ ) | Limit | Temp<br>(°C) | Date      |
|                                                    | Target       | Measured | Target         | Measured |                           |                       |       |              |           |
| 750                                                | 41.90        | 41.80    | 0.89           | 0.86     | 0.24%                     | 3.37%                 | ±5%   | 20.0         | 18/3/2023 |
| 835                                                | 41.50        | 41.41    | 0.90           | 0.87     | 0.22%                     | 3.33%                 | ±5%   | 20.0         | 18/3/2023 |
| 1800                                               | 40.00        | 39.91    | 1.40           | 1.37     | 0.23%                     | 2.14%                 | ±5%   | 20.0         | 19/3/2023 |
| 1900                                               | 40.00        | 39.88    | 1.40           | 1.41     | 0.30%                     | -0.71%                | ±5%   | 20.0         | 19/3/2023 |
| 2450                                               | 39.20        | 39.08    | 1.80           | 1.81     | 0.31%                     | -0.56%                | ±5%   | 20.0         | 20/3/2023 |
| 2600                                               | 39.00        | 38.88    | 1.96           | 1.97     | 0.31%                     | -0.51%                | ±5%   | 20.0         | 20/3/2023 |
| 5200                                               | 36.00        | 35.88    | 4.66           | 4.70     | 0.33%                     | -0.86%                | ±5%   | 20.0         | 20/3/2023 |
| 5400                                               | 35.80        | 35.68    | 4.86           | 4.90     | 0.34%                     | -0.82%                | ±5%   | 20.0         | 20/3/2023 |
| 5600                                               | 35.50        | 35.38    | 5.07           | 5.11     | 0.34%                     | -0.79%                | ±5%   | 20.0         | 20/3/2023 |
| 5800                                               | 35.30        | 35.18    | 5.27           | 5.31     | 0.34%                     | -0.76%                | ±5%   | 20.0         | 20/3/2023 |

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

## ANNEX B System Check Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %(for 10 g).

| Frequency<br>(MHz) | Input Power<br>(mW) | 1g SAR<br>(W/Kg) | 10g SAR<br>(W/Kg) | 1g SAR 1W<br>input power<br>normalized<br>(W/Kg) | 10g SAR 1W<br>input power<br>normalized<br>(W/Kg) | 1g SAR<br>Standard<br>target (1W)<br>(W/Kg) | 10g SAR<br>Standard<br>target (1W)<br>(W/Kg) | 1g SAR<br>Deviation | 10g SAR<br>Deviation |
|--------------------|---------------------|------------------|-------------------|--------------------------------------------------|---------------------------------------------------|---------------------------------------------|----------------------------------------------|---------------------|----------------------|
| 750                | 16                  | 0.138            | 0.092             | 8.63                                             | 5.75                                              | 8.25                                        | 5.38                                         | 4.55%               | 6.88%                |
| 835                | 16                  | 0.163            | 0.106             | 10.19                                            | 6.63                                              | 9.79                                        | 6.17                                         | 4.06%               | 7.37%                |
| 1800               | 16                  | 0.588            | 0.312             | 36.75                                            | 19.50                                             | 39.33                                       | 20.61                                        | -6.56%              | -5.39%               |
| 1900               | 16                  | 0.630            | 0.322             | 39.38                                            | 20.13                                             | 40.97                                       | 20.7                                         | -3.89%              | -2.78%               |
| 2450               | 16                  | 0.793            | 0.352             | 49.56                                            | 22.00                                             | 54.4                                        | 23.86                                        | -8.89%              | -7.80%               |
| 2600               | 16                  | 0.866            | 0.421             | 54.13                                            | 26.31                                             | 57.14                                       | 24.48                                        | -5.28%              | 7.49%                |
| 5200               | 13                  | 0.998            | 0.294             | 76.77                                            | 22.62                                             | 73.88                                       | 21.29                                        | 3.91%               | 6.23%                |
| 5400               | 13                  | 1.120            | 0.327             | 86.15                                            | 25.15                                             | 81.47                                       | 23.23                                        | 5.75%               | 8.28%                |
| 5600               | 13                  | 1.084            | 0.314             | 83.38                                            | 24.15                                             | 78.71                                       | 22.64                                        | 5.94%               | 6.69%                |
| 5800               | 13                  | 1.023            | 0.280             | 78.69                                            | 21.54                                             | 74.21                                       | 21.5                                         | 6.04%               | 0.18%                |

## System Performance Check Data (750 MHz)

### System check at 750 MHz

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                       |
|-----------------|---------------------------------------|
| Probe           | SN 04/22 EPG0365                      |
| ConvF           | 1.65                                  |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max         |
| Zoom Scan       | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete |
| Phantom         | Validation plane                      |
| Device Position | Dipole                                |
| Band            | CW750                                 |
| Channels        | Middle                                |
| Signal          | CW                                    |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 750.000 |
| Relative permittivity (real part)      | 41.800  |
| Relative permittivity (imaginary part) | 21.460  |
| Conductivity (S/m)                     | 0.860   |

#### C. SAR Surface and Volume

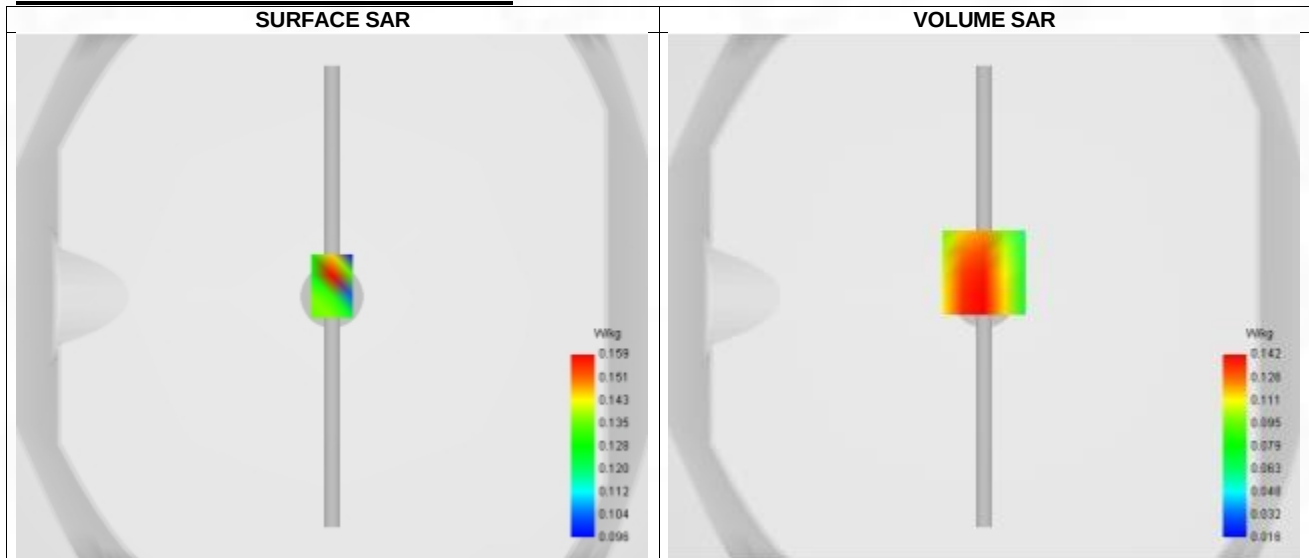


Maximum location: X=0.00, Y=9.00 ; SAR Peak: 0.20 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.092    |
| SAR 1g (W/Kg)                                         | 0.138    |
| Variation (%)                                         | -2.190   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.287 | 0.142 | 0.092 | 0.073 | 0.042 |

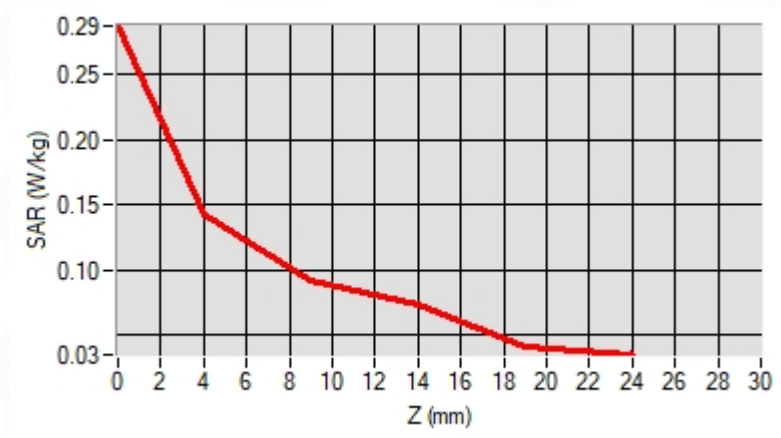

## F. 3D Image

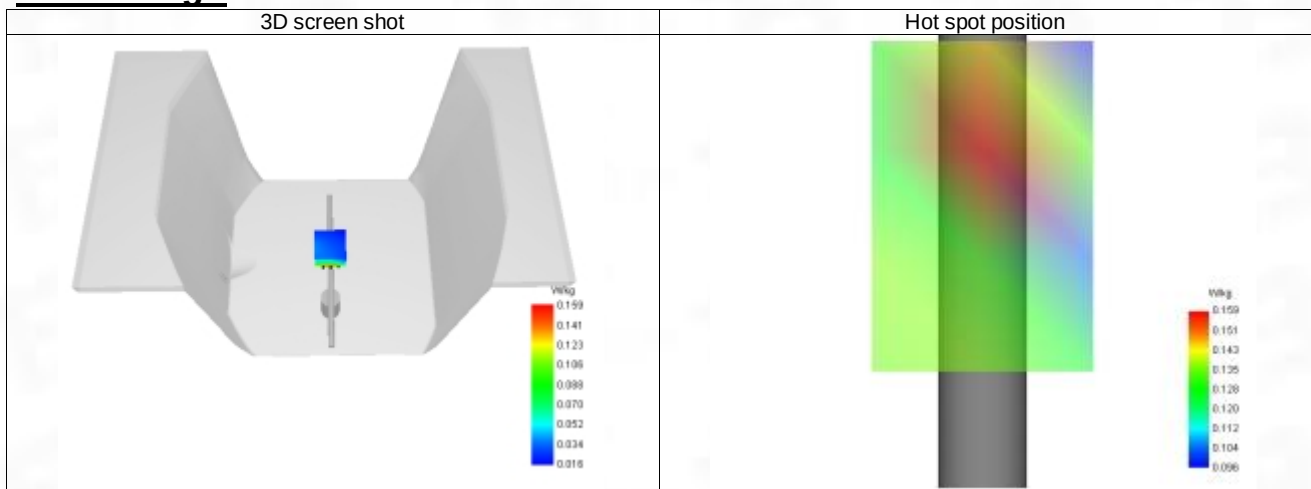

## System Performance Check Data (835 MHz)

### System check at 835 MHz

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                       |
|-----------------|---------------------------------------|
| Probe           | SN 04/22 EPG0365                      |
| ConvF           | 1.68                                  |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max         |
| Zoom Scan       | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete |
| Phantom         | Validation plane                      |
| Device Position | Dipole                                |
| Band            | CW835                                 |
| Channels        | Middle                                |
| Signal          | CW                                    |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 835.000 |
| Relative permittivity (real part)      | 41.410  |
| Relative permittivity (imaginary part) | 19.490  |
| Conductivity (S/m)                     | 0.870   |

#### C. SAR Surface and Volume

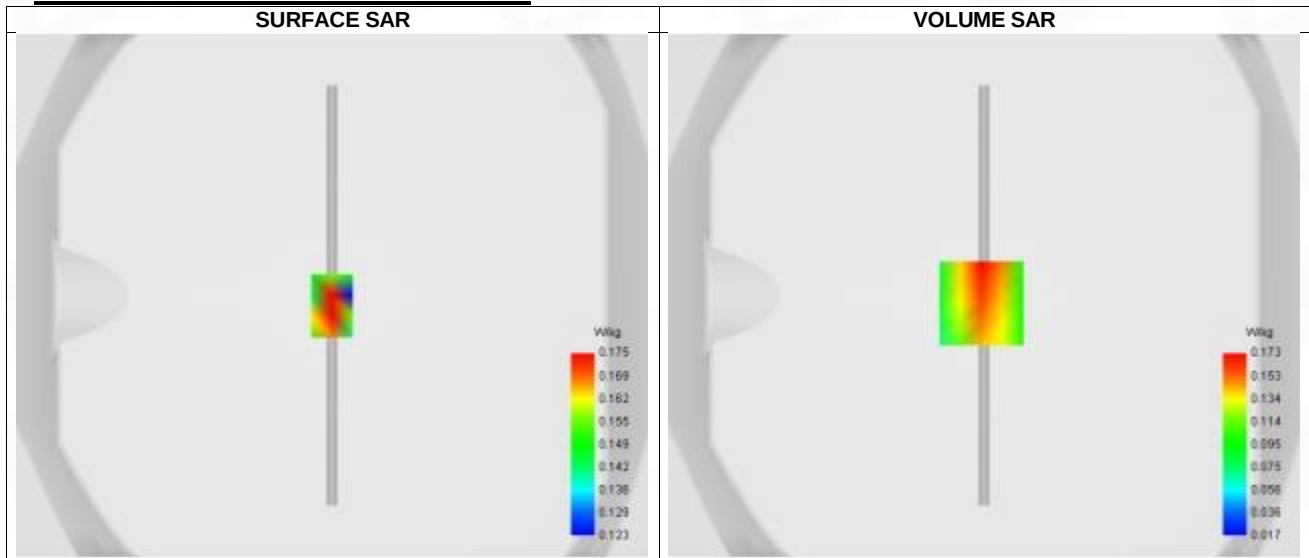


Maximum location: X=-1.00, Y=-3.00 ; SAR Peak: 0.26 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.106    |
| SAR 1g (W/Kg)                                         | 0.163    |
| Variation (%)                                         | -3.390   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.059 | 0.173 | 0.115 | 0.061 | 0.072 |

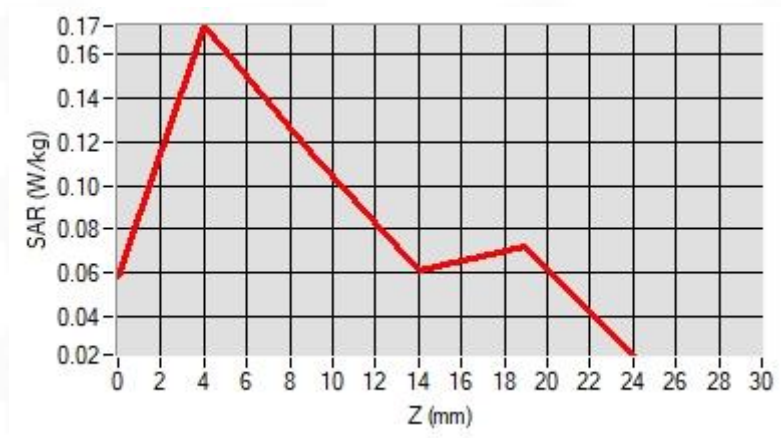

## F. 3D Image

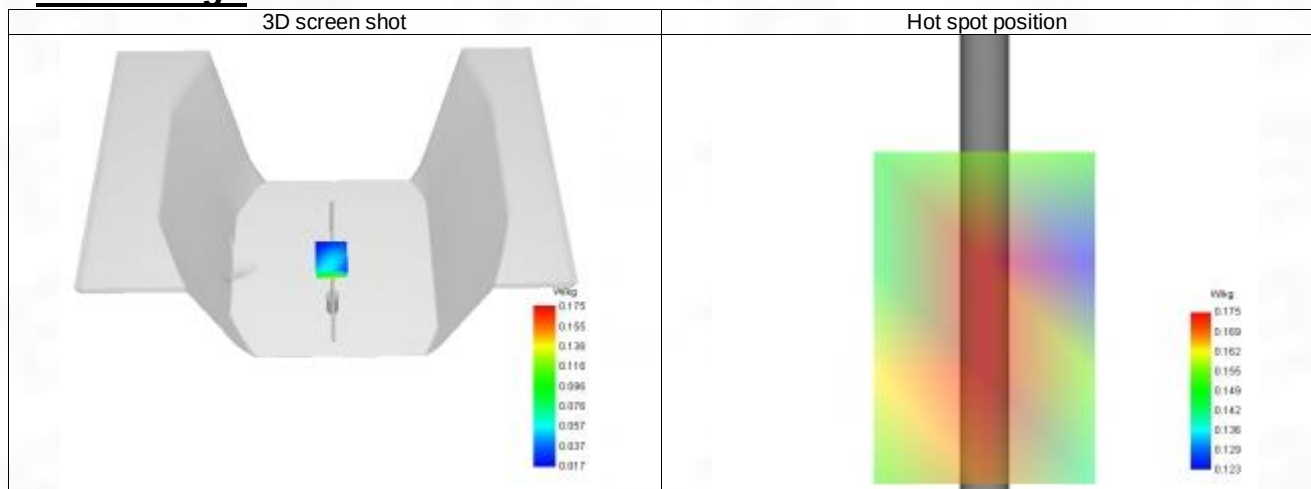



## System Performance Check Data (1800 MHz)

### System check at 1800 MHz

Date of measurement: 19/3/2023


#### A. Experimental conditions.

|                 |                                       |
|-----------------|---------------------------------------|
| Probe           | SN 04/22 EPG0365                      |
| ConvF           | 1.96                                  |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max         |
| Zoom Scan       | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete |
| Phantom         | Validation plane                      |
| Device Position | Dipole                                |
| Band            | CW1800                                |
| Channels        | Middle                                |
| Signal          | CW                                    |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 1800.000 |
| Relative permittivity (real part)      | 39.910   |
| Relative permittivity (imaginary part) | 14.090   |
| Conductivity (S/m)                     | 1.370    |

#### C. SAR Surface and Volume

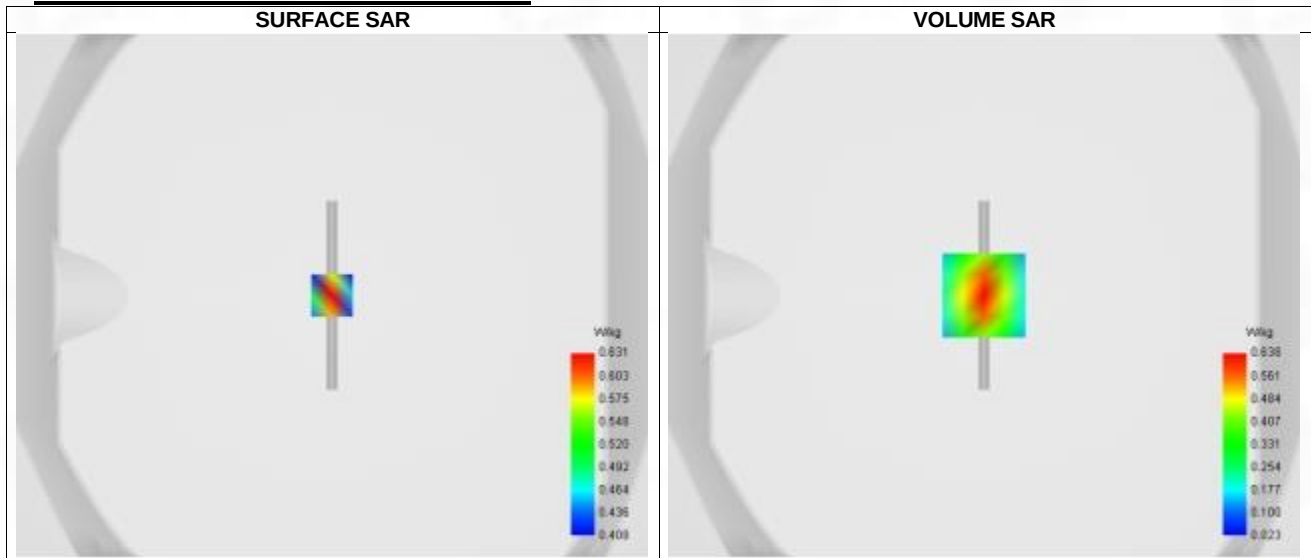


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.00 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.312    |
| SAR 1g (W/Kg)                                         | 0.588    |
| Variation (%)                                         | -0.250   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.003 | 0.638 | 0.356 | 0.204 | 0.127 |

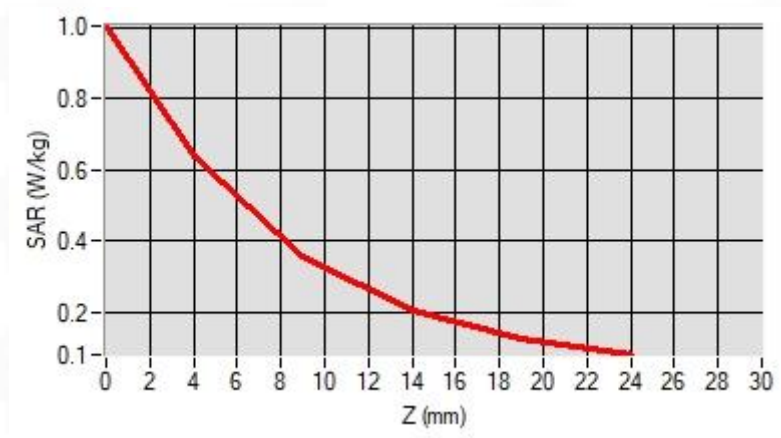

## F. 3D Image

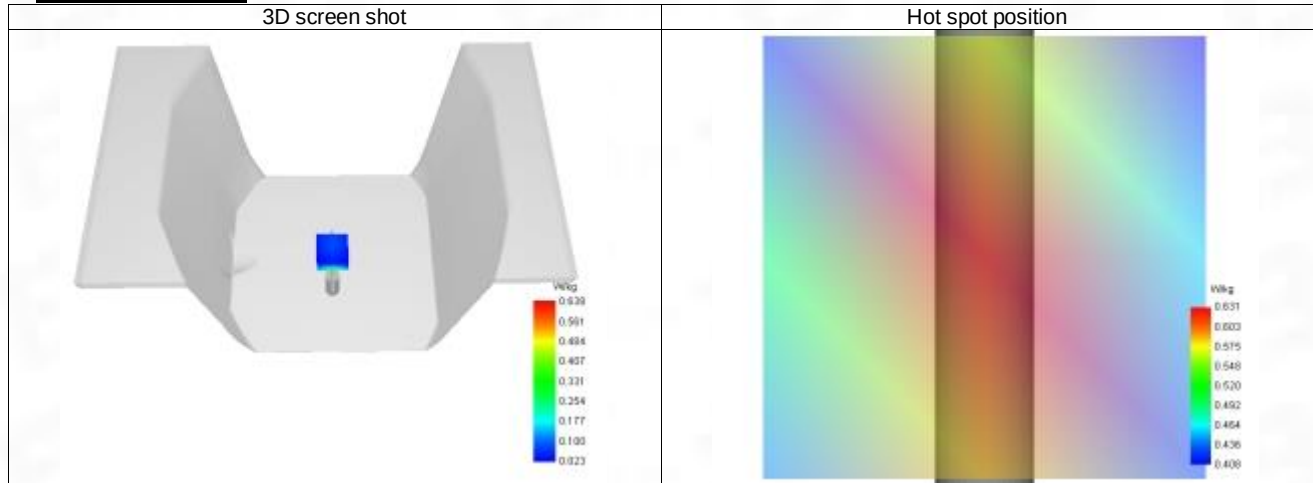

## System Performance Check Data (1900 MHz)

### System check at 1900 MHz

Date of measurement: 19/3/2023


#### A. Experimental conditions.

|                 |                                       |
|-----------------|---------------------------------------|
| Probe           | SN 04/22 EPG0365                      |
| ConvF           | 2.24                                  |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max         |
| Zoom Scan       | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete |
| Phantom         | Validation plane                      |
| Device Position | Dipole                                |
| Band            | CW1900                                |
| Channels        | Middle                                |
| Signal          | CW                                    |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 1900.000 |
| Relative permittivity (real part)      | 39.880   |
| Relative permittivity (imaginary part) | 13.380   |
| Conductivity (S/m)                     | 1.410    |

#### C. SAR Surface and Volume

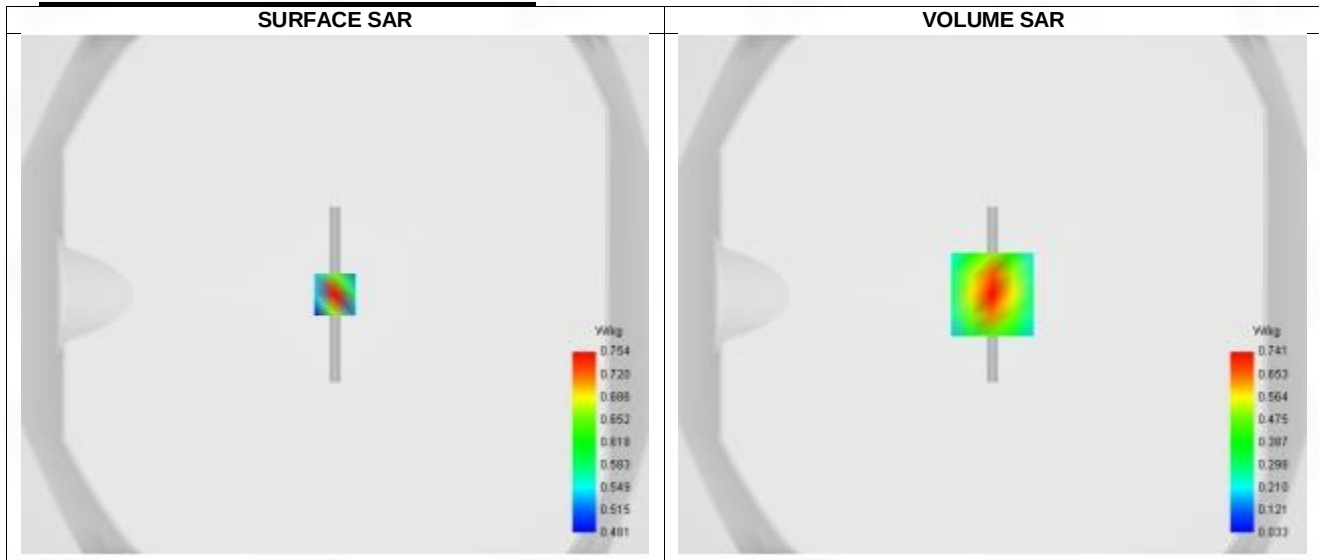


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.18 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.322    |
| SAR 1g (W/Kg)                                         | 0.630    |
| Variation (%)                                         | -2.080   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.201 | 0.759 | 0.402 | 0.239 | 0.156 |

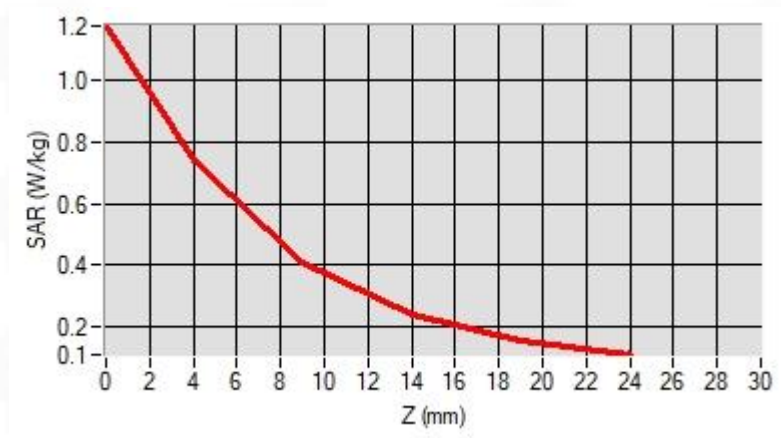

## F. 3D Image

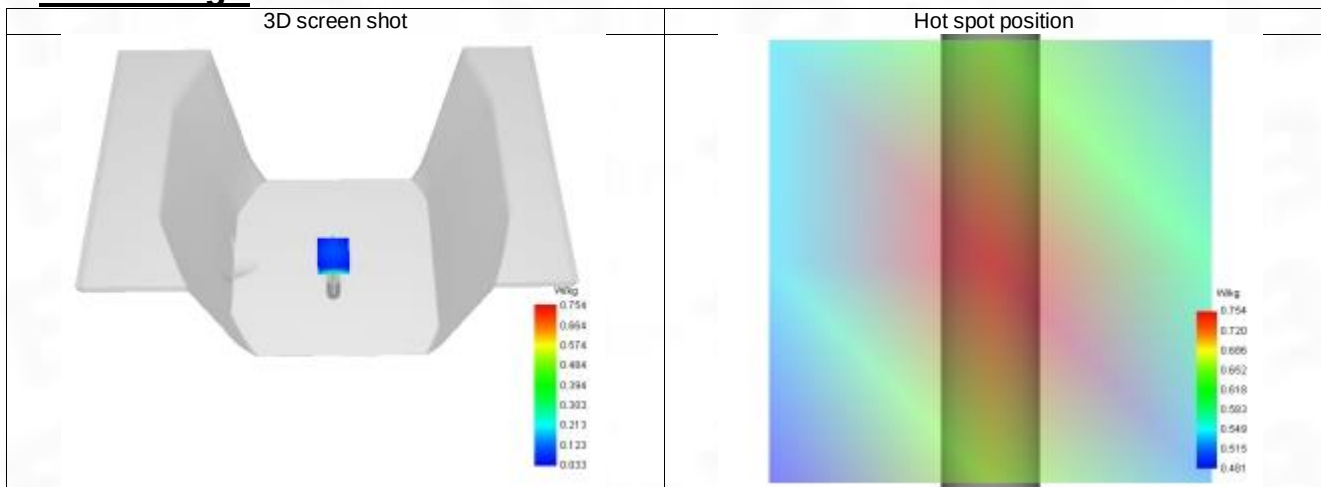

## System Performance Check Data (2450 MHz)

### System check at 2450 MHz

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                       |
|-----------------|---------------------------------------|
| Probe           | SN 04/22 EPG0365                      |
| ConvF           | 2.36                                  |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max         |
| Zoom Scan       | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete |
| Phantom         | Validation plane                      |
| Device Position | Dipole                                |
| Band            | CW2450                                |
| Channels        | Middle                                |
| Signal          | CW                                    |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 2450.000 |
| Relative permittivity (real part)      | 39.080   |
| Relative permittivity (imaginary part) | 13.340   |
| Conductivity (S/m)                     | 1.810    |

#### C. SAR Surface and Volume

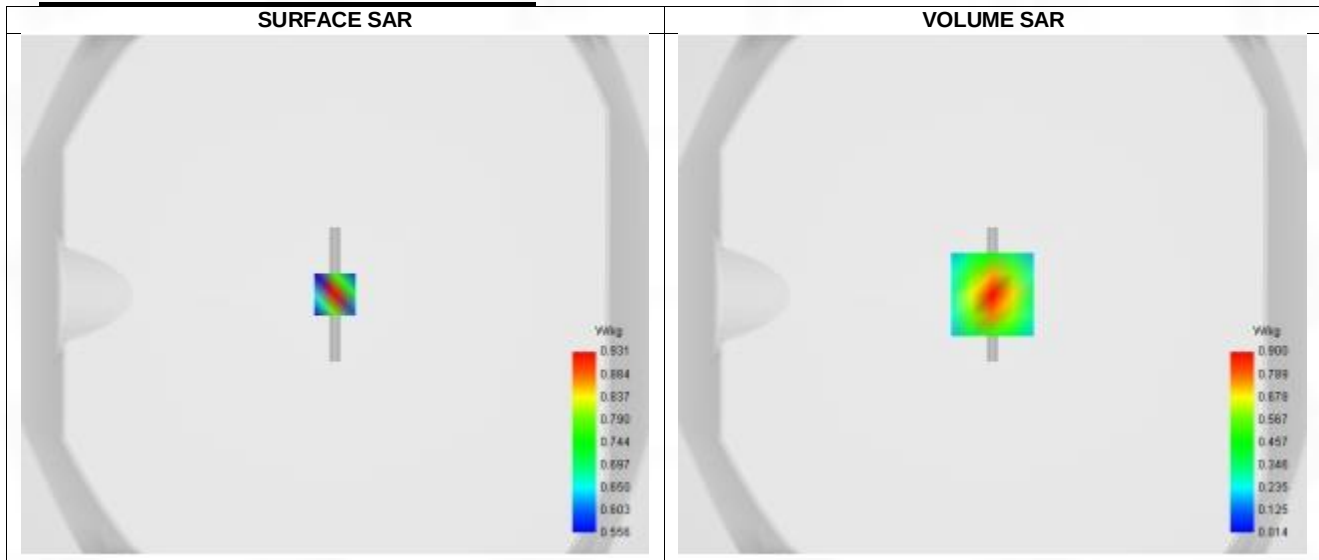


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 1.47 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.352    |
| SAR 1g (W/Kg)                                         | 0.793    |
| Variation (%)                                         | -2.570   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.466 | 0.900 | 0.477 | 0.261 | 0.158 |

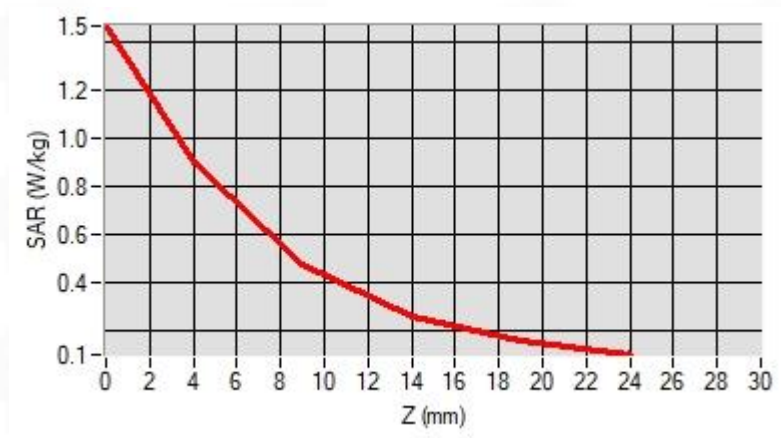

## F. 3D Image

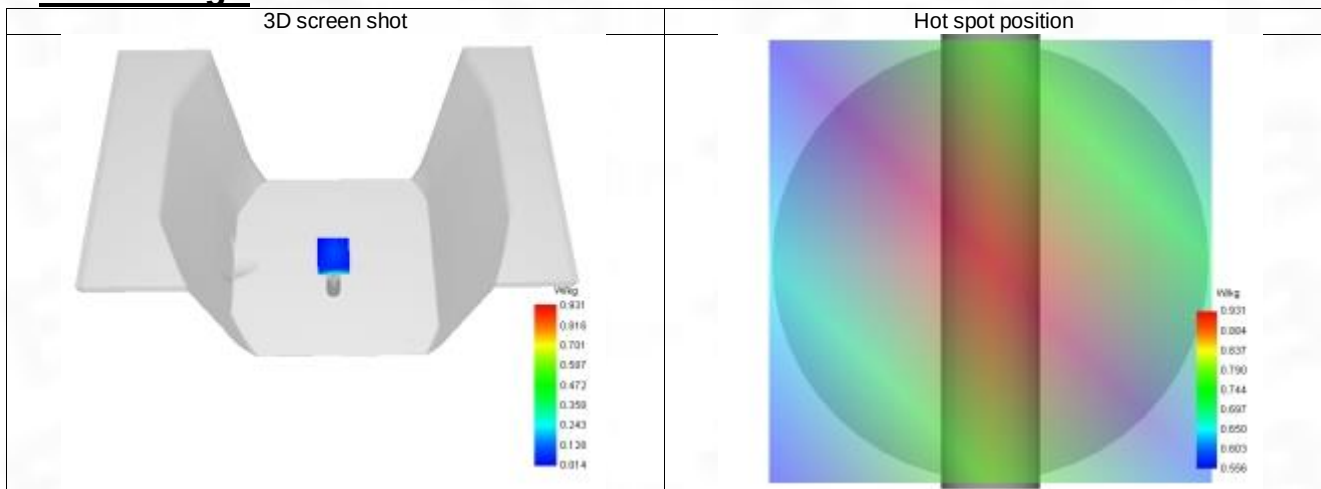

## System Performance Check Data (2600 MHz)

### System check at 2600 MHz

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                       |
|-----------------|---------------------------------------|
| Probe           | SN 04/22 EPG0365                      |
| ConvF           | 2.40                                  |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max         |
| Zoom Scan       | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete |
| Phantom         | Validation plane                      |
| Device Position | Dipole                                |
| Band            | CW2600                                |
| Channels        | Middle                                |
| Signal          | CW                                    |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 2600.000 |
| Relative permittivity (real part)      | 38.880   |
| Relative permittivity (imaginary part) | 12.690   |
| Conductivity (S/m)                     | 1.970    |

#### C. SAR Surface and Volume

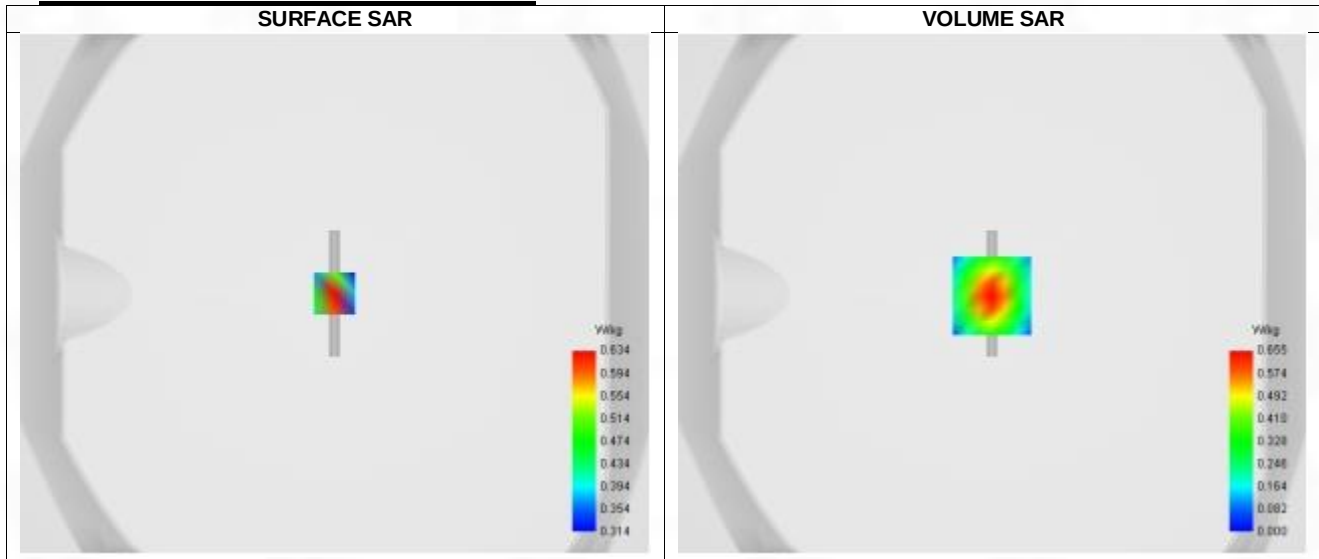

Maximum location: X=0.00, Y=-1.00 ; SAR Peak: 1.02 W/kg


#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.421    |
| SAR 1g (W/Kg)                                         | 0.866    |
| Variation (%)                                         | 2.980    |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.020 | 0.655 | 0.359 | 0.187 | 0.091 |



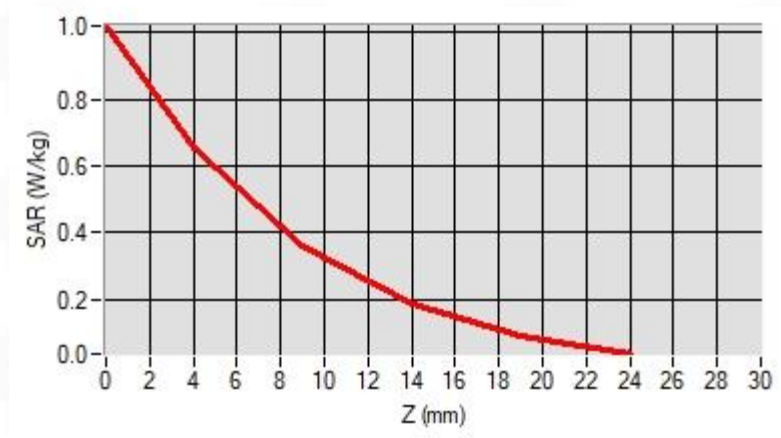

## F. 3D Image

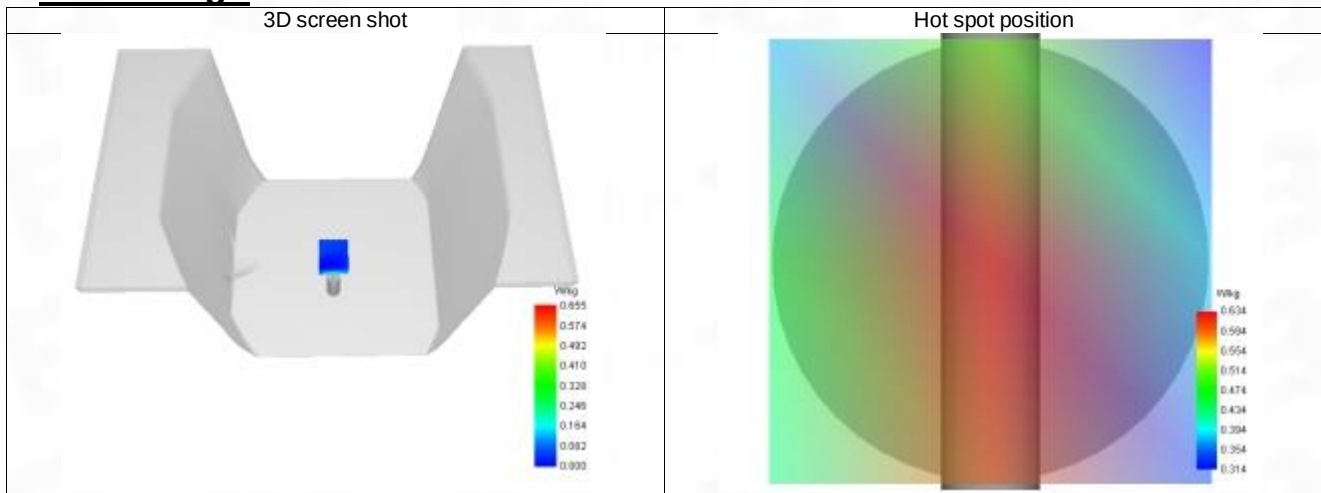

## System Performance Check Data (5200 MHz)

### System check at 5200 MHz

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                        |
|-----------------|----------------------------------------|
| Probe           | SN 04/22 EPG0365                       |
| ConvF           | 2.24                                   |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max          |
| Zoom Scan       | 7x7x12, dx=4mm dy=4mm dz=5mm, Complete |
| Phantom         | Validation plane                       |
| Device Position | Dipole                                 |
| Band            | CW5200                                 |
| Channels        | Middle                                 |
| Signal          | CW                                     |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5200.000 |
| Relative permittivity (real part)      | 35.880   |
| Relative permittivity (imaginary part) | 16.250   |
| Conductivity (S/m)                     | 4.700    |

#### C. SAR Surface and Volume

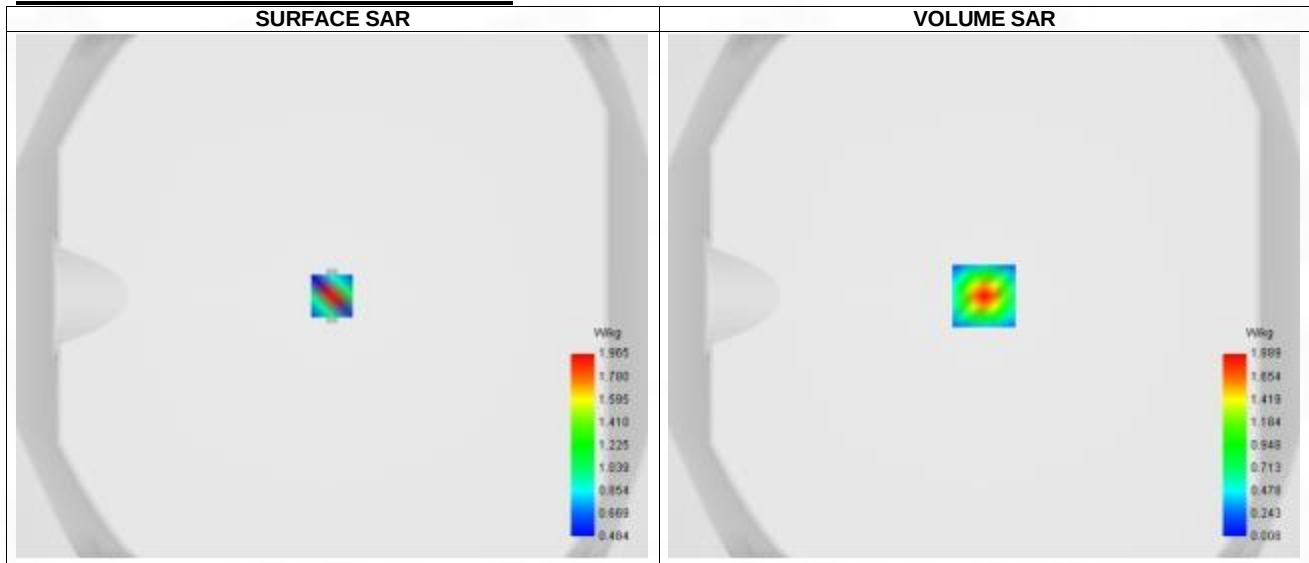

Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.38 W/kg


#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.294    |
| SAR 1g (W/Kg)                                         | 0.998    |
| Variation (%)                                         | -3.400   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


#### E. Z Axis Scan

|        |      |      |      |      |      |       |       |       |       |
|--------|------|------|------|------|------|-------|-------|-------|-------|
| Z (mm) | 0.00 | 2.00 | 4.00 | 6.00 | 8.00 | 10.00 | 12.00 | 14.00 | 16.00 |
|--------|------|------|------|------|------|-------|-------|-------|-------|

|            |       |       |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SAR (W/Kg) | 3.268 | 1.889 | 1.021 | 0.523 | 0.266 | 0.142 | 0.085 | 0.060 | 0.052 |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|

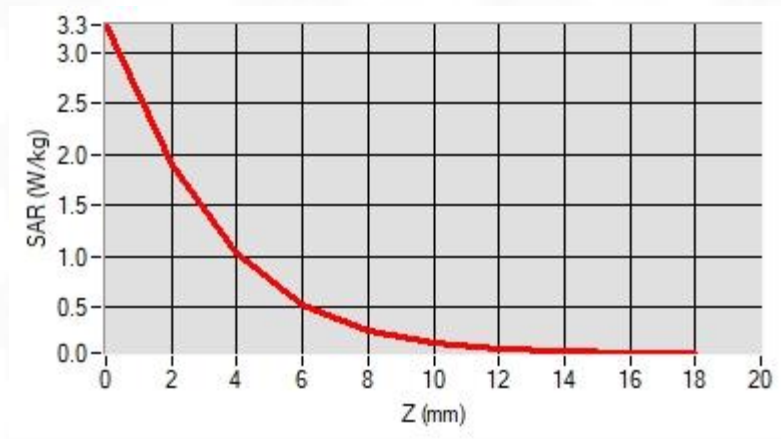

## F. 3D Image

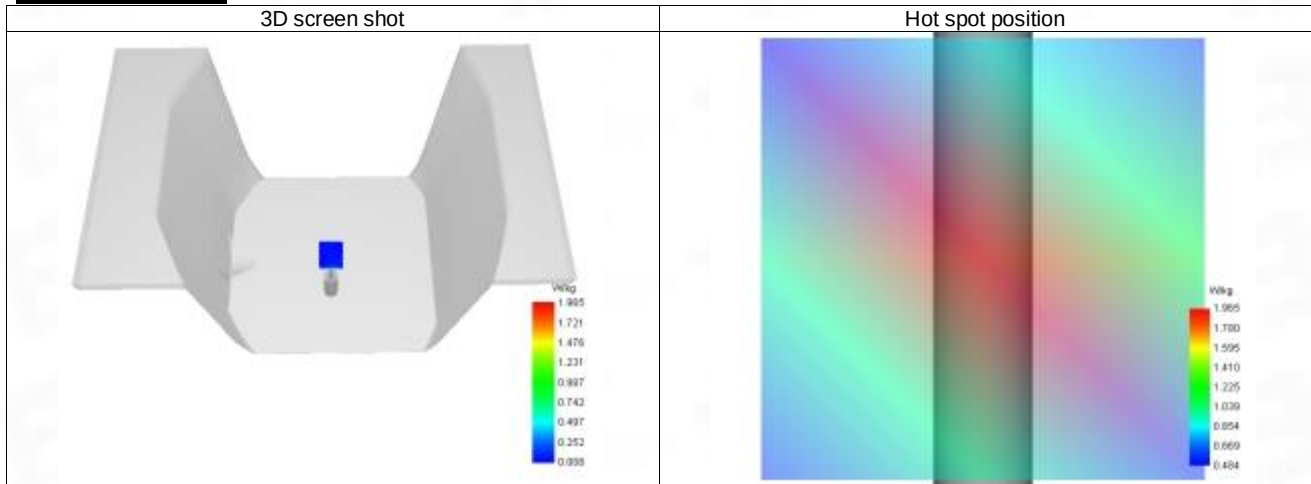

## System Performance Check Data (5400 MHz)

### System check at 5400 MHz

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                       |
|-----------------|---------------------------------------|
| Probe           | SN 04/22 EPG0365                      |
| ConvF           | 2.12                                  |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max         |
| Zoom Scan       | 7x7x12,dx=4mm dy=4mm dz=5mm, Complete |
| Phantom         | Validation plane                      |
| Device Position | Dipole                                |
| Band            | CW5400                                |
| Channels        | Middle                                |
| Signal          | CW                                    |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5400.000 |
| Relative permittivity (real part)      | 35.800   |
| Relative permittivity (imaginary part) | 16.200   |
| Conductivity (S/m)                     | 4.860    |

#### C. SAR Surface and Volume

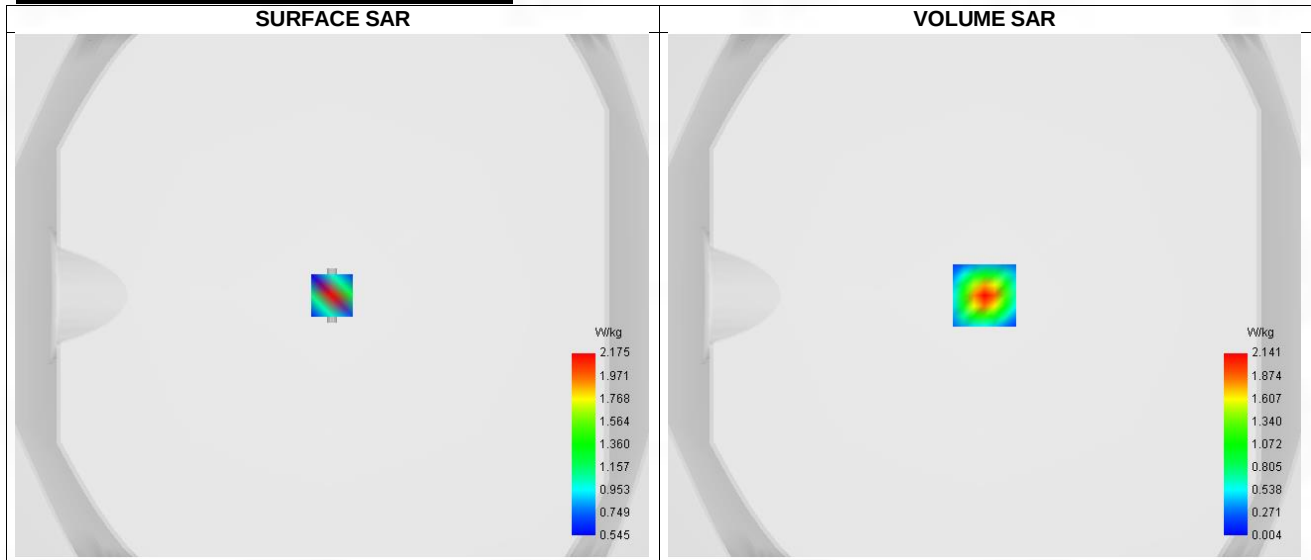


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.78 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.327    |
| SAR 1g (W/Kg)                                         | 1.120    |
| Variation (%)                                         | -4.610   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 2.00  | 4.00  | 6.00  | 8.00  | 10.00 | 12.00 | 14.00 | 16.00 |
| SAR (W/Kg) | 3.660 | 2.141 | 1.177 | 0.614 | 0.317 | 0.169 | 0.098 | 0.065 | 0.050 |

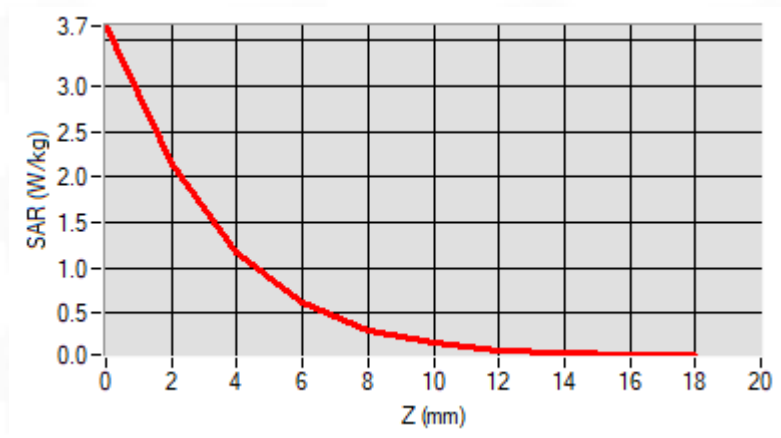

## F. 3D Image

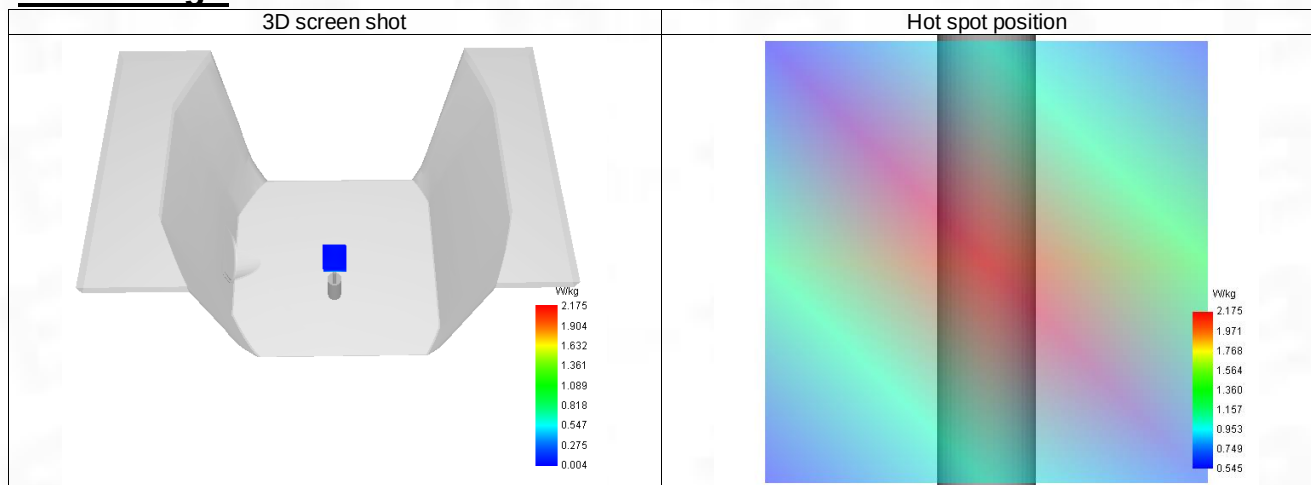

## System Performance Check Data (5600 MHz)

### System check at 5600 MHz

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                        |
|-----------------|----------------------------------------|
| Probe           | SN 04/22 EPG0365                       |
| ConvF           | 2.18                                   |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max          |
| Zoom Scan       | 7x7x12, dx=4mm dy=4mm dz=5mm, Complete |
| Phantom         | Validation plane                       |
| Device Position | Dipole                                 |
| Band            | CW5600                                 |
| Channels        | Middle                                 |
| Signal          | CW                                     |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5600.000 |
| Relative permittivity (real part)      | 35.500   |
| Relative permittivity (imaginary part) | 16.300   |
| Conductivity (S/m)                     | 5.071    |

#### C. SAR Surface and Volume

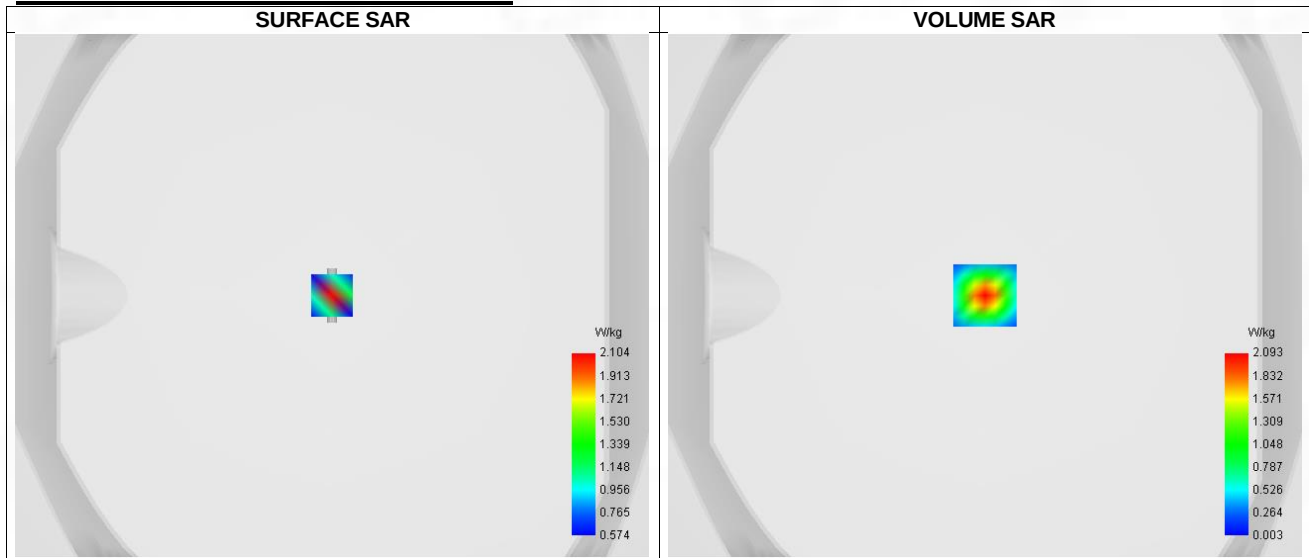


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 3.90 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.314    |
| SAR 1g (W/Kg)                                         | 1.084    |
| Variation (%)                                         | -0.190   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 2.00  | 4.00  | 6.00  | 8.00  | 10.00 | 12.00 | 14.00 | 16.00 |
| SAR (W/Kg) | 3.748 | 2.093 | 1.074 | 0.514 | 0.243 | 0.122 | 0.072 | 0.056 | 0.056 |

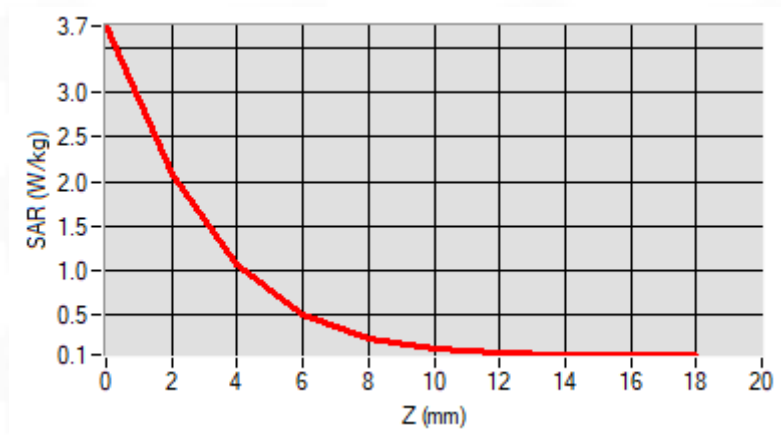

## F. 3D Image

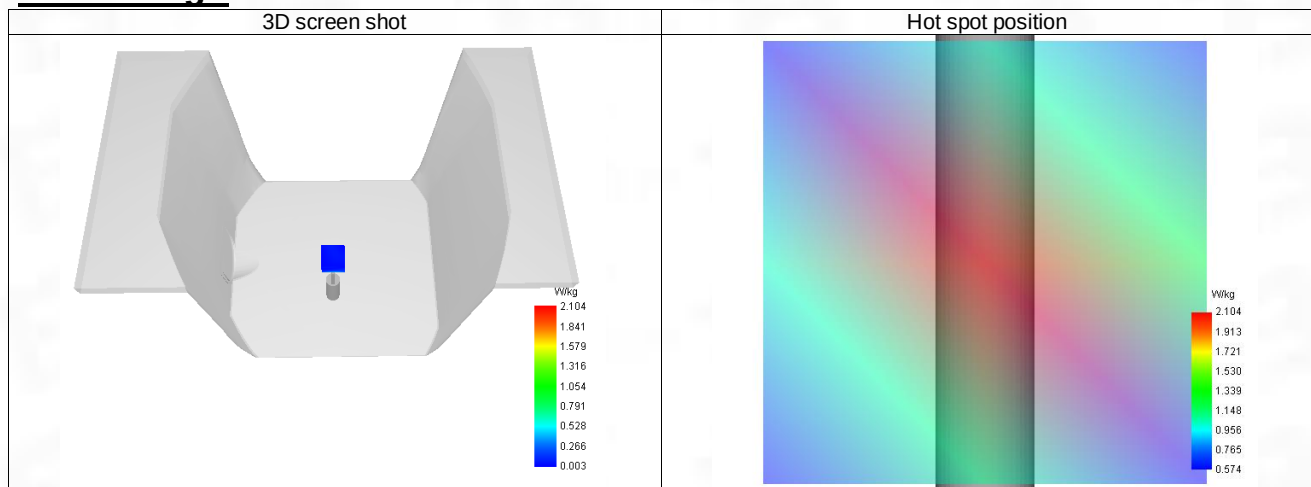



## System Performance Check Data (5800 MHz)

### System check at 5800 MHz

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                        |
|-----------------|----------------------------------------|
| Probe           | SN 04/22 EPG0365                       |
| ConvF           | 2.04                                   |
| Area Scan       | dx=8mm dy=8mm, Adaptive 1 max          |
| Zoom Scan       | 7x7x12, dx=4mm dy=4mm dz=5mm, Complete |
| Phantom         | Validation plane                       |
| Device Position | Dipole                                 |
| Band            | CW5800                                 |
| Channels        | Middle                                 |
| Signal          | CW                                     |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5800.000 |
| Relative permittivity (real part)      | 35.180   |
| Relative permittivity (imaginary part) | 16.480   |
| Conductivity (S/m)                     | 5.310    |

#### C. SAR Surface and Volume

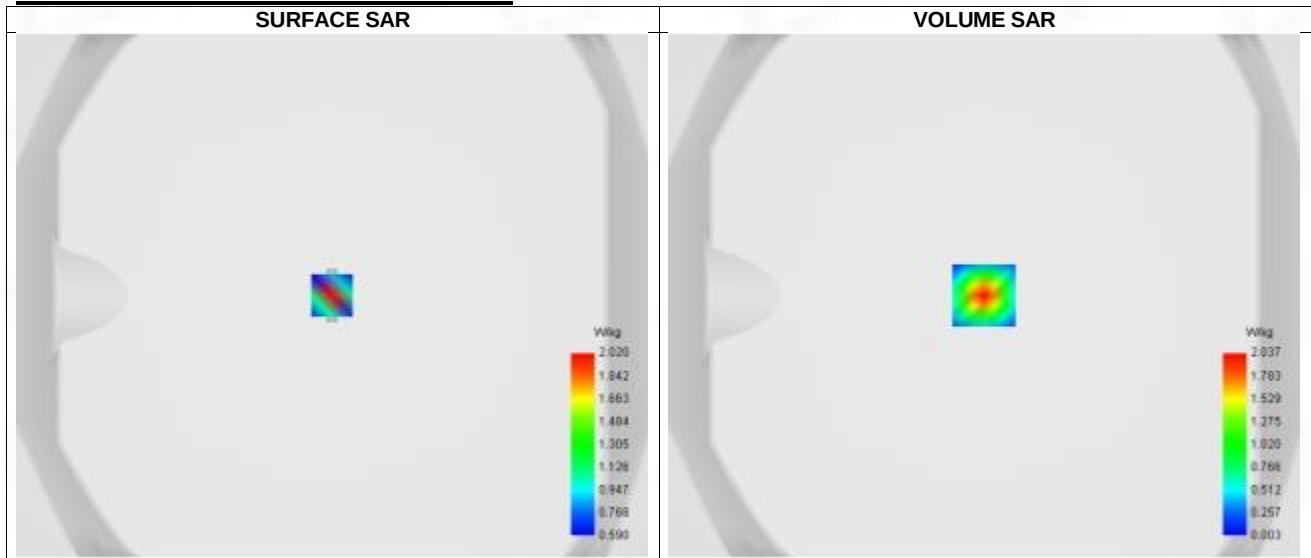


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 4.17 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.280    |
| SAR 1g (W/Kg)                                         | 1.023    |
| Variation (%)                                         | 0.490    |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 2.00  | 4.00  | 6.00  | 8.00  | 10.00 | 12.00 | 14.00 | 16.00 |
| SAR (W/Kg) | 3.948 | 2.037 | 0.915 | 0.361 | 0.135 | 0.055 | 0.033 | 0.037 | 0.059 |

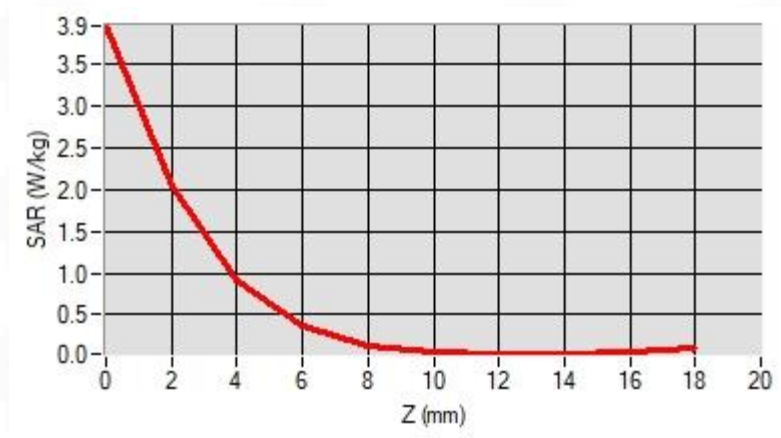

## F. 3D Image

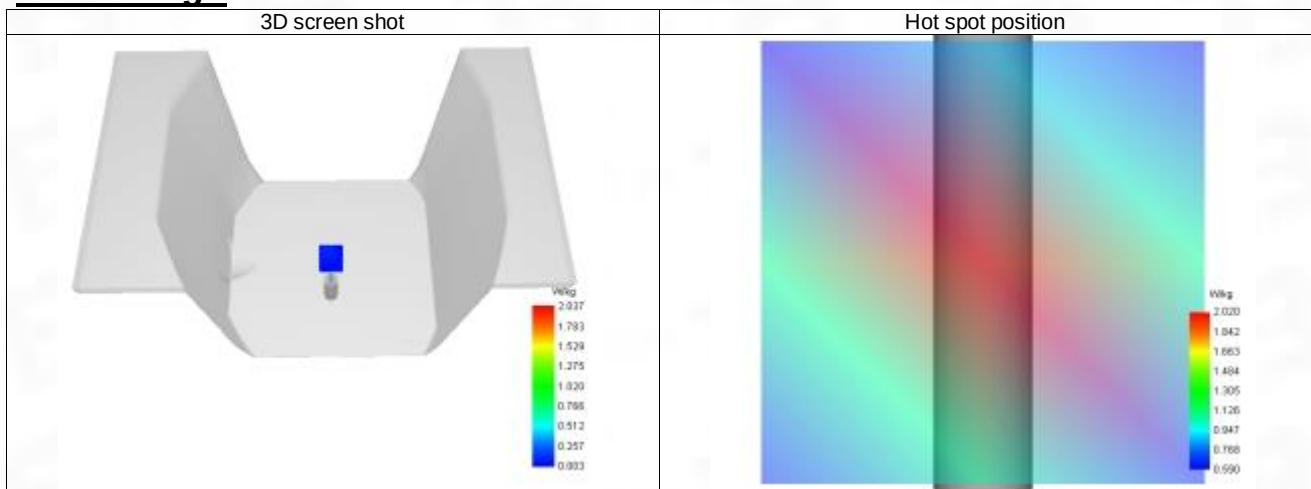

## ANNEX C Test Data

1-Body with back position in dist. 0mm on Channel 190 in GPRS850+4slots

### SAR Measurement at GPRS850 (Body, Validation Plane)

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.68                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | GPRS850                             |
| Channels        | Middle (190)                        |
| Signal          | TDMA (GPRS)                         |
| Modulation      | GMSK (CS-1)                         |
| TX-slots        | 4                                   |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 836.600 |
| Relative permittivity (real part)      | 41.408  |
| Relative permittivity (imaginary part) | 19.492  |
| Conductivity (S/m)                     | 0.871   |

#### C. SAR Surface and Volume

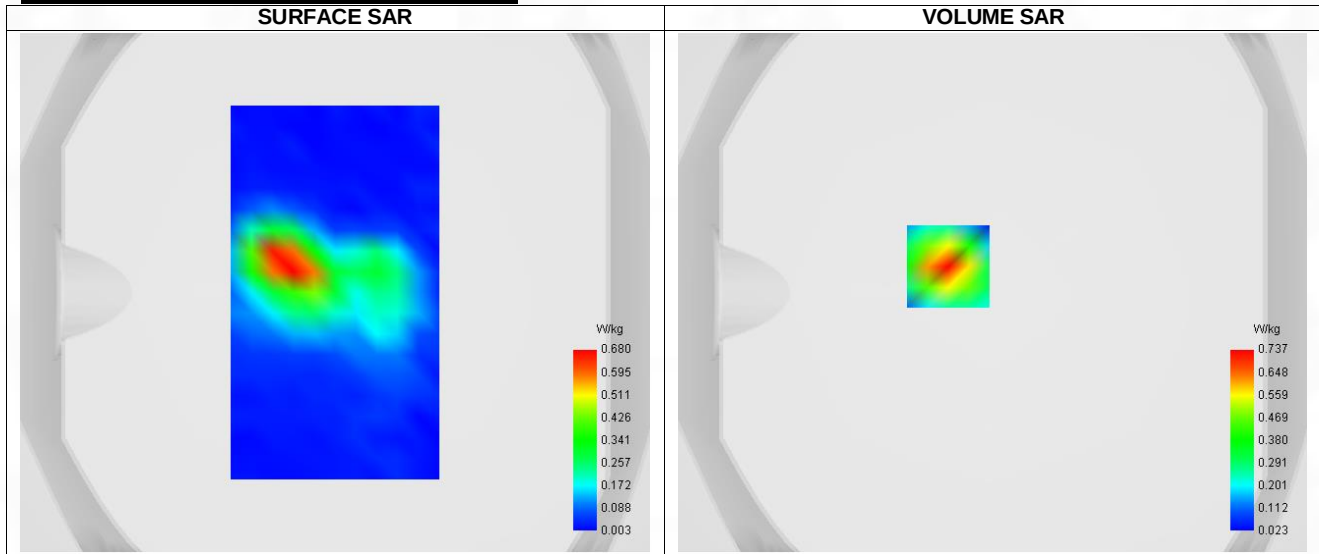


Maximum location: X=-17.00, Y=10.00 ; SAR Peak: 1.31 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.322    |
| SAR 1g (W/Kg)                                         | 0.680    |
| Variation (%)                                         | -3.770   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.317 | 0.737 | 0.339 | 0.161 | 0.091 |

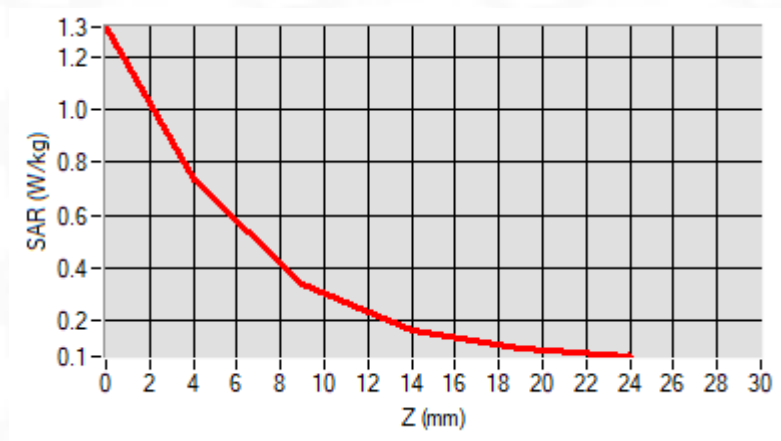

## F. 3D Image

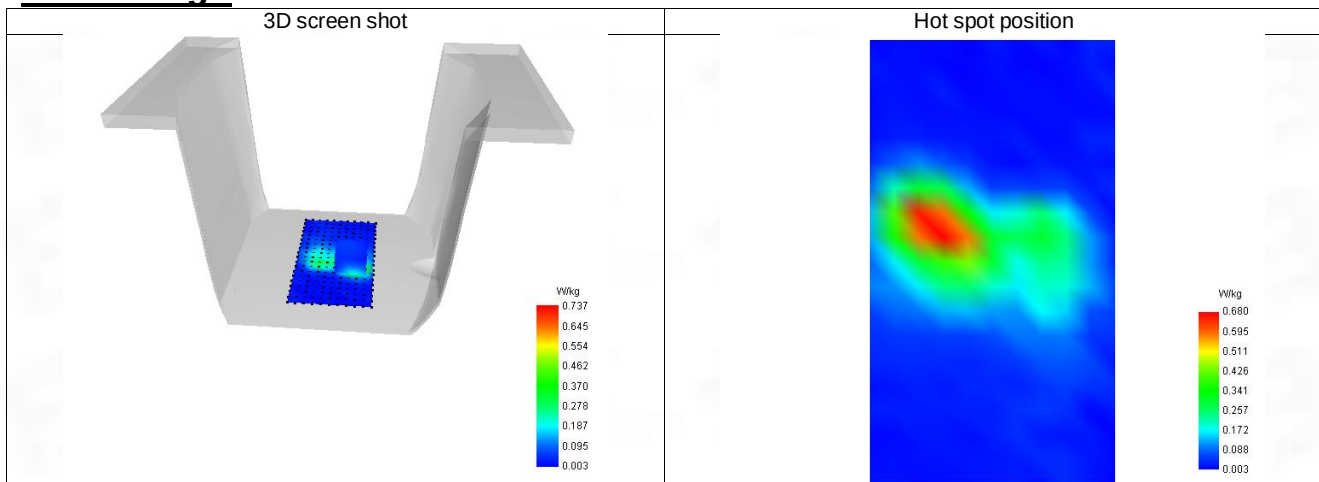

## 2-Body with back position in dist. 0mm on Channel 512 in GPRS1900+4slots

### SAR Measurement at GPRS1900 (Body, Validation Plane)

Date of measurement: 13/3/2022


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.24                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | GPRS1900                            |
| Channels        | Lower (512)                         |
| Signal          | TDMA (GPRS)                         |
| Modulation      | GMSK (CS-1)                         |
| TX-slots        | 4                                   |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 1850.200 |
| Relative permittivity (real part)      | 39.952   |
| Relative permittivity (imaginary part) | 13.308   |
| Conductivity (S/m)                     | 1.374    |

#### C. SAR Surface and Volume

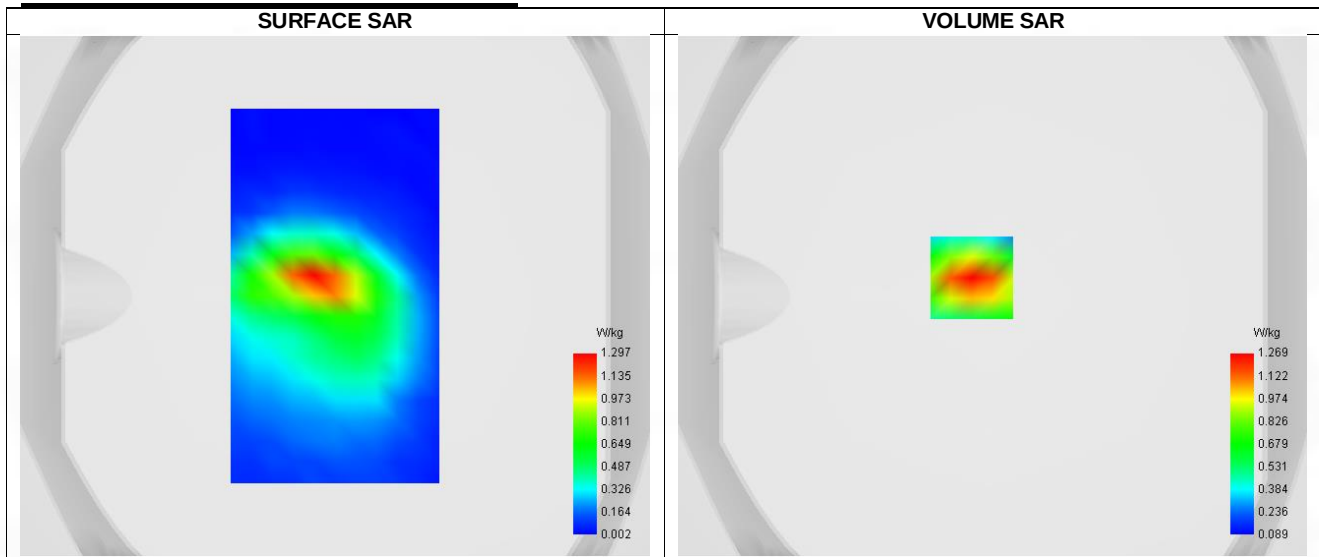


#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.284    |
| SAR 1g (W/Kg)                                         | 0.711    |
| Variation (%)                                         | -1.990   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.968 | 1.269 | 0.726 | 0.433 | 0.283 |

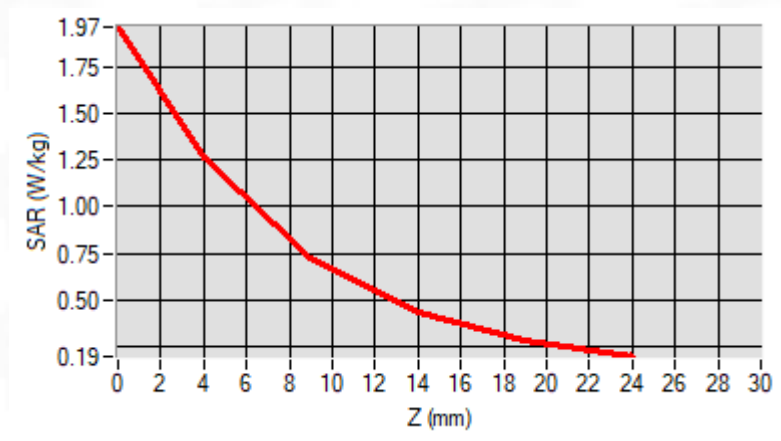

## F. 3D Image

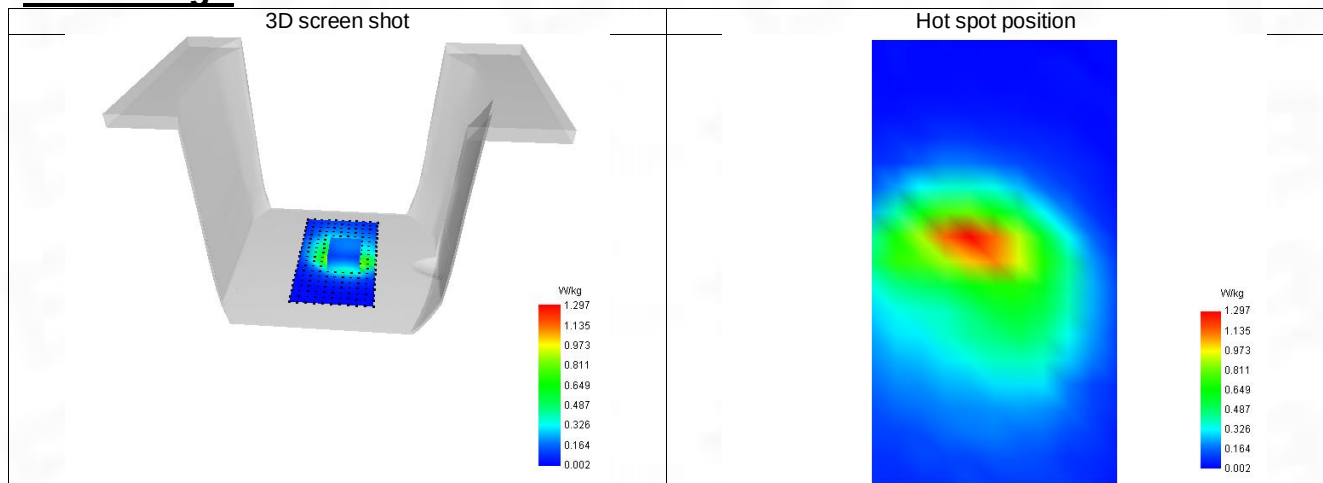

### 3-Body with back position in dist. 0mm on Channel 9262 in WCDMA Band 2

## SAR Measurement at Band 2 (1900) (Body, Validation Plane)

Date of measurement: 19/3/2023


### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.24                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | Band 2 (1900)                       |
| Channels        | Lower (9262)                        |
| Signal          | WCDMA                               |
| Mode            | Release 99                          |
| Connection Type | RMC, 12.2 kbps                      |

### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 1852.400 |
| Relative permittivity (real part)      | 39.949   |
| Relative permittivity (imaginary part) | 13.311   |
| Conductivity (S/m)                     | 1.375    |

### C. SAR Surface and Volume

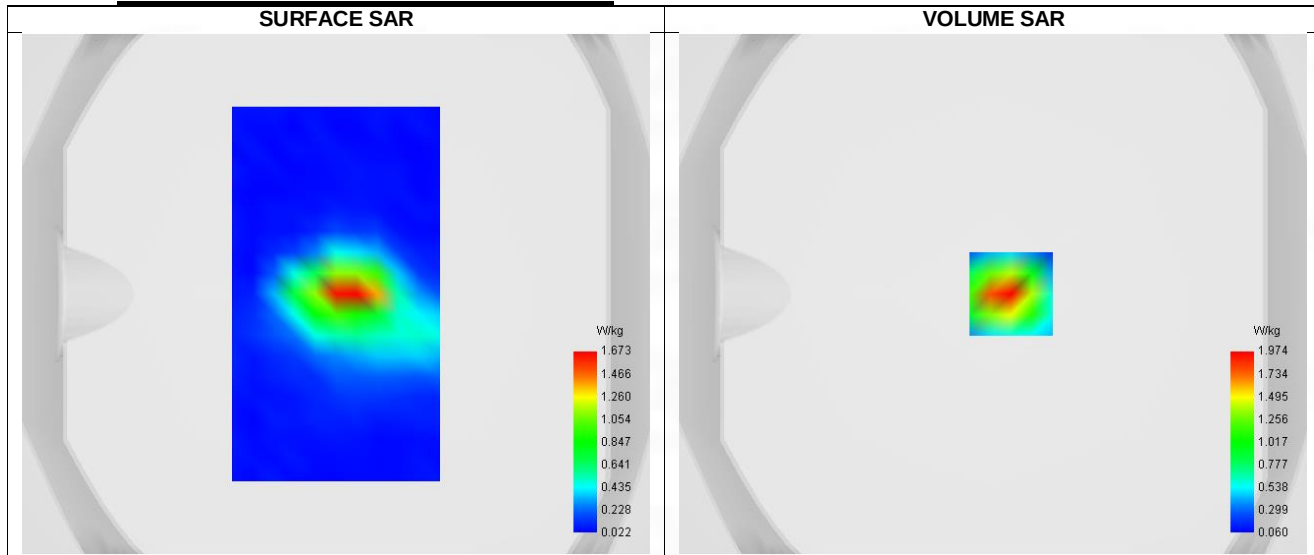


### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.236    |
| SAR 1g (W/Kg)                                         | 0.542    |
| Variation (%)                                         | 1.910    |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 3.687 | 1.974 | 0.844 | 0.375 | 0.211 |



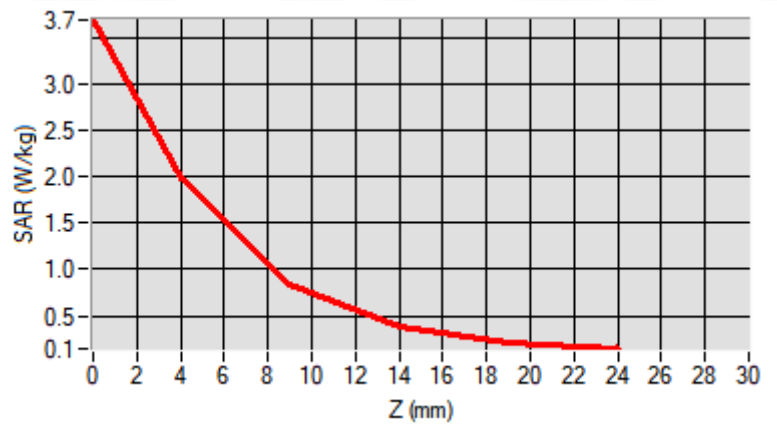

## F. 3D Image

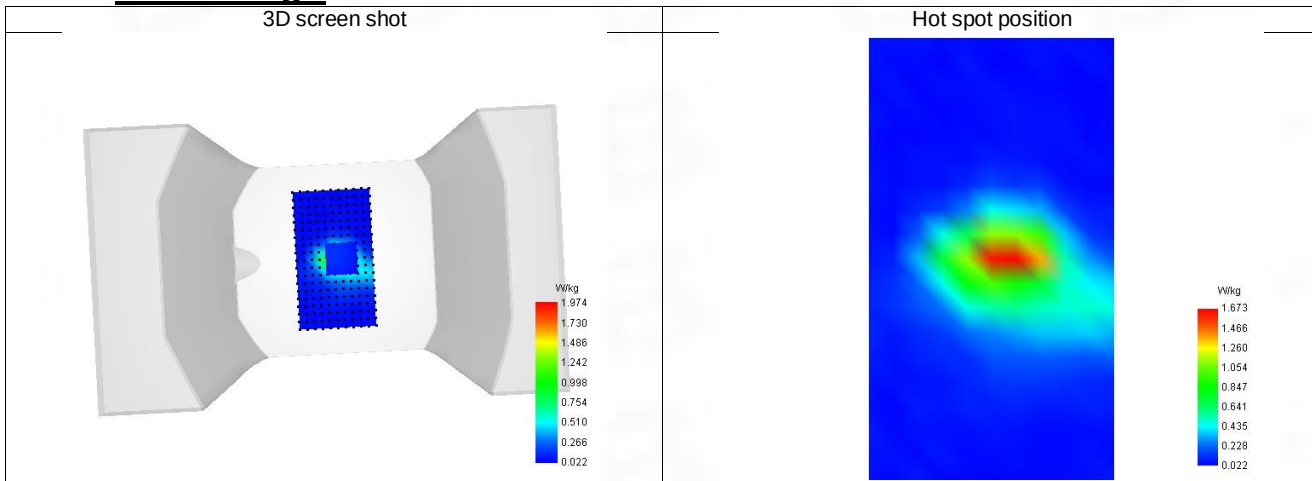

## 4-Body with back position in dist. 0mm on Channel 4233 in WCDMA Band 5

### SAR Measurement at Band 5 (850) (Body, Validation Plane)

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.68                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | Band 5 (850)                        |
| Channels        | Higher (4233)                       |
| Signal          | WCDMA                               |
| Mode            | Release 99                          |
| Connection Type | RMC, 12.2 kbps                      |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 846.600 |
| Relative permittivity (real part)      | 41.392  |
| Relative permittivity (imaginary part) | 19.508  |
| Conductivity (S/m)                     | 0.876   |

#### C. SAR Surface and Volume

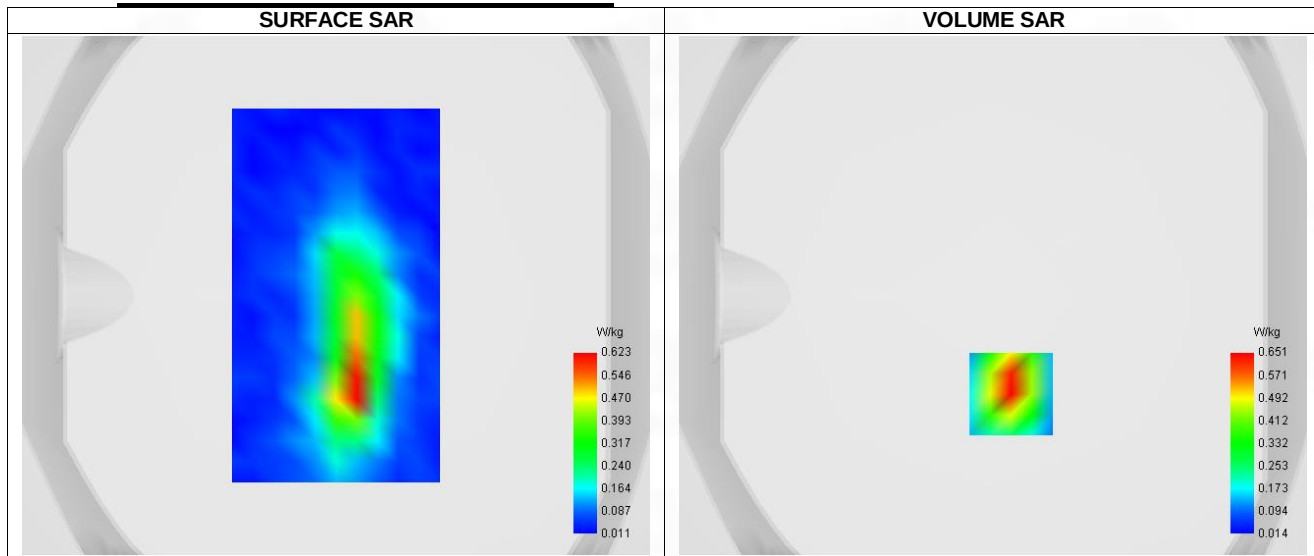

#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.198    |
| SAR 1g (W/Kg)                                         | 0.435    |
| Variation (%)                                         | -3.920   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.190 | 0.651 | 0.290 | 0.137 | 0.082 |


Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

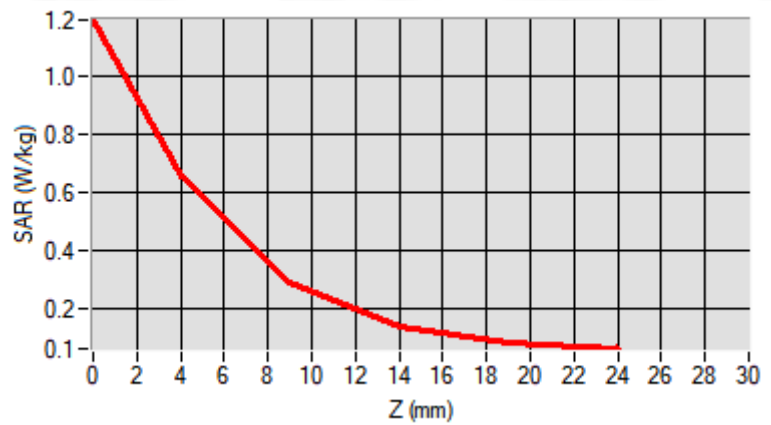

## F. 3D Image

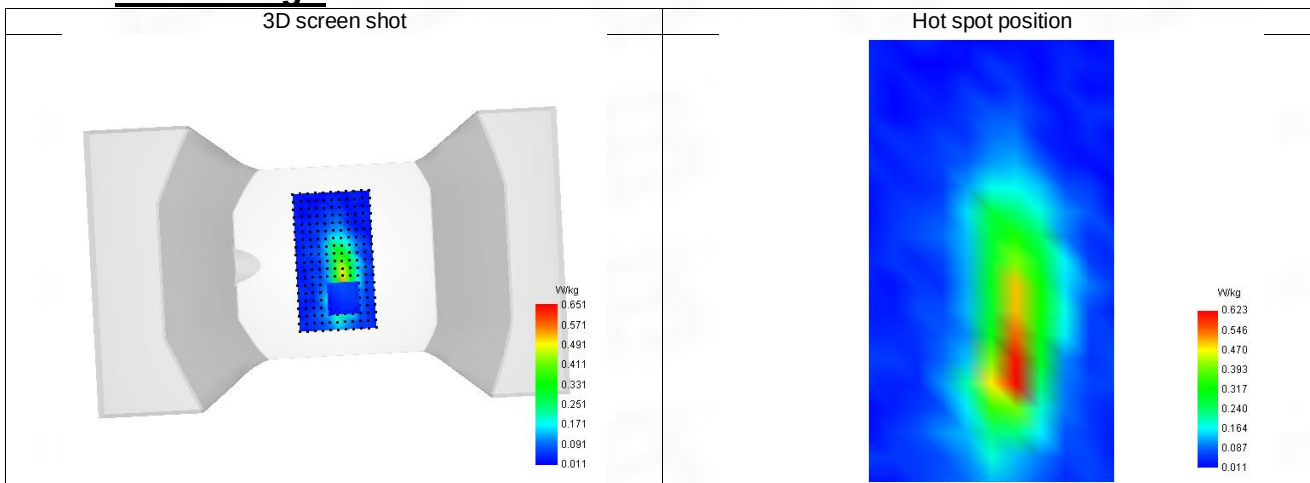

## 5-Body with back position in dist. 0mm on Channel 1 in IEEE 802.11b ISM

### SAR Measurement at IEEE 802.11b ISM (Body, Validation Plane)

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.36                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | IEEE 802.11b ISM                    |
| Channels        | Lower (1)                           |
| Signal          | IEEE 802.11                         |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 2412.000 |
| Relative permittivity (real part)      | 39.131   |
| Relative permittivity (imaginary part) | 13.505   |
| Conductivity (S/m)                     | 1.769    |

#### C. SAR Surface and Volume

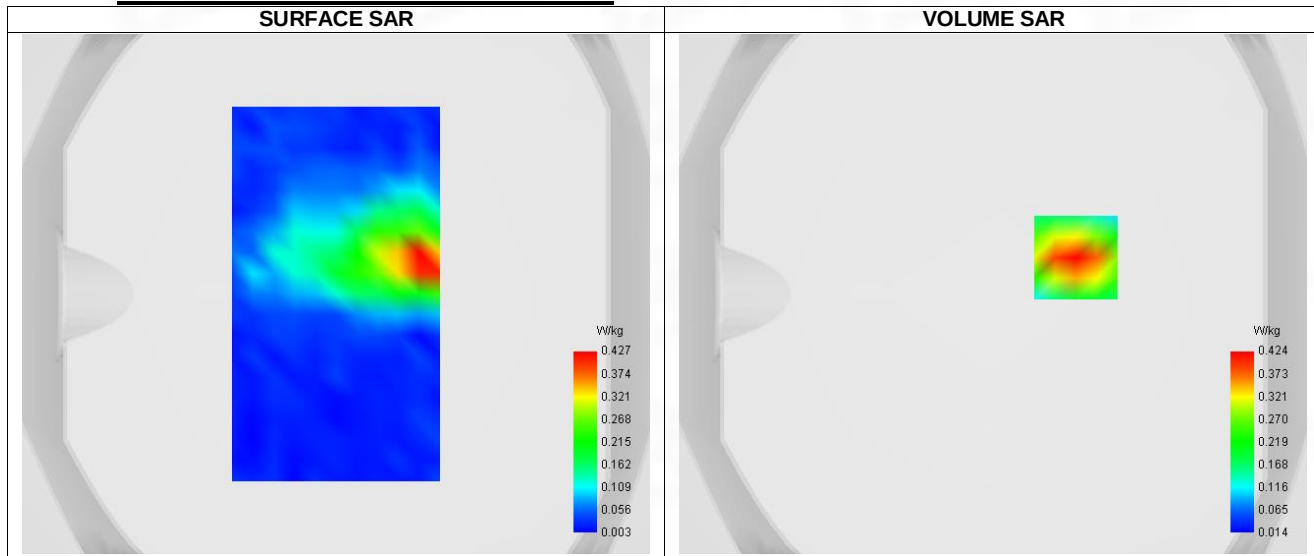


Maximum location: X=32.00, Y=14.00 ; SAR Peak: 0.71 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.208    |
| SAR 1g (W/Kg)                                         | 0.397    |
| Variation (%)                                         | -1.550   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.701 | 0.424 | 0.220 | 0.117 | 0.070 |

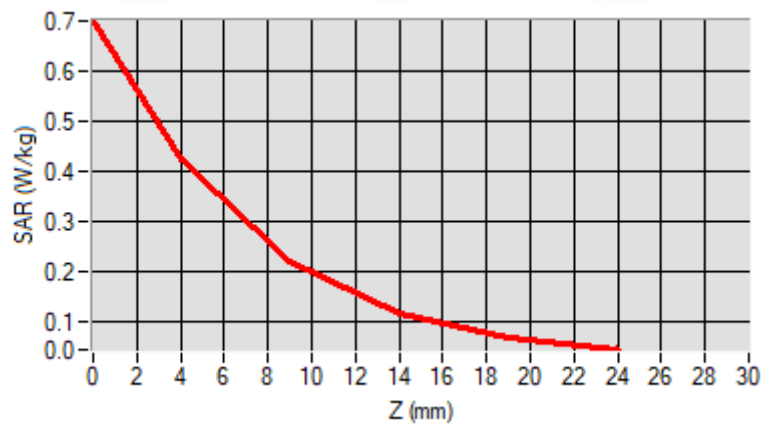

## F. 3D Image

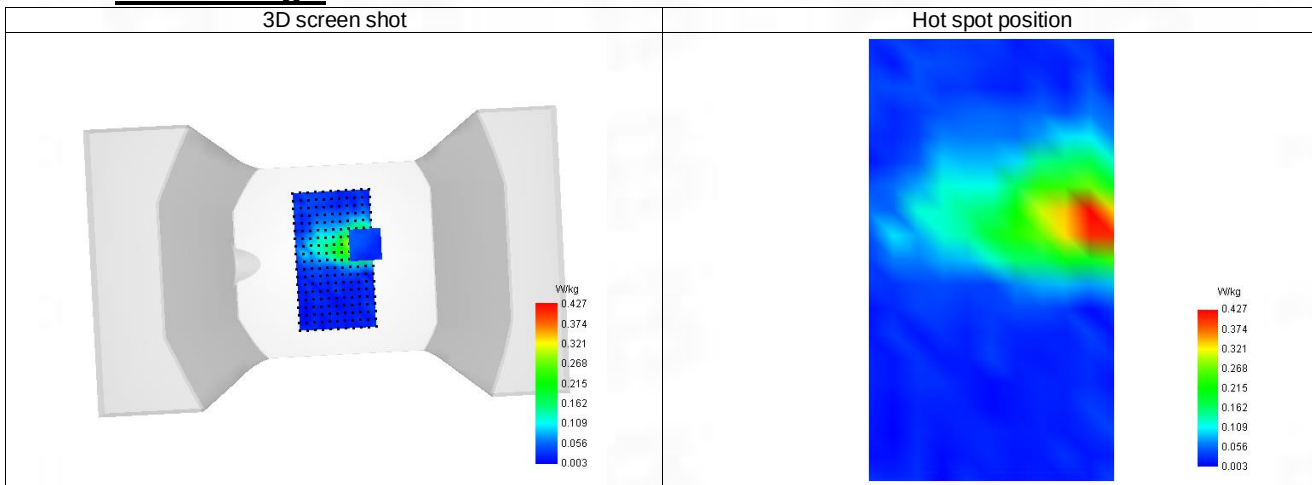

## 6-Body with top position in dist. 0mm on Channel 42 in IEEE 802.11ac U-NII

### SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.24                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | IEEE 802.11ac U-NII                 |
| Channels        | Middle (42)                         |
| Signal          | IEEE 802.11                         |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5210.000 |
| Relative permittivity (real part)      | 35.870   |
| Relative permittivity (imaginary part) | 16.260   |
| Conductivity (S/m)                     | 4.710    |

#### C. SAR Surface and Volume

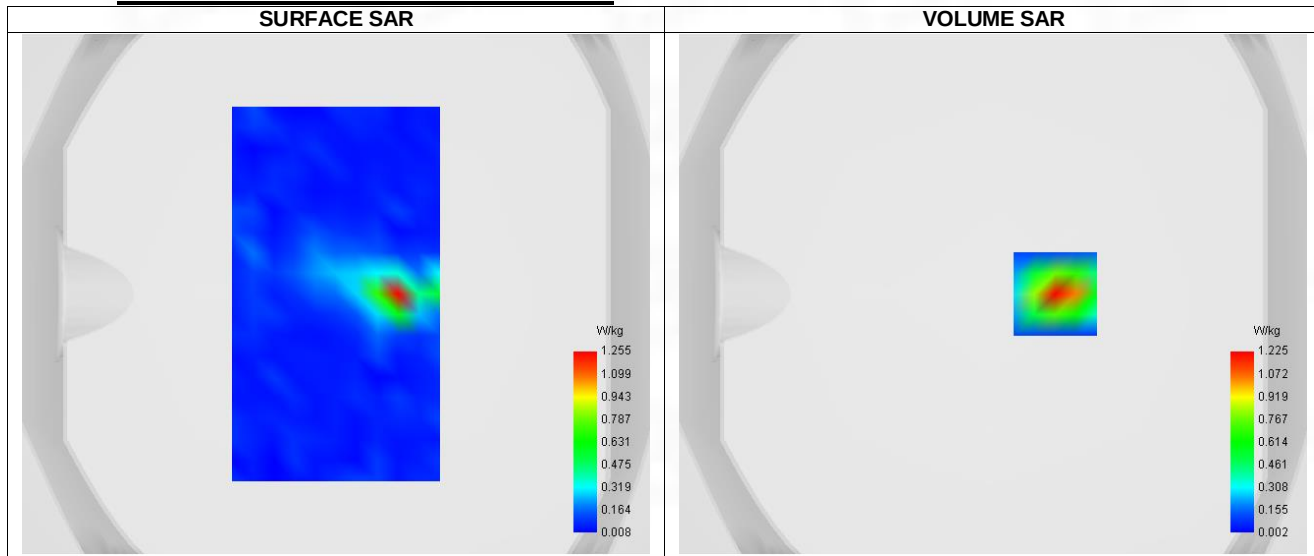


Maximum location: X=24.00, Y=0.00 ; SAR Peak: 2.10 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.273    |
| SAR 1g (W/Kg)                                         | 0.707    |
| Variation (%)                                         | 1.240    |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 2.00  | 7.00  | 12.00 | 17.00 |
| SAR (W/Kg) | 2.005 | 1.225 | 0.267 | 0.045 | 0.022 |

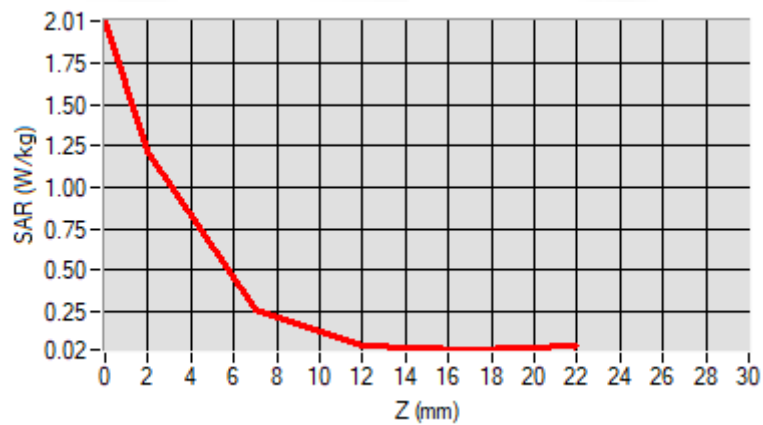

## F. 3D Image

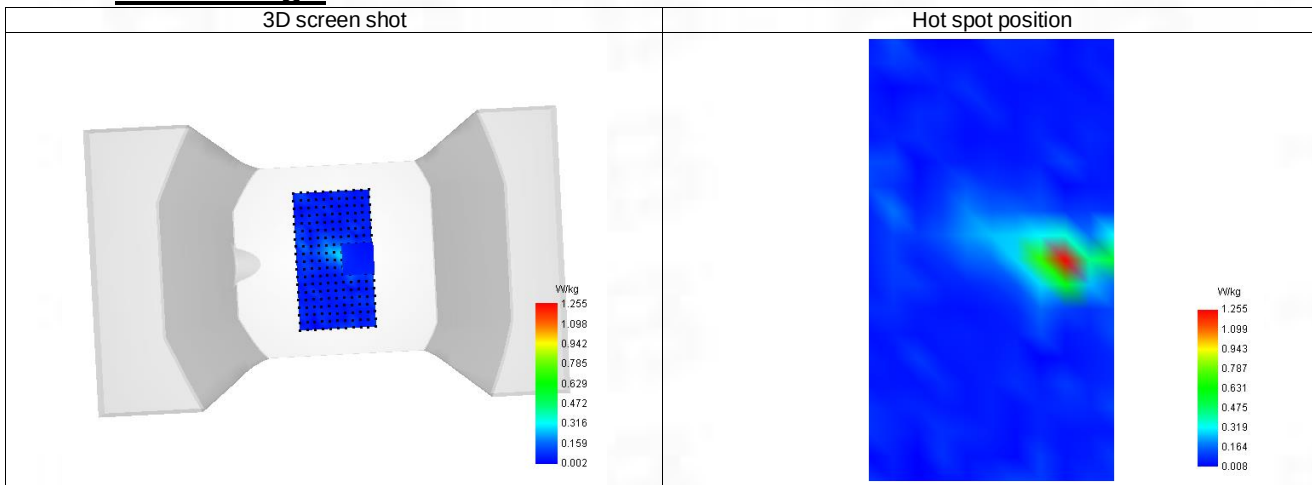



## 7-Body with top position in dist. 0mm on Channel 58 in IEEE 802.11ac U-NII

### SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.12                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | IEEE 802.11ac U-NII                 |
| Channels        | Middle (58)                         |
| Signal          | IEEE 802.11                         |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5290.000 |
| Relative permittivity (real part)      | 35.790   |
| Relative permittivity (imaginary part) | 16.340   |
| Conductivity (S/m)                     | 4.790    |

#### C. SAR Surface and Volume

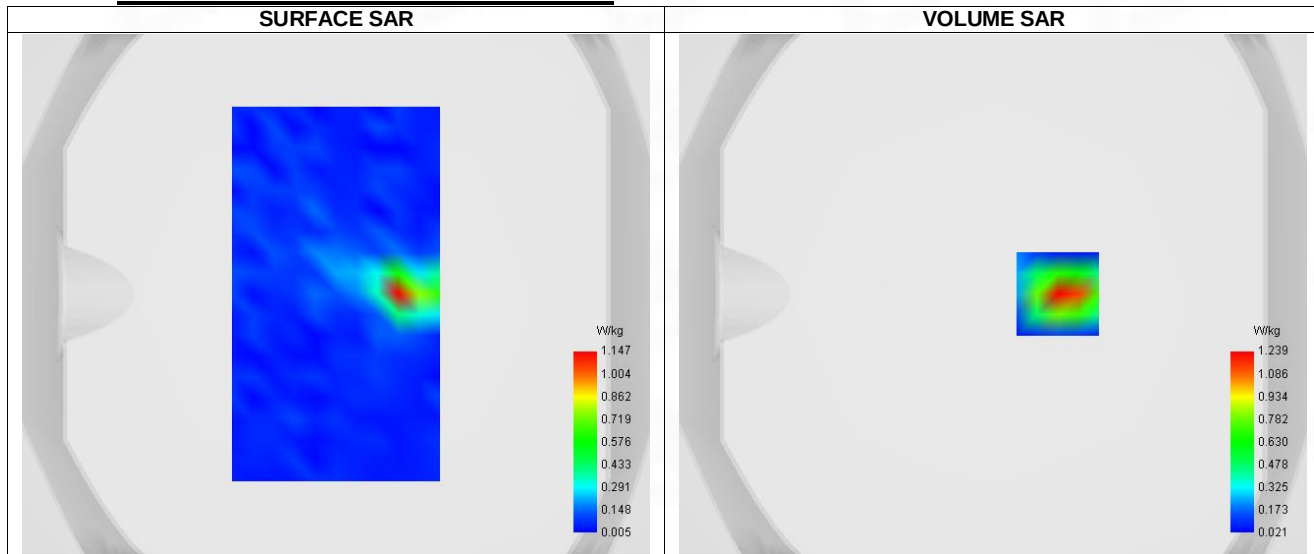


Maximum location: X=25.00, Y=0.00 ; SAR Peak: 2.13 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.277    |
| SAR 1g (W/Kg)                                         | 0.724    |
| Variation (%)                                         | -1.220   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 2.00  | 7.00  | 12.00 | 17.00 |
| SAR (W/Kg) | 1.989 | 1.239 | 0.295 | 0.057 | 0.026 |

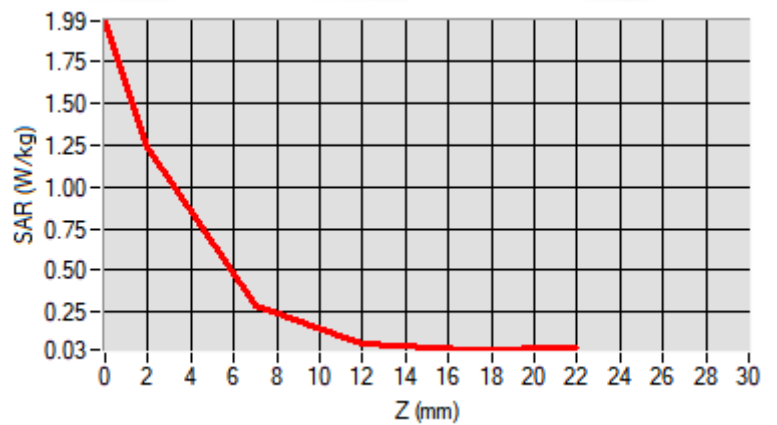

## F. 3D Image

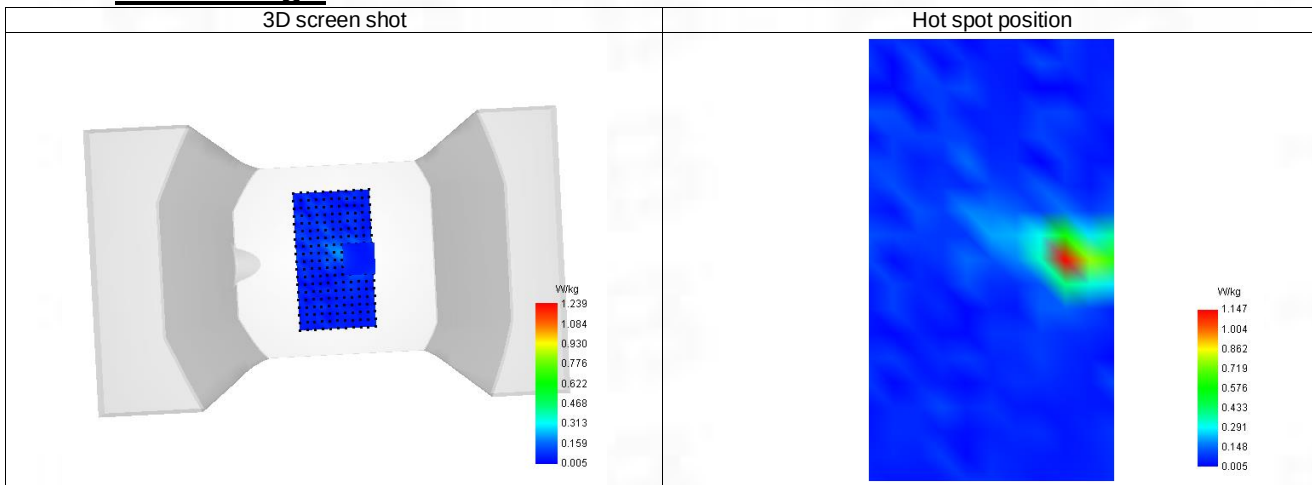

## 8-Body with top position in dist. 0mm on Channel 134 in IEEE 802.11ac U-NII

### SAR Measurement at IEEE 802.11ac U-NII (Body, Validation Plane)

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.18                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | IEEE 802.11ac U-NII                 |
| Channels        | Higher (134)                        |
| Signal          | IEEE 802.11                         |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5670.000 |
| Relative permittivity (real part)      | 35.310   |
| Relative permittivity (imaginary part) | 16.490   |
| Conductivity (S/m)                     | 5.180    |

#### C. SAR Surface and Volume

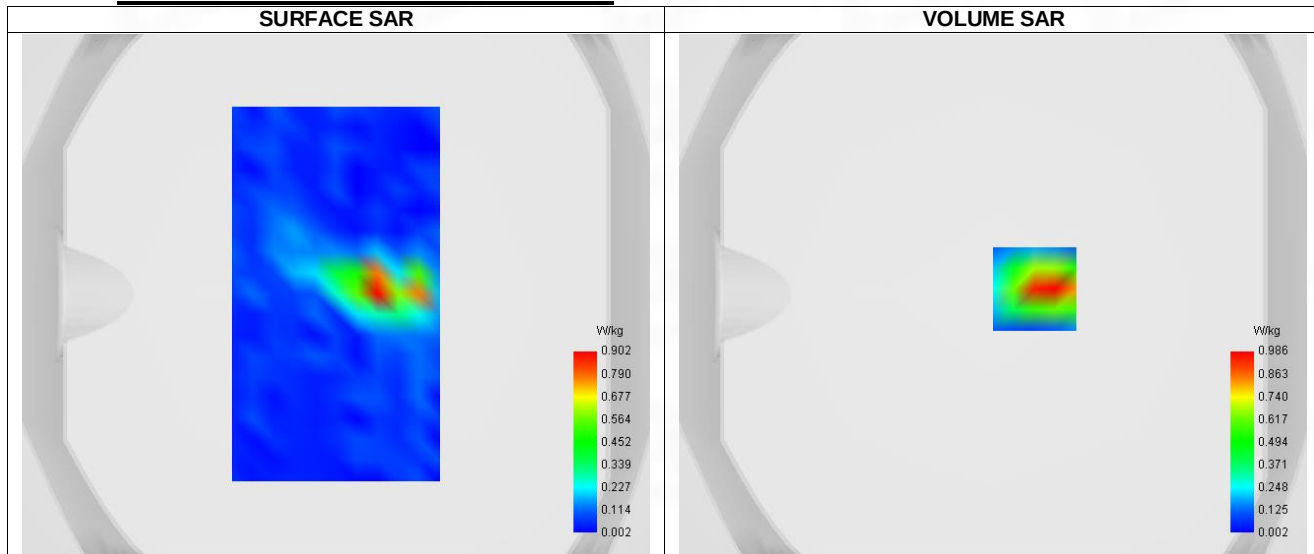


#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.248    |
| SAR 1g (W/Kg)                                         | 0.599    |
| Variation (%)                                         | -1.440   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 2.00  | 7.00  | 12.00 | 17.00 |
| SAR (W/Kg) | 1.629 | 0.986 | 0.210 | 0.047 | 0.042 |

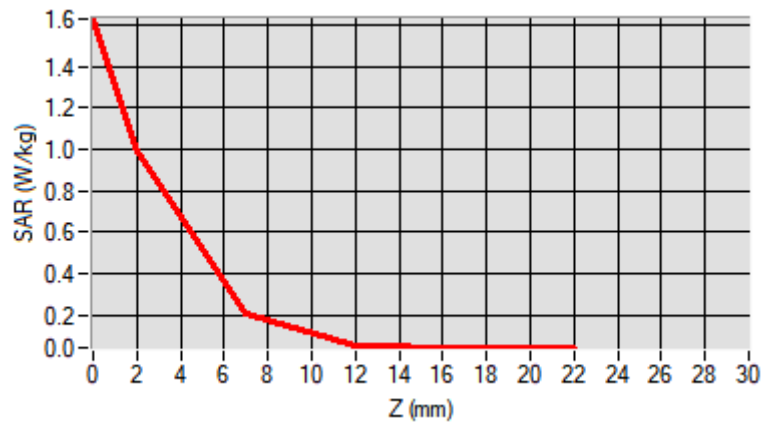

## F. 3D Image

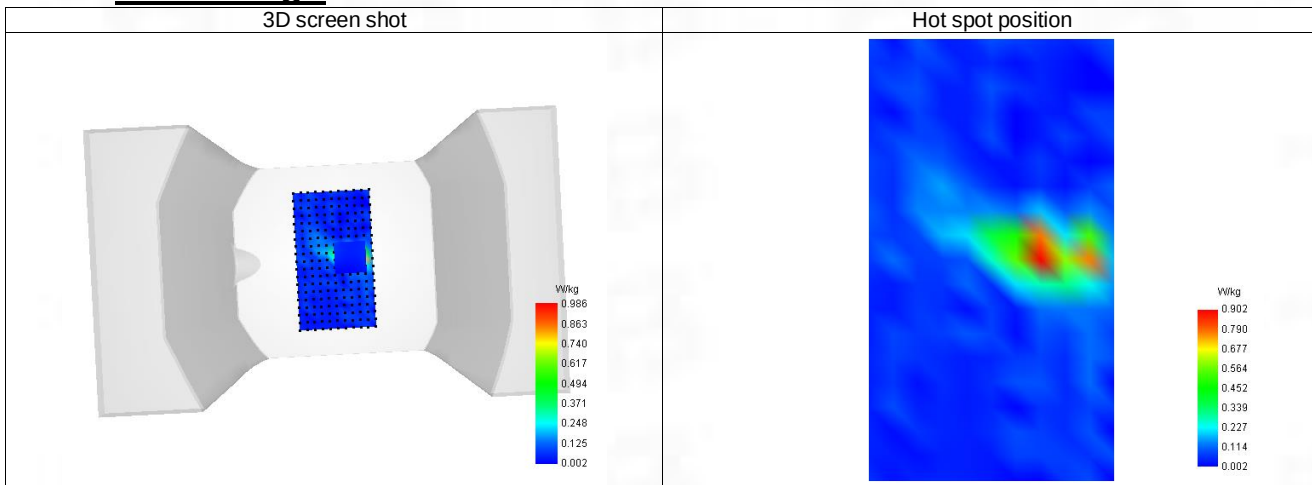

## 9-Body with top position in dist. 0mm on Channel 159 in IEEE 802.11n U-NII

### SAR Measurement at IEEE 802.11n U-NII (Body, Validation Plane)

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.04                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | IEEE 802.11n U-NII                  |
| Channels        | Higher (159)                        |
| Signal          | IEEE 802.11                         |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 5795.000 |
| Relative permittivity (real part)      | 35.185   |
| Relative permittivity (imaginary part) | 16.615   |
| Conductivity (S/m)                     | 5.305    |

#### C. SAR Surface and Volume

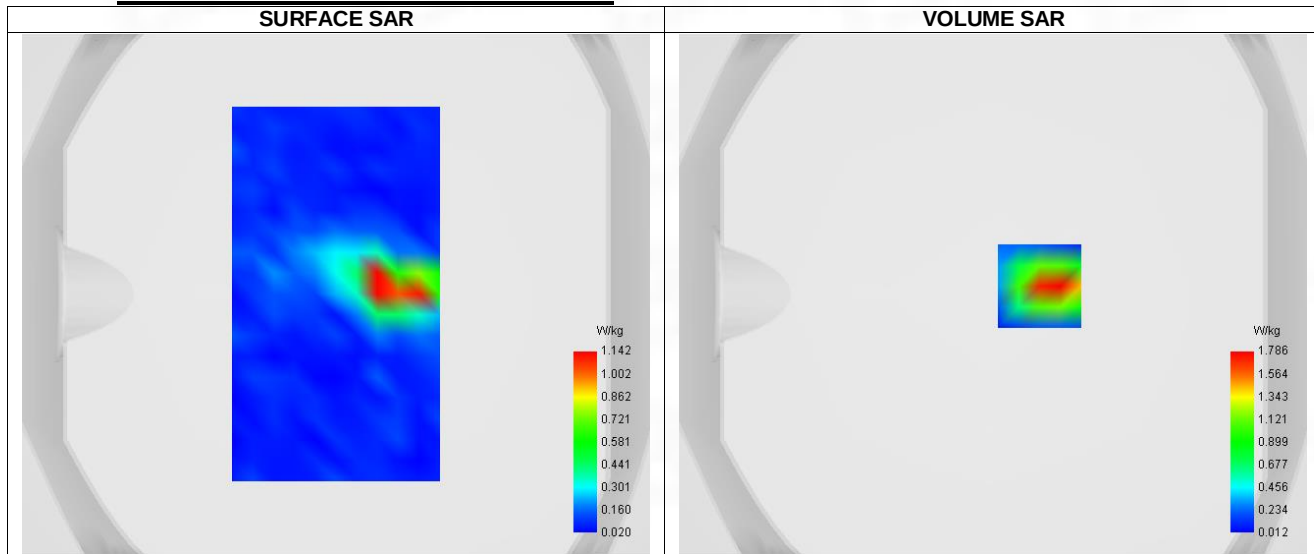


Maximum location: X=18.00, Y=3.00 ; SAR Peak: 2.17 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.222    |
| SAR 1g (W/Kg)                                         | 0.501    |
| Variation (%)                                         | 2.110    |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 2.00  | 7.00  | 12.00 | 17.00 |
| SAR (W/Kg) | 3.255 | 1.786 | 0.256 | 0.066 | 0.039 |

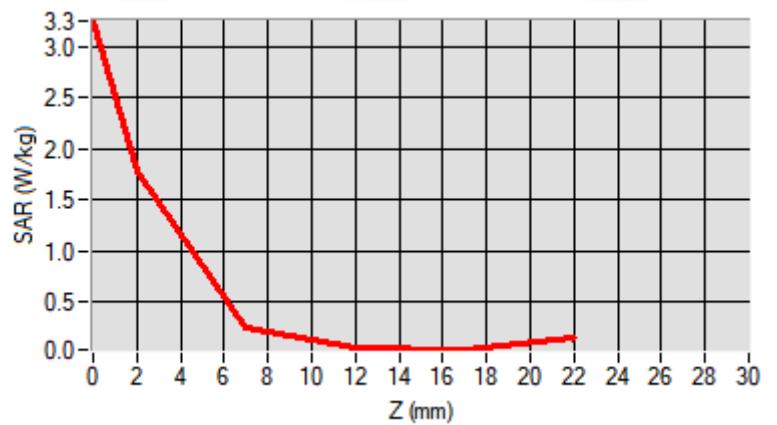

## F. 3D Image

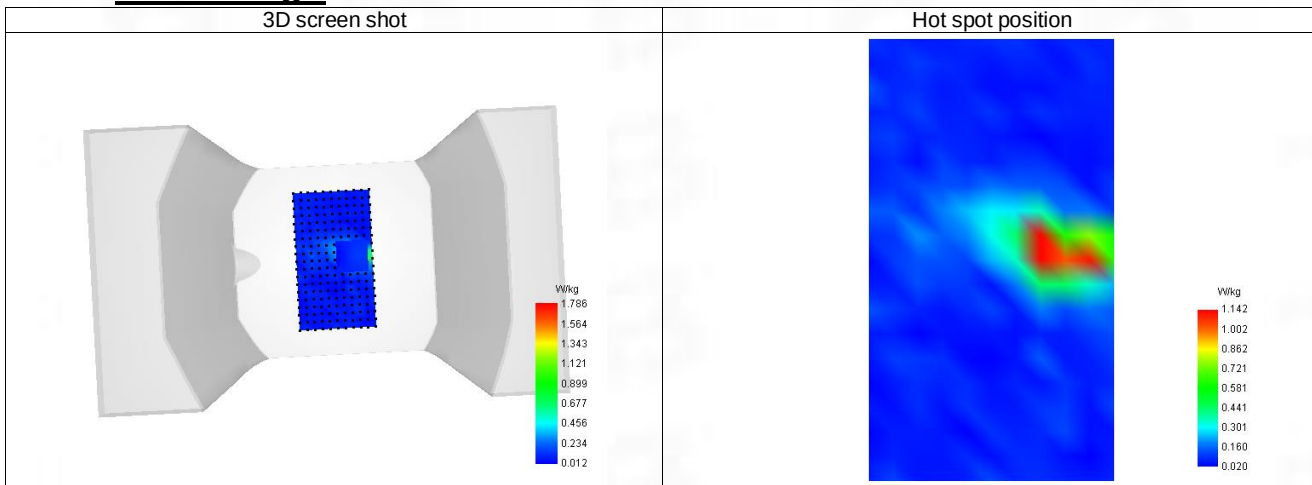

## 10-Body with back position in dist. 0mm on Channel 78 in Bluetooth

### SAR Measurement at Bluetooth (Body, Validation Plane)

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.36                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | Bluetooth                           |
| Channels        | Higher (78)                         |
| Signal          | Bluetooth                           |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 2480.000 |
| Relative permittivity (real part)      | 39.040   |
| Relative permittivity (imaginary part) | 13.210   |
| Conductivity (S/m)                     | 1.842    |

#### C. SAR Surface and Volume

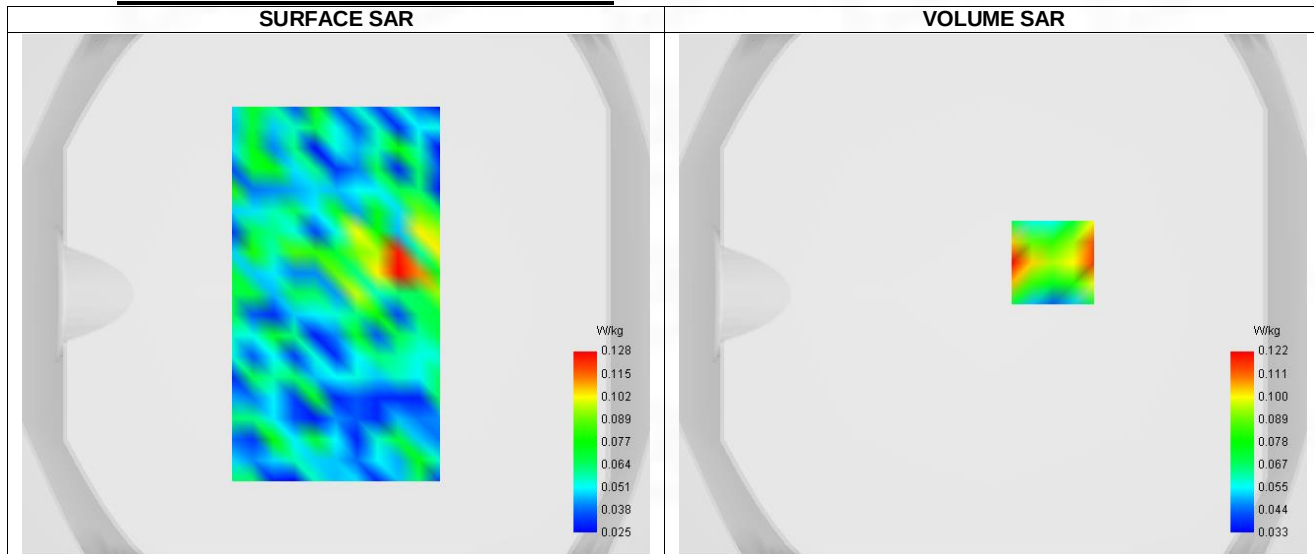

Maximum location: X=23.00, Y=12.00 ; SAR Peak: 0.21 W/kg


#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.074    |
| SAR 1g (W/Kg)                                         | 0.108    |
| Variation (%)                                         | -1.970   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.355 | 0.122 | 0.061 | 0.056 | 0.033 |



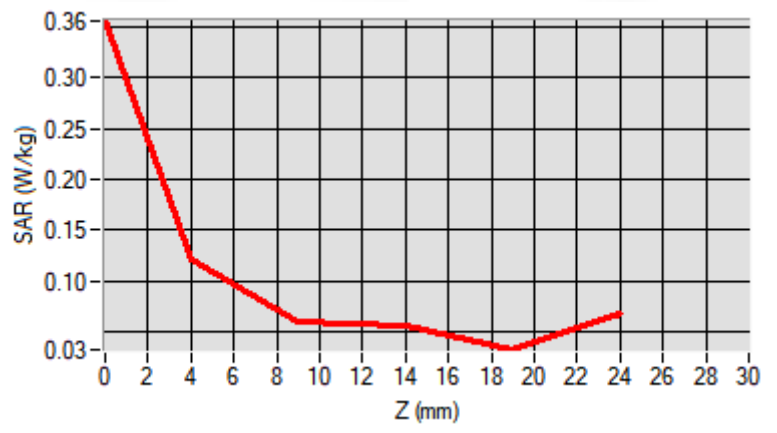

## F. 3D Image

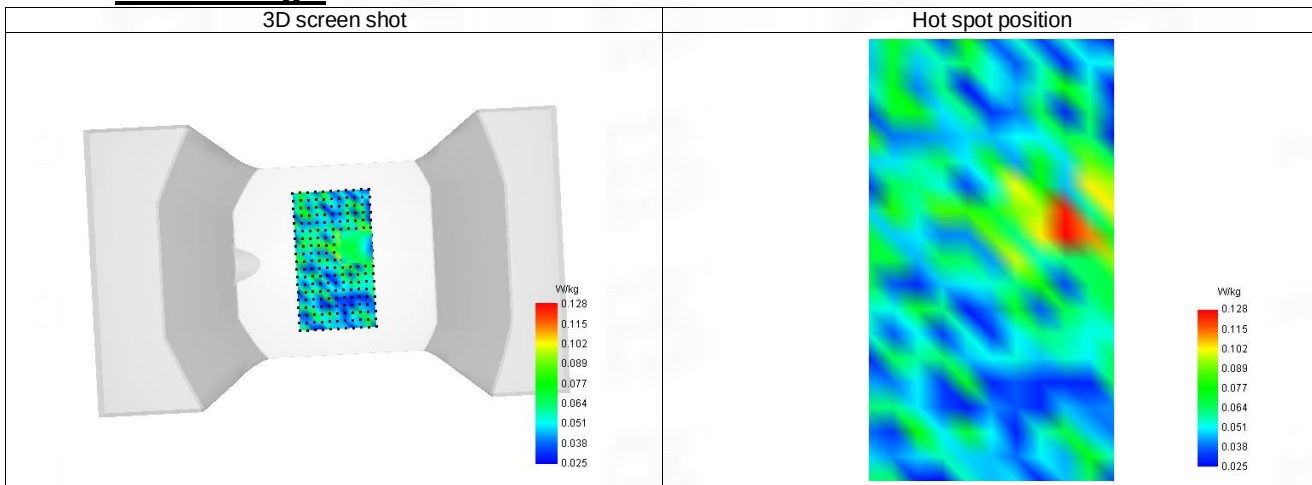

## 11-Body with back position in dist. 0mm on Channel 18700 in LTE band 2

### SAR Measurement at LTE band 2 (Body, Validation Plane)

Date of measurement: 19/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.24                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 2                          |
| Channels        | Lower (18700)                       |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 20 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 50                                  |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 1860.000 |
| Relative permittivity (real part)      | 39.938   |
| Relative permittivity (imaginary part) | 13.322   |
| Conductivity (S/m)                     | 1.381    |

#### C. SAR Surface and Volume

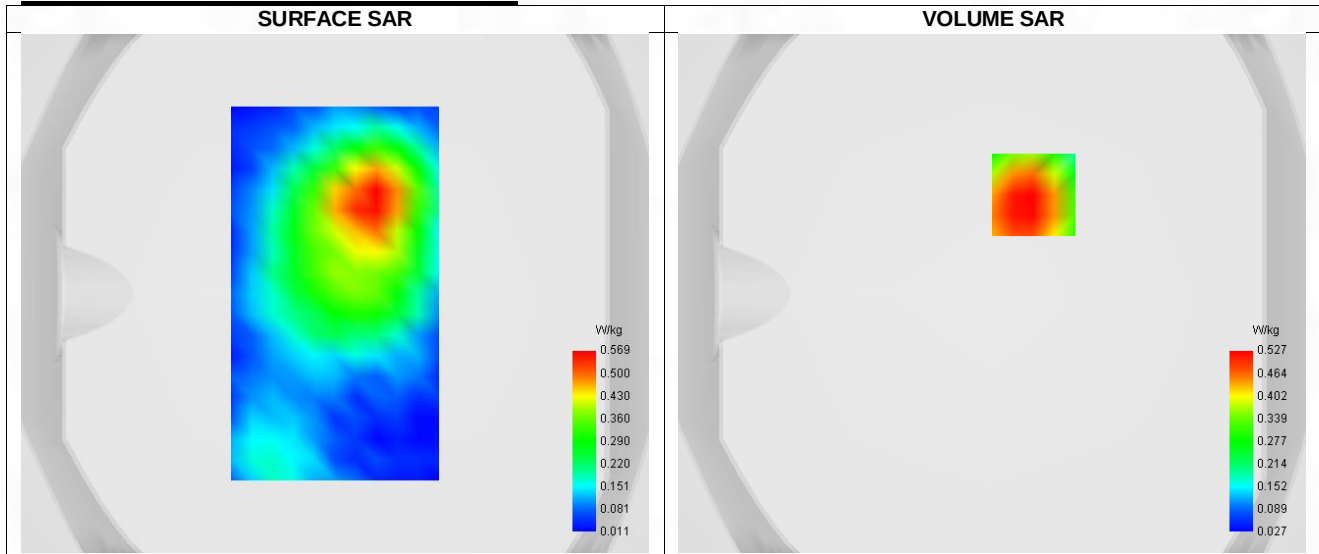


#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.322    |
| SAR 1g (W/Kg)                                         | 0.511    |
| Variation (%)                                         | -1.220   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.743 | 0.527 | 0.339 | 0.221 | 0.148 |

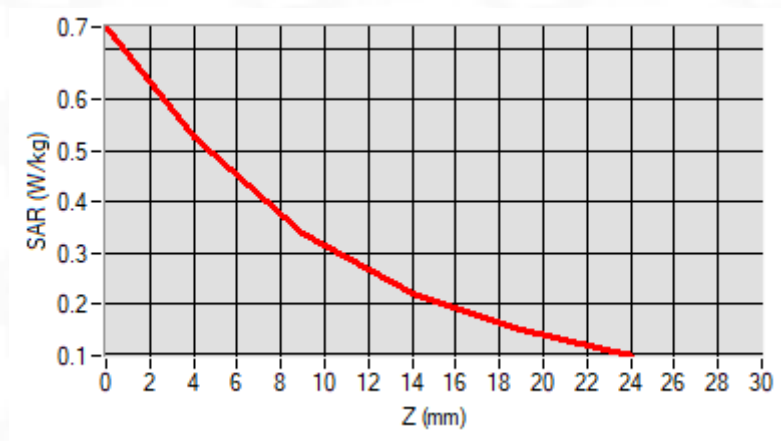

## F. 3D Image

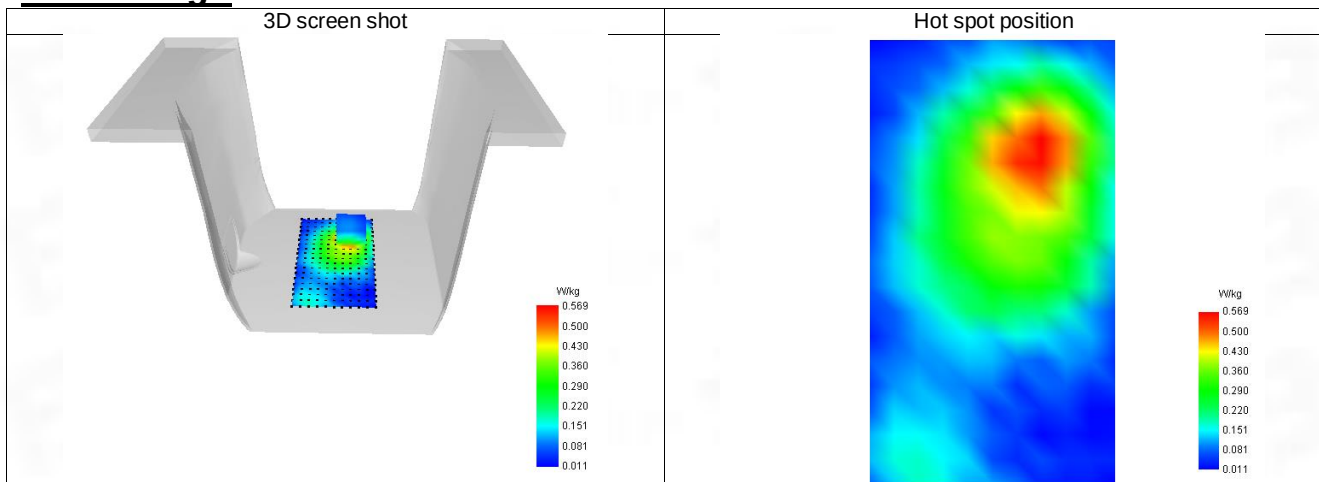

## 12-Body with back position in dist. 0mm on Channel 20175 in LTE band 4

### SAR Measurement at LTE band 4 (Body, Validation Plane)

Date of measurement: 19/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.96                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 4                          |
| Channels        | Middle (20175)                      |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 20 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 50                                  |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 1732.500 |
| Relative permittivity (real part)      | 40.015   |
| Relative permittivity (imaginary part) | 13.985   |
| Conductivity (S/m)                     | 1.335    |

#### C. SAR Surface and Volume

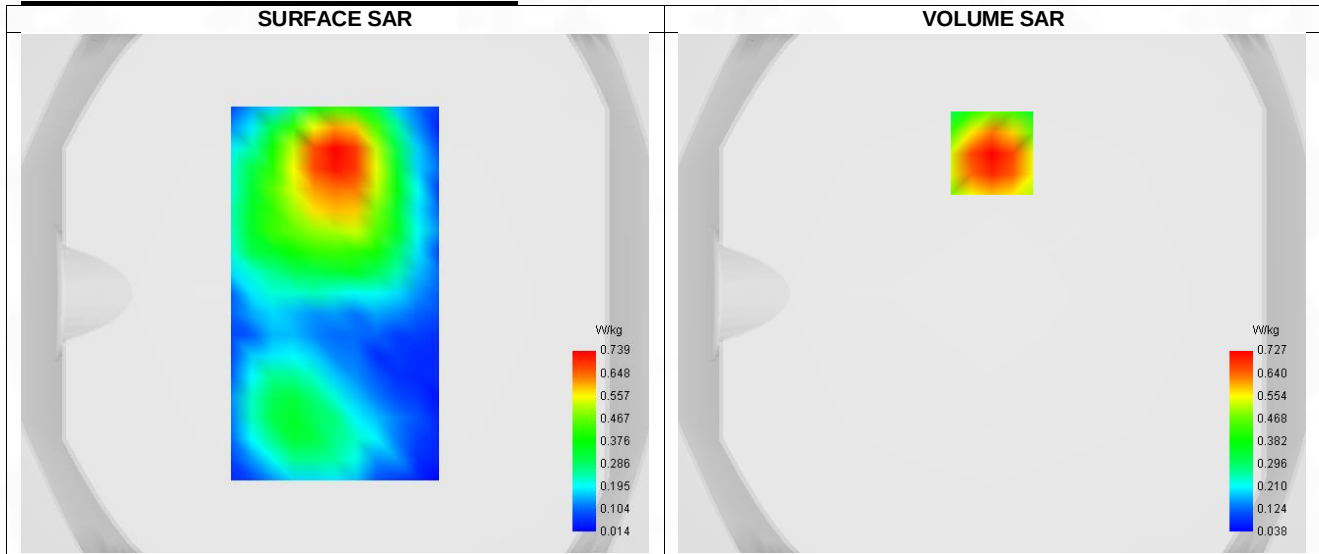


#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.428    |
| SAR 1g (W/Kg)                                         | 0.694    |
| Variation (%)                                         | -4.350   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.072 | 0.727 | 0.443 | 0.277 | 0.182 |

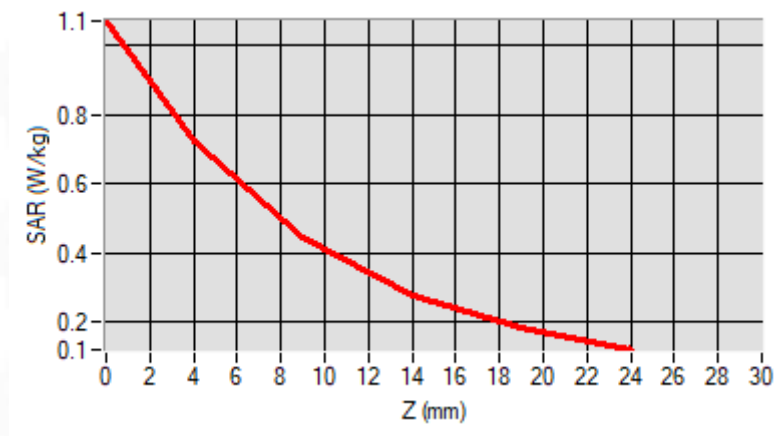

### F. 3D Image

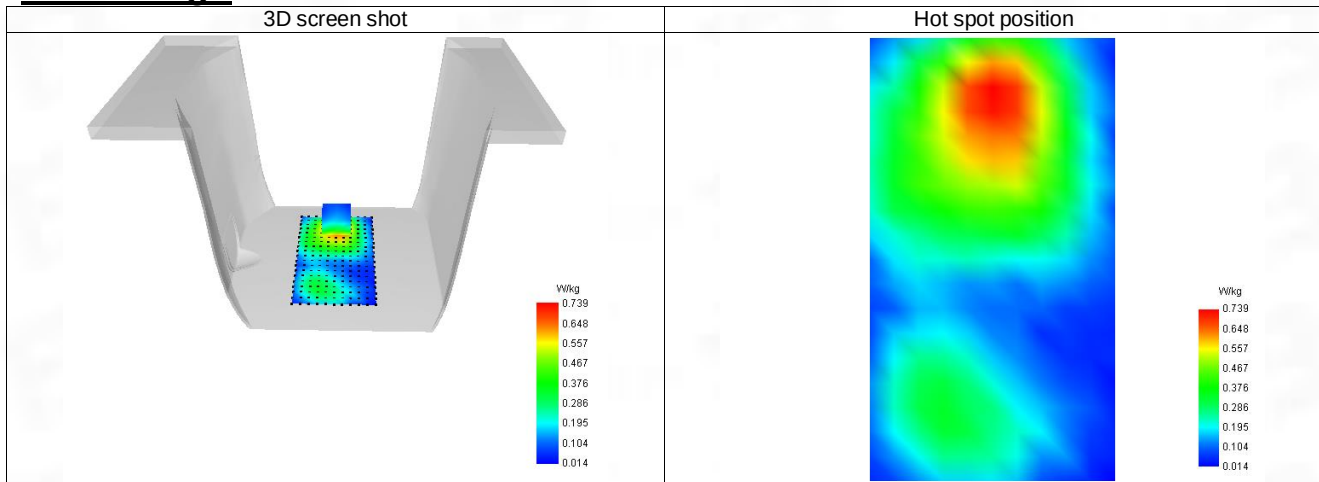

## 13-Body with back position in dist. 0mm on Channel 20450 in LTE band 5

### SAR Measurement at LTE band 5 (Body, Validation Plane)

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.68                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 5                          |
| Channels        | Lower (20450)                       |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 10 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 0                                   |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 829.000 |
| Relative permittivity (real part)      | 41.419  |
| Relative permittivity (imaginary part) | 19.481  |
| Conductivity (S/m)                     | 0.867   |

#### C. SAR Surface and Volume

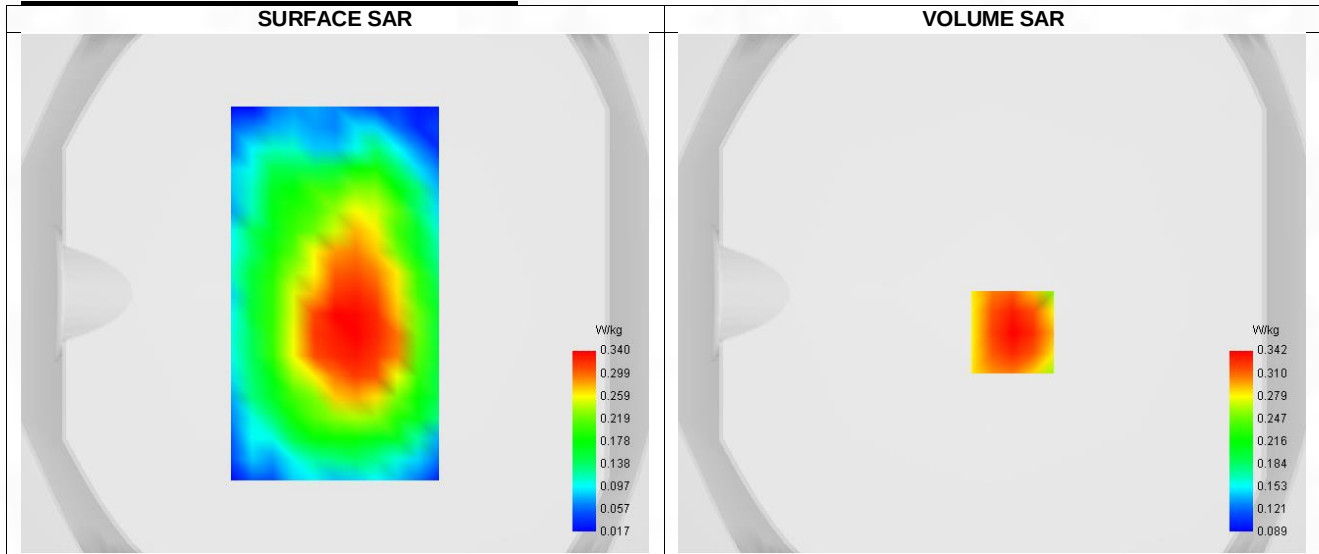


Maximum location: X=8.00, Y=-15.00 ; SAR Peak: 0.45 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.237    |
| SAR 1g (W/Kg)                                         | 0.329    |
| Variation (%)                                         | -2.240   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

#### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.452 | 0.342 | 0.245 | 0.184 | 0.147 |

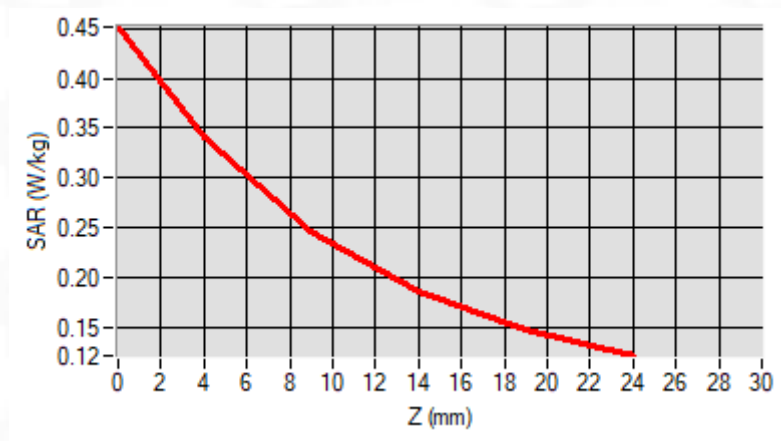

## F. 3D Image

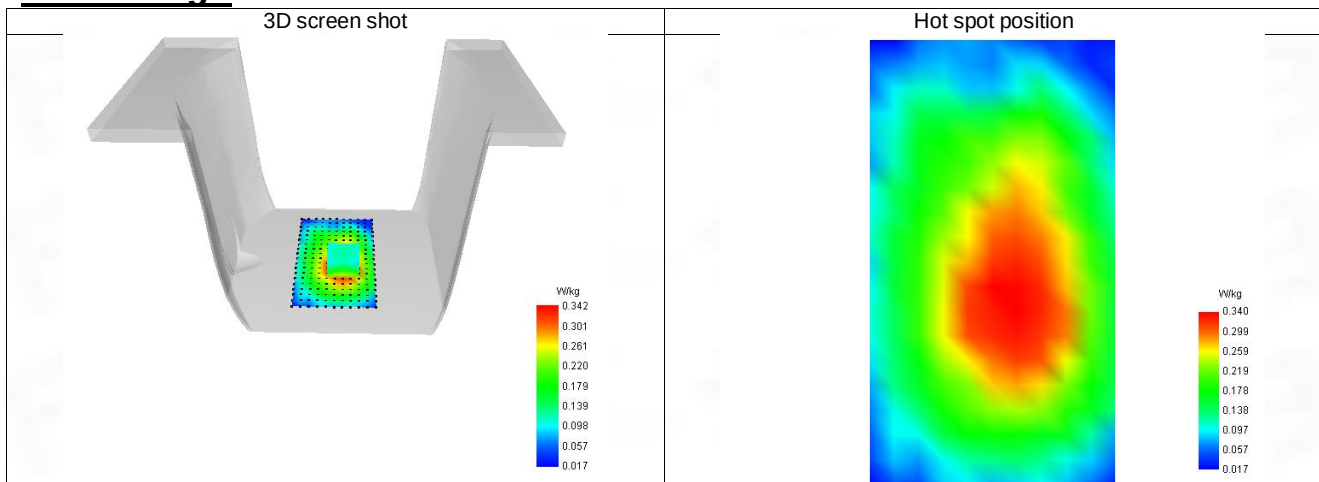

## 14-Body with back position in dist. 0mm on Channel 23130 in LTE band 12

### SAR Measurement at LTE band 12 (Body, Validation Plane)

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.65                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 12                         |
| Channels        | Higher (23130)                      |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 10 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 25                                  |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 711.000 |
| Relative permittivity (real part)      | 41.603  |
| Relative permittivity (imaginary part) | 19.297  |
| Conductivity (S/m)                     | 0.806   |

#### C. SAR Surface and Volume

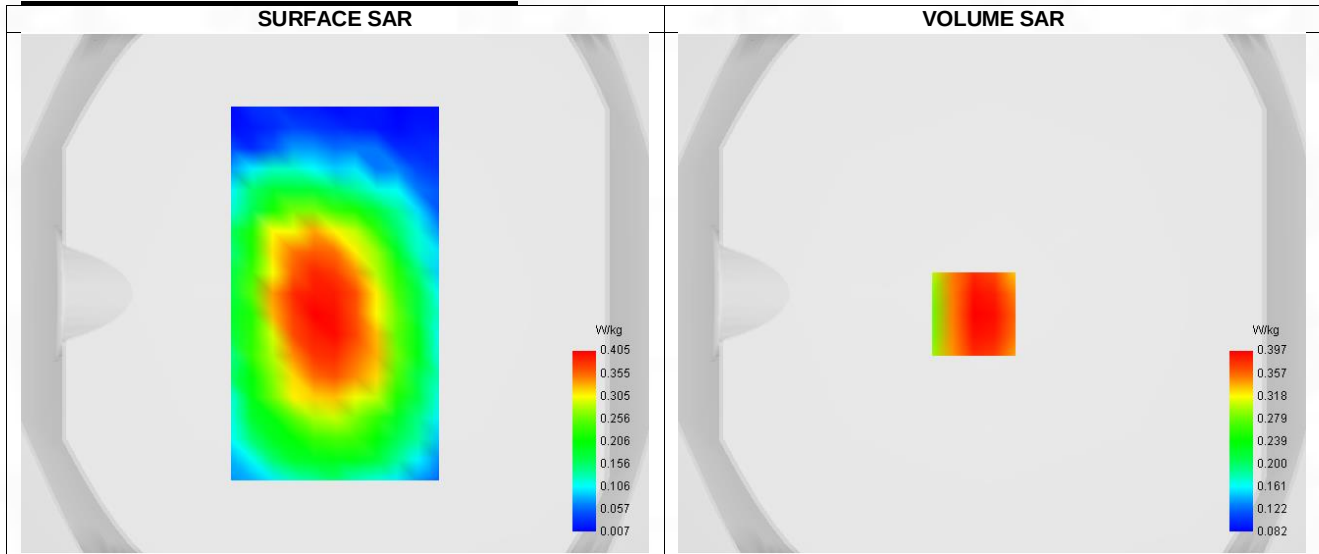

Maximum location: X=-7.00, Y=-8.00 ; SAR Peak: 0.54 W/kg


#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.293    |
| SAR 1g (W/Kg)                                         | 0.411    |
| Variation (%)                                         | -3.970   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |




### E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
|------------|-------|-------|-------|-------|-------|
| SAR (W/kg) | 0.540 | 0.397 | 0.274 | 0.198 | 0.154 |

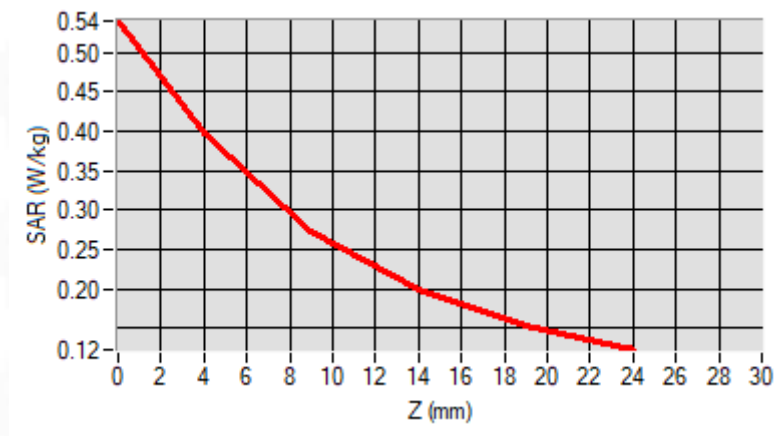

### F. 3D Image

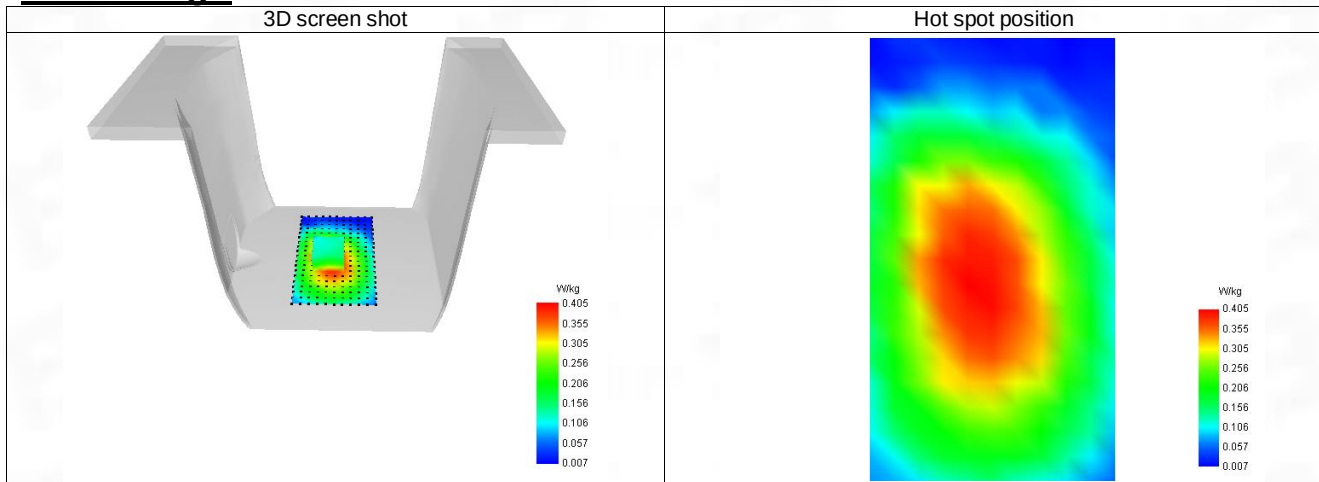

## 15-Body with back position in dist. 0mm on Channel 23230 in LTE band 13

### SAR Measurement at LTE band 13 (Body, Validation Plane)

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.65                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 13                         |
| Channels        | Middle (23230)                      |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 10 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 25                                  |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 782.000 |
| Relative permittivity (real part)      | 41.492  |
| Relative permittivity (imaginary part) | 19.408  |
| Conductivity (S/m)                     | 0.843   |

#### C. SAR Surface and Volume

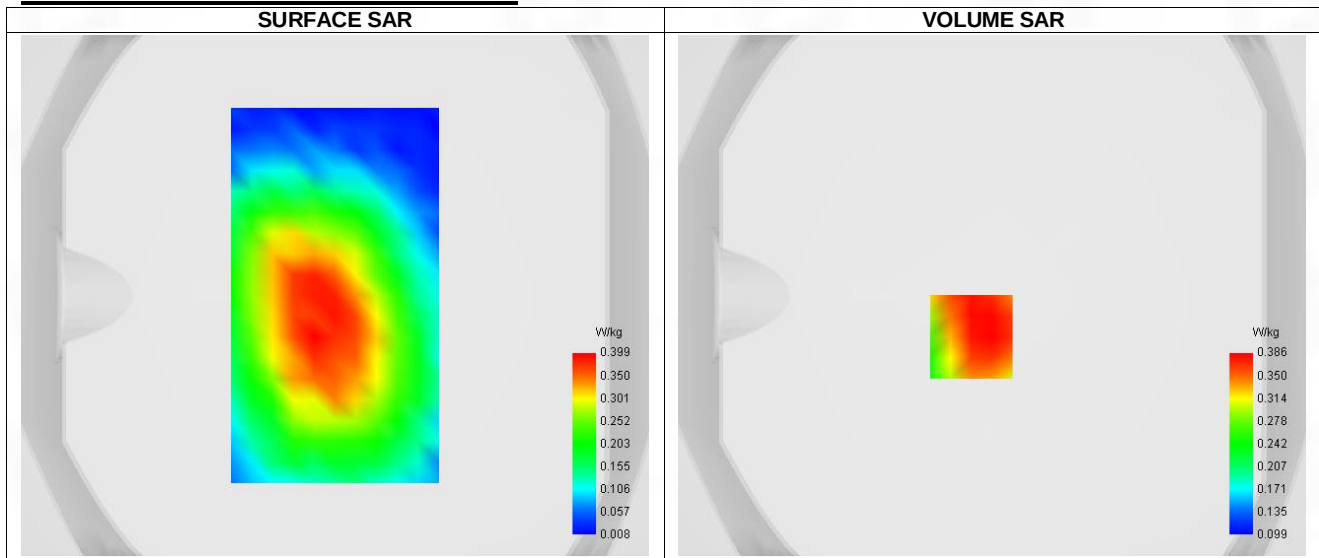


Maximum location: X=-8.00, Y=-16.00 ; SAR Peak: 0.49 W/kg

#### D. SAR 1g & 10g


|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.294    |
| SAR 1g (W/Kg)                                         | 0.400    |
| Variation (%)                                         | -3.480   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

### E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
|------------|-------|-------|-------|-------|-------|
| SAR (W/kg) | 0.659 | 0.386 | 0.269 | 0.223 | 0.168 |

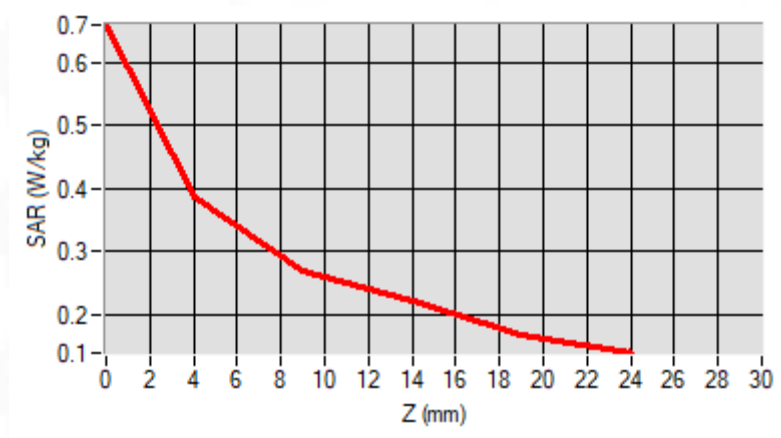

### F. 3D Image

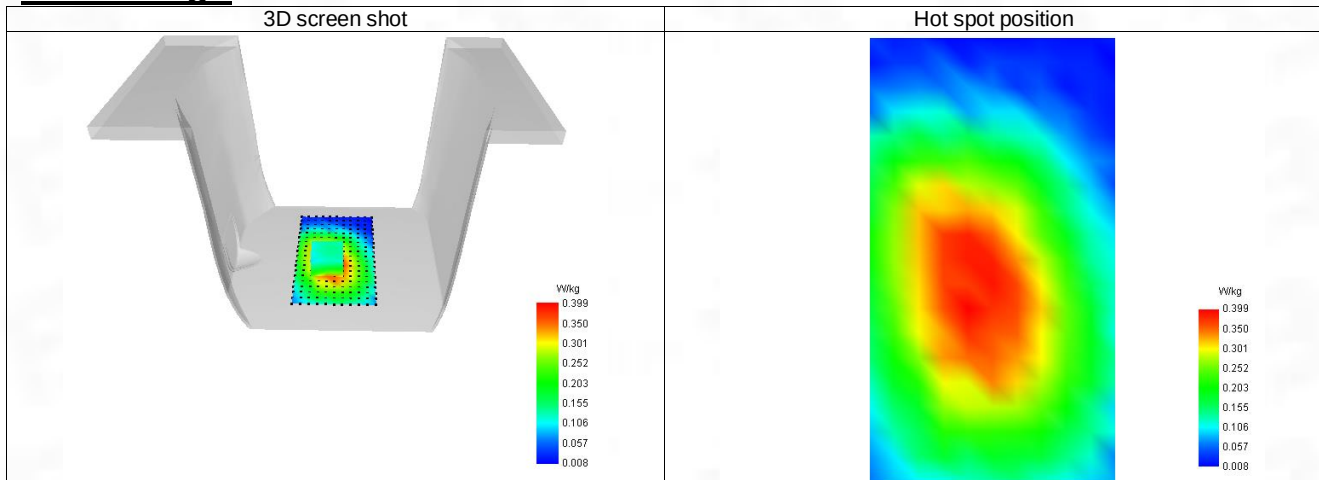

## 16-Body with back position in dist. 0mm on Channel 26140 in LTE band 25

### SAR Measurement at LTE band 25 (Body, Validation Plane)

Date of measurement: 19/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 2.24                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 25                         |
| Channels        | Lower (26140)                       |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 20 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 0                                   |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 1860.000 |
| Relative permittivity (real part)      | 39.938   |
| Relative permittivity (imaginary part) | 13.322   |
| Conductivity (S/m)                     | 1.381    |

#### C. SAR Surface and Volume

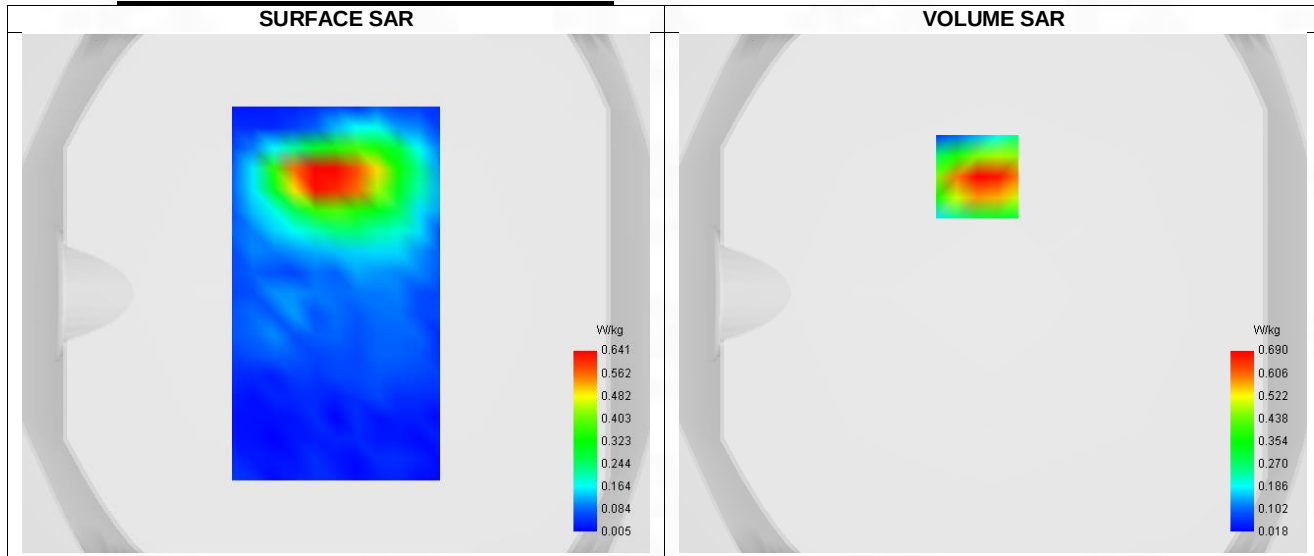

Maximum location: X=-6.00, Y=45.00 ; SAR Peak: 1.11 W/kg

#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.342    |
| SAR 1g (W/Kg)                                         | 0.650    |
| Variation (%)                                         | -2.950   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


#### E. Z Axis Scan

Total or partial reproduction of this document without permission of the Laboratory is not allowed.


BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 1.095 | 0.690 | 0.373 | 0.198 | 0.107 |

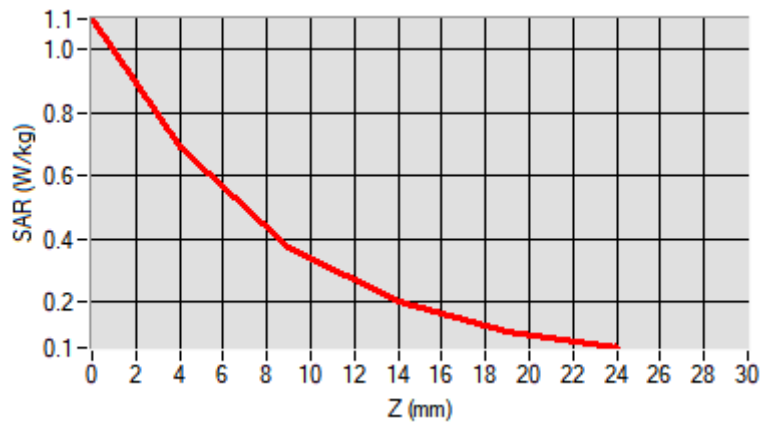

## F. 3D Image

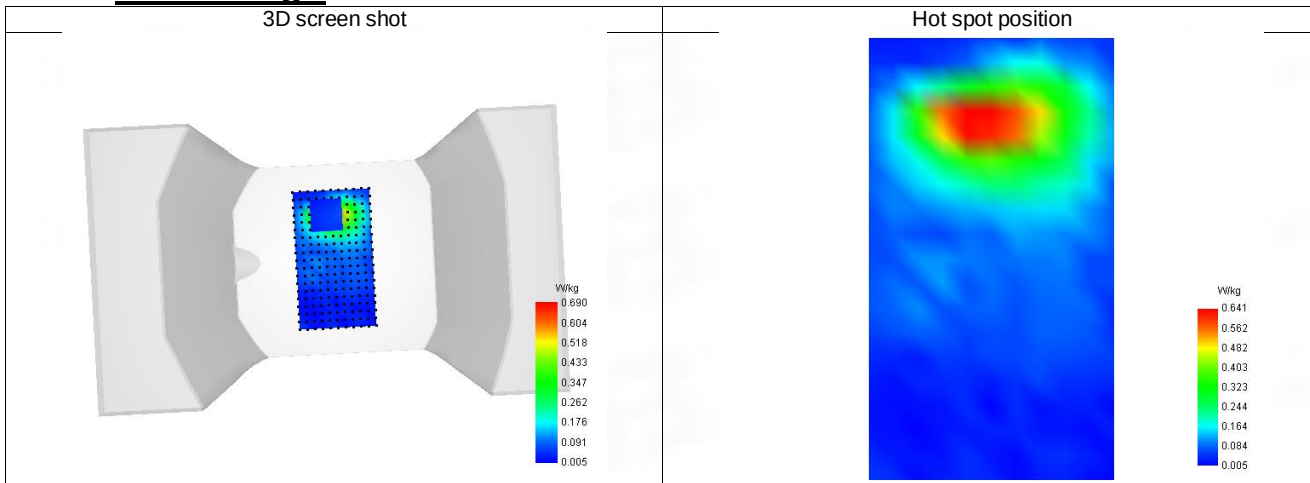

## 17-Body with back position in dist. 0mm on Channel 26965 in LTE band 26

### SAR Measurement at LTE band 26 (Body, Validation Plane)

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.68                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 26                         |
| Channels        | Higher (26965)                      |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 15 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 38                                  |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 841.500 |
| Relative permittivity (real part)      | 41.400  |
| Relative permittivity (imaginary part) | 19.500  |
| Conductivity (S/m)                     | 0.873   |

#### C. SAR Surface and Volume

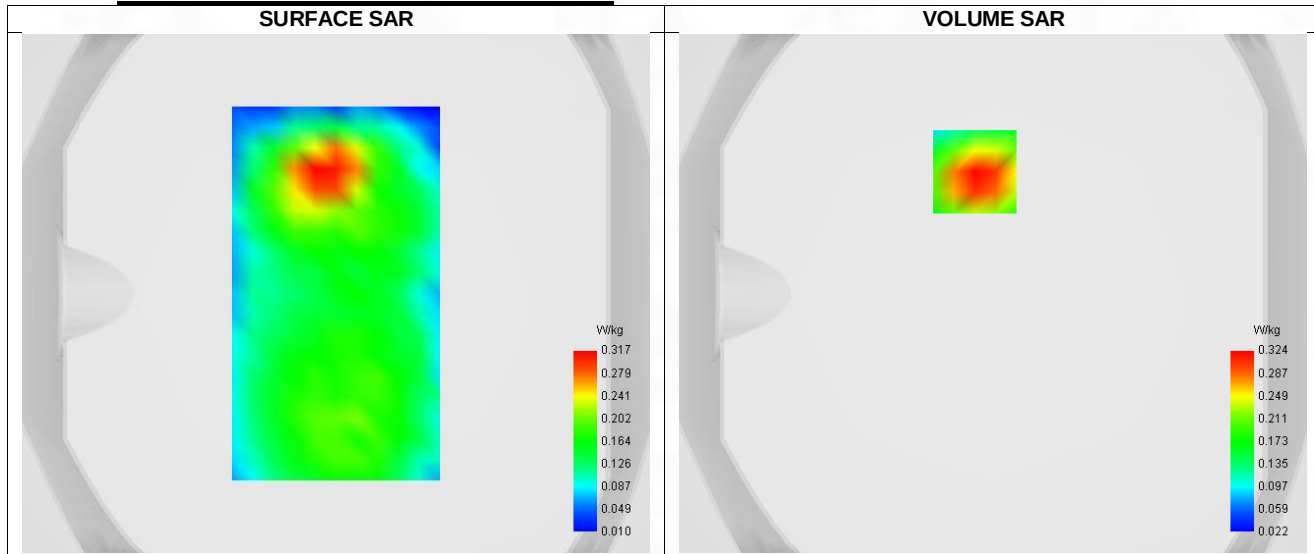

#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.174    |
| SAR 1g (W/Kg)                                         | 0.311    |
| Variation (%)                                         | -1.760   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


#### E. Z Axis Scan

Total or partial reproduction of this document without permission of the Laboratory is not allowed.


BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.523 | 0.324 | 0.176 | 0.100 | 0.064 |

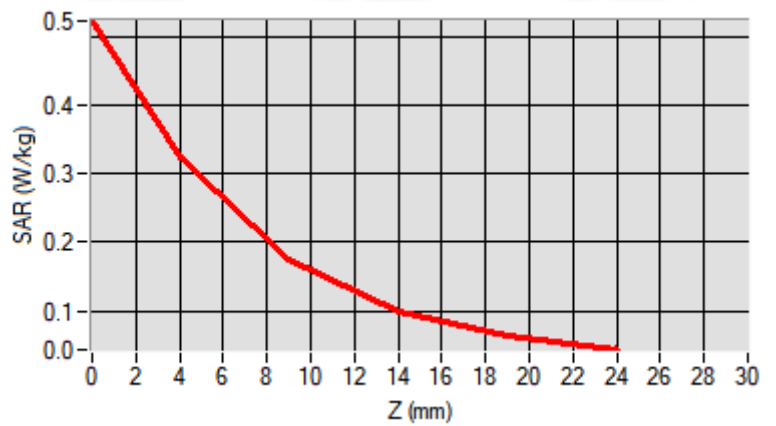

## F. 3D Image

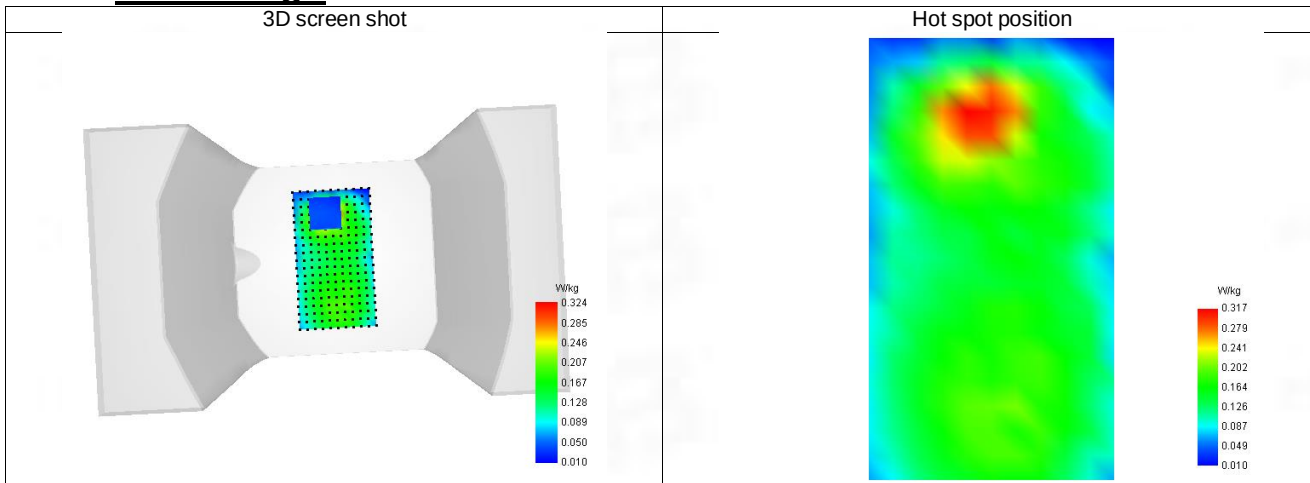

## 18-Body with back position in dist. 0mm on Channel 40620 in LTE band 41

### SAR Measurement at LTE band 41 (Body, Validation Plane)

Date of measurement: 20/3/2023


#### A. Experimental conditions.

|                                |                                     |
|--------------------------------|-------------------------------------|
| Probe                          | SN 04/22 EPG0365                    |
| ConvF                          | 2.40                                |
| Area Scan                      | surf_sam_plan.txt                   |
| Zoom Scan                      | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom                        | Validation plane                    |
| Device Position                | Body                                |
| Band                           | LTE band 41                         |
| Channels                       | Middle (40620)                      |
| Signal                         | LTE TDD                             |
| Cell Bandwidth                 | 20 Mhz                              |
| Modulation                     | SC-OFDM - QPSK                      |
| RB offset                      | 50                                  |
| RB size                        | 1                                   |
| Subframe configuration         | 0                                   |
| Special subframe configuration | 0                                   |
| Cyclic prefix                  | Normal                              |
| Duty Cycle (%)                 | 0.61                                |

#### B. Permittivity

|                                        |          |
|----------------------------------------|----------|
| Frequency (MHz)                        | 2593.000 |
| Relative permittivity (real part)      | 38.889   |
| Relative permittivity (imaginary part) | 12.681   |
| Conductivity (S/m)                     | 1.963    |

#### C. SAR Surface and Volume

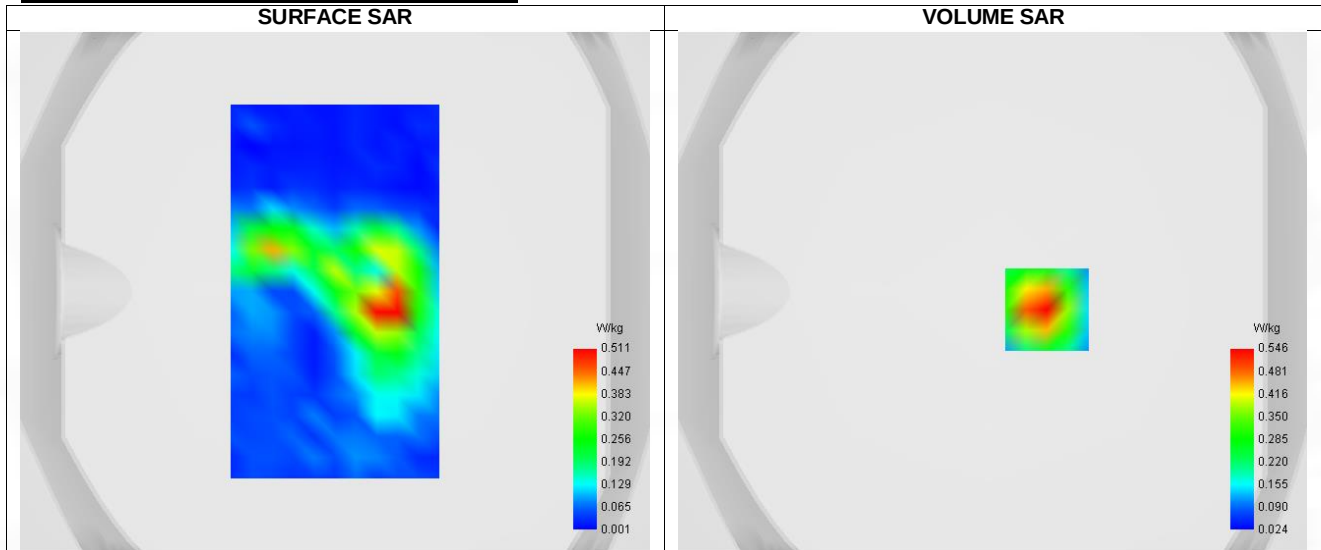

#### D. SAR 1g & 10g


|                |       |
|----------------|-------|
| SAR 10g (W/Kg) | 0.182 |
|----------------|-------|




|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 1g (W/Kg)                                         | 0.369    |
| Variation (%)                                         | -1.470   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |

### E. Z Axis Scan

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.850 | 0.546 | 0.305 | 0.170 | 0.098 |

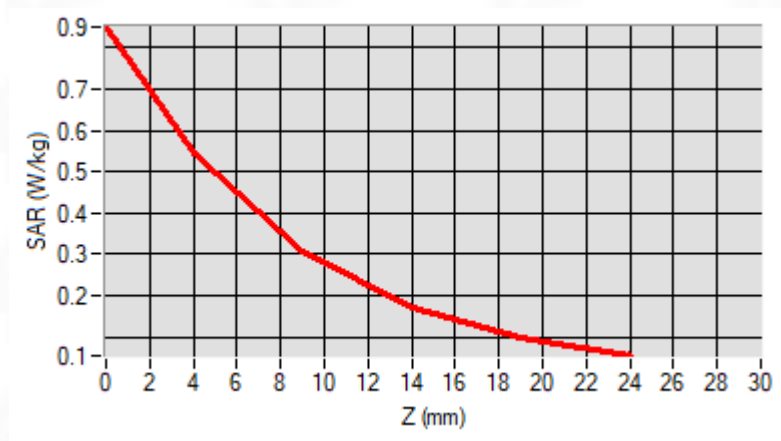

### F. 3D Image

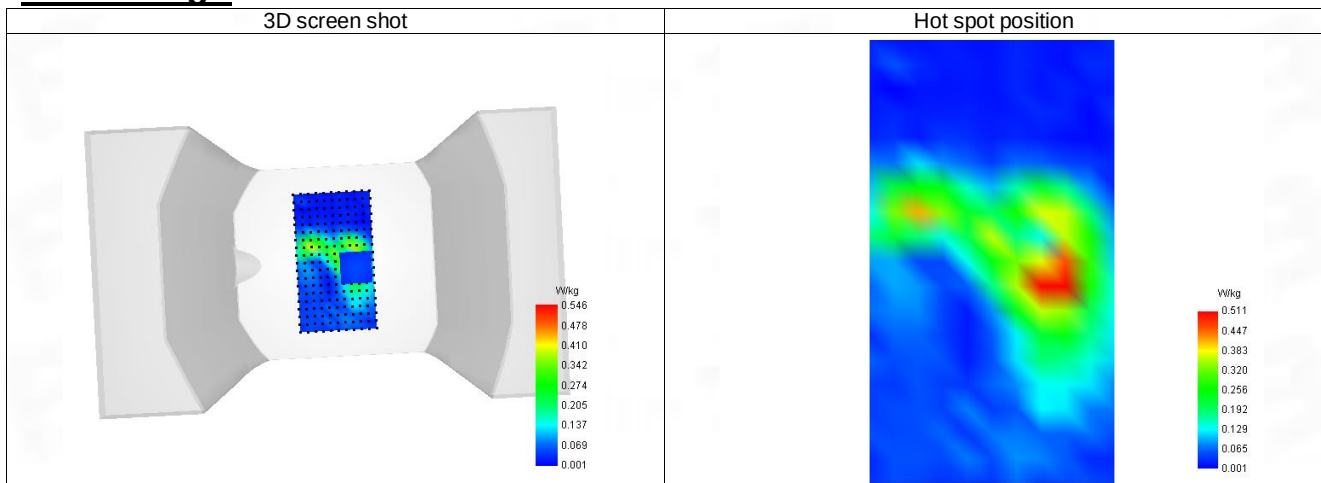

## 19-Body with back position in dist. 0mm on Channel 132072 in LTE band 66

### SAR Measurement at LTE band 66 (Body, Validation Plane)

Date of measurement: 19/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.96                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 66                         |
| Channels        | Lower (132072)                      |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 20 Mhz                              |
| Modulation      | SC-OFDM – QPSK                      |
| RB offset       | 50                                  |
| RB size         | 1                                   |

#### B. Permittivity

|                                          |          |
|------------------------------------------|----------|
| Frequency (MHz)                          | 1720.010 |
| Relative 104ermittivity (real part)      | 40.034   |
| Relative 104ermittivity (imaginary part) | 13.966   |
| Conductivity (S/m)                       | 1.329    |

#### C. SAR Surface and Volume

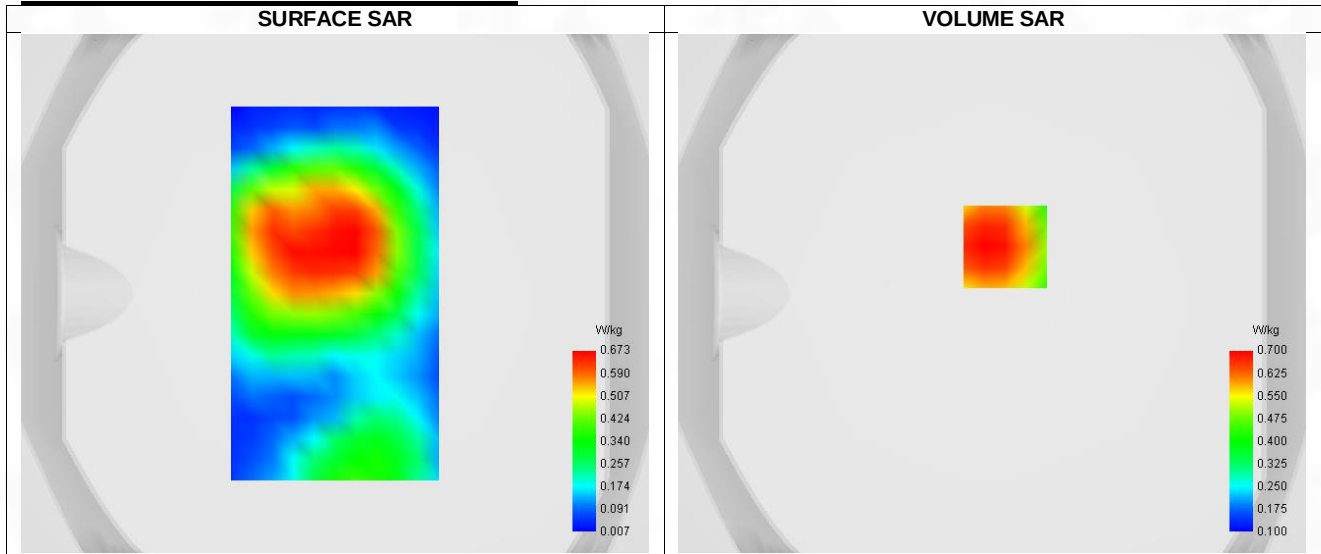


Maximum location: X=5.00, Y=18.00 ; SAR Peak: 0.97 W/kg

#### D. SAR 1g & 10g


|                                                        |          |
|--------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                         | 0.441    |
| SAR 1g (W/Kg)                                          | 0.673    |
| Variation (%)                                          | -1.370   |
| Horizontal validation criteria : minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)      | 0.000000 |

### E. Z Axis Scan

| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
|------------|-------|-------|-------|-------|-------|
| SAR (W/kg) | 1.323 | 0.700 | 0.418 | 0.309 | 0.197 |

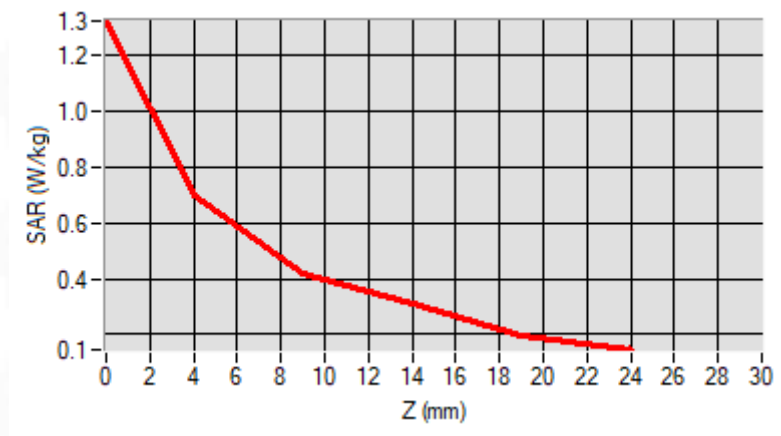

### F. 3D Image

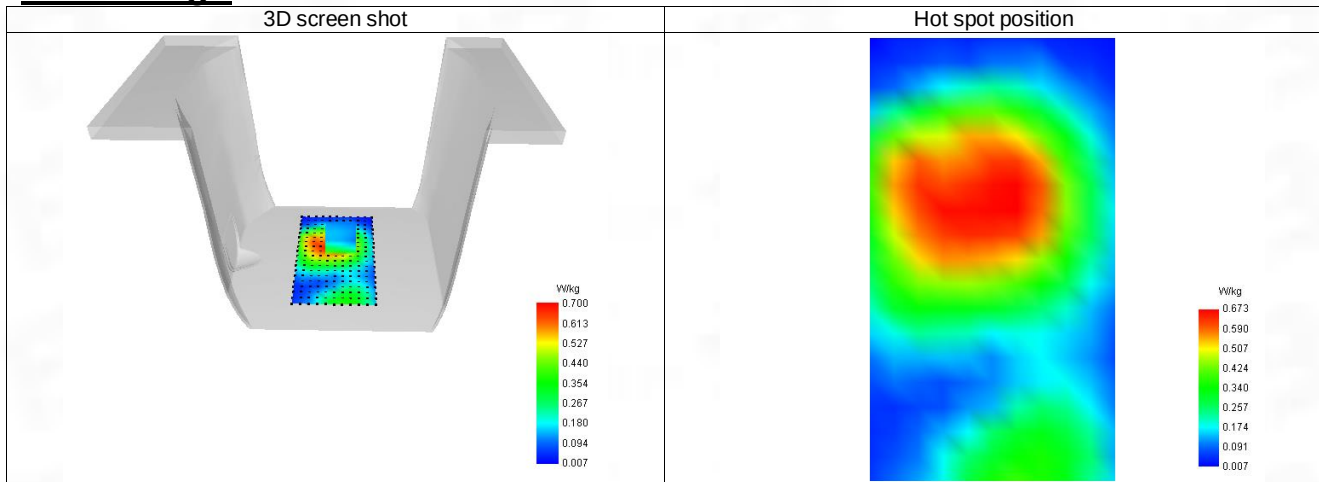

## 20-Body with back position in dist. 0mm on Channel 133372 in LTE band 71

### SAR Measurement at LTE band 71 (Body, Validation Plane)

Date of measurement: 18/3/2023


#### A. Experimental conditions.

|                 |                                     |
|-----------------|-------------------------------------|
| Probe           | SN 04/22 EPG0365                    |
| ConvF           | 1.65                                |
| Area Scan       | surf_sam_plan.txt                   |
| Zoom Scan       | 5x5x7,dx=8mm dy=8mm dz=5mm,Complete |
| Phantom         | Validation plane                    |
| Device Position | Body                                |
| Band            | LTE band 71                         |
| Channels        | Middle (133372)                     |
| Signal          | LTE FDD                             |
| Cell Bandwidth  | 20 Mhz                              |
| Modulation      | SC-OFDM - QPSK                      |
| RB offset       | 50                                  |
| RB size         | 1                                   |

#### B. Permittivity

|                                        |         |
|----------------------------------------|---------|
| Frequency (MHz)                        | 688.090 |
| Relative permittivity (real part)      | 41.638  |
| Relative permittivity (imaginary part) | 19.262  |
| Conductivity (S/m)                     | 0.794   |

#### C. SAR Surface and Volume

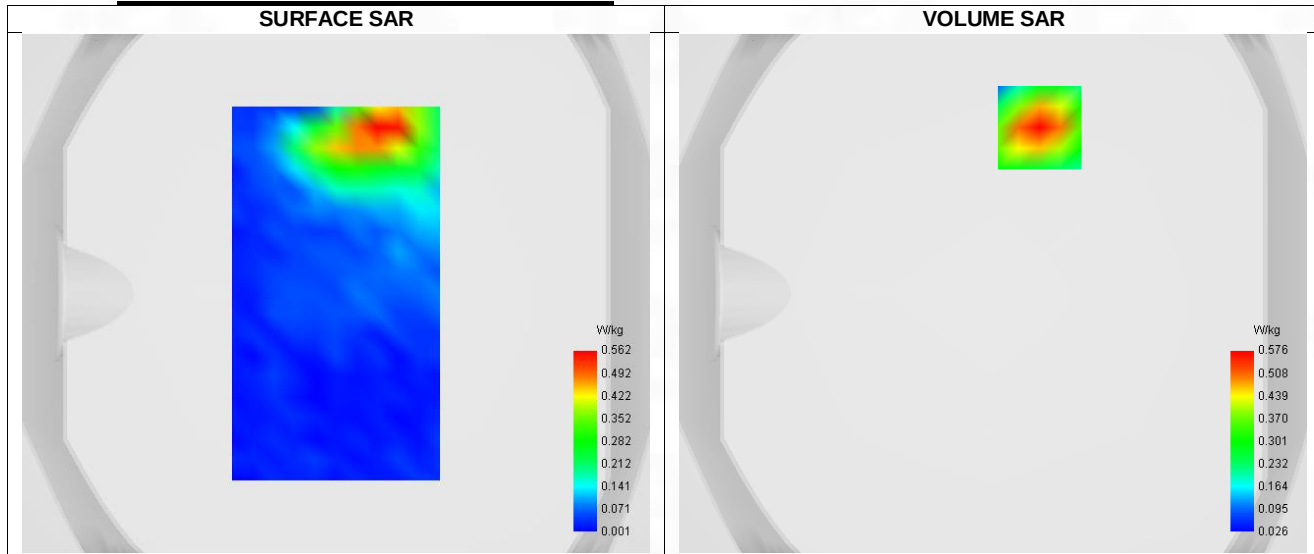

#### D. SAR 1g & 10g

|                                                       |          |
|-------------------------------------------------------|----------|
| SAR 10g (W/Kg)                                        | 0.299    |
| SAR 1g (W/Kg)                                         | 0.535    |
| Variation (%)                                         | -2.280   |
| Horizontal validation criteria: minimum distance (mm) | 0.000000 |
| Vertical validation criteria: SAR ratio M2/M1 (%)     | 0.000000 |


#### E. Z Axis Scan

Total or partial reproduction of this document without permission of the Laboratory is not allowed.


BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

|            |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|
| Z (mm)     | 0.00  | 4.00  | 9.00  | 14.00 | 19.00 |
| SAR (W/Kg) | 0.844 | 0.576 | 0.351 | 0.212 | 0.129 |

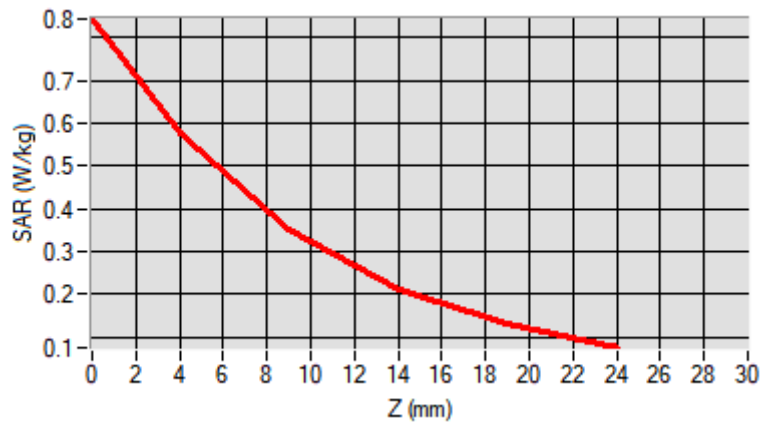

## F. 3D Image

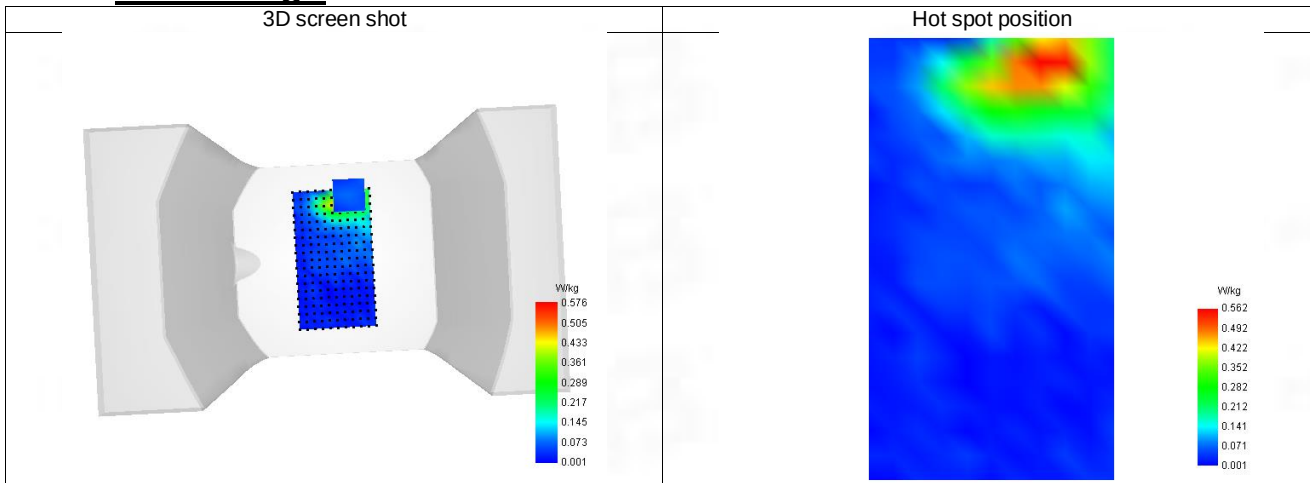


## ANNEX D SAR Test Setup Photos

Reference Photo: simulation liquid depth 15cm




Reference Photos

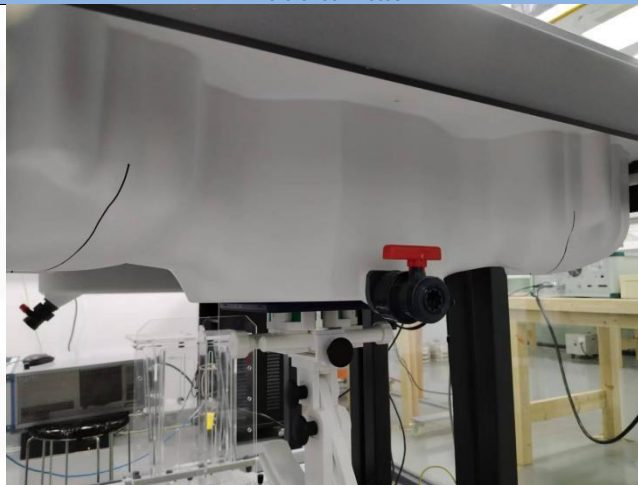

Back (dist. 0mm)



Top (dist. 0mm)

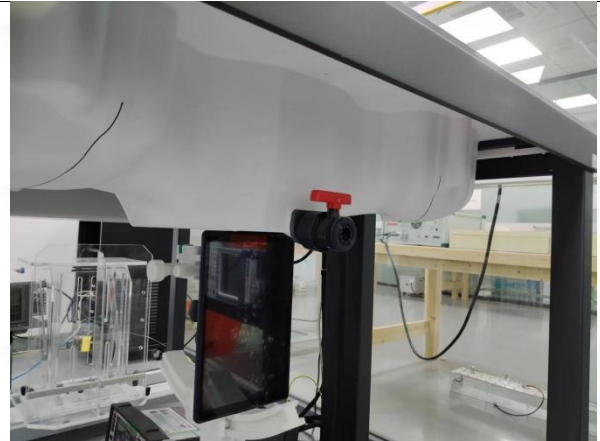

Bottom (dist. 0mm)

## ANNEX E EUT External and Internal Photos

Please refer to RF Report.

## ANNEX F Calibration Report

Please refer the document "CALIBRATION REPORT.pdf".



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,  
Bao'an District, Shenzhen, China

[www.btf-lab.com](http://www.btf-lab.com)

**--END OF REPORT--**