



# MEASUREMENT REPORT

## FCC PART 15.247

---

**FCC ID:** 2AQVB-T19V0315

**APPLICANT:** Taisync Technology LLC

**Application Type:** Certification

**Product:** 2.4GHz HD Wireless Link

**Model No.:** WLN210-BM-a, WLN210-BM-b, WLN210-BM-c

**Brand Name:** TAISYNC

**FCC Classification:** Digital Transmission System (DTS)

**FCC Rule Part(s):** Part 15 Subpart C (Section 15.247)

**Test Procedure(s):** ANSI C63.10-2013, KDB 558074 D01v05r01


**Test Date:** March 01 ~ March 18, 2019

Reviewed By:



( Kevin Guo )

Approved By:



( Robin Wu )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

| Report No.    | Version | Description    | Issue Date | Note  |
|---------------|---------|----------------|------------|-------|
| 1902RSU015-U1 | Rev. 01 | Initial Report | 03-18-2019 | Valid |
|               |         |                |            |       |

# CONTENTS

| Description                                                | Page      |
|------------------------------------------------------------|-----------|
| <b>§2.1033 General Information.....</b>                    | <b>5</b>  |
| <b>1. INTRODUCTION .....</b>                               | <b>6</b>  |
| 1.1. Scope.....                                            | 6         |
| 1.2. MRT Test Location .....                               | 6         |
| <b>2. PRODUCT INFORMATION .....</b>                        | <b>7</b>  |
| 2.1. Feature of Equipment under Test .....                 | 7         |
| 2.2. Product Specification Subjective to this Report ..... | 7         |
| 2.3. Working Frequencies for this report.....              | 7         |
| 2.4. Description of Available Antennas .....               | 8         |
| 2.5. Description of Antenna RF Port.....                   | 8         |
| 2.6. Test Mode .....                                       | 8         |
| 2.7. Device Capabilities.....                              | 9         |
| 2.8. Test Configuration .....                              | 10        |
| 2.9. EMI Suppression Device(s)/Modifications.....          | 10        |
| 2.10. Labeling Requirements.....                           | 10        |
| <b>3. DESCRIPTION of TEST.....</b>                         | <b>11</b> |
| 3.1. Evaluation Procedure .....                            | 11        |
| 3.2. AC Line Conducted Emissions .....                     | 11        |
| 3.3. Radiated Emissions.....                               | 12        |
| <b>4. ANTENNA REQUIREMENTS.....</b>                        | <b>13</b> |
| <b>5. TEST EQUIPMENT CALIBRATION DATE.....</b>             | <b>14</b> |
| <b>6. MEASUREMENT UNCERTAINTY .....</b>                    | <b>16</b> |
| <b>7. TEST RESULT .....</b>                                | <b>17</b> |
| 7.1. Summary.....                                          | 17        |
| 7.2. 6dB Bandwidth Measurement.....                        | 18        |
| 7.2.1. Test Limit .....                                    | 18        |
| 7.2.2. Test Procedure used.....                            | 18        |
| 7.2.3. Test Setting.....                                   | 18        |
| 7.2.4. Test Setup .....                                    | 18        |
| 7.2.5. Test Result.....                                    | 19        |
| 7.3. Output Power Measurement.....                         | 23        |
| 7.3.1. Test Limit .....                                    | 23        |
| 7.3.2. Test Procedure Used .....                           | 23        |

|           |                                                     |           |
|-----------|-----------------------------------------------------|-----------|
| 7.3.3.    | Test Setting.....                                   | 23        |
| 7.3.4.    | Test Setup .....                                    | 23        |
| 7.3.5.    | Test Result.....                                    | 24        |
| 7.4.      | Power Spectral Density Measurement.....             | 26        |
| 7.4.1.    | Test Limit .....                                    | 26        |
| 7.4.2.    | Test Procedure Used .....                           | 26        |
| 7.4.3.    | Test Setting.....                                   | 26        |
| 7.4.4.    | Test Setup .....                                    | 27        |
| 7.4.5.    | Test Result.....                                    | 28        |
| 7.5.      | Conducted Band Edge and Out-of-Band Emissions ..... | 32        |
| 7.5.1.    | Test Limit .....                                    | 32        |
| 7.5.2.    | Test Procedure Used .....                           | 32        |
| 7.5.3.    | Test Setting.....                                   | 32        |
| 7.5.4.    | Test Setup .....                                    | 33        |
| 7.5.5.    | Test Result.....                                    | 34        |
| 7.6.      | Radiated Spurious Emission Measurement .....        | 41        |
| 7.6.1.    | Test Limit .....                                    | 41        |
| 7.6.2.    | Test Procedure Used .....                           | 41        |
| 7.6.3.    | Test Setting.....                                   | 41        |
| 7.6.4.    | Test Setup .....                                    | 43        |
| 7.6.5.    | Test Result.....                                    | 44        |
| 7.7.      | Radiated Restricted Band Edge Measurement.....      | 56        |
| 7.7.1.    | Test Limit .....                                    | 56        |
| 7.7.2.    | Test Procedure Used .....                           | 57        |
| 7.7.3.    | Test Setting.....                                   | 57        |
| 7.7.4.    | Test Setup .....                                    | 58        |
| 7.7.5.    | Test Result.....                                    | 59        |
| 7.8.      | AC Conducted Emissions Measurement .....            | 83        |
| 7.8.1.    | Test Limit .....                                    | 83        |
| 7.8.2.    | Test Setup .....                                    | 83        |
| 7.8.3.    | Test Result.....                                    | 84        |
| <b>8.</b> | <b>CONCLUSION .....</b>                             | <b>86</b> |
|           | <b>Appendix A – Test Setup Photograph .....</b>     | <b>87</b> |
|           | <b>Appendix B – EUT Photograph.....</b>             | <b>88</b> |

## §2.1033 General Information

|                                |                                                                                                                                 |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant:</b>              | Taisync Technology LLC                                                                                                          |
| <b>Applicant Address:</b>      | 6th floor,75 E. Santa Clara St., San Jose, CA 95113                                                                             |
| <b>Manufacturer:</b>           | Taisync                                                                                                                         |
| <b>Manufacturer Address:</b>   | B-702 ,Creative Park, NO.100 dicui road, Binhu District, Wuxi, Jiangsu, China                                                   |
| <b>Test Site:</b>              | MRT Technology (Suzhou) Co., Ltd                                                                                                |
| <b>Test Site Address:</b>      | D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China                                              |
| <b>FCC Registration No.:</b>   | 893164                                                                                                                          |
| <b>Test Device Serial No.:</b> | N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



## 2. PRODUCT INFORMATION

### 2.1. Feature of Equipment under Test

|                   |                                       |
|-------------------|---------------------------------------|
| Product Name:     | 2.4GHz HD Wireless Link               |
| Model No.:        | WLN210-BM-a, WLN210-BM-b, WLN210-BM-c |
| Brand Name:       | TAISYNC                               |
| RF Specification: | 2.4GHz                                |
| Working Voltage:  | DC 5V                                 |

Note 1: These models are different in the shape of their shielding enclosures, which are used to accommodate different mounting configurations. The material and PCBA are the same.

Note 2: Due to 3 models have the same shielding cavity, and the more similar shape between WLN210-BM-a and WLN210-BM-b, so we select WLN210-BM-a for all tests and verify RSE & Bandedge test of one channel for WLN210-BM-c according to WLN210-BM-a's test result in this report.

### 2.2. Product Specification Subjective to this Report

| RF Specification (2.4GHz) |                                                                   |
|---------------------------|-------------------------------------------------------------------|
| Frequency Range:          | 2412 ~ 2472 MHz                                                   |
| Type of Modulation:       | OFDM                                                              |
| Channel Bandwidth         | 2.5MHz / 10MHz                                                    |
| Data Rate:                | Bandwidth 2.5MHz: 115200kbps<br>Bandwidth 10MHz: 2.3 Mbps ~12Mbps |

### 2.3. Working Frequencies for this report

2.4G 2.5MHz/10MHz

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 01      | 2412 MHz  | 02      | 2417 MHz  | 03      | 2422 MHz  |
| 04      | 2427 MHz  | 05      | 2432 MHz  | 06      | 2437 MHz  |
| 07      | 2442 MHz  | 08      | 2447 MHz  | 09      | 2452 MHz  |
| 10      | 2457 MHz  | 11      | 2462 MHz  | 12      | 2467 MHz  |
| 13      | 2472 MHz  | --      | --        | --      | --        |


## 2.4. Description of Available Antennas

| Antenna                                                                           | Manufacturer | Frequency Band (GHz) | Antenna Name   | Tx Paths  |
|-----------------------------------------------------------------------------------|--------------|----------------------|----------------|-----------|
|  | saixun       | 2.4                  | RP-SMA Antenna | 1Tx + 1Rx |
|  | airgain      | 2.4                  | PCB Antenna    | 1Tx + 1Rx |

| Antenna Name           | Frequency Band (GHz) | TX Paths | Max Peak Gain (dBi) |
|------------------------|----------------------|----------|---------------------|
| RP-SMA Antenna (Ant 1) | 2.4 ~ 2.5            | 1        | 5.0                 |
| PCB Antenna (Ant 2)    | 2.4 ~ 2.5            | 1        | 2.0                 |

Note: The device can only use the Ant 1 When it is working at 2.5MHz Bandwidth. This caution will be described in Operational description and User manual of this device by manufacturer.

## 2.5. Description of Antenna RF Port
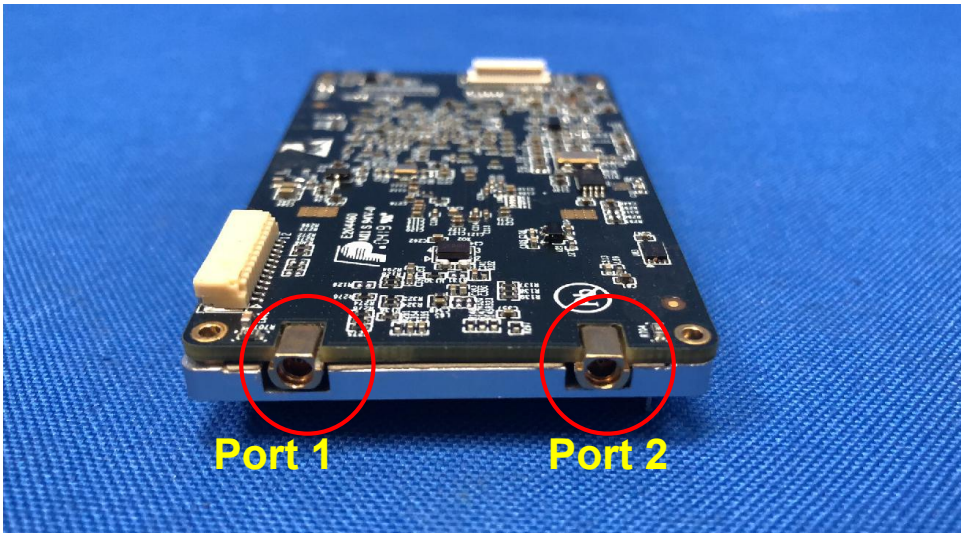
| Software Control Port                                                                        | 2.4GHz RF Port |        |
|----------------------------------------------------------------------------------------------|----------------|--------|
|                                                                                              | Port 1         | Port 2 |
|          |                |        |
| <p>Note: For current device can use port 1 only, port 2 is reserved for upgrade version.</p> |                |        |

## 2.6. Test Mode

|           |                                                   |
|-----------|---------------------------------------------------|
| Test Mode | Mode 1: Transmit by Bandwidth 10MHz (2.3Mbps)     |
|           | Mode 2: Transmit by Bandwidth 2.5MHz (115200kbps) |


## 2.7. Device Capabilities

This device contains the following capabilities:

2.4G Radio frequency with 10MHz and 2.5MHz Bandwidth.

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Test Mode / Bandwidth | Duty Cycle |
|-----------------------|------------|
| 10MHz                 | 99.01 %    |
| 2.5MHz                | 91.40 %    |

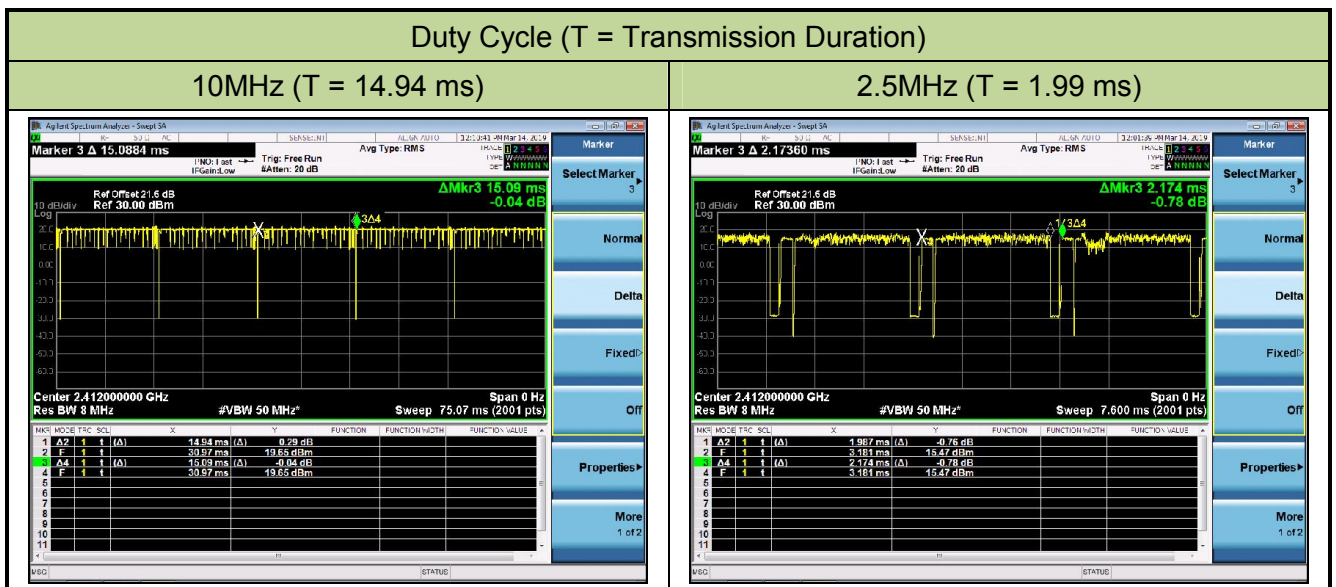

## **2.8. Test Configuration**

The device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## **2.9. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.10. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION of TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance was used in the measurement of the device.

**Deviation from measurement procedure.....None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- There are provisions for special connector (MMCX PLUG connector) to an external antenna.

### **Conclusion:**

The device unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

### Conducted Emissions - SR2

| Instrument                 | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-------------|-------------|----------------|----------------|
| EMI Test Receiver          | R&S          | ESR3        | MRTSUE06185 | 1 year         | 2019/04/20     |
| Two-Line V-Network         | R&S          | ENV216      | MRTSUE06002 | 1 year         | 2019/06/15     |
| Two-Line V-Network         | R&S          | ENV216      | MRTSUE06003 | 1 year         | 2019/06/15     |
| Temperature/Humidity Meter | Testo        | 608-H1      | MRTSUE06404 | 1 year         | 2019/08/14     |
| Shielding Anechoic Chamber | Mikebang     | Chamber-SR2 | MRTSUE06214 | 1 year         | 2019/05/10     |

### Radiated Disturbance – AC1

| Instrument                 | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|----------------------------|--------------|-------------|-------------|----------------|----------------|
| Spectrum Analyzer          | Keysight     | N9030B      | MRTSUE06395 | 1 year         | 2019/09/30     |
| EMI Test Receiver          | R&S          | ESR7        | MRTSUE06001 | 1 year         | 2019/08/18     |
| Loop Antenna               | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2019/11/20     |
| Bilog Period Antenna       | Schwarzbeck  | VULB 9168   | MRTSUE06172 | 1 year         | 2019/04/12     |
| Horn Antenna               | Schwarzbeck  | BBHA9120D   | MRTSUE06023 | 1 year         | 2019/10/21     |
| Broadband Horn Antenna     | Schwarzbeck  | BBHA9170    | MRTSUE06024 | 1 year         | 2019/12/14     |
| Microwave System Amplifier | Agilent      | 83017A      | MRTSUE06076 | 1 year         | 2019/11/17     |
| Preamplifier               | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2019/06/13     |
| Temperature/Humidity Meter | Testo        | 608-H1      | MRTSUE06403 | 1 year         | 2019/08/14     |
| Anechoic Chamber           | TDK          | Chamber-AC1 | MRTSUE06212 | 1 year         | 2019/05/02     |

### Radiated Emissions - AC2

| Instrument                     | Manufacturer | Type No.    | Asset No.   | Cali. Interval | Cali. Due Date |
|--------------------------------|--------------|-------------|-------------|----------------|----------------|
| Spectrum Analyzer              | Keysight     | N9038A      | MRTSUE06125 | 1 year         | 2019/08/14     |
| Loop Antenna                   | Schwarzbeck  | FMZB 1519   | MRTSUE06025 | 1 year         | 2019/11/09     |
| Bilog Period Antenna           | Schwarzbeck  | VULB 9162   | MRTSUE06022 | 1 year         | 2019/10/20     |
| Horn Antenna                   | Schwarzbeck  | BBHA9120D   | MRTSUE06171 | 1 year         | 2019/11/09     |
| Broadband Horn Antenna         | Schwarzbeck  | BBHA9170    | MRTSUE06024 | 1 year         | 2019/12/17     |
| Broadband Coaxial Preamplifier | Schwarzbeck  | BBV 9718    | MRTSUE06176 | 1 year         | 2019/11/16     |
| Preamplifier                   | Schwarzbeck  | BBV 9721    | MRTSUE06121 | 1 year         | 2019/06/13     |
| Temperature/Humidity Meter     | Minggao      | ETH529      | MRTSUE06170 | 1 year         | 2019/12/13     |
| Anechoic Chamber               | RIKEN        | Chamber-AC2 | MRTSUE06213 | 1 year         | 2019/05/02     |

## Conducted Test Equipment - TR3

| Instrument                   | Manufacturer | Type No.  | Asset No.   | Cali. Interval | Cali. Due Date |
|------------------------------|--------------|-----------|-------------|----------------|----------------|
| Spectrum Analyzer            | Agilent      | N9020A    | MRTSUE06106 | 1 year         | 2019/04/20     |
| Power Meter                  | Agilent      | U2021XA   | MRTSUE06030 | 1 year         | 2019/12/06     |
| Temperature&Humidity Chamber | BAOYT        | BYH-150CL | MRTSUE06051 | 1 year         | 2019/12/06     |
| Temperature/Humidity Meter   | Testo        | 608-H1    | MRTSUE06401 | 1 year         | 2019/11/21     |

| Software | Version | Function          |
|----------|---------|-------------------|
| e3       | V8.3.5  | EMI Test Software |

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

|                                                                                                                                                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AC Conducted Emission Measurement - SR2</b>                                                                                                   |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>150kHz~30MHz: $\pm 3.46\text{dB}$                                     |
| <b>Radiated Emission Measurement – AC1</b>                                                                                                       |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>9kHz ~ 1GHz: $\pm 4.18\text{dB}$<br>1GHz ~ 25GHz: $\pm 4.76\text{dB}$ |
| <b>Radiated Emission Measurement – AC2</b>                                                                                                       |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>9kHz ~ 1GHz: 3.86dB<br>1GHz ~ 25GHz: 4.33dB                           |
| <b>Spurious Emissions, Conducted - TR3</b>                                                                                                       |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>0.78dB                                                                |
| <b>Output Power - TR3</b>                                                                                                                        |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>1.13dB                                                                |
| <b>Power Spectrum Density - TR3</b>                                                                                                              |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>1.15dB                                                                |
| <b>Occupied Bandwidth - TR3</b>                                                                                                                  |
| Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_c(y)$ ):<br>0.28%                                                                 |

## 7. TEST RESULT

### 7.1. Summary

**Company Name:** Taisync Technology LLC

**FCC ID:** 2AQVB-T19V0315

| FCC Part Section(s) | Test Description                                                              | Test Limit                                                                     | Test Condition | Test Result | Reference         |
|---------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------------------------|----------------|-------------|-------------------|
| 15.247(a)(2)        | 6dB Bandwidth                                                                 | $\geq 500\text{kHz}$                                                           | Conducted      | Pass        | Section 7.2       |
| 15.247(b)(3)        | Output Power                                                                  | $\leq 1\text{ Watt}$                                                           |                | Pass        | Section 7.3       |
| 15.247(e)           | Power Spectral Density                                                        | $\leq 8\text{ dBm} / 3\text{kHz}$                                              |                | Pass        | Section 7.4       |
| 15.247(d)           | Band Edge / Out-of-Band Emissions                                             | $\leq 30\text{dBc (Average)}$                                                  |                | Pass        | Section 7.5       |
| 15.205<br>15.209    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | Radiated       | Pass        | Section 7.6 & 7.7 |
| 15.207              | AC Conducted Emissions<br>150kHz - 30MHz                                      | < FCC 15.207 limits                                                            | Line Conducted | Pass        | Section 7.8       |

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All channels that reduced power are verified in the band-edge testing, but we reported worst channel data only.

## 7.2. 6dB Bandwidth Measurement

### 7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


### 7.2.2. Test Procedure used

ANSI C63.10-2013 Section 11.8

### 7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

### 7.2.4. Test Setup

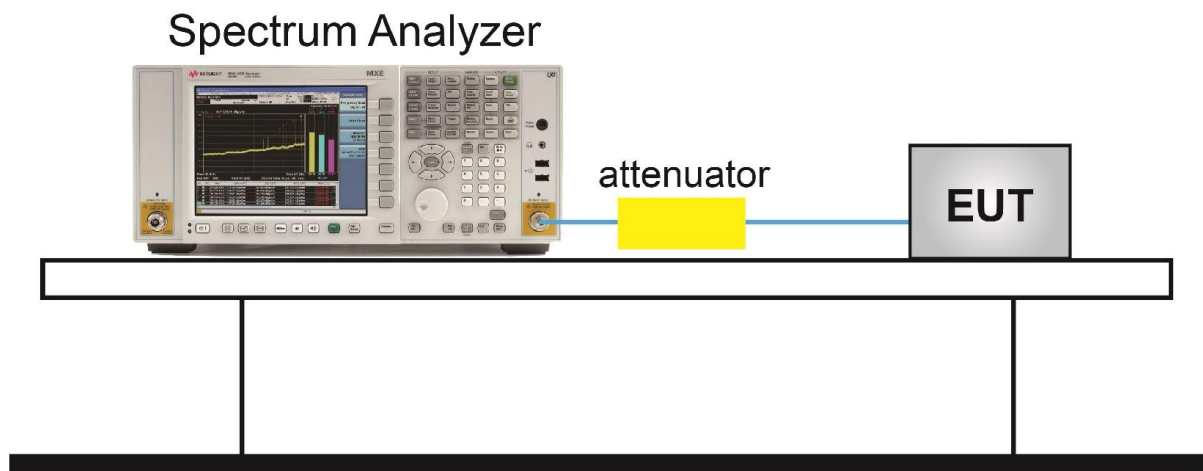


### 7.2.5.Test Result

|               |                         |                   |            |
|---------------|-------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link | Temperature       | 25°C       |
| Test Engineer | Snake Ni                | Relative Humidity | 52%        |
| Test Site     | TR3                     | Test Date         | 2019/03/13 |


| Test Mode / Bandwidth | Data Rate  | Channel No. | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (MHz) | Result |
|-----------------------|------------|-------------|-----------------|---------------------|-------------|--------|
| Ant 1                 |            |             |                 |                     |             |        |
| 10MHz                 | 2.3Mbps    | 01          | 2412            | 9.11                | ≥ 0.5       | Pass   |
| 10MHz                 | 2.3Mbps    | 07          | 2442            | 9.08                | ≥ 0.5       | Pass   |
| 10MHz                 | 2.3Mbps    | 13          | 2472            | 9.05                | ≥ 0.5       | Pass   |
| 2.5MHz                | 115200kbps | 01          | 2412            | 2.27                | ≥ 0.5       | Pass   |
| 2.5MHz                | 115200kbps | 07          | 2442            | 2.28                | ≥ 0.5       | Pass   |
| 2.5MHz                | 115200kbps | 13          | 2472            | 2.28                | ≥ 0.5       | Pass   |
| Ant 2                 |            |             |                 |                     |             |        |
| 10MHz                 | 2.3Mbps    | 01          | 2412            | 9.10                | ≥ 0.5       | Pass   |
| 10MHz                 | 2.3Mbps    | 07          | 2442            | 9.11                | ≥ 0.5       | Pass   |
| 10MHz                 | 2.3Mbps    | 13          | 2472            | 9.04                | ≥ 0.5       | Pass   |

## 10MHz 6dB Bandwidth - Ant 1


## Channel 01 (2412MHz)

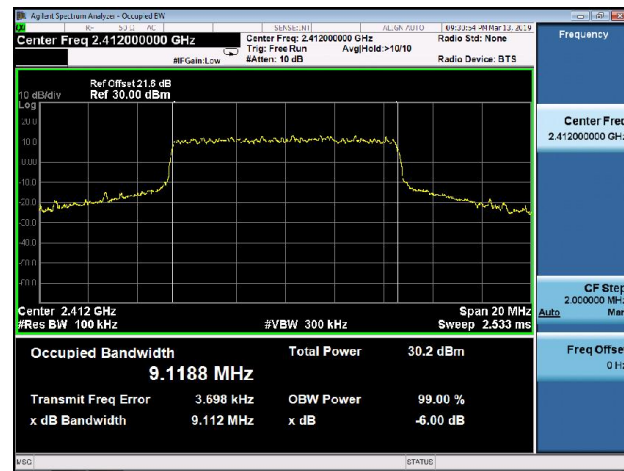

## Channel 07 (2442MHz)

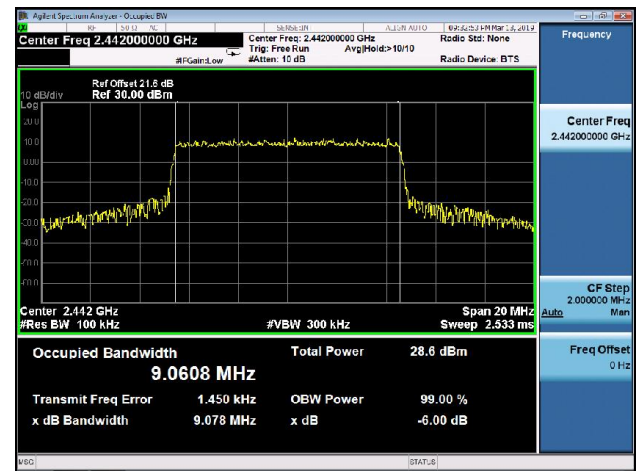

## Channel 13 (2472MHz)

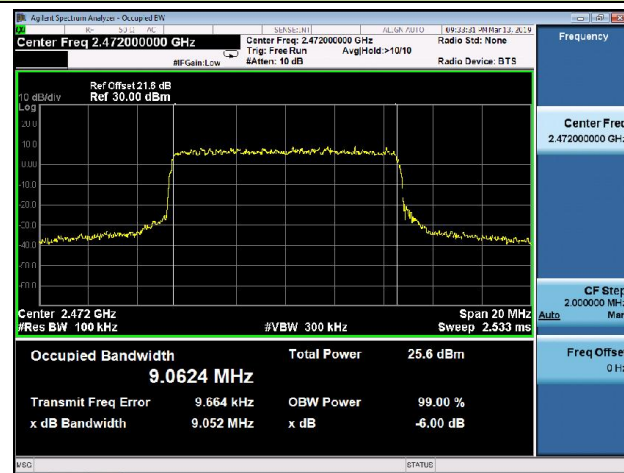


--


--

## 2.5MHz 6dB Bandwidth - Ant 1


## Channel 01 (2412MHz)

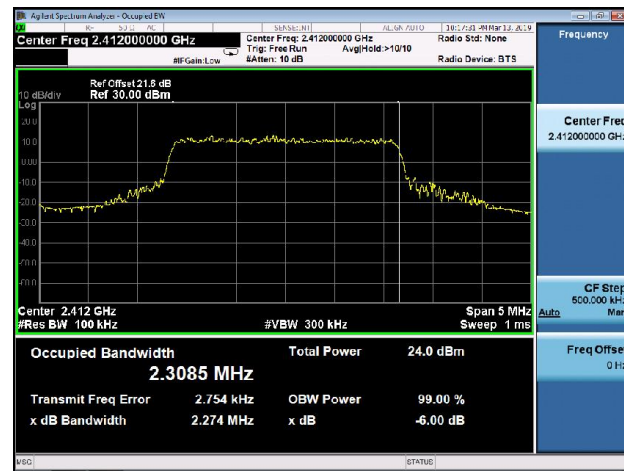

## Channel 07 (2442MHz)

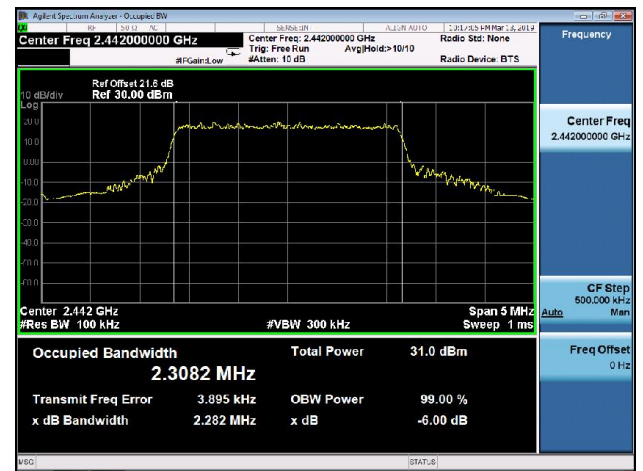

## Channel 13 (2472MHz)

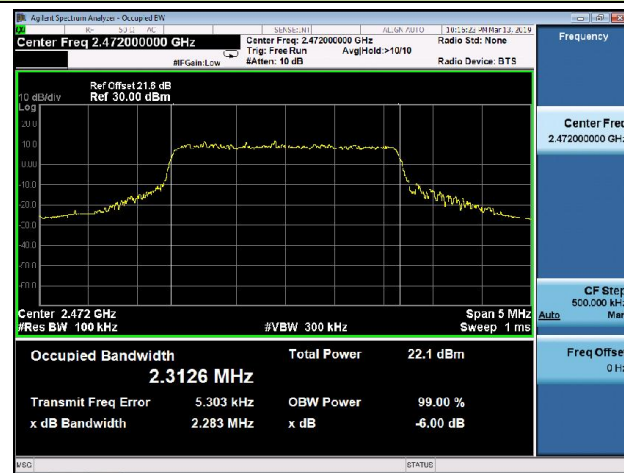


--

--

## 10MHz 6dB Bandwidth - Ant 2


## Channel 01 (2412MHz)

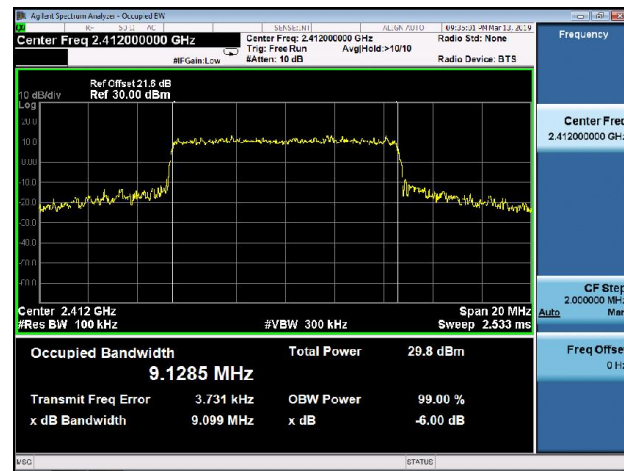

## Channel 07 (2442MHz)



## Channel 13 (2472MHz)

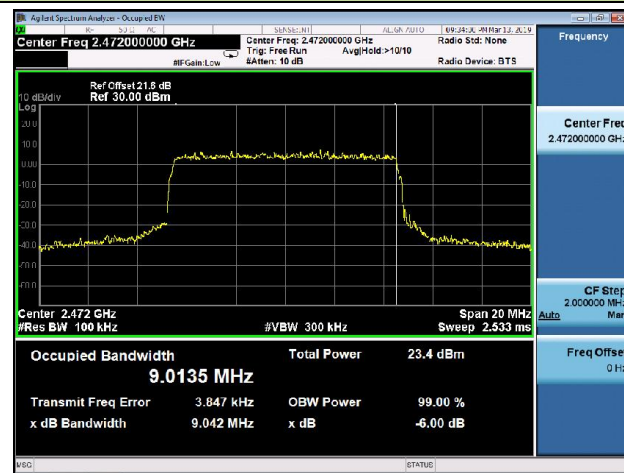

--

--

### 7.3. Output Power Measurement

#### 7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 7.3.2. Test Procedure Used


ANSI C63.10 Section 11.9.2.3.2

#### 7.3.3. Test Setting

##### Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

#### 7.3.4. Test Setup

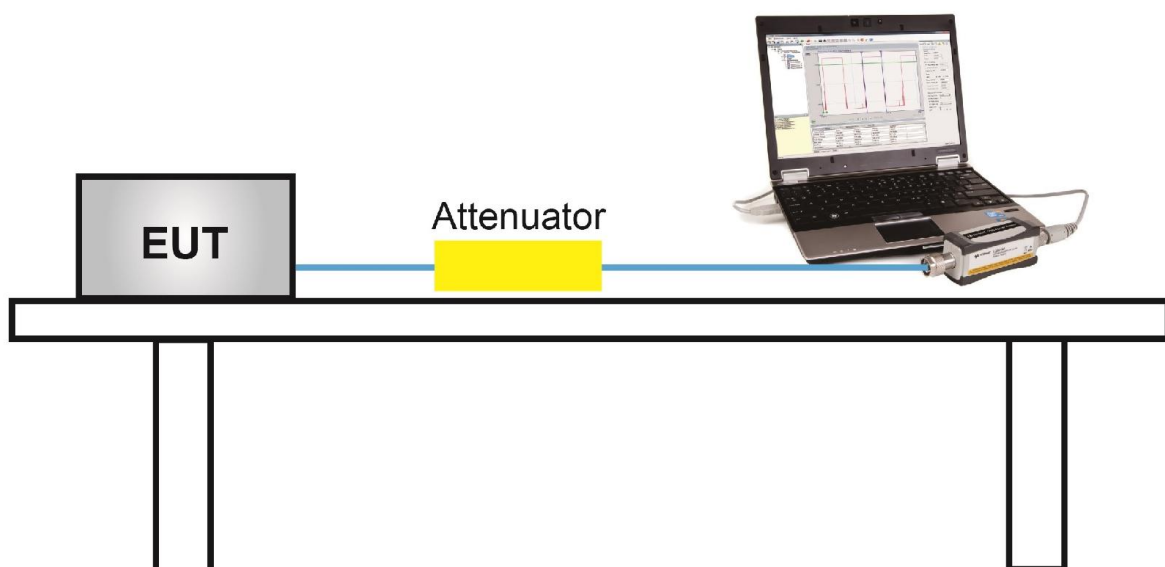

### 7.3.5.Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (Gray marker) for final test of each channel.

#### Ant 1 Output power at various data rates:

| Test Mode / Bandwidth | Channel No. | Frequency (MHz) | Data Rate  | Average Power (dBm) |
|-----------------------|-------------|-----------------|------------|---------------------|
| 10MHz                 | 7           | 2442            | 2.3 Mbps   | 20.77               |
|                       |             |                 | 6.94 Mbps  | 20.69               |
|                       |             |                 | 12 Mbps    | 20.62               |
| 2.5MHz                | 7           | 2442            | 115200kbps | 21.51               |
|                       |             |                 | --         | --                  |
|                       |             |                 | --         | --                  |

|               |                         |                   |            |
|---------------|-------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link | Temperature       | 23°C       |
| Test Engineer | Snake Ni                | Relative Humidity | 51%        |
| Test Site     | TR3                     | Test Date         | 2019/03/13 |

| Test Mode / Bandwidth | Data Rate  | Channel No. | Freq. (MHz) | Average Power (dBm) | Limit (dBm) | Result |
|-----------------------|------------|-------------|-------------|---------------------|-------------|--------|
| Ant 1                 |            |             |             |                     |             |        |
| 10MHz                 | 2.3Mbps    | 1           | 2412        | 20.65               | ≤ 30.00     | Pass   |
|                       | 2.3Mbps    | 7           | 2442        | 20.77               | ≤ 30.00     | Pass   |
|                       | 2.3Mbps    | 12          | 2467        | 20.01               | ≤ 30.00     | Pass   |
|                       | 2.3Mbps    | 13          | 2472        | 16.63               | ≤ 30.00     | Pass   |
| 2.5MHz                | 115200kbps | 1           | 2412        | 15.18               | ≤ 30.00     | Pass   |
|                       | 115200kbps | 7           | 2442        | 21.51               | ≤ 30.00     | Pass   |
|                       | 115200kbps | 12          | 2467        | 13.70               | ≤ 30.00     | Pass   |
|                       | 115200kbps | 13          | 2472        | 12.14               | ≤ 30.00     | Pass   |
| Ant 2                 |            |             |             |                     |             |        |
| 10MHz                 | 2.3Mbps    | 1           | 2412        | 21.35               | ≤ 30.00     | Pass   |
|                       | 2.3Mbps    | 7           | 2442        | 22.03               | ≤ 30.00     | Pass   |
|                       | 2.3Mbps    | 12          | 2467        | 16.45               | ≤ 30.00     | Pass   |
|                       | 2.3Mbps    | 13          | 2472        | 14.69               | ≤ 30.00     | Pass   |

## **7.4. Power Spectral Density Measurement**

### **7.4.1. Test Limit**

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


### **7.4.2. Test Procedure Used**

ANSI C63.10 Section 11.10.5

### **7.4.3. Test Setting**

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$ .
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

#### 7.4.4. Test Setup

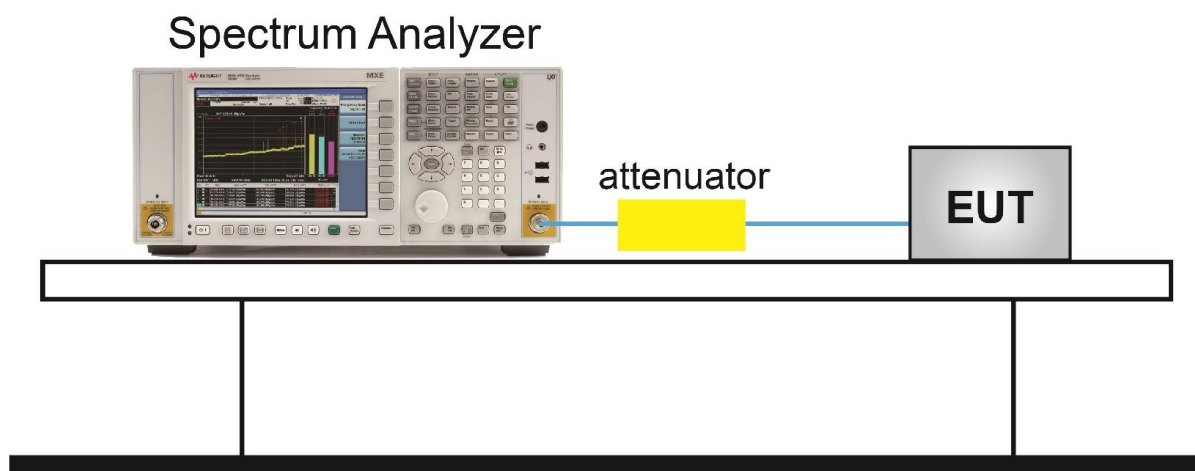

#### 7.4.5. Test Result

|               |                         |                   |            |
|---------------|-------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link | Temperature       | 23°C       |
| Test Engineer | Snake Ni                | Relative Humidity | 52%        |
| Test Site     | TR3                     | Test Date         | 2019/03/13 |

| Test Mode | Data Rate   | Channel No. | Freq. (MHz) | AVG PSD (dBm / 10kHz) | Duty Cycle (%) | Final AVG PSD (dBm / 3kHz) | Limit (dBm / 3kHz) | Result |
|-----------|-------------|-------------|-------------|-----------------------|----------------|----------------------------|--------------------|--------|
| Ant 1     |             |             |             |                       |                |                            |                    |        |
| 10MHz     | 2.3Mbps     | 1           | 2412        | -4.31                 | 99.01          | -9.54                      | ≤ 8.00             | Pass   |
|           | 2.3Mbps     | 7           | 2442        | -4.77                 | 99.01          | -10.00                     | ≤ 8.00             | Pass   |
|           | 2.3Mbps     | 13          | 2472        | -7.54                 | 99.01          | -12.77                     | ≤ 8.00             | Pass   |
| 2.5MHz    | 115200 kbps | 1           | 2412        | -5.02                 | 91.40          | -9.86                      | ≤ 8.00             | Pass   |
|           | 115200 kbps | 7           | 2442        | 1.50                  | 91.40          | -3.34                      | ≤ 8.00             | Pass   |
|           | 115200 kbps | 13          | 2472        | -7.89                 | 91.40          | -12.73                     | ≤ 8.00             | Pass   |
| Ant 2     |             |             |             |                       |                |                            |                    |        |
| 10MHz     | 2.3Mbps     | 1           | 2412        | -3.36                 | 99.01          | -8.59                      | ≤ 8.00             | Pass   |
|           | 2.3Mbps     | 7           | 2442        | -4.29                 | 99.01          | -9.52                      | ≤ 8.00             | Pass   |
|           | 2.3Mbps     | 13          | 2472        | -9.32                 | 99.01          | -14.55                     | ≤ 8.00             | Pass   |

Note: When EUT duty cycle < 98%, Final AVG PSD (dBm / 3kHz) = AVG PSD + 10\*log (1/Duty Cycle).  
When EUT duty cycle ≥ 98%, Final AVG PSD (dBm / 3kHz) = AVG PSD.

## 10MHz PSD - Ant 1

## Channel 01 (2412MHz)



## Channel 07 (2442MHz)



## Channel 13 (2472MHz)



--

--

## 2.5MHz PSD-Ant 1

## Channel 01 (2412MHz)



## Channel 07 (2442MHz)



## Channel 13 (2472MHz)



--


--

## 10MHz PSD-Ant 2


## Channel 01 (2412MHz)



## Channel 07 (2442MHz)

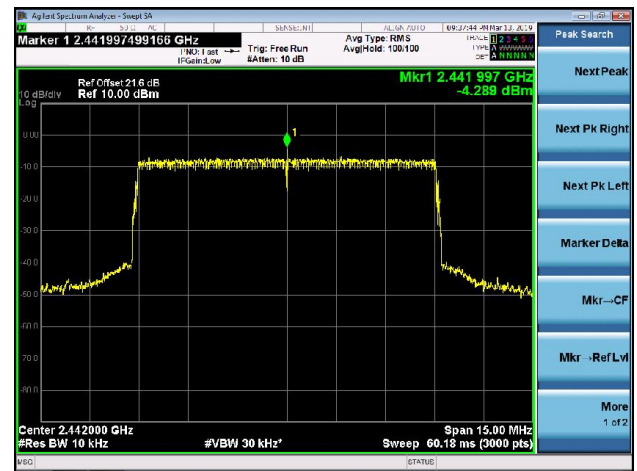

## Channel 13 (2472MHz)

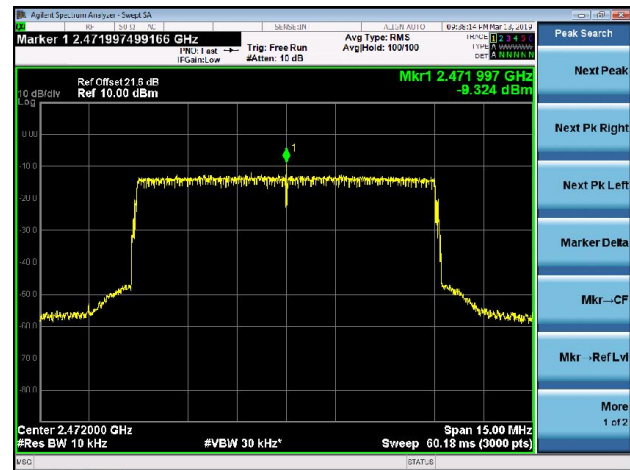

--

--

## **7.5. Conducted Band Edge and Out-of-Band Emissions**

### **7.5.1. Test Limit**

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

### **7.5.2. Test Procedure Used**

ANSI C63.10 Section 11.11

### **7.5.3. Test Setting**

#### **Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to  $\geq 1.5$  times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW  $\geq 3 \times$  RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize


#### **Emission level measurement**

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Notes

1. RBW was set to 1.3MHz rather than 100 kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100 kHz bandwidth. However, since the traces in the following plots are measured with a 1.3MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1.3MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present

### 7.5.4. Test Setup

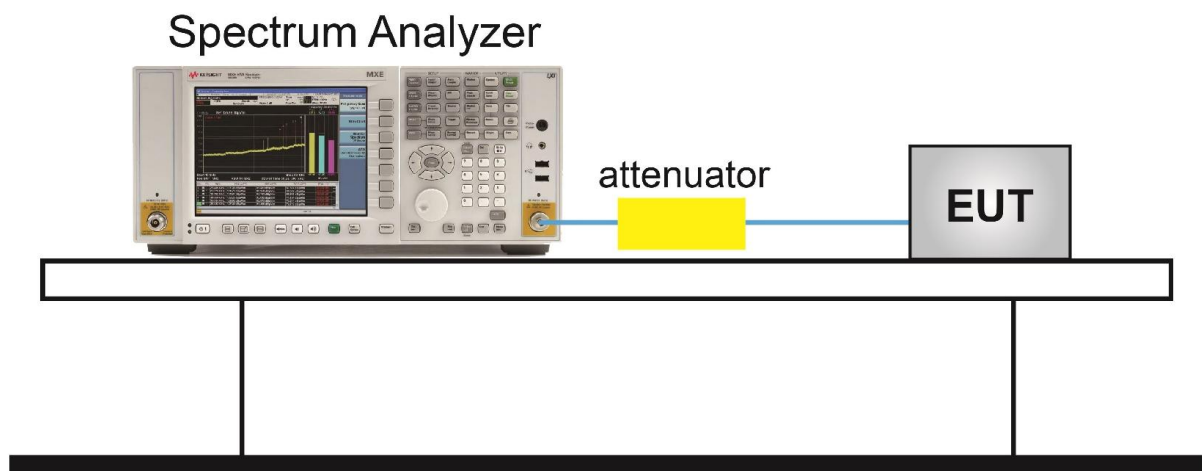

### 7.5.5.Test Result

|               |                         |                   |            |
|---------------|-------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link | Temperature       | 23°C       |
| Test Engineer | Snake Ni                | Relative Humidity | 52%        |
| Test Site     | TR3                     | Test Date         | 2019/03/13 |

| Test Mode / Bandwidth | Data Rate  | Channel No. | Frequency (MHz) | Limit | Result |
|-----------------------|------------|-------------|-----------------|-------|--------|
| Ant 1                 |            |             |                 |       |        |
| 10MHz                 | 2.3Mbps    | 01          | 2412            | 30dBc | Pass   |
| 10MHz                 | 2.3Mbps    | 07          | 2442            | 30dBc | Pass   |
| 10MHz                 | 2.3Mbps    | 13          | 2472            | 30dBc | Pass   |
| 2.5MHz                | 115200kbps | 01          | 2412            | 30dBc | Pass   |
| 2.5MHz                | 115200kbps | 07          | 2442            | 30dBc | Pass   |
| 2.5MHz                | 115200kbps | 13          | 2472            | 30dBc | Pass   |
| Ant 2                 |            |             |                 |       |        |
| 10MHz                 | 2.3Mbps    | 01          | 2412            | 30dBc | Pass   |
| 10MHz                 | 2.3Mbps    | 07          | 2442            | 30dBc | Pass   |
| 10MHz                 | 2.3Mbps    | 13          | 2472            | 30dBc | Pass   |

## 10MHz Out-of-Band Emissions - Ant 1

## Channel 01 (2412MHz)


## 100kHz PSD reference Level



## Low Band Edge



## Spurious Emission

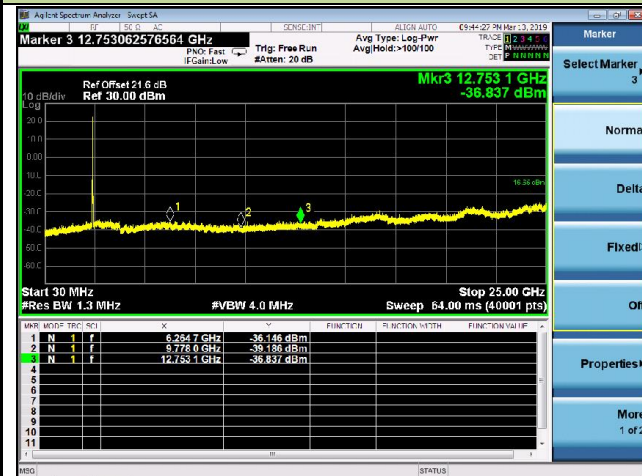

--


--

## Channel 07 (2442MHz)

## 100kHz PSD reference Level



## Spurious Emission

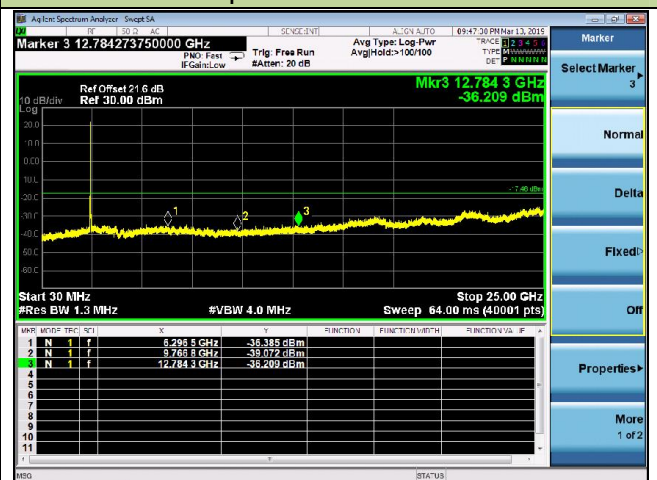

## Channel 13 (2472MHz)


## 100kHz PSD reference Level



## High Band Edge



## Spurious Emission

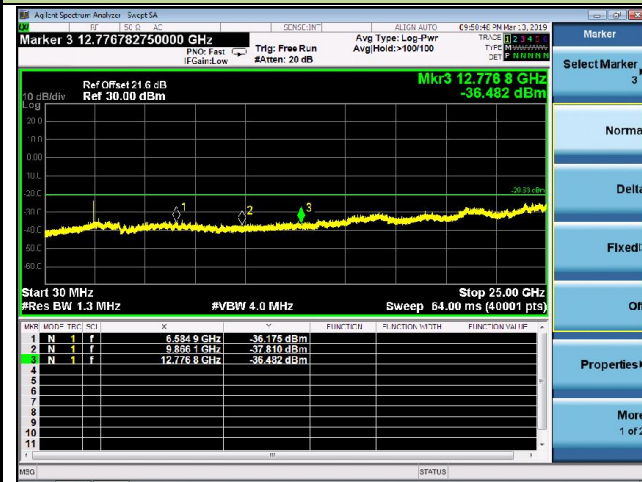

--

--

## 2.5MHz Out-of-Band Emissions - Ant 1

## Channel 01 (2412MHz)


## 100kHz PSD reference Level



## Low Band Edge



## Spurious Emission

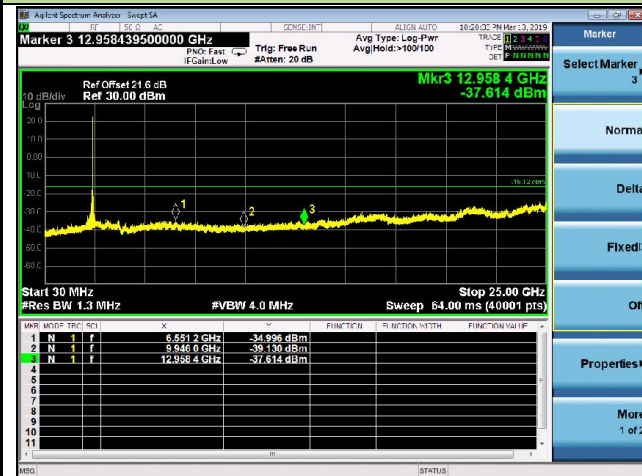


--


--

## Channel 07 (2442MHz)

## 100kHz PSD reference Level

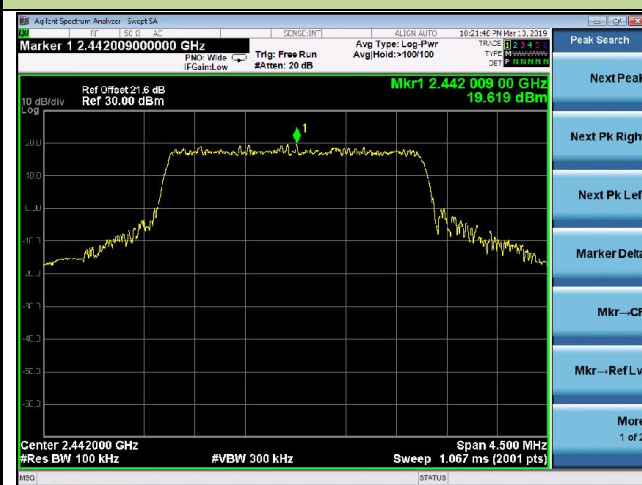

## Spurious Emission

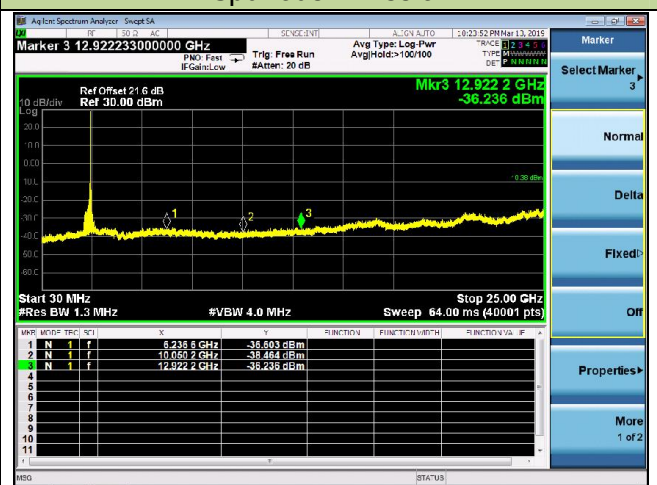


## Channel 13 (2472MHz)


## 100kHz PSD reference Level



## High Band Edge

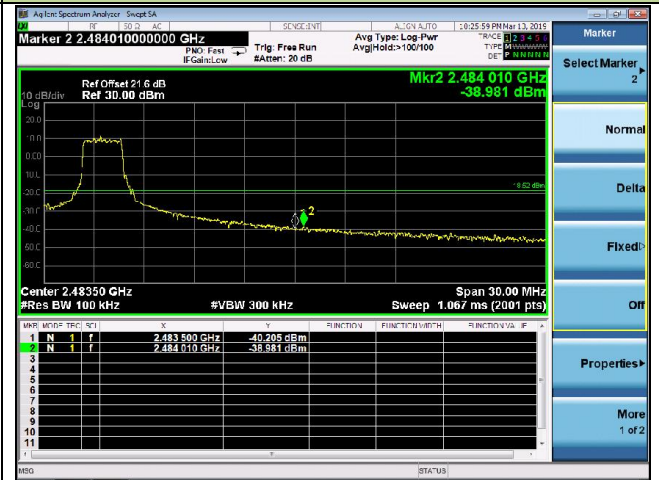

## Spurious Emission

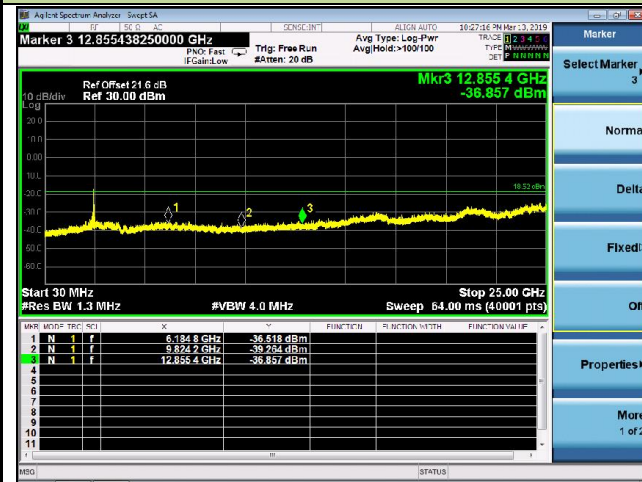

--

--

## 10MHz Out-of-Band Emissions - Ant 2

## Channel 01 (2412MHz)


## 100kHz PSD reference Level



## Low Band Edge



## Spurious Emission

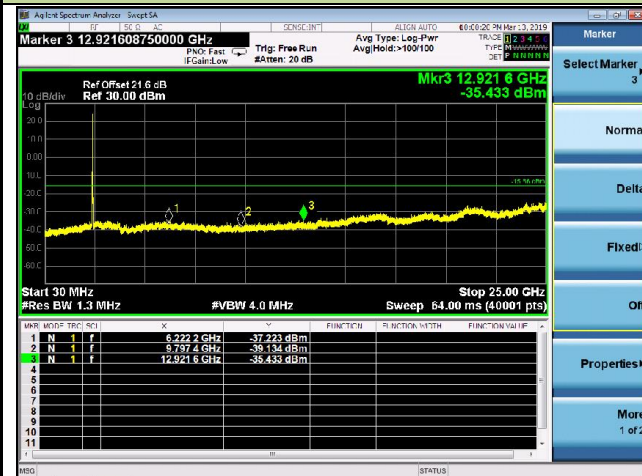


--


--

## Channel 07 (2442MHz)

## 100kHz PSD reference Level

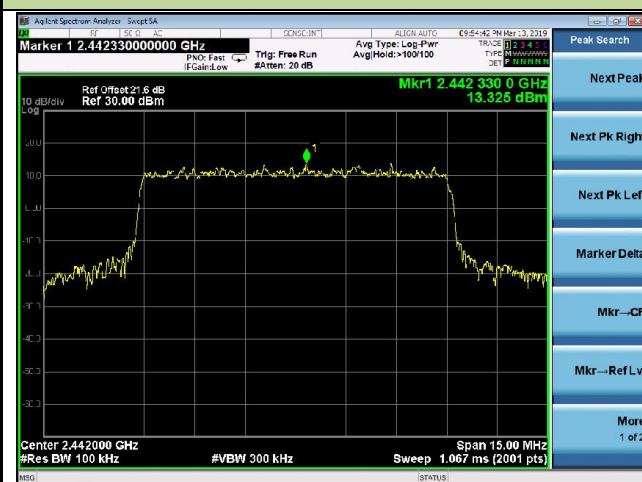

## Spurious Emission

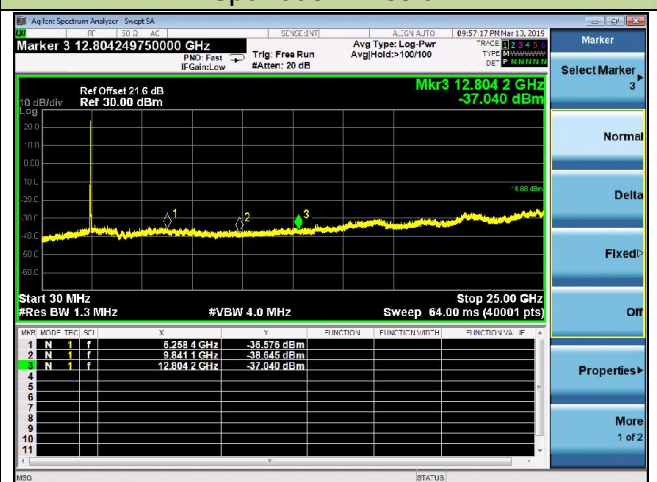


## Channel 13 (2472MHz)


## 100kHz PSD reference Level



## High Band Edge

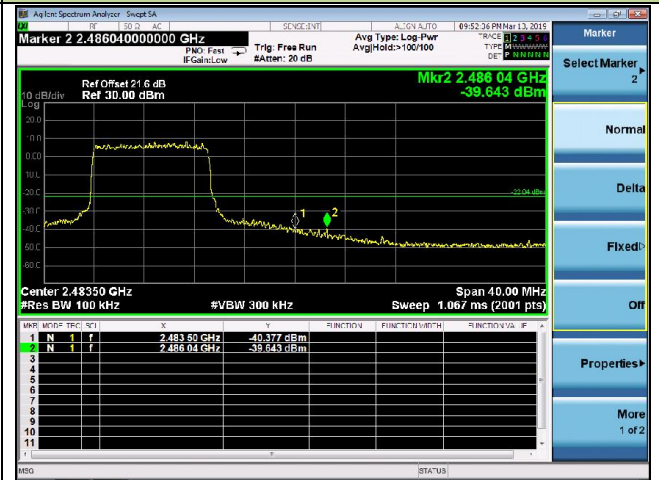

## Spurious Emission

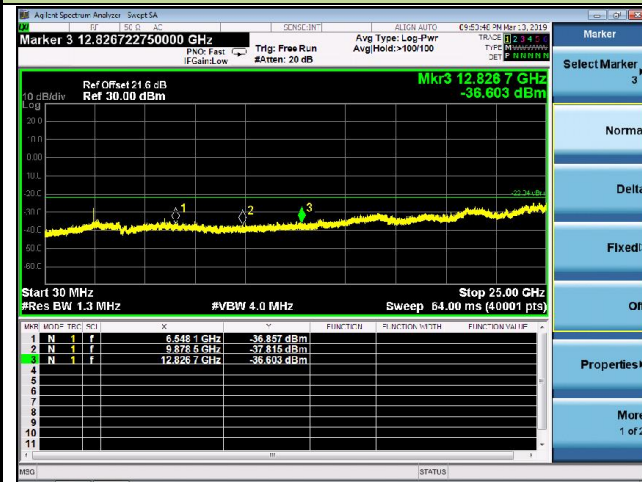

--

--

## 7.6. Radiated Spurious Emission Measurement

### 7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 7.6.3. Test Setting

#### Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak or average
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Table 1 - RBW as a function of frequency**

| Frequency     | RBW           |
|---------------|---------------|
| 9 ~ 150 kHz   | 200 ~ 300 Hz  |
| 0.15 ~ 30 MHz | 9 ~ 10 kHz    |
| 30 ~ 1000 MHz | 100 ~ 120 kHz |

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Average Measurements above 1GHz (Method VB)**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### 7.6.4.Test Setup

##### Below 1GHz Test Setup:

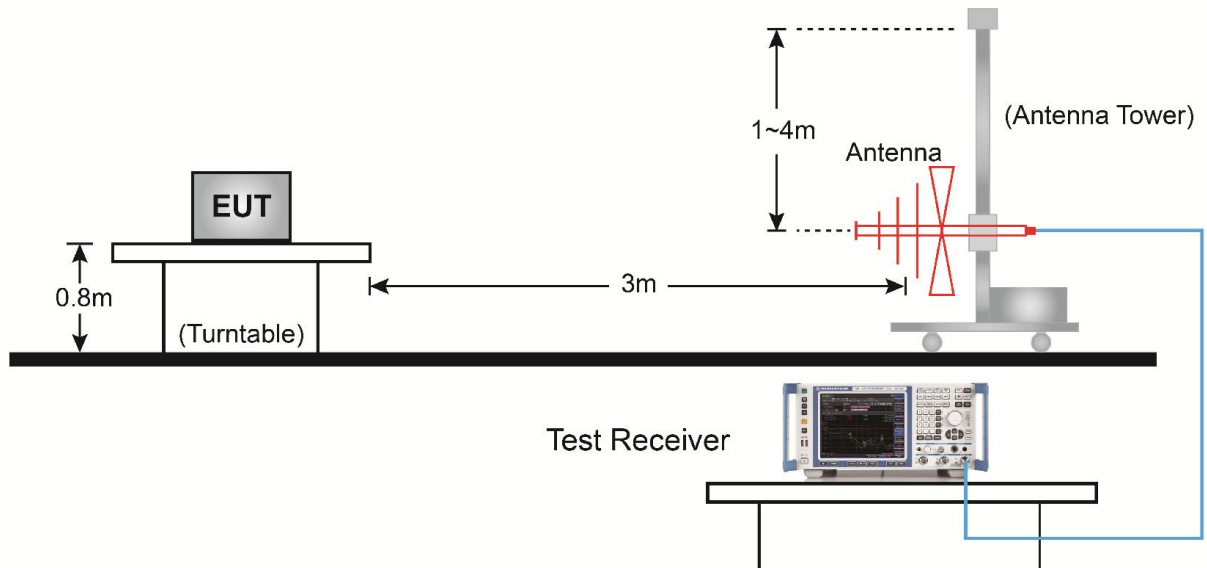

##### Above 1GHz Test Setup:

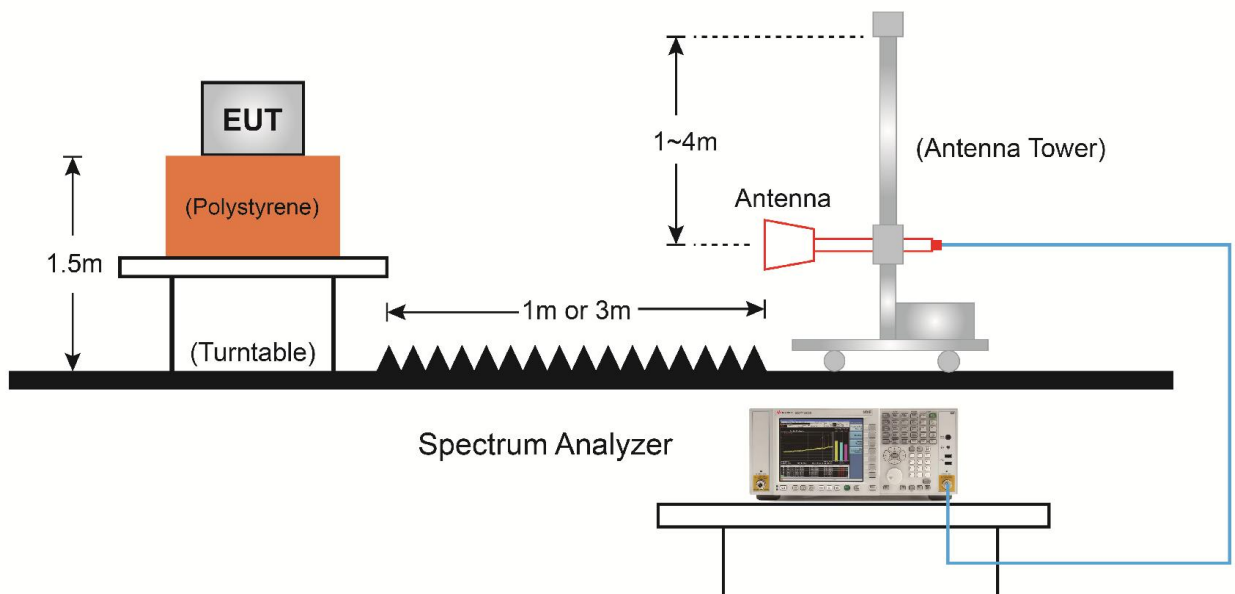

### 7.6.5. Test Result

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 10MHz Bandwidth - Ant 1                                                                                                                                                           | Test Channel:     | 01         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3796.5          | 39.3                 | 2.7         | 42.1                   | 74.0           | -31.9       | Peak     | Horizontal   |
|      | 4825.0          | 41.1                 | 5.9         | 46.9                   | 74.0           | -27.1       | Peak     | Horizontal   |
| *    | 7239.0          | 55.0                 | 12.7        | 67.7                   | 91.0           | -23.3       | Peak     | Horizontal   |
| *    | 9644.5          | 48.1                 | 15.5        | 63.5                   | 91.0           | -27.5       | Peak     | Horizontal   |
|      | 4825.0          | 44.3                 | 5.9         | 50.2                   | 74.0           | -23.8       | Peak     | Vertical     |
| *    | 7239.0          | 61.3                 | 12.7        | 74.0                   | 91.0           | -17.0       | Peak     | Vertical     |
|      | 7443.0          | 37.6                 | 12.9        | 50.5                   | 74.0           | -23.5       | Peak     | Vertical     |
| *    | 9644.5          | 52.0                 | 15.5        | 67.5                   | 91.0           | -23.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (121.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 10MHz Bandwidth - Ant 1                                                                                                                                                           | Test Channel:     | 07         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 5403.0          | 37.7                 | 6.6         | 44.3                   | 74.0           | -29.7       | Peak     | Horizontal   |
| *    | 5598.5          | 42.0                 | 7.0         | 49.0                   | 90.8           | -41.8       | Peak     | Horizontal   |
|      | 7324.0          | 46.8                 | 12.6        | 59.5                   | 74.0           | -14.5       | Peak     | Horizontal   |
|      | 7326.0          | 35.3                 | 12.6        | 47.9                   | 54.0           | -6.1        | Average  | Horizontal   |
| *    | 9772.0          | 45.7                 | 16.2        | 61.8                   | 90.8           | -29.0       | Peak     | Horizontal   |
|      | 4884.5          | 40.8                 | 6.0         | 46.8                   | 74.0           | -27.2       | Peak     | Vertical     |
| *    | 5598.5          | 52.5                 | 7.0         | 59.5                   | 90.8           | -31.3       | Peak     | Vertical     |
|      | 7324.0          | 56.3                 | 12.6        | 68.9                   | 74.0           | -5.1        | Peak     | Vertical     |
|      | 7326.0          | 40.8                 | 12.6        | 53.4                   | 54.0           | -0.6        | Average  | Vertical     |
| *    | 9772.0          | 45.1                 | 16.2        | 61.3                   | 90.8           | -29.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (120.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 10MHz Bandwidth - Ant 1                                                                                                                                                           | Test Channel:     | 13         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4884.5          | 37.7                 | 6.0         | 43.7                   | 74.0           | -30.3       | Peak     | Horizontal   |
| *    | 5590.0          | 47.2                 | 7.0         | 54.2                   | 86.2           | -32.0       | Peak     | Horizontal   |
|      | 7409.0          | 45.1                 | 12.6        | 57.6                   | 74.0           | -16.4       | Peak     | Horizontal   |
|      | 7416.2          | 31.0                 | 12.7        | 43.6                   | 54.0           | -10.4       | Average  | Horizontal   |
| *    | 9891.0          | 45.0                 | 16.6        | 61.6                   | 86.2           | -24.6       | Peak     | Horizontal   |
|      | 4944.0          | 42.9                 | 6.1         | 48.9                   | 74.0           | -25.1       | Peak     | Vertical     |
| *    | 5590.0          | 54.9                 | 7.0         | 61.9                   | 86.2           | -24.3       | Peak     | Vertical     |
|      | 7416.3          | 39.8                 | 12.7        | 52.5                   | 54.0           | -1.5        | Average  | Vertical     |
|      | 7417.5          | 56.8                 | 12.7        | 69.5                   | 74.0           | -4.5        | Peak     | Vertical     |
| *    | 9891.0          | 49.2                 | 16.6        | 65.7                   | 86.2           | -20.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (116.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 2.5MHz Bandwidth - Ant 1                                                                                                                                                          | Test Channel:     | 01         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 3805.0          | 39.0                 | 2.8         | 41.8                   | 74.0           | -32.2       | Peak     | Horizontal   |
| *    | 5658.0          | 49.4                 | 7.0         | 56.4                   | 88.2           | -31.8       | Peak     | Horizontal   |
|      | 8488.5          | 36.7                 | 12.8        | 49.4                   | 74.0           | -24.6       | Peak     | Horizontal   |
| *    | 10511.5         | 35.5                 | 17.6        | 53.0                   | 88.2           | -35.2       | Peak     | Horizontal   |
|      | 4825.0          | 41.1                 | 5.9         | 47.0                   | 74.0           | -27.0       | Peak     | Vertical     |
| *    | 5658.0          | 62.1                 | 7.0         | 69.2                   | 88.2           | -19.0       | Peak     | Vertical     |
| *    | 7222.0          | 46.2                 | 12.7        | 58.8                   | 88.2           | -29.4       | Peak     | Vertical     |
|      | 11319.0         | 38.2                 | 17.6        | 55.8                   | 74.0           | -18.2       | Peak     | Vertical     |
|      | 11319.0         | 29.7                 | 17.6        | 47.3                   | 54.0           | -6.8        | Average  | Vertical     |

Note 1: “\*” is not in restricted band, its limit is 30dBc of the fundamental emission level (118.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 2.5MHz Bandwidth - Ant 1                                                                                                                                                          | Test Channel:     | 07         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4884.5          | 40.5                 | 6.0         | 46.4                   | 74.0           | -27.6       | Peak     | Horizontal   |
| *    | 5666.5          | 53.9                 | 7.0         | 61.0                   | 87.2           | -26.2       | Peak     | Horizontal   |
|      | 7315.5          | 37.1                 | 12.6        | 49.6                   | 74.0           | -24.4       | Peak     | Horizontal   |
| *    | 9755.0          | 36.8                 | 16.2        | 53.0                   | 87.2           | -34.2       | Peak     | Horizontal   |
|      | 4884.3          | 38.6                 | 6.0         | 44.5                   | 54.0           | -9.5        | Average  | Vertical     |
|      | 4884.5          | 51.5                 | 6.0         | 57.4                   | 74.0           | -16.6       | Peak     | Vertical     |
|      | 5675.0          | 62.3                 | 7.1         | 69.4                   | 87.2           | -17.8       | Peak     | Vertical     |
| *    | 7324.0          | 46.2                 | 12.6        | 58.9                   | 74.0           | -15.1       | Peak     | Vertical     |
|      | 7326.0          | 31.2                 | 12.6        | 43.8                   | 54.0           | -10.2       | Average  | Vertical     |
| *    | 9755.0          | 42.1                 | 16.2        | 58.3                   | 87.2           | -28.9       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (117.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 2.5MHz Bandwidth - Ant 1                                                                                                                                                          | Test Channel:     | 13         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 5658.0          | 55.2                 | 7.0         | 62.2                   | 85.0           | -22.8       | Peak     | Horizontal   |
|      | 7723.5          | 36.3                 | 12.8        | 49.1                   | 74.0           | -24.9       | Peak     | Horizontal   |
| *    | 8097.5          | 36.3                 | 13.5        | 49.9                   | 74.0           | -24.1       | Peak     | Horizontal   |
| *    | 9874.0          | 36.5                 | 16.8        | 53.3                   | 85.0           | -31.7       | Peak     | Horizontal   |
|      | 4944.0          | 43.4                 | 6.1         | 49.4                   | 74.0           | -24.6       | Peak     | Vertical     |
|      | 5666.5          | 62.5                 | 7.0         | 69.5                   | 85.0           | -15.5       | Peak     | Vertical     |
| *    | 7409.0          | 39.4                 | 12.6        | 52.0                   | 74.0           | -22.0       | Peak     | Vertical     |
| *    | 9874.0          | 41.9                 | 16.8        | 58.7                   | 85.0           | -26.3       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (115.0dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 10MHz Bandwidth - Ant 2                                                                                                                                                           | Test Channel:     | 01         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4825.0          | 41.0                 | 5.9         | 46.8                   | 74.0           | -27.2       | Peak     | Horizontal   |
| *    | 7239.0          | 54.0                 | 12.7        | 66.7                   | 86.5           | -19.8       | Peak     | Horizontal   |
|      | 9644.5          | 46.4                 | 15.5        | 61.9                   | 86.5           | -24.6       | Peak     | Horizontal   |
| *    | 12058.5         | 40.7                 | 17.5        | 58.1                   | 74.0           | -15.9       | Peak     | Horizontal   |
|      | 12060.5         | 29.0                 | 17.5        | 46.4                   | 54.0           | -7.6        | Average  | Horizontal   |
|      | 4816.5          | 46.8                 | 5.9         | 52.7                   | 74.0           | -21.3       | Peak     | Vertical     |
|      | 7239.0          | 60.0                 | 12.7        | 72.7                   | 86.5           | -13.8       | Peak     | Vertical     |
| *    | 9644.5          | 51.1                 | 15.5        | 66.6                   | 86.5           | -19.9       | Peak     | Vertical     |
| *    | 10885.5         | 34.6                 | 18.1        | 52.8                   | 74.0           | -21.2       | Peak     | Vertical     |

Note 1: “\*” is not in restricted band, its limit is 30dBc of the fundamental emission level (116.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 10MHz Bandwidth - Ant 2                                                                                                                                                           | Test Channel:     | 07         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4884.5          | 39.0                 | 6.0         | 45.0                   | 74.0           | -29.0       | Peak     | Horizontal   |
|      | 5607.0          | 42.6                 | 7.0         | 49.6                   | 85.8           | -36.2       | Peak     | Horizontal   |
|      | 7326.1          | 37.5                 | 12.6        | 50.1                   | 54.0           | -3.9        | Average  | Horizontal   |
| *    | 7332.5          | 46.2                 | 12.6        | 58.8                   | 74.0           | -15.2       | Peak     | Horizontal   |
| *    | 9763.5          | 44.8                 | 16.2        | 61.0                   | 85.8           | -24.8       | Peak     | Horizontal   |
|      | 4884.5          | 41.4                 | 6.0         | 47.4                   | 74.0           | -26.6       | Peak     | Vertical     |
|      | 5615.5          | 49.9                 | 7.0         | 56.9                   | 85.8           | -28.9       | Peak     | Vertical     |
|      | 7326.1          | 40.8                 | 12.6        | 53.4                   | 54.0           | -0.6        | Average  | Vertical     |
| *    | 7332.5          | 55.7                 | 12.6        | 68.4                   | 74.0           | -5.6        | Peak     | Vertical     |
| *    | 9772.0          | 45.1                 | 16.2        | 61.3                   | 85.8           | -24.5       | Peak     | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (115.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/11 |
| Test Mode:    | 10MHz Bandwidth - Ant 2                                                                                                                                                           | Test Channel:     | 13         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4876.0          | 36.9                 | 6.0         | 42.9                   | 74.0           | -31.1       | Peak     | Horizontal   |
|      | 5607.0          | 43.9                 | 7.0         | 50.9                   | 82.2           | -31.3       | Peak     | Horizontal   |
| *    | 7417.5          | 41.0                 | 12.7        | 53.7                   | 74.0           | -20.3       | Peak     | Horizontal   |
| *    | 9891.0          | 43.8                 | 16.6        | 60.4                   | 82.2           | -21.8       | Peak     | Horizontal   |
|      | 5598.5          | 54.0                 | 7.0         | 61.0                   | 82.2           | -21.2       | Peak     | Vertical     |
|      | 7416.5          | 35.2                 | 12.7        | 47.9                   | 54.0           | -6.1        | Average  | Vertical     |
|      | 7417.5          | 48.8                 | 12.7        | 61.5                   | 74.0           | -12.5       | Peak     | Vertical     |
| *    | 9891.0          | 48.0                 | 16.6        | 64.5                   | 82.2           | -17.7       | Peak     | Vertical     |
| *    | 11208.5         | 38.2                 | 17.6        | 55.8                   | 74.0           | -18.2       | Peak     | Vertical     |
|      | 11208.5         | 29.7                 | 17.6        | 47.2                   | 54.0           | -6.8        | Average  | Vertical     |

Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (112.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|               |                                                                                                                                                                                   |                   |            |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|
| Product       | 2.4GHz HD Wireless Link                                                                                                                                                           | Temperature       | 26°C       |
| Test Engineer | Dandy Li                                                                                                                                                                          | Relative Humidity | 56%        |
| Test Site     | AC1                                                                                                                                                                               | Test Date         | 2019/03/15 |
| Test Mode:    | 10MHz Bandwidth - Ant 1<br>(Model: WLN210-BM-c)                                                                                                                                   | Test Channel:     | 07         |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report. |                   |            |

| Mark | Frequency (MHz) | Reading Level (dBμV) | Factor (dB) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|------|-----------------|----------------------|-------------|------------------------|----------------|-------------|----------|--------------|
|      | 4884.5          | 42.1                 | 6.0         | 48.1                   | 74.0           | -25.9       | Peak     | Horizontal   |
| *    | 5607.0          | 46.6                 | 7.0         | 53.6                   | 90.8           | -37.2       | Peak     | Horizontal   |
|      | 7324.0          | 45.3                 | 12.6        | 57.9                   | 74.0           | -16.1       | Peak     | Horizontal   |
|      | 7325.9          | 32.9                 | 12.6        | 45.5                   | 54.0           | -8.5        | Average  | Horizontal   |
| *    | 9772.0          | 42.8                 | 16.2        | 59.0                   | 90.8           | -31.8       | Peak     | Horizontal   |
|      | 4884.5          | 43.0                 | 6.0         | 49.0                   | 74.0           | -25.0       | Peak     | Horizontal   |
| *    | 5598.5          | 50.2                 | 7.0         | 57.2                   | 90.8           | -33.6       | Peak     | Vertical     |
|      | 7324.0          | 53.4                 | 12.6        | 66.0                   | 74.0           | -8.0        | Peak     | Vertical     |
|      | 7326.5          | 40.0                 | 12.6        | 52.6                   | 54.0           | -1.4        | Average  | Vertical     |
| *    | 9763.5          | 47.5                 | 16.2        | 63.7                   | 90.8           | -27.1       | Peak     | Vertical     |
|      | 11200.7         | 26.2                 | 17.6        | 43.8                   | 54.0           | -10.2       | Average  | Vertical     |
|      | 11217.0         | 37.7                 | 17.6        | 55.3                   | 74.0           | -18.7       | Peak     | Vertical     |


Note 1: "\*" is not in restricted band, its limit is 30dBc of the fundamental emission level (120.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The worst case of Radiated Emission below 1GHz:

|                                                                              |                          |
|------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                    | Time: 2019/02/27 - 23:26 |
| Limit: FCC_Part15.109_RE(3m)_ClassB                                          | Engineer: Cloud Guo      |
| Probe: VULB 9168 _20-2000MHz                                                 | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                                 | Power: DC 5V             |
| <b>Test Mode: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

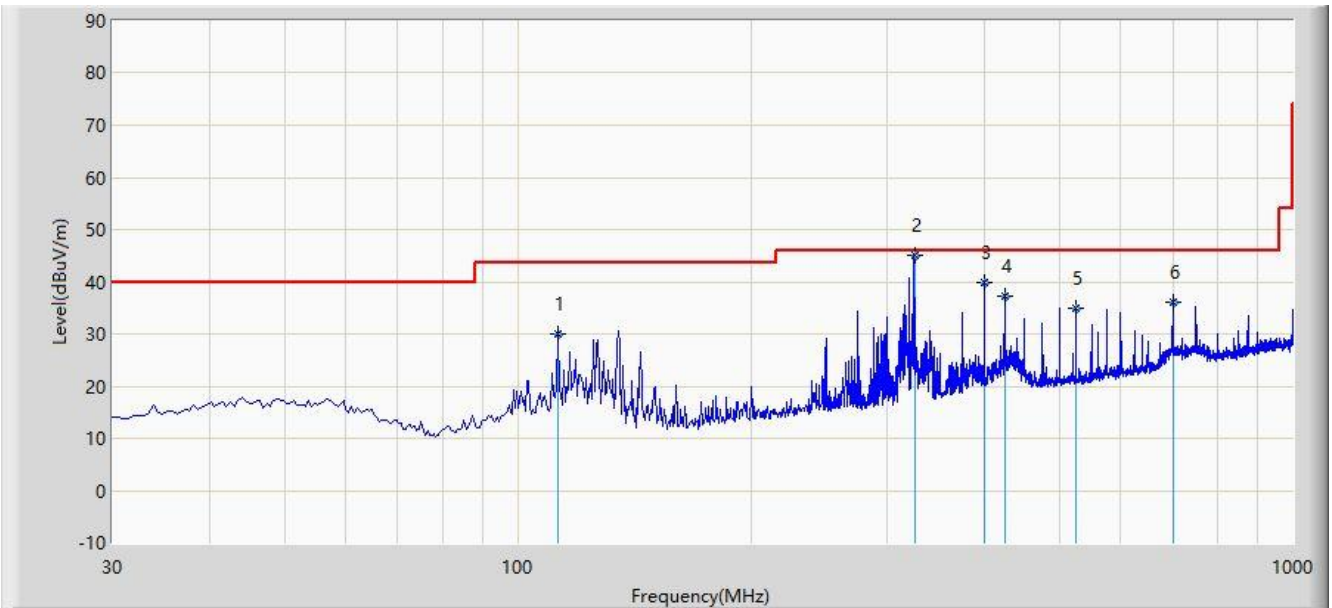


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | *    | 112.935         | 29.963                 | 18.463               | -13.537         | 43.500         | 11.500      | QP   |
| 2  |      |      | 325.000         | 44.937                 | 29.420               | -1.063          | 46.000         | 15.516      | QP   |
| 3  |      |      | 400.055         | 39.985                 | 25.010               | -6.015          | 46.000         | 14.975      | QP   |
| 4  |      |      | 424.790         | 37.256                 | 21.980               | -8.744          | 46.000         | 15.276      | QP   |
| 5  |      |      | 525.185         | 34.983                 | 18.310               | -11.017         | 46.000         | 16.673      | QP   |
| 6  |      |      | 699.785         | 35.976                 | 16.740               | -10.024         | 46.000         | 19.236      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

|                                                                              |                          |
|------------------------------------------------------------------------------|--------------------------|
| Site: AC1                                                                    | Time: 2019/02/27 - 23:32 |
| Limit: FCC_Part15.109_RE(3m)_ClassB                                          | Engineer: Cloud Guo      |
| Probe: VULB 9168 _20-2000MHz                                                 | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                                 | Power: DC 5V             |
| <b>Test Mode: There is the worst case within frequency range 30MHz~1GHz.</b> |                          |

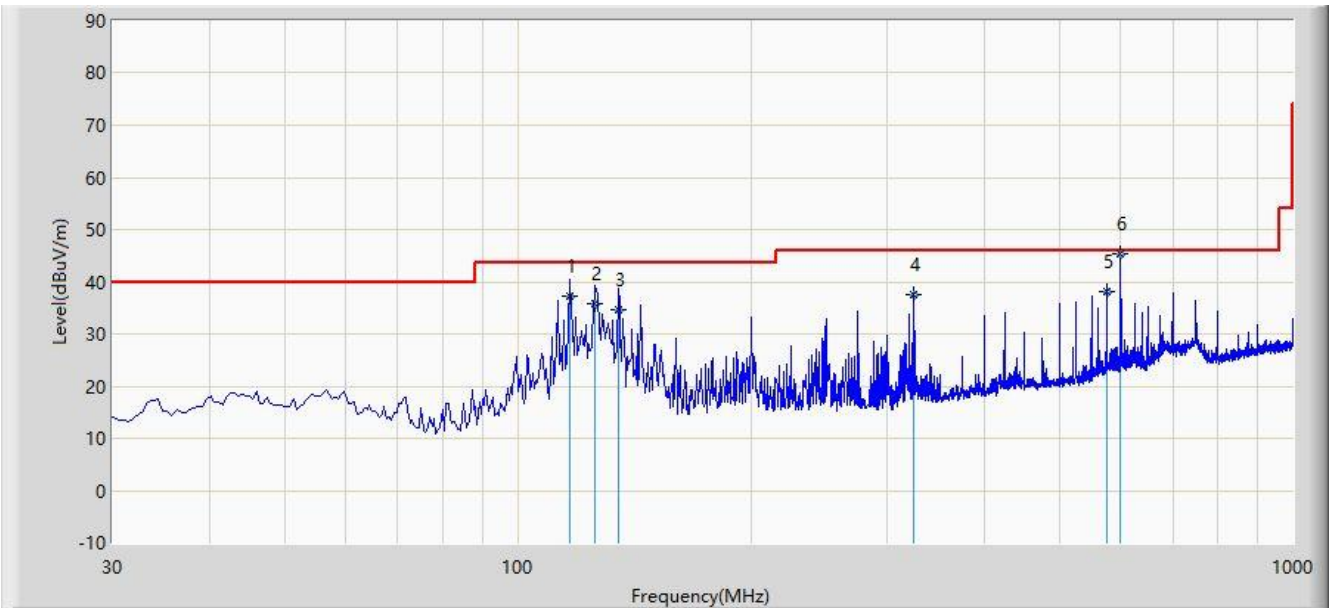

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      |      | 116.815         | 37.348                 | 26.511               | -6.152          | 43.500         | 10.837      | QP   |
| 2  |      |      | 126.030         | 35.780                 | 26.340               | -7.720          | 43.500         | 9.440       | QP   |
| 3  |      |      | 134.760         | 34.610                 | 25.890               | -8.890          | 43.500         | 8.720       | QP   |
| 4  |      |      | 324.880         | 37.599                 | 23.950               | -8.401          | 46.000         | 13.649      | QP   |
| 5  |      |      | 575.140         | 38.142                 | 20.590               | -7.858          | 46.000         | 17.552      | QP   |
| 6  |      | *    | 600.000         | 45.299                 | 24.850               | -0.701          | 46.000         | 20.449      | QP   |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

## 7.7. Radiated Restricted Band Edge Measurement

### 7.7.1. Test Limit

#### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz)  | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|---------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410        | 4.5 - 5.15         |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614          | 5.35 - 5.46        |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240         | 7.25 - 7.75        |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5      | 9.0 - 9.2          |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5    | 9.3 - 9.5          |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710        | 10.6 - 12.7        |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2    | 13.25 - 13.4       |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300        | 14.47 - 14.5       |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390        | 15.35 - 16.2       |
| 8.362 - 8.366              | 156.52475 - 156.525 | 2483.5 - 2500      | 17.7 - 21.4        |
| 8.37625 - 8.38675          | 156.7 - 156.9       | 2690 - 2900        | 22.01 - 23.12      |
| 8.41425 - 8.41475          | 162.0125 - 167.17   | 3260 - 3267        | 23.6 - 24.0        |
| 12.29 - 12.293             | 167.72 - 173.2      | 3332 - 3339        | 31.2 - 31.8        |
| 12.51975 - 12.52025        | 240 - 285           | 3345.8 - 3358      | 36.43 - 36.5       |
| 12.57675 - 12.57725        | 322 - 335.4         | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36 - 13.41              | --                  | --                 | --                 |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.7.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

### 7.7.3.Test Setting

#### Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.

If the EUT duty cycle is  $< 98\%$ , set  $VBW \geq 1/T$ . T is the minimum transmission duration.


4. Detector = Peak

5. Sweep time = auto

6. Trace mode = max hold


7. Trace was allowed to stabilize

#### 7.7.4.Test Setup

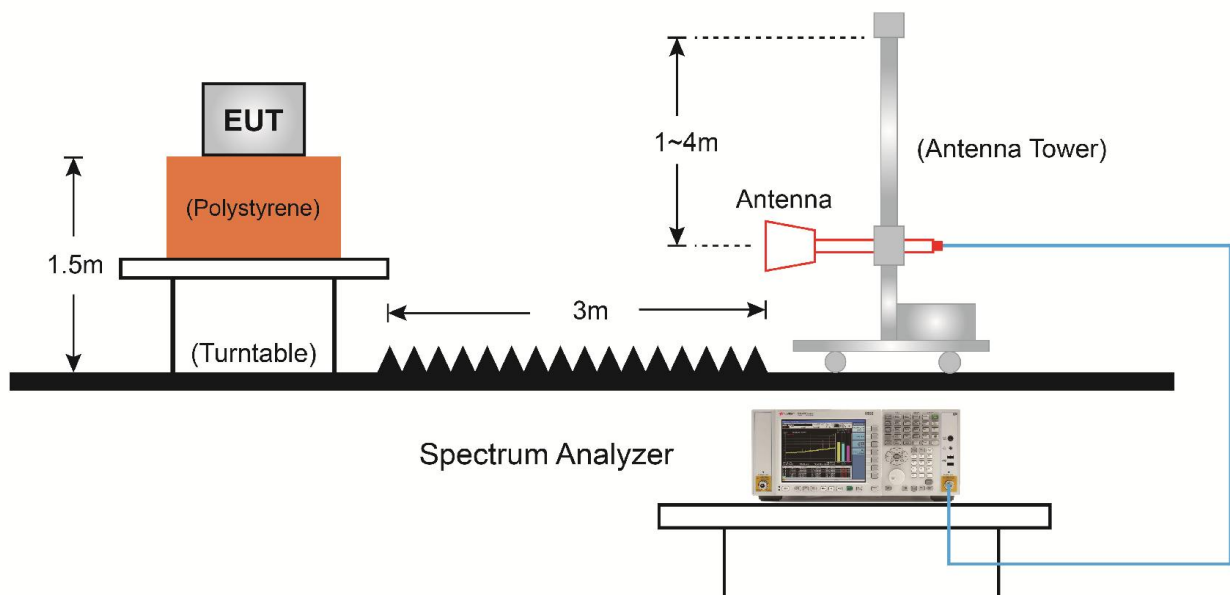

### 7.7.5.Test Result

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:10 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

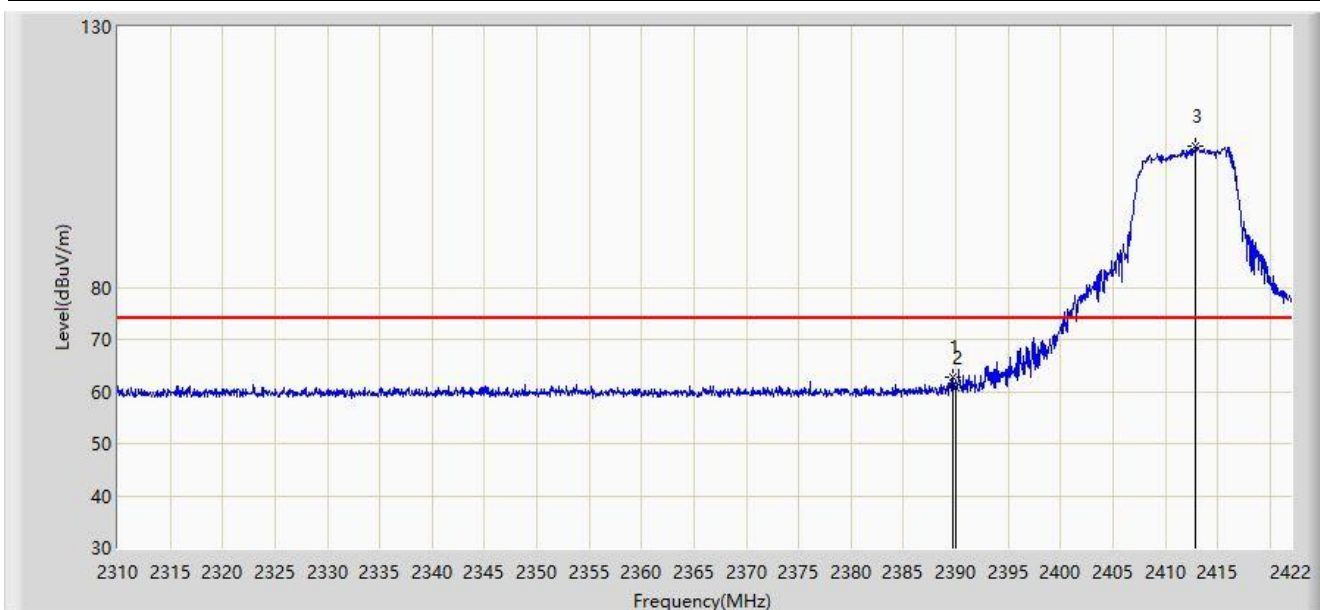


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.744        | 62.731                 | 30.404               | -11.269     | 74.000         | 32.327      | PK   |
| 2  |      |      | 2390.000        | 60.724                 | 28.397               | -13.276     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2412.928        | 107.074                | 74.790               | N/A         | N/A            | 32.285      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:10 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

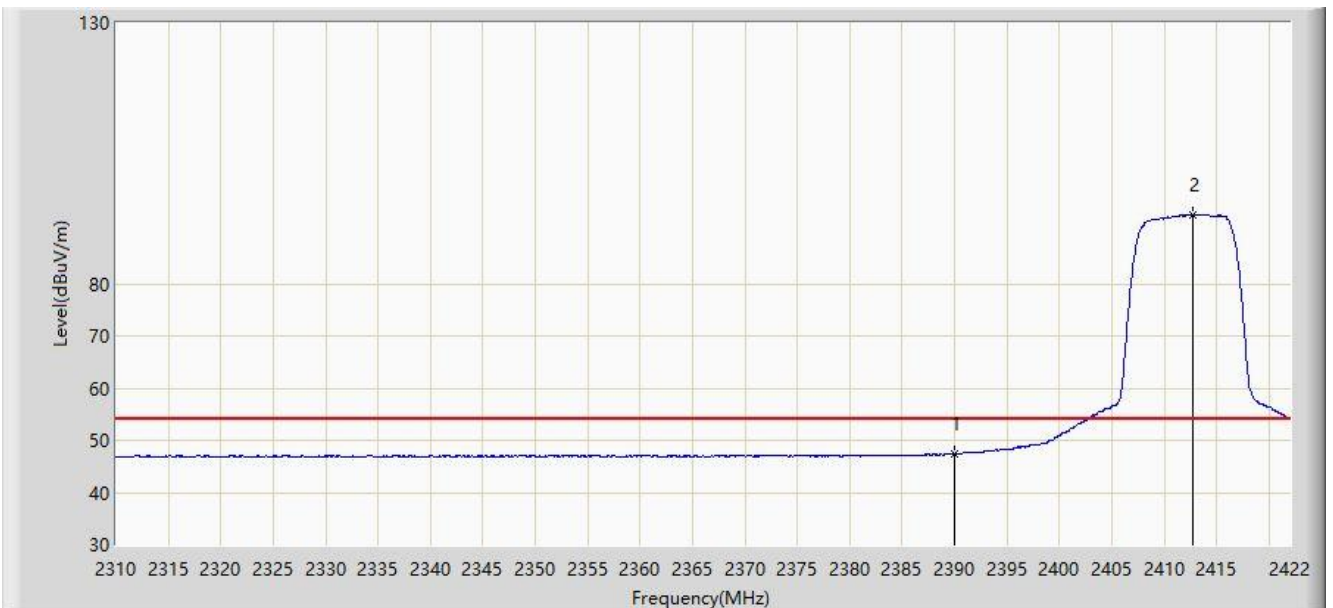


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.413                 | 15.086               | -6.587      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2412.704        | 93.228                 | 60.943               | N/A         | N/A            | 32.284      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:10 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

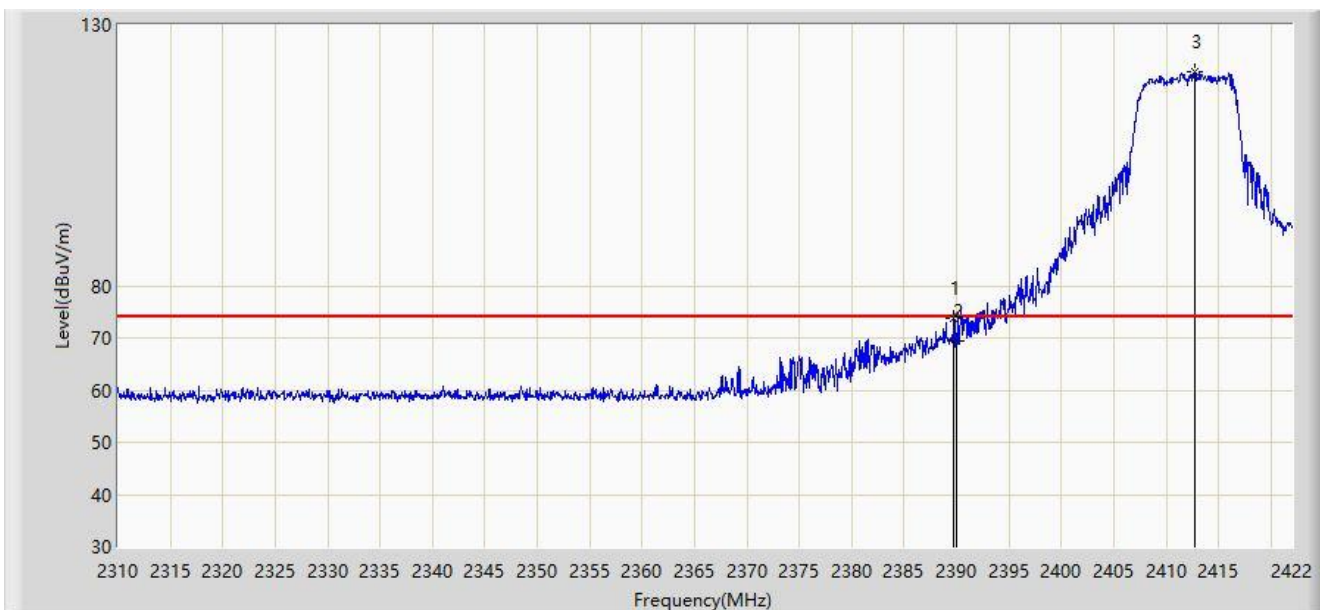


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.744        | 73.665                 | 41.338               | -0.335      | 74.000         | 32.327      | PK   |
| 2  |      |      | 2390.000        | 69.517                 | 37.190               | -4.483      | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2412.760        | 121.036                | 88.751               | N/A         | N/A            | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:10 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

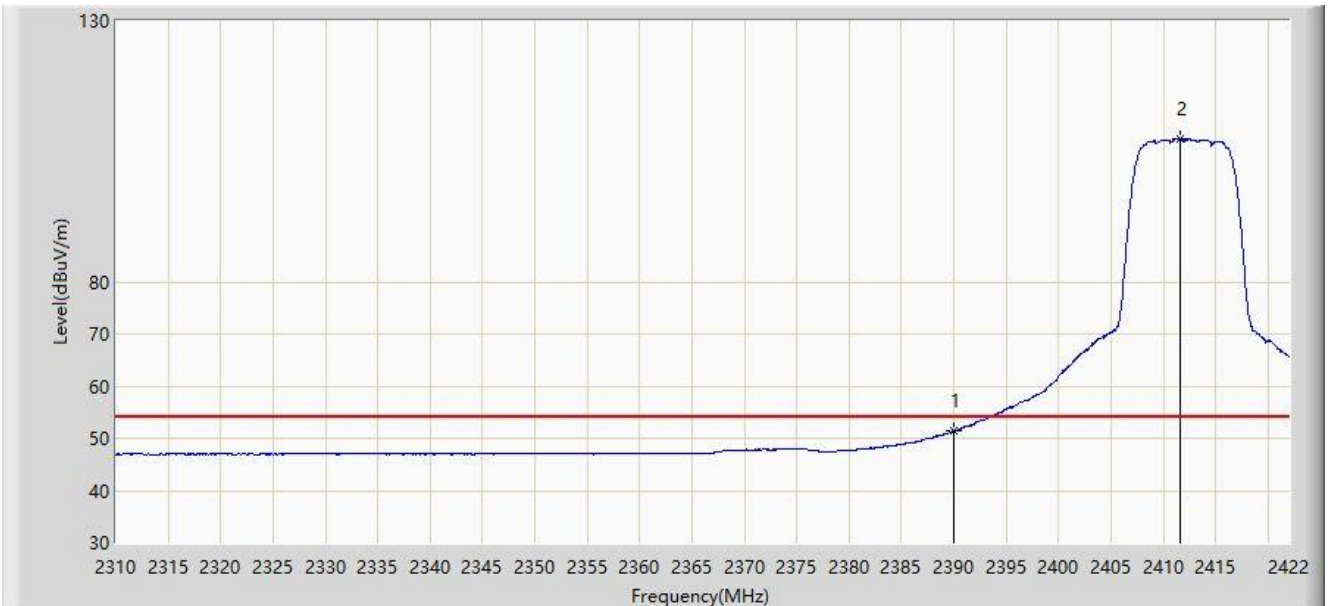


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 51.407                 | 19.080               | -2.593      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2411.584        | 107.494                | 75.209               | N/A         | N/A            | 32.285      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:11 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

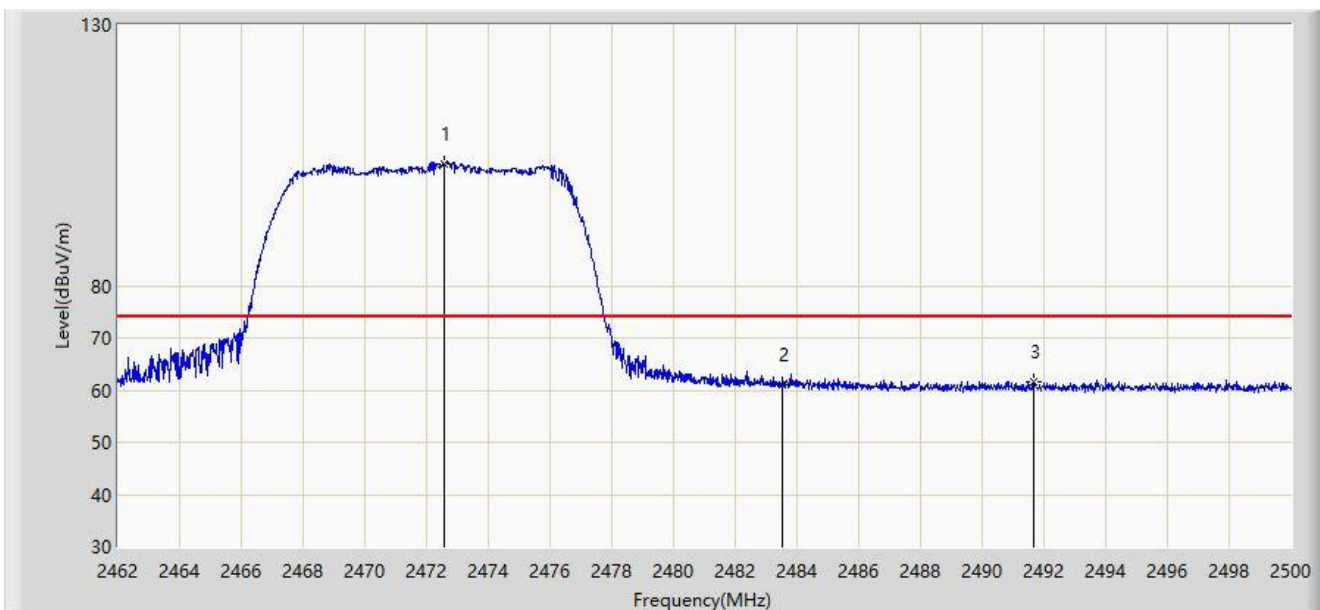


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.564        | 103.451                | 71.146               | N/A         | N/A            | 32.305      | PK   |
| 2  |      |      | 2483.500        | 61.132                 | 28.793               | -12.868     | 74.000         | 32.340      | PK   |
| 3  |      |      | 2491.659        | 61.708                 | 29.337               | -12.292     | 74.000         | 32.371      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:11 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

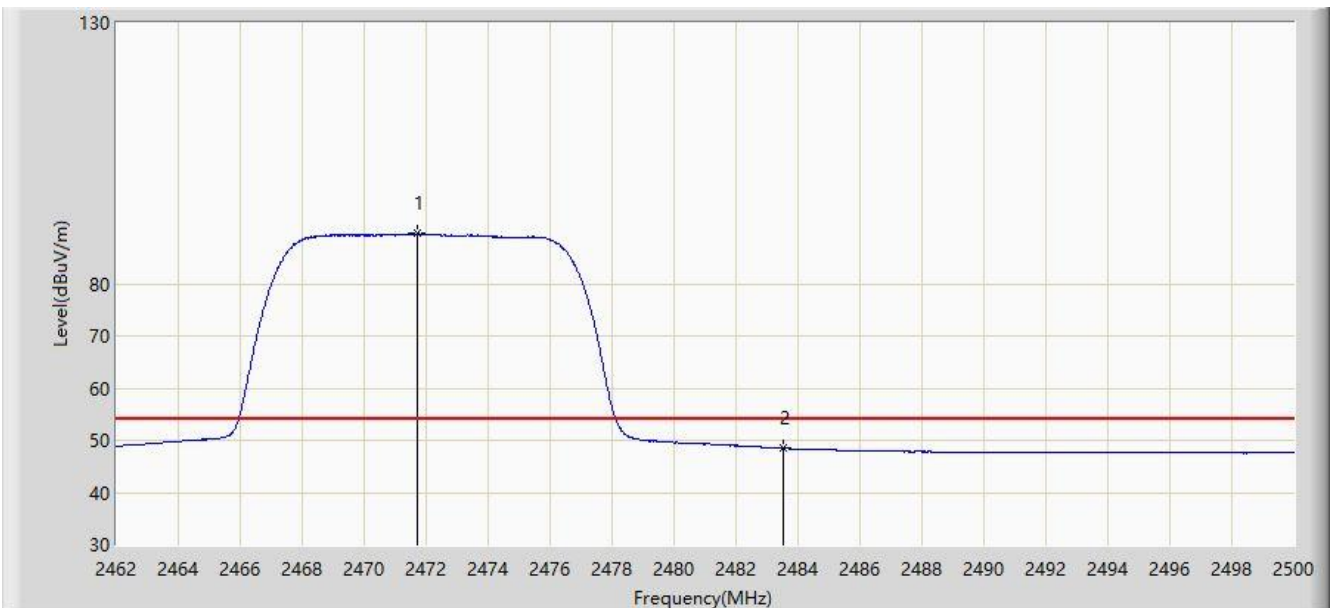


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2471.728        | 89.586                 | 57.283               | N/A         | N/A            | 32.303      | AV   |
| 2  |      |      | 2483.500        | 48.477                 | 16.138               | -5.523      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:11 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

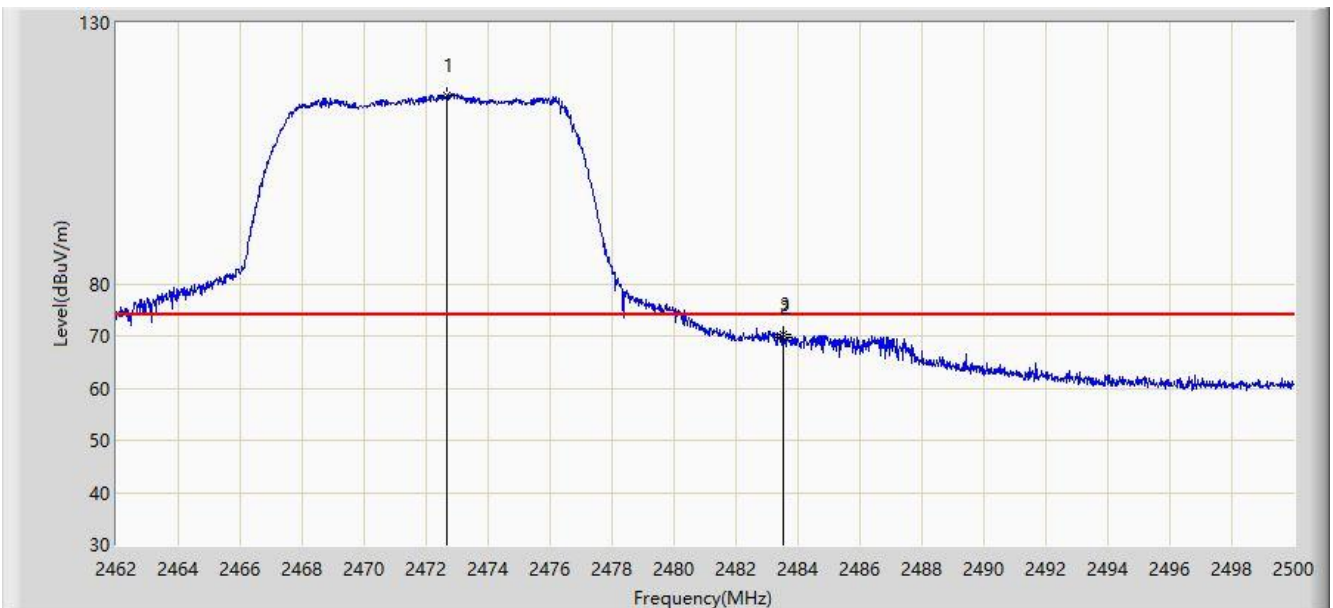


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.678        | 116.189                | 83.883               | N/A         | N/A            | 32.306      | PK   |
| 2  |      |      | 2483.500        | 69.629                 | 37.290               | -4.371      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2483.527        | 70.282                 | 37.943               | -3.718      | 74.000         | 32.340      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:11 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

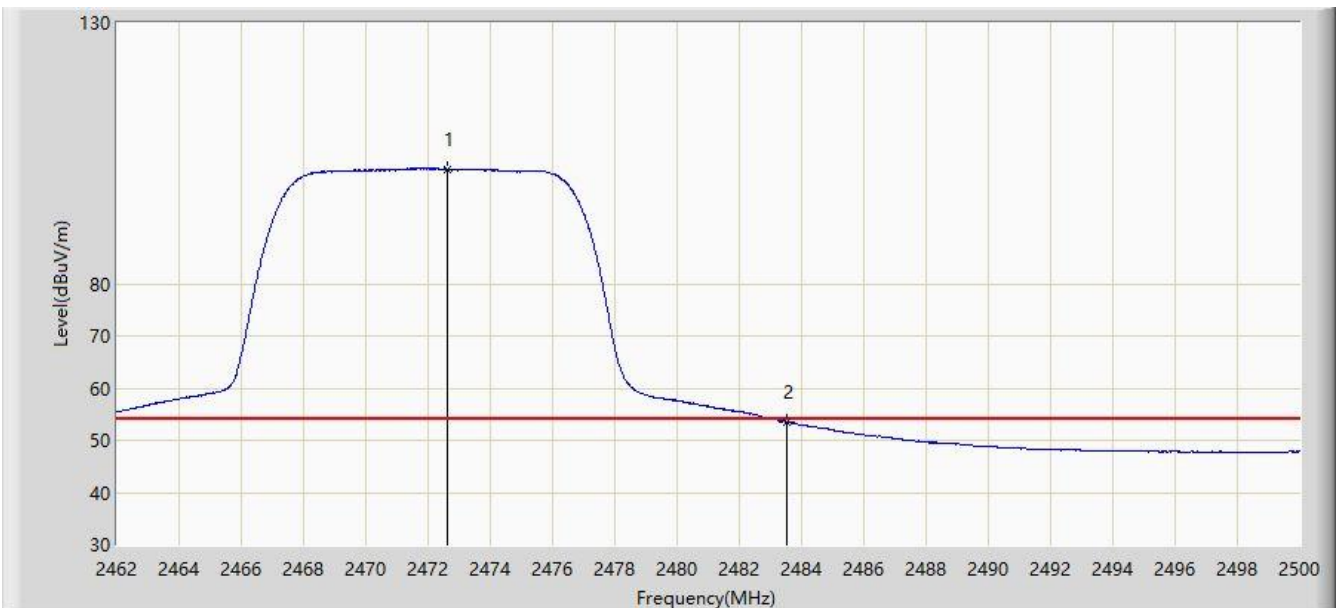


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.640        | 101.931                | 69.626               | N/A         | N/A            | 32.306      | AV   |
| 2  |      |      | 2483.500        | 53.608                 | 21.269               | -0.392      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:15 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

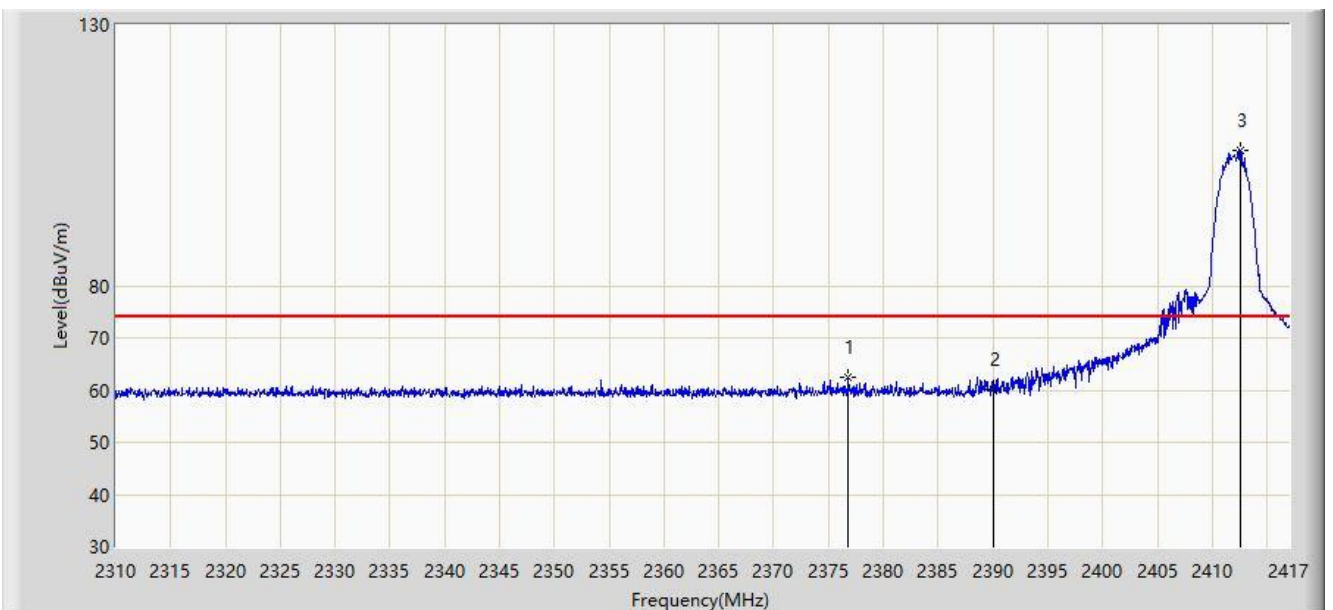


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2376.768        | 62.337                 | 29.992               | -11.663     | 74.000         | 32.345      | PK   |
| 2  |      |      | 2390.000        | 60.195                 | 27.868               | -13.805     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2412.560        | 106.075                | 73.790               | N/A         | N/A            | 32.285      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:15 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

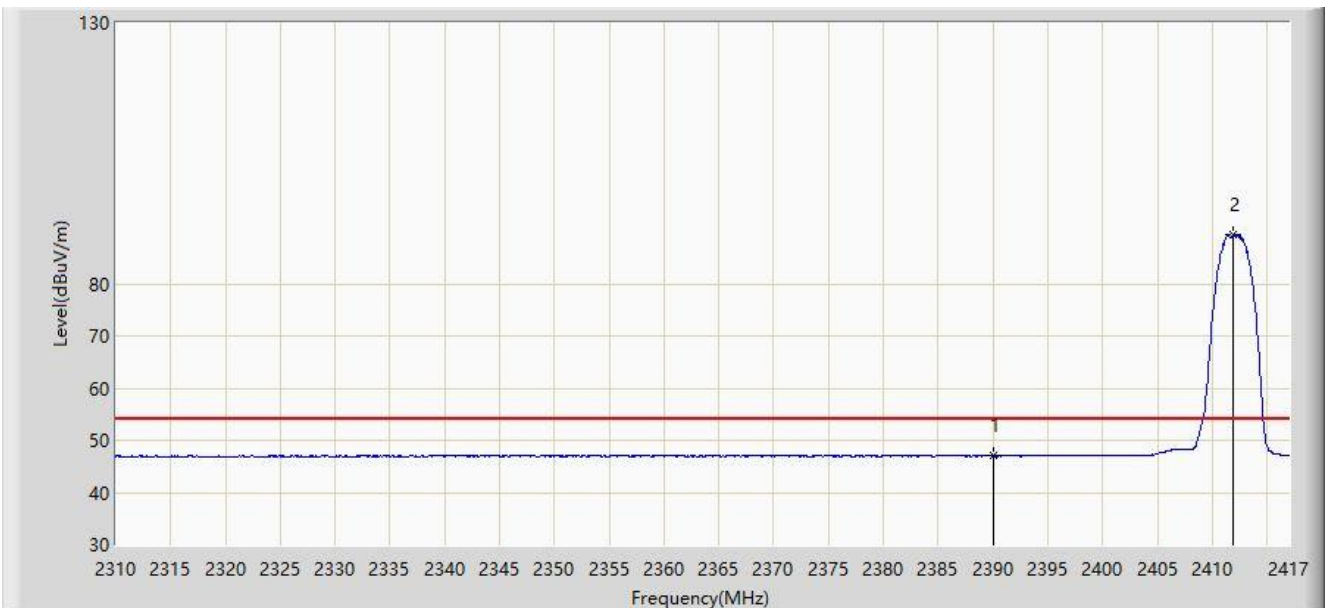


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 46.988                 | 14.661               | -7.012      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2411.864        | 89.441                 | 57.156               | N/A         | N/A            | 32.285      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:15 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

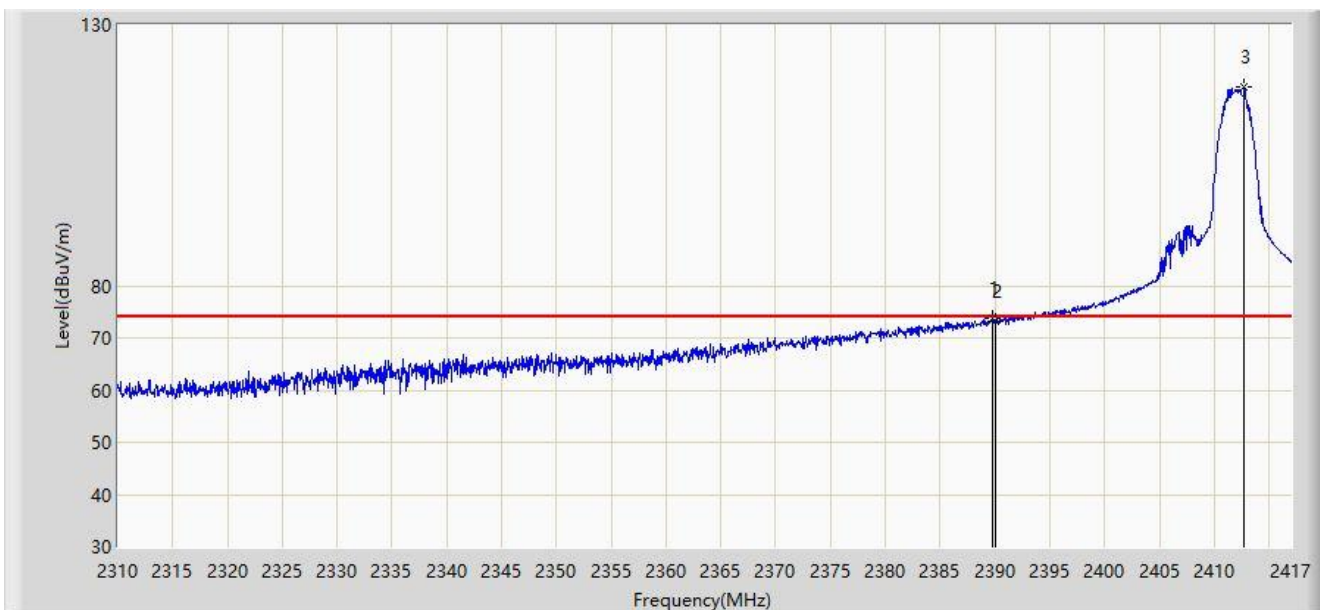


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.715        | 73.666                 | 41.339               | -0.334      | 74.000         | 32.328      | PK   |
| 2  |      |      | 2390.000        | 73.172                 | 40.845               | -0.828      | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2412.720        | 118.210                | 85.925               | N/A         | N/A            | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:15 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2412MHz with Ant 1 |                          |

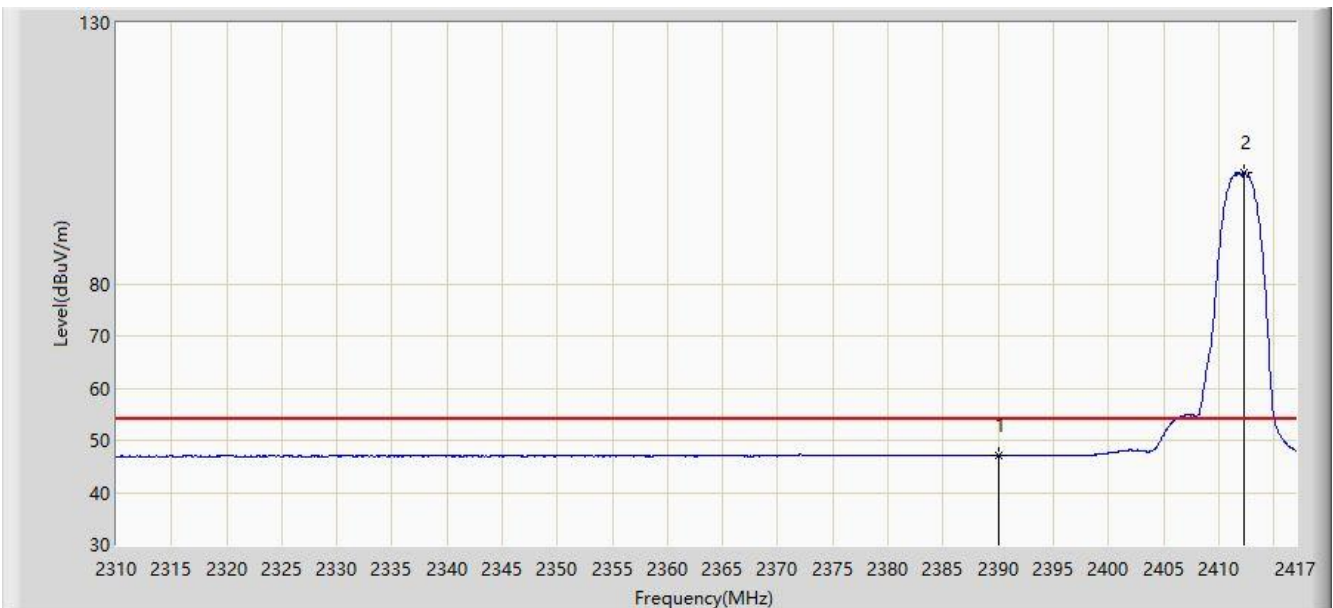


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.121                 | 14.794               | -6.879      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2412.292        | 101.289                | 69.004               | N/A         | N/A            | 32.285      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:15 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

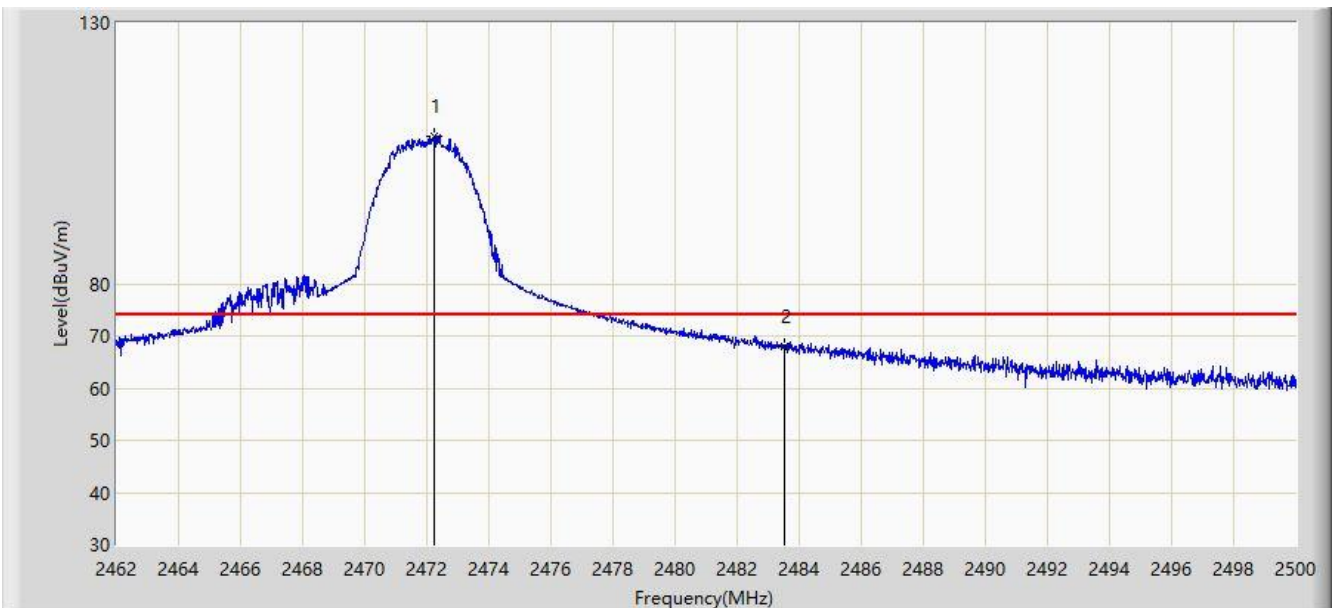


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.260        | 108.265                | 75.960               | N/A         | N/A            | 32.304      | PK   |
| 2  |      |      | 2483.500        | 68.108                 | 35.769               | -5.892      | 74.000         | 32.340      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:16 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

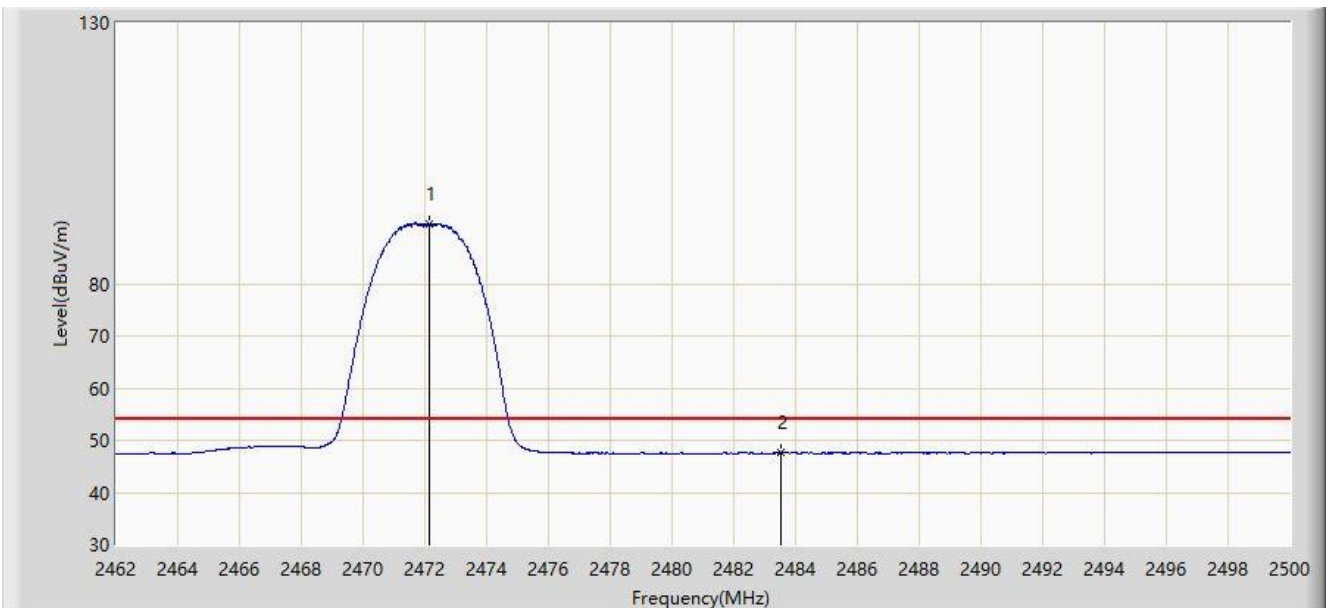


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.146        | 91.345                 | 59.041               | N/A         | N/A            | 32.304      | AV   |
| 2  |      |      | 2483.500        | 47.556                 | 15.217               | -6.444      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:16 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

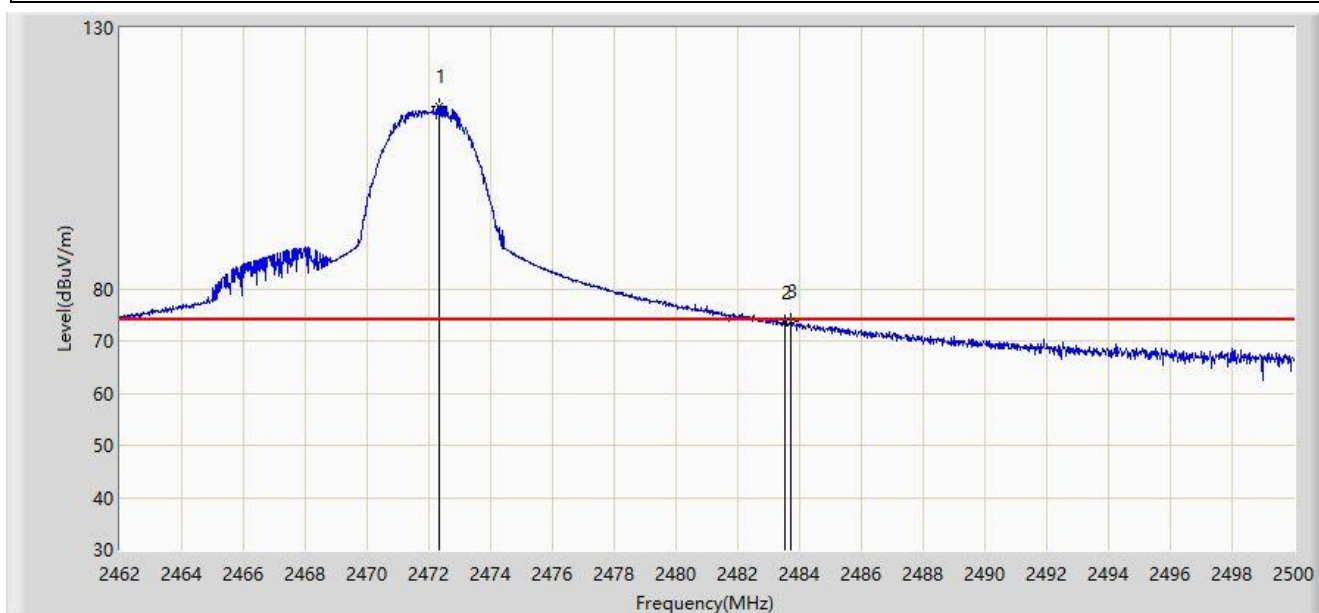


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.355        | 114.976                | 82.671               | N/A         | N/A            | 32.304      | PK   |
| 2  |      |      | 2483.500        | 73.557                 | 41.218               | -0.443      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2483.736        | 73.662                 | 41.322               | -0.338      | 74.000         | 32.340      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                       |                          |
|-----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                             | Time: 2019/03/14 - 16:16 |
| Limit: FCC_Part15_Band Edge(3m)                                       | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                              | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                          | Power: DC 5V             |
| Test Mode: Transmit by 2.5MHz Bandwidth at channel 2472MHz with Ant 1 |                          |

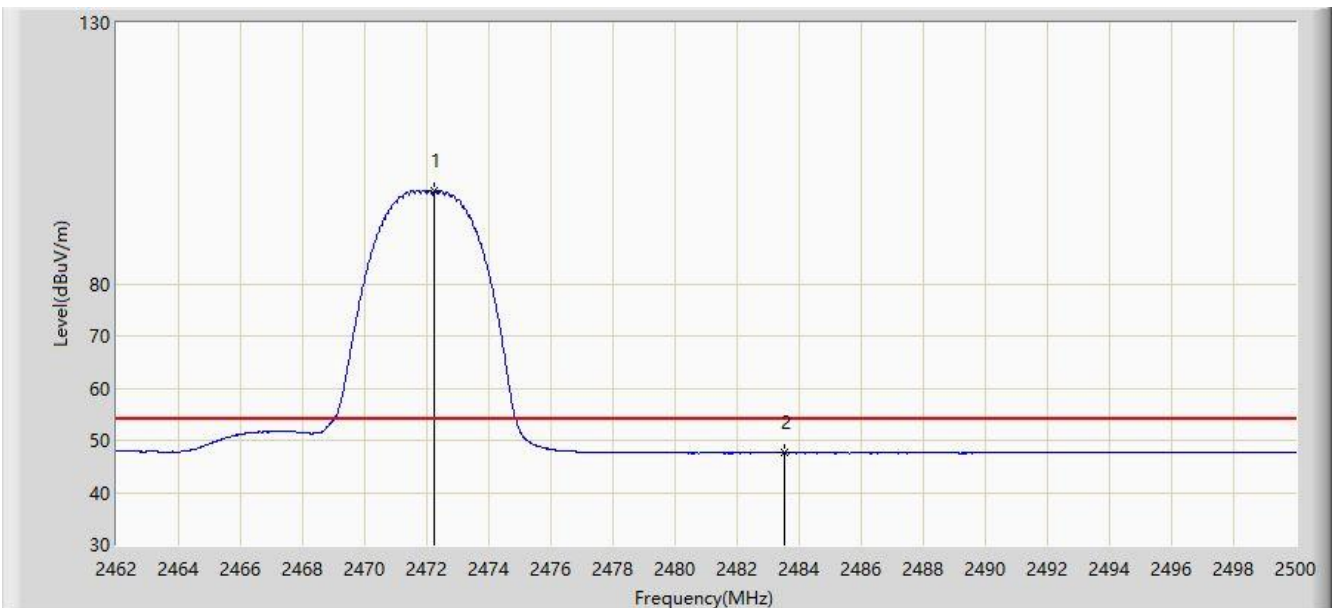


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.222        | 97.687                 | 65.383               | N/A         | N/A            | 32.304      | AV   |
| 2  |      |      | 2483.500        | 47.570                 | 15.231               | -6.430      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:17 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 2 |                          |

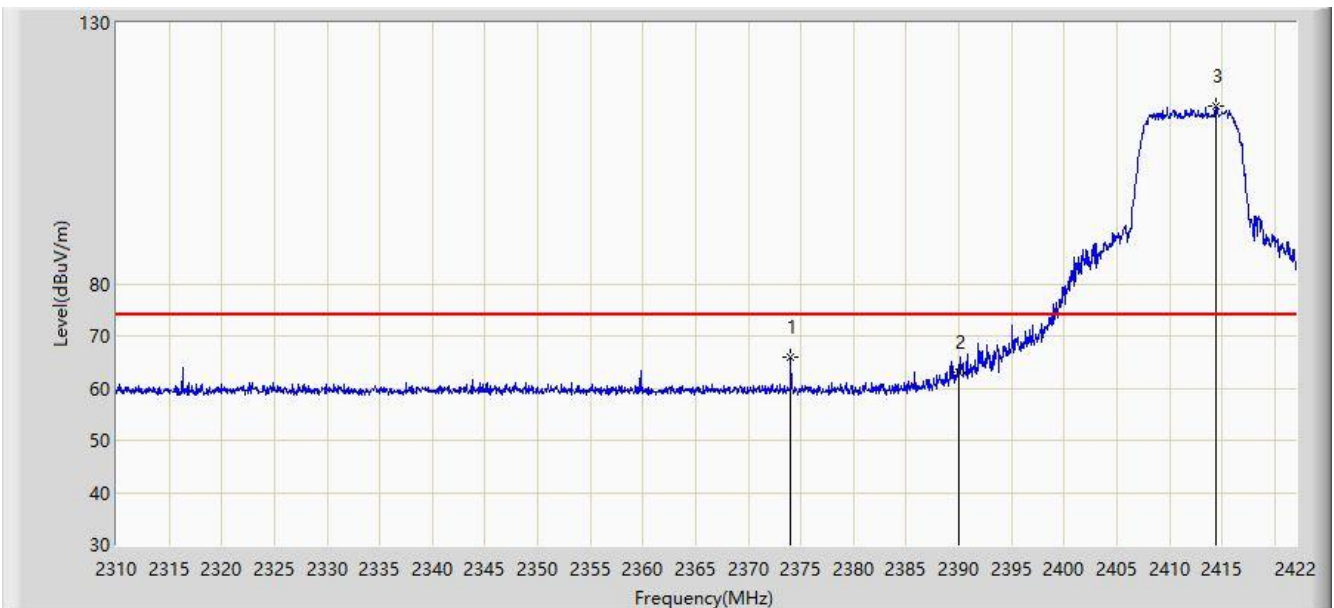


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2374.064        | 65.917                 | 33.567               | -8.083      | 74.000         | 32.350      | PK   |
| 2  |      |      | 2390.000        | 63.005                 | 30.678               | -10.995     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2414.384        | 114.044                | 81.760               | N/A         | N/A            | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:17 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 2 |                          |

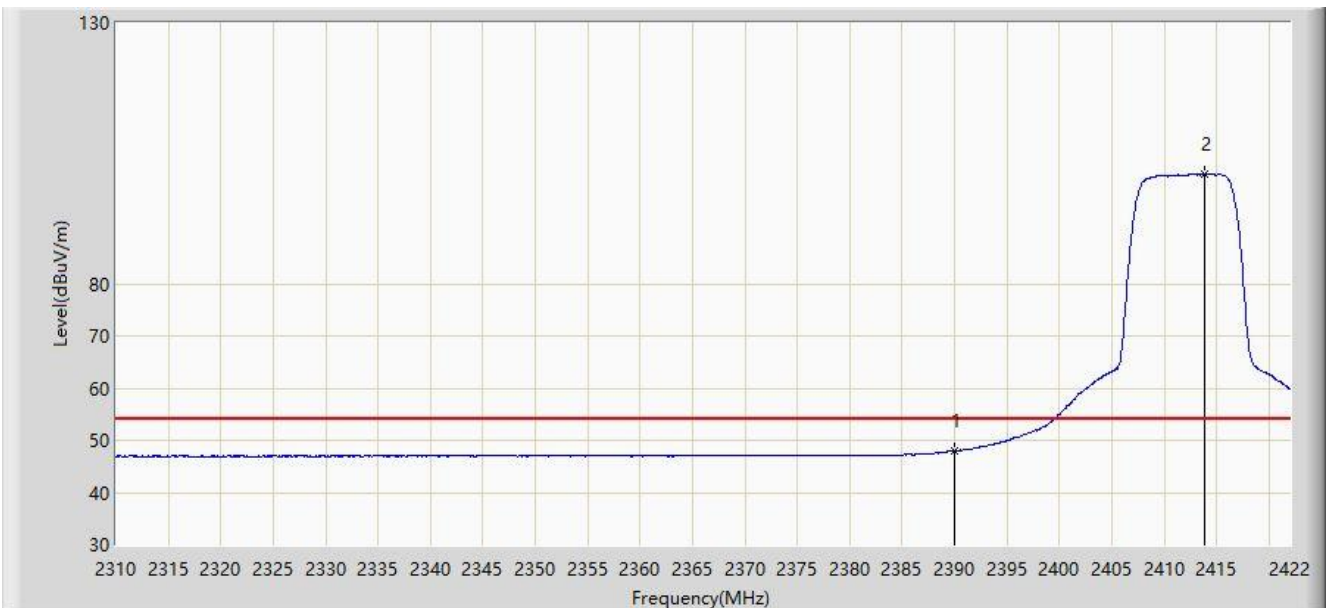

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 47.955                 | 15.628               | -6.045      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2413.880        | 101.001                | 68.717               | N/A         | N/A            | 32.284      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:17 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 2 |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2374.120        | 70.621                 | 38.271               | -3.379      | 74.000         | 32.350      | PK   |
| 2  |      |      | 2390.000        | 63.804                 | 31.477               | -10.196     | 74.000         | 32.327      | PK   |
| 3  |      | *    | 2412.648        | 116.465                | 84.180               | N/A         | N/A            | 32.284      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:17 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2412MHz with Ant 2 |                          |

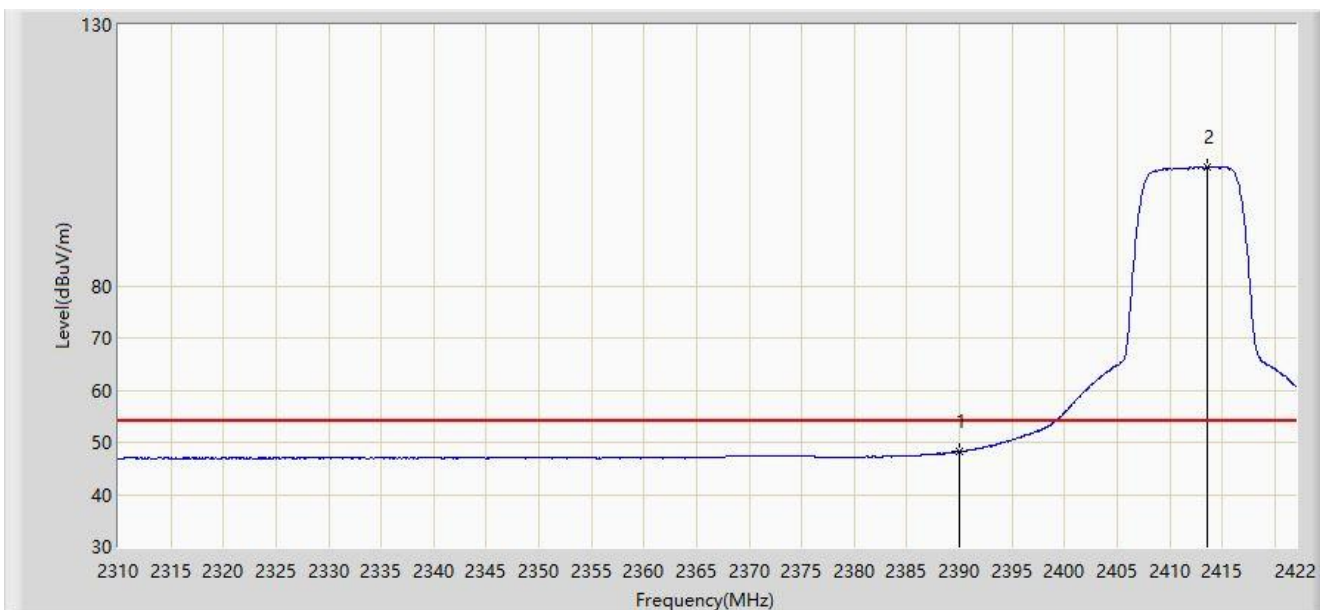


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 48.225                 | 15.898               | -5.775      | 54.000         | 32.327      | AV   |
| 2  |      | *    | 2413.600        | 102.866                | 70.582               | N/A         | N/A            | 32.284      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:18 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 2 |                          |

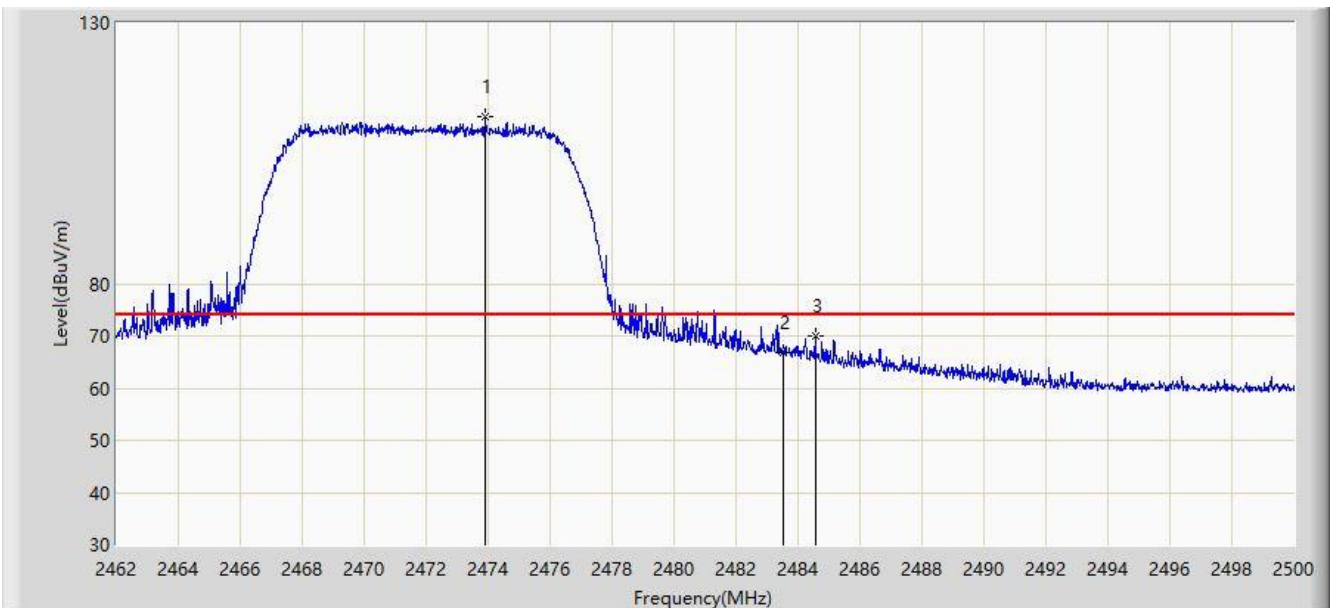


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2473.913        | 112.106                | 79.797               | N/A         | N/A            | 32.308      | PK   |
| 2  |      |      | 2483.500        | 66.793                 | 34.454               | -7.207      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2484.553        | 69.936                 | 37.593               | -4.064      | 74.000         | 32.344      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:18 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Horizontal     |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 2 |                          |

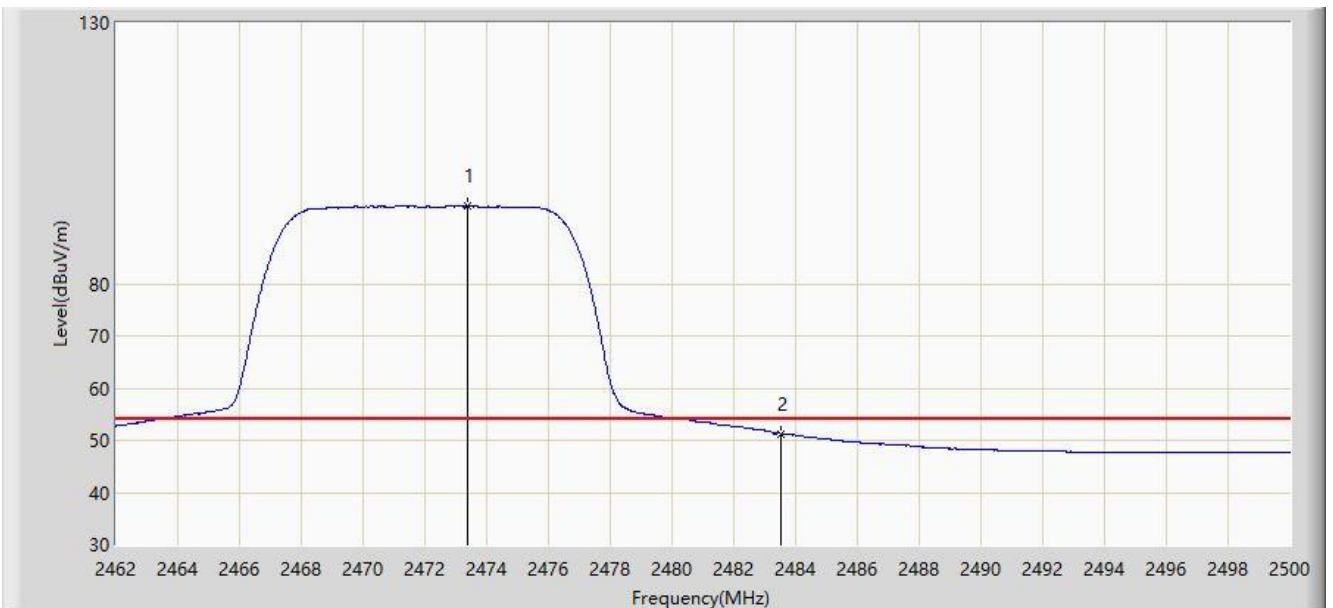


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2473.400        | 94.888                 | 62.581               | N/A         | N/A            | 32.307      | AV   |
| 2  |      |      | 2483.500        | 51.298                 | 18.959               | -2.702      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:18 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 2 |                          |

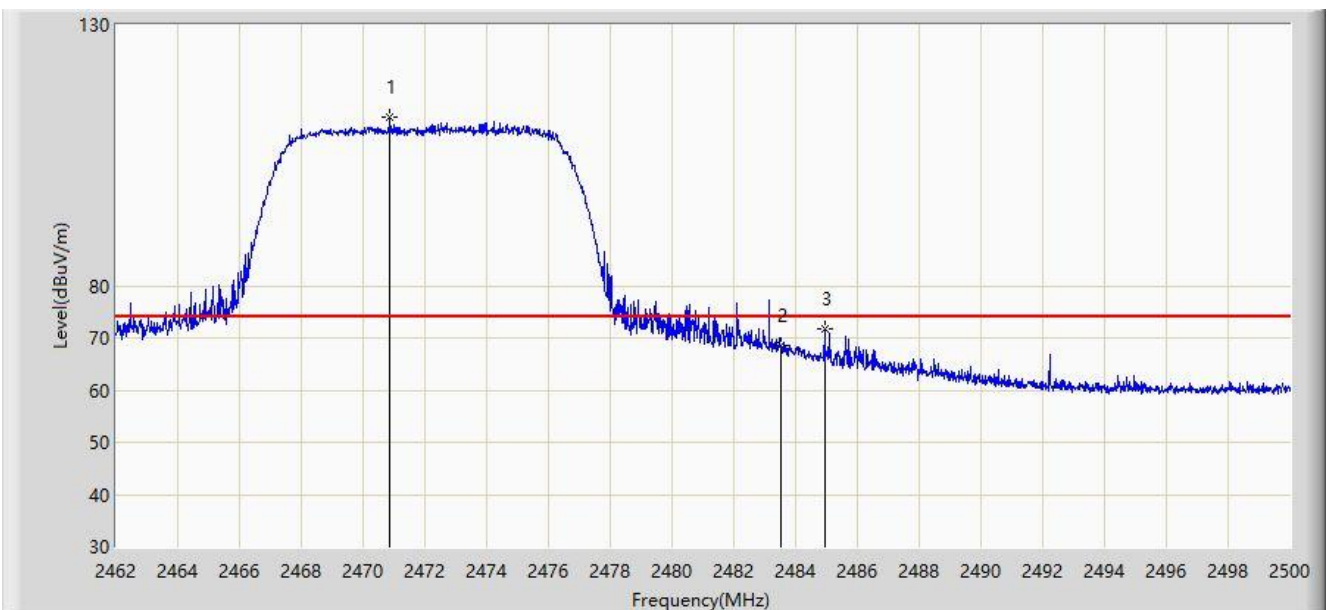


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2470.873        | 112.178                | 79.877               | N/A         | N/A            | 32.301      | PK   |
| 2  |      |      | 2483.500        | 68.658                 | 36.319               | -5.342      | 74.000         | 32.340      | PK   |
| 3  |      |      | 2484.933        | 71.812                 | 39.467               | -2.188      | 74.000         | 32.345      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

|                                                                      |                          |
|----------------------------------------------------------------------|--------------------------|
| Site: AC1                                                            | Time: 2019/03/14 - 16:18 |
| Limit: FCC_Part15_Band Edge(3m)                                      | Engineer: Dandy Li       |
| Probe: BBHA9120D_1-18GHz                                             | Polarity: Vertical       |
| EUT: 2.4GHz HD Wireless Link                                         | Power: DC 5V             |
| Test Mode: Transmit by 10MHz Bandwidth at channel 2472MHz with Ant 2 |                          |

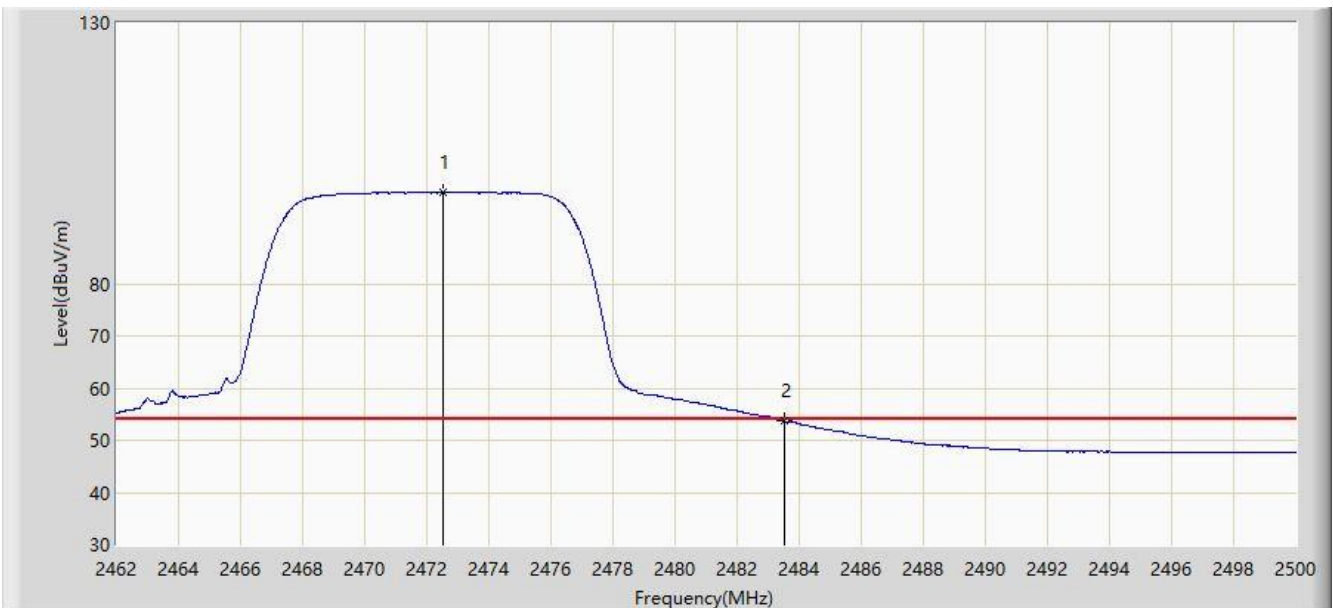

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2472.507        | 97.572                 | 65.267               | N/A         | N/A            | 32.305      | AV   |
| 2  |      |      | 2483.500        | 53.754                 | 21.415               | -0.246      | 54.000         | 32.340      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50                                   | 66 - 56   | 56 - 46   |
| 0.50 - 5.0                                    | 56        | 46        |
| 5.0 - 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

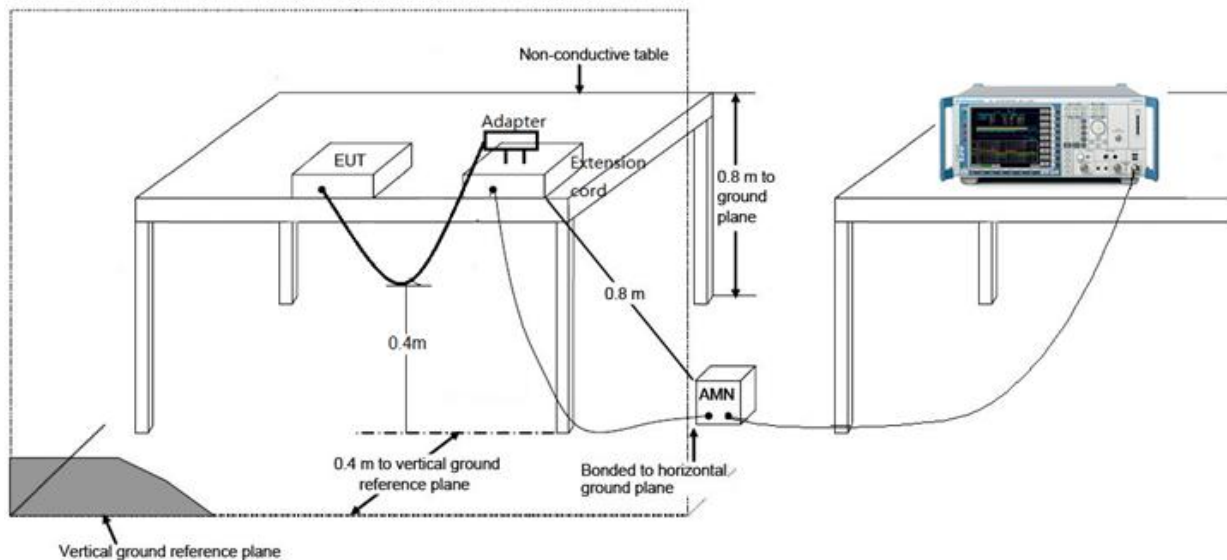

### 7.8.3.Test Result

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: SR2                                                                         | Time: 2019/03/14 - 16:40 |
| Limit: FCC_Part15.107_CE_AC Power_ClassB                                          | Engineer:Liz Yuan        |
| Probe: ENV216_101683_Filter On                                                    | Polarity: Line           |
| EUT: 2.4GHz HD Wireless Link                                                      | Power: DC 5V             |
| <b>Worst Case Mode:</b> Transmit by 10MHz Bandwidth at channel 2442MHz with Ant 1 |                          |

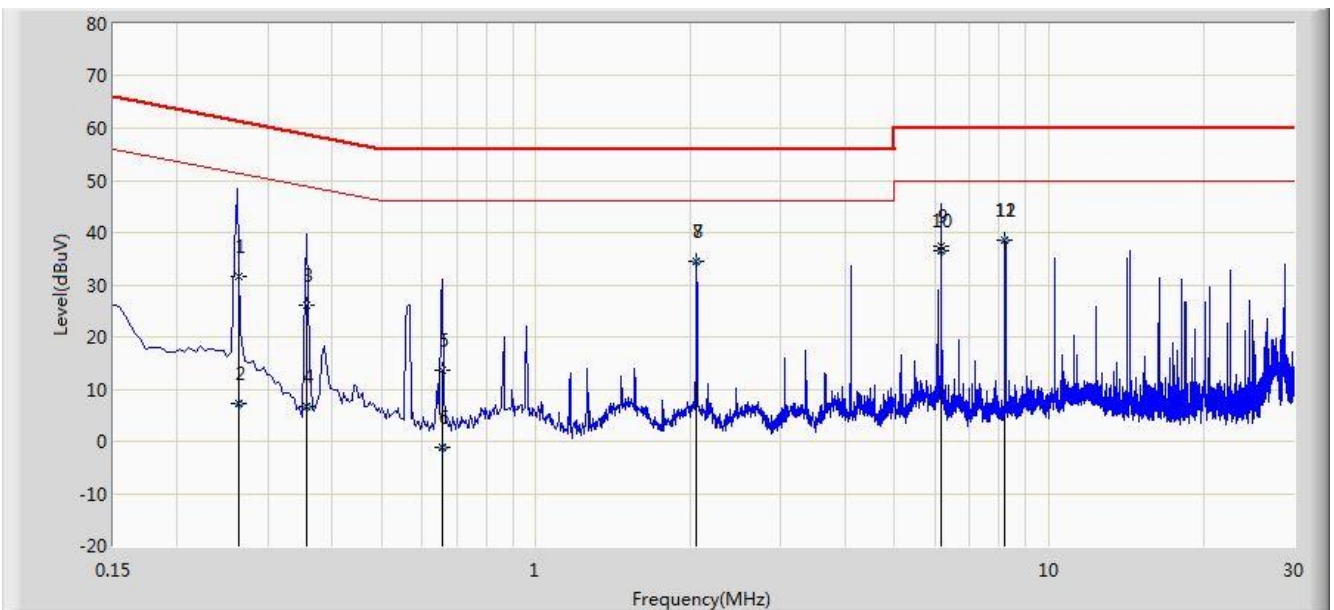


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.263           | 31.574               | 21.600               | -29.762     | 61.336       | 9.974       | QP   |
| 2  |      |      | 0.263           | 7.174                | -2.800               | -44.162     | 51.336       | 9.974       | AV   |
| 3  |      |      | 0.357           | 26.150               | 16.100               | -32.648     | 58.798       | 10.051      | QP   |
| 4  |      |      | 0.357           | 6.550                | -3.500               | -42.248     | 48.798       | 10.051      | AV   |
| 5  |      |      | 0.658           | 13.701               | 3.616                | -42.299     | 56.000       | 10.085      | QP   |
| 6  |      |      | 0.658           | -1.235               | -11.320              | -47.235     | 46.000       | 10.085      | AV   |
| 7  |      |      | 2.054           | 34.476               | 24.606               | -21.524     | 56.000       | 9.869       | QP   |
| 8  |      |      | 2.054           | 34.461               | 24.592               | -11.539     | 46.000       | 9.869       | AV   |
| 9  |      |      | 6.166           | 37.523               | 27.409               | -22.477     | 60.000       | 10.114      | QP   |
| 10 |      |      | 6.166           | 36.565               | 26.451               | -13.435     | 50.000       | 10.114      | AV   |
| 11 |      |      | 8.214           | 38.665               | 28.500               | -21.335     | 60.000       | 10.165      | QP   |
| 12 |      | *    | 8.214           | 38.465               | 28.300               | -11.535     | 50.000       | 10.165      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

|                                                                                   |                          |
|-----------------------------------------------------------------------------------|--------------------------|
| Site: SR2                                                                         | Time: 2019/03/14 - 16:49 |
| Limit: FCC_Part15.107_CE_AC Power_ClassB                                          | Engineer:Liz Yuan        |
| Probe: ENV216_101683_Filter On                                                    | Polarity: Neutral        |
| EUT: 2.4GHz HD Wireless Link                                                      | Power: DC 5V             |
| <b>Worst Case Mode:</b> Transmit by 10MHz Bandwidth at channel 2442MHz with Ant 1 |                          |

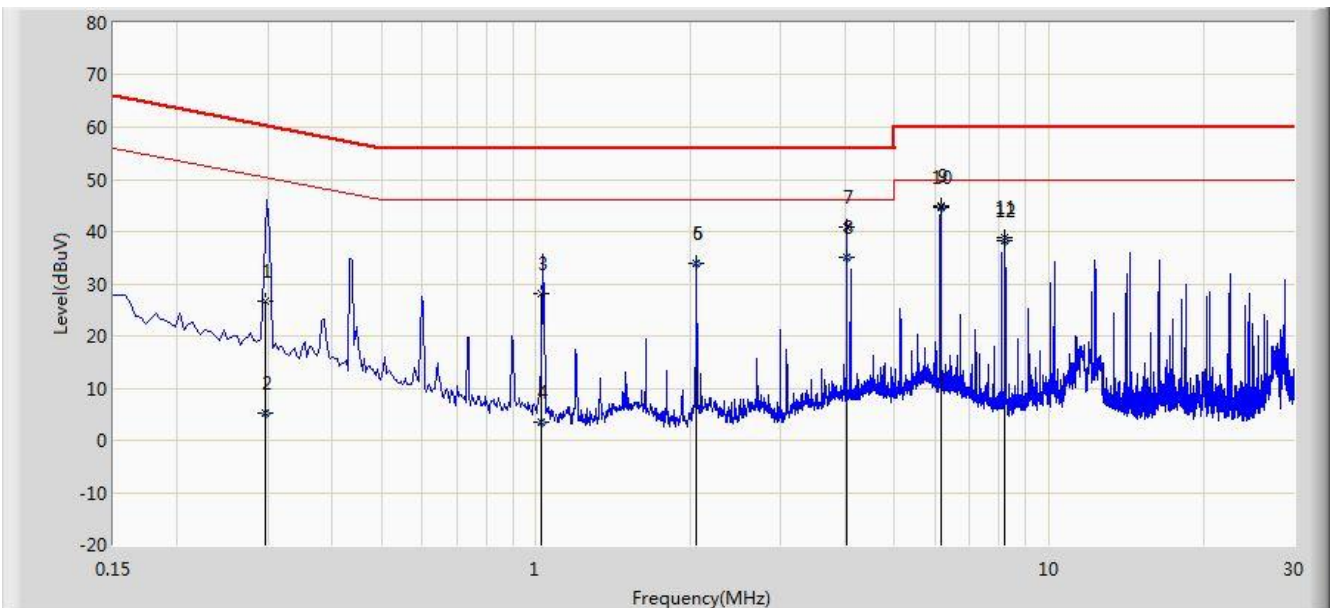

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.297           | 26.585               | 16.549               | -33.752     | 60.337       | 10.035      | QP   |
| 2  |      |      | 0.297           | 5.287                | -4.748               | -45.050     | 50.337       | 10.035      | AV   |
| 3  |      |      | 1.027           | 28.008               | 18.100               | -27.992     | 56.000       | 9.908       | QP   |
| 4  |      |      | 1.027           | 3.608                | -6.300               | -42.392     | 46.000       | 9.908       | AV   |
| 5  |      |      | 2.054           | 33.955               | 24.083               | -22.045     | 56.000       | 9.872       | QP   |
| 6  |      |      | 2.054           | 33.935               | 24.063               | -12.065     | 46.000       | 9.872       | AV   |
| 7  |      |      | 4.034           | 40.874               | 30.900               | -15.126     | 56.000       | 9.975       | QP   |
| 8  |      |      | 4.034           | 34.974               | 25.000               | -11.026     | 46.000       | 9.975       | AV   |
| 9  |      |      | 6.158           | 45.025               | 34.900               | -14.975     | 60.000       | 10.125      | QP   |
| 10 |      | *    | 6.158           | 44.625               | 34.500               | -5.375      | 50.000       | 10.125      | AV   |
| 11 |      |      | 8.214           | 38.705               | 28.523               | -21.295     | 60.000       | 10.182      | QP   |
| 12 |      |      | 8.214           | 38.188               | 28.005               | -11.812     | 50.000       | 10.182      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15C of the FCC Rules.

---

The End

## **Appendix A – Test Setup Photograph**

Refer to “ 1902RSU015-UT” file.

## **Appendix B – EUT Photograph**

Refer to “ 1902RSU015-UE” file.