

# AD-311N

## Antenna Approval Sheet

<b>Part Number</b>	R3410110229
<b>Product Number</b>	AD-311N
<b>Description</b>	Dipole Antenna, 2.67dBi/4.91dBi 2.4G/5GHz, I-PEX / MHF4 connector
<b>DOC NO</b>	AS-2111001

Ver. 1.0

### Revised History

Version	Purpose	Date	Responsible
1.0	Initial Doc	2021/11/8	Aaron

SparkLAN		Customer
Sales	PM	Approval by
	Aaron	

# Contents

1. Electrical Specifications.....3

2. V.S.W.R.....3

3. Antenna Drawing .....4

4. Antenna Pattern .....5

## Antenna type : Dipole

### AD-311N

#### Electrical Specifications

Frequency range	2400 -2500 MHz	5150-5875 MHz
Peak Gain	2.67 dBi	4.91 dBi
Efficiency	64.7 %	61.2 %
VSWR	2.0 : 1 Max.	2.0 : 1 Max.
Power handling	1W (cw)	
Impedance	50 $\Omega$	
Dimensions	36.1x8.1mm	
Antenna Material	FR4	
Connector	MHF4	
Cable	$\varnothing$ 1.13 L:250mm	



\*Antenna measured on a 2mm thick ABS plastic base

#### Environmental & Mechanical Characteristics

Temperature	- 10°C to +55°C
Humidity	95% @ 25°C




#### VSWR

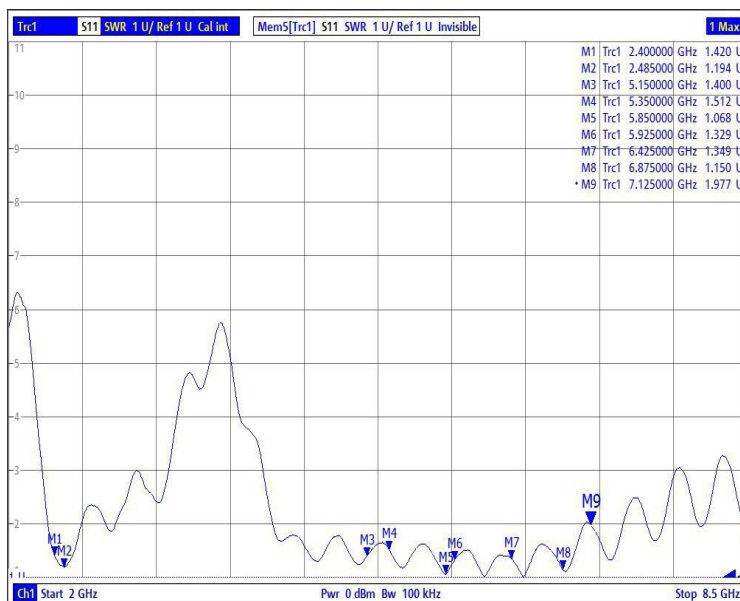

Manufacture: ARISTOTLE ENTERPRISES INC.

Manufacturer address: 8F, No.63, Juguang Rd, Zhonghe Dist, New Taipei City 235, Taiwan, R.O.C.

NO.	NAME	FINSH	MAT'L	Q'TY	MEMO
1.	PCB	BLACK	FR4	1	
2.	CABLE	BLACK	--	1	ø1.13
3.	IPEX	PLATED GOLD	BRASS	1	MHF4
4.	TAPE	--	--	1	

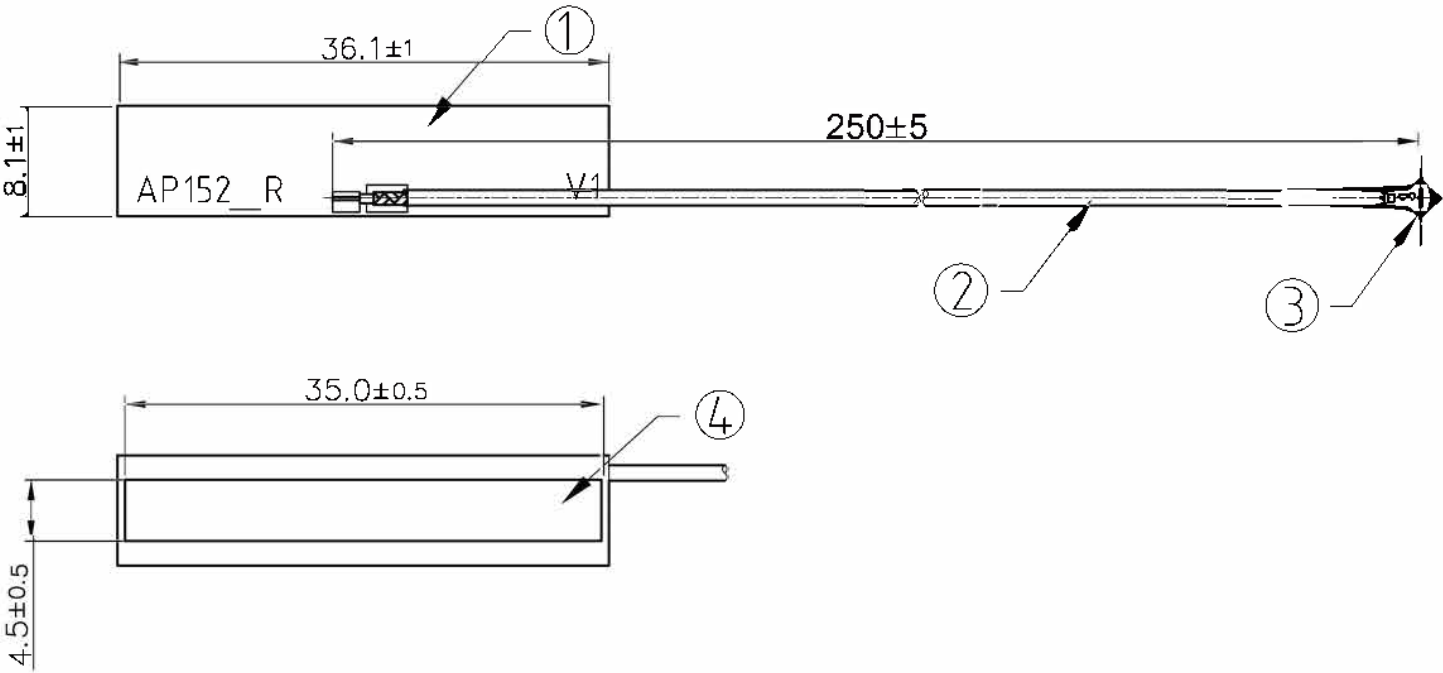

PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE
		LINER	ANGLE	
	UNITS	.X $\pm 0.10$	X° $\pm 0.5^\circ$	
	MM	.XX $\pm 0.05$		
		.XXX $\pm 0.01$		
3.		REV.	A	AD-311N
2.		SHEET	1/1	DWG NO.
1.		SIZE	SCALE	R3410110229
REV.	ECN.	NAME	DATE	
		A4	1:1	
		DRAW	Gino	2020/10/06



## Antenna Pattern

2G Band = 2400 - 2500 MHz % 2G BAND


XY Plane (+X = 0°X, +Y = +90°X) / Elevation = 90°X

ZX Plane (+Z = 0°X, +X = +90°X) / Azimuth = 0°X


— 2400 MHz  
— 2485 MHz

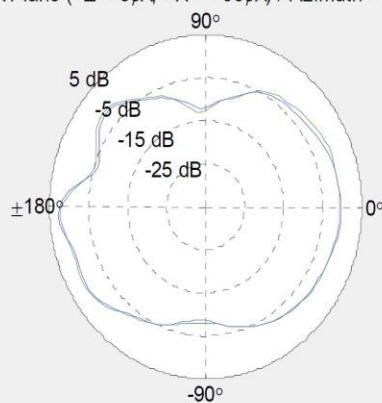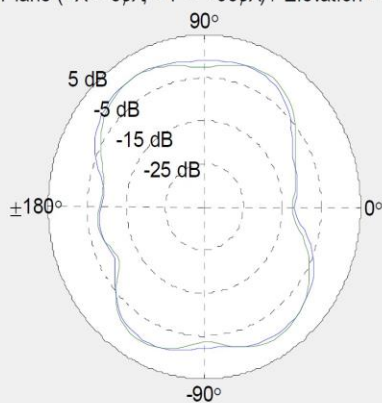

YZ Plane (+Z = 0°X, +Y = +90°X) / Azimuth = 90°X

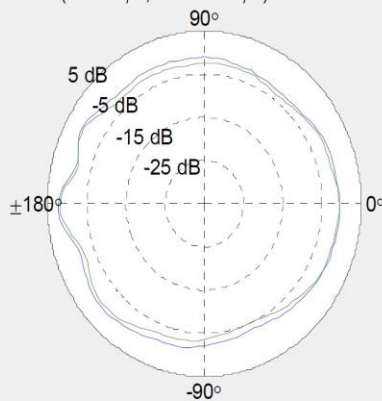

## Antenna Pattern

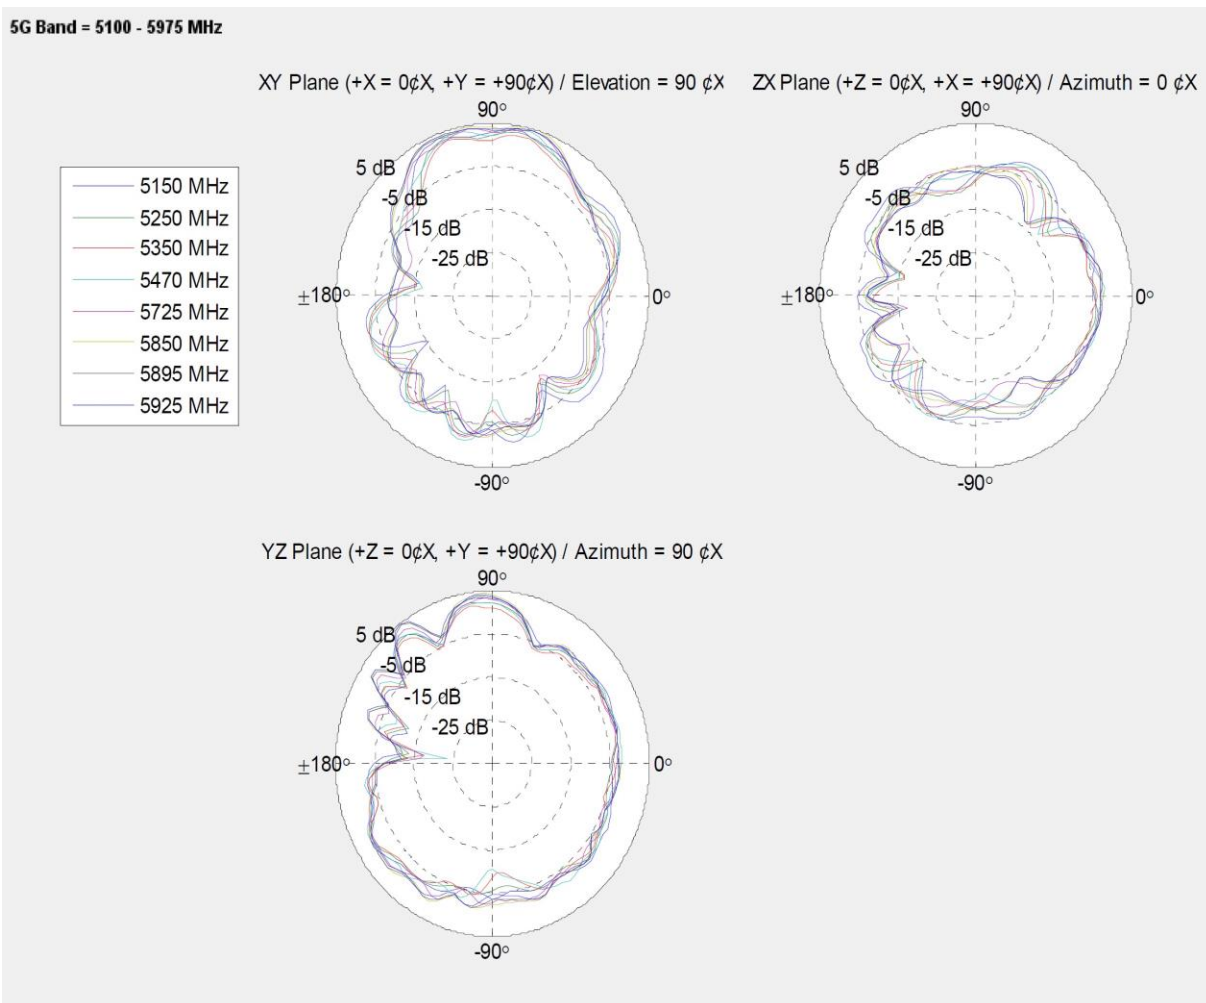

# Gain Table

Frequency (MHz)	3D		
	Efficiency	Avg. Gain	Peak Gain
2400.00	64.26	-1.92	2.67
2485.00	65.22	-1.86	2.58
5150.00	63.78	-1.95	4.35
5250.00	62.12	-2.07	3.83
5350.00	61.78	-2.09	3.41
5470.00	62.78	-2.02	4.53
5725.00	59.92	-2.22	4.70
5850.00	61.10	-2.14	4.87
5895.00	59.17	-2.28	4.88





# 速連通訊股份有限公司

文件編號		文件名稱		發行版本	A	頁次	1/1
公司名稱：	SparkLAN		最小包裝	PCS	50		
料號/品名：	R3410110229 / AD-311N		中包裝	PCS	200		
供應商料號/品名			大包裝	PCS	5000		
相關配件			備註				

1. 最小包裝(50PCS-夾鏈袋)		2. 中包裝(200PCS-PE 袋)	
 <p>示意圖</p>		 <div data-bbox="1545 606 2150 997"> <p>P/N: R3410110229  Name: AD-311N  P/O: 1101000005  Q'TY 200  D/C: 2021/10/15</p> <p>標籤尺寸：7X3CM</p> </div>	
3. 大包裝(5000PCS-1 箱)			
  <p>示意圖</p>			





**NAN YA PLASTICS CORPORATION**  
ELECTRONIC MATERIALS DIVISION.  
**COPPER CLAD LAMINATE DEPARTMENT**

**Glass cloth base epoxy resin  
flame retardant copper clad laminate**

NO. 201, TUNG HWA N. ROAD,  
TAIPEI, TAIWAN.

## NP-140TL

### ■ FEATURES

- Multi-functional epoxy renders the material outstanding heat resistance, better dimensional stability, and through-hole reliability that benefit the performance of high layer count multilayer boards.
- HTE copper foil applied to prevent corner cracking.
- High luminance of epoxy contrast with copper for laser type A.O.I.
- UV solder mask may be applied simultaneously in order to increase yields.
- IPC-4101B specification is applicable.

### ■ PERFORMANCE LIST

Characteristics	Unit	Conditioning	Typical Values	SPEC	Test Method
Volume resistivity	MΩ-cm	C-96/35/90	$5.0 \times 10^9$	$10^6 \uparrow$	2.5.17
Surface resistivity	MΩ	C-96/35/90	$5.0 \times 10^7$	$10^4 \uparrow$	2.5.17
Permittivity 1 MHZ	-	C-24/23/50	4.2-4.4	5.4 ↓	2.5.5.9
Permittivity 1 GHZ	-	C-24/23/50	3.8-4.0	-	2.5.5.9
Loss Tangent 1 MHZ	-	C-24/23/50	0.015-0.020	0.035 ↓	2.5.5.9
Loss Tangent 1 GHZ	-	C-24/23/50	0.012-0.014	-	2.5.5.9
Arc resistance	SEC	D-48/50+D-0.5/23	120 ↑	60 ↑	2.5.1
Dielectric breakdown	KV	D-48/50	60 ↑	40 ↑	2.5.6
Moisture absorption	%	D-24/23	0.20-0.30	0.35 ↓	2.6.2.1
Flammability	-	C-24/23/50+E-24/125	94V0	94V0	UL94
Peel strength 1 oz	lb/in	288°Cx10" solder floating	10-14	6 ↑	2.4.8
Thermal stress	SEC	288°C solder dipping	90 ↑	10 ↑	2.4.13.1
Glass transition temp	°C	DSC	$140 \pm 5$	N/A	2.4.25
Dimensional stability X-Y axis	%	E 4/105	0.01-0.03	0.05 ↓	2.4.39
Coefficient of thermal expansion	ppm/°C	TMA	50-70	N/A	2.4.24
Z-axis before Tg	ppm/°C	TMA	250-350		
Z-axis after Tg					


**NOTE:**

The average value in the table refers to samples of .020" 1/1.

Test method per IPC-TM-650

Data shown are nominal values for reference only.

## ■ UV TRANSMISSION CURVE OF 0.2mm CCL

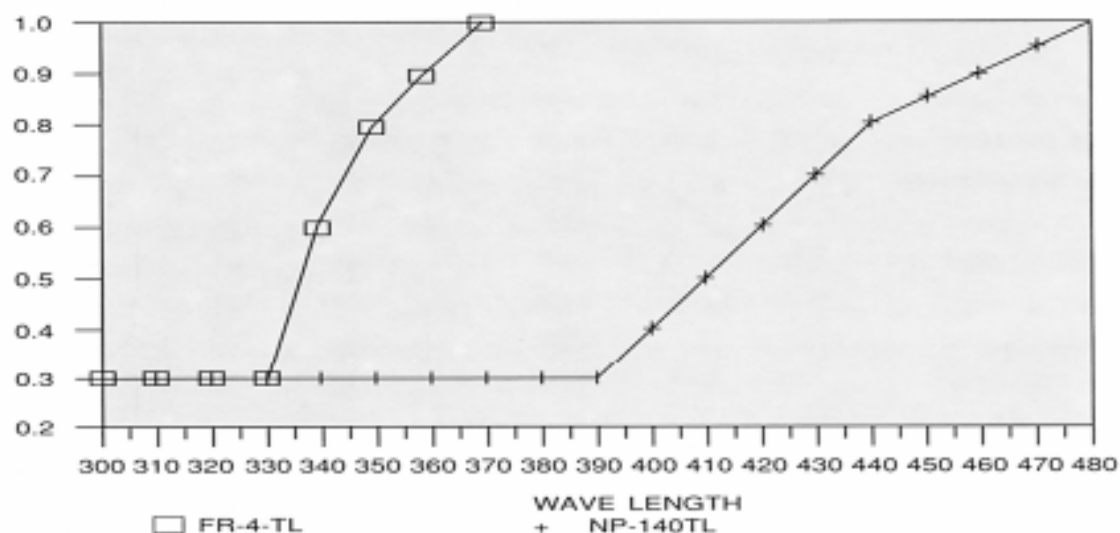

## ■ PRODUCT SIZE & THICKNESS

THICKNESS	COPPER CLADDING	SIZE		THICKNESS TOLERANCE
INCH(mm)	OZ (μm)	INCH	mm	
0.004 (0.1)	0.5 (17)	48.8 x 36.6	1240 x 930	CLASS C/II
to	1.0 (35)	48.8 x 40.5	1240 x 1030	
0.047 (1.2)	2.0 (70)	48.8 x 42.5	1240 x 1080	

■ Keeping the core and prepreg in the same grain direction is crucial to ensure the flatness of multilayer boards.

Grain direction is shown on the Certificate of Conformance

## ■ CERTIFICATION UL

• UL File No. : E98983

■ **CONSTRUCTION:**

THICKNESS		CONSTRUCTION	THICKNESS		CONSTRUCTION
mm	mil		mm	mil	
0.08	3	2112 1 ply	0.45	18	7628 x 2 + 1080 x 1
0.10	4	1080 2 plies	0.46	18	7667 2 plies
0.11	4	2116 1 ply	0.50	20	7628 3 plies
0.13	5	1080 2 plies	0.53	21	7628 3 plies
0.13sp	5	2116 1 ply	0.60	24	7628 3 plies
0.15	6	1506 1 ply	0.77	31	7628 4 plies
0.16	6	2112 2 plies	0.8	32	7628 4 plies
0.21	8	7628 1 ply	0.9	36	7628 5 plies
0.26	10	2116 2 plies	1.0	39	7628 5 plies
0.30	12	2116 3 plies	1.1	43	7628 6 plies
0.30sp	12	1506 2 plies	1.2	47	7628 6 plies
0.35	14	7628 2 plies			
0.38	15	7628 2 plies			

\*1.2, 1.1, 1.0, 0.9, 0.77 mm, THICKNESS INCLUDES CLADDING. ALL OTHERS EXCLUDE CLADDING.



## Double Coated Tissue Tapes

### 9888T

*Temporary Technical Data*

*May, 2002*

#### Product Description:

Product 9888T double coated tissue tape features a tissue carrier for dimensional stability and improved handling with ease of die cutting and laminating.

#### Construction:

Product Number	Adhesive <sup>1</sup> / Color/ Tape Thickness	Carrier	Liner Color, Type, Print	Liner Caliper
9888T	Translucent, 0.0059" (0.150mm)	Tissue translucent in color	White, PE <sup>2</sup> polycoated paper, 3M logo print in red color	0.0059" (0.150mm)

Note 1: Pressure Sensitive Acrylic Adhesive provides excellent initial tack and adhesion to a wide variety surface including many low surface energy plastics.

Note 2: PE (Polyethylene)

#### Feature

1. 9888T feature a medium-soft acrylic pressure sensitive adhesive system. The key characteristics of this adhesive include a combination of high initial adhesion and good shear and holding power to a wide variety of materials, including many plastics.
2. 9888T feature controlled adhesive flow into open cell foam and controlled caliper for bond to application surface.
3. For foam laminating, it provides excellent foam stability to reduce stretching and allows to more precise alignment during application.

## Typical Physical Properties and Performance Characteristics

Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.

Product Number	9888T
<b>Adhesion to stainless steel</b> ASTMD3330 –180 degree, 2 mil Al foil at 22°C, 50%RH 15 minute RT 72 Hour RT	g/25.4m 2940 3180
<b>Adhesion to ABS</b> ASTMD3330 –180 degree, 2 mil Al foil at 22°C, 50%RH 15 minute RT 72 Hour RT	2210 2440
<b>Adhesion to PC</b> ASTMD3330 –180 degree, 2 mil Al foil at 22°C, 50%RH 15 minute RT 72 Hour RT	2560 2670
<b>Adhesion to PP</b> ASTMD3330 –180 degree, 2 mil Al foil at 22°C, 50%RH 20 minute RT 72 Hour RT	1900 2190

<b>Shear strength</b> ASTMD3654 modified 0.5 inch <sup>2</sup> sample size at 22°C 1000 grams	10000 mins
<b>Relative High temperature Operating Ranges</b>	
Long Term (days, weeks)	80°C
Short Term (minutes, hours)	120°C
<b>Shelf Life</b> 12 months from date of receipt by customer when stored in original carton at 22 °C and 50% relative humidity	

**Application Techniques:**

Bond strength is dependent upon the amount of adhesive-to-surface contact developed. Firm application pressure helps develop better adhesive contact and improves bond strength.

To obtain optimum adhesion, the bonding surfaces must be clean, dry and well unified. Some typical surface cleaning solvents are isopropyl alcohol or heptane. Note: Carefully read and follow the manufacturer's precautions and directions for use when working with solvents.

Ideal tape application temperature range is 70° F to 100° F (21° C to 38° C). Initial tape application to surfaces at temperatures below 50° F (10° C) is not recommended because the adhesive becomes too firm to adhere readily. However, once properly applied, low temperature holding is generally satisfactory.

**General Information**

Tape 9888T has a tissue carrier, which can add dimensional stability to foams and other substrates. The carrier also provides easier handling during slitting and die-cutting.

**Application Ideas**

- 9888T tapes are specially formulated for many indoor high performance purpose mounting and joining applications, including bonding to Polyethylene, Polypropylene and many other Plastics, where moderate temperature and shear performance are required.
- 9888T tapes are formulated for more demanding indoor and moderate outdoor high performance mounting and joining application.
- Application ideas for these tapes include
  - Lens attachment for mobile phone
  - Wire and Cable Clips
  - Appliance, Case for display and Electronics Equipment Trim
  - Interior under sheet for car
  - Paper splicing
  - Foam, Gasket attachment in mobile phones and pagers.
  - Plastics Hooks, Racks and Dispensers
  - Sign, Nameplates and Plaques
  - Appliques

**Important Notice**


3M MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's method of application. Please remember that many factors can affect the use and performance of a 3M product in a particular application. The materials to be bonded with the product, the surface preparation of those materials, the product selected for use, the conditions in which the product is used, and the time and environmental conditions in which the product is expected to perform are among the many factors that can affect the use and performance of a 3M product. Given the variety of factors that can affect the use and performance of a 3M product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

**Limitation of Remedies and Liability**

If the 3M product is proved to be defective, THE EXCLUSIVE REMEDY, AT 3M'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OF OR TO REPAIR OR REPLACE THE DEFECTIVE 3M PRODUCT. 3M shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including negligence, warranty, or strict liability.



Part No.	Development status
20565-001R-13	Under development

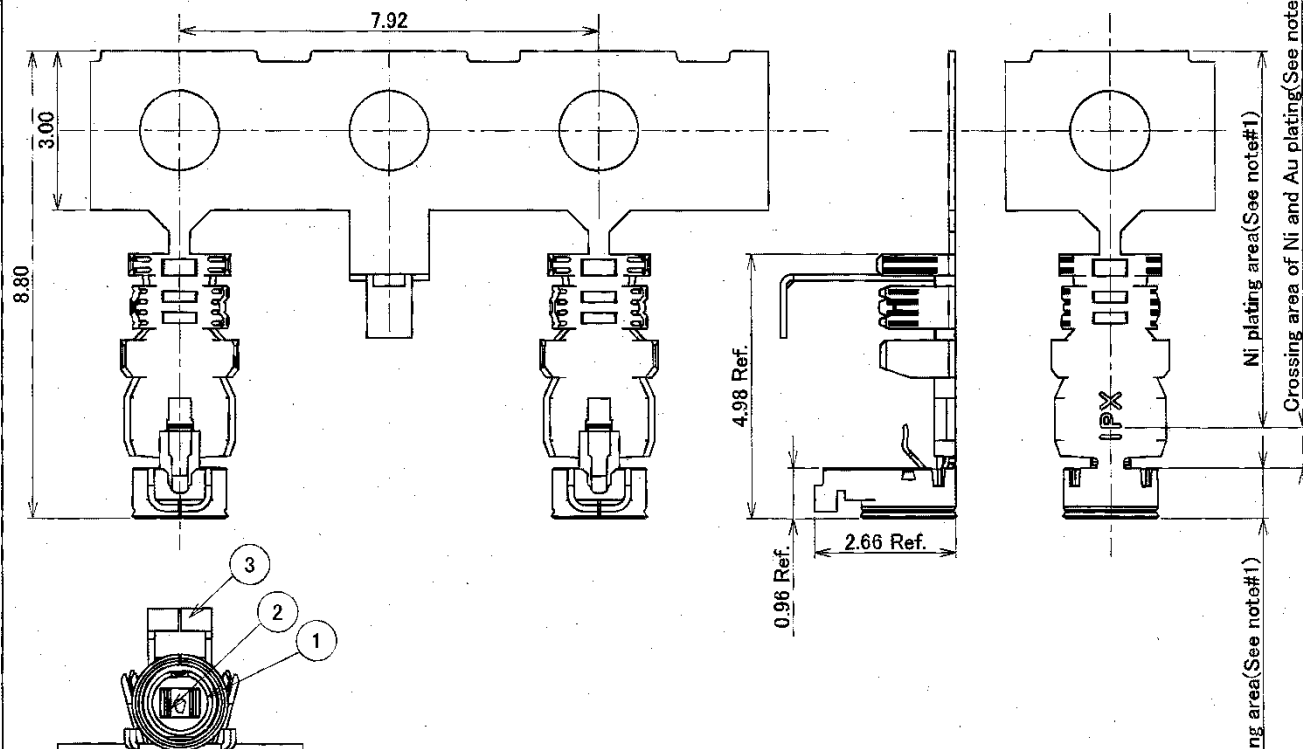

#### Notes

##### 1. Material and finish (Plating)

- ① Housing  
PBT (Black) UL94V-0
- ② Contact  
Phosphor bronze : Au over Ni
- ③ Ground Contact  
Phosphor bronze  
Au plating area : Au over Ni  
Ni plating area : Ni only

##### 2. Packing

Reel

##### 3. Applicable cable

##### 3-1. Description

Inner conductor

AWG#32(7/0.08)

Silver plating annealed copper wire or silver plating tin-copper alloy.

\*Must not use solder coated inner conductor.

Dielectric core

Fluoro-plastics, diameter 0.68(+0.04/-0.02)mm  
nominal thickness 0.22mm

Outer conductor

16/4/0.05, nominal diameter 0.93mm silver plating  
annealed copper wire.

\*Must not use solder coated outer conductor

Jacket

Fluoro-plastics, diameter 1.13(+0.08/-0.05)mm  
nominal thickness 0.10mm

##### 3-2. Requirements

Characteristic impedance : 50(±2)ohm by TDR method

Nominal capacitance (Reference value) : 97pF/m


Conductor resistance of inner conductor (Reference value) : 520 ohm/km

Insulation resistance : 1500 Mega-ohm. km MIN.

Dielectric with stance voltage : on breakdown at AC1000V for 1 minutes.



##### 4. Applicable connector

P/N:20449-001E \*\* MHF4 Receptacle

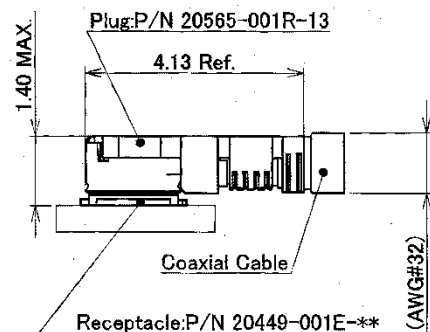

#### Mating Condition

GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

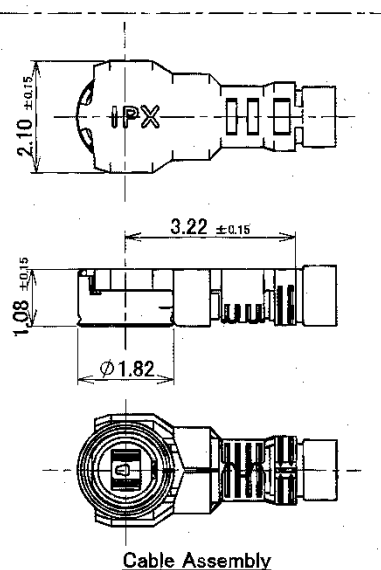

#### For CINGXING

DESIGNED BY S. Suzuki		DATE Jul. 10/1/13	
CHKD BY T. Takano		DATE Jul. 10/1/13	
APPD BY T. Takano		DATE July 10/1/13	
REV	ECN	BY	DATE
0	213609	S.S.	Jul. 10/1/13
REV. RECORD			
SERIES No.		R5	
CUSTOMER COPY		PROJECTION	
SCALE		UNIT	
10:1		mm	
DWG. No.		20565	
SHEET		1/2	
REV.		0	

**I-PEX** DAI-ICHI SEIKO CO., LTD.  
I-PEX Business Company


MHF4L PLUG CONNECTOR

Part No.	20565-001R-13		
Applicable cable strip dimension	<p>Note 1</p>		
Braided shield of Outer conductor	Single braided shield		
P/N of semi auto termination machine	90600-013		
Crimp Height	<p>Note 2</p>	<p>Note 2</p>	<p>Note 2</p>
	CH-1(i-Fit Part) : 1.07~1.11	CH-2(Shield Part) : 0.90~0.94	CH-3(Jacket Part) : 1.16~1.20


#### Notes.

1. Must not use solder coated inner conductor and outer conductor
  2. Use for point micrometer.
  3. Mating and unmating instruction
- 3-1. Mating  
Mate the connector vertically as much as possible, adjusting the mating axis of plug and receptacle. Do not slant mate.
- 3-2. Unmating  
3-2-1. In case of unmating by pulling tool(P/N90609-0001)  
Use the pulling tool as the following drawing, and pull plug to vertical direction as directly as possible.
- 3-2-2. In case of unmating directly by hand.  
Catch the catching area of plug, and pull plug to vertical direction as directly as possible.

Note 3-1



Note 3-2-1



Note 3-2-2



GENERAL TOLERANCE	
6 MAX.	±0.2
6 OVER MAX. 30	±0.3
30 OVER MAX. 120	±0.5
ANGLE	±2°

Confidential III C

For CINGXING															
<table border="1"> <tr> <td>DESIGN BY</td> <td>DATE</td> </tr> <tr> <td>CHKD BY</td> <td>DATE</td> </tr> <tr> <td>APP'D BY</td> <td>DATE</td> </tr> </table>					DESIGN BY	DATE	CHKD BY	DATE	APP'D BY	DATE					
					DESIGN BY	DATE									
					CHKD BY	DATE									
APP'D BY	DATE														
TITLE <b>MHF4L PLUG CONNECTOR</b>															
REV	ECN	BY	DATE	APP	CUSTOMER COPY 	SCALE 10:1	UNIT mm	DWG. No. 20565	SHEET 2/2	REV. 0					
SERIES No.															

# SPECIFICATION FOR APPROVAL

DOCUMENT: A3132TS001

---

STYLE : COAXIAL CABLE  
105°C 30V

---

SIZE: 32AWG×1C  
BRAID : TD

---

RECOGNIZED: **UL 1979**  
MEET VW-1

---



**WONDERFUL HI-TECH CO.,LTD.**

OFFICE : 72WU KONG 6TH ROAD,  
WU KU IND. DISTRICT  
TAIPEI HSIEN, TAIWAN

TEL : (02)22988033  
FAX : (02)22988031-2


FACTORY : 17 PEI YUAN ROAD,  
CHUNG-LI IND. PARK  
TAIWAN, R.O.C.

TEL : (03)4527777  
FAX : (03)4517214



# WONDERFUL HI-TECH CO., LTD.

## SPECIFICATION

STYLE	105°C 30V UL 1979	DOCUMENT NO :	A3132TS001
SIZE	32AWG	ESTABLISHED DATE:	Mar/16/2005
STANDARD :			
Conductor	Size	AWG	32
	Material	----	Silver Cover Copper
	Conductors No.	----	7
	Conductors Size	mm	0.085
	O.D.	mm	0.26
Insulation	Average Thickness	mm	0.22
	Diameter	mm	$0.70 \pm 0.03$
	Material	----	FEP
	Color	----	Clear
Braid	Material	----	Tinned Copper
	Construction	mm	16 / 4 / 0.050
	Coverage	%	89.4
Jacket	Average Thickness	mm	0.12
	Diameter	mm	$1.13 \pm 0.05$
	Material	----	FEP
	Color	----	According to customer
Marking	Non		
Drawing			

AK001/210X297/1.0

PAGE : 1

EDITION : 1.4

MAKER : *H. C. KUO* CONFIRM : *C. Y. Chen*

APPROVAL : *W. J. Wang*



# WONDERFUL HI-TECH CO., LTD.

## SPECIFICATION

Electrical & Physical Properties						
Item			32AWG			
Rating Temp Voltage			105°C 30V			
Conductor Resistance			497 OHM/KM/20°C MAX.			
Insulation Resistance			3000 MEGA OHM-KM MIN.			
Dielectric Strength			AC 1000 V/Minute			
Spark Test			2 KV			
Insulation	Unaged	Tensile Strength	2500 PSI MIN.( 1.76 Kg / m m <sup>2</sup> )			
		Elongation	200% MIN.			
	Aged	Tensile Strength	UNAGED MIN. 75%(168HRS×232°C)			
		Elongation	UNAGED MIN. 75%(168HRS×232°C)			
Jacket	Unaged	Tensile Strength	2500 PSI MIN.( 1.76 Kg / m m <sup>2</sup> )			
		Elongation	200% MIN.			
	Aged	Tensile Strength	UNAGED MIN.75%(168HRS×232°C)			
		Elongation	UNAGED MIN.75%(168HRS×232°C)			
Nom. Impedance			50 ± 3 Ohms			
Nom. Capacitance			96 ± 3 pF/m			
Nom. Vel. of Prop.			69%			
Storage Temperature			-40°C ~+80°C			
VSWR Test (0 – 6 GHZ)			Max 1.3			
Flame Test			VW-1 OK			
Attenuation (dB/1m)		2.0GHZ	2.4GHZ	2.5GHZ	5.0GHZ	6.0 GHZ
		2.90	3.20	3.28	5.05	5.40

AK001/210X297/1.0

PAGE : 2

EDITION : 1.4

MAKER : *H. C. KUO*CONFIRM : *C. Y. Chen*APPROVAL : *W. J. Wang*