

Page 1 of 82

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO **FCC PART 15 SUBPART C REQUIREMENT**

Sharp Corporation, Mobile Communication B.U. Applicant:

2-13-1, Hachihonmatsu-lida, Higashi-hiroshima-shi,

Hiroshima 739-0192, Japan

Sharp Corporation Manufacturer:

1 Takumi-cho, Sakai-ku, Sakai City, Osaka 590-8522, Japan

Smart Phone Product Name:

Report Number: T190308W01-RP4

FCC ID: APYHRO00273

FCC Rule Part: §15.247, Cat: DTS

Apr. 01, 2019 **Issue Date:**

Mar. 05, 2019~Mar. 26, 2019 Date of Test:

Date of EUT Received: Mar. 05, 2019

Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Tai-Issued by:

wan. (R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Wei Chang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 2 of 82

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190308W01-RP4	Rev.00	Initial creation of document	All	Apr. 01, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。







Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	8
5	MEASUREMENT UNCERTAINTY	11
6	CONDUCTED EMISSION TEST	12
7	DUTY CYCLE OF TEST SIGNAL	16
8	PEAK OUTPUT POWER MEASUREMENT	19
9	6dB BANDWIDTH MEASUREMENT	22
10	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	27
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	36
12	PEAK POWER SPECTRAL DENSITY	77
13	ANTENNA REQUIREMENT	82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 4 of 82

GENERAL INFORMATION

1.1 Product description

General:

Product Name:	Smart Phone
Hardware Version:	DVT
Software Version:	N/A
Power Supply:	3.85V from Rechargeable Li-ion Battery

WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology		
11b/g	2412-2462	11	b: 16.41dBm g: 19.18dBm	DSSS, OFDM		
11n	HT20 2412-2462	11	18.96dBm	OFDM		
Modulation	Modulation type:		CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM			
Antenna Designation:		Inverted-F Antenna, Gain: -3.3dBi (ANT0) / -5.7dBi (ANT1)				
Transition Rate:		802.11 g: 6/9	2/5.5/11 Mbps 9/12/18/24/36/48/54 Mt MHz: 6.5 – 144.4 Mbps			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 5 of 82

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

KDB 558074 D01 DTS Meas. Guidance v05r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

1.6 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

1.7 Referencing test data across separate equipment authorization

The test report T190304W03-RP4 under original FCC ID: APYHRO00272 are fully referred for the new FCC ID: APYHRO00273 in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page 6 of 82

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 7 of 82



2.4 Configuration of Tested System Fig. 2-1 Radiated Emission



Fig. 2-2 AC Power Line Conducted Emission



Fig. 2-2 Conducted (Antenna Port)
Emission




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A
2.	DC Power Supply	Anritsu	E3640A	MY52410006	N/A	Unshielded
3.	Notebook	Lenovo	T440P	PC-089AH5	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(a)(2)	6dB & 99% Emission Bandwidth	Compliant
§15.205 §15.209 §15.247(d)	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant


DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b, 802.11g and 802.11n HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz		
6	2437 MHz		
7	2442 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The gevin UE is pre-scanned among below modes.

Modulation	Transmission Chain				Multiple Transmission Spatial
□ 802.11 b	⊠ Ch0	⊠ Ch1	☐ Ch2	□ Ch3	⊠ 2TX
□ 802.11 g	⊠ Ch0	⊠ Ch1	☐ Ch2	□ Ch3	⊠ 2TX
□ 802.11 n	⊠ Ch0	⊠ Ch1	☐ Ch2	□ Ch3	⊠ MIMO

4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and Transaction documents, Subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/retring-e-occuments/fifth-e-occument/fifth-e-oc



Page 10 of 82

RADIATED EMISSION TEST:

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
	RADIATED EMISSION TEST (BELOW 1 GHz)					
802.11g	1 to 11	1,6,11	OFDM	6	2TX	
	RADIA	TED EMISS	ION TEST (ABO	VE 1 GHz)		
802.11b	1 to 11	1, 6, 11	DSSS	1	2TX	
802.11g	1 to 11	1, 6, 11	OFDM	6	2TX	
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO	

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11b	1 to 11	1, 6, 11	DSSS	1	2TX		
802.11g	1 to 11	1, 6, 11	OFDM	6	2TX		
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.922 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.922 dB
Peak Power Density	+/- 2.004 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 12 of 82

CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)						
, , ,	,	,					
MHz	Quasi-peak	Average					
0.15 to 0.50	66 to 56	56 to 46					
0.50 to 5	56	46					
5 to 30	60	50					

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50

6.2 Measurement Equipment Used

	Conducted Emission Test Site												
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.								
TYPE		NUMBER	NUMBER	CAL.									
CABLE	EMCI	CFD300-NL	CERF	06/29/2018	06/28/2019								
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019								
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020								
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020								
Software		EZ-EMC(0	CCS-3A1-CE	Ξ)									

6.3 EUT Setup


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and Transaction documents, Subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/retring-e-occuments/fifth-e-occument/fifth-e-oc



6.4 Test SET-UP (Block Diagram of Configuration)

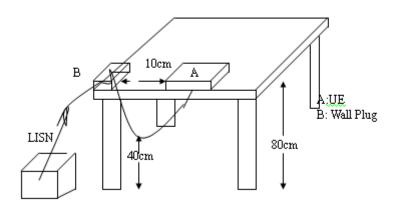

6.5 Measurement Procedure


- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






AC POWER LINE CONDUCTED EMISSION TEST DATA

Description: Operation Date: 2019/3/11

Temp.(℃)/**Hum.**(%): 24(°C)/52% Line: L1


Test Voltage: AC 120V/60Hz Test By: Peter

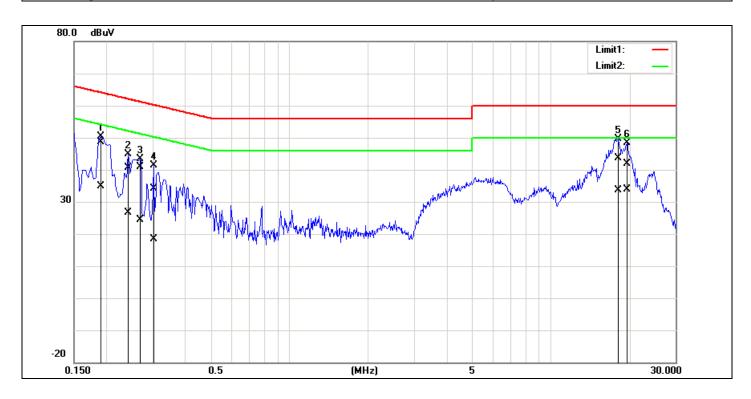

No.	Frequency	QuasiPeak reading	Average reading	Correction	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
		3							Ü	Ŭ	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1900	48.48	34.61	0.15	48.63	34.76	64.03	54.04	-15.40	-19.28	Pass
2	0.2420	40.36	26.44	0.15	40.51	26.59	62.02	52.03	-21.51	-25.44	Pass
3	0.2700	40.69	24.21	0.15	40.84	24.36	61.12	51.12	-20.28	-26.76	Pass
4	0.3020	34.00	18.13	0.16	34.16	18.29	60.19	50.19	-26.03	-31.90	Pass
5	18.1100	42.96	33.00	0.65	43.61	33.65	60.00	50.00	-16.39	-16.35	Pass
6	19.5340	41.17	33.17	0.69	41.86	33.86	60.00	50.00	-18.14	-16.14	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Description: Operation Date: 2019/3/11

Temp.(℃)/**Hum.**(%): 24(°C)/52% Line:

Test Voltage: AC 120V/60Hz Test By: Peter

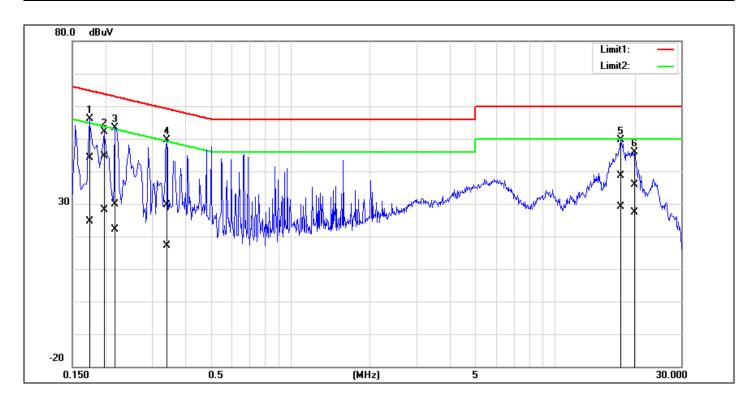

No.	Frequency	QuasiPeak reading	Average reading	Correction	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
		reading	Teauing	Tactor	resuit	resurt	mint	IIIIIt	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1740	44.02	24.65	0.10	44.12	24.75	64.76	54.77	-20.64	-30.02	Pass
2*	0.1980	44.43	28.14	0.10	44.53	28.24	63.69	53.69	-19.16	-25.45	Pass
3	0.2180	29.75	22.13	0.10	29.85	22.23	62.89	52.89	-33.04	-30.66	Pass
4	0.3420	29.47	16.91	0.11	29.58	17.02	59.15	49.15	-29.57	-32.13	Pass
5	17.7099	38.12	28.61	0.51	38.63	29.12	60.00	50.00	-21.37	-20.88	Pass
6	19.9900	35.45	26.81	0.55	36.00	27.36	60.00	50.00	-24.00	-22.64	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



DUTY CYCLE OF TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

Duty Cycle:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	99.36	0.03	0.08	0.01
802.11g	98.26	0.08	0.49	0.01
802.11n_20	98.08	0.08	0.53	0.01

b = 99.36%, g = 98.26%, $n_ht_20 = 98.08\%$

Duty Cycle Factor: $10 * \log(1/0.9936) = 0.03$ Duty Cycle Factor: $10 * \log(1/0.9826) = 0.08$ Duty Cycle Factor: $10 * \log(1/0.9808) = 0.08$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and

Transaction documents, Subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/retring-e-occuments/fifth-e-occument/fifth-e-oc



7.1 Duty Cycle Test Signal Measurement Result 802.11 b



802.11 g




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



802.11 n_20 MHz

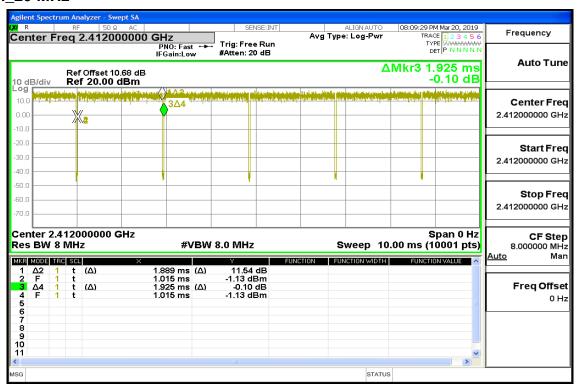

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 19 of 82

8 PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Note:

As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.

(i) If transmit signals are correlated, then Directional gain

=10
$$\log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$$


[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.

8.2 Measurement Equipment Used


	Conducted Emission Test Site											
EQUIPMENT	MFR	MODEL	MODEL SERIAL		CAL DUE.							
TYPE		NUMBER	NUMBER	CAL.								
Power Meter	Anritsu	ML2496A	1242004	10/23/2018	10/22/2019							
Power Sensor	Anritsu	MA2411B	1207365	10/23/2018	10/22/2019							
Power Sensor	Anritsu	MA2411B	1207368	10/24/2018	10/23/2019							
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019							
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020							

8.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非兄方给明,此报生结果成果到过了样兄负责。同时此样兄弟保留的工,未报生主领土公司申而封司,不可如公访制。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guid-
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

8.5 Measurement Result

802.1	1b_2TX						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dRm)		Total Peak Output Power	Limit (dBm)	RESULT
	(1411 12)	rtato	CH 0	CH 1	(dBm)	(dBiii)	
1	2412	1	13.24 13.18		16.22	30.00	PASS
6	2437	1	13.49 13.30		16.41	30.00	PASS
11	2462	1	13.06 13.58		16.34	30.00	PASS
802.1	1b_2TX						
СН	Freq. (MHz)	· •		ver	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
	CH 0 CH 1		CH 1	(dBm)			
1	2412	1	13.95 13.89		16.96	30.00	PASS
6	2437	1	13.91 13.83		16.91	30.00	PASS
11	2462	1	13.81	13.96	16.92	30.00	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



802.1	1g_2TX						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dRm)		Total Peak Output Power	Limit (dBm)	RESULT
	(111112)		CH 0	CH 1	(dBm)	(0.2)	
1	2412	6	15.36	15.42	18.40	30.00	PASS
6	2437	6	16.28	16.05	19.18	30.00	PASS
11	2462	6	16.14 16.20		19.18	30.00	PASS
802.1	1g_2TX						
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)		Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
			CH 0	CH 1	(dBm)		
1	2412	6	13.89	13.74	16.90	30.00	PASS
6	2437	6	13.83 13.75		16.88	30.00	PASS
11	2462	6	13.69	13.80	16.83	30.00	PASS

802.1	1n_HT20	M MIMC						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dRm)		Total Peak Output Power	Limit (dBm)	RESULT	
	(rtato	CH 0	CH 1	(dBm)	(4211)		
1	2412	MCS8			18.84	30.00	PASS	
6	2437	MCS8	16.02	15.87	18.96	30.00	PASS	
11	2462	MCS8	15.74 16.10		18.93	30.00	PASS	
802.1	1n_HT20	M MIMC)					
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)		Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT	
			CH 0	CH 1	(dBm)			
1	2412	MCS8	12.02 11.73		14.97	30.00	PASS	
6	2437	MCS8	13.72 13.77		16.84	30.00	PASS	
11	2462	MCS8	11.83	11.94	14.98	30.00	PASS	

Note

Cable Loss 13.41 dΒ

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

^{*} Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.



Page 22 of 82

9 6DB BANDWIDTH MEASUREMENT


9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Measurement Equipment Used

	Conducted Emission Test Site											
EQUIPMENT	EQUIPMENT MFR		MODEL SERIAL		CAL DUE.							
TYPE		NUMBER	NUMBER	CAL.								
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019							
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019							
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020							
Attenuator	Mini-Circuit	BW-S10W 2+	1	02/26/2019	02/25/2020							

9.3 Test Set-up



9.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
 - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. Repeat above procedures until all frequency of interest measured was complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



9.5 Measurement Result

802.11b Ch0 802.11b Ch1

002	0110			002				
Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result	Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result	
2412	8591.00	> 500	PASS	2412	8108.00	> 500	PASS	
2437	8601.00	> 500	PASS	2437	9042.00	> 500	PASS	
2462	8575.00	> 500	PASS	2462	8610.00	> 500	PASS	

802.11g Ch0 802.11g Ch1

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result	Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	15510.00	> 500	PASS	2412	15740.00	> 500	PASS
2437	15720.00	> 500	PASS	2437	15730.00	> 500	PASS
2462	16290.00	> 500	PASS	2462	15390.00	> 500	PASS

802.11_n_HT20 Ch0 802.11_n_HT20 Ch1

	Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result	Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
	2412	17060.00	> 500	PASS	2412	16890.00	> 500	PASS
Ī	2437	16130.00	> 500	PASS	2437	16100.00	> 500	PASS
Ī	2462	15170.00	> 500	PASS	2462	15700.00	> 500	PASS

^{*}Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




OBW 6dB 802.11b 20MHz Chain0 2412MHz




OBW 6dB 802.11b 20MHz Chain0 2437MHz



OBW 6dB 802.11b 20MHz Chain0 2462MHz




OBW 6dB 802.11b 20MHz Chain1 2412MHz



OBW 6dB_802.11b_20MHz_Chain1_2437MHz



OBW 6dB 802.11b 20MHz Chain1 2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



OBW 6dB 802.11g_20MHz_Chain0_2412MHz




OBW 6dB 802.11g 20MHz Chain0 2437MHz



OBW 6dB_802.11g_20MHz_Chain0_2462MHz




OBW 6dB 802.11g 20MHz Chain1 2412MHz



OBW 6dB_802.11g_20MHz_Chain1_2437MHz




OBW 6dB_802.11g_20MHz_Chain1_2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



OBW 6dB 802.11n 20MHz Chain0 2412MHz



OBW 6dB 802.11n 20MHz Chain0 2437MHz




OBW 6dB 802.11n 20MHz Chain0 2462MHz




OBW 6dB 802.11n 20MHz Chain1 2412MHz



OBW 6dB 802.11n 20MHz Chain1 2437MHz



OBW 6dB 802.11n 20MHz Chain1 2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 27 of 82

10 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

10.2 Measurement Equipment Used

• •						
Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019	
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/09/2018	04/08/2019	
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020	
Attenuator	Mini-Circuit	BW-S10W 2+	1	02/26/2019	02/25/2020	

10.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



Page 28 of 82

10.4 Measurement Procedure

Reference Level of Emission Calculation:

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance .
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- Trace mode = max hold.
- 8. Allow trace to fully stabilize. Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.


Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Set RBW = 100 kHz & VBW= 300 kHz, Detector =Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





10.5 Measurement Result:

Referer	nce Leve	of Limit 802.11b mode	Reference Level of Limit 802.11g mode		
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)
2412	8.30	-11.70	2412	6.78	-13.22
2437	8.63	-11.37	2437	7.39	-12.61
2462	7.78	-12.22	2462	6.56	-13.44

Reference Level of Limit 802.11n20 mode					
Freq.	PSD	Reference Level of Limit			
(MHz)	(dBm)	(dBm)			
2412	5.13	-14.87			
2437	7.51	-12.49			
2462	5.45	-14.55			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Reference Level_802.11b_20MHz_2412MHz




Reference Level_802.11b_20MHz_2437MHz




Reference Level 802.11b 20MHz 2462MHz




Reference Level_802.11g_20MHz_2412MHz



Reference Level_802.11g_20MHz_2437MHz




Reference Level_802.11g_20MHz_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Reference Level_802.11n_20MHz_2412MHz



Reference Level 802.11n 20MHz 2437MHz




Reference Level 802.11n 20MHz 2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Band Edge_802.11b_20MHz_2412MHz




Band Edge_802.11b_20MHz_2462MHz



Band Edge_802.11g_20MHz_2412MHz



Band Edge_802.11g_20MHz_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Band Edge_802.11n_20MHz_2412MHz




Band Edge_802.11n_20MHz_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。








Spurious Emission_802.11b_20MHz_2437MHz




Spurious Emission_802.11b_20MHz_2462MHz



Spurious Emission_802.11q_20MHz_2412MHz



Spurious Emission_802.11q_20MHz_2437MHz



Spurious Emission_802.11q_20MHz_2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Spurious Emission_802.11n_20MHz_2412MHz




Spurious Emission_802.11n_20MHz_2437MHz



Spurious Emission_802.11n_20MHz_2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。





11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



Page 37 of 82

11.2 Measurement Equipment Used:

966A Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.				
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020			
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019			
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020			
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020			
Digital Ther- mo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020			
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019			
Loop Antenna	ETS.LINDGREN	6502	148045	10/08/2018	10/07/2019			
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020			
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020			
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/31/2018	05/30/2019			
Antenna Tower	ccs	CC-A-1F	N/A	N.C.R	N.C.R			
Controller	ccs	CC-C-1F	N/A	N.C.R	N.C.R			
Turn Table	ccs	CC-T-1F	N/A	N.C.R	N.C.R			
Software		e3 V6	5.11-20180413					


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




11.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

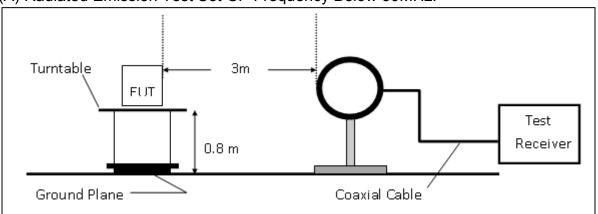

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

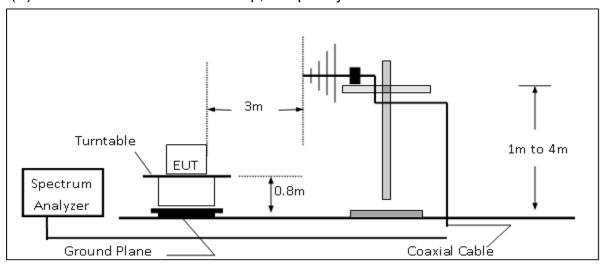


(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

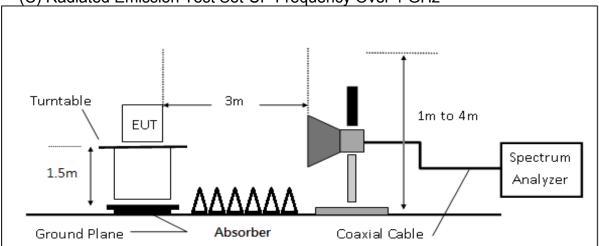

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。





11.4 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page 40 of 82

11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	S .	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

11.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

11.7 Measurement Result

- 1. Refer to next page spectrum analyzer data chart and tabular data sheets.
- 2. Measurements are completed at peak and average level, the mark of average is the highest emission in restricted bands

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and Transaction documents, Subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/retring-e-occuments/fifth-e-occument/fifth-e-oc






Radiated Band Edge Measurement Result (802.11b)

Operation Band :802.11b Test Date :2019-03-26

Fundamental Frequency :2412 MHz Temp./Humi. :21 deg_C / 62 RH


Operation Mode :Bandedge CH LOW Engineer :Wei

EUT Pol. :E1 Plane Measurement Antenna Pol. :VERTICAL

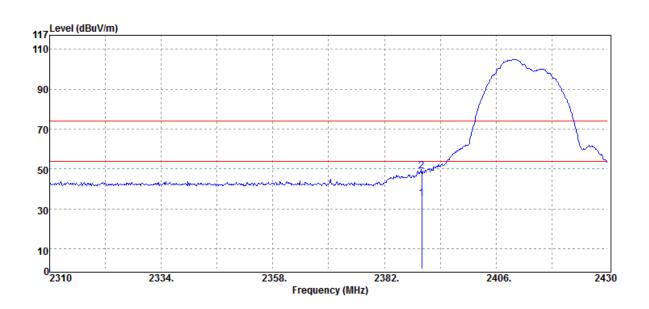

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
2390	Average	38.52	-3.33	35.19	54	-18.81
2390	Peak	52.12	-3.33	48.79	74	-25.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。





:802.11b :2412 MHz

:Bandedge CH LOW


EUT Pol. :E1 Plane

Test Date :2019-03-26

Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

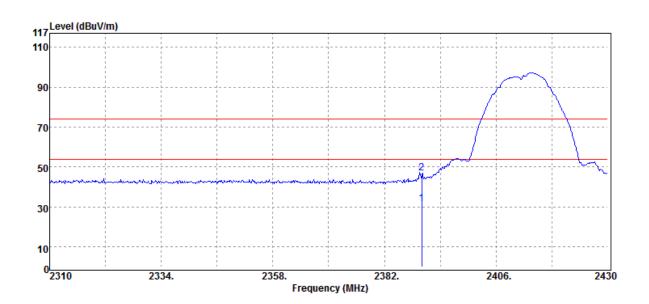

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB
	2390.00	Average	35.11	-3.33	31.78	54.00	-22.22
	2390.00	Peak	50.42	-3.33	47.09	74.00	-26.91

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。





:802.11b :2462 MHz

:Bandedge CH HIGH


EUT Pol. :E1 Plane

Test Date :2019-03-26

Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :VERTICAL

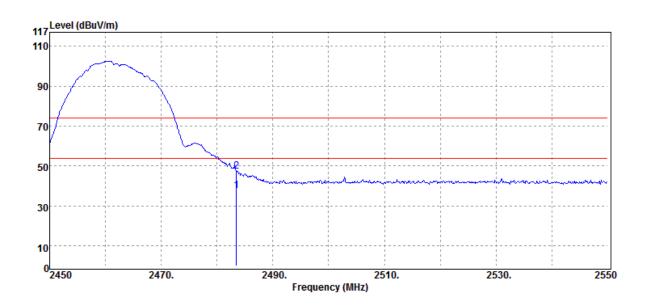

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
2483.50	Average	40.17	-2.72	37.45	54.00	-16.55	
2483.50	Peak	50.21	-2.72	47.49	74.00	-26.51	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。





EUT Pol.

:802.11b :2462 MHz


:Bandedge CH HIGH

:E1 Plane

Test Date :2019-03-26 Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

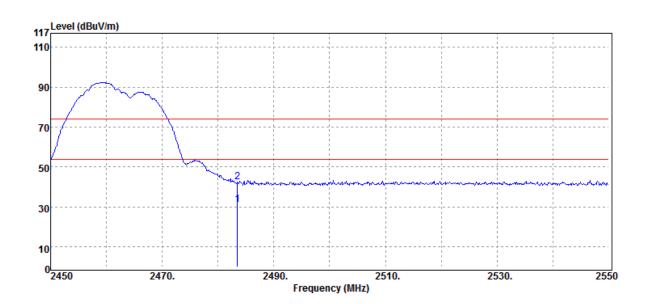

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
2483.50	Average	33.99	-2.72	31.27	54.00	-22.73	
2483.50	Peak	45.08	-2.72	42.36	74.00	-31.64	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Radiated Band Edge Measurement Result (802.11g)

Operation Band :802.11g Fundamental Frequency :2412 MHz

Operation Mode :Bandedge CH LOW


EUT Pol. :E1 Plane

Test Date :2019-03-26

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei


Measurement Antenna Pol. :VERTICAL

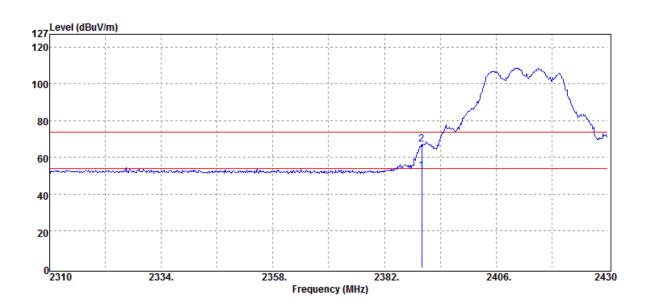

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
2390.00	Average	56.03	-3.33	52.70	54.00	-1.30	
2390.00	Peak	70.43	-3.33	67.10	74.00	-6.90	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有效的,此程生体用度料测验力操口备集。同味此撰口度积积为工,未经生土硕士从司事而轨可,不可如此指刺。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





:802.11g :2412 MHz


:Bandedge CH LOW

EUT Pol. :E1 Plane

Test Date :2019-03-26 Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

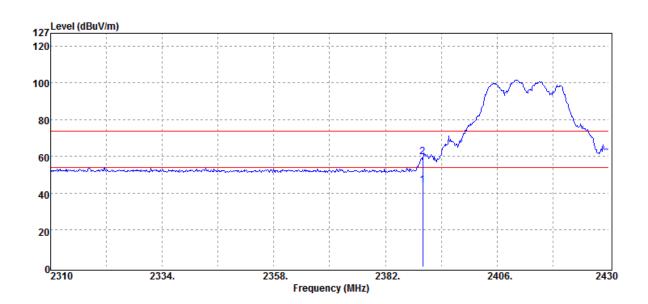

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
2390.00	Average	47.80	-3.33	44.47	54.00	-9.53	
2390.00	Peak	63.15	-3.33	59.82	74.00	-14.18	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。





Operation Mode

EUT Pol.

:802.11g :2462 MHz


:Bandedge CH HIGH

:E1 Plane

Test Date :2019-03-26


Temp./Humi. :21 deg_C / 62 RH Engineer :Wei

:VERTICAL Measurement Antenna Pol.

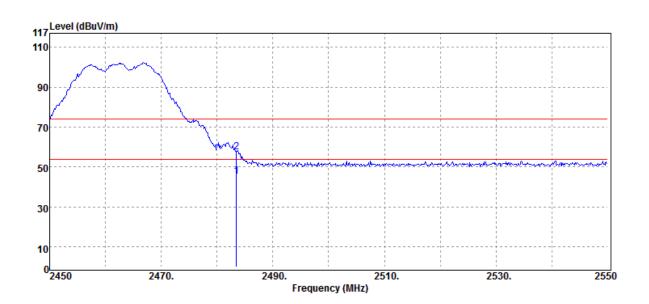

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	_
2483.50	Average	48.06	-2.72	45.34	54.00	-8.66	
2483.50	Peak	60.30	-2.72	57.58	74.00	-16.42	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





:802.11g :2462 MHz

:Bandedge CH HIGH


EUT Pol. :E1 Plane

Test Date :2019-03-26

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

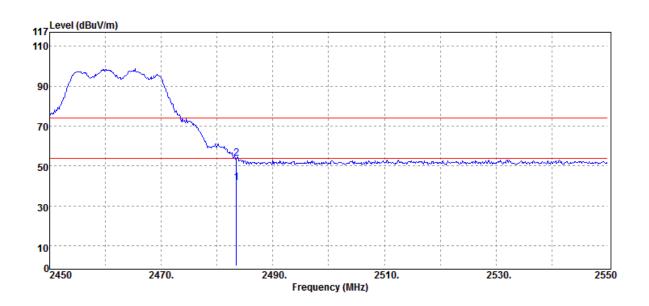

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
2483.50	Average	44.28	-2.72	41.56	54.00	-12.44	
2483.50	Peak	56.73	-2.72	54.01	74.00	-19.99	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。




Page 49 of 82

Radiated Band Edge Measurement Result (802.11_HT20)

Operation Band :802.11n20 Test Date :2019-03-06

Fundamental Frequency :2412 MHz Temp./Humi. :20 deg_C / 61 RH Operation Mode :Bandedge CH LOW Engineer :Wei


EUT Pol. :E1 Plane Measurement Antenna Pol. :VERTICAL

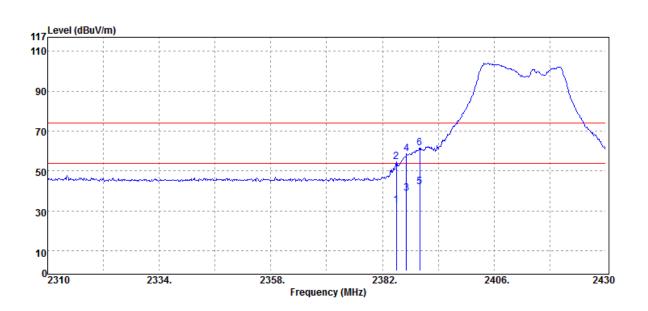

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
2385.00	Average	36.22	-3.33	32.89	54.00	-21.11	
2385.00	Peak	58.18	-3.33	54.85	74.00	-19.15	
2387.16	Average	42.37	-3.32	39.05	54.00	-14.95	
2387.16	Peak	61.89	-3.32	58.57	74.00	-15.43	
2390.00	Average	45.55	-3.33	42.22	54.00	-11.78	
2390.00	Peak	64.76	-3.33	61.43	74.00	-12.57	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的见,此程生华里属野河默之境只有害。同时此样只属伊河河王。太祖生土领太八司隶而封司,天司如设道制。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





:802.11n20 :2412 MHz


:Bandedge CH LOW

EUT Pol. :E1 Plane **Test Date** :2019-03-06

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei


:HORIZONTAL Measurement Antenna Pol.

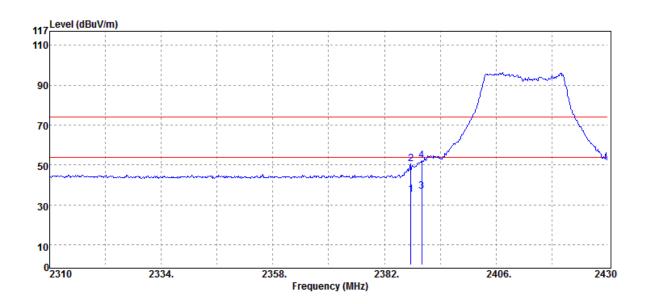

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	
2387.64	Average	38.35	-3.33	35.02	54.00	-18.98	
2387.64	Peak	53.88	-3.33	50.55	74.00	-23.45	
2390.00	Average	40.06	-3.33	36.73	54.00	-17.27	
2390.00	Peak	55.61	-3.33	52.28	74.00	-21.72	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





:802.11n20 :2417 MHz

:Bandedge CH LOW


EUT Pol. :E1 Plane

Test Date :2019-03-06

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei


Measurement Antenna Pol. :VERTICAL

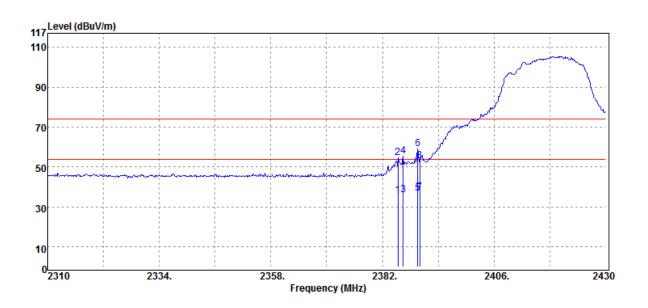

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
2385.36	Average	39.13	-3.33	35.80	54.00	-18.20	
2385.36	Peak	57.95	-3.33	54.62	74.00	-19.38	
2386.44	Average	39.20	-3.32	35.88	54.00	-18.12	
2386.44	Peak	58.76	-3.32	55.44	74.00	-18.56	
2389.56	Average	40.32	-3.33	36.99	54.00	-17.01	
2389.56	Peak	62.61	-3.33	59.28	74.00	-14.72	
2390.00	Average	40.56	-3.33	37.23	54.00	-16.77	
2390.00	Peak	56.44	-3.33	53.11	74.00	-20.89	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非星方的见,此极生红甲基默则过力埃里奇等。同时此接早基皮风风风工,太极生土硕大八司隶而统可,无可如心语则。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





:802.11n20 :2417 MHz

:Bandedge CH LOW


EUT Pol. :E1 Plane

Test Date :2019-03-06

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei


Measurement Antenna Pol. :HORIZONTAL

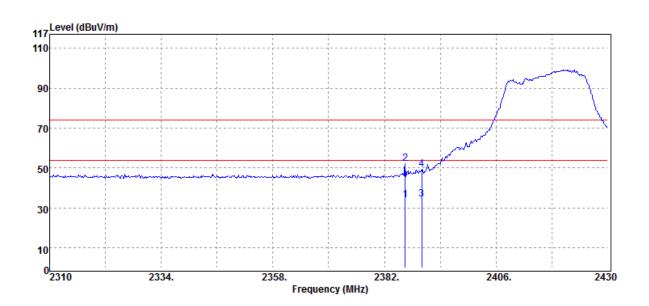

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
	2386.44	Average	37.50	-3.32	34.18	54.00	-19.82	
	2386.44	Peak	55.40	-3.32	52.08	74.00	-21.92	
	2390.00	Average	37.69	-3.33	34.36	54.00	-19.64	
	2390.00	Peak	52.56	-3.33	49.23	74.00	-24.77	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非星方的见,此极生红甲基默则过力埃里奇等。同时此接早基皮风风风工,太极生土硕大八司隶而统可,无可如心语则。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。





d :802.11n20 Frequency :2457 MHz

:Bandedge CH HIGH


EUT Pol. :E1 Plane

Test Date :2019-03-06

Temp./Humi. :20 deg_C / 61 RH


Engineer :Wei

Measurement Antenna Pol. :VERTICAL

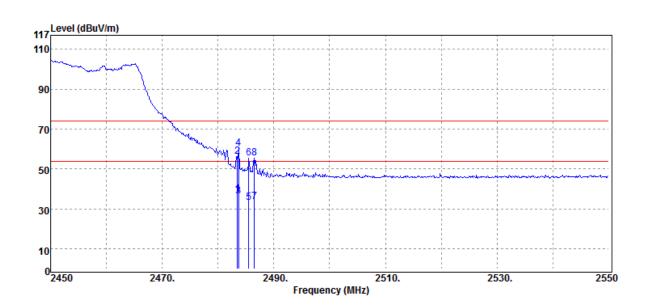

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
	2483.50	Average	40.02	-2.72	37.30	54.00	-16.70	
	2483.50	Peak	59.18	-2.72	56.46	74.00	-17.54	
	2483.70	Average	39.21	-2.71	36.50	54.00	-17.50	
	2483.70	Peak	62.97	-2.71	60.26	74.00	-13.74	
	2485.50	Average	35.94	-2.71	33.23	54.00	-20.77	
	2485.50	Peak	58.38	-2.71	55.67	74.00	-18.33	
	2486.50	Average	36.33	-2.69	33.64	54.00	-20.36	
	2486.50	Peak	58.19	-2.69	55.50	74.00	-18.50	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。





Operation Mode

EUT Pol.

:802.11n20 :2457 MHz

:Bandedge CH HIGH


:E1 Plane

Test Date :2019-03-06

Temp./Humi. :20 deg_C / 61 RH


Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

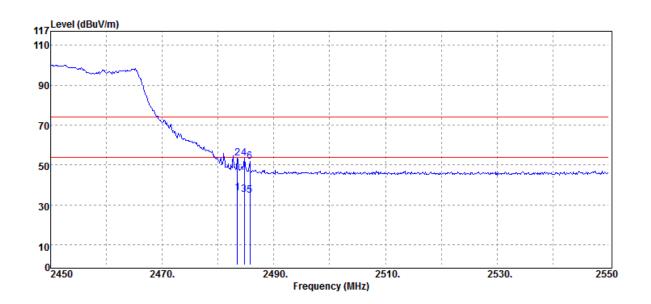

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
2483.50	Average	38.76	-2.72	36.04	54.00	-17.96	
2483.50	Peak	56.10	-2.72	53.38	74.00	-20.62	
2484.70	Average	37.82	-2.70	35.12	54.00	-18.88	
2484.70	Peak	56.29	-2.70	53.59	74.00	-20.41	
2485.70	Average	37.67	-2.71	34.96	54.00	-19.04	
2485.70	Peak	54.54	-2.71	51.83	74.00	-22.17	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Mode

EUT Pol.

:802.11n20 :2462 MHz

:Bandedge CH HIGH


:E1 Plane

Test Date :2019-03-06

Temp./Humi. :20 deg_C / 61 RH


Engineer :Wei

:VERTICAL Measurement Antenna Pol.

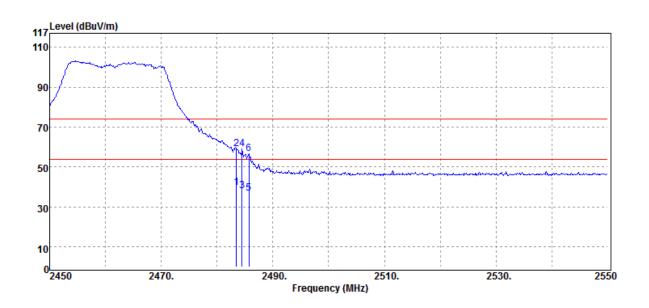

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
2483.50	Average	42.23	-2.72	39.51	54.00	-14.49	
2483.50	Peak	61.76	-2.72	59.04	74.00	-14.96	
2484.50	Average	40.66	-2.70	37.96	54.00	-16.04	
2484.50	Peak	61.63	-2.70	58.93	74.00	-15.07	
2485.70	Average	39.56	-2.71	36.85	54.00	-17.15	
2485.70	Peak	59.30	-2.71	56.59	74.00	-17.41	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





Operation Mode

EUT Pol.

:802.11n20 :2462 MHz

:Bandedge CH HIGH


:E1 Plane

Test Date :2019-03-06

Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

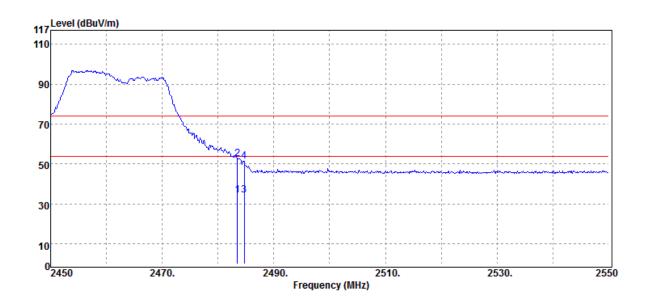

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
2483.50	Average	37.25	-2.72	34.53	54.00	-19.47	
2483.50	Peak	55.29	-2.72	52.57	74.00	-21.43	
2484.70	Average	37.11	-2.70	34.41	54.00	-19.59	
2484.70	Peak	54.18	-2.70	51.48	74.00	-22.52	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 57 of 82

Below 1GHz Worst-Case Data:


Radiated Spurious Emission Measurement Result (802.11 g)

Operation Band :802.11g Test Date :2019-03-09

Fundamental Frequency :2437 MHz Temp./Humi. :20 deg_C / 61 RH

Operation Mode :Tx CH MID Engineer :Wei


EUT Pol. :E1 Plan Measurement Antenna Pol. :VERTICAL

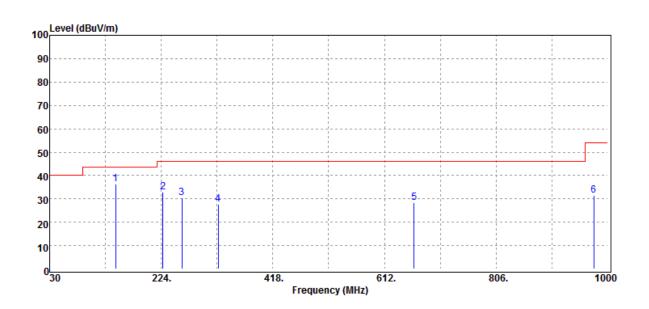

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
144.46	Peak	45.57	-9.32	36.25	43.50	-7.25	
226.91	Peak	43.10	-10.31	32.79	46.00	-13.21	
259.89	Peak	39.55	-9.09	30.46	46.00	-15.54	
322.94	Peak	34.32	-6.62	27.70	46.00	-18.30	
663.41	Peak	27.67	0.83	28.50	46.00	-17.50	
975.75	Peak	24.87	6.64	31.51	54.00	-22.49	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有效的,此程生体用度料测验力操口备集。同味此撰口度积积为工,未经生土硕士从司事而轨可,不可如此指刺。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






EUT Pol.

:802.11g :2437 MHz :Tx CH MID :E1 Plan Test Date :2019-03-09 Temp./Humi. :20 deg_C / 61 RH

Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

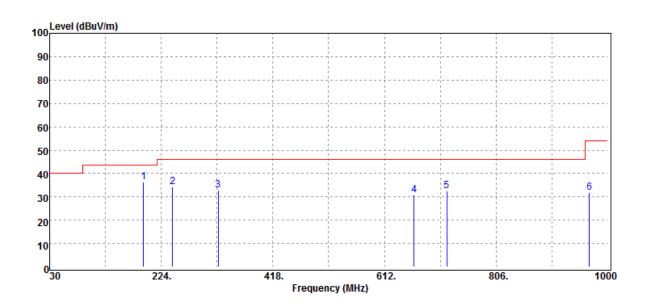

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
192.96	Peak	46.24	-9.82	36.42	43.50	-7.08	
243.40	Peak	43.79	-9.68	34.11	46.00	-11.89	
322.94	Peak	39.41	-6.62	32.79	46.00	-13.21	
663.41	Peak	29.81	0.83	30.64	46.00	-15.36	
720.64	Peak	31.19	1.33	32.52	46.00	-13.48	
967.99	Peak	25.47	6.46	31.93	54.00	-22.07	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非星方的见,此极生红甲基默则过力埃里奇等。同时此接早基皮风风风工,太极生土硕大八司隶而统可,无可如心语则。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page 59 of 82

Above 1GHz Data:


Radiated Spurious Emission Measurement Result (802.11 b)

Operation Band :802.11b Test Date :2019-03-08

Fundamental Frequency :2412 MHz Temp./Humi. :21 deg_C / 62 RH

Operation Mode :Tx CH LOW Engineer :Wei


EUT Pol. :E1 Plane Measurement Antenna Pol. :VERTICAL

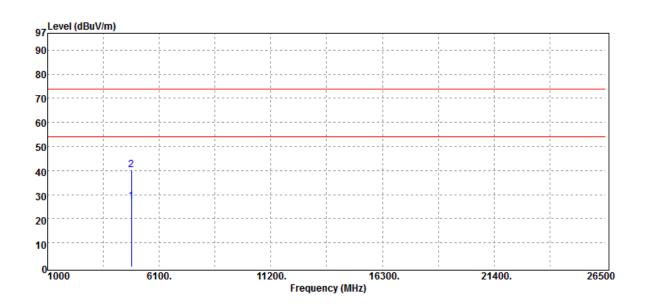

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	24.07	3.02	27.09	54.00	-26.91
4824.00	Peak	37.38	3.02	40.40	74.00	-33.60

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此日有於四,此紀生徒日漢明別建立建日為書。同時出漢日爲月初四五,末紀生土何末八司書而於四,五百如以海剌,

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






EUT Pol.

:802.11b :2412 MHz :Tx CH LOW :E1 Plane Test Date Temp./Humi. :2019-03-08

:21 deg_C / 62 RH

Engineer :Wei


Measurement Antenna Pol. :HORIZONTAL

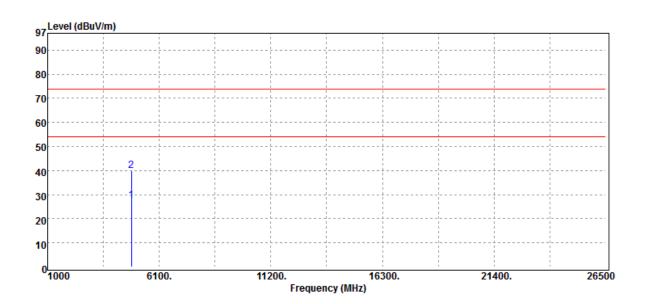

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
	4824.00	Average	24.46	3.02	27.48	54.00	-26.52	
	4824.00	Peak	36.95	3.02	39.97	74.00	-34.03	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非星方的见,此极生红甲基默则过力埃里奇等。同时此接早基皮风风风工,太极生土硕大八司隶而统可,无可如心语则。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






:802.11b :2437 MHz :Tx CH MID :E1 Plane

Test Date :2019-03-08

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei


:VERTICAL Measurement Antenna Pol.

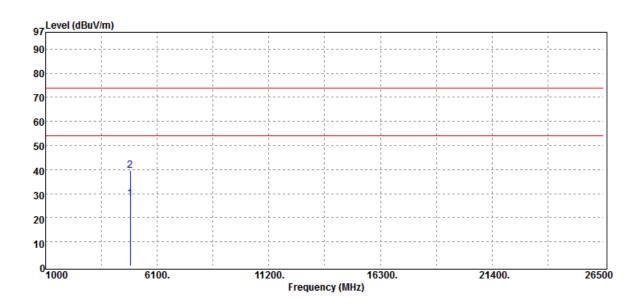

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
	4874.00	Average	24.34	3.36	27.70	54.00	-26.30	
	4874.00	Peak	36.40	3.36	39.76	74.00	-34.24	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






:802.11b :2437 MHz :Tx CH MID :E1 Plane Test Date :2019-03-08 Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

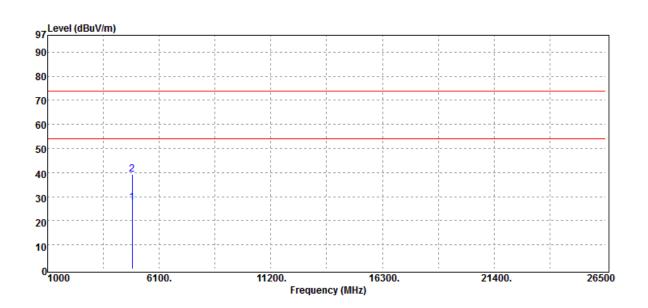

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	
4874.00	Average	24.24	3.36	27.60	54.00	-26.40	
4874.00	Peak	35.91	3.36	39.27	74.00	-34.73	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





EUT Pol.

:802.11b :2462 MHz :Tx CH HIGH


:E1 Plane

Test Date :2019-03-08

Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :VERTICAL

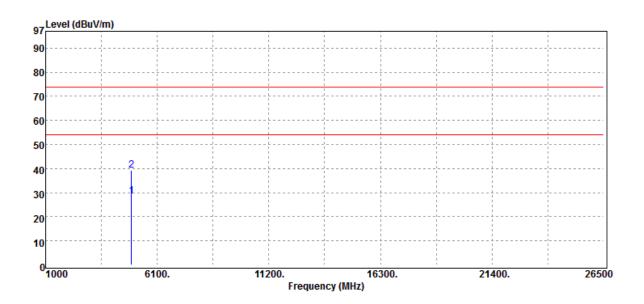

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
	4924.00	Average	24.59	3.93	28.52	54.00	-25.48	
	4924.00	Peak	35.19	3.93	39.12	74.00	-34.88	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。





:802.11b :2462 MHz :Tx CH HIGH

EUT Pol.


:E1 Plane

Test Date :2019-03-08

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

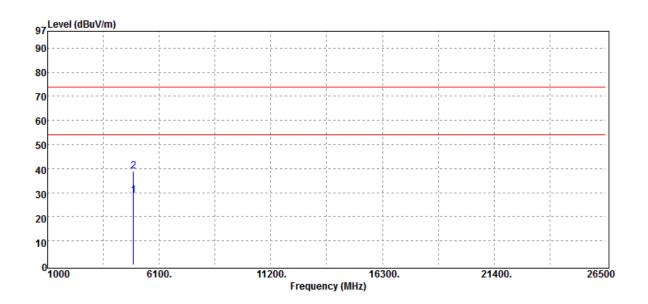

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
	4924.00	Average	24.88	3.93	28.81	54.00	-25.19	
	4924.00	Peak	35.02	3.93	38.95	74.00	-35.05	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page 65 of 82

Radiated Spurious Emission Measurement Result (802.11 g)

Operation Band :802.11g Test Date :2019-03-08


Fundamental Frequency :2412 MHz Temp./Humi. :21 deg_C / 62 RH Operation Mode :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane Measurement Antenna Pol. :VERTICAL

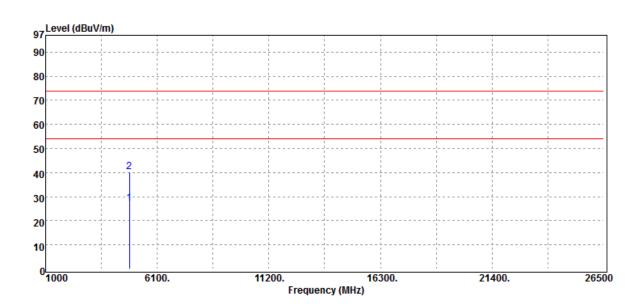

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
	4824.00	Average	24.30	3.02	27.32	54.00	-26.68	
	4824.00	Peak	37.22	3.02	40.24	74.00	-33.76	

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






EUT Pol.

:802.11g :2412 MHz :Tx CH LOW :E1 Plane

Test Date Temp./Humi. :2019-03-08


:21 deg_C / 62 RH Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

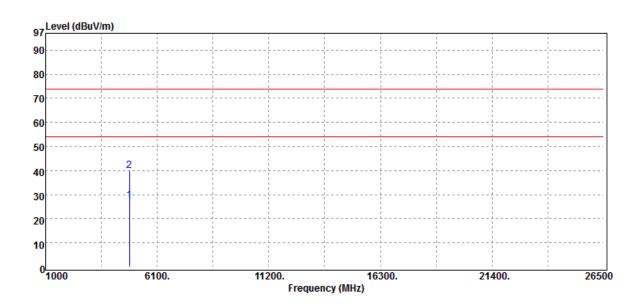

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
	4824.00	Average	24.61	3.02	27.63	54.00	-26.37
	4824.00	Peak	36.93	3.02	39.95	74.00	-34.05

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。






Operation Band :80
Fundamental Frequency :24
Operation Mode :Tx
EUT Pol. :E

:802.11g :2437 MHz :Tx CH MID :E1 Plane Test Date :2019-03-08

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei


Measurement Antenna Pol. :VERTICAL

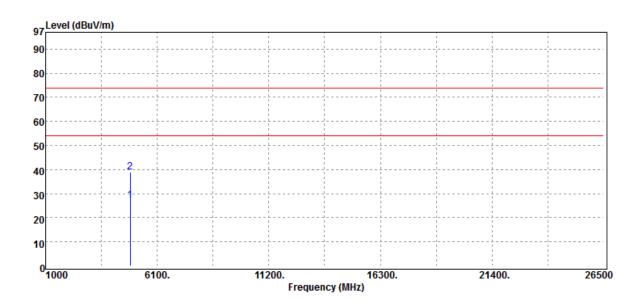

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	
4874.00	Average	23.97	3.36	27.33	54.00	-26.67	
4874.00	Peak	35.64	3.36	39.00	74.00	-35.00	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有约如,此现在结果被判别经过接口商事。同时此接口及识别为工,未现在土棚主从司事而统可,不可如必备剩。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






EUT Pol.

:802.11g :2437 MHz :Tx CH MID :E1 Plane Test Date :2019-03-08 Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei


Measurement Antenna Pol. :HORIZONTAL

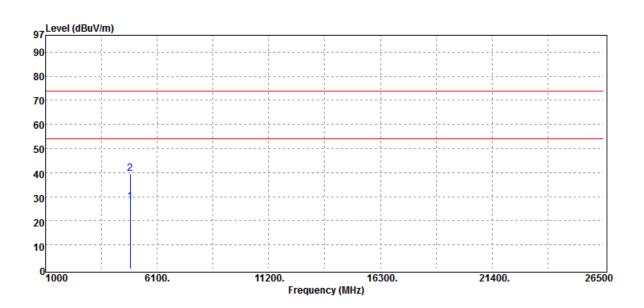

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	_
4874.00	Average	24.51	3.36	27.87	54.00	-26.13	
4874.00	Peak	36.20	3.36	39.56	74.00	-34.44	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非星方的见,此极生红甲基默则过力埃里奇等。同时此接早基皮风风风工,太极生土硕大八司隶而统可,无可如心语则。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。






EUT Pol.

:802.11g :2462 MHz :Tx CH HIGH :E1 Plane Test Date :2019-03-08 Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :VERTICAL

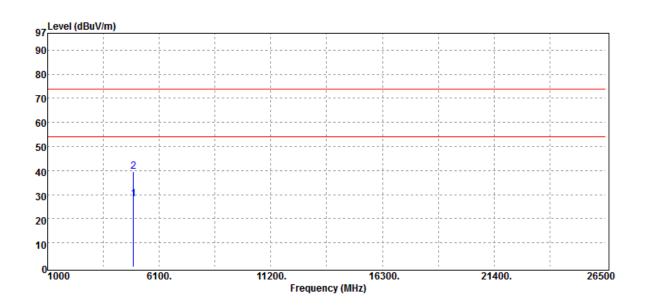

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
	4924.00	Average	24.38	3.93	28.31	54.00	-25.69	
	4924.00	Peak	35.56	3.93	39.49	74.00	-34.51	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






:802.11g :2462 MHz :Tx CH HIGH

EUT Pol. :E1 Plane **Test Date** :2019-03-08

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

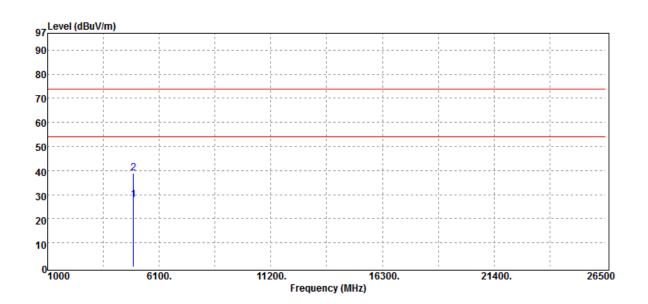

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB	_
	4924.00	Average	23.99	3.93	27.92	54.00	-26.08	
	4924.00	Peak	34.91	3.93	38.84	74.00	-35.16	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。




Page 71 of 82

Radiated Spurious Emission Measurement Result (802.11_HT20)

Operation Band :802.11n20 **Test Date** :2019-03-08


Fundamental Frequency :2412 MHz Temp./Humi. :21 deg_C / 62 RH **Operation Mode** :Tx CH LOW Engineer :Wei

EUT Pol. :E1 Plane :VERTICAL Measurement Antenna Pol.

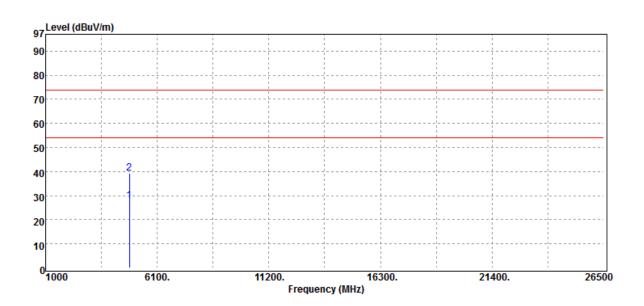

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	_
4824.00	Average	25.00	3.02	28.02	54.00	-25.98	
4824.00	Peak	36.26	3.02	39.28	74.00	-34.72	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。






:802.11n20 :2412 MHz :Tx CH LOW :E1 Plane

Test Date :2019-03-08 Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei

:HORIZONTAL Measurement Antenna Pol.

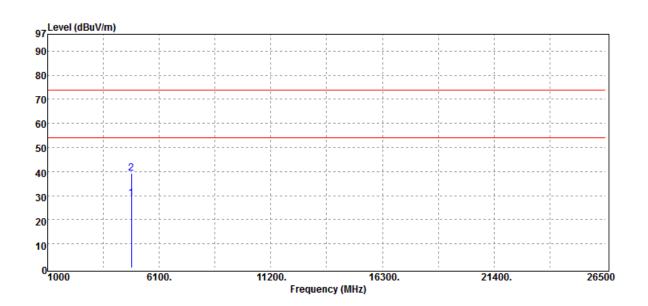

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	_
	4824.00	Average	25.71	3.02	28.73	54.00	-25.27	
	4824.00	Peak	36.23	3.02	39.25	74.00	-34.75	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 73 of 82

Operation Band :802.11n20 Fundamental Frequency :2437 MHz Operation Mode :Tx CH MID


EUT Pol. :E1 Plane

Test Date :2019-03-08

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei

Measurement Antenna Pol. :VERTICAL

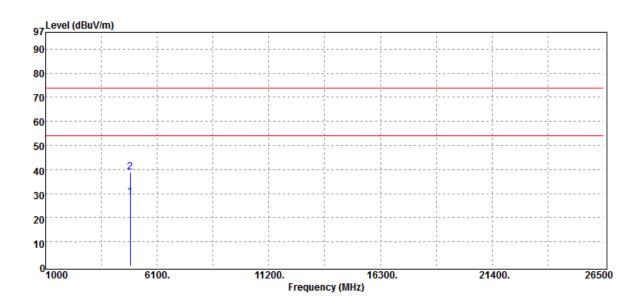

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	_
4874.00	Average	25.07	3.36	28.43	54.00	-25.57	
4874.00	Peak	35.50	3.36	38.86	74.00	-35.14	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有约如,此现在结果被判别经过接口商事。同时此接口及识别为工,未现在土棚主从司事而统可,不可如必备剩。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。




Page 74 of 82

Operation Band :802.11n20
Fundamental Frequency :2437 MHz
Operation Mode :Tx CH MID
EUT Pol. :E1 Plane

Test Date :2019-03-08 Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

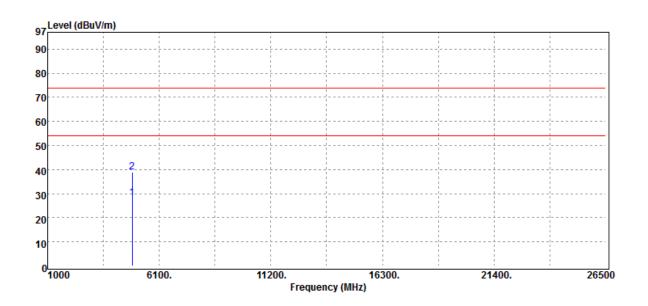

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
	4874.00	Average	24.99	3.36	28.35	54.00	-25.65	
	4874.00	Peak	35.66	3.36	39.02	74.00	-34.98	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天·本報告未經本公司書面許可·不可部份複製。






EUT Pol.

:802.11n20 :2462 MHz :Tx CH HIGH :E1 Plane Test Date :2019-03-08 Temp./Humi. :21 deg_C / 62 RH


Engineer :Wei

Measurement Antenna Pol. :VERTICAL

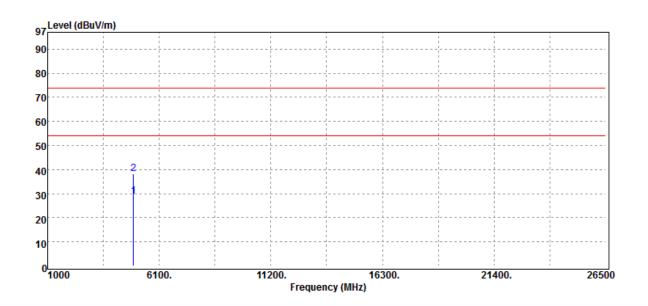

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dΒμV/m	dB	_
4924.00	Average	24.85	3.93	28.78	54.00	-25.22	
4924.00	Peak	34.50	3.93	38.43	74.00	-35.57	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。





EUT Pol.

:802.11n20 :2462 MHz :Tx CH HIGH


:E1 Plane

Test Date :2019-03-08

Temp./Humi. :21 deg_C / 62 RH

Engineer :Wei

Measurement Antenna Pol. :HORIZONTAL

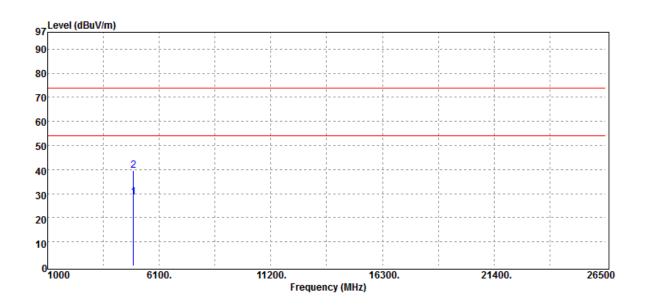

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin	
	Mode	Reading Level		FS	@3m		
MHz	PK/QP/AV	dΒμV	dB	dΒμV/m	dBμV/m	dB	_
4924.00	Average	24.55	3.93	28.48	54.00	-25.52	
4924.00	Peak	35.84	3.93	39.77	74.00	-34.23	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除此只有约如,此现在结果被判别经过接口商事。同时此接口及识别为工,未现在土棚主从司事而统可,不可如必备剩。

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page 77 of 82

12 PEAK POWER SPECTRAL DENSITY

12.1 Standard Applicable

Per Part 15.247 (e)


The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

12.2 Measurement Equipment Used

Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
DC Power Supply	Agilent	E3640A	KR93300208	08/15/2018	08/14/2019	
PXA Spectrum	Agilopt	N9030A	MY53120760	04/00/2019	04/08/2019	
Analyzer	Agilent	N9030A	W1155120700	04/09/2010	04/00/2019	
DC Block	Mini-Circuits	BLK-18-S+	31129(1)	02/26/2019	02/25/2020	
Attenuator	Mini-Circuit	BW-S10W2+	1	02/26/2019	02/25/2020	

12.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明· 此報告結果僅對測試之樣品負責· 同時此樣品僅保留90天。本報告未經本公司書面許可· 不可部份複製。



12.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz & VBW = 10 kHz.
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.
- 11.802.11n MIMO mode: offset is set following "measure and add 10 Log (N)" on spectrum to measure the PSD for MIMO mode. Offset = cable loss + 10 log (N), where N is number of transmitting antenna. N=2 for this given application.

Note: For the test of PSD at MIMO mode, the highest emission of worst case employing Measure and add 10 log (N) technical is reported on this report after the comparison between Main Antenna at single transmitting mode and Aux that yields the higher value. The MIMO transmitting mode produces higher value of outcome

- 1. As per FCC KDB 662911 D01
 - Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.
 - (i) If transmit signals are correlated, then Directional gain
 - = $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.].

The antenna gain is not grater than 6 dBi. Therefore, reduction of power is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Page 79 of 82

12.5 Measurement Result

POWER DENSITY 802.11b					
Freq.	PPSD	Limit	Dogult		
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result		
2412	-5.57	8.00	PASS		
2437	-4.82	8.00	PASS		
2462	-5.69	8.00	PASS		

	POWER DENSITY 802.11g					
Freq.	PPSD	Limit	Result			
(MHz)	(dBm/3kHz)	(dBm/3kHz)				
2412	-7.28	8.00	PASS			
2437	-8.20	8.00	PASS			
2462	-6.70	8.00	PASS			

	POWER DENSITY 802.11n HT20					
Freq.	PPSD	Limit	Result			
(MHz)	(dBm/3kHz)	(dBm/3kHz)				
2412	-8.84	8.00	PASS			
2437	-7.64	8.00	PASS			
2462	-8.98	8.00	PASS			

Note

Cable Loss 13.41 dΒ

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。

^{*}Refer to next page for plots.




Power Density 802.11b 20MHz 2412MHz




Power Density 802.11b 20MHz 2437MHz




Power Density 802.11b 20MHz 2462MHz




Power Density 802.11g 20MHz 2412MHz



Power Density 802.11g 20MHz 2437MHz




Power Density 802.11g 20MHz 2462MHz




Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Power Density_802.11n_20MHz_2412MHz



Power Density 802.11n 20MHz 2437MHz



Power Density 802.11n 20MHz 2462MHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page 82 of 82

13 ANTENNA REQUIREMENT

13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

13.2 Antenna Connected Construction

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。