

Test Report

Verified code: 787957

Report No.: E20220818423001-7

Customer: Lumi United Technology Co., Ltd

Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District,
Nanshan District, Shenzhen, China

Sample Name: Chime Repeater

Sample Model: SVD-C02

Receive Sample Date: Aug.19,2022

Test Date: Aug.19,2022 ~ Oct.14,2022

Reference Document: CFR 47, FCC Part 15 Subpart C
RADIO FREQUENCY DEVICES:Subpart C—Intentional Radiators

Test Result: Pass

Prepared by: *Huang Lifang*

Reviewed by: *Wu Haoting*

Approved by: *Xiao Liang*



GUANGZHOU GRG METROLOGY & TEST CO., LTD

Issued Date: 2022-12-08

GUANGZHOU GRG METROLOGY & TEST CO., LTD.

Address: No.163,Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. Without the agreement of the laboratory, the client is not authorized to use the test results for unapproved propaganda.

----- The following blanks -----

TABLE OF CONTENTS

1.	TEST RESULT SUMMARY	6
2.	GENERAL DESCRIPTION OF EUT.....	7
2.1	APPLICANT	7
2.2	MANUFACTURER	7
2.3	BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	7
2.4	CHANNEL LIST	8
2.5	TEST OPERATION MODE	8
2.6	LOCAL SUPPORTIVE	8
2.7	CONFIGURATION OF SYSTEM UNDER TEST	8
2.8	DUTY CYCLE.....	10
3.	LABORATORY AND ACCREDITATIONS	11
3.1	LABORATORY	11
3.2	ACCREDITATIONS	11
3.3	MEASUREMENT UNCERTAINTY	12
4.	LIST OF USED TEST EQUIPMENT AT GRGT	13
5.	CONDUCTED EMISSION MEASUREMENT	14
5.1	LIMITS.....	14
5.2	TEST PROCEDURES	14
5.3	TEST SETUP	15
5.4	DATA SAMPLE	15
5.5	TEST RESULTS	16
6.	RADIATED SPURIOUS EMISSIONS	18
6.1	LIMITS.....	18
6.2	TEST PROCEDURES	18
6.3	TEST SETUP	22
6.4	DATA SAMPLE	23
6.5	TEST RESULTS	24
7.	6dB BANDWIDTH.....	38
7.1	LIMITS.....	38
7.2	TEST PROCEDURES	38
7.3	TEST SETUP	38
7.4	TEST RESULTS	39
8.	MAXIMUM PEAK OUTPUT POWER	45
8.1	LIMITS.....	45
8.2	TEST PROCEDURES	45
8.3	TEST SETUP	45
8.4	TEST RESULT	46
9.	POWER SPECTRAL DENSITY	47
9.1	LIMITS.....	47
9.2	TEST PROCEDURES	47
9.3	TEST SETUP	47
9.4	TEST RESULTS	48

10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS 54

10.1 LIMITS..... 54

10.2 TEST PROCEDURES 54

10.3 TEST SETUP 54

10.4 TEST RESULTS 55

11. RESTRICTED BANDS OF OPERATION..... 74

11.1 LIMITS..... 74

11.2 TEST PROCEDURES 75

11.3 TEST SETUP 75

11.4 TEST RESULTS 76

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM 89

APPENDIX B. PHOTOGRAPH OF THE EUT 89

----- The following blanks -----

REPORT ISSUED HISTORY

Report Version	Report No.	Description	Compile Date
1.0	E20220818423001-7	Original Issue	2022-10-14

----- The following blanks -----

1. TEST RESULT SUMMARY

Standard	Item	Limit / Severity	Result
CFR 47, FCC Part 15 Subpart C (§15.247) ANSI C63.10-2013 KDB 558074 D01 15.247 measurement guidance v05r02	Antenna Requirement	§15.203	PASS
	Conducted Emissions	§15.207 (a)	PASS
	Radiated Spurious Emission	§15.247(d) §15.205 §15.209	PASS
	6 dB Bandwidth	§15.247 (a)(2)	PASS
	Maximum Peak Output Power	§15.247(b)(3)	PASS
	Power Spectral Density	§15.247(e)	PASS
	Conducted band edges and Spurious Emission	§15.247(d)	PASS
	Restricted bands of operation	§15.205 §15.209 §15.247(d)	PASS

The EUT have one antenna. The antenna is FPC antenna. The max gain of Antenna is 0.5dBi, which accordance 15.203 is considered sufficient to comply with the provisions of this section.

----- The following blanks -----

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT

Name: Lumi United Technology Co., Ltd
Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District,
Nanshan District, Shenzhen, China

2.2 MANUFACTURER

Name: Lumi United Technology Co., Ltd
Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District,
Nanshan District, Shenzhen, China

2.3 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Product Name: Chime Repeater
Product Model: SVD-C02
Adding Model: SVD-C04
Models Difference: that EUT (Chime Repeater) Model Numbers SVD-C02 and SVD-C04 have the same technical construction including circuit diagram,PCB LAYOUT,hardware version and software version identical,except color of enclosures and sales method are different.
Trade Name: Aqara
FCC ID: 2AKIT-SVDC02
Rating: DC 5V power supplied by adapter
Frequency Band: 2412MHz-2462MHz for IEEE 802.11b/g/n HT20
Modulation Type: DSSS for IEEE 802.11b mode;
OFDM for IEEE 802.11g/n mode
Antenna Specification: FPC antenna with 0.5dBi gain (Max)
Temperature Range: -10℃~+55℃
Hardware Version: X1
Software Version: 1.0.4_0010
Sample submitting way: ☒ Provided by customer ☐ Sampling
Sample No: E20220818423001-0002, E20220818423001-0009

2.4 CHANNEL LIST

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n HT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

2.5 TEST OPERATION MODE


Mode No.	Description of the modes
1	2.4G Wi-Fi TX mode

2.6 LOCAL SUPPORTIVE

Name of Equipment	Manufacturer	Model	Serial Number	Note
Notebook	LENOVO	TianYi 310-14ISK	MP18DLC6	/
Test board	/	/	/	/
Adapter	Apple	A1443	/	/

No.	Cable Type	Qty.	Shielded Type	Ferrite Core(Qty.)	Length
1	USB cable	1	No	0	0.5m
2	DC cable	1	No	0	0.2m
3	USB cable	1	No	0	1.0m

2.7 CONFIGURATION OF SYSTEM UNDER TEST

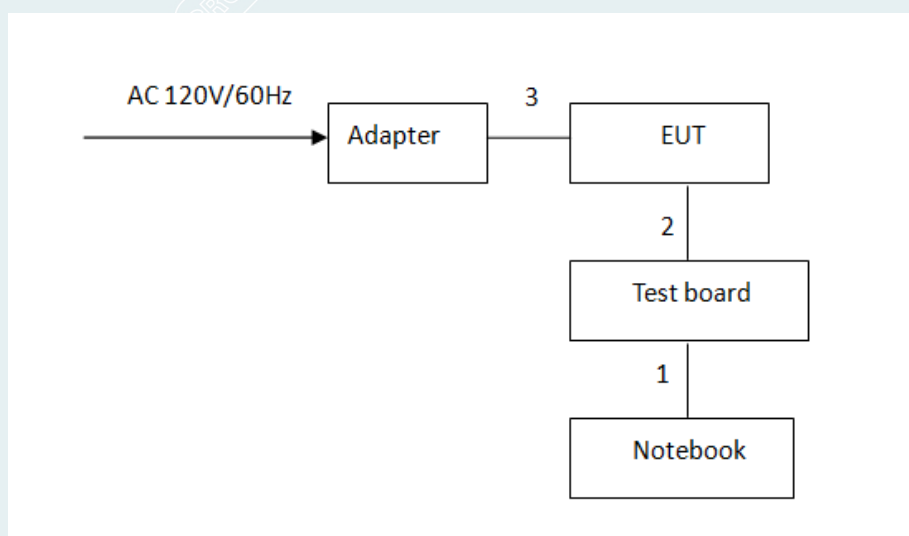

Test software:

Software version	Test level
QCOM_V1.0	IEEE 802.11b: -2 IEEE 802.11g: -2 IEEE 802.11n HT20: -2

Power Setting:

Mode	Date Rate	Frequency (MHz)	Power Setting
IEEE 802.11b	1M	2412	-2
		2437	-2
		2462	-2
IEEE 802.11g	6M	2412	-2
		2437	-2
		2462	-2
IEEE 802.11n HT20	MCS0	2412	-2
		2437	-2
		2462	-2


----- The following blanks -----

2.8 DUTY CYCLE


EUT Name	Chime Repeater	Model	SVD-C02
Environmental Conditions	23.8°C/52%RH/101.0kPa	Test Voltage	AC 120V/60Hz
Tested By	Qin Tingting	Tested Date	2022-09-30

Test Mode	Antenna	Frequency (MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	T [s]
IEEE 802.11b	Ant1	2437	4.29	4.39	97.72	0.00429
IEEE 802.11g	Ant1	2437	0.70	0.74	94.59	0.00070
IEEE 802.11n HT20	Ant1	2437	0.67	0.71	94.37	0.00067


IEEE 802.11b_Ant1_2437MHz

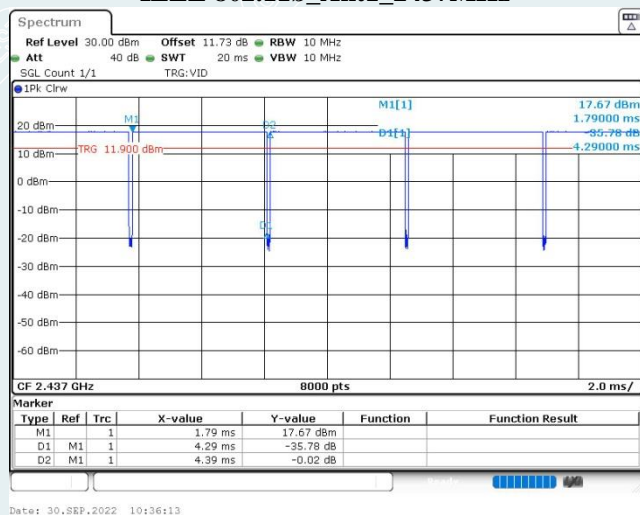

IEEE 802.11g_Ant1_2437MHz

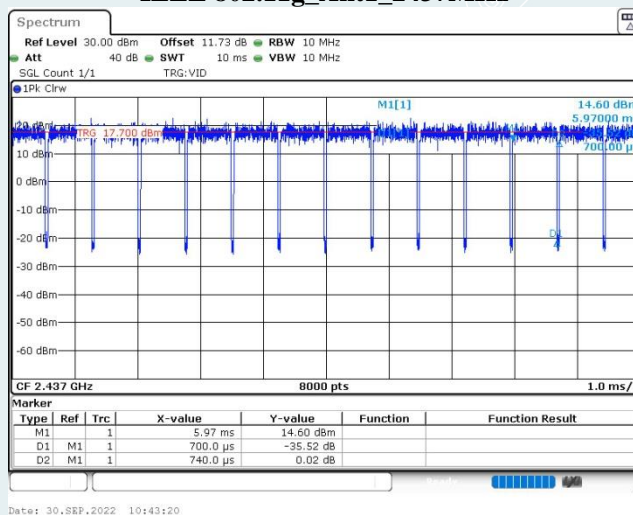

IEEE 802.11n HT20_Ant1_2437MHz

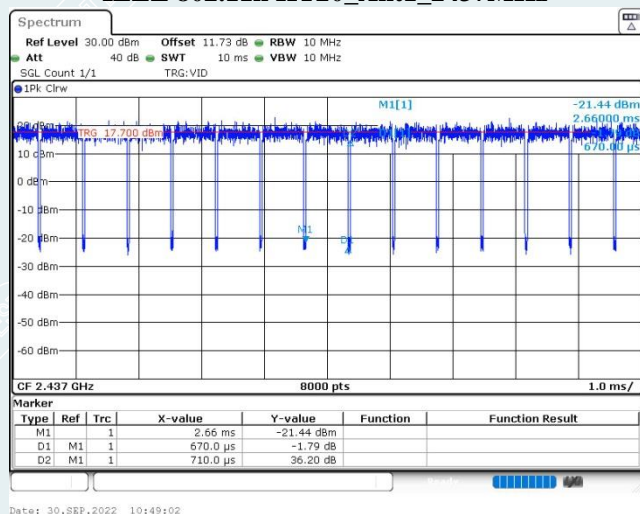

3. LABORATORY AND ACCREDITATIONS

3.1 LABORATORY

The tests & measurements refer to this report were performed by Shenzhen EMC Laboratory of Guangzhou GRG Metrology & Test Co., Ltd.

Add : No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District
Shenzhen, 518110, People's Republic of China

P.C. : 518110

Tel : 0755-61180008

Fax : 0755-61180008

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA A2LA(Certificate#:2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada ISED (Company Number: 24897, CAB identifier:CN0069)

USA FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.grgtest.com>

----- The following blanks -----

3.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	9kHz~30MHz	5.1dB
		30MHz~200MHz	4.5dB
		200MHz~1000MHz	4.4dB
		1GHz~18GHz	5.6dB
		18GHz~26.5GHz	3.65dB
	Vertical	9kHz~30MHz	5.1dB
		30MHz~200MHz	4.4dB
		200MHz~1000MHz	4.5dB
		1GHz~18GHz	5.6dB
		18GHz~26.5GHz	3.65dB
Conduction Emission		150kHz~30MHz	3.40dB

Measurement	Uncertainty
RF frequency	6.0×10^{-6}
RF power conducted	0.78 dB
Occupied channel bandwidth	0.4 dB
Unwanted emission, conducted	0.68 dB
Humidity	6 %
Temperature	2 °C

This uncertainty represents an expanded uncertainty factor of $k=2$.

----- The following blanks -----

4. LIST OF USED TEST EQUIPMENT AT GRGT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Conducted Emissions				
EZ-EMC	EZ	CCS-3A1-CE	/	/
EMI Receiver	R&S	ESCI	100783	2023-08-28
LISN(EUT)	R&S	ENV216	101543	2023-09-13
Radiated Spurious Emission & Restricted bands of operation				
Test S/W	EZ	CCS-03A1		
Loop Antenna	TESEQ	HLA6121	52599	2023-04-02
Test Receiver	R&S	ESR7	102444	2023-09-02
Preamplifier	EMEC	EM330	I00426	2023-03-05
Bi-log Antenna	Schwarzbeck	VULB9160	VULB9160-3401	2022-10-27
Spectrum Analyzer	Agilent	N9010A	MY52221469	2023-06-29
Horn Antenna	Schwarzbeck	BBHA 9120D	02143	2022-10-22
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	2023-10-14
Amplifier	Tonscend	TAP01018048	AP20E8060075	2023-05-05
Amplifier	Tonscend	TAP184050	AP20E806071	2023-05-05
Amplifier	SHIRONG ELECTRONIC	DLNA-1G18G-G40	20200928005	2023-05-08
Test S/W	Tonscend	JS32-RE/2.5.1.5		
6 dB Bandwidth				
Spectrum Analyzer	R&S	FSV30	104381	2022-12-10
Output Power				
Pulse power sensor	Anristu	MA2411B	1126150	2023-03-01
Power meter	Anristu	ML2495A	1204003	2023-02-28
Conducted band edges and Spurious Emission				
Spectrum Analyzer	R&S	FSV30	104381	2022-12-10
Power Spectral Density				
Spectrum Analyzer	R&S	FSV30	104381	2022-12-10

Note: The calibration interval of the above test instruments is 12 months.

5. CONDUCTED EMISSION MEASUREMENT

5.1 LIMITS

Frequency range	Limits (dB μ V)	
	Quasi-peak	Average
150kHz~0.5MHz	66~56	56~46
0.5MHz~5MHz	56	46
5MHz~30MHz	60	50

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range of 150 kHz to 0.5MHz.

5.2 TEST PROCEDURES

Procedure of Preliminary Test

Test procedures follow ANSI C63.10:2013.

For measurement of the disturbance voltage the equipment under test (EUT) is connected to the power supply mains and any other extended network via one or more artificial network(s). An EUT, whether intended to be grounded or not, and which is to be used on a table is configured as follows:

– Either the bottom or the rear of the EUT shall be at a controlled distance of 40 cm from a reference ground plane. This ground plane is normally the wall or floor of a shielded room. It may also be a grounded metal plane of at least 2 m by 2 m. This is physically accomplished as follows:

1) place the EUT on a table of non-conducting material which is at least 80 cm high. Place the EUT so that it is 40 cm from the wall of the shielded room, or

2) place the EUT on a table of non-conducting material which is 40 cm high so that the bottom of the EUT is 40 cm above the ground plane;

– All other conductive surfaces of the EUT shall be at least 80 cm from the reference ground plane;

– The EUT are placed on the floor that one side of the housings is 40 cm from the vertical reference ground plane and other metallic parts;

– Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth forming a bundle 30 cm to 40 cm long, hanging approximately in the middle between the ground plane and the table.

– I/O cables that are connected to a peripheral shall be bundled in the centre. The end of the cable may be terminated if required using correct terminating impedance. The total length shall not exceed 1 m.


– Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.

The test mode(s) described in Item 2.6 were scanned during the preliminary test. After the preliminary scan, we found the test mode described in Item 2.6 producing the highest emission level. The EUT configuration and cable configuration of the above highest emission levels were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test. A scan was taken on both power lines, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. The test data of the worst-case condition(s) was recorded.

5.3 TEST SETUP

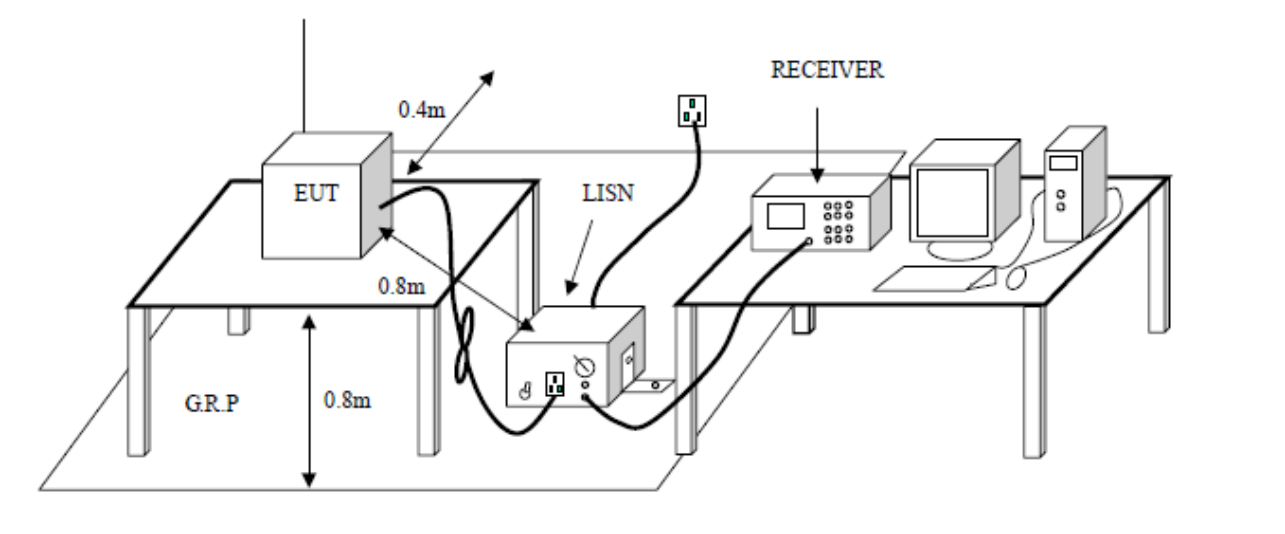

5.4 DATA SAMPLE

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XXXX	32.69	25.65	11.52	44.21	37.17	65.78	55.79	-21.57	-18.62	Pass


Factor = Insertion loss of LISN + Cable Loss
Result = Quasi-peak Reading/ Average Reading + Factor
Limit = Limit stated in standard
Margin = Result (dBuV) – Limit (dBuV)

----- The following blanks -----

5.5 TEST RESULTS


All models were pretested and the worst modes and channels were recorded in this report. (IEEE 802.11n HT20 2462MHz)

EUT Name	Chime Repeater	Model	SVD-C02
Environmental Conditions	22.5°C/45%RH/101.0kPa	Test Mode	Mode 1
Tested By	Huang Xinlong	Line	L
Tested Date	2022-10-11	Test Voltage	AC 120V/60Hz

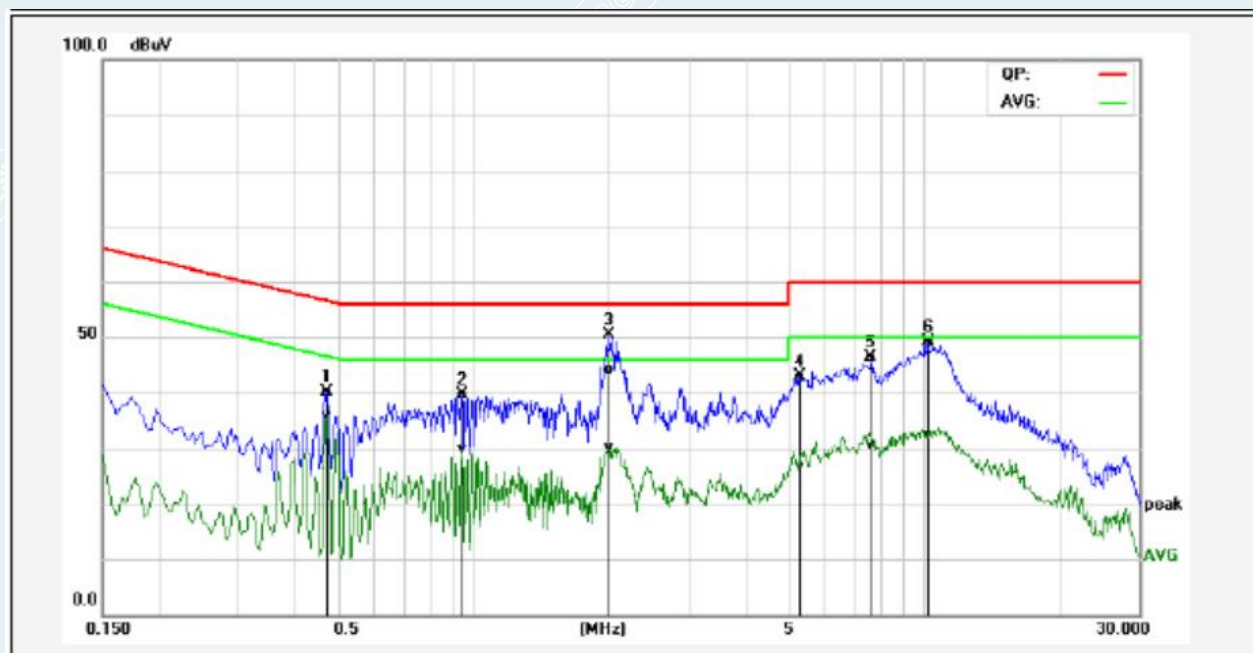

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.4740	30.62	26.35	9.60	40.22	35.95	56.44	46.44	-16.22	-10.49	Pass
2	0.9460	30.04	20.29	9.61	39.65	29.90	56.00	46.00	-16.35	-16.10	Pass
3	2.0059	34.57	20.47	9.63	44.20	30.10	56.00	46.00	-11.80	-15.90	Pass
4	5.2940	33.12	16.85	9.66	42.78	26.51	60.00	50.00	-17.22	-23.49	Pass
5	7.6380	36.65	20.93	9.68	46.33	30.61	60.00	50.00	-13.67	-19.39	Pass
6	10.2180	39.51	22.69	9.71	49.22	32.40	60.00	50.00	-10.78	-17.60	Pass

EUT Name	Chime Repeater	Model	SVD-C02
Environmental Conditions	22.5°C/45%RH/101.0kPa	Test Mode	Mode 1
Tested By	Huang Xinlong	Line	N
Tested Date	2022-10-11	Test Voltage	AC 120V/60Hz

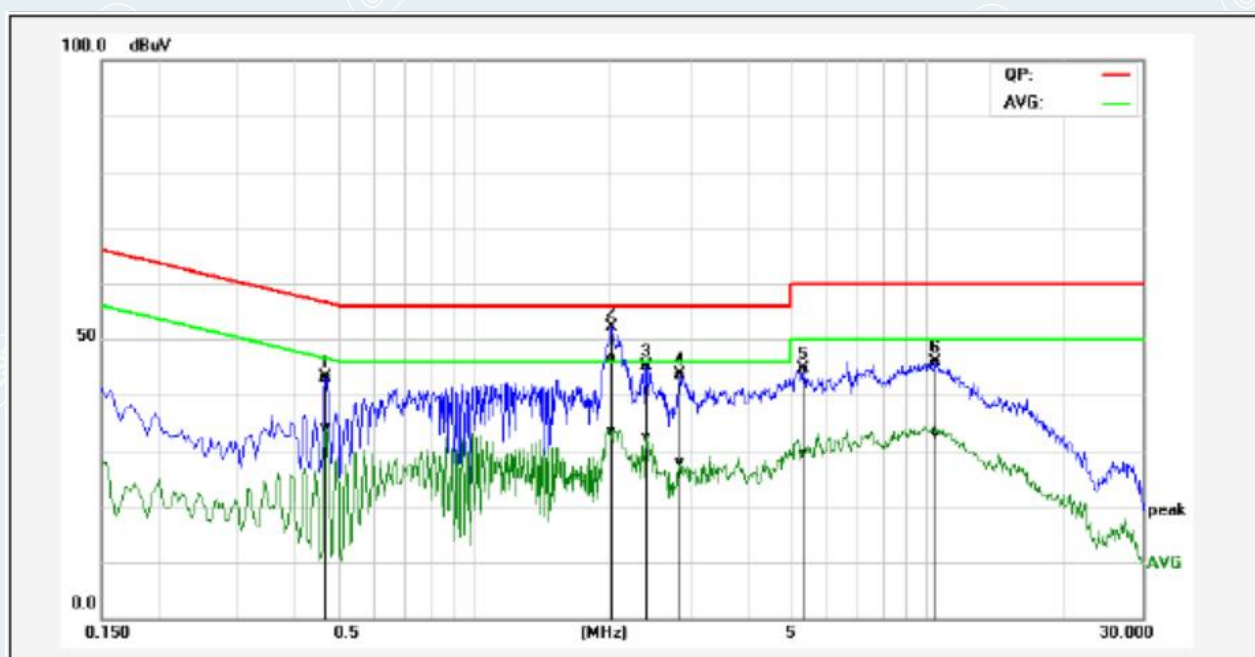

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.4700	33.63	24.44	9.59	43.22	34.03	56.51	46.51	-13.29	-12.48	Pass
2*	2.0140	36.98	23.88	9.62	46.60	33.50	56.00	46.00	-9.40	-12.50	Pass
3	2.4060	35.57	22.88	9.62	45.19	32.50	56.00	46.00	-10.81	-13.50	Pass
4	2.8500	33.94	18.36	9.63	43.57	27.99	56.00	46.00	-12.43	-18.01	Pass
5	5.3500	34.91	19.64	9.66	44.57	29.30	60.00	50.00	-15.43	-20.70	Pass
6	10.4100	36.04	23.08	9.73	45.77	32.81	60.00	50.00	-14.23	-17.19	Pass

6. RADIATED SPURIOUS EMISSIONS

6.1 LIMITS

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required.

Frequency (MHz)	Quasi-peak($\mu\text{V/m}$)	Measurement distance(m)	Quasi-peak(dB $\mu\text{V/m}$)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30~88	100	3	40
88~216	150	3	43.5
216~960	200	3	46
Above 960	500	3	54

NOTE:

- (1) The emission limits for the ranges 9-90kHz and 110-490kHz are based on measurements employing a linear average detector.
- (2) The lower limit shall apply at the transition frequencies.
- (3) Above 18GHz test distance is 1m, so the Peak Limit=74+20*log(3/1)=83.54 (dB $\mu\text{V/m}$).
The Avg Limit=54+20*log(3/1)=63.54 (dB $\mu\text{V/m}$).

6.2 TEST PROCEDURES

1) Sequence of testing 9kHz to 30MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.
- The EUT is placed on a desktop position in the center of the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 ° to 360 °.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

2) Sequence of testing 30MHz to 1GHz**Setup:**

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.

--- The EUT is placed on a desktop position in the center of the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Pre measurement:

--- The turntable rotates from 0° to 360° .

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 4 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable rotates from 0° to 360° and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1GHz to 18GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.
- The EUT is placed on a desktop position in the center of the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Pre measurement:

- The turntable rotates from 0 ° to 360 °.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 4 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable rotates from 0 ° to 360 ° and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Use serial board or connecting line to make EUT and notebook to communicate, according to the actual need to make EUT send constant frequency signal continuously.
- The EUT is placed on a desktop position in the center of the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

Pre measurement:

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

NOTE:

(a).The frequency from 9kHz to 150kHz, Set RBW=300Hz(for Peak &AVG), RBW=300Hz(for Peak &AVG).
the frequency from 150kHz to 30MHz, Set RBW=9kHz, RBW=9kHz,(for QP Detector).

(b).The frequency from 30MHz to 1GHz, Set RBW=120kHz, RBW=300kHz,(for QP Detector).

(c).The frequency above 1GHz, for Peak detector: Set RBW=1MHz, RBW=3MHz.

(d). The frequency above 1GHz, for Avg detector: Set RBW=1MHz, if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW \leq RBW/100 (i.e., 10kHz) but not less than 10Hz. Where duty cycle is defined in section 2.9. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$, Where T is defined in section 2.9.

----- The following blanks -----

6.3 TEST SETUP

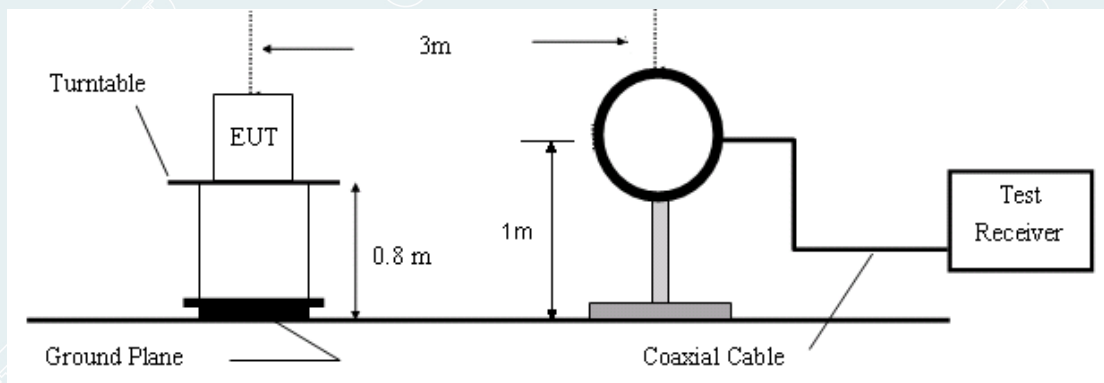


Figure 1. 9kHz to 30MHz radiated emissions test configuration

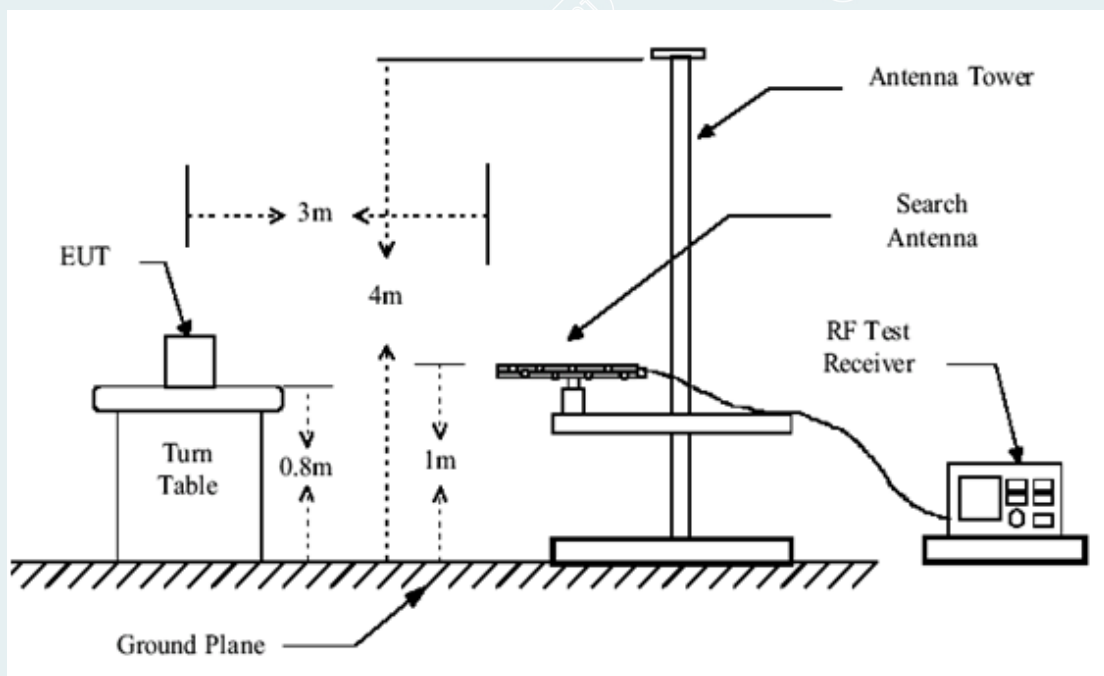


Figure 2. 30MHz to 1GHz radiated emissions test configuration

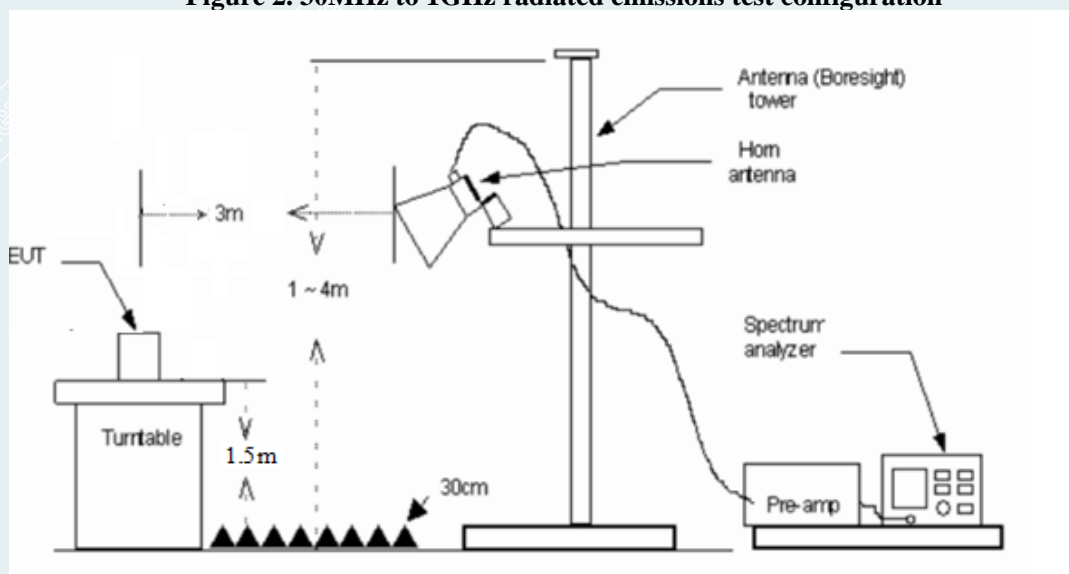


Figure 3. 1GHz to 18GHz radiated emissions test configuration

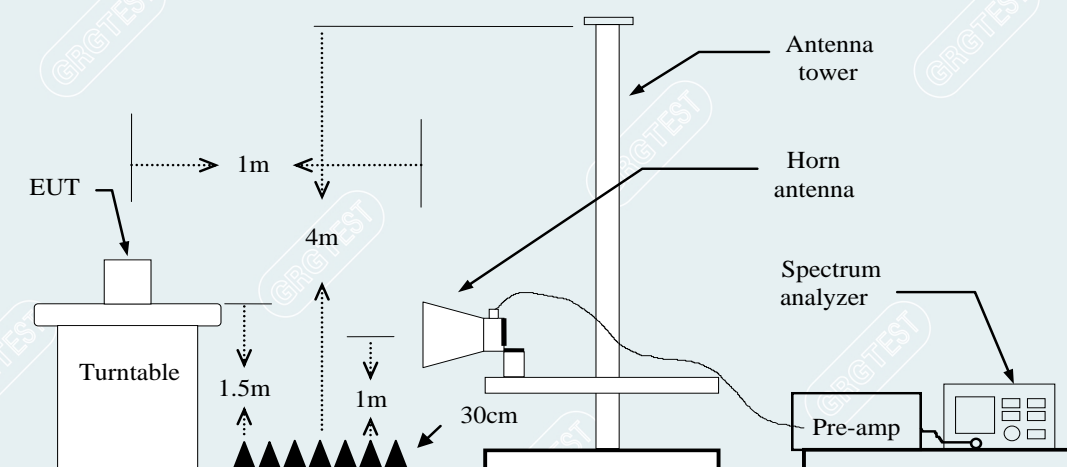


Figure 4.18GHz to 26.5GHz radiated emissions test configuration

6.4 DATA SAMPLE

30MHz to 1GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	37.06	-15.48	21.58	40.00	-18.42	QP	Vertical

1GHz-18GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	65.45	-11.12	54.33	74.00	-19.67	peak	Vertical
xxx	xxx	63.00	-11.12	51.88	54.00	-2.12	AVG	Vertical

Above 18GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Pole
xxx	xxx	68.86	57.66	-11.20	83.54	25.88	peak	Vertical
xxx	xxx	68.89	-11.20	57.69	63.54	5.85	AVG	Vertical

Frequency (MHz) = Emission frequency in MHz

Ant.Pol. (H/V) = Antenna polarization

Reading (dBuV) = Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m) = Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)

Limit (dBuV/m) = Limit stated in standard

Margin (dB) = Remark Result (dBuV/m) – Limit (dBuV/m)

Peak = Peak Reading

QP = Quasi-peak Reading


AVG = Average Reading

6.5 TEST RESULTS

Below 1GHz


All models were pretested and the worst modes and channels were recorded in this report. (IEEE 802.11n HT20 2462MHz)

EUT Name	Chime Repeater	Model	SVD-C02
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Voltage	AC 120V/60Hz
Test Mode	Mode 1	Polarity	Horizontal
Tested By	Tang Shenghui	Tested Date	2022-09-30

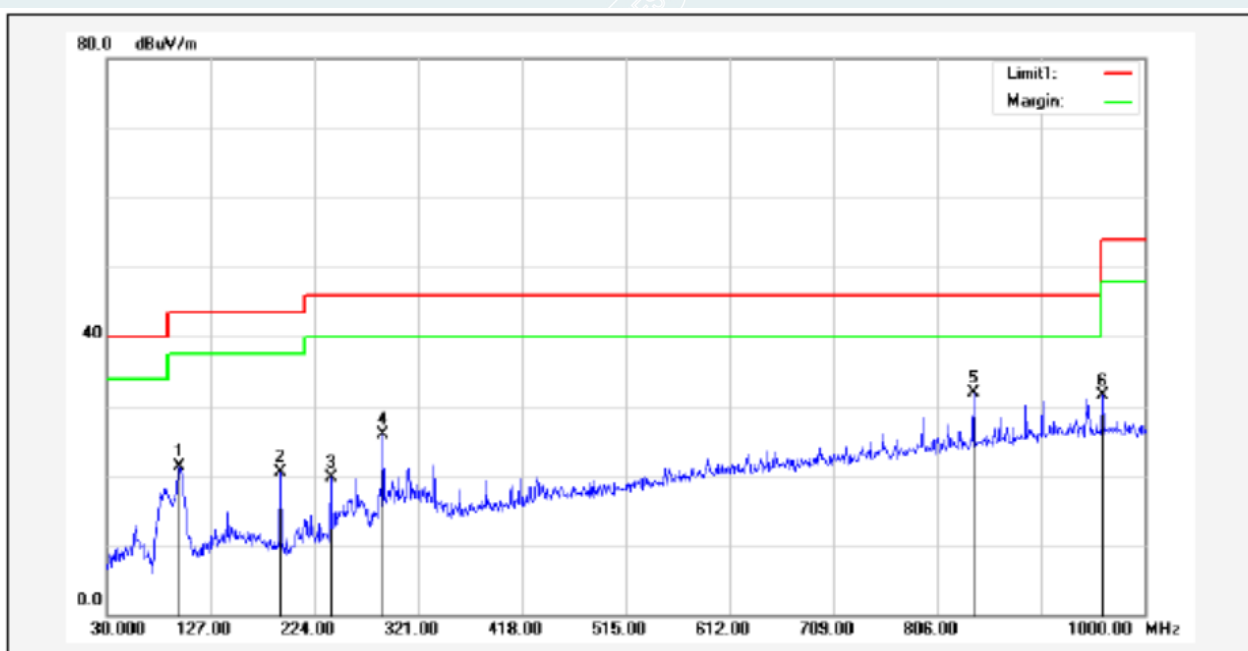

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over (dB)	Degree (deg.)	Height (cm)	Remark
1	97.9000	50.46	-29.18	21.28	43.50	-22.22	160	300	QP
2	191.9900	47.18	-26.69	20.49	43.50	-23.01	55	100	QP
3	239.5200	45.18	-25.49	19.69	46.00	-26.31	21	100	QP
4	288.0200	49.64	-23.66	25.98	46.00	-20.02	244	100	QP
5*	839.9500	42.81	-11.00	31.81	46.00	-14.19	154	100	QP
6	960.2300	40.99	-9.42	31.57	54.00	-22.43	227	100	QP

EUT Name	Chime Repeater	Model	SVD-C02
Environmental Conditions	23.7°C/45%RH/101.0kPa	Test Voltage	AC 120V/60Hz
Test Mode	Mode 1	Polarity	Vertical
Tested By	Tang Shenghui	Tested Date	2022-09-30

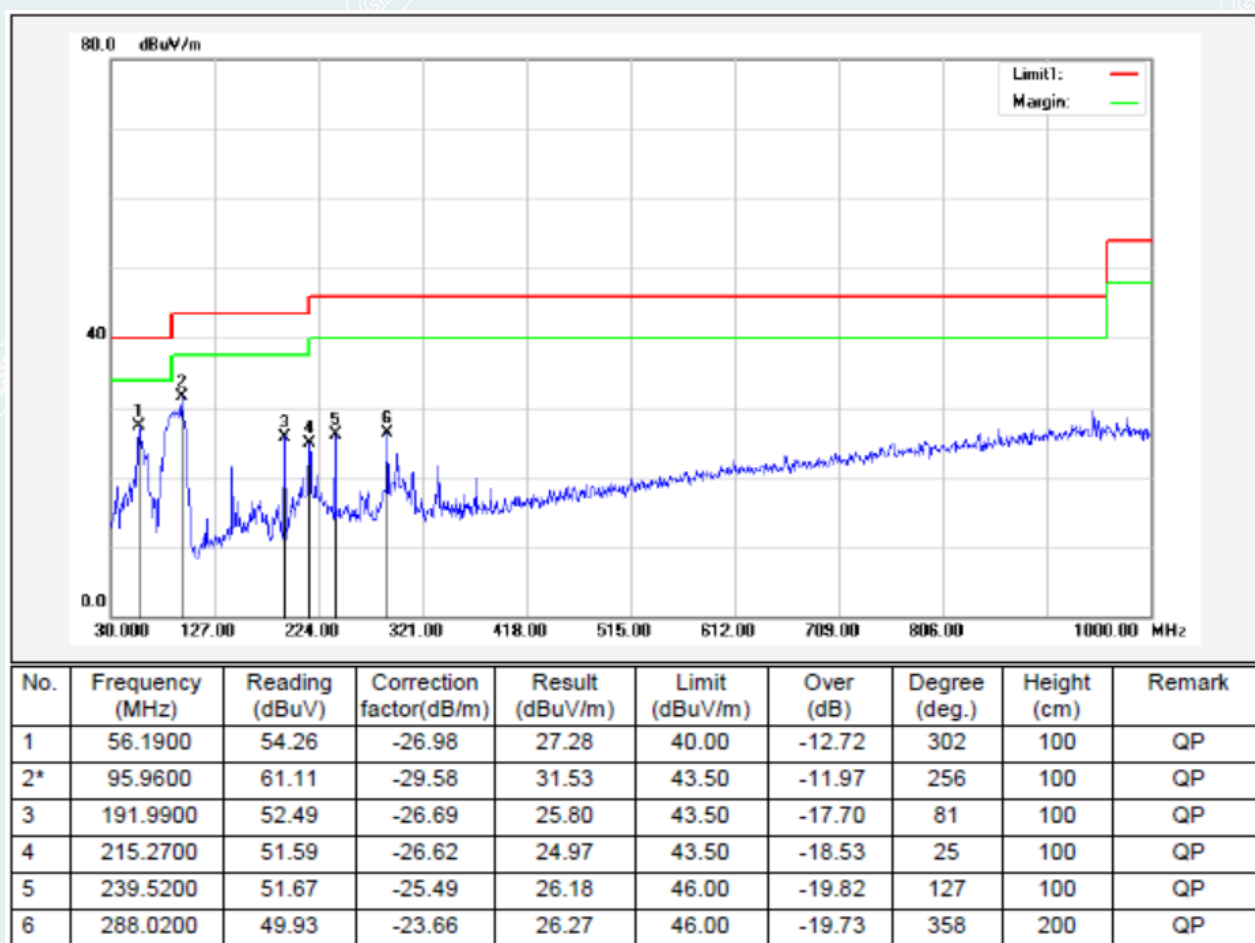**Remark:**

- 1 No emission found between lowest internal used/generated frequency to 30MHz.
- 2 Radiated emissions measured in frequency range from 9 kHz to 1GHz were made with an instrument using Quasi-peak detector mode.
- 3 Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4 The IF bandwidth of Receiver between 30MHz to 1GHz was 120 kHz.

1GHz-18GHz:

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Mode: IEEE 802.11b

Lowest Frequency (2412MHz)

Environment: 23.5°C/56%RH/101.0kPa

Tested By: Zhang Zishan

Date: 2022-09-24

Voltage:AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1165.6	68.06	43.44	-24.62	74.00	30.56	100	226	Horizontal
2	1328.6	66.72	43.66	-23.06	74.00	30.34	200	104	Horizontal
3	1660.8	67.48	44.33	-23.15	74.00	29.67	100	330	Horizontal
4	2662.2	65.73	47.30	-18.43	74.00	26.70	100	17	Horizontal
5	3618	57.88	41.53	-16.35	74.00	32.47	200	15	Horizontal
6	4824	64.13	51.81	-12.32	74.00	22.19	200	334	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4825.5	-12.35	60.4	48.05	54.00	5.95	200	320	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1163.6	71.60	47.37	-24.23	74.00	26.63	100	280	Vertical
2	1328.2	69.83	47.16	-22.67	74.00	26.84	100	253	Vertical
3	1665.8	69.52	47.14	-22.38	74.00	26.86	200	332	Vertical
4	2666.6	65.64	47.99	-17.65	74.00	26.01	100	308	Vertical
5	3981	57.47	41.65	-15.82	74.00	32.35	100	14	Vertical
6	4824	59.57	47.00	-12.57	74.00	27.00	200	342	Vertical

Mode: IEEE 802.11b
Middle Frequency (2437MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1161.6	72.52	47.82	-24.70	74.00	26.18	100	229	Horizontal
2	1328.8	68.86	45.80	-23.06	74.00	28.20	100	229	Horizontal
3	1662.2	66.63	43.50	-23.13	74.00	30.50	100	229	Horizontal
4	2658.2	63.32	44.89	-18.43	74.00	29.11	100	135	Horizontal
5	3217.5	58.39	41.87	-16.52	74.00	32.13	100	15	Horizontal
6	4873.5	64.40	51.37	-13.03	74.00	22.63	200	330	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4875	-13.05	59.92	46.87	54.00	7.13	200	330	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1162.8	69.58	45.37	-24.21	74.00	28.63	200	82	Vertical
2	1327.4	70.49	47.80	-22.69	74.00	26.20	100	264	Vertical
3	1666.2	69.15	46.78	-22.37	74.00	27.22	100	320	Vertical
4	2663.2	65.13	47.44	-17.69	74.00	26.56	100	249	Vertical
5	3325.5	61.10	43.45	-17.65	74.00	30.55	100	227	Vertical
6	4873.5	59.81	46.77	-13.04	74.00	27.23	200	327	Vertical

Mode: IEEE 802.11b
Highest Frequency (2462MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1164.2	69.51	44.86	-24.65	74.00	29.14	100	121	Horizontal
2	1331.4	67.96	44.87	-23.09	74.00	29.13	100	289	Horizontal
3	1663.8	68.90	45.79	-23.11	74.00	28.21	100	10	Horizontal
4	2655.4	65.71	47.27	-18.44	74.00	26.73	100	10	Horizontal
5	3201	58.09	41.84	-16.25	74.00	32.16	100	341	Horizontal
6	4924.5	66.40	53.84	-12.56	74.00	20.16	200	329	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4926	-12.51	60.28	47.77	54.00	6.23	200	329	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1163.2	71.23	47.01	-24.22	74.00	26.99	200	345	Vertical
2	1332.6	68.17	45.64	-22.53	74.00	28.36	200	228	Vertical
3	1662.4	69.42	46.94	-22.48	74.00	27.06	100	319	Vertical
4	2662.8	65.41	47.71	-17.70	74.00	26.29	100	305	Vertical
5	3994.5	62.86	46.96	-15.90	74.00	27.04	100	315	Vertical
6	4924.5	60.06	47.75	-12.31	74.00	26.25	200	319	Vertical

Mode: IEEE 802.11g
Lowest Frequency (2412MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1162	67.75	43.06	-24.69	74.00	30.94	100	236	Horizontal
2	1330.2	69.03	45.96	-23.07	74.00	28.04	200	123	Horizontal
3	1660	67.58	44.43	-23.15	74.00	29.57	100	9	Horizontal
4	2661	64.96	46.53	-18.43	74.00	27.47	200	16	Horizontal
5	3268.5	59.50	42.12	-17.38	74.00	31.88	100	263	Horizontal
6	4819.5	59.24	46.98	-12.26	74.00	27.02	200	330	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1162.4	71.93	47.73	-24.20	74.00	26.27	200	344	Vertical
2	1327.2	70.10	47.40	-22.70	74.00	26.60	100	267	Vertical
3	1660.6	69.89	47.36	-22.53	74.00	26.64	100	318	Vertical
4	2666.6	64.85	47.20	-17.65	74.00	26.80	100	306	Vertical
5	3331.5	62.39	44.58	-17.81	74.00	29.42	100	239	Vertical
6	3990	62.19	46.31	-15.88	74.00	27.69	100	290	Vertical

Mode: IEEE 802.11g
Middle Frequency (2437MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1164.8	67.41	42.78	-24.63	74.00	31.22	100	303	Horizontal
2	1329	68.68	45.61	-23.07	74.00	28.39	200	110	Horizontal
3	1665.4	67.66	44.57	-23.09	74.00	29.43	100	10	Horizontal
4	2661.6	65.04	46.61	-18.43	74.00	27.39	100	10	Horizontal
5	3615	57.23	40.97	-16.26	74.00	33.03	100	333	Horizontal
6	4872	60.06	47.06	-13.00	74.00	26.94	200	331	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1164.8	70.95	46.69	-24.26	74.00	27.31	200	57	Vertical
2	1331.4	65.86	43.29	-22.57	74.00	30.71	200	226	Vertical
3	1663.8	67.99	45.56	-22.43	74.00	28.44	100	316	Vertical
4	2663.2	65.27	47.58	-17.69	74.00	26.42	200	295	Vertical
5	3999	63.07	47.14	-15.93	74.00	26.86	100	239	Vertical
6	4861.5	57.20	44.24	-12.96	74.00	29.76	100	356	Vertical

Mode: IEEE 802.11g
Highest Frequency (2462MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1161.2	68.84	44.13	-24.71	74.00	29.87	100	242	Horizontal
2	1332.6	69.69	46.59	-23.10	74.00	27.41	100	281	Horizontal
3	1664.6	64.95	41.84	-23.11	74.00	32.16	100	2	Horizontal
4	2657.2	64.91	46.47	-18.44	74.00	27.53	100	2	Horizontal
5	4924.5	63.79	51.23	-12.56	74.00	22.77	200	328	Horizontal
6	6786	53.43	47.12	-6.31	74.00	26.88	200	16	Horizontal

AV Final Data List									
NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Height [cm]	Angle [°]	Polarity
1	4926	-12.51	53.26	40.75	54.00	13.25	200	328	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1163.2	71.44	47.22	-24.22	74.00	26.78	100	277	Vertical
2	1328.2	70.05	47.38	-22.67	74.00	26.62	200	264	Vertical
3	1664.4	70.26	47.84	-22.42	74.00	26.16	200	317	Vertical
4	2661	65.42	47.70	-17.72	74.00	26.30	100	213	Vertical
5	3996	62.67	46.75	-15.92	74.00	27.25	100	134	Vertical
6	4924.5	57.12	44.81	-12.31	74.00	29.19	200	330	Vertical

Mode: IEEE 802.11n HT20
Lowest Frequency (2412MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1161	68.74	44.03	-24.71	74.00	29.97	100	267	Horizontal
2	1329.2	69.49	46.43	-23.06	74.00	27.57	100	226	Horizontal
3	1659.4	67.75	44.59	-23.16	74.00	29.41	100	319	Horizontal
4	2655	63.41	44.97	-18.44	74.00	29.03	200	20	Horizontal
5	3618	58.40	42.05	-16.35	74.00	31.95	200	360	Horizontal
6	4824	58.83	46.51	-12.32	74.00	27.49	200	313	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1165.6	71.22	46.95	-24.27	74.00	27.05	100	138	Vertical
2	1330	67.29	44.68	-22.61	74.00	29.32	100	266	Vertical
3	1663.4	67.83	45.38	-22.45	74.00	28.62	100	331	Vertical
4	2656	63.34	45.56	-17.78	74.00	28.44	100	331	Vertical
5	3618	57.44	41.60	-15.84	74.00	32.40	200	15	Vertical
6	4822.5	59.54	46.98	-12.56	74.00	27.02	200	318	Vertical

Mode: IEEE 802.11n HT20
Middle Frequency (2437 MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1160.6	68.00	43.28	-24.72	74.00	30.72	100	147	Horizontal
2	1329.4	67.44	44.38	-23.06	74.00	29.62	200	122	Horizontal
3	1665.2	66.08	42.98	-23.10	74.00	31.02	200	317	Horizontal
4	2665.6	62.56	44.14	-18.42	74.00	29.86	100	105	Horizontal
5	4137	56.72	41.63	-15.09	74.00	32.37	200	275	Horizontal
6	4875	58.99	45.94	-13.05	74.00	28.06	200	302	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1164.8	70.90	46.64	-24.26	74.00	27.36	100	68	Vertical
2	1328.8	67.89	45.24	-22.65	74.00	28.76	200	253	Vertical
3	1662.6	69.89	47.42	-22.47	74.00	26.58	200	307	Vertical
4	2660.8	64.73	47.00	-17.73	74.00	27.00	200	293	Vertical
5	3996	62.57	46.65	-15.92	74.00	27.35	100	128	Vertical
6	4947	57.50	46.02	-11.48	74.00	27.98	100	354	Vertical

Mode: IEEE 802.11n HT20
Highest Frequency (2462MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-24
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1165.8	68.36	43.75	-24.61	74.00	30.25	100	242	Horizontal
2	1329.6	67.96	44.90	-23.06	74.00	29.10	100	229	Horizontal
3	1661.8	67.16	44.03	-23.13	74.00	29.97	100	331	Horizontal
4	2657.6	63.54	45.10	-18.44	74.00	28.90	100	269	Horizontal
5	3319.5	59.75	41.43	-18.32	74.00	32.57	100	159	Horizontal
6	4914	60.35	47.42	-12.93	74.00	26.58	200	318	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1166.6	70.64	46.34	-24.30	74.00	27.66	200	67	Vertical
2	1331.4	67.52	44.95	-22.57	74.00	29.05	200	249	Vertical
3	1660.4	68.68	46.14	-22.54	74.00	27.86	200	304	Vertical
4	2664.6	65.12	47.44	-17.68	74.00	26.56	200	291	Vertical
5	3991.5	63.06	47.17	-15.89	74.00	26.83	100	16	Vertical
6	4923	57.68	45.31	-12.37	74.00	28.69	200	314	Vertical

18GHz-26.5GHz:

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n HT20)

Mode: IEEE 802.11n HT20

Lowest Frequency (2412MHz)

Environment: 23.5°C/56%RH/101.0kPa

Tested By: Zhang Zishan

Date: 2022-09-26

Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18482.375	52.67	40.43	-12.24	83.54	43.11	100	161	Horizontal
2	18902.275	52.37	40.51	-11.86	83.54	43.03	100	32	Horizontal
3	19555.925	52.54	41.18	-11.36	83.54	42.36	100	128	Horizontal
4	20402.525	50.73	40.12	-10.61	83.54	43.42	100	321	Horizontal
5	21170.075	50.81	40.74	-10.07	83.54	42.80	100	97	Horizontal
6	22597.65	47.45	38.43	-9.02	83.54	45.11	100	209	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18659.6	53.57	41.56	-12.01	83.54	41.98	100	86	Vertical
2	19371.9	53.19	41.67	-11.52	83.54	41.87	100	218	Vertical
3	20249.95	51.10	40.38	-10.72	83.54	43.16	100	201	Vertical
4	21210.025	50.53	40.58	-9.95	83.54	42.96	100	134	Vertical
5	21985.65	48.25	38.58	-9.67	83.54	44.96	100	102	Vertical
6	22597.65	46.77	37.75	-9.02	83.54	45.79	100	201	Vertical

----- The following blanks -----

Mode: IEEE 802.11n HT20
Middle Frequency (2437MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-26
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18424.575	52.24	39.97	-12.27	83.54	43.57	100	257	Horizontal
2	18855.95	52.16	40.27	-11.89	83.54	43.27	100	125	Horizontal
3	19612.025	52.94	41.64	-11.30	83.54	41.90	100	94	Horizontal
4	20282.675	51.48	40.71	-10.77	83.54	42.83	100	94	Horizontal
5	21186.65	50.87	40.81	-10.06	83.54	42.73	100	125	Horizontal
6	22597.65	48.39	39.37	-9.02	83.54	44.17	100	241	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18369.75	52.51	40.26	-12.25	83.54	43.28	100	262	Vertical
2	19567.825	53.34	42.02	-11.32	83.54	41.52	100	135	Vertical
3	20157.3	51.97	41.16	-10.81	83.54	42.38	100	166	Vertical
4	21133.525	51.23	41.26	-9.97	83.54	42.28	100	135	Vertical
5	21981.4	48.76	39.09	-9.67	83.54	44.45	100	184	Vertical
6	22597.65	48.87	39.85	-9.02	83.54	43.69	100	37	Vertical

----- The following blanks -----

Mode: IEEE 802.11n HT20
Highest Frequency (2462MHz)
Environment: 23.5°C/56%RH/101.0kPa
Tested By: Zhang Zishan

Date: 2022-09-26
Voltage: AC 120V/60Hz

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18469.625	52.54	40.30	-12.24	83.54	43.24	100	16	Horizontal
2	18980.475	52.77	40.96	-11.81	83.54	42.58	100	148	Horizontal
3	19603.525	52.77	41.46	-11.31	83.54	42.08	100	16	Horizontal
4	20377.875	51.24	40.60	-10.64	83.54	42.94	100	163	Horizontal
5	21199.825	50.43	40.37	-10.06	83.54	43.17	100	115	Horizontal
6	22597.65	47.58	38.56	-9.02	83.54	44.98	100	292	Horizontal

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	18882.725	52.59	40.72	-11.87	83.54	42.82	100	71	Vertical
2	19648.15	52.72	41.50	-11.22	83.54	42.04	100	22	Vertical
3	20313.275	51.76	41.14	-10.62	83.54	42.40	100	216	Vertical
4	21113.55	50.25	40.27	-9.98	83.54	43.27	100	230	Vertical
5	21796.95	48.04	38.38	-9.66	83.54	45.16	100	38	Vertical
6	22589.575	46.89	37.86	-9.03	83.54	45.68	100	38	Vertical

----- The following blanks -----

7. 6dB BANDWIDTH


7.1 LIMITS

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Set resolution bandwidth (RBW) = 100kHz. Set the video bandwidth (VBW) $\geq 3 \times$ RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize, record 6dB bandwidth value.
- 3) Repeat above procedures until all frequencies measured were complete.

7.3 TEST SETUP

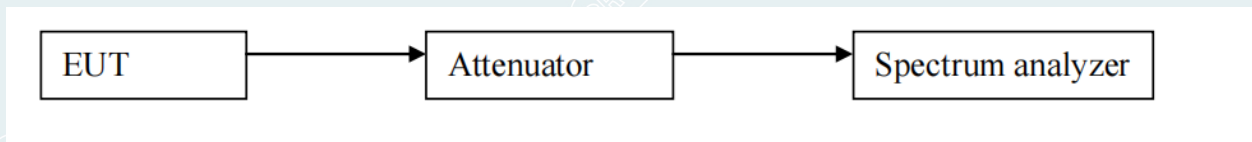

----- The following blanks -----


7.4 TEST RESULTS

Environment: 23.8°C/52%RH/101.0kPa
Tested By: Qin Tingting


Voltage: AC 120V/60Hz
Date: 2022-09-30

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
IEEE 802.11b	Ant1	2412	10.08	≥ 0.5	PASS
		2437	10.08	≥ 0.5	PASS
		2462	9.04	≥ 0.5	PASS
IEEE 802.11g	Ant1	2412	16.32	≥ 0.5	PASS
		2437	16.32	≥ 0.5	PASS
		2462	16.32	≥ 0.5	PASS
IEEE 802.11n HT20	Ant1	2412	17.08	≥ 0.5	PASS
		2437	17.32	≥ 0.5	PASS
		2462	17.04	≥ 0.5	PASS


----- The following blanks -----

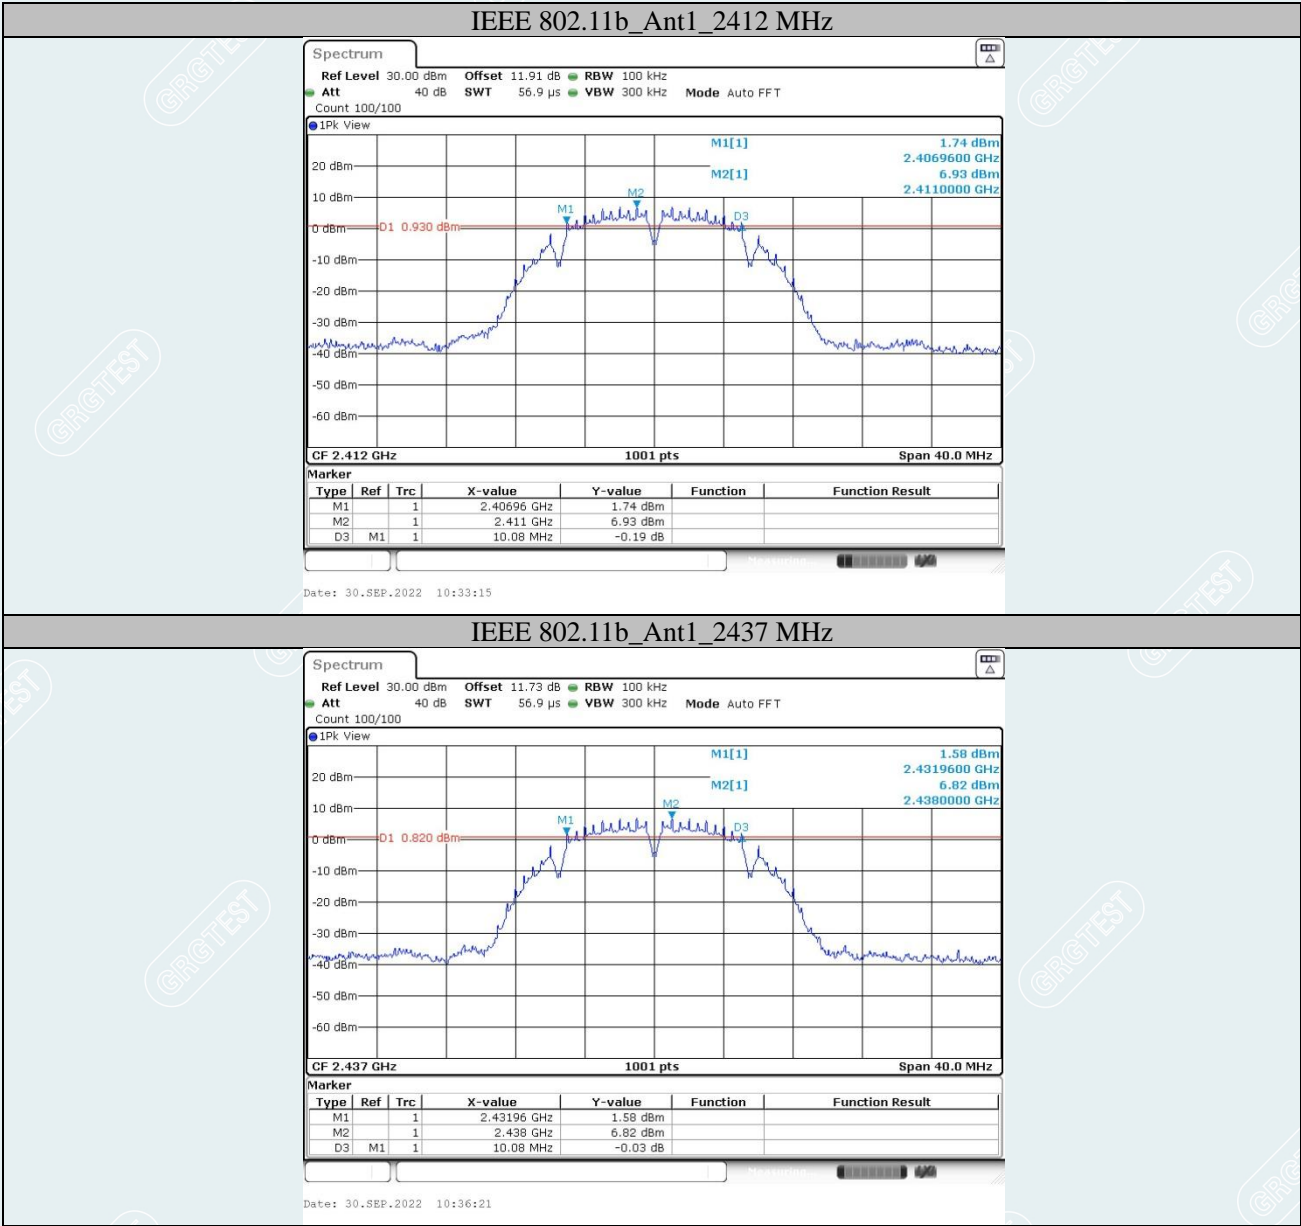


IEEE 802.11b_Ant1_2462 MHz

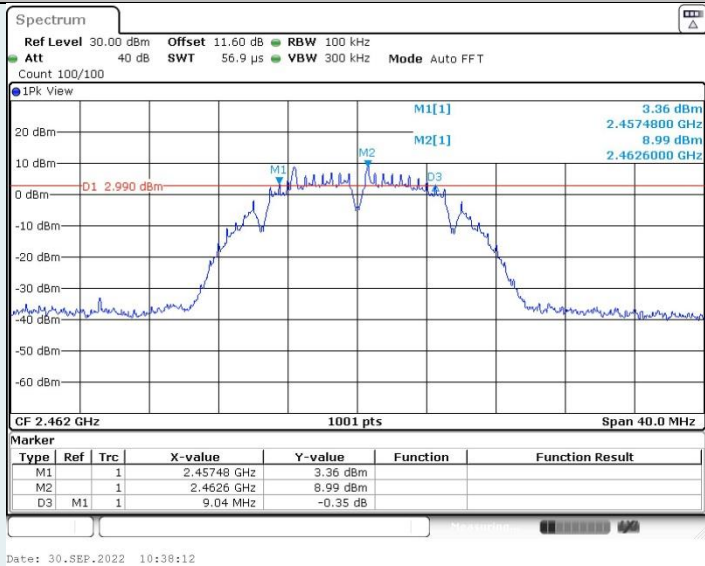


IEEE 802.11g_Ant1_2412 MHz

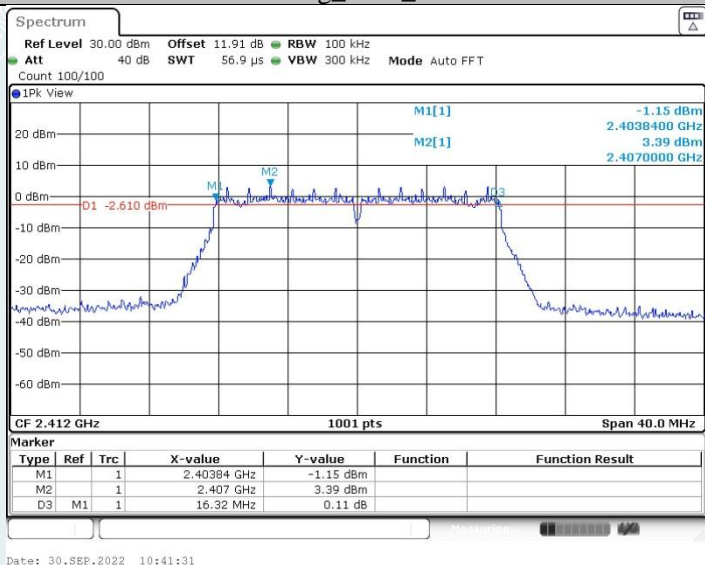



IEEE 802.11g_Ant1_2437 MHz

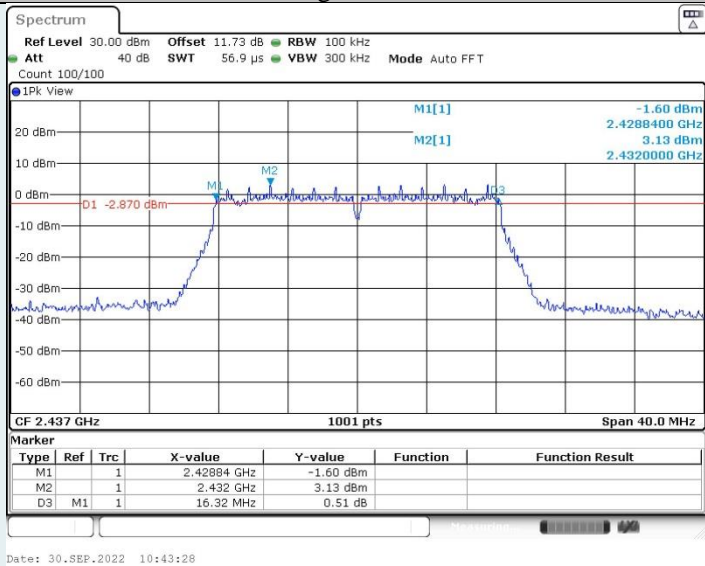

IEEE 802.11g_Ant1_2462 MHz

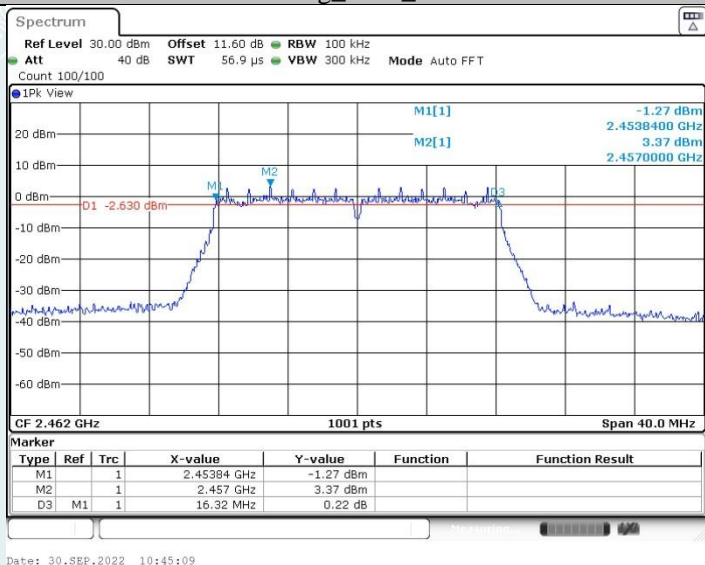

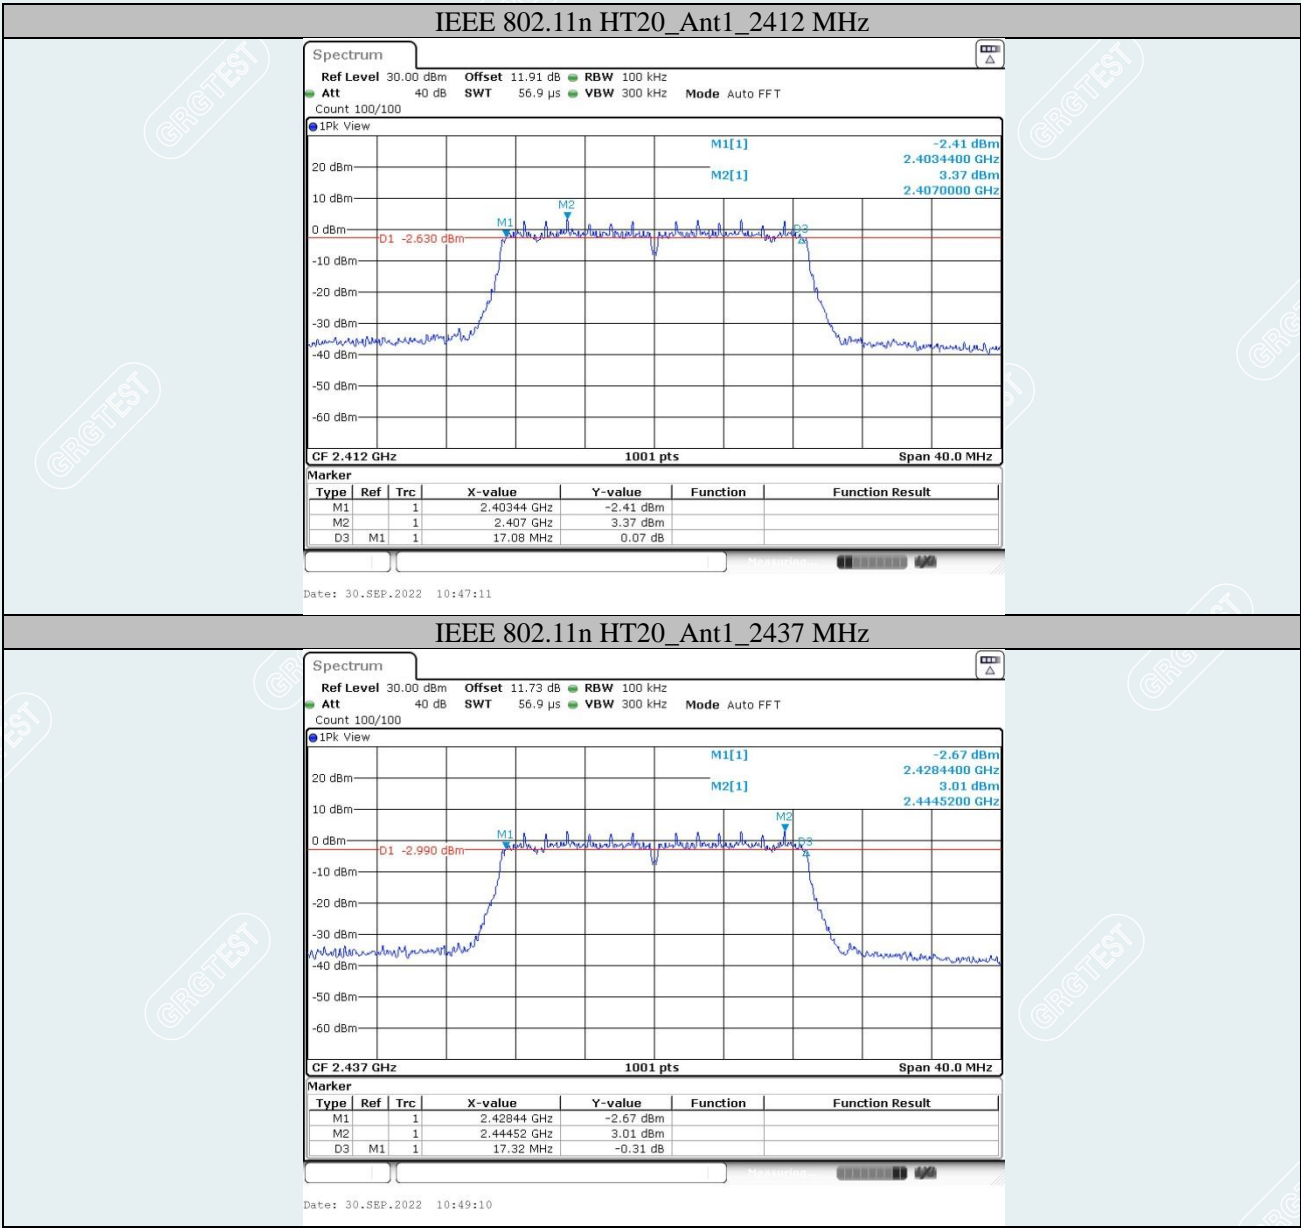

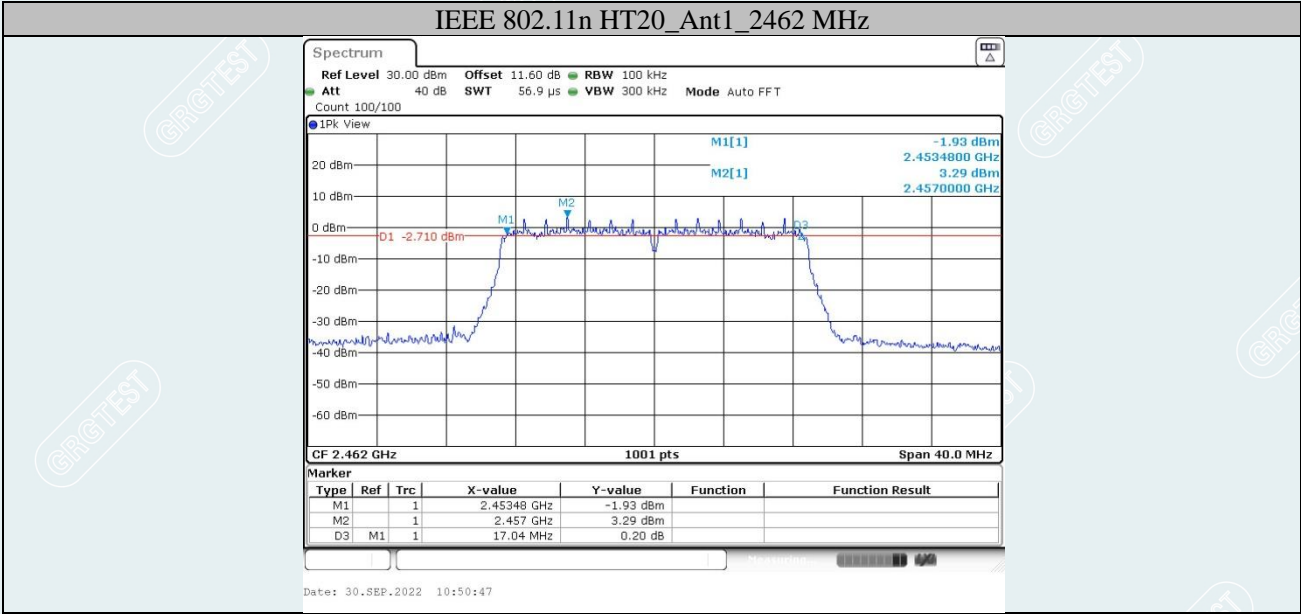

----- The following blanks -----

8. MAXIMUM PEAK OUTPUT POWER


8.1 LIMITS

The maximum Peak output power measurement is 1W

8.2 TEST PROCEDURES

- 1) RF output of EUT was connected to the broadband peak RF power meter by RF cable. The path loss was compensated to the results for each measurement.
- 2) Set to the maximum power setting and enable the EUT transmit continuously.
- 3) Measure the conducted output power and record the results in the test report.

8.3 TEST SETUP

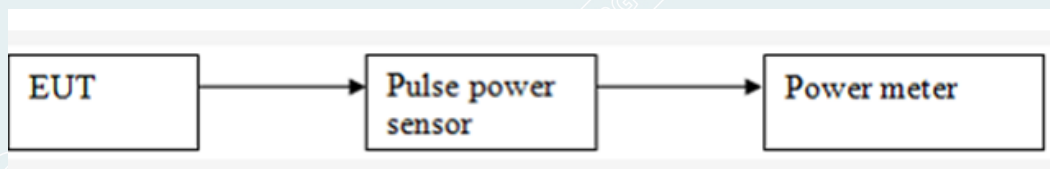

----- The following blanks -----

8.4 TEST RESULT

Environment: 23.8°C/52%RH/101.0kPa
Tested By: Qin Tingting

Voltage: AC 120V/60Hz
Date: 2022-09-30

IEEE 802.11b Mode:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	18.35	Peak	30dBm	Pass
6	2437	18.67			Pass
11	2462	18.75			Pass

IEEE 802.11g Mode:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak / AVG	Limit	Result
1	2412	23.58	Peak	30dBm	Pass
6	2437	24.46			Pass
11	2462	24.59			Pass

IEEE 802.11n HT20 Mode:

Channel No.	Frequency (MHz)	Measured Channel Power (dBm)	Peak/ AVG	Limit	Result
1	2412	24.37	Peak	30dBm	Pass
6	2437	24.57			Pass
11	2462	24.69			Pass

----- The following blanks -----

9. POWER SPECTRAL DENSITY


9.1 LIMITS

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2 TEST PROCEDURES

- 1) Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
- 2) Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- 3) The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:
 - a) Set analyzer center frequency to DTS channel center frequency.
 - b) Set the span to 1.5 times the DTS bandwidth.
 - c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = peak
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
- 4) Repeat above procedures until all frequencies measured were complete.

9.3 TEST SETUP

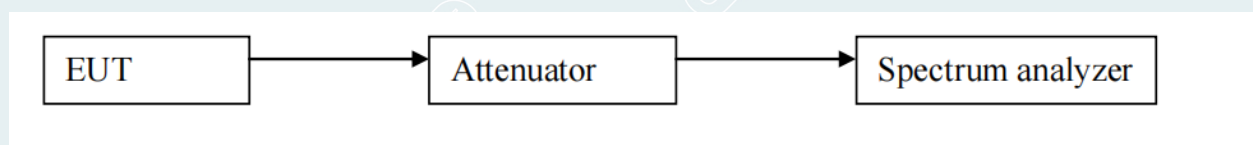

----- The following blanks -----

9.4 TEST RESULTS

Environment: 23.8°C/52%RH/101.0kPa

Tested By: Qin Tingting

Voltage: AC 120V/60Hz

Date: 2022-09-30

IEEE 802.11b Mode:

Channel No.	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	2412	-6.62	8.00	Pass
6	2437	-6.83	8.00	Pass
11	2462	-6.38	8.00	Pass


IEEE 802.11g Mode:


Channel No.	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	2412	-9.24	8.00	Pass
6	2437	-9.87	8.00	Pass
11	2462	-9.93	8.00	Pass


IEEE 802.11n HT20 Mode:


Channel No.	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	2412	-9.77	8.00	Pass
6	2437	-10.34	8.00	Pass
11	2462	-9.88	8.00	Pass


----- The following blanks -----

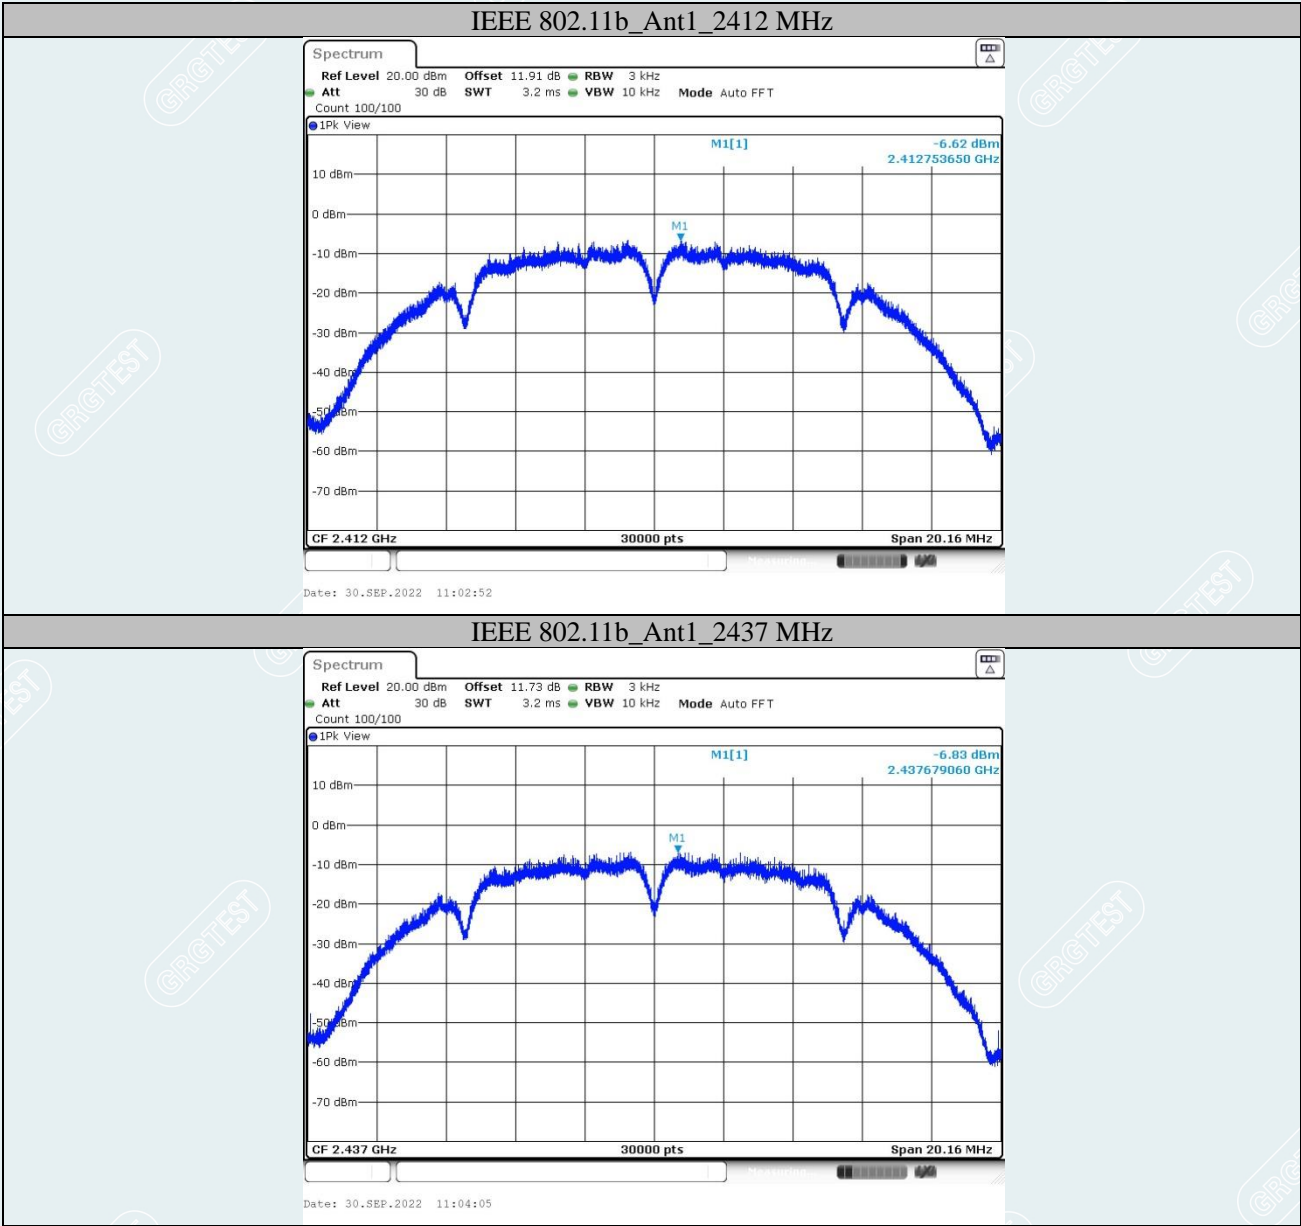

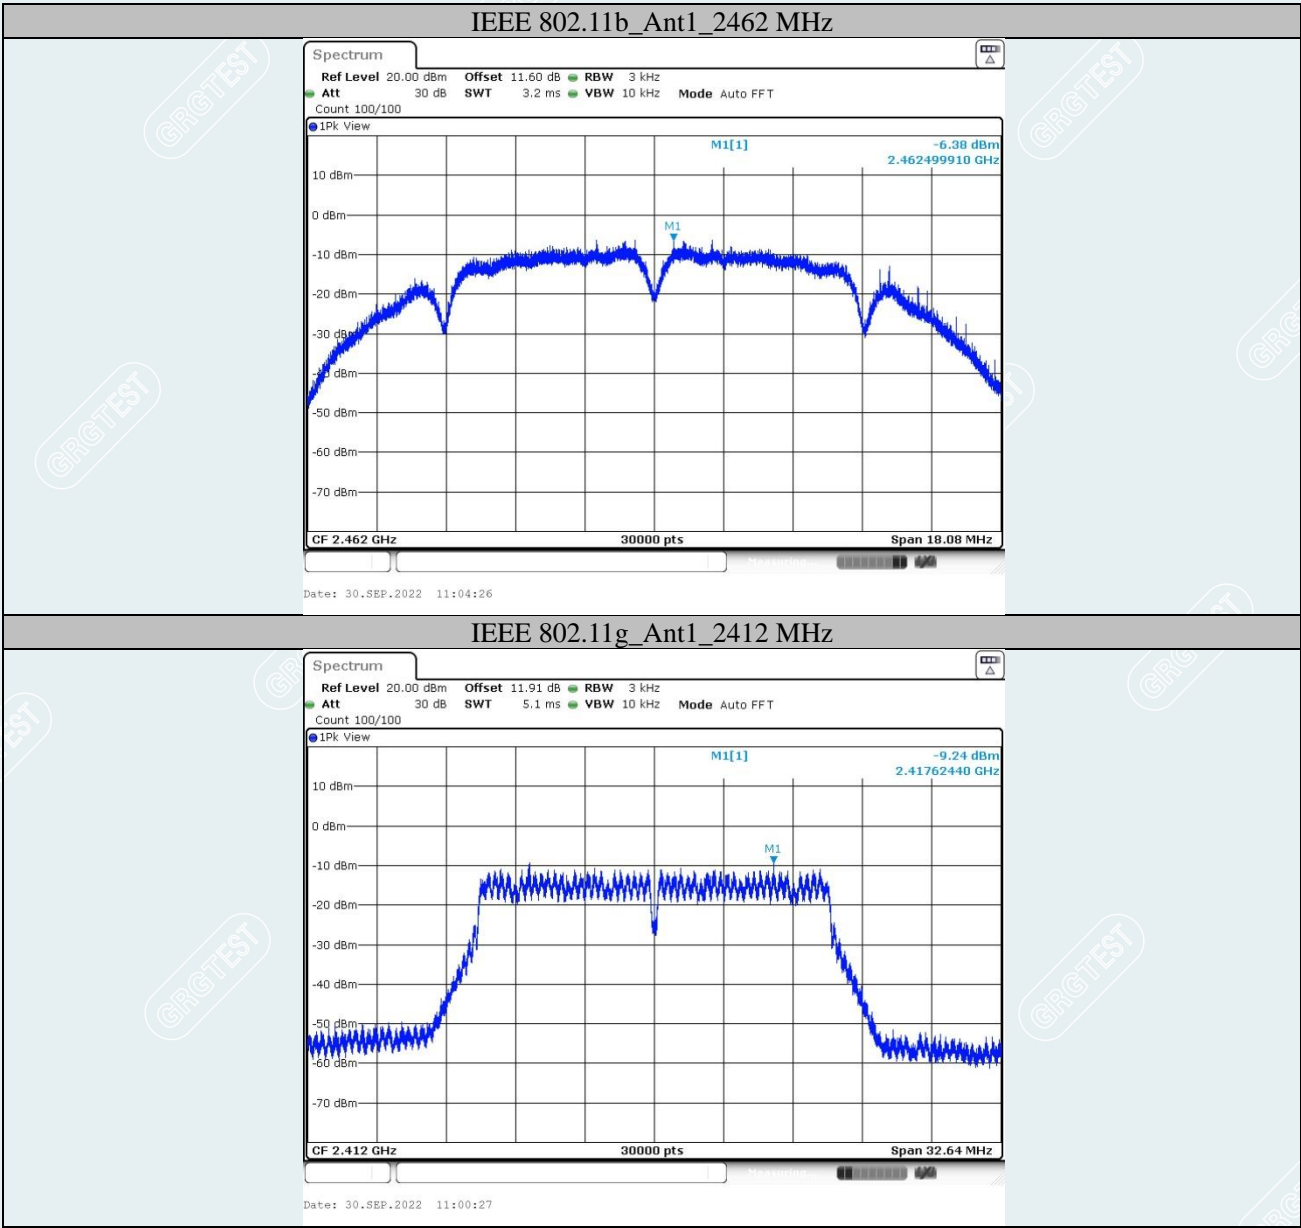

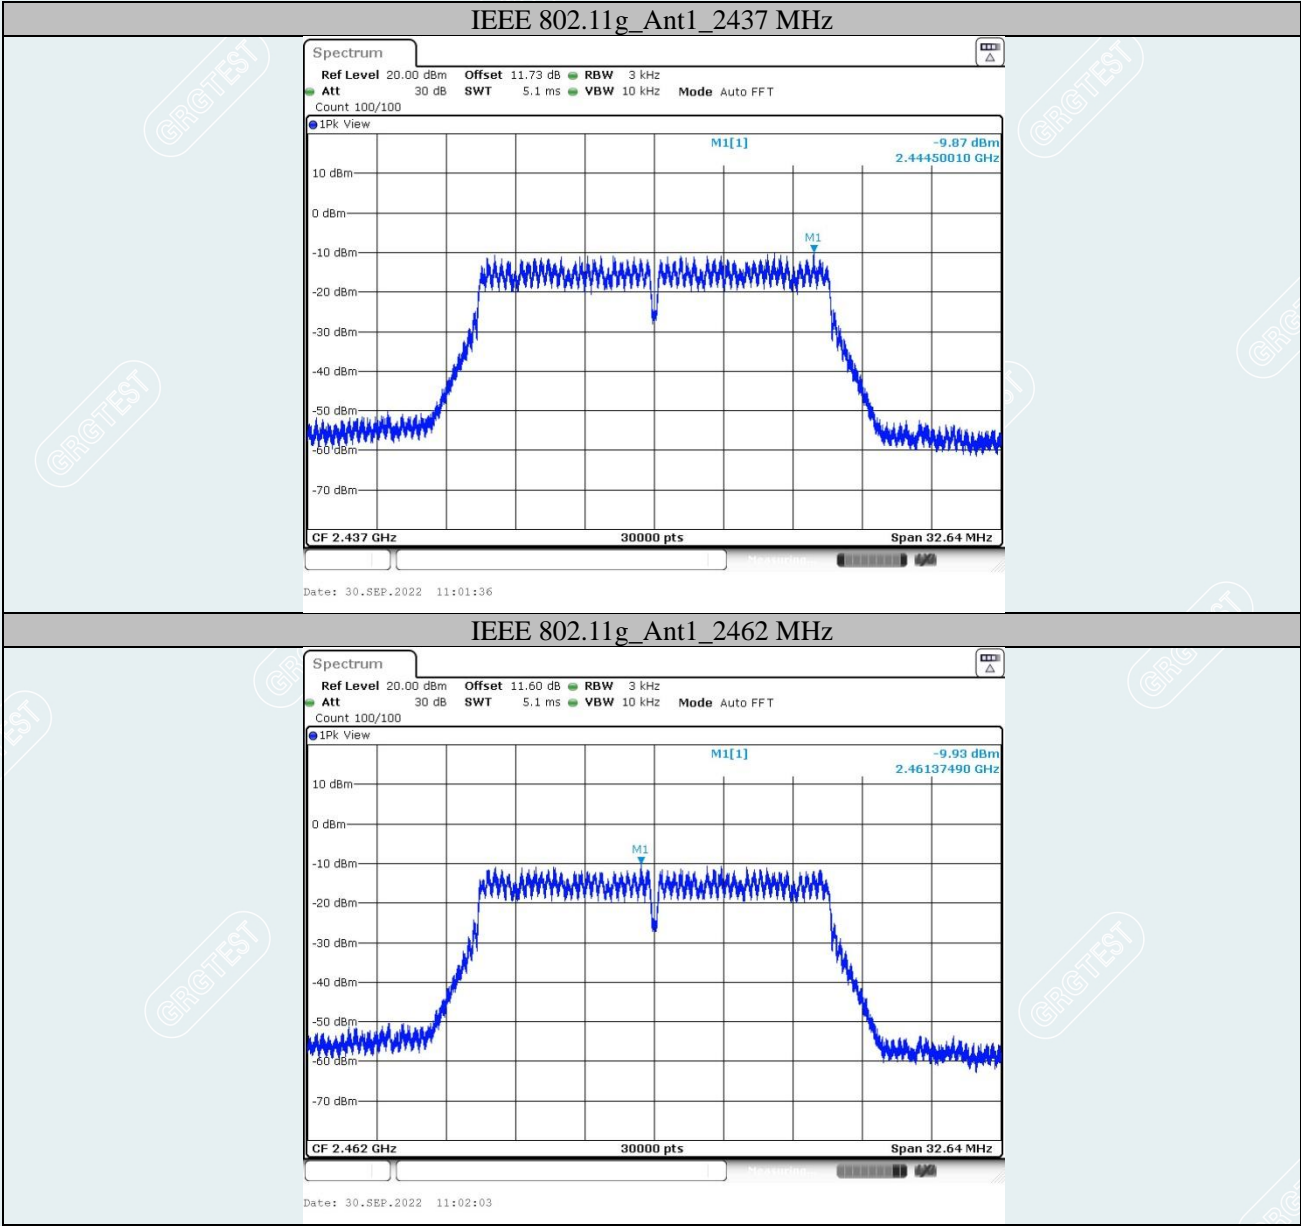

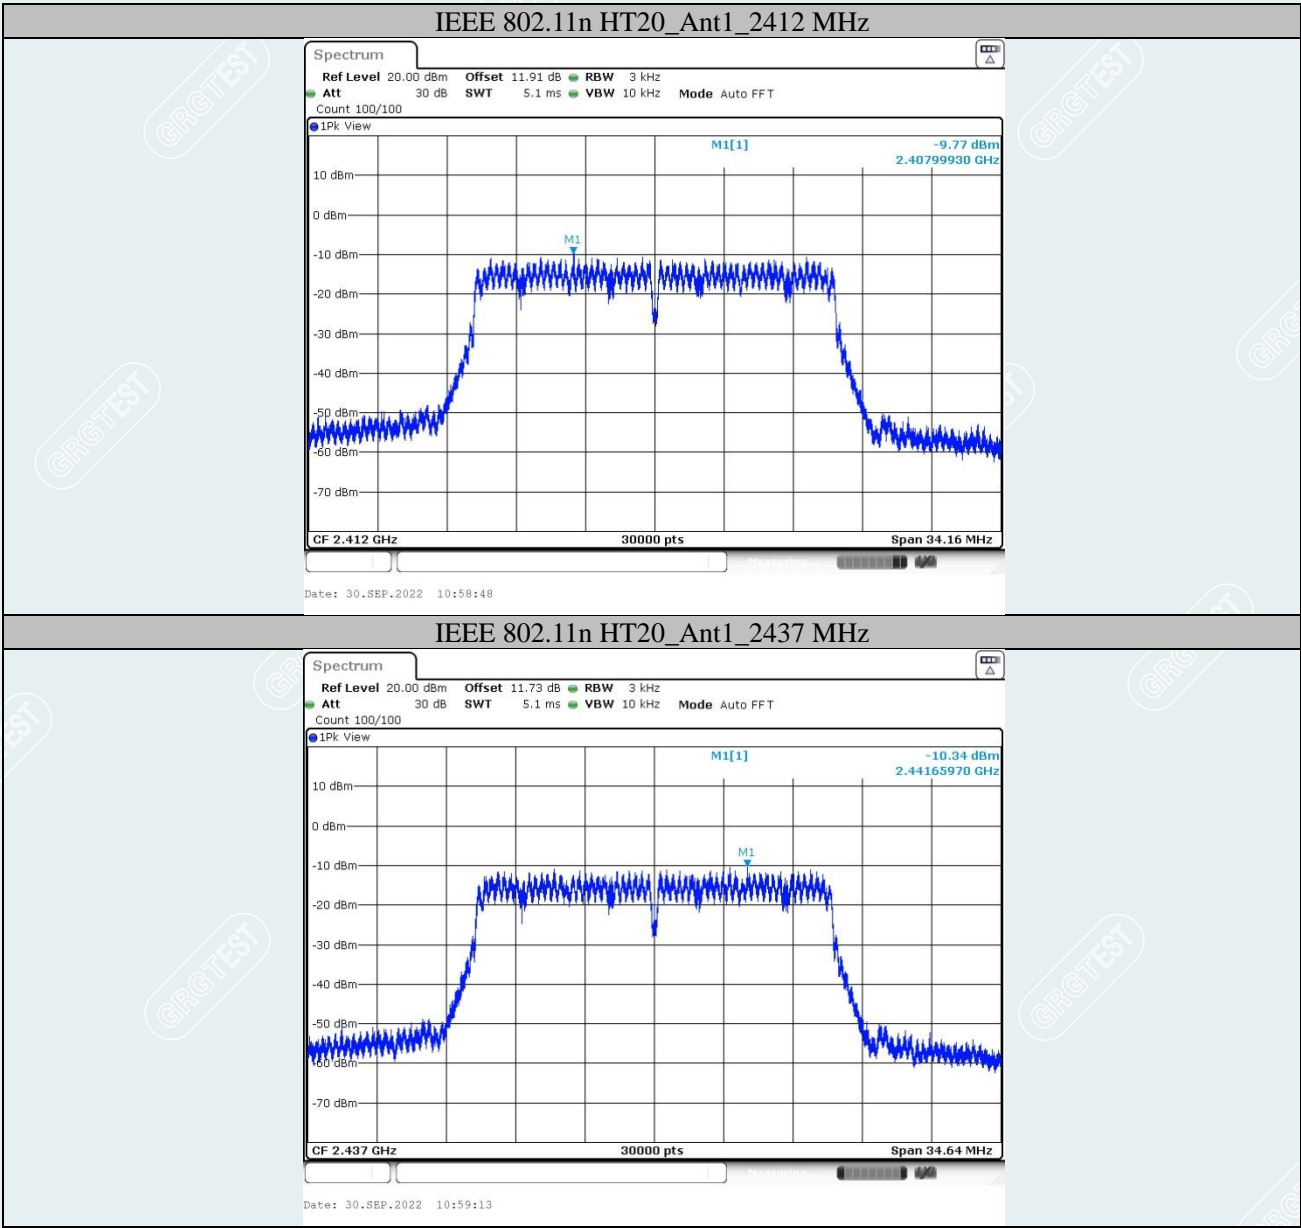

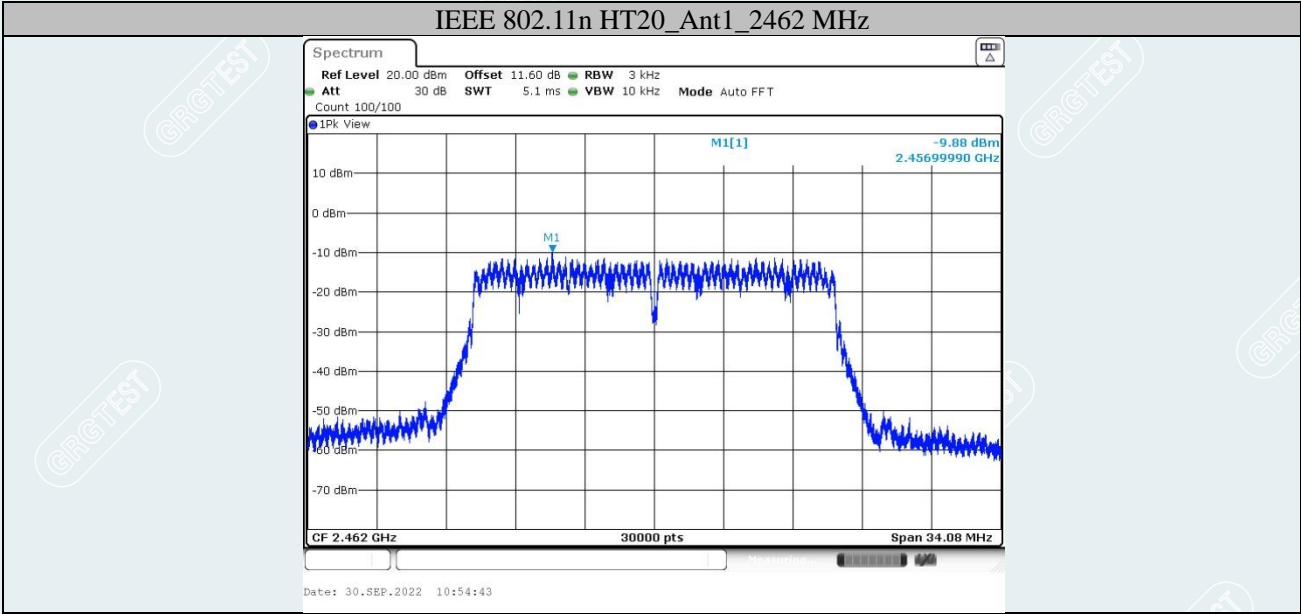

----- The following blanks -----

10. CONDUCTED BAND EDGES AND SPURIOUS EMISSIONS

10.1 LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


10.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 15.247 measurement guidance v05r02.

Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.

- 1) Remove the antenna from the EUT and then connect a low attenuation cable from the antenna port to the spectrum.
- 2) Set the spectrum analyzer: RBW = 100kHz; VBW = 300kHz, Frequency range = 30MHz to 26.5GHz; Sweep = auto; Detector Function = Peak; Trace = Max hold.
- 3) Measure and record the results in the test report.
- 4) The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

10.3 TEST SETUP

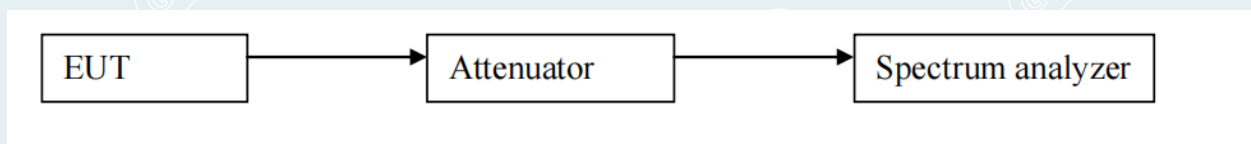

----- The following blanks -----

10.4 TEST RESULTS


Environment:23.8℃/52%RH/101.0kPa
Tested By:Qin Tingting


Voltage:AC 120V/60Hz
Date: 2022-09-30


Band edge

Test Mode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
IEEE 802.11b	Ant1	Low	2412	6.79	-39.38	≤-13.21	PASS
		High	2462	6.59	-43.88	≤-13.41	PASS
IEEE 802.11g	Ant1	Low	2412	3.32	-33.88	≤-16.68	PASS
		High	2462	2.92	-44.26	≤-17.08	PASS
IEEE 802.11n HT20	Ant1	Low	2412	3.26	-34.65	≤-16.74	PASS
		High	2462	3.17	-44.03	≤-16.83	PASS

----- The following blanks -----

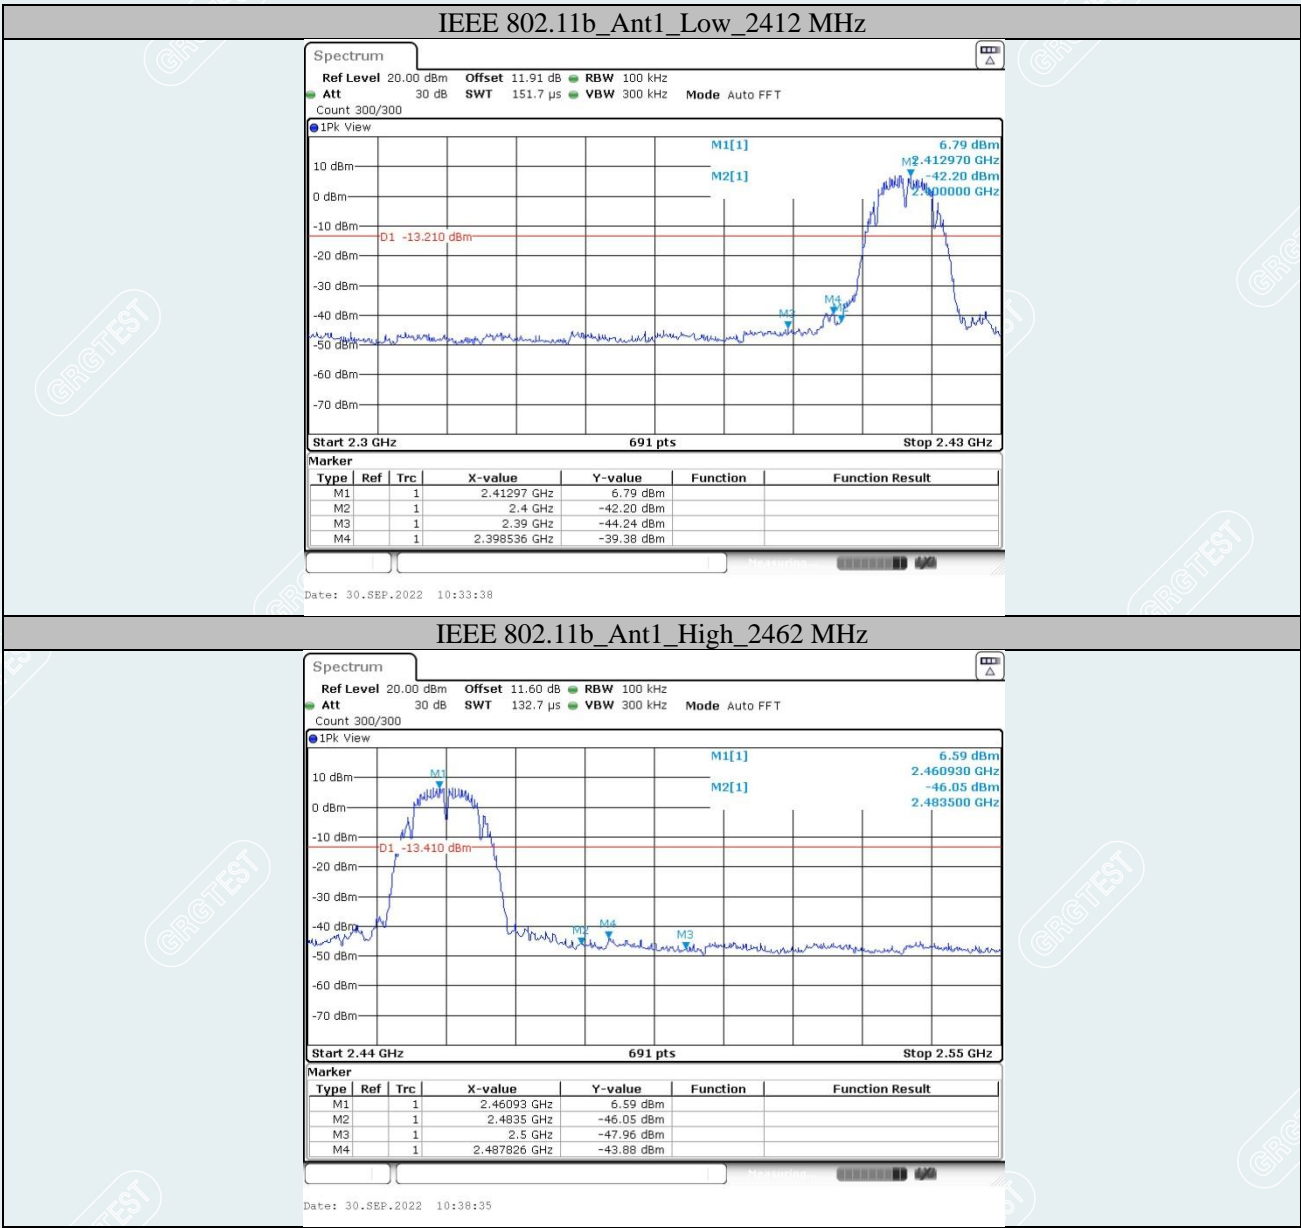

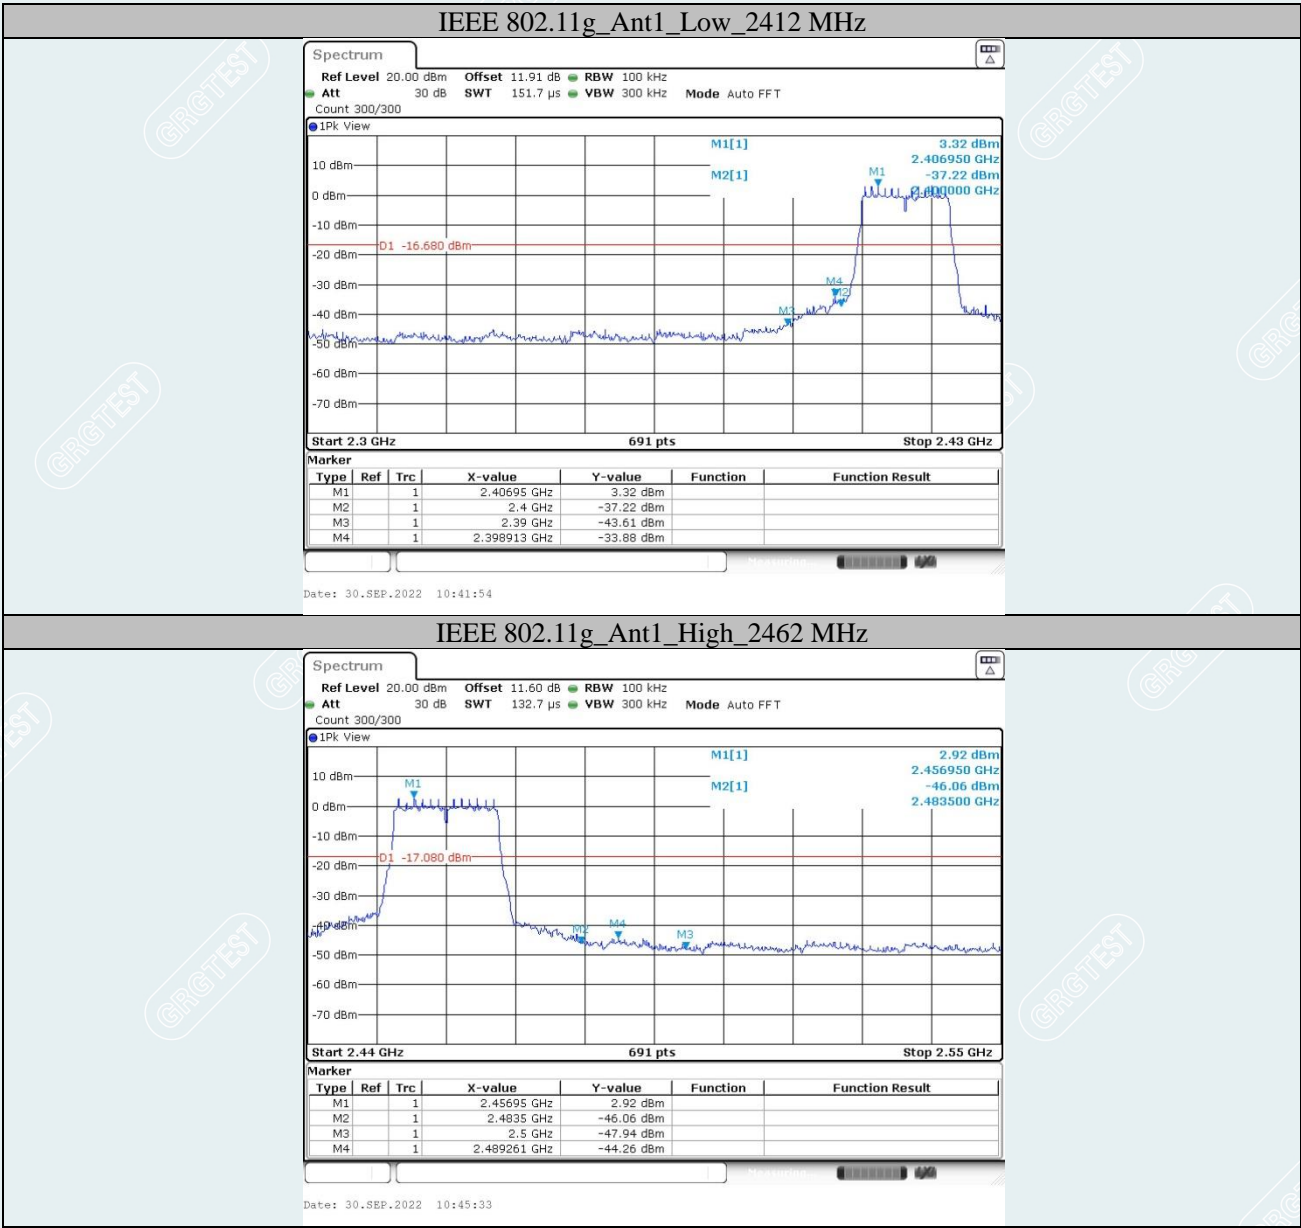

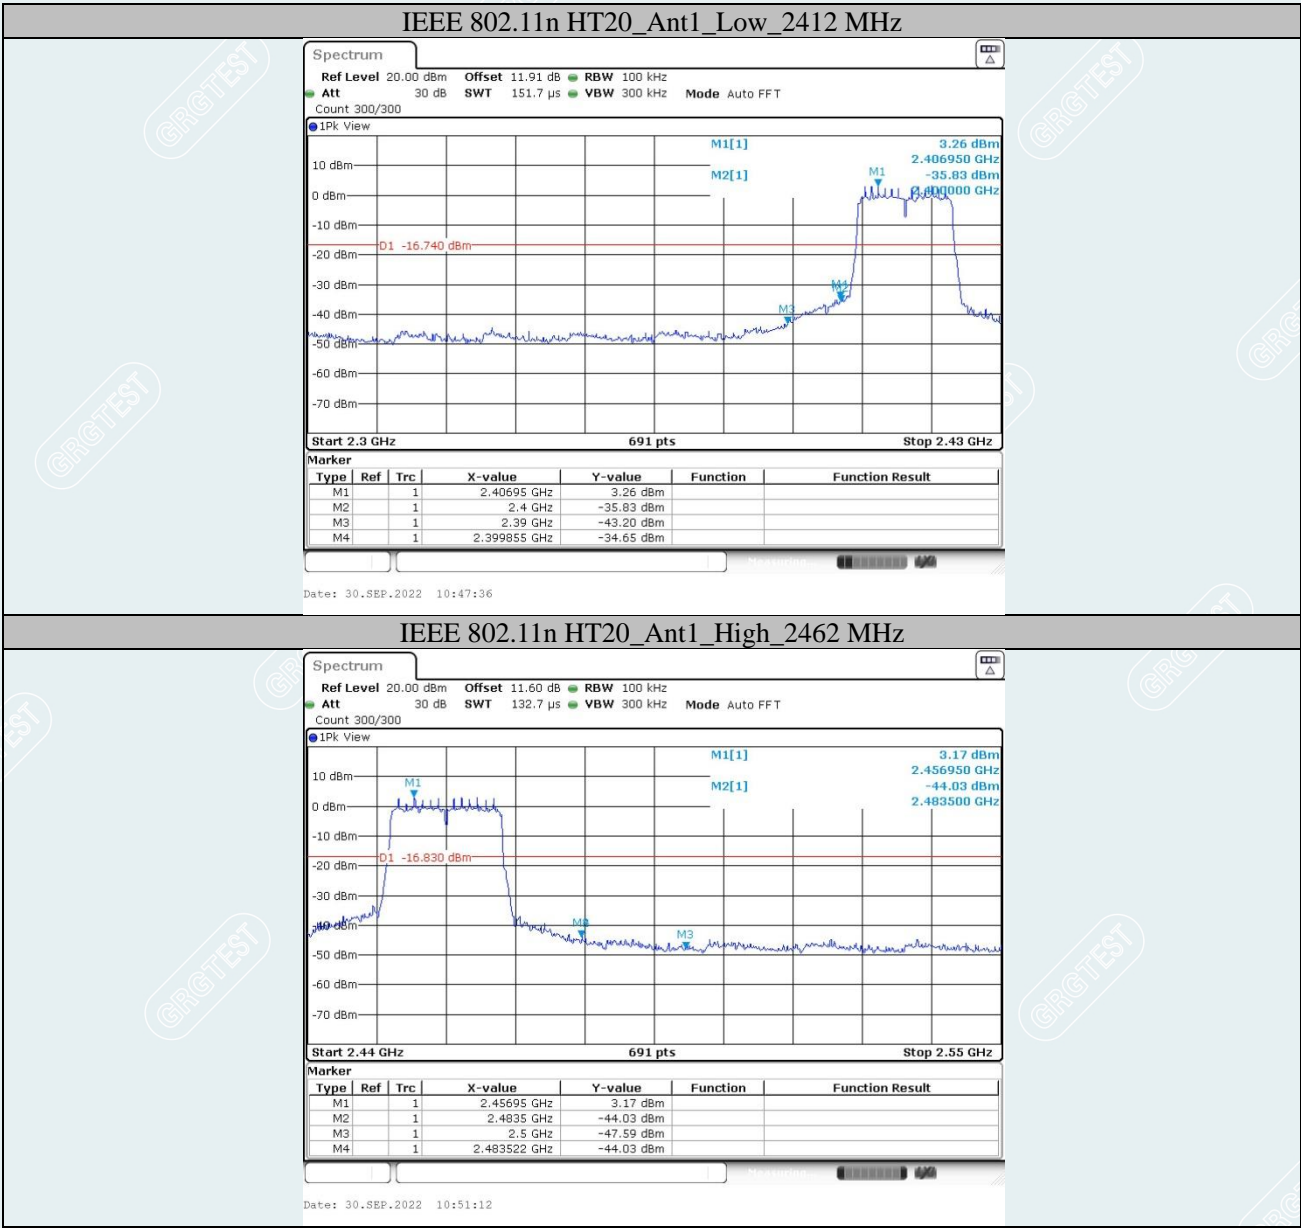

Conducted Spurious Emission:

Test Result


Environment: 23.8℃/52%RH/101.0kPa


Tested By: Qin Tingting


Voltage: AC 120V/60Hz


Date: 2022-09-30

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
IEEE 802.11b	Ant1	2412	Reference	6.64	6.64	---	PASS
			30~1000	6.64	-55.5	≤-13.36	PASS
			1000~26500	6.64	-46.63	≤-13.36	PASS
		2437	Reference	6.86	6.86	---	PASS
			30~1000	6.86	-55.22	≤-13.14	PASS
			1000~26500	6.86	-49.57	≤-13.14	PASS
		2462	Reference	6.77	6.77	---	PASS
			30~1000	6.77	-55.11	≤-13.23	PASS
			1000~26500	6.77	-45.88	≤-13.23	PASS
IEEE 802.11g	Ant1	2412	Reference	3.33	3.33	---	PASS
			30~1000	3.33	-55.38	≤-16.67	PASS
			1000~26500	3.33	-50.62	≤-16.67	PASS
		2437	Reference	3.13	3.13	---	PASS
			30~1000	3.13	-54.81	≤-16.87	PASS
			1000~26500	3.13	-51.11	≤-16.87	PASS
		2462	Reference	3.25	3.25	---	PASS
			30~1000	3.25	-55.97	≤-16.75	PASS
			1000~26500	3.25	-52.31	≤-16.75	PASS
IEEE 802.11n HT20	Ant1	2412	Reference	3.25	3.25	---	PASS
			30~1000	3.25	-55.35	≤-16.75	PASS
			1000~26500	3.25	-51.34	≤-16.75	PASS
		2437	Reference	3.06	3.06	---	PASS
			30~1000	3.06	-55.26	≤-16.94	PASS
			1000~26500	3.06	-51.23	≤-16.94	PASS
		2462	Reference	3.20	3.20	---	PASS
			30~1000	3.20	-55.95	≤-16.8	PASS
			1000~26500	3.20	-51.36	≤-16.8	PASS

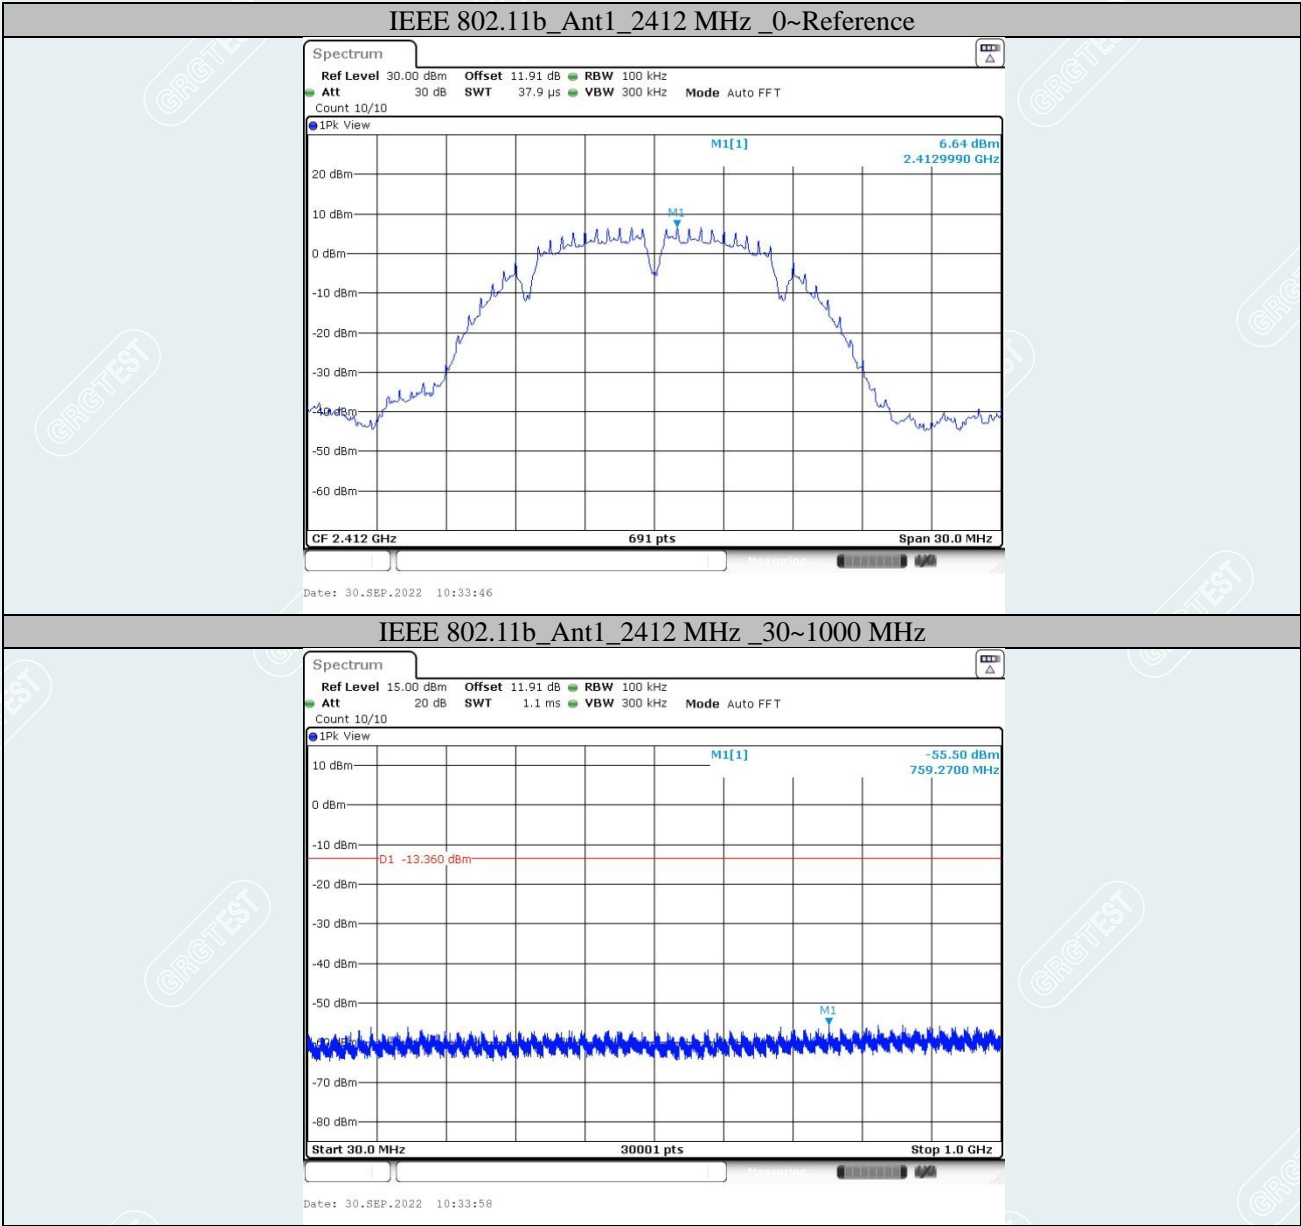


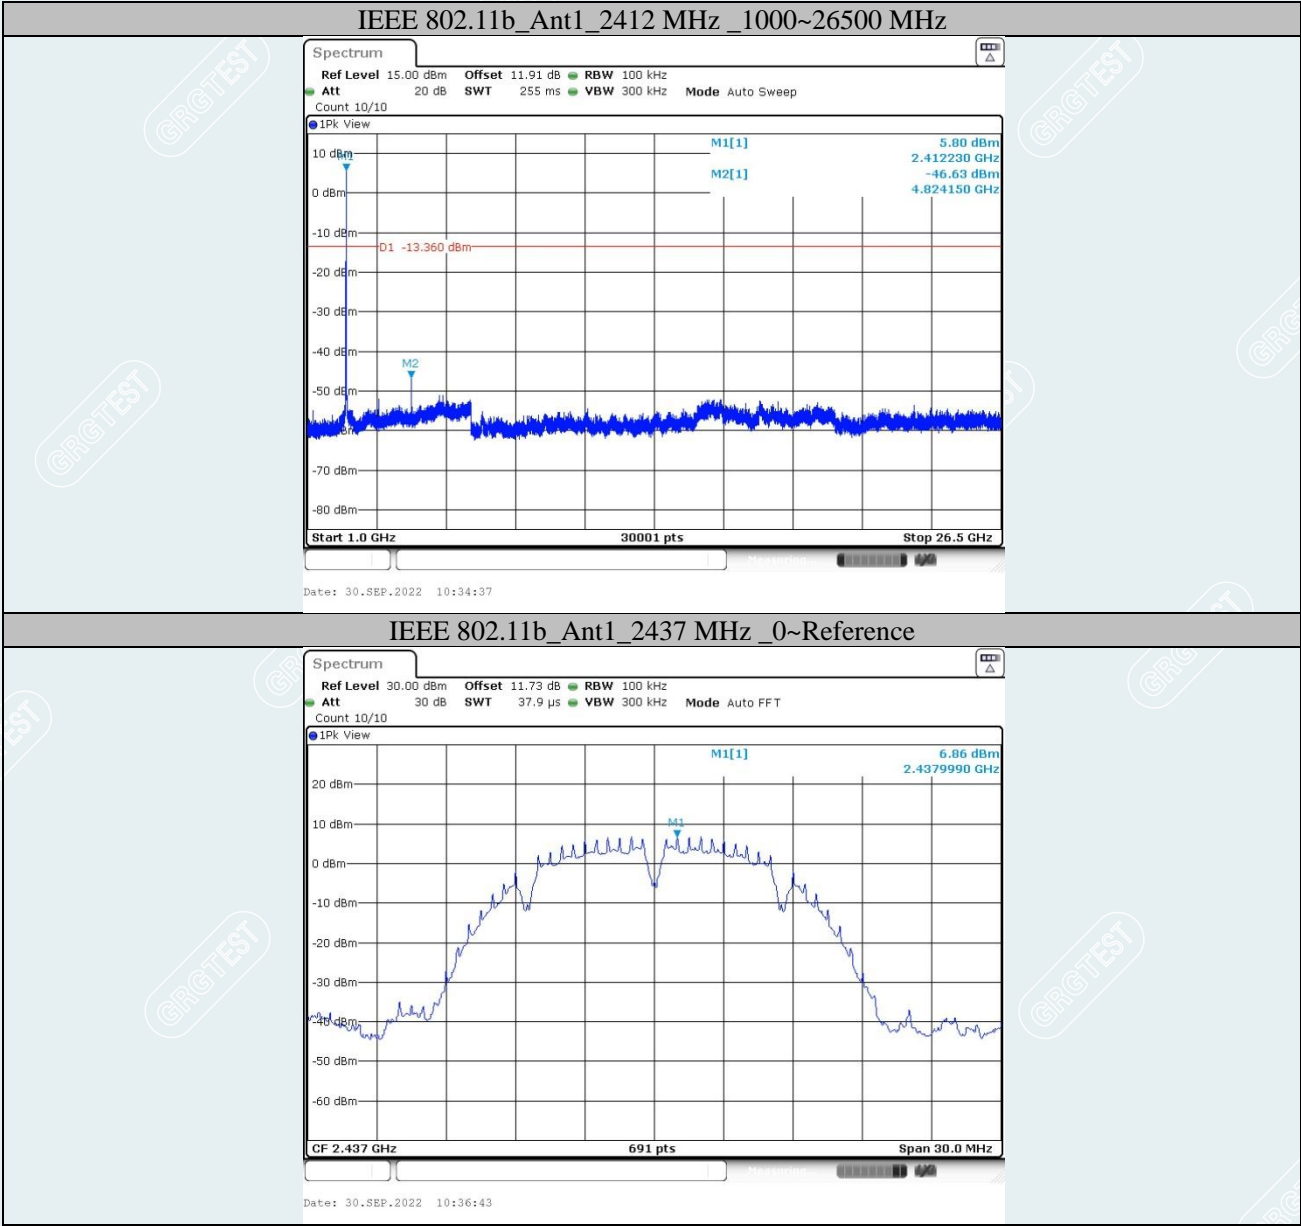

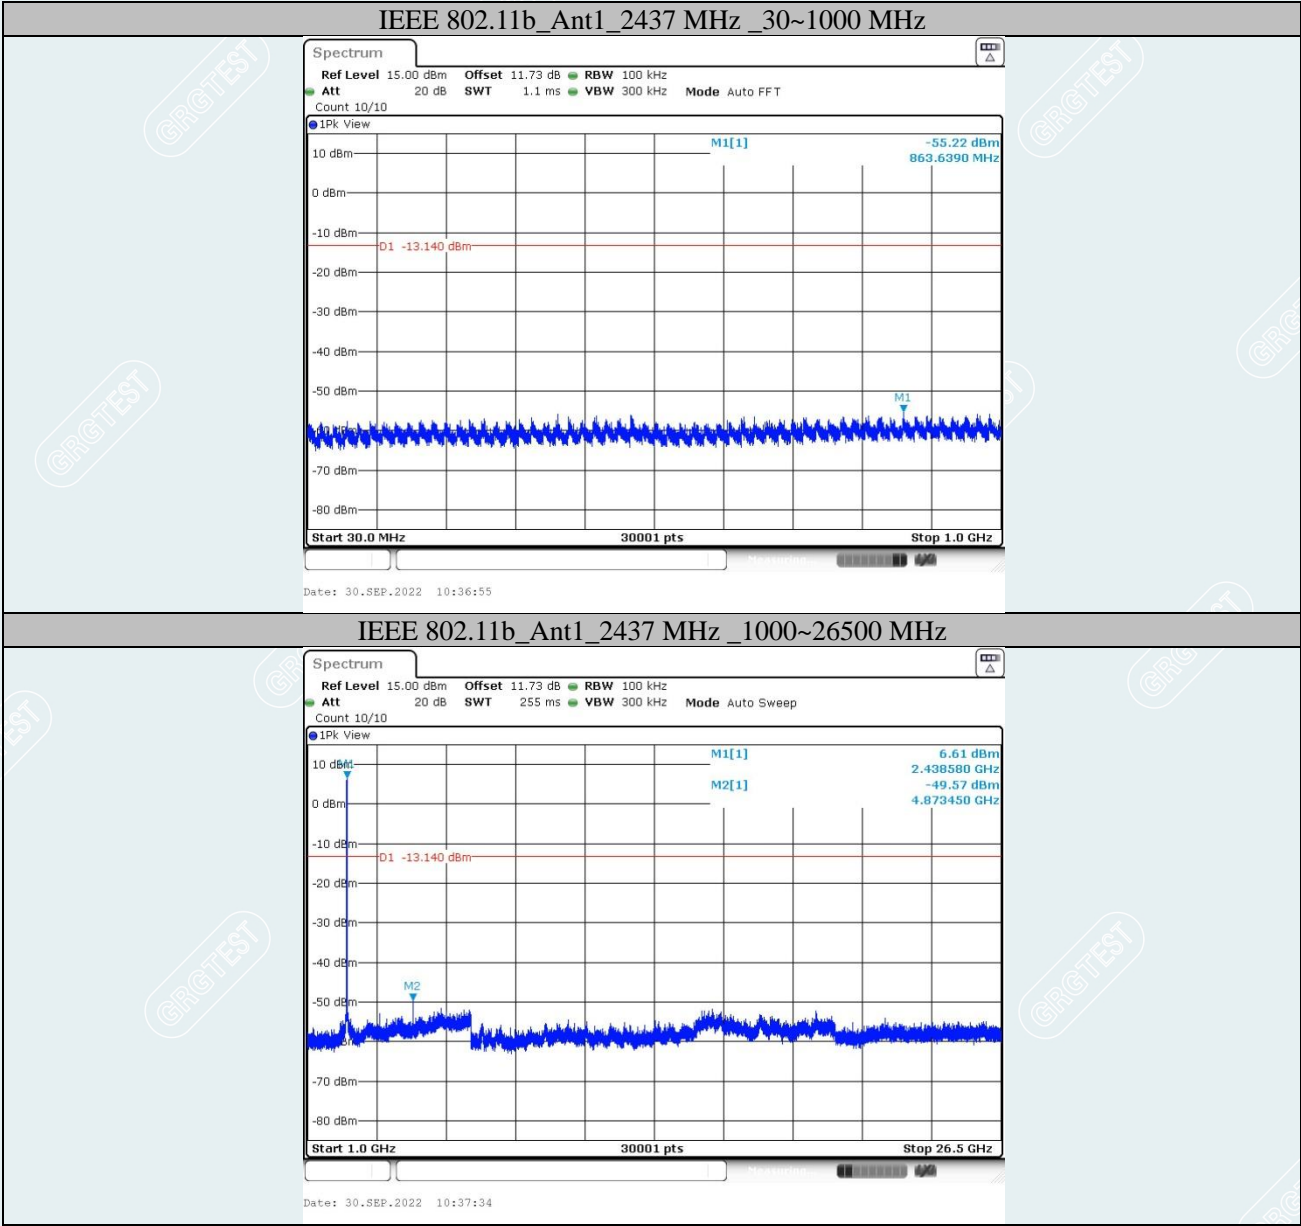

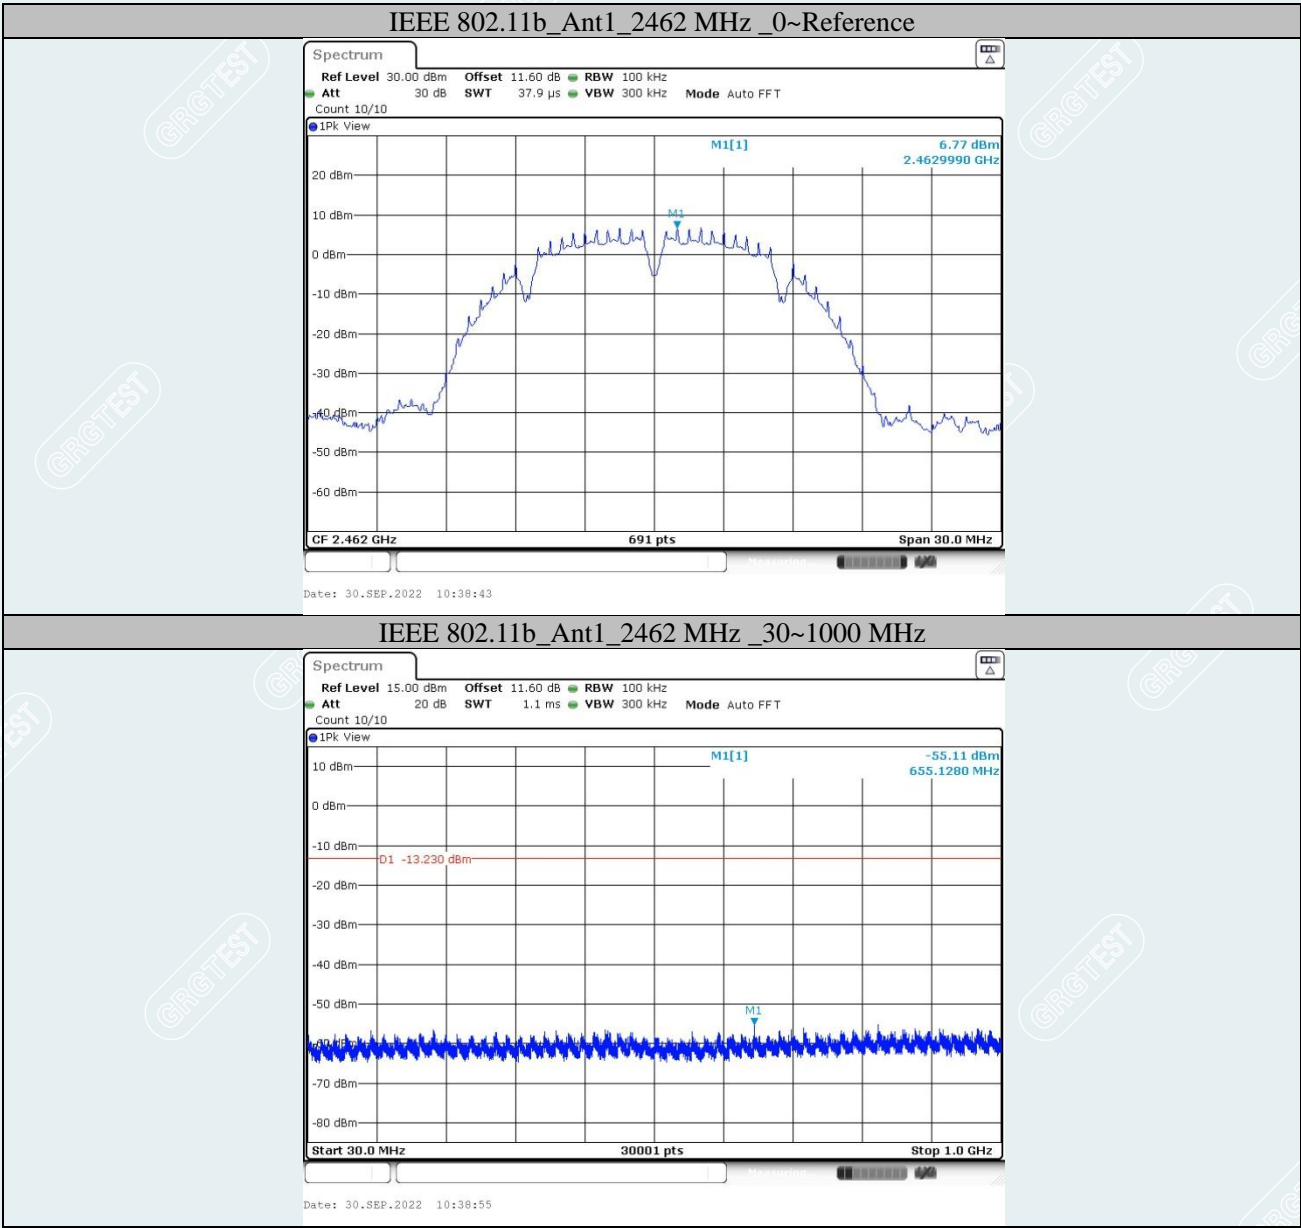

IEEE 802.11b_Ant1_2462 MHz_1000~26500 MHz

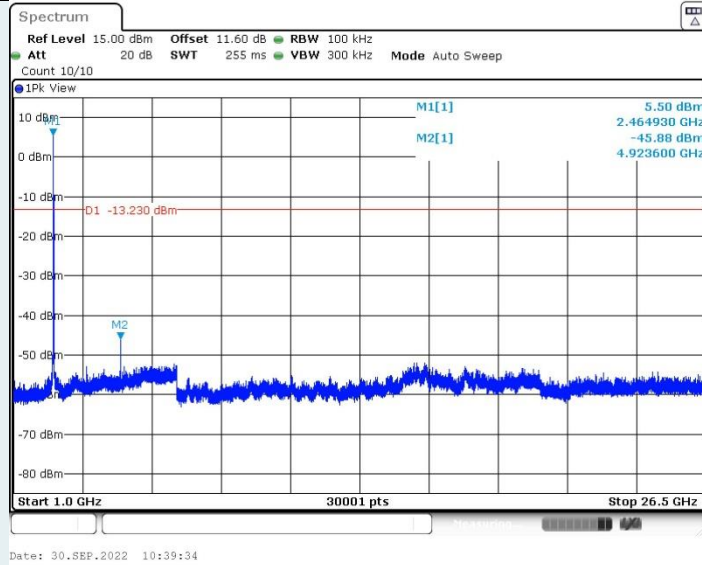

IEEE 802.11g_Ant1_2412 MHz_0~Reference

