


# IC-GM1600 Serial Seal Location



FCC Serial Seal (Include SAR sticker)

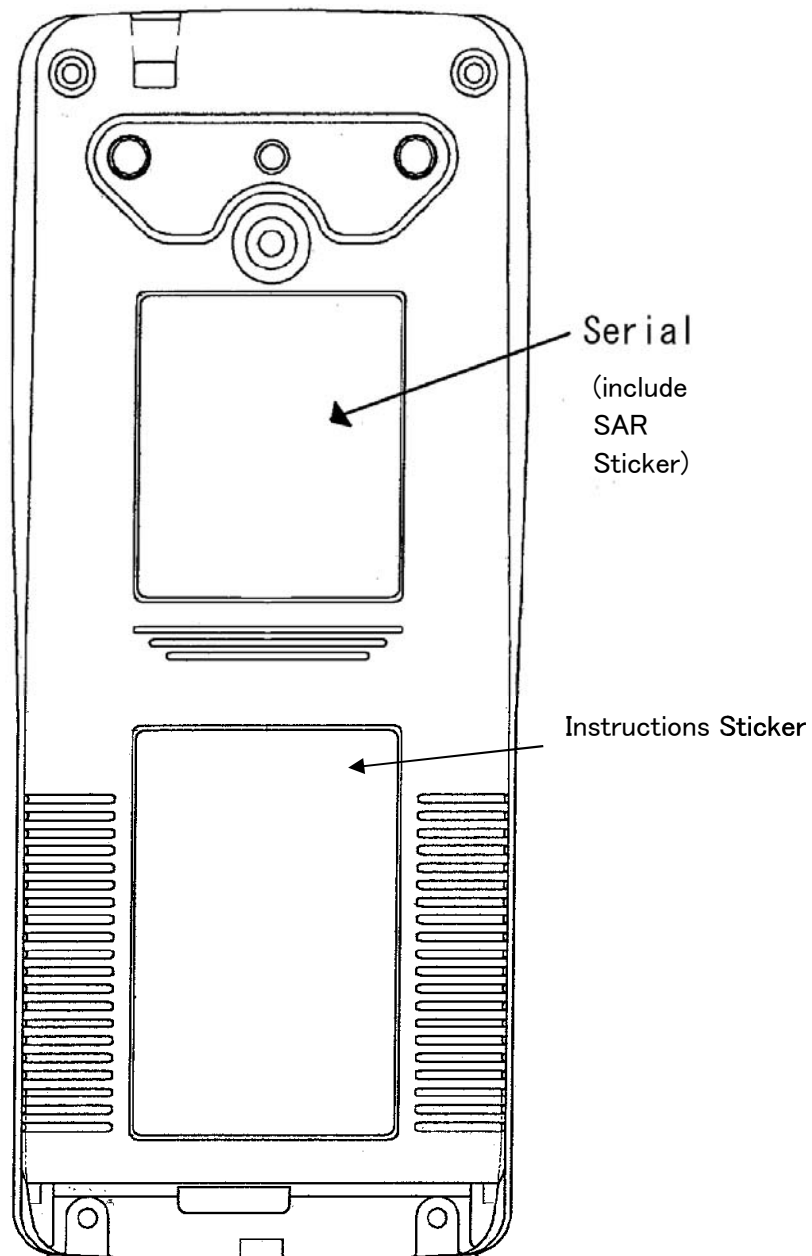

Instructions Seal

**Complies with the  
FCC requirements for  
survival craft two-way  
radiotelephone equipment.**

### **Operating Instructions**

1. FULLY ROTATE [POWER/VOL]  
CLOCKWISE TO TURN POWER ON.
2. PUSH AND HOLD [SQL] TO MONITOR,  
THEN ROTATE [VOL] TO SET THE  
AUDIO OUTPUT LEVEL.
3. PUSH [CH]+[▲]/[▼] TO SELECT THE  
DESIRED CHANNEL.
4. PUSH AND HOLD [PTT] TO TRANSMIT,  
THEN SPEAK INTO THE  
MICROPHONE.
5. RELEASE [PTT] TO RECEIVE.