

	    CERTIFICATE 2518.08 MS ISO/IEC 17025 TESTING SAMM NO. 0825
MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn. Bhd. Plot 2A Medan Bayan Lepas, Mukim 12, S.W.D. 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISED TEST REPORT Report Revision : Rev. B
Date/s Tested : 28-Mar-2022 - 05-Apr-2022 Report Issue Date : 04-Apr-2022 Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia Requestor : KHOO TEIK KEAN Product Type : Hand-held Product Version (PMN) : XPR 3500e Model Number (HVIN) : AAH02RDH9VA1AN; IC Model: PMUE3836CABNKA Frequency Band : 2.402 - 2.480 GHz Max RF Output Power : 10 mWatts Applicant Name : Motorola Solutions Inc Applicant Address : 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322 FCC Registrations : 461337 ISED Registrations : MY0001 Firmware Version (FVIN) : R02.21.04.3004 The equipment was tested accordance to the requirement listed below: (2.4GHz BT LE) 47 CFR Part 15C ISED RSS 247 Issue 2 February 2017 PASS	
This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.	
Prepared By: GAN BOON TEONG Test Personnel	Approved Signatory: HO SZE KHIAN Responsible Engineer

Table of Contents

1.0 General Information	3
2.0 Summary of Test Results.....	4
3.0. Measurement Uncertainty	4
4.0 Equipment List	5
5.0 Test Mode Applicability and Test Channel Detail	6
6.0 Transmitter Test Parameters.....	7
6.1 6dB Channel Bandwidth.....	7
6.1.1 Test Setup.....	7
6.1.2 Test Limits:	7
6.1.3 Test Data:	7
6.2 Maximum Peak Conducted RF Output Power	11
6.2.1 Test Setup.....	11
6.2.2 Test Limits:	11
6.2.3 Test Data:	12
6.3 Maximum Peak Power Spectral Density	14
6.3.1 Test Setup.....	14
6.3.2 Test Limits:	14
6.3.3 Test Result	15
6.4 Conducted Spurious Emission.....	17
6.4.1 Test Setup.....	17
6.4.2 Test Limits:	17
6.4.3 Test Result	17
6.5 Band edge Conducted Spurious Emission.....	27
6.5.1 Test Setup.....	27
6.5.2 Test Limits:	27
6.5.3 Test Result	27
6.6 Radiated Emission within Restricted Bands.....	30
6.6.1 Test Setup.....	30
6.6.2 Test Limits:	31
6.6.3 Test Results:.....	32
6.7 AC Powerline Conducted Emission	62
6.7.1 Test Setup.....	62
6.7.2 Test Limits:	62
6.7.3 Test Result	63

REVISION HISTORY

Revision History	Description	Date	Originator
Rev. A	Initial Report	20-Apr-2022	Gan Boon Teong
Rev. B	Update 2.0 Summary of Test Results	25-Apr-2022	Gan Boon Teong

1.0 General Information

EUT Description:

Technologies	2.4GHz BT LE
TX Frequency range	2402MHz – 2480MHz
Modulation Type	GFSK
Connector type	PROGRAMMING, TEST & ALIGNMENT CABLE
Antenna type	INTERNAL

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
BELIZE NON-TIA HIGH CAP LV LI- ION BATTERY 2950M3000T	MOTOROLA	PMNN4493A
400-527MHZ STUBBY ANTENNA	MOTOROLA	PMAE4079A
Programming Cable USB	MOTOROLA	PMKN4115

Channel number and frequency information:

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

FCC 47 CFR Part 15 Subpart C
KDB 558074 D01 15.247 Meas Guidance v05
ANSI C63.10-2013

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

For RF conducted measurements a pigtail was soldered out of the board while for radiated measurements there were no modifications to the device

2.0 Summary of Test Results

FCC Clause	ISED Clause	Test Item	Result	Remark	Serial number tested	Tested by
15.247 (a)(2)	RSS 247 5.2 (a)	DTS & 99% Channel Bandwidth	Pass	Highest 99% OCB: BT 4.0 - 1.050 MHz (1M05F1D) BT 5.0 - 2.067 MHz (2M07F1D)	867TYF5134	Gan
15.247 (b)(3)	RSS 247 5.4 (d)	Conducted RF Output Power (Average)	Pass	Highest output power: BT 4.0 - 9.528 dBm (8.97 mW) BT 5.0 - 9.467 dBm (8.85 mW)	867TYF5134	Gan
15.247(e)	RSS 247 5.2 (b)	Maximum Peak Power Spectral Density	Pass	Meet the limit requirement.	867TYF5134	Gan
15.247 (d)	RSS-247 5.5	Band-Edge Conducted Spurious Emission	Pass	Worst case emission: BT 4.0 - -48.94 dBm BT 5.0 - -24.19 dBm	867TYF5134	Gan
15.247 (b)	RSS-247 5.5	Conducted Spurious Emission	Pass	Worst case emission: BT 4.0 - -40.24 dBm BT 5.0 - -40.39 dBm	867TYF5134	Gan
15.205, 15.209, 15.247 (d)	RSS247 5.5	Radiated Emission within Restricted Bands	Pass	Worst case emission: RBE: BTLE 2M: spur:49.9763 dBuV/m (AV), (margin: 4.0237dB)	867TYF5151	Qawiman&Nazrin
15.207	RSS-Gen 8.8	AC Power Line Conducted Spurious Emission	NA	Testing is not required, radio shall turn off during charging mode	NA	NA
15.203	-	Antenna Requirement	NA	Internal antenna is not accessible to the end-user	NA	NA

3.0. Measurement Uncertainty

Measurement	Frequency	Expended Uncertainty (k=1.96) (±dB)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.48
Radiated Emissions up to 1 GHz	30MHz ~ 1000MHz	5.88
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.84
	18GHz ~ 40GHz	6.02
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82

4.0 Equipment List

Bluetooth ATE # 1 (SW Version: Ate Main_3.1.11)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
ANALYZER SPECTRUM	E4440A	US45303111	14-Jul-21	14-Jul-22
CHAMBER	SH-641	92003820	14-Jul-21	14-Jul-22
POWER SUPPLY	6652A	MY40001436	22-Nov-21	22-Nov-22
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

Radiated Emission Station (SW Version: EMC FCC RE v1.6.4)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
DRG HORN FREQ.	SAS-571	720	06-Apr-21	06-Apr-23
DRG HORN FREQ.	SAS-571	719	13-Sep-21	13-Sep-22
POWER SUPPLY	N7976A	MY53410110	24-May-21	24-May-22
SIGNAL GENERATOR	SMB 100A	182511	4-Jun-21	4-Jun-24
EMI TEST RECEIVER	ESW44	101731	5-Nov-21	5-Nov-22
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	NA	NA
BILOG ANTENNA	CBL6112D	55546	06-Jun-21	06-Jun-22
BILOG ANTENNA	CBL6112D	30991	05-Oct-21	05-Oct-22
HYGRO-THERMOMETER	SDL500	A.016800	18-May-21	18-May-22
SYSTEM CONTROLLER	SC104V	050806-1	NA	NA
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	NA	NA
ANTENNA POSITIONING TOWER	TLT2	NA	NA	NA
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170143	3-Aug-21	3-Aug-22
PREAMPLIFIER 18-40GHz	BBV9721	9721-007	NA	NA
PREAMPLIFIER	PAM-0118P	361	11-Sep-20	11-Sep-23
LOOP ANTENNA	6502	00208416	8-Oct-21	8-Oct-22

5.0 Test Mode Applicability and Test Channel Detail

Radiated Emission Test (Above 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	23.8°C, 69.4%RH

Radiated Emission Test (Below 1GHz)

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	23.8°C, 69.4%RH

Power Line Conducted Emission Test

☐ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Application Mode	0 to 39	AUTO	AUTO	NA

Antenna Port Conducted Measurement:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).


☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Environmental Conditions
Test Mode	0 to 39	0,19,39	GFSK	25°C, 54.8%RH

6.0 Transmitter Test Parameters

6.1 6dB Channel Bandwidth

6.1.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max hold
 - e. Sweep = auto
- 5) Measure the freq different of two frequencies that were attenuated 6dB from peak of the emission & record the frequency difference as the emission bandwidth.


6.1.2 Test Limits:

Normal Condition (25 ° C)
≥500 kHz


6.1.3 Test Data:

BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	0.698	1.049	Pass
Bluetooth L.E	GFSK	2440	0.705	1.050	Pass
Bluetooth L.E	GFSK	2480	0.704	1.050	Pass

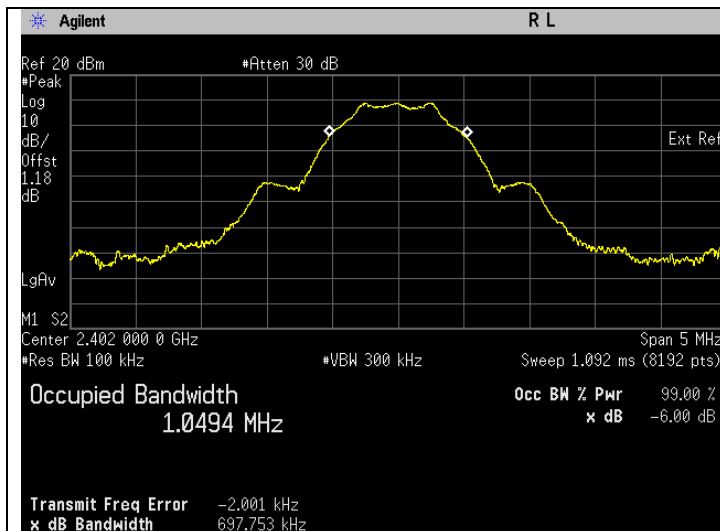


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

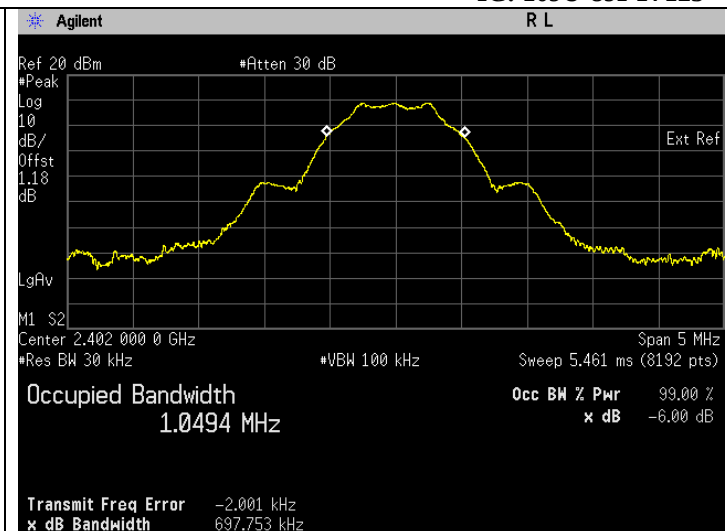


99% Bandwidth. Bluetooth LE Frequency 2402 MHz

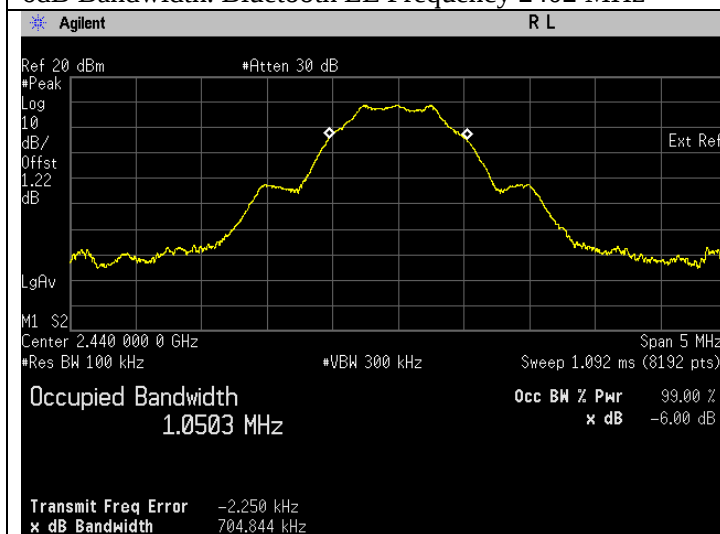


6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

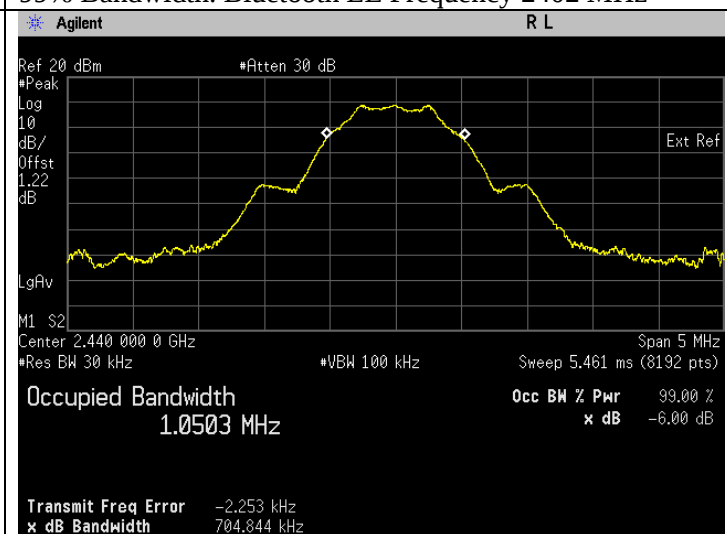

99% Bandwidth. Bluetooth LE Frequency 2440 MHz

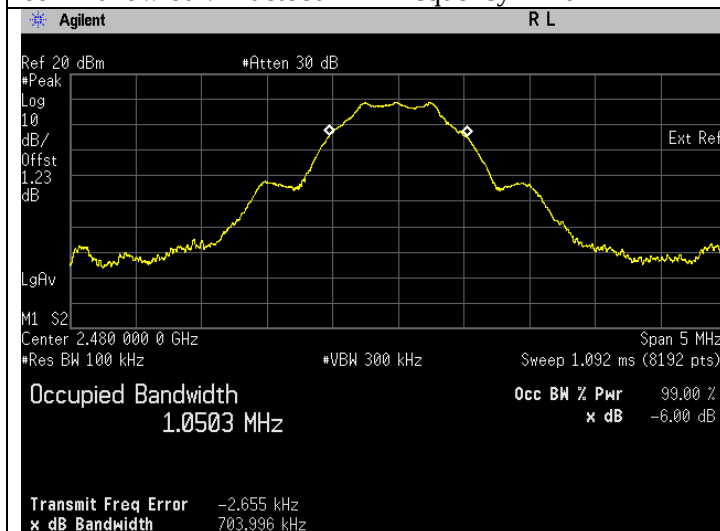


6dB Bandwidth. Bluetooth LE Frequency 2480 MHz

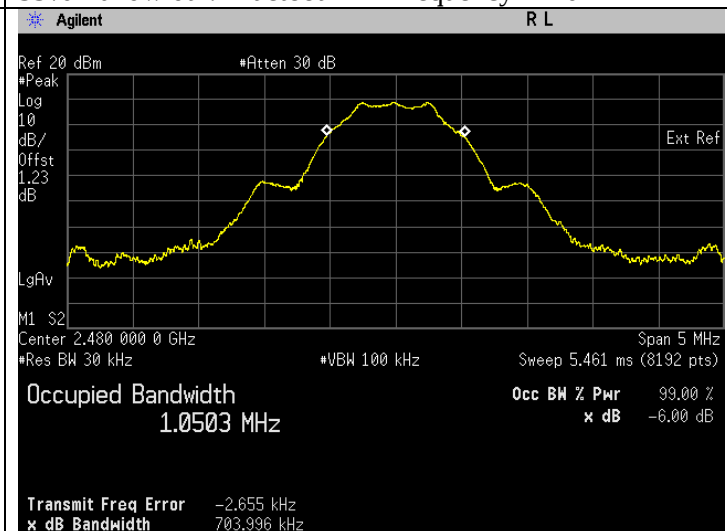


99% Bandwidth. Bluetooth LE Frequency 2480 MHz

BTLE 2M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Status
Bluetooth L.E	GFSK	2402	1.165	2.067	Pass
Bluetooth L.E	GFSK	2440	1.175	2.065	Pass
Bluetooth L.E	GFSK	2480	1.171	2.066	Pass

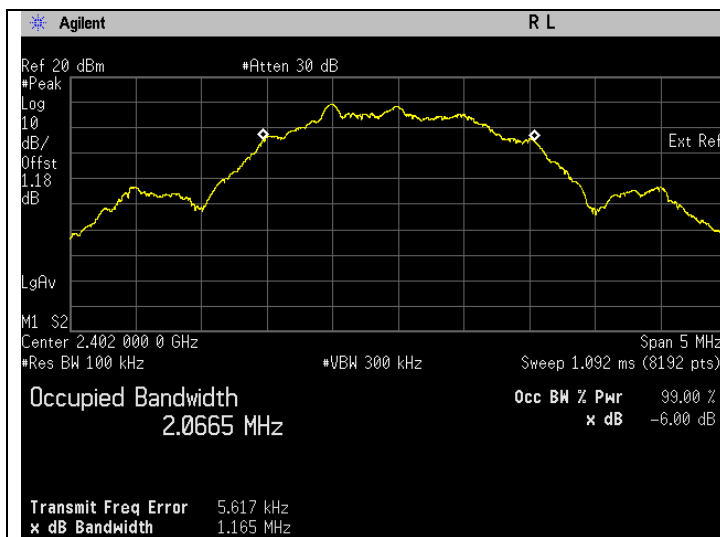


6dB Bandwidth. Bluetooth LE Frequency 2402 MHz

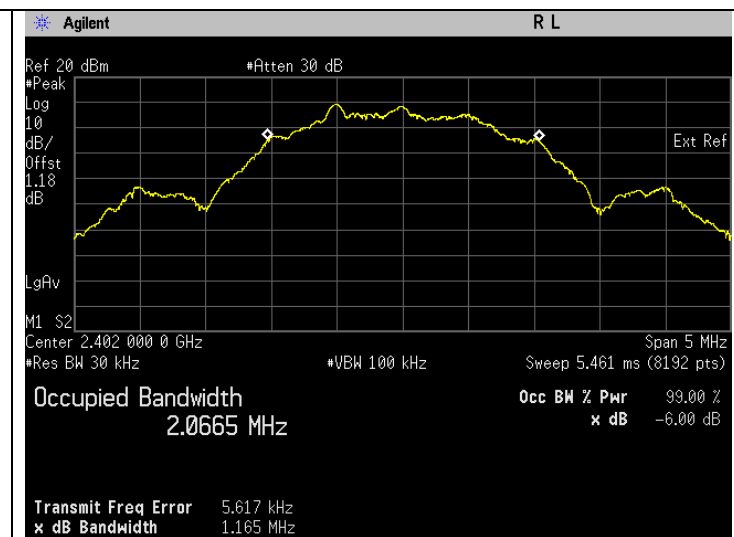



99% Bandwidth. Bluetooth LE Frequency 2402 MHz

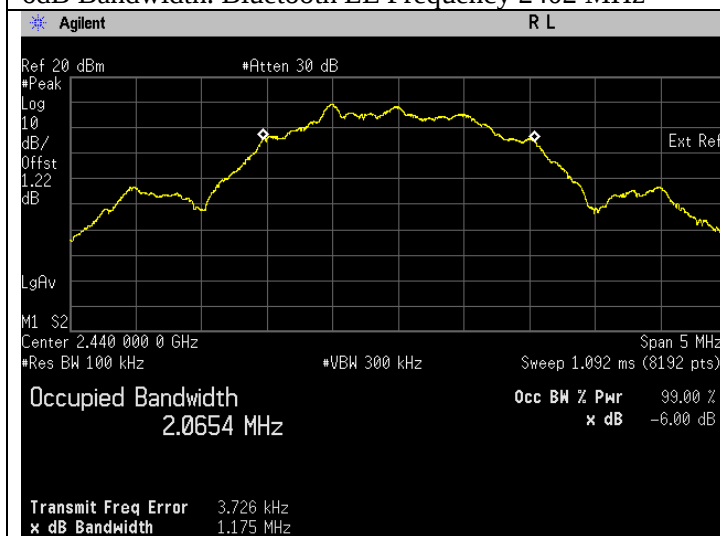

6dB Bandwidth. Bluetooth LE Frequency 2440 MHz

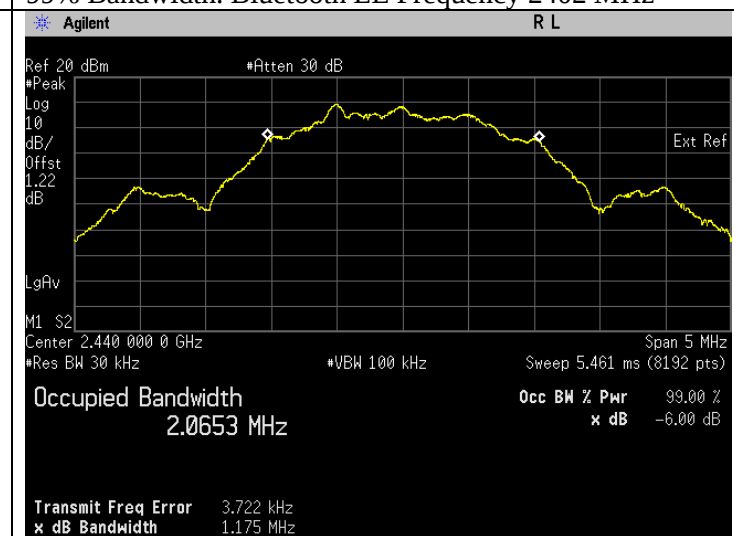


99% Bandwidth. Bluetooth LE Frequency 2440 MHz

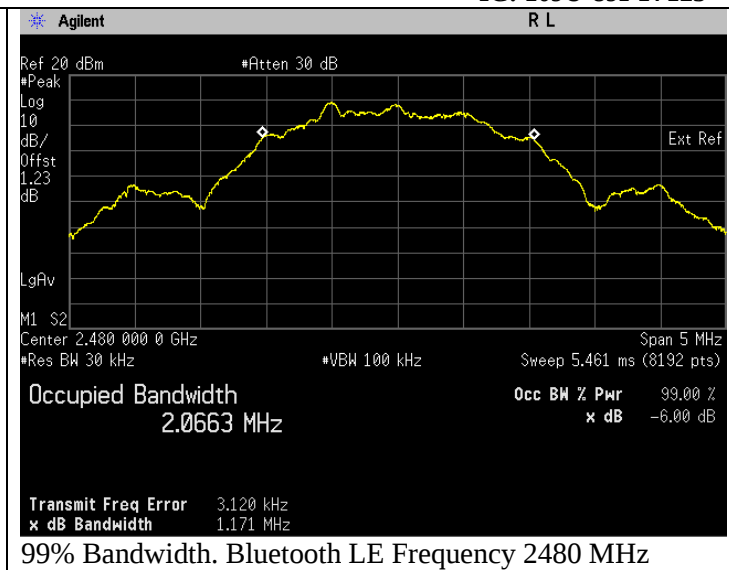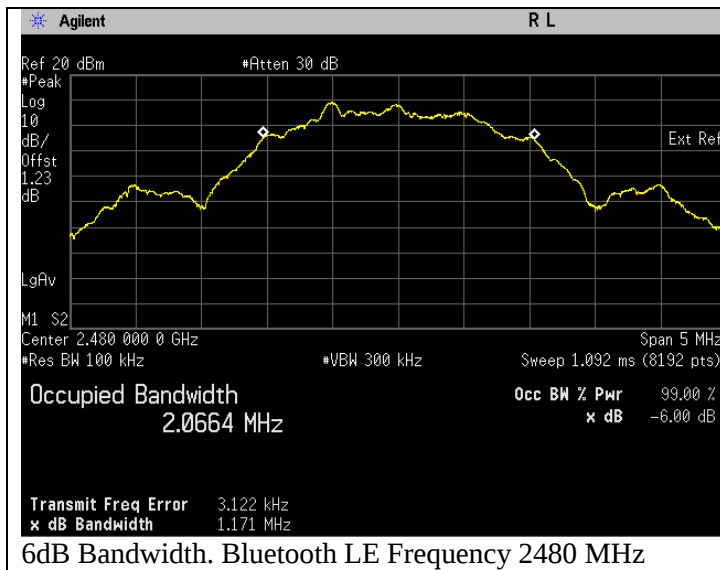

6.2 Conducted RF Output Power

6.2.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Measure the duty cycle of transmitter output signal.
- 4) Setting of Spectrum analyzer :
 - a. Set the RBW = 30 kHz.
 - b. Set the VBW $\geq [3 \times \text{RBW}]$.
 - c. Set the span $\geq [1.5 \times \text{OBW bandwidth}]$.
 - d. Detector = average.
 - e. Sweep time = auto couple.
 - f. Trace mode = free run.
 - g. Allow trace to fully stabilize.
- 5) Add in duty cycle correction into final test result.
- 6) Duty cycle correction is calculated as below:
 $10 \log (1/x)$

6.2.2 Test Limits:


Normal Condition (25 ° C)
$\leq 1 \text{ Watt}(30 \text{ dBm})$

6.2.3 Test Data:


BTLE 1M

Output power = Band Power + Duty Cycle factor
=Band Power + 2.027dBm


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	9.528	Pass
Bluetooth L.E	GFSK	2440	9.409	Pass
Bluetooth L.E	GFSK	2480	9.397	Pass

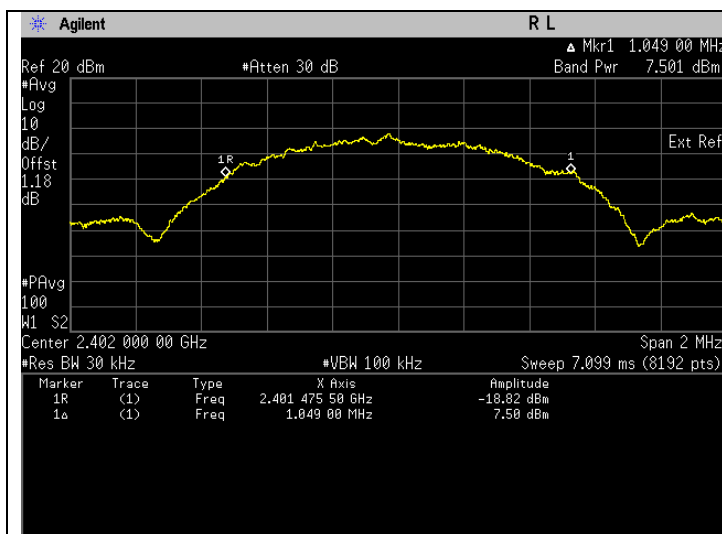

Frequency 2402 MHz

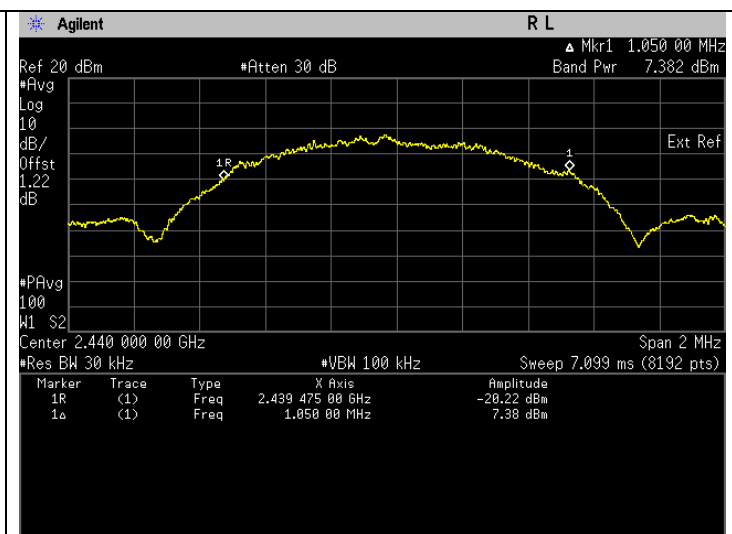

Frequency 2440 MHz

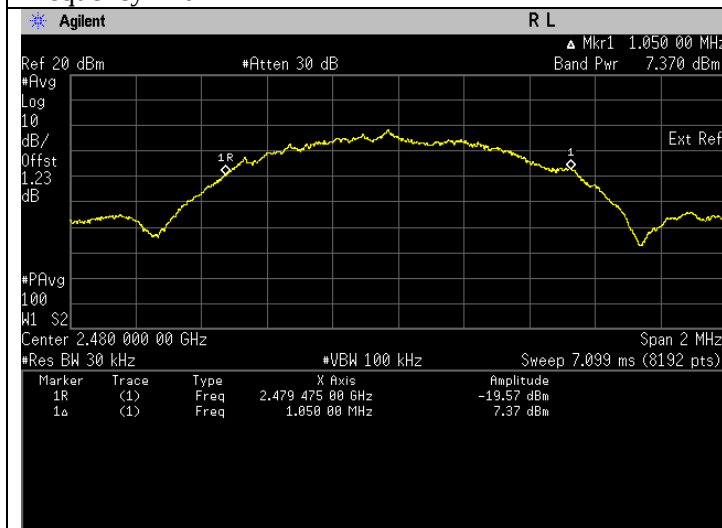


Frequency 2480 MHz


BTLE 2M

Output power = Band Power + Duty Cycle factor
=Band Power + 4.732dBm


Test Conditions			Test Frequency	Results
Standard	Modulation Type	Tx (MHz)	Output Power (dBm)	Status
Bluetooth L.E	GFSK	2402	9.466	Pass
Bluetooth L.E	GFSK	2440	9.393	Pass
Bluetooth L.E	GFSK	2480	9.324	Pass

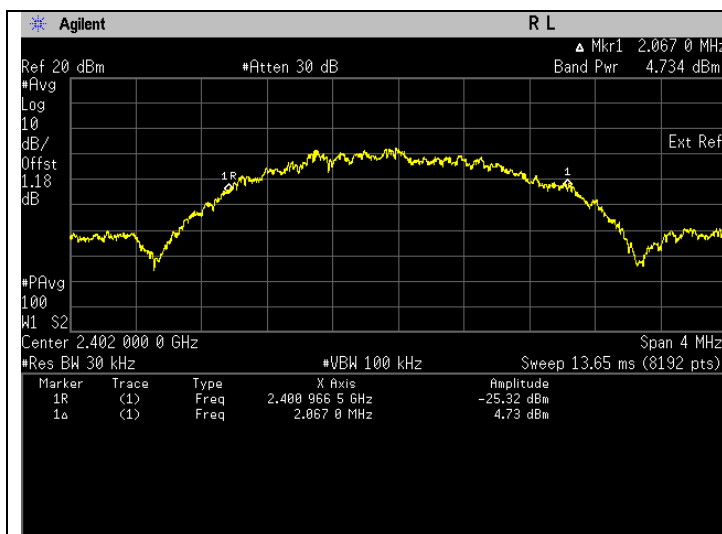

Frequency 2402 MHz

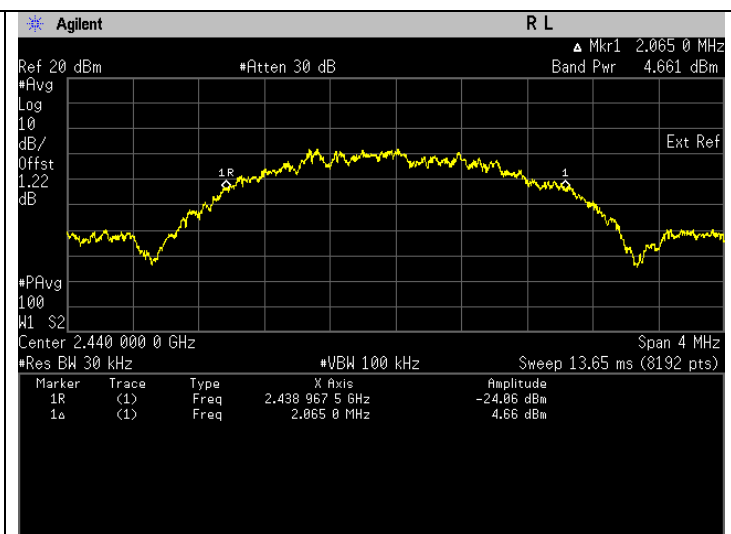


Frequency 2440 MHz

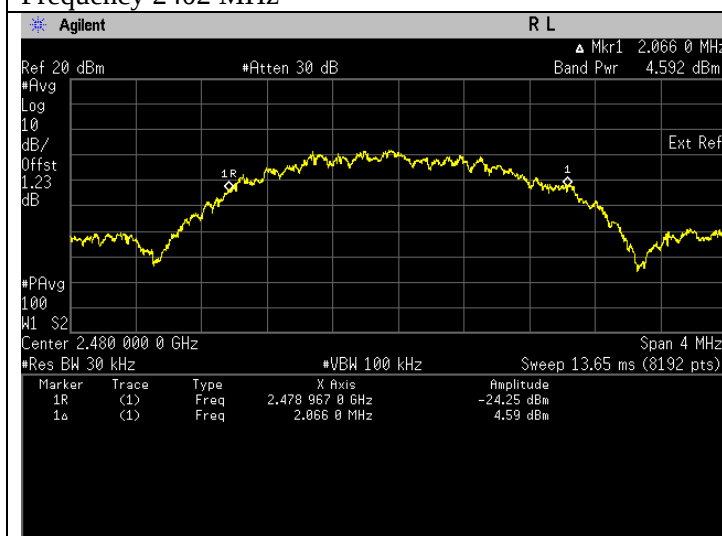

Frequency 2480 MHz

6.3 Maximum Peak Power Spectral Density

6.3.1 Test Setup



Maximum Peak

- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. Set analyzer center frequency to DTS channel center frequency.
 - b. Set the span to 1.5 times the DTS bandwidth.
 - c. Set the RBW to 3 kHz.
 - d. Set the VBW $\geq [3 \times \text{RBW}]$.
 - e. Detector = peak.
 - f. Sweep time = auto couple.
 - g. Trace mode = max hold.
 - h. Allow trace to fully stabilize.
 - i. Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


6.3.2 Test Limits:

Normal Condition (25 ° C)
$\leq 8 \text{ dBm/3kHz}$


6.3.3 Test Result

BTLE 1M


Test Conditions		Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Power (dBm/3kHz)	Status
Bluetooth L.E.	GFSK	2402	-5.27	Pass
Bluetooth L.E.	GFSK	2440	-5.56	Pass
Bluetooth L.E.	GFSK	2480	-5.64	Pass

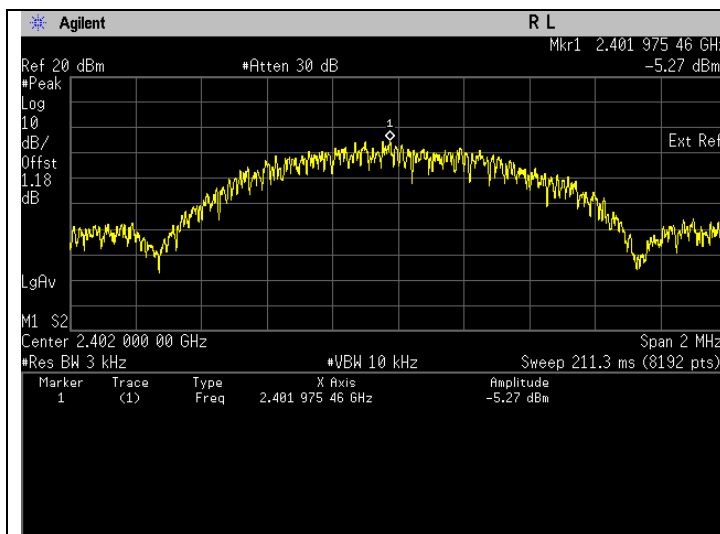

Maximum Power Spectral Density. Bluetooth LE
 Frequency 2402 MHz

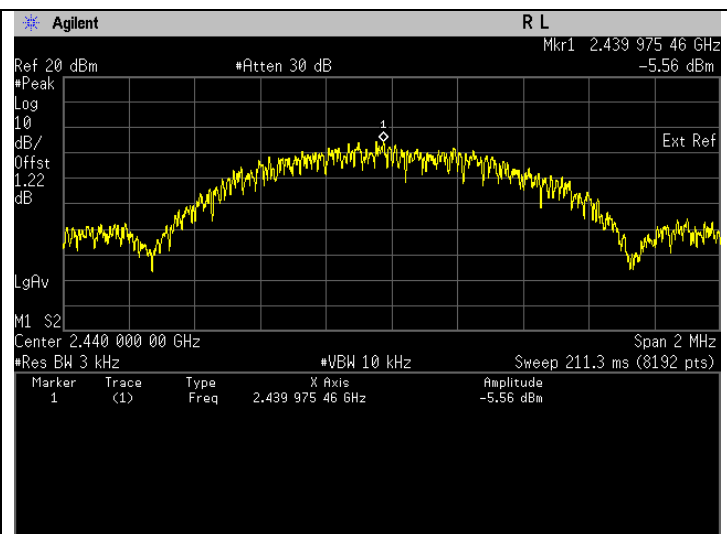


Maximum Power Spectral Density. Bluetooth LE
 Frequency 2440 MHz

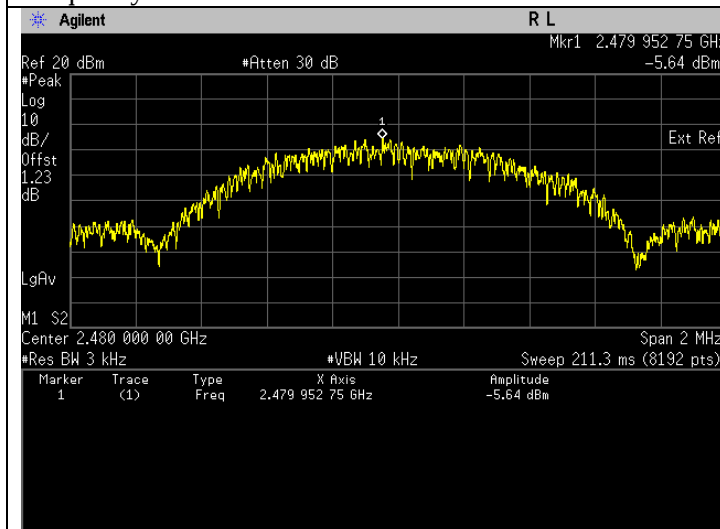


Maximum Power Spectral Density. Bluetooth LE
 Frequency 2480 MHz

BTLE 2M


Test Conditions		Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Power (dBm/3kHz)	Status
Bluetooth L.E.	GFSK	2402	-8.72	Pass
Bluetooth L.E.	GFSK	2440	-8.85	Pass
Bluetooth L.E.	GFSK	2480	-8.83	Pass

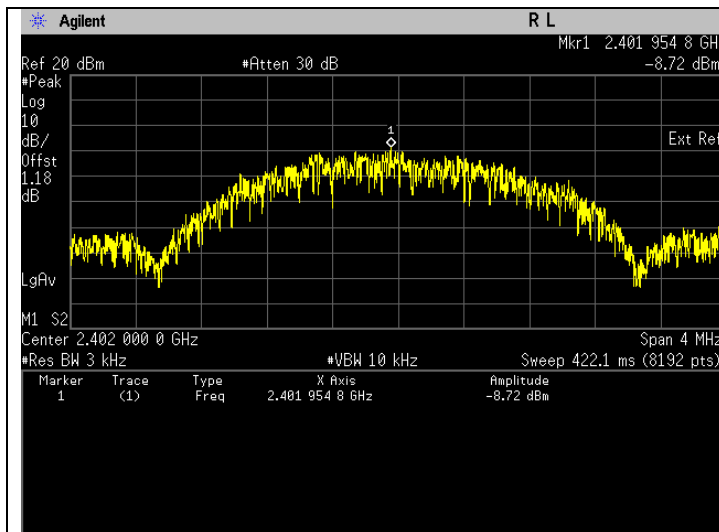

Maximum Power Spectral Density. Bluetooth LE
Frequency 2402 MHz

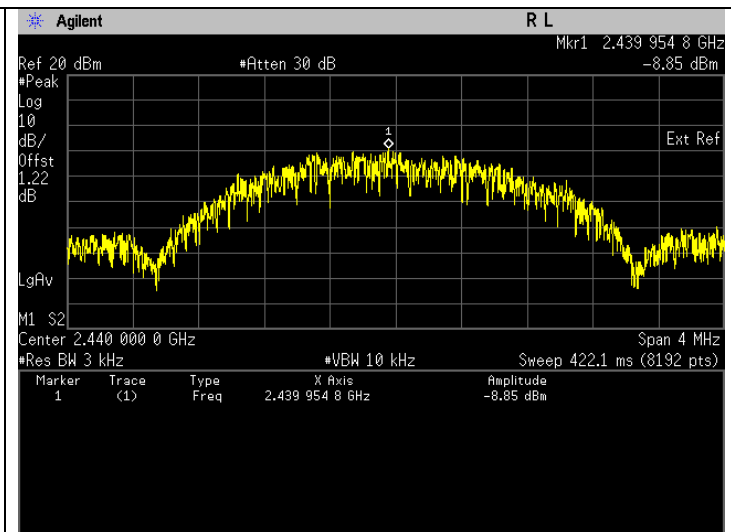


Maximum Power Spectral Density. Bluetooth LE
Frequency 2440 MHz

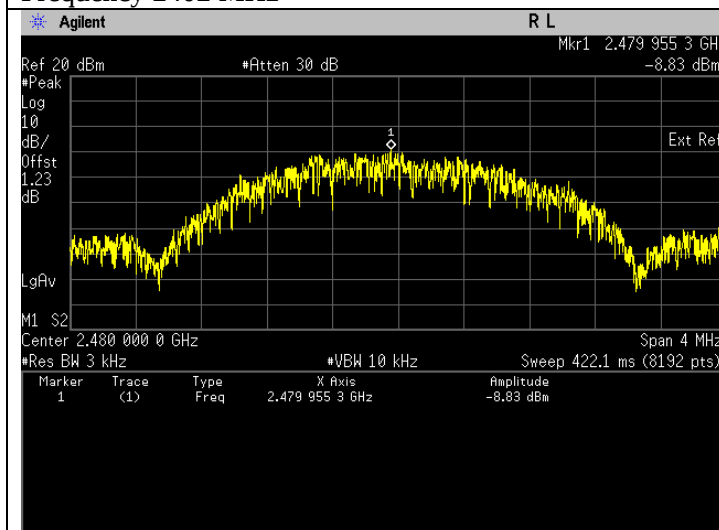

Maximum Power Spectral Density. Bluetooth LE
Frequency 2480 MHz

6.4 Conducted Spurious Emission

6.4.1 Test Setup



- 1) Check and ensure the spectrum analyzer well calibrate.
- 2) Turn on the DUT and set DUT to transmit maximum power.
- 3) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- 4) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- 5) Use the peak marker function to measure highest emission and scan up to 10th harmonic.


6.4.2 Test Limits:

Normal Condition (25 ° C)
Shall be at least 30 dB below peak (max) power.


6.4.3 Test Result

BTLE 1M


Test Conditions			Test Frequency	Results	
Standard	Modulation Type	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
Bluetooth L.E.	GFSK	2402	24883.00	-40.24	Pass
			24850.00	-40.71	Pass
			24950.00	-41.04	Pass
Bluetooth L.E.	GFSK	2440	24625.00	-40.55	Pass
			24867.00	-41.04	Pass
			24842.00	-41.31	Pass
Bluetooth L.E.	GFSK	2480	24733.00	-40.96	Pass
			23950.00	-41.29	Pass
			24817.00	-41.44	Pass

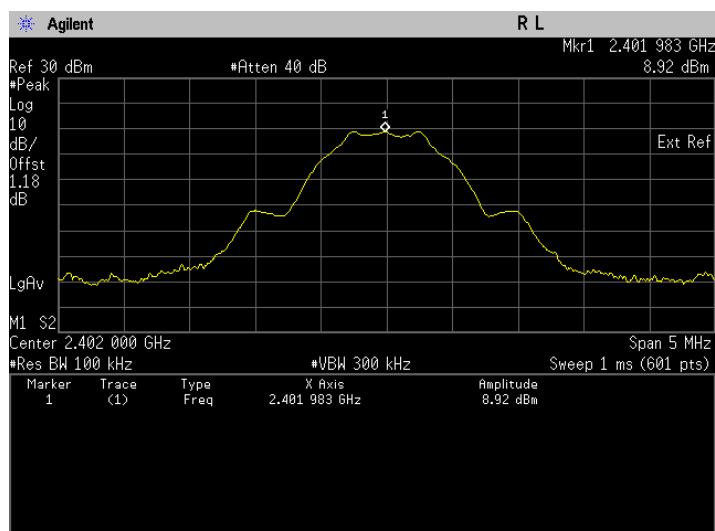


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Reference Level

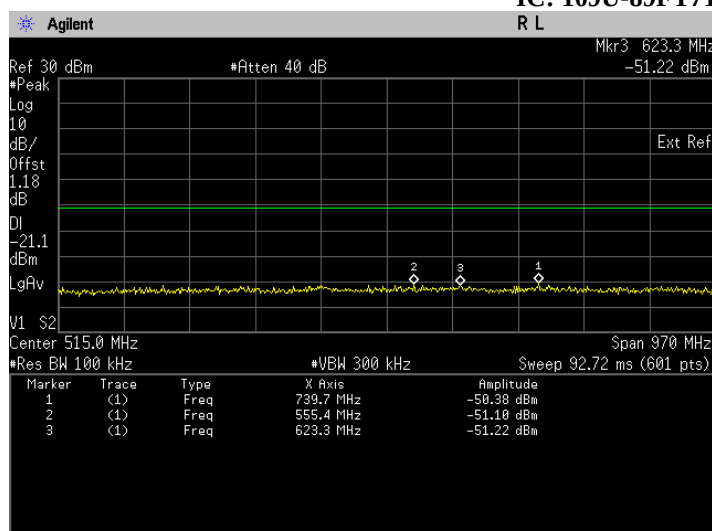


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 30 MHz -> 1 GHz

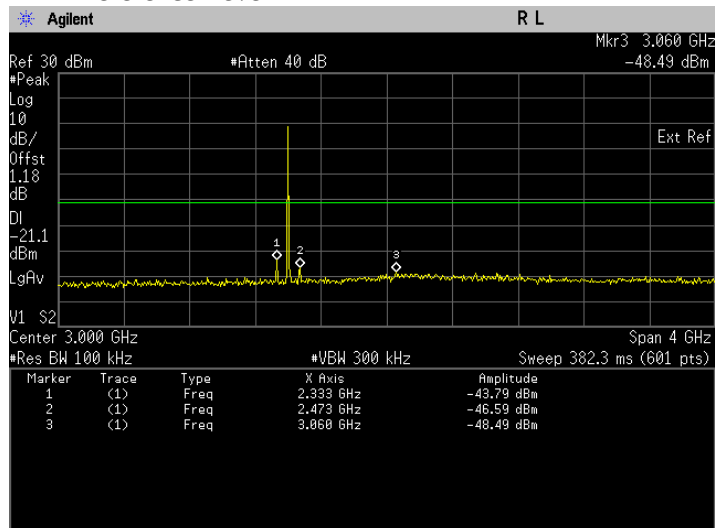


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 1 GHz -> 5 GHz

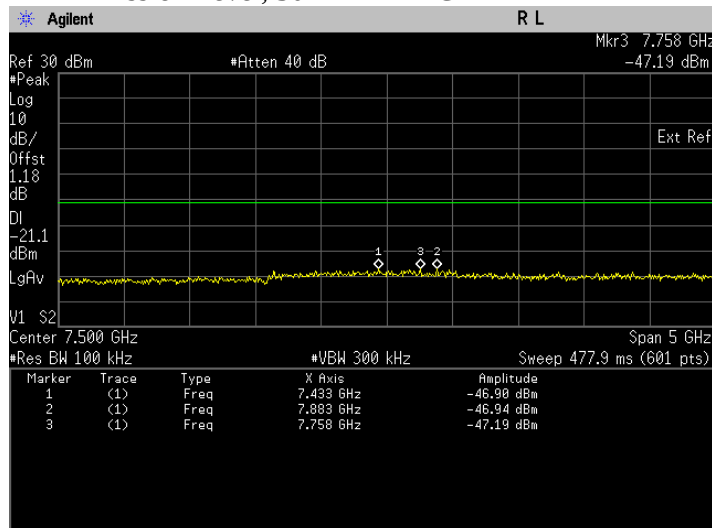


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 5 GHz -> 10 GHz

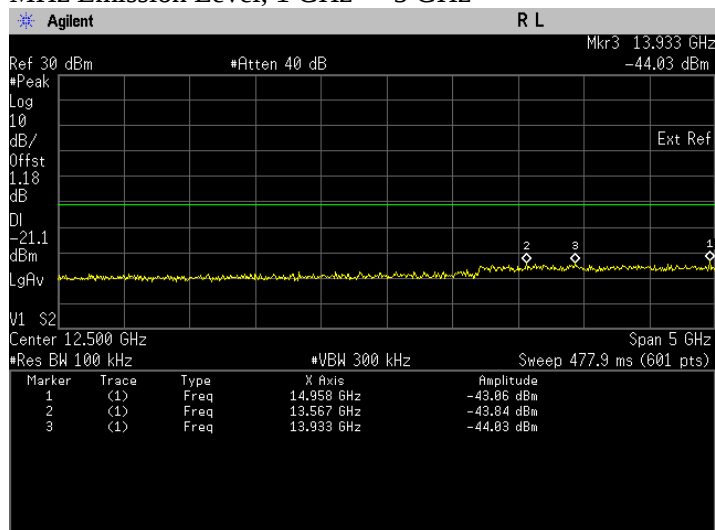


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 10 GHz -> 15 GHz

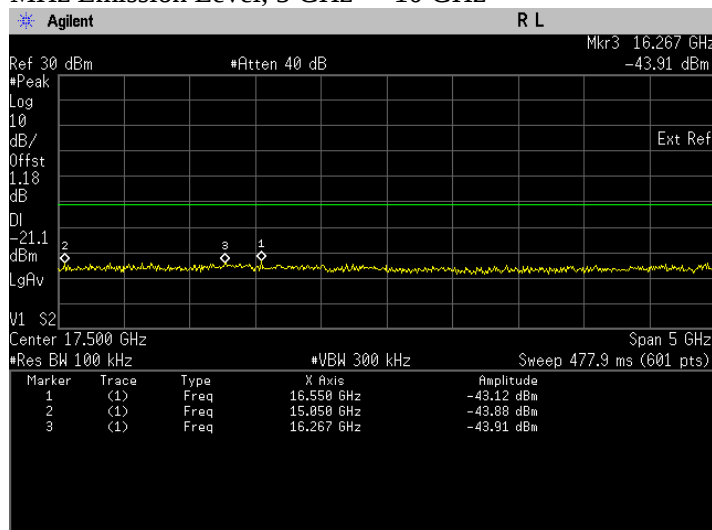


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 15 GHz -> 20 GHz

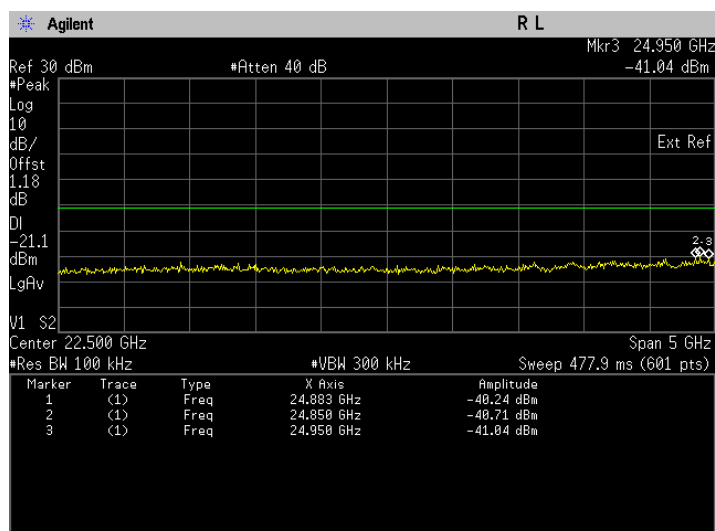


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 20 GHz -> 25 GHz

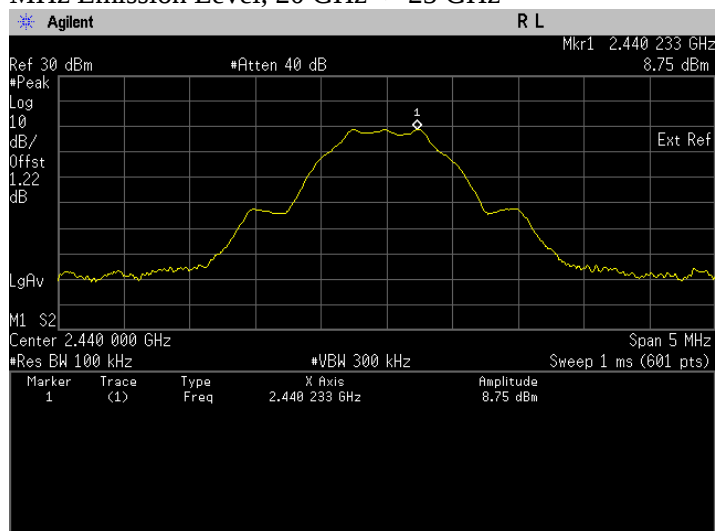


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Reference Level

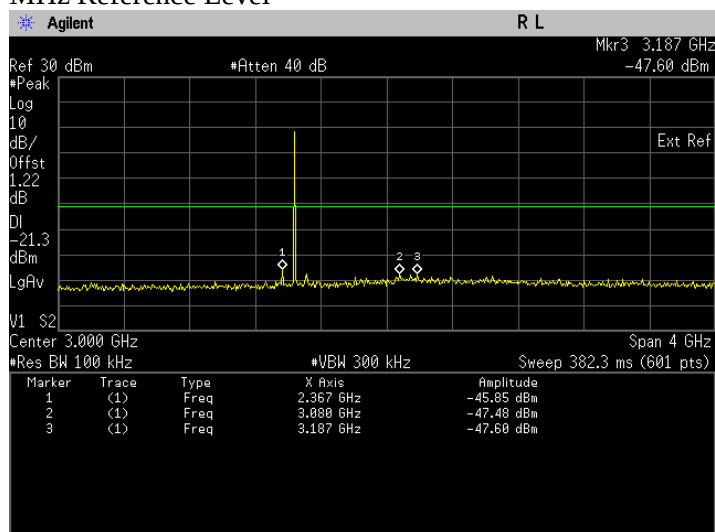


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 1 GHz -> 5 GHz

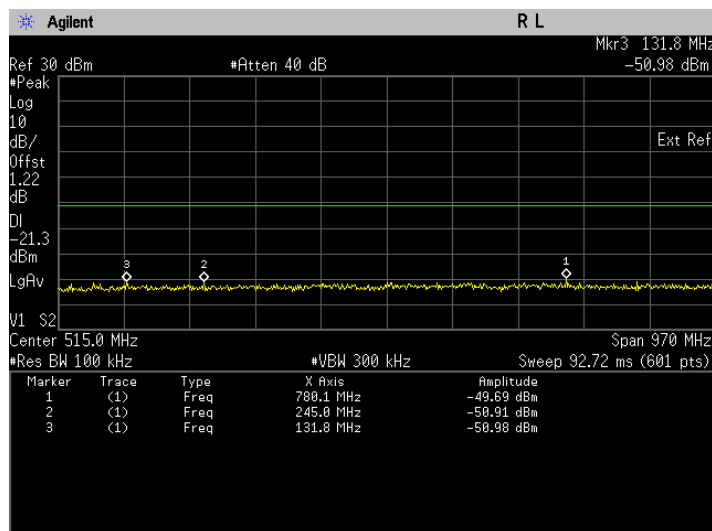


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 30 MHz -> 1 GHz

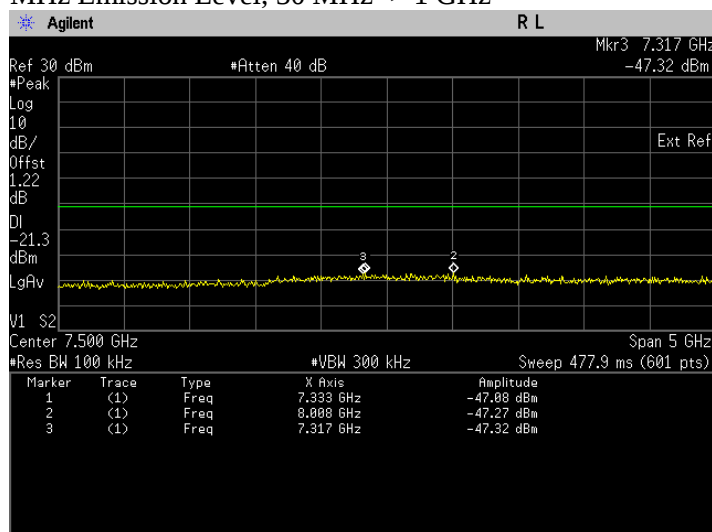


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 5 GHz -> 10 GHz

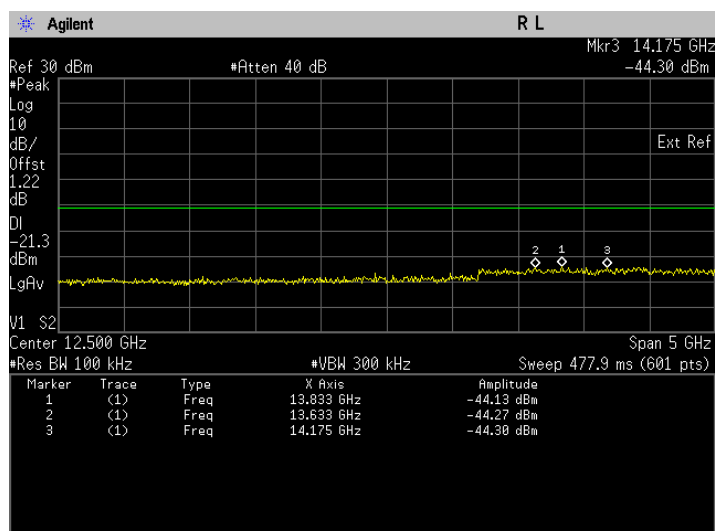


Conducted Emissions. Bluetooth LE, Frequency 2440
Emission Level, 10 GHz -> 15 GHz

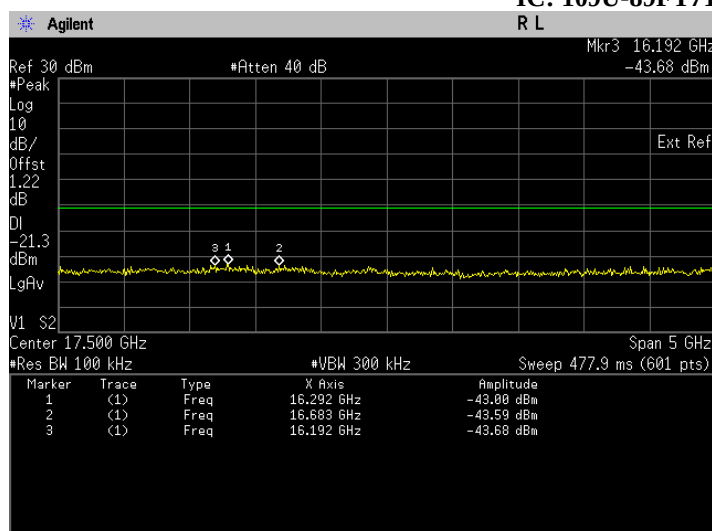


Conducted Emissions. Bluetooth LE, Frequency 2440
MHz Emission Level, 15 GHz -> 20 GHz

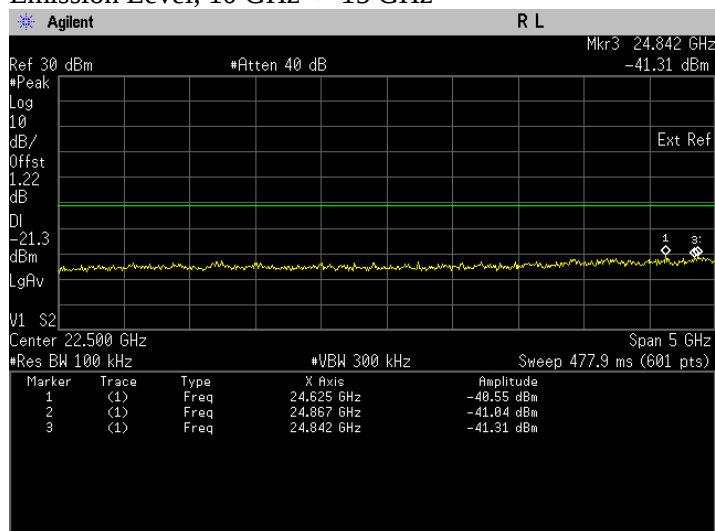


Conducted Emissions. Bluetooth LE, Frequency 2440
MHz Emission Level, 20 GHz -> 25 GHz

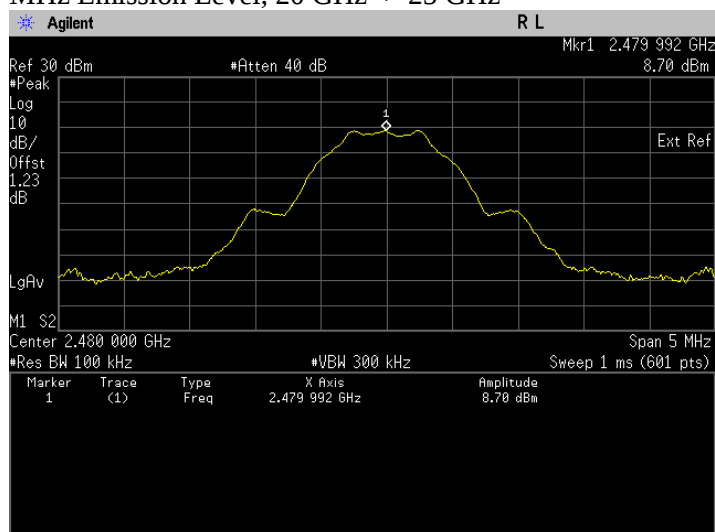


Conducted Emissions. Bluetooth LE, Frequency 2480
MHz Reference Level

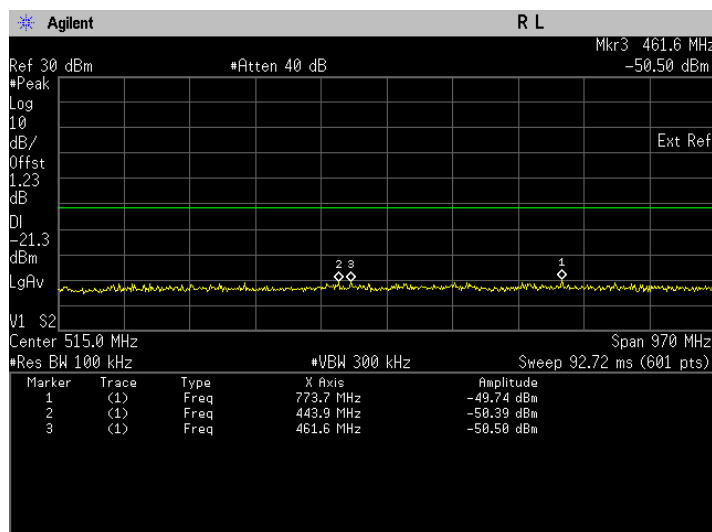


Conducted Emissions. Bluetooth LE, Frequency 2480
MHz Emission Level, 30 MHz -> 1 GHz

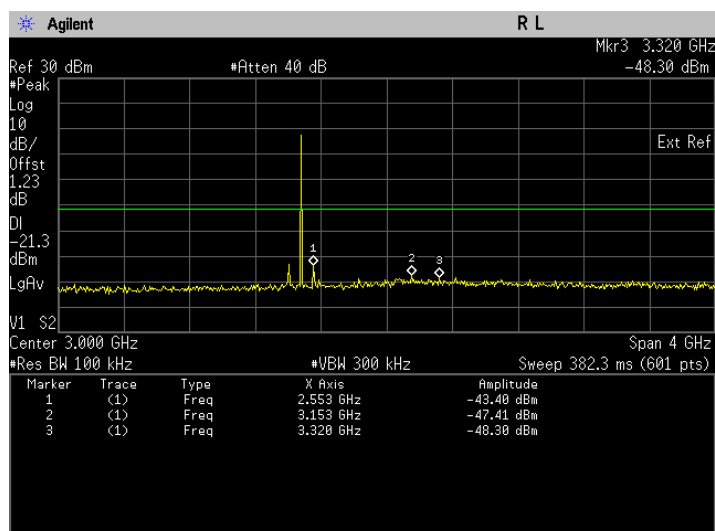


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 1 GHz -> 5 GHz

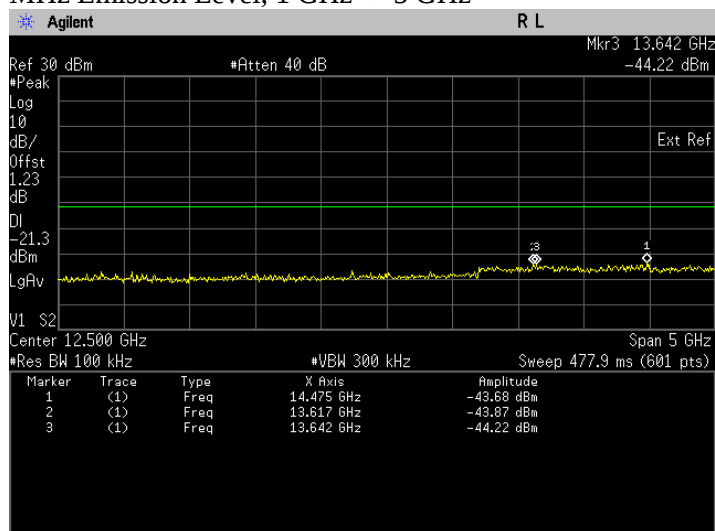


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 10 GHz -> 15 GHz

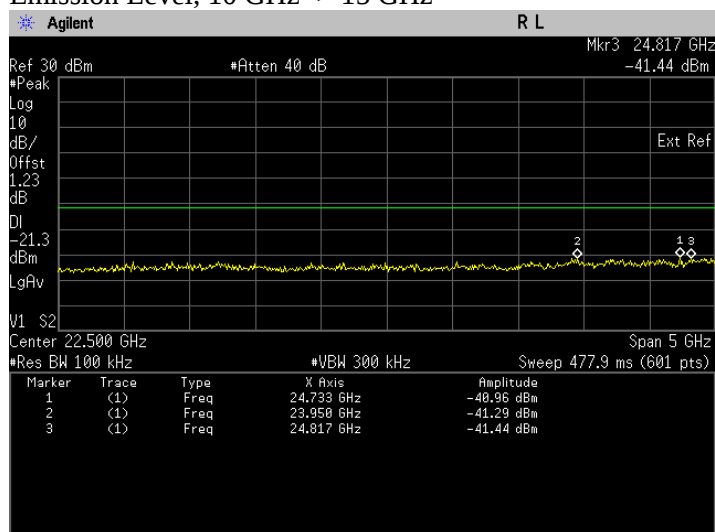

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 20 GHz -> 25 GHz

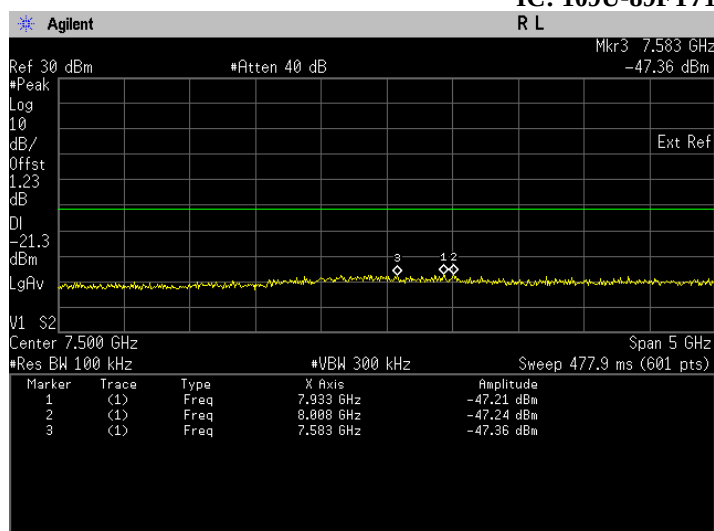


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 5 GHz -> 10 GHz

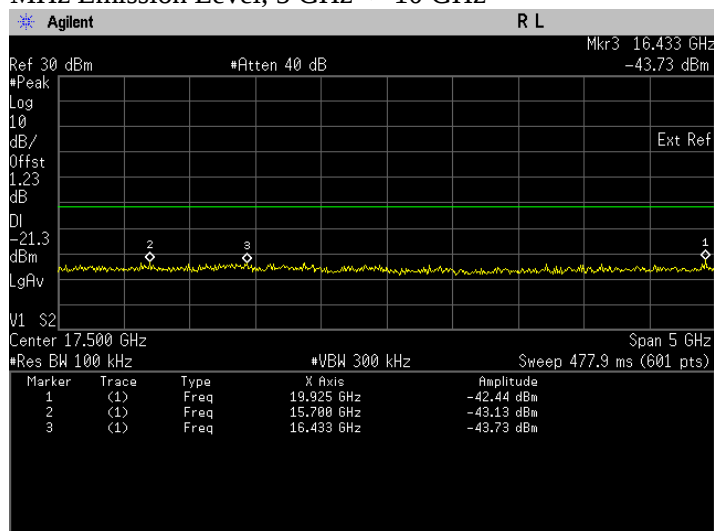


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 15 GHz -> 20 GHz

BTLE 2M


Test Conditions		Test Frequency	Results		
Standard	Data Rate	Tx (MHz)	Spurs (MHz)	Level (dBm)	Status
Bluetooth LE	GFSK	2402	24942.00	-40.98	Pass
			24875.00	-41.45	Pass
			24825.00	-41.77	Pass
Bluetooth LE	GFSK	2440	24875.00	-40.43	Pass
			24900.00	-40.99	Pass
			24933.00	-41.17	Pass
Bluetooth LE	GFSK	2480	24875.00	-40.05	Pass
			2513.00	-40.39	Pass
			24225.00	-40.83	Pass

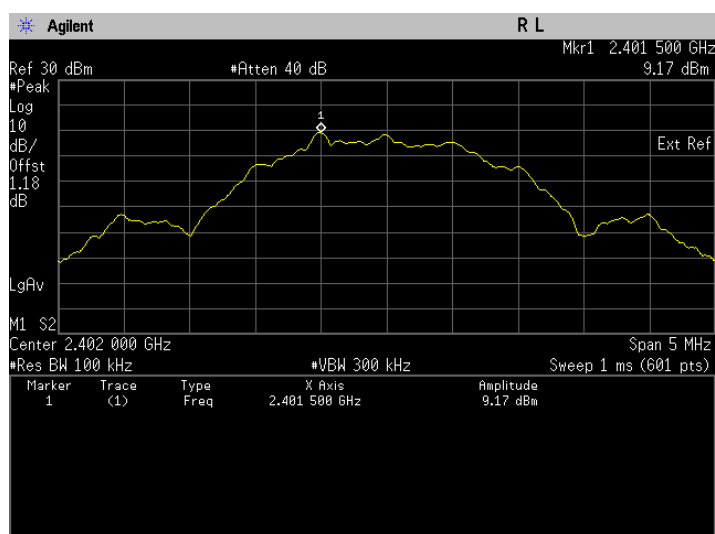


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Reference Level

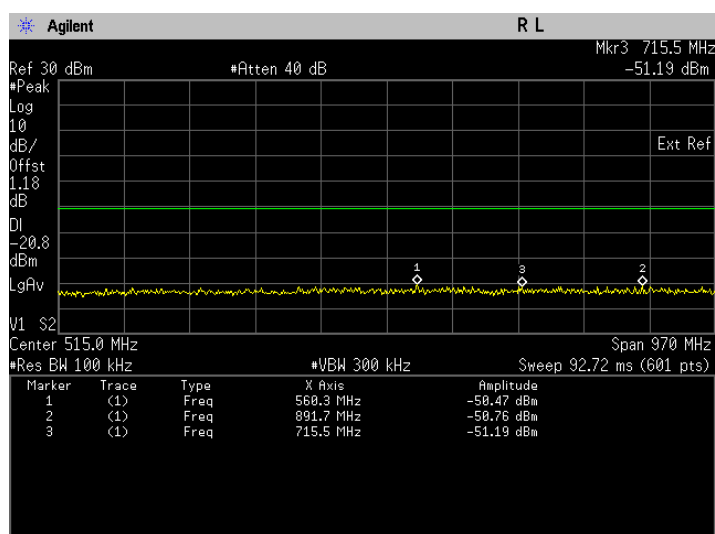


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 30 MHz -> 1 GHz

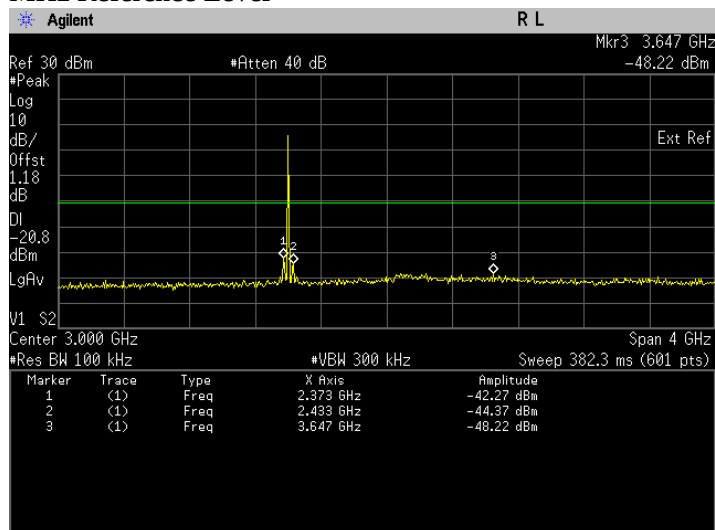


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 1 GHz -> 5 GHz

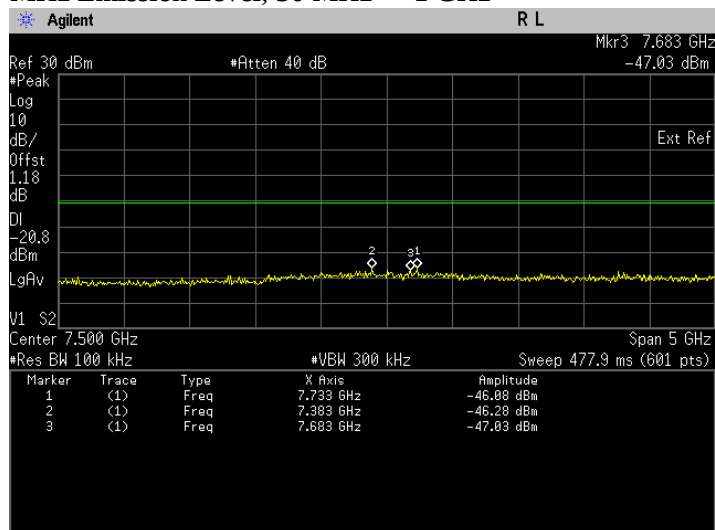


Conducted Emissions. Bluetooth LE, Frequency 2402 MHz Emission Level, 5 GHz -> 10 GHz

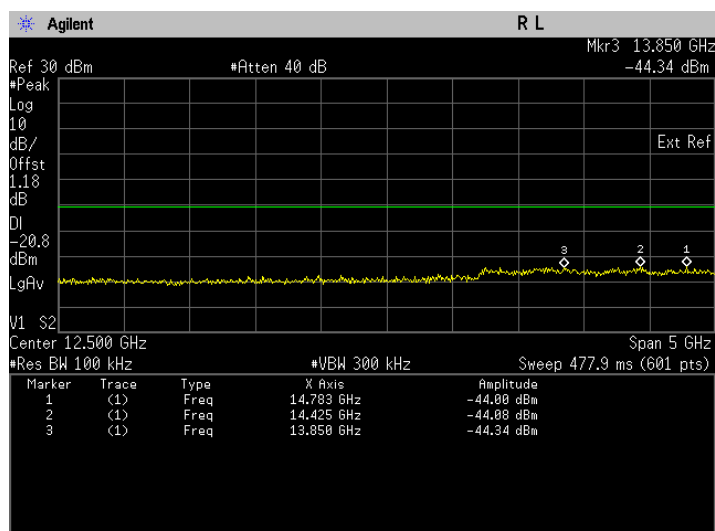


Conducted Emissions. Bluetooth LE, Frequency 2402
Emission Level, 10 GHz -> 15 GHz

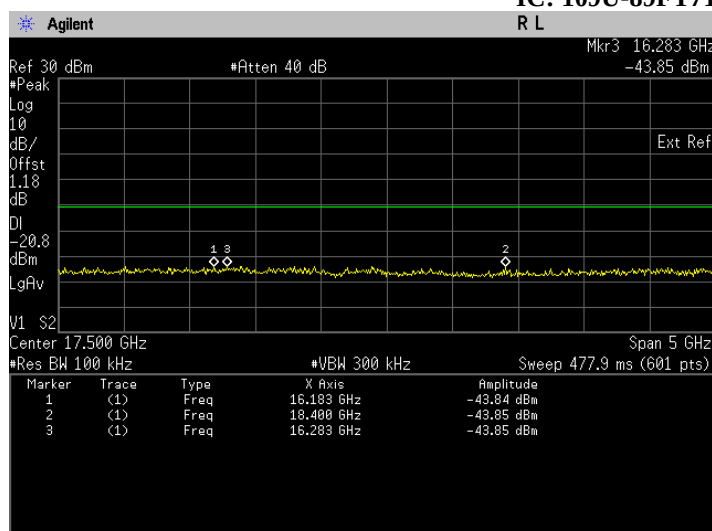


Conducted Emissions. Bluetooth LE, Frequency 2402
MHz Emission Level, 15 GHz -> 20 GHz

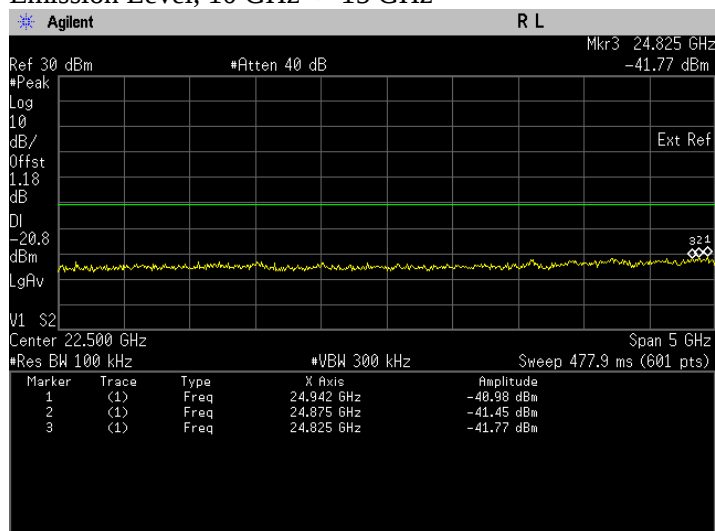


Conducted Emissions. Bluetooth LE, Frequency 2402
MHz Emission Level, 20 GHz -> 25 GHz

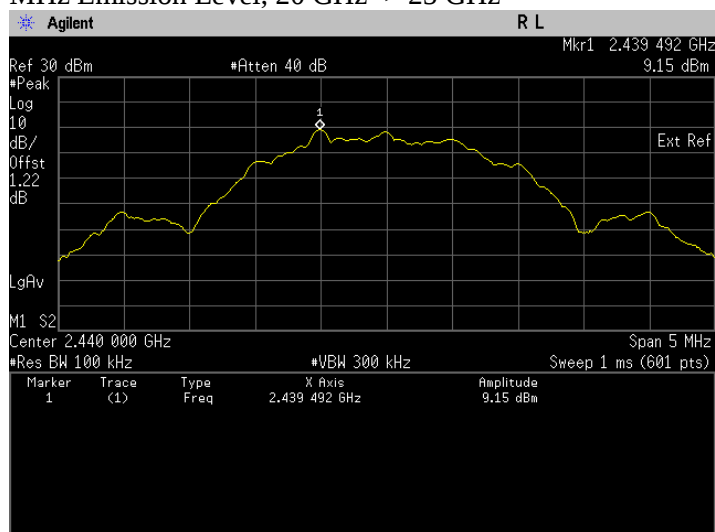


Conducted Emissions. Bluetooth LE, Frequency 2440
MHz Reference Level

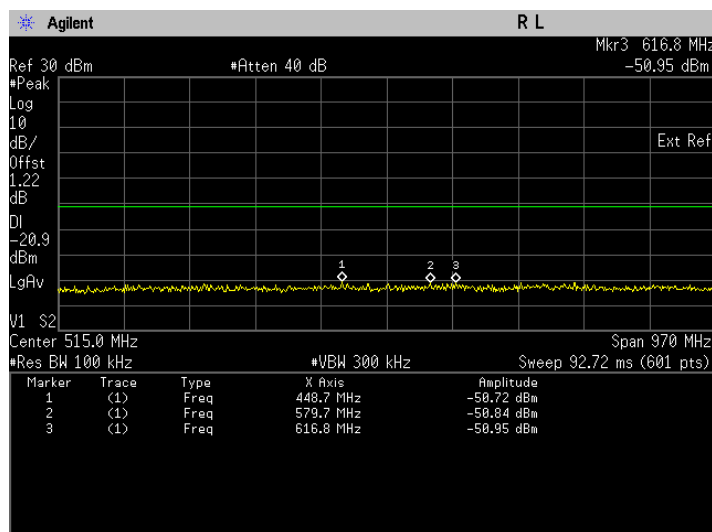


Conducted Emissions. Bluetooth LE, Frequency 2440
MHz Emission Level, 30 MHz -> 1 GHz

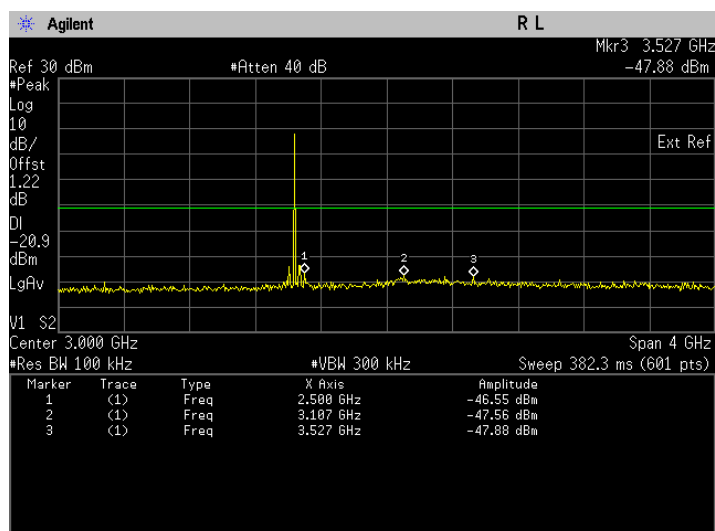


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 1 GHz -> 5 GHz

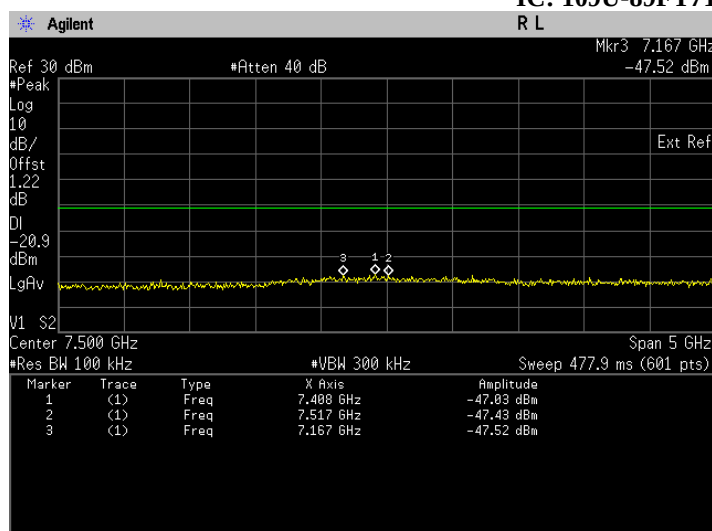


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 5 GHz -> 10 GHz

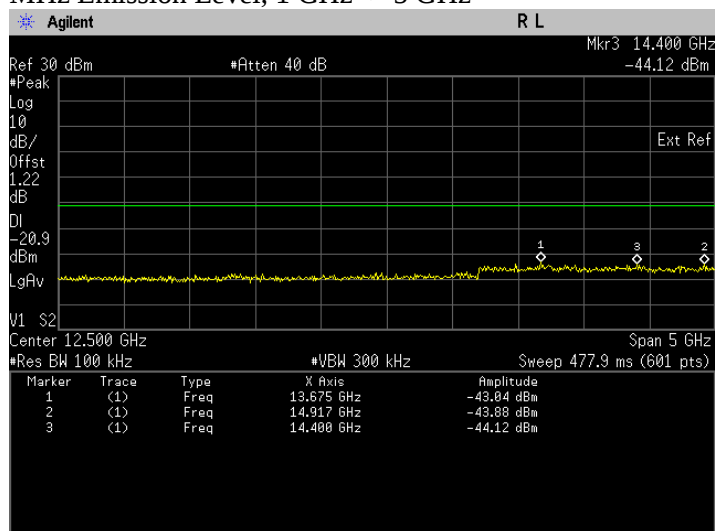


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 10 GHz -> 15 GHz

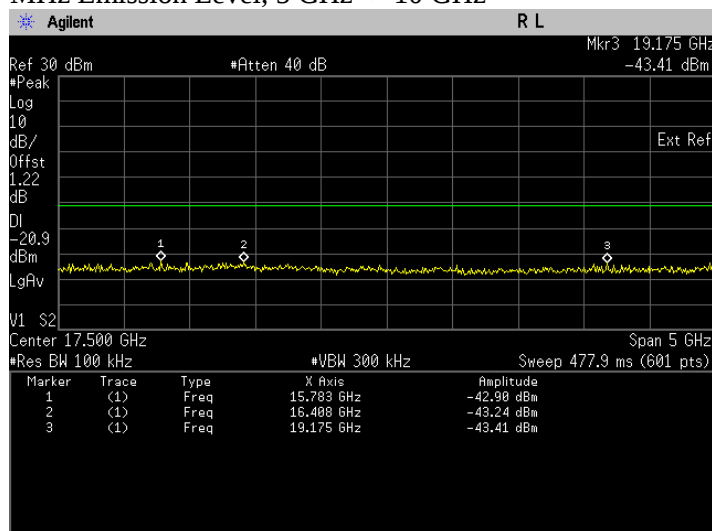


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 15 GHz -> 20 GHz

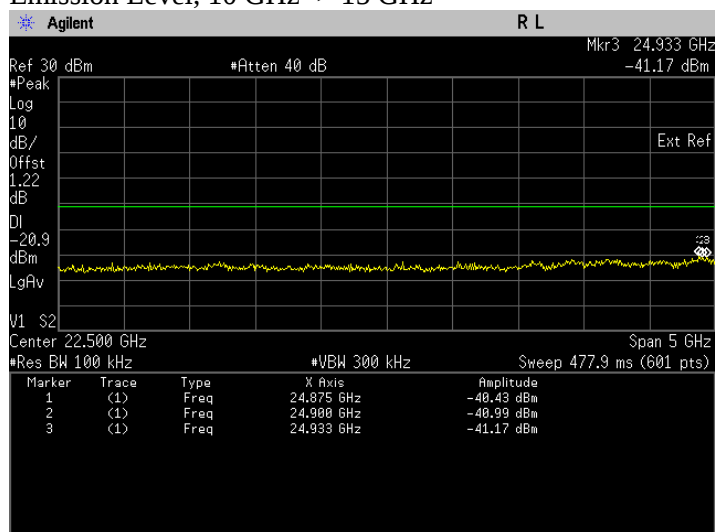


Conducted Emissions. Bluetooth LE, Frequency 2440 MHz Emission Level, 20 GHz -> 25 GHz

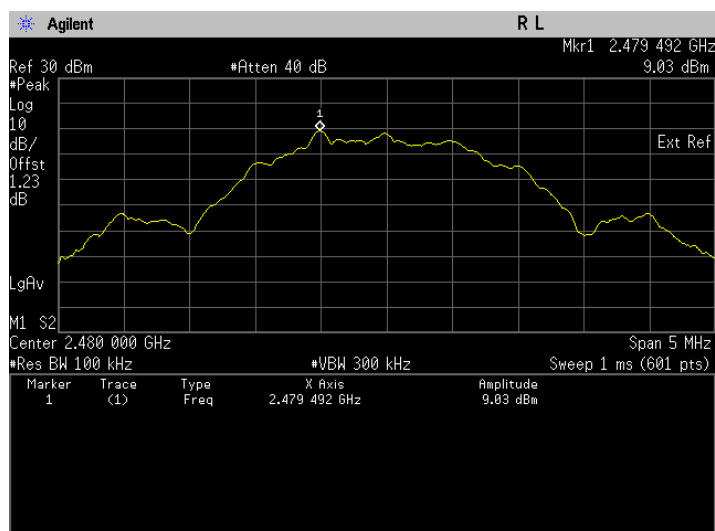


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Reference Level

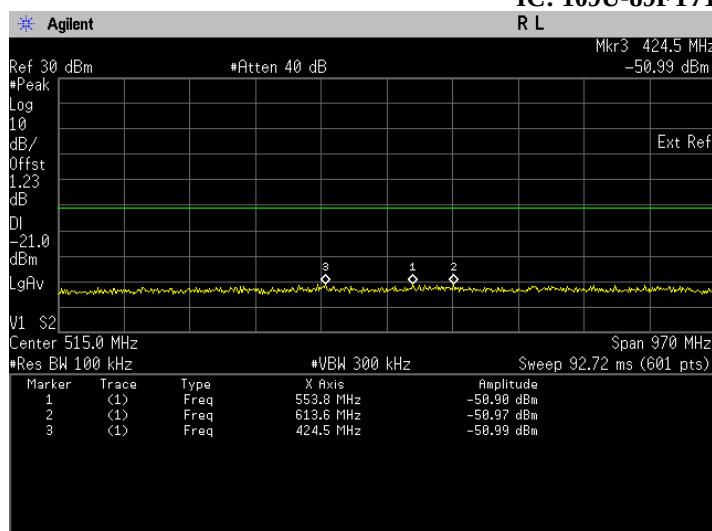


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 30 MHz -> 1 GHz

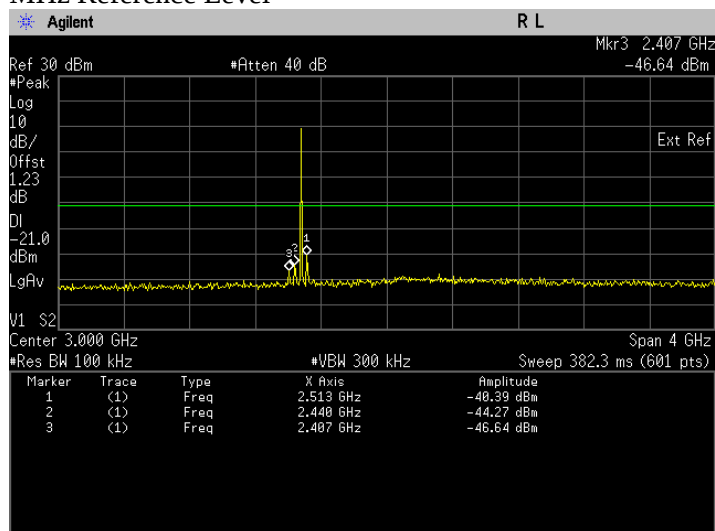


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 1 GHz -> 5 GHz

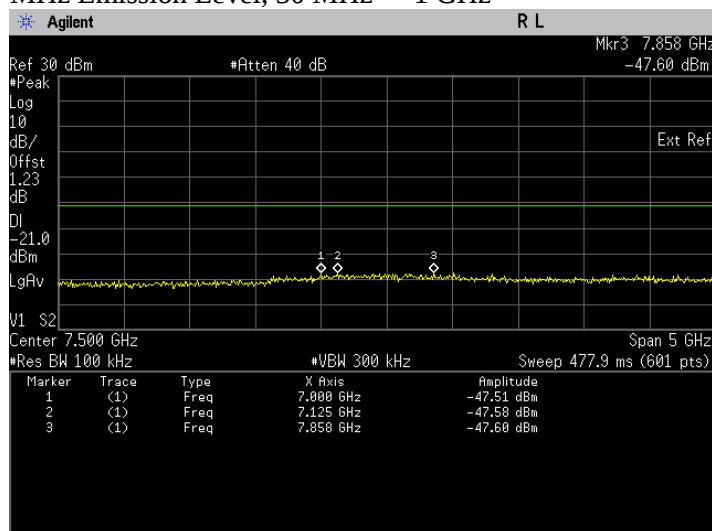


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 5 GHz -> 10 GHz

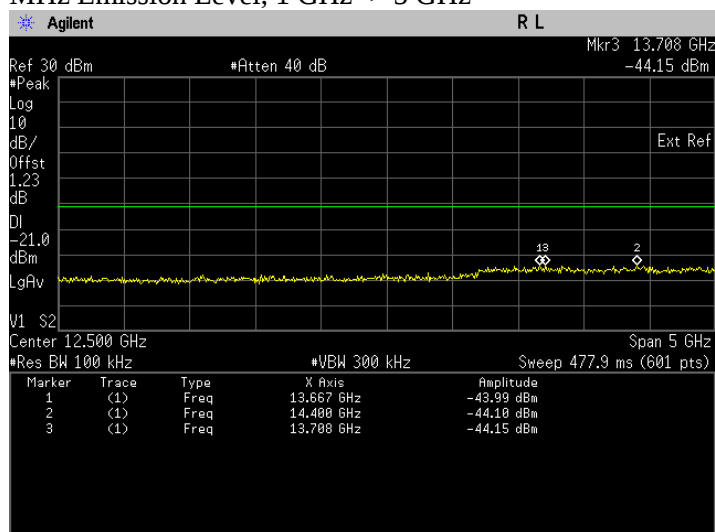

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 10 GHz -> 15 GHz

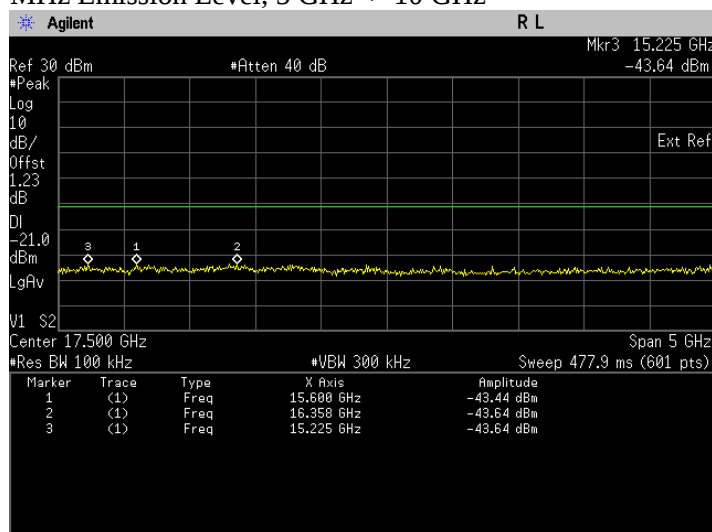


Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 15 GHz -> 20 GHz

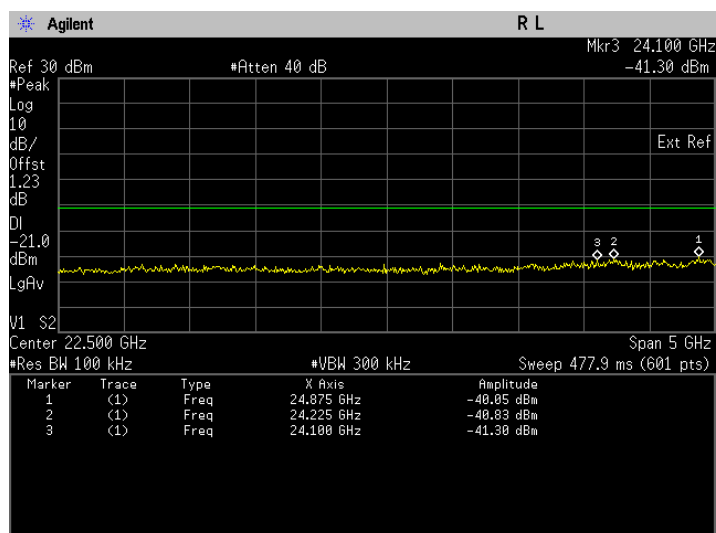

Conducted Emissions. Bluetooth LE, Frequency 2480 MHz Emission Level, 20 GHz -> 25 GHz

6.5 Band edge Conducted Spurious Emission

6.5.1 Test Setup



- a) Check and ensure the spectrum analyzer well calibrate.
- b) Turn on the DUT and set DUT to transmit maximum power.
- c) Connect DUT's antenna terminal to spectrum analyzer with a low loss cable.
- d) Setting of Spectrum analyzer :
 - a. RBW = 100 kHz
 - b. VBW = 300 kHz
 - c. Detector mode = Peak
 - d. Trace = Max Hold
 - e. Sweep = auto
- e) Use the peak marker function to measure highest emission.

6.5.2 Test Limits:


Normal Condition (25 ° C)

Shall be at least 30 dB below peak (max) power.


6.5.3 Test Result

BTLE 1M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
Bluetooth L.E	GFSK	2402	2399.91	-48.94	Pass
Bluetooth L.E	GFSK	2480	2483.60	-54.36	Pass

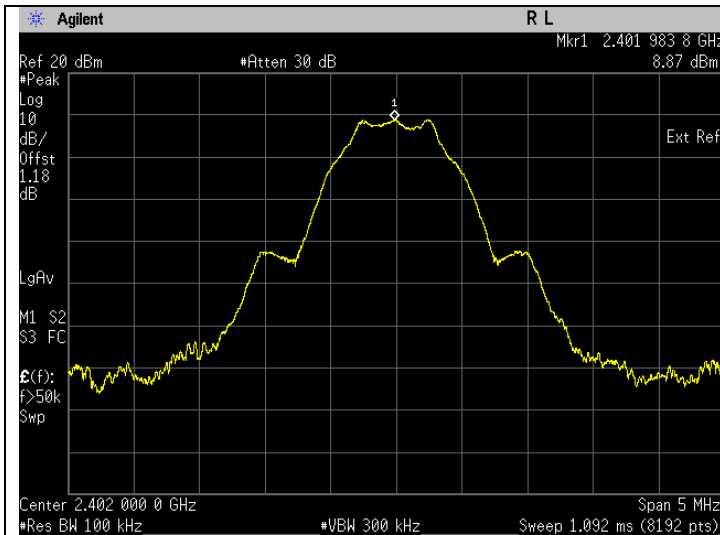


Band Edge. Bluetooth LE Frequency 2402 MHz Reference Level

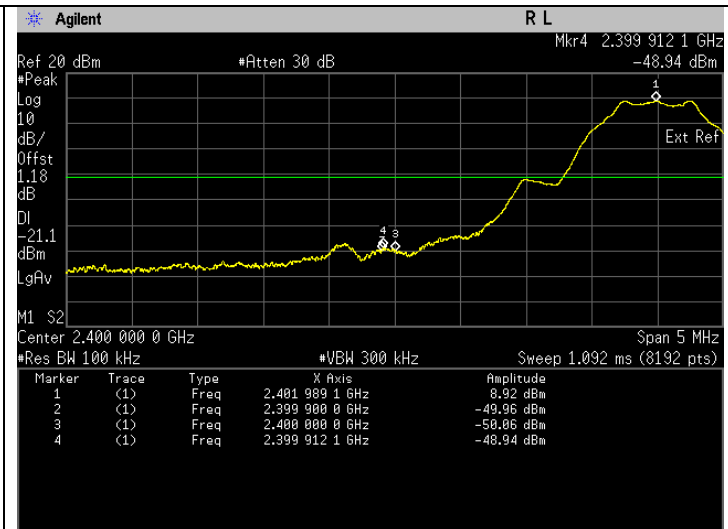

Band Edge. Bluetooth LE Frequency 2402 MHz Band Edge

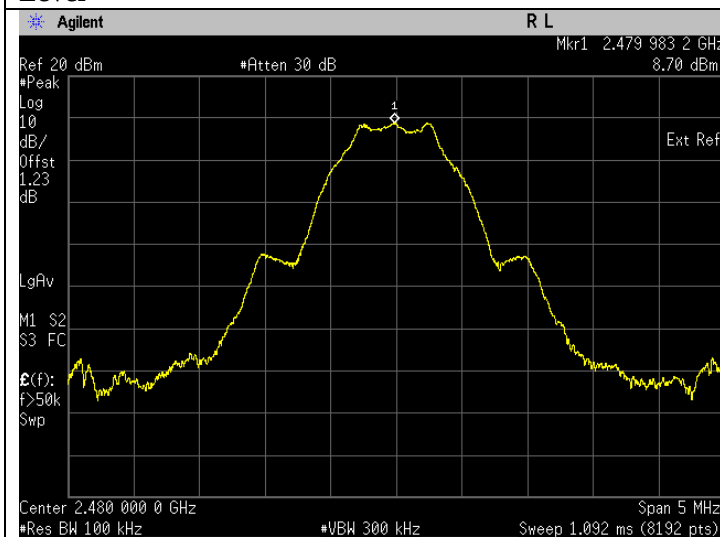


Band Edge. Bluetooth LE Frequency 2480 MHz Reference Level

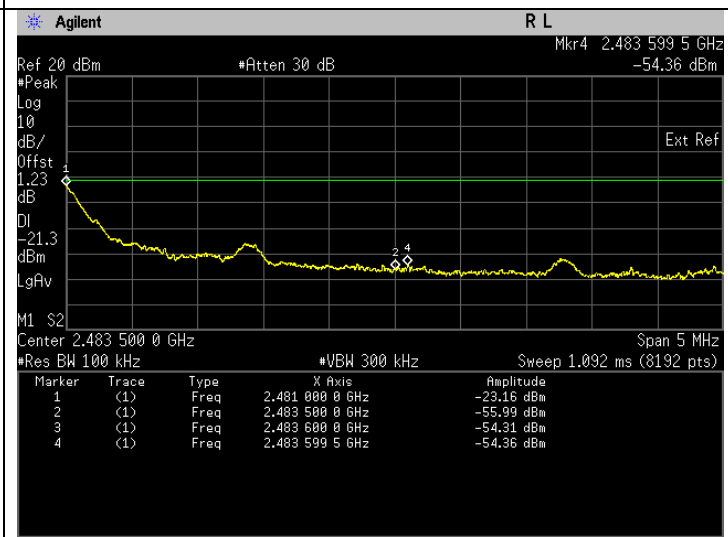


Band Edge. Bluetooth LE Frequency 2480 MHz Band Edge

BTLE 2M


Test Conditions		Test Frequency	Results		
Standard	Modulation Type	Tx (MHz)	Frequencies (MHz)	Power (dBm)	Status
Bluetooth L.E	GFSK	2402	2399.99	-22.94	Pass
Bluetooth L.E	GFSK	2480	2483.50	-52.22	Pass

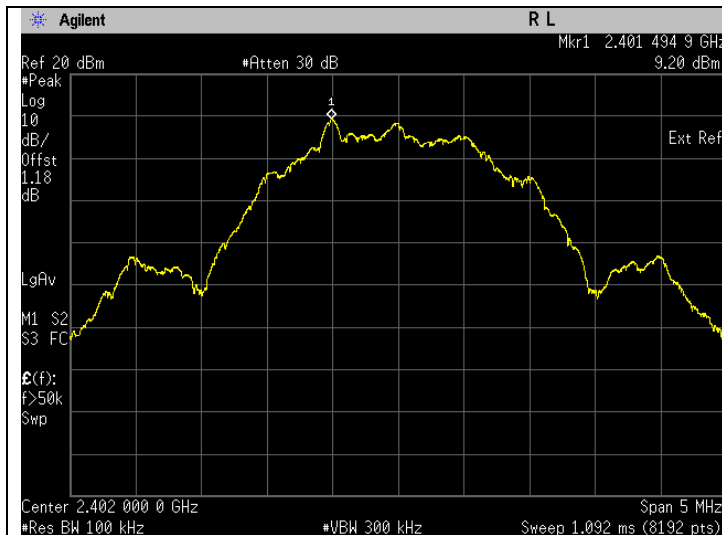


Band Edge. Bluetooth LE Frequency 2402 MHz Reference Level

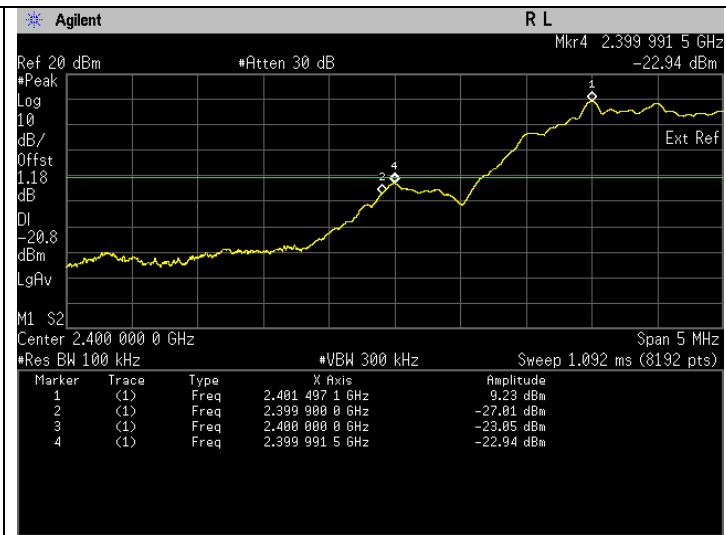

Band Edge. Bluetooth LE Frequency 2402 MHz Band Edge

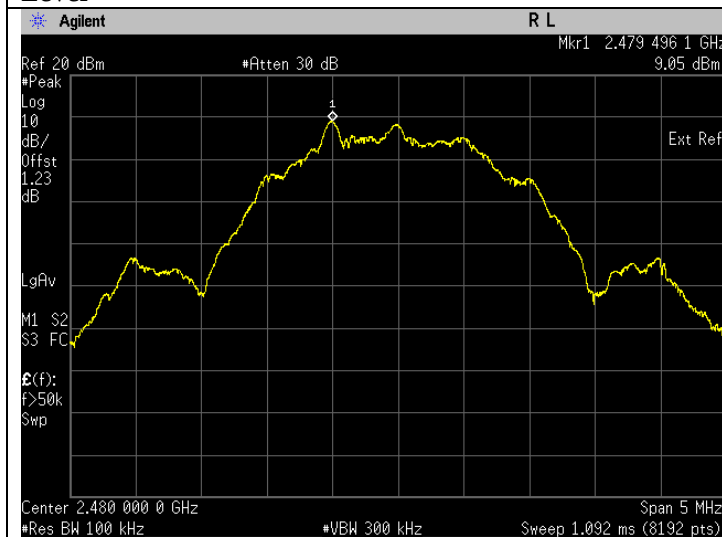


Band Edge. Bluetooth LE Frequency 2480 MHz Reference Level

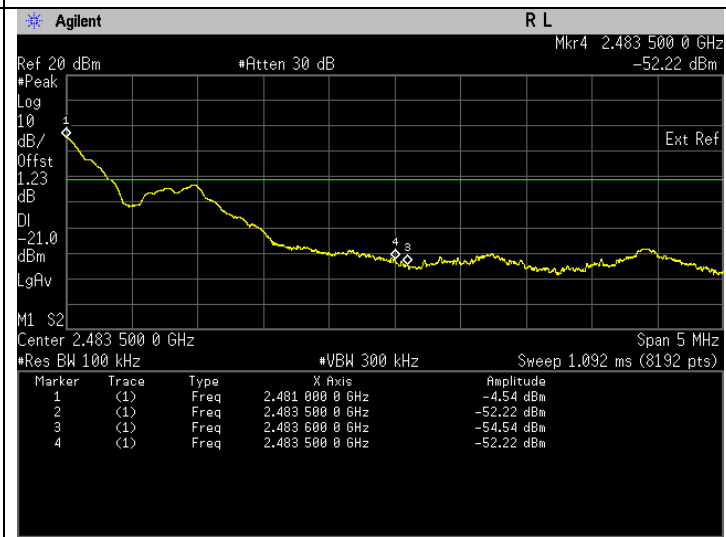

Band Edge. Bluetooth LE Frequency 2480 MHz Band Edge

6.6 Radiated Emission within Restricted Bands

6.6.1 Test Setup

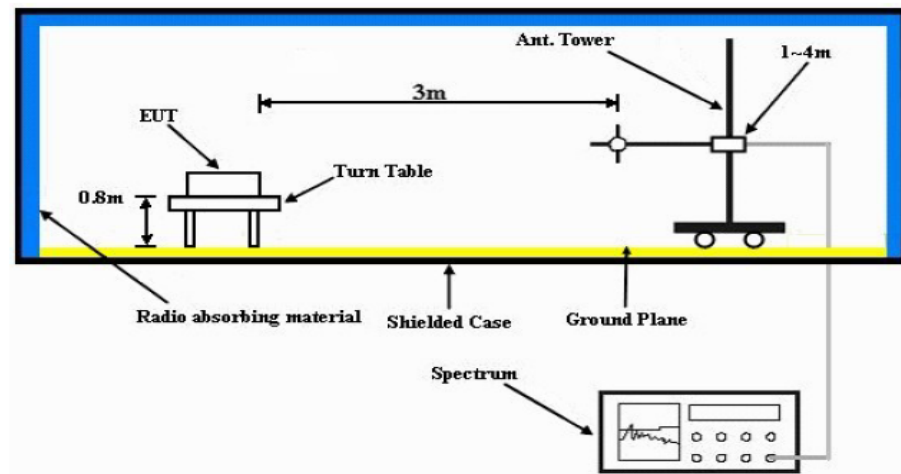

- The EUT is placed on the top of a rotating table 0.8m (<1GHz) or 1.5m (>1GHz) above the ground at a 3m semi-anechoic chamber. The table is rotated 360 degrees to determine the position of the highest radiation.
- The EUT is set 3m away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is Bilog/Horn antenna depend on which frequency range uses, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT is arranged to its worst case and then the antenna is tuned to heights from 1m to 4m and the rotatable table is turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system is set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode is fall within the range of 10dB from the limit specified, the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Otherwise, the testing could be stopped and the peak values of the EUT would be reported.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

6.6.2 Test Limits:


Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


NOTE:

- 1) The lower limit shall apply at the transition frequencies.
- 2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

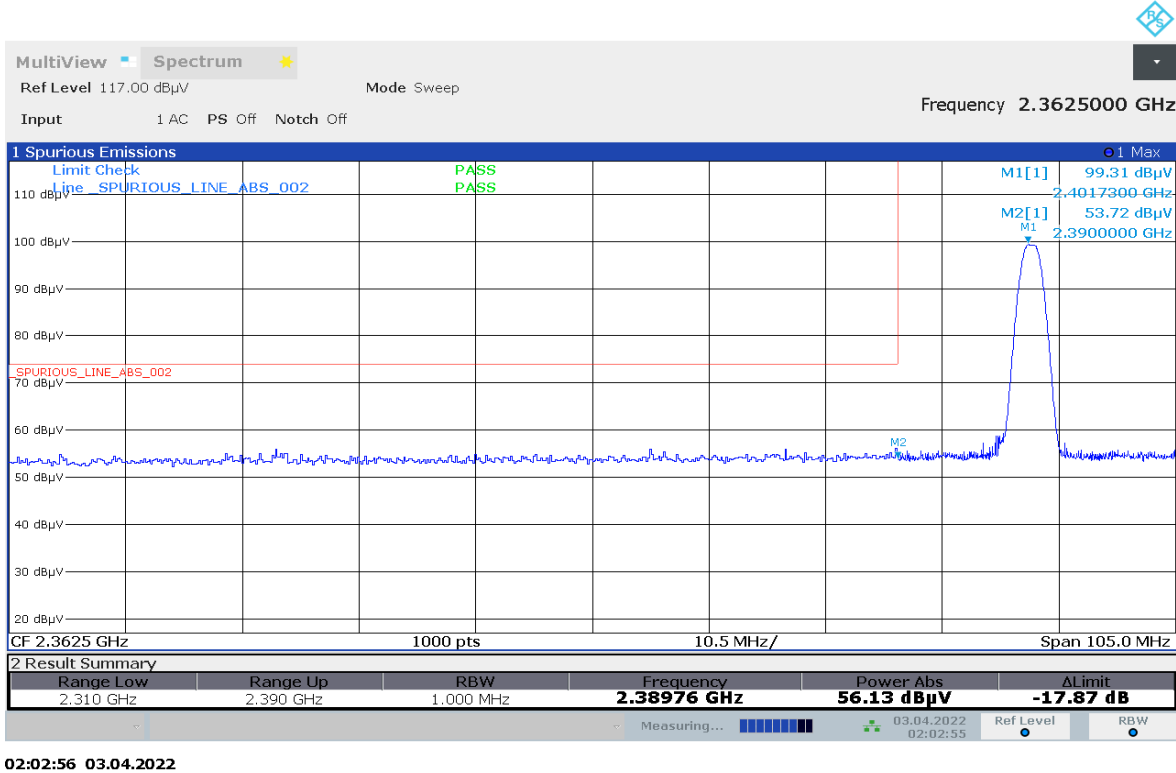


Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

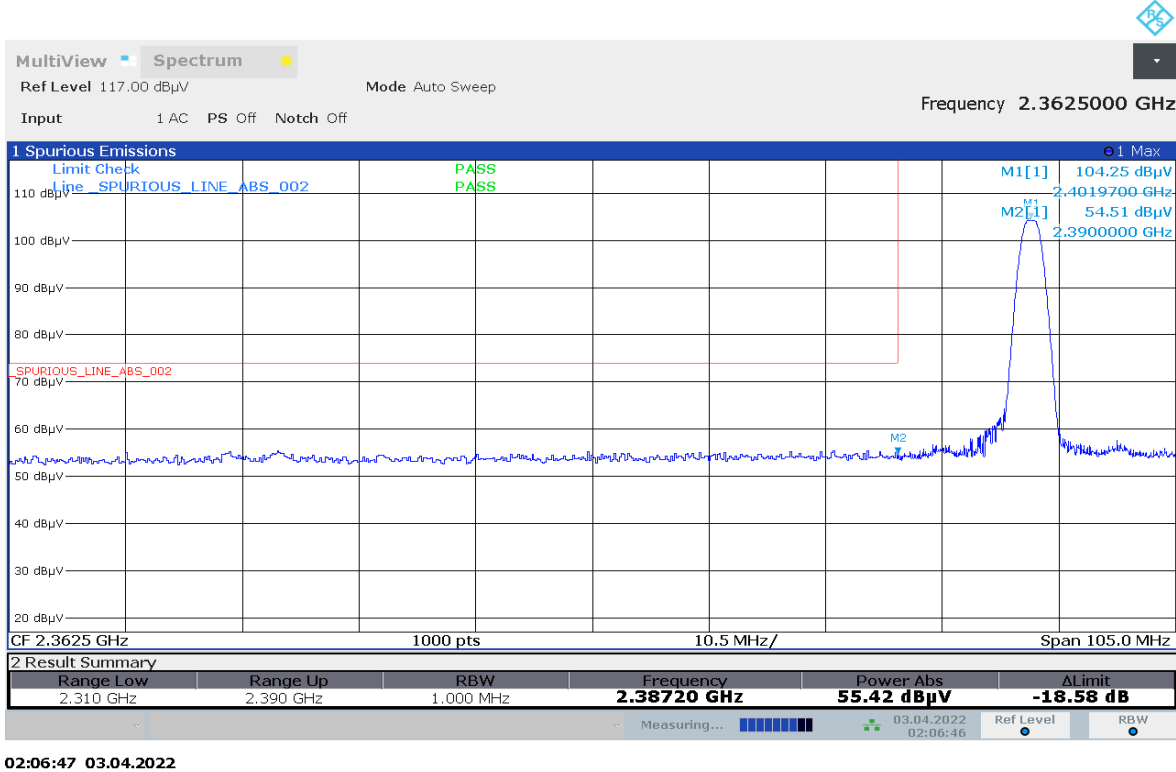

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot



Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot

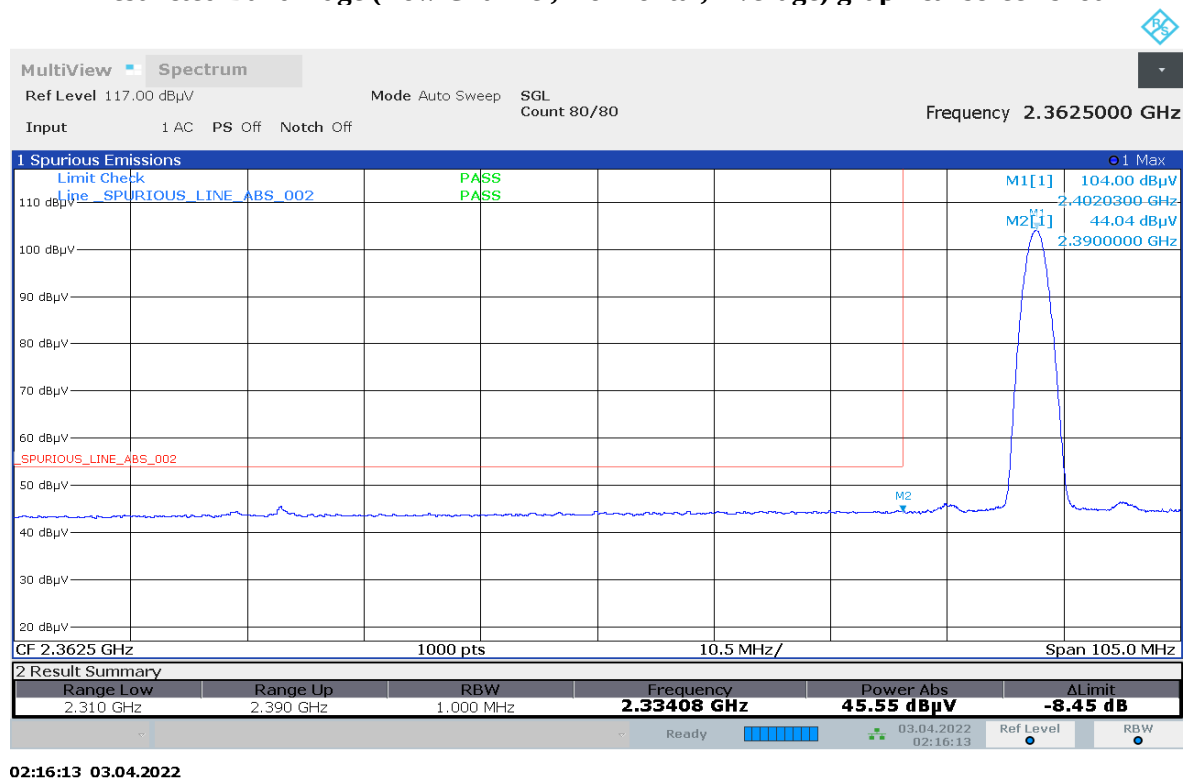


Restricted Band Edge (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 69.4
Test Date: Sun, 3 Apr, 2022


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

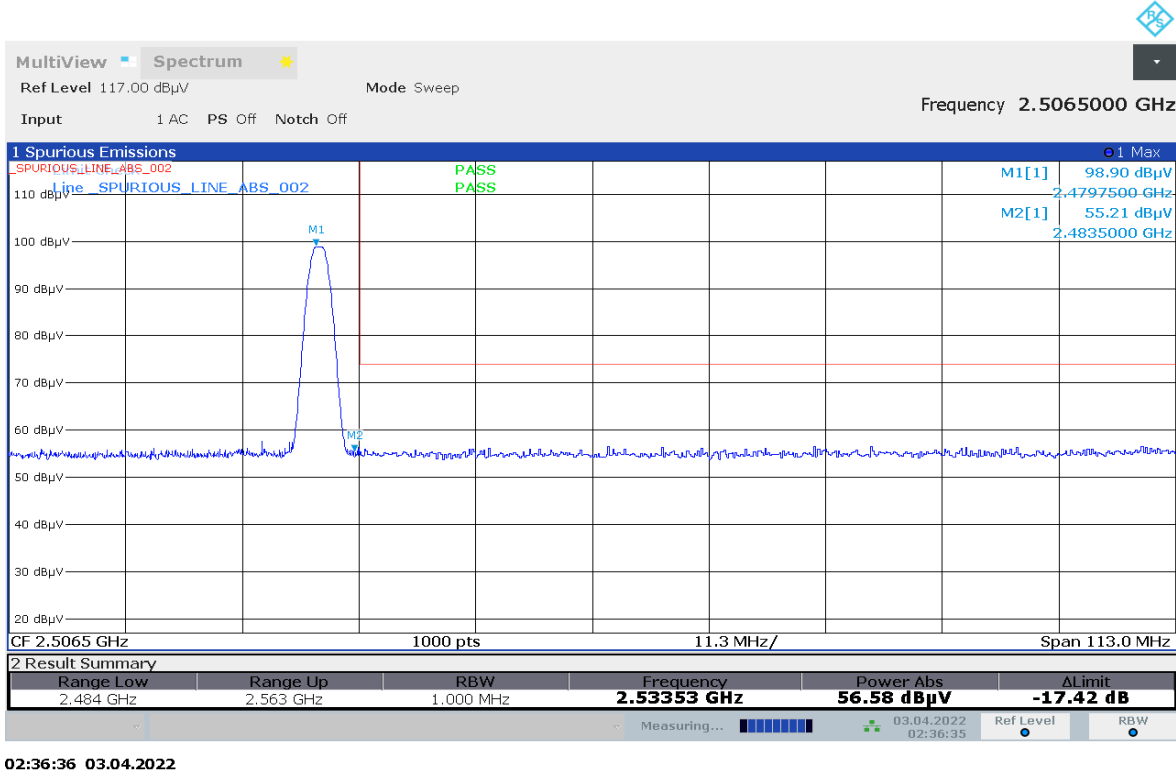


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

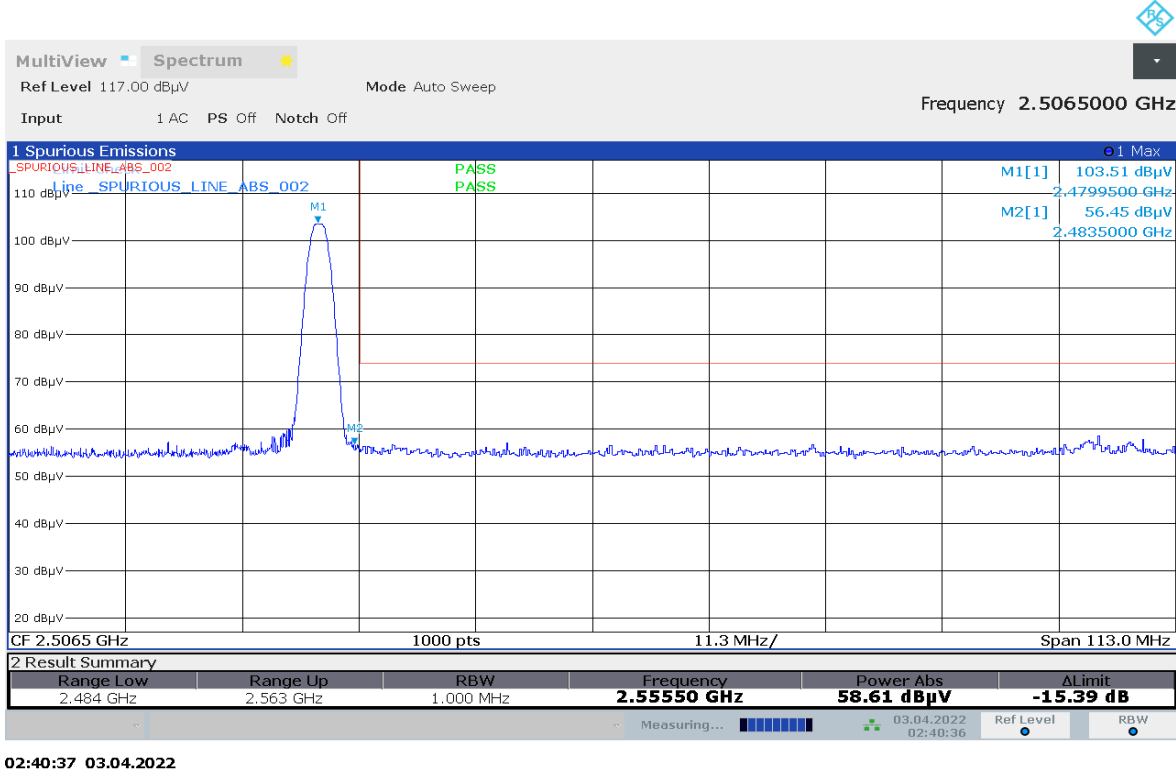

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

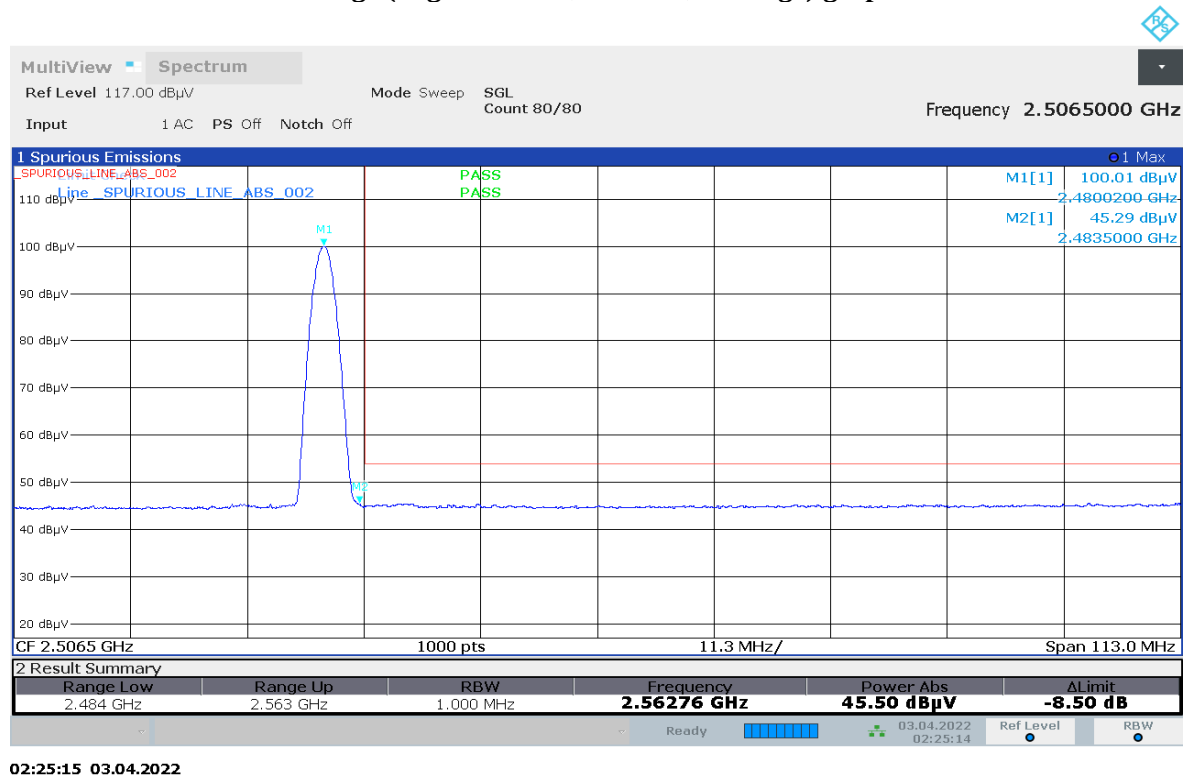

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

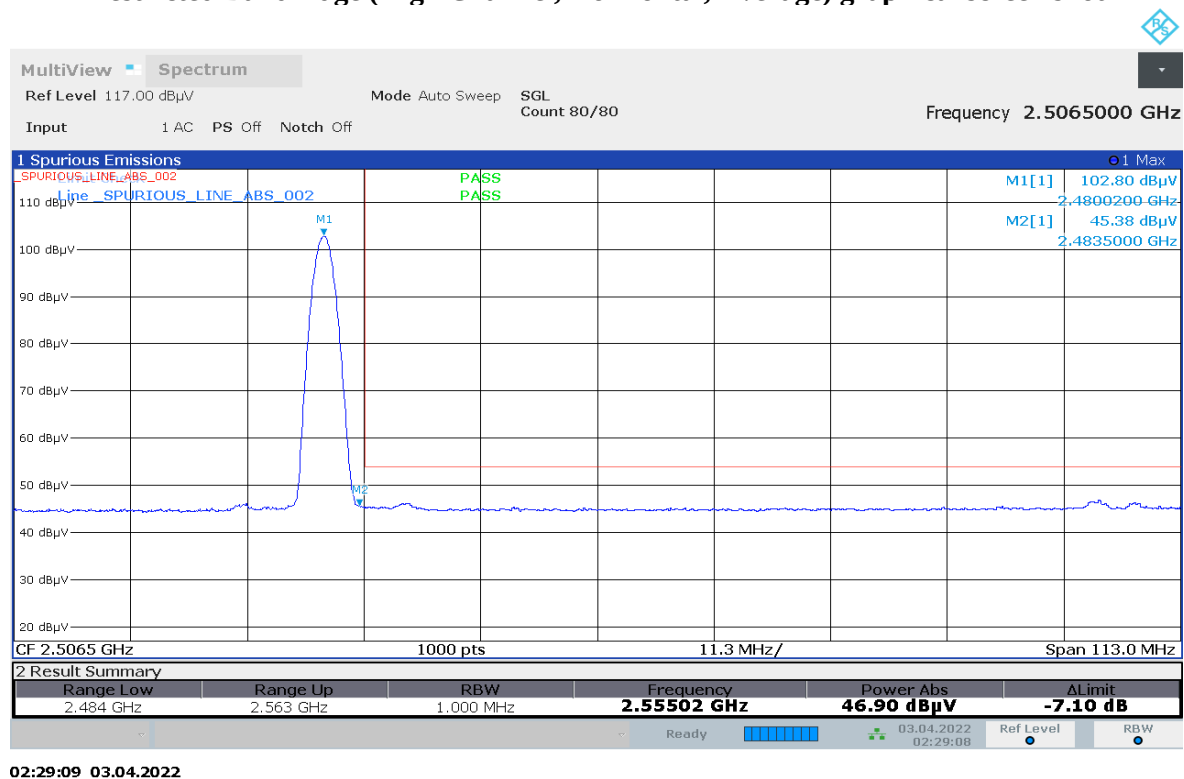


Restricted Band Edge (Low Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 69.4
Test Date: Sun, 3 Apr, 2022


Restricted Band Edge (Low Channel, Vertical, Peak) graphical screen shot

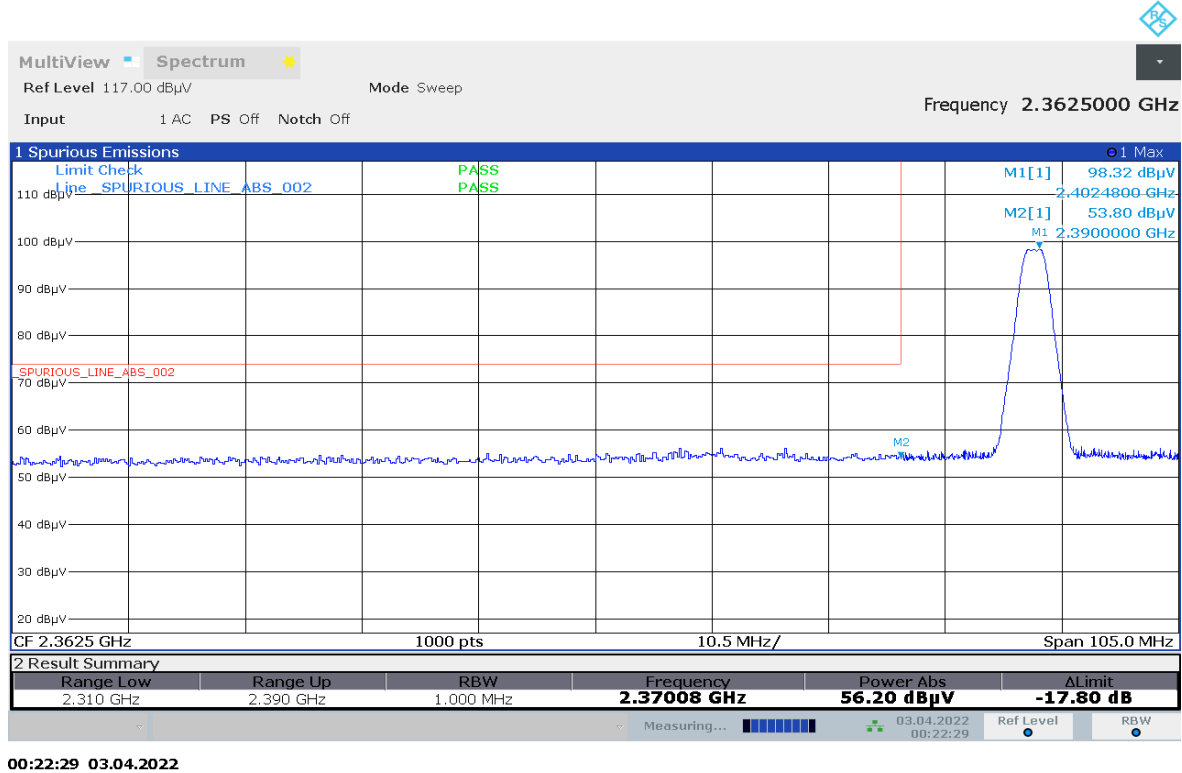

Restricted Band Edge (Low Channel, Horizontal, Peak) graphical screen shot

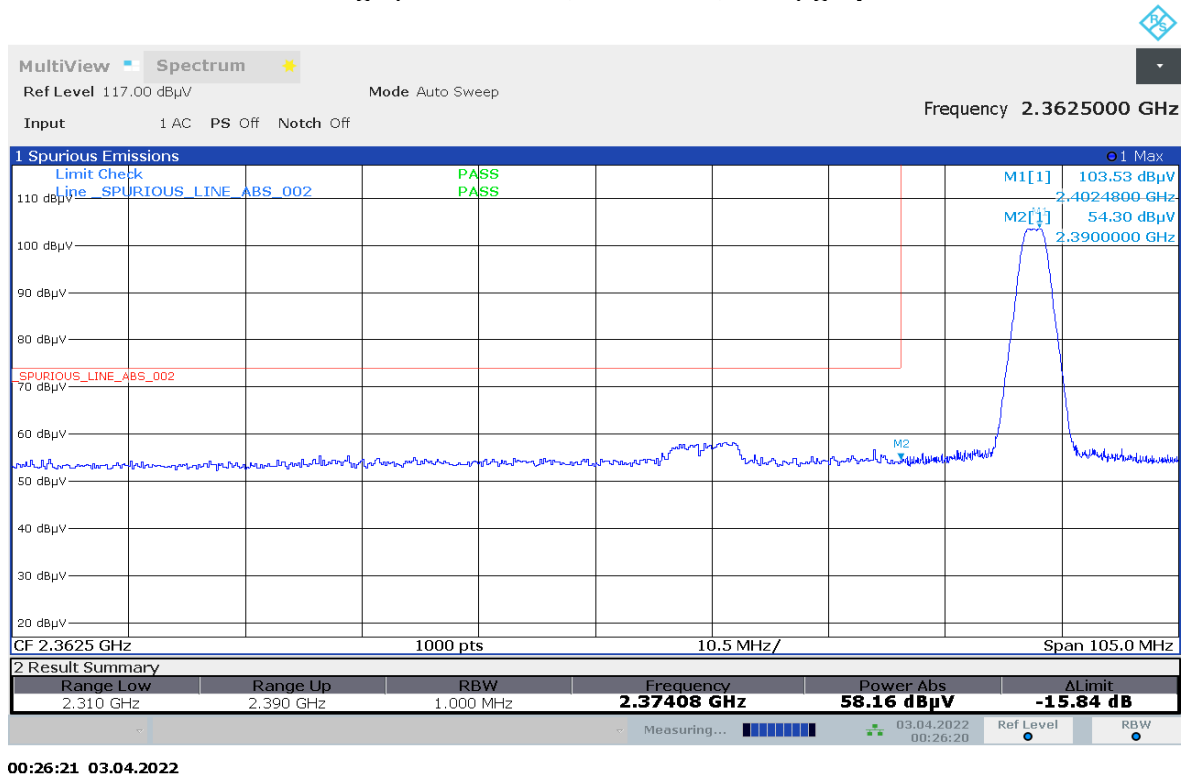

Restricted Band Edge (Low Channel, Vertical, Average) graphical screen shot

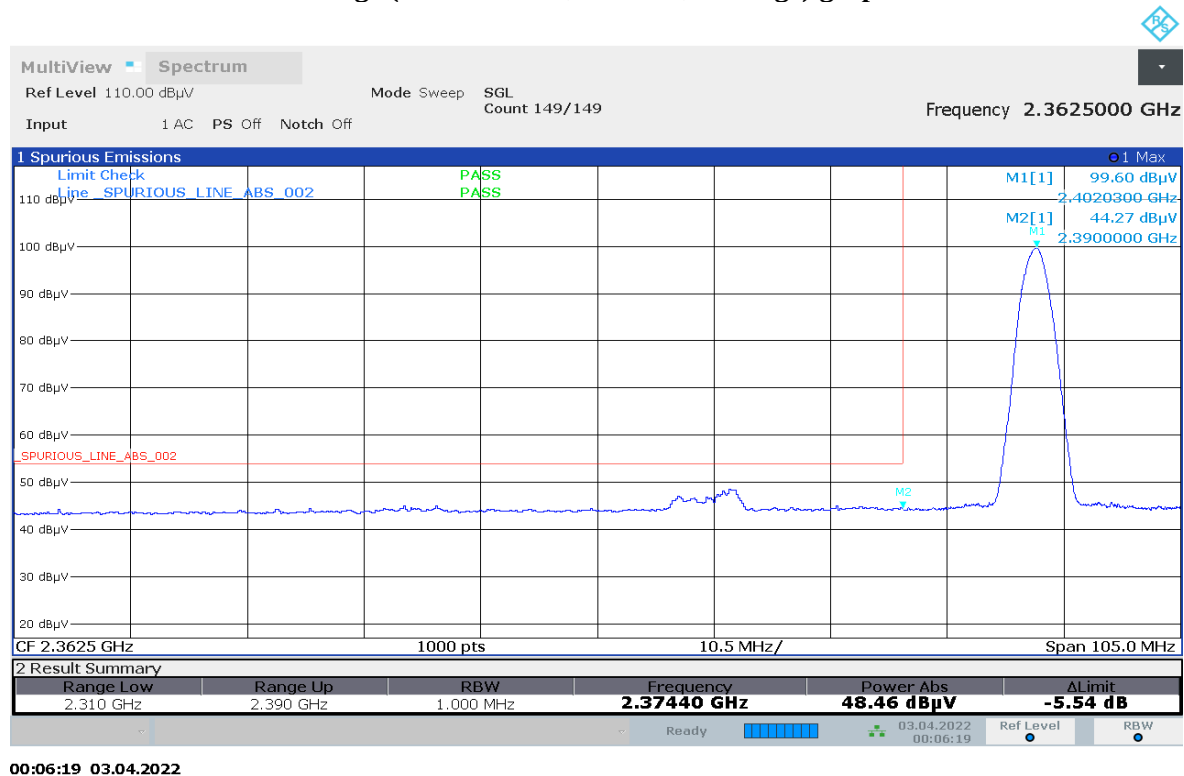

Restricted Band Edge (Low Channel, Horizontal, Average) graphical screen shot




Restricted Band Edge (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Humidity (%): 69.4
Test Date: Sun, 3 Apr, 2022


Restricted Band Edge (High Channel, Vertical, Peak) graphical screen shot

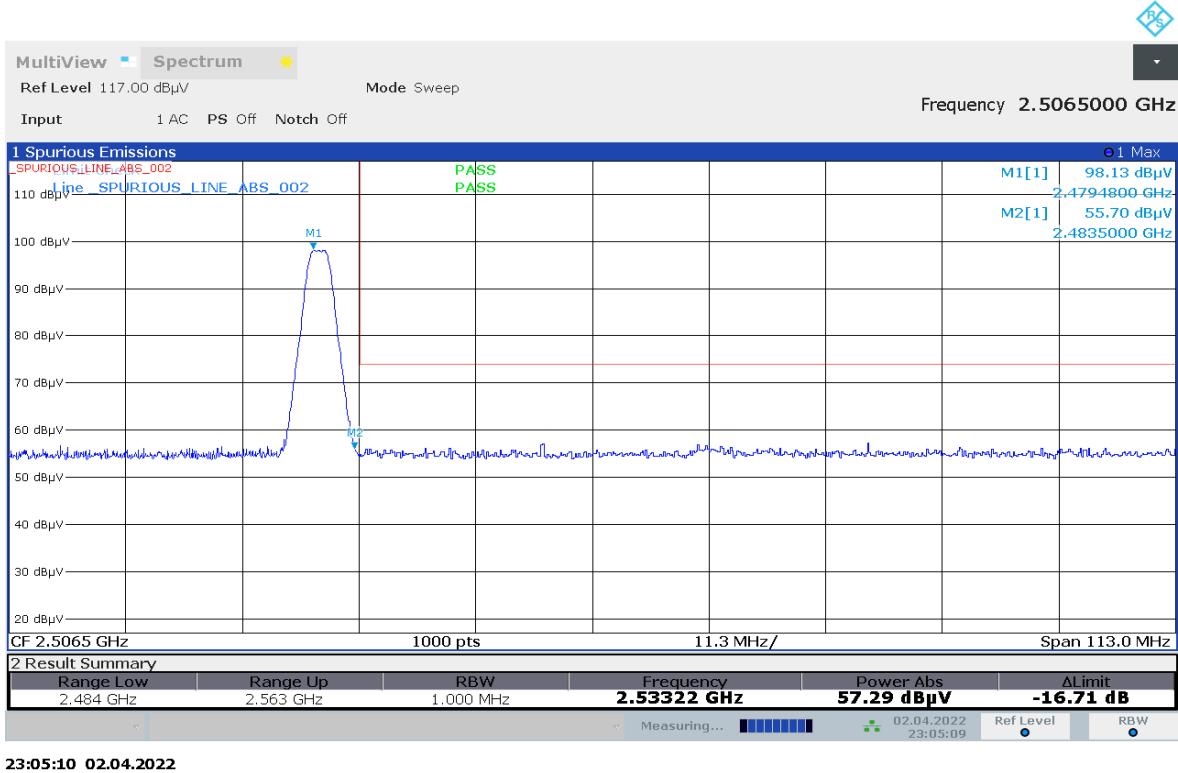


Restricted Band Edge (High Channel, Horizontal, Peak) graphical screen shot

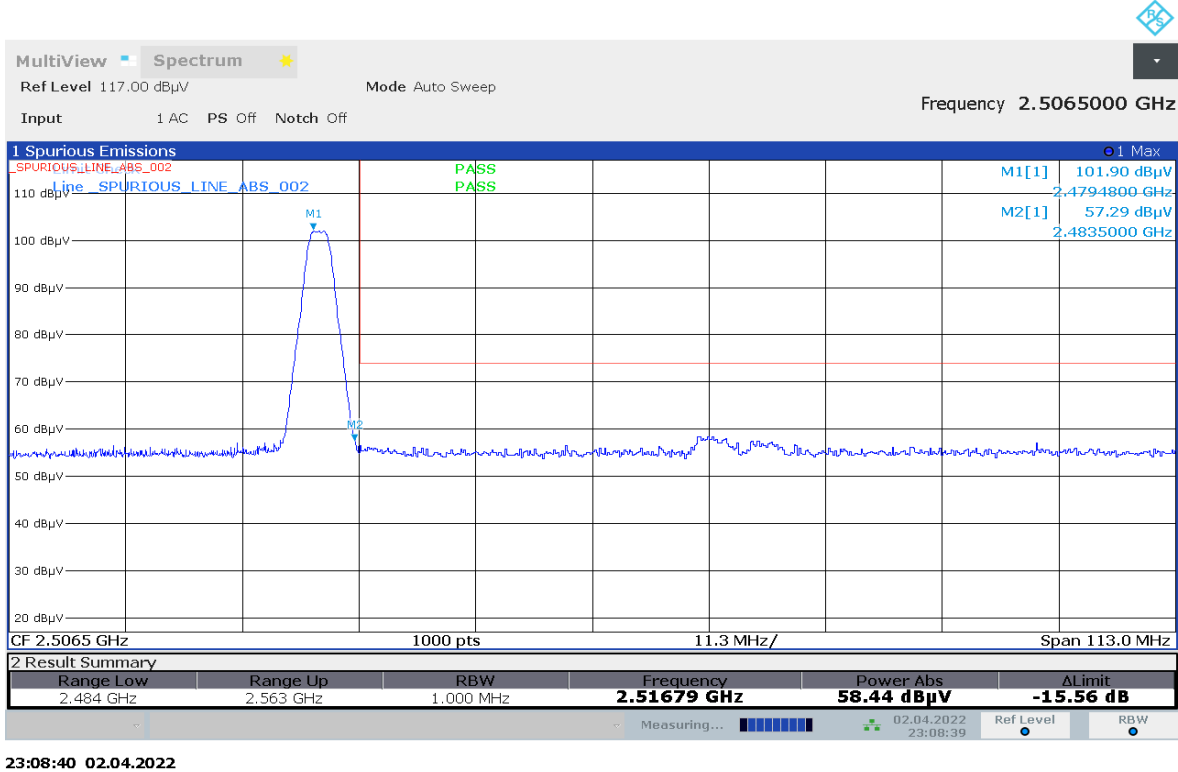

Restricted Band Edge (High Channel, Vertical, Average) graphical screen shot

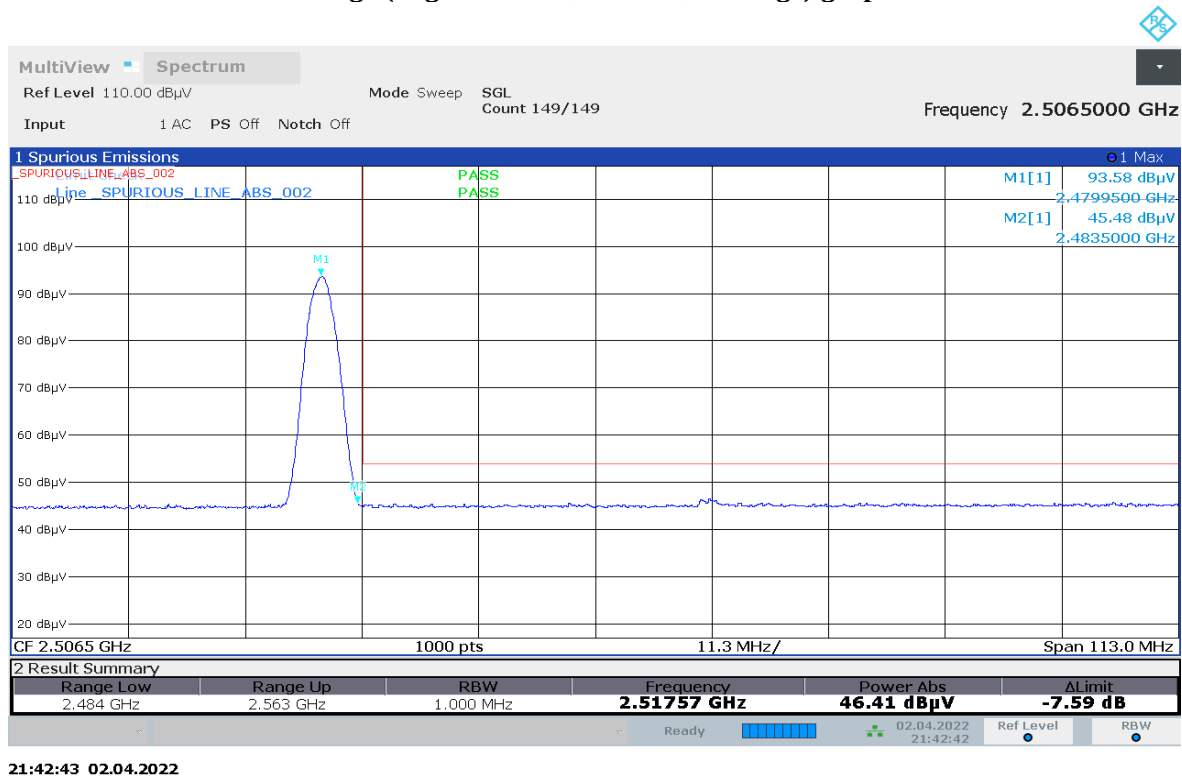

Restricted Band Edge (High Channel, Horizontal, Average) graphical screen shot

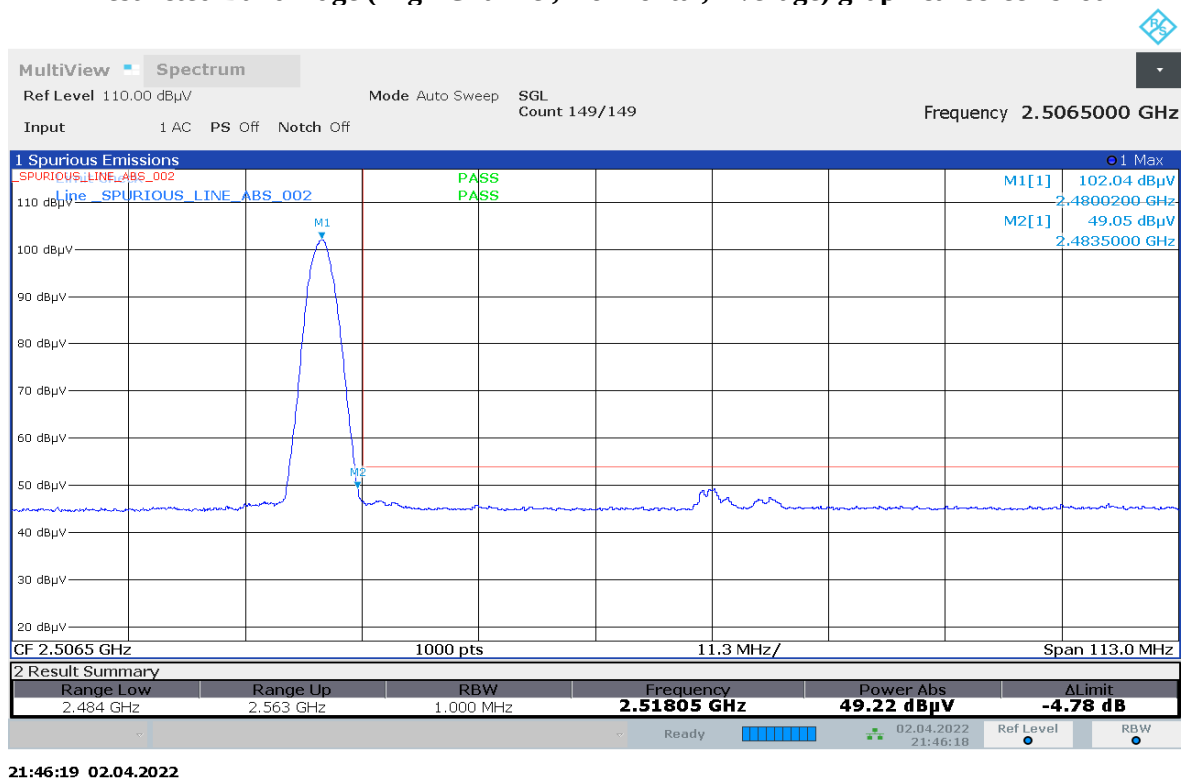


Radiated Emission (Low Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

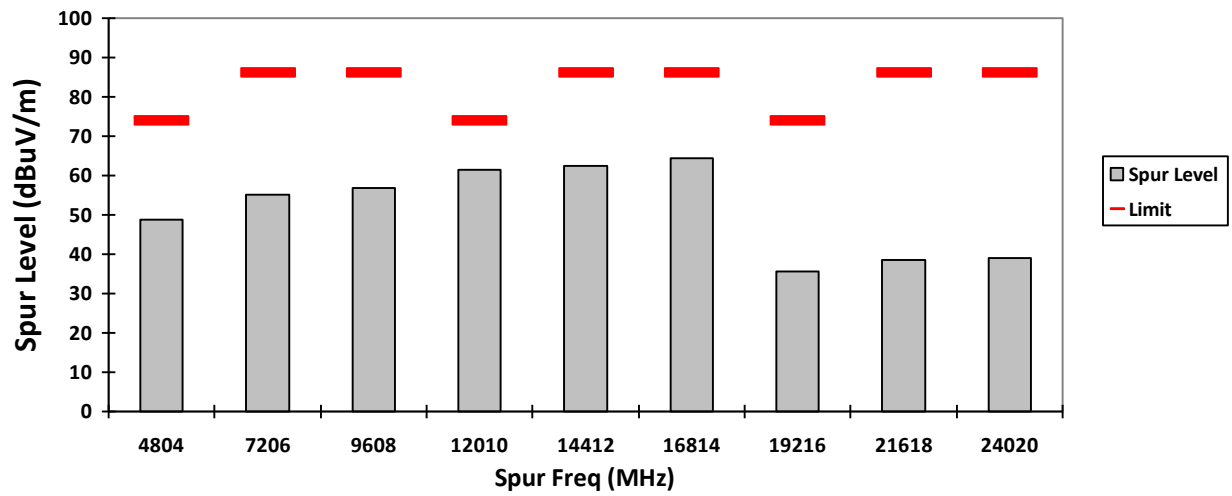


HORIZONTAL, PK

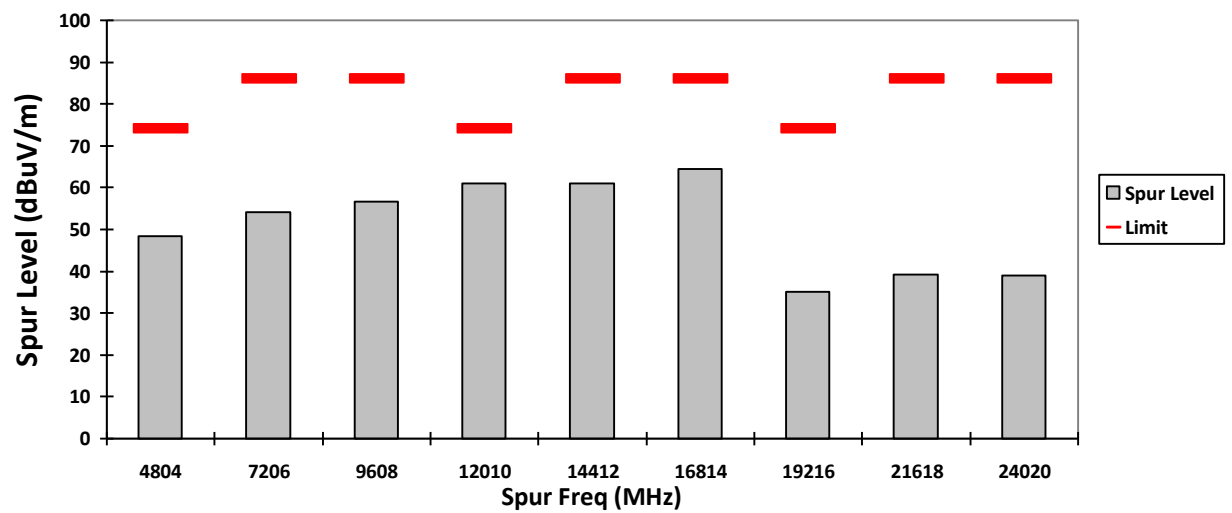

VERTICAL, AV

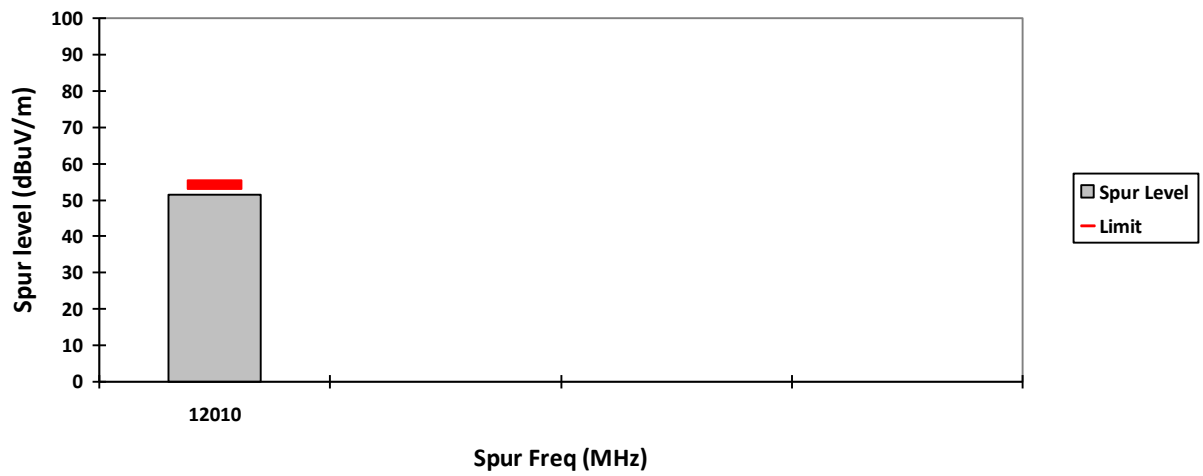

HORIZONTAL, AV

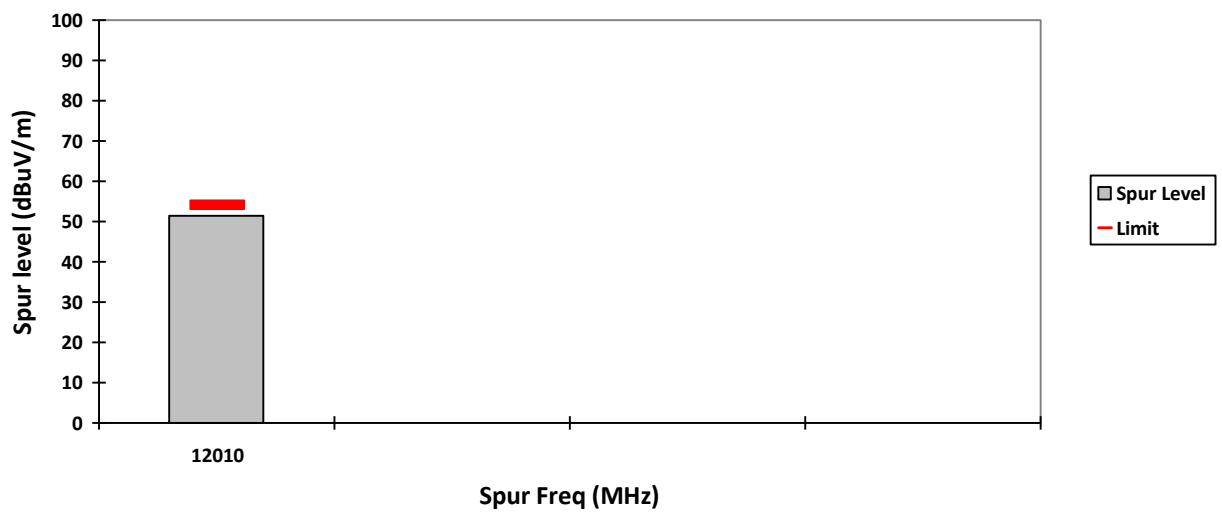


Radiated Emission (Mid Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

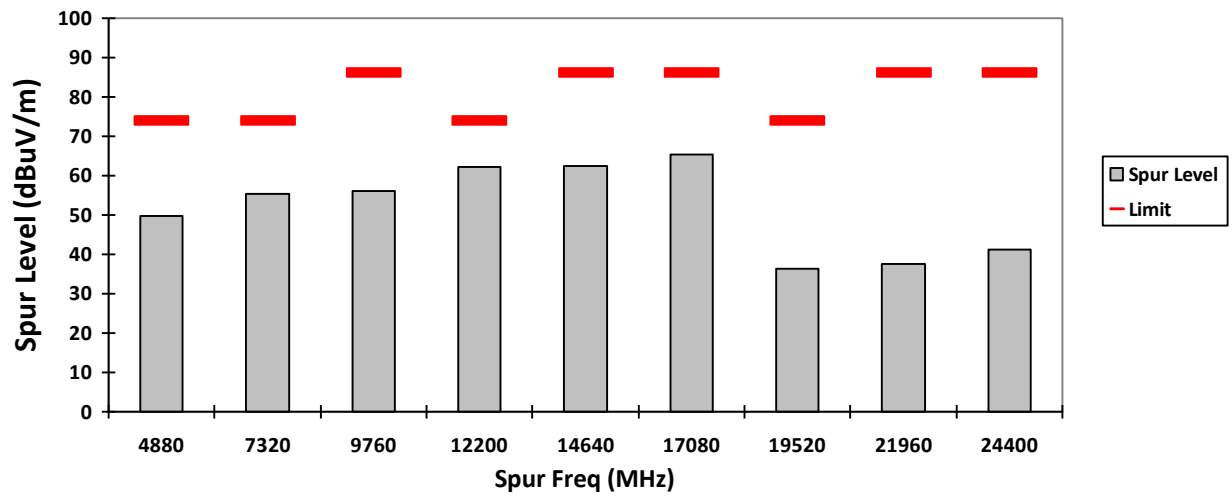


HORIZONTAL, PK

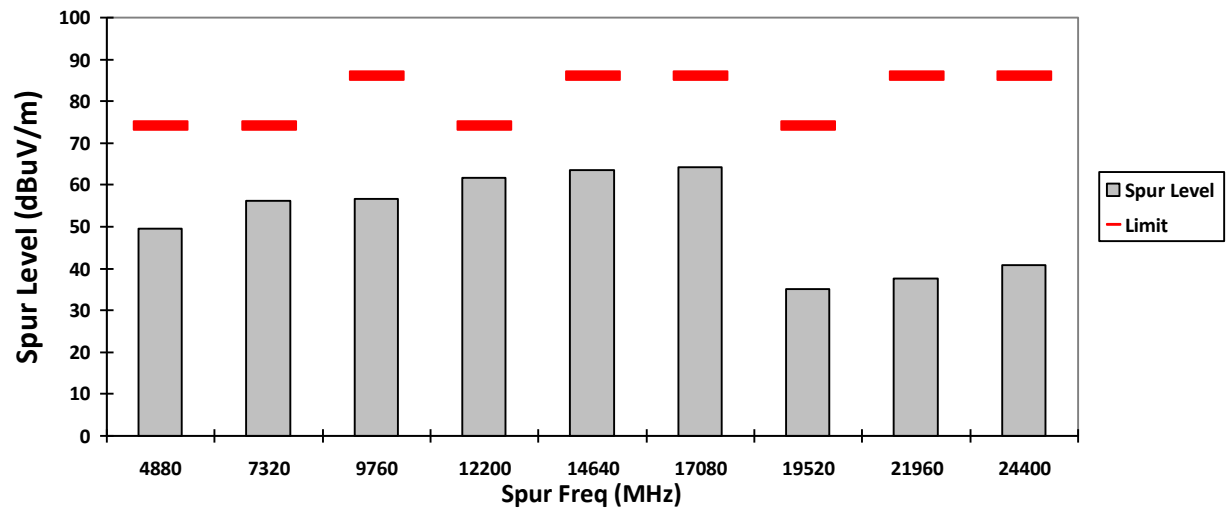

VERTICAL, AV

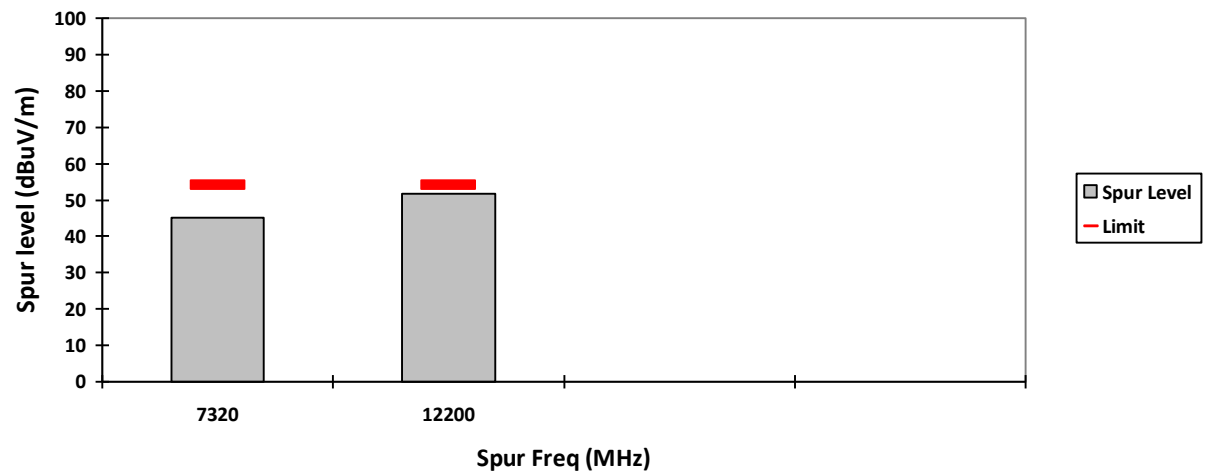

HORIZONTAL, AV

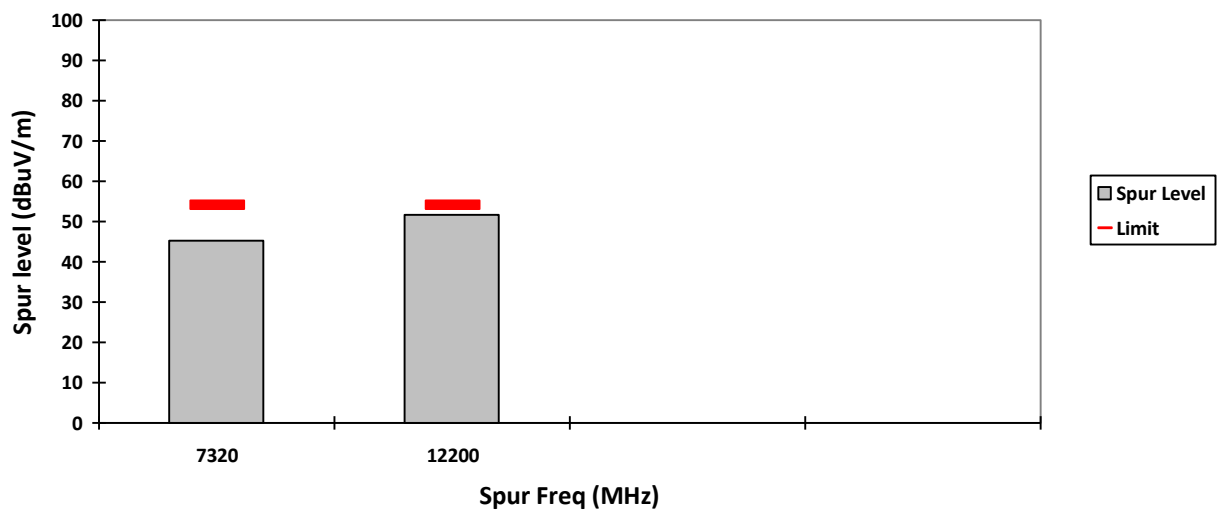


Radiated Emission (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

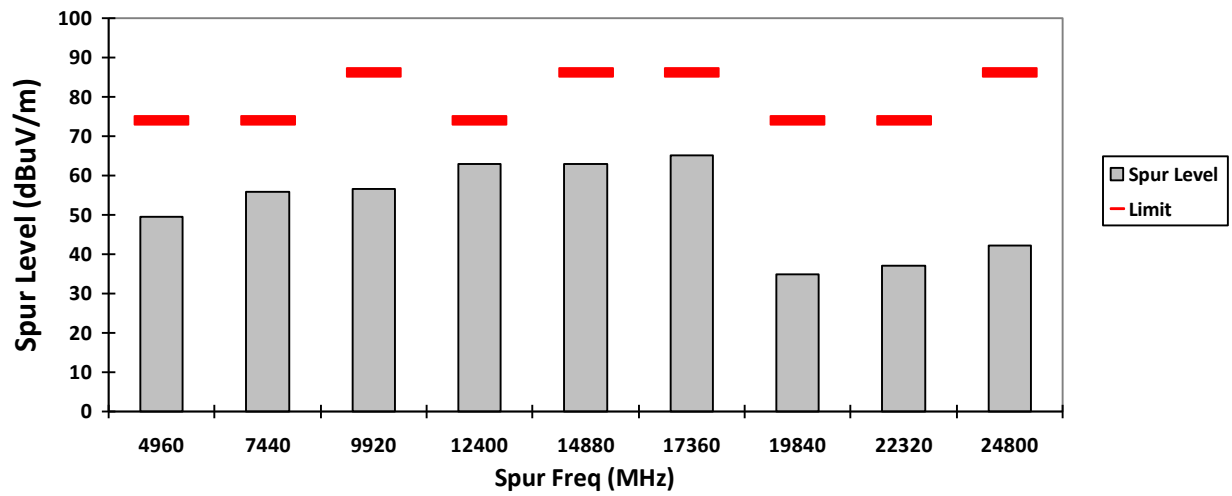


HORIZONTAL, PK

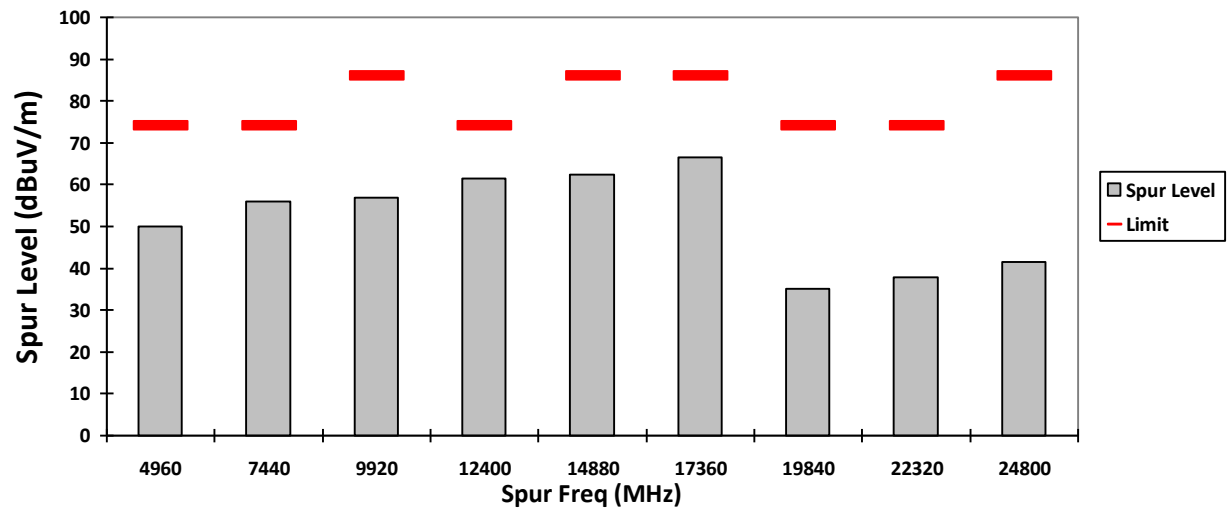

VERTICAL, AV

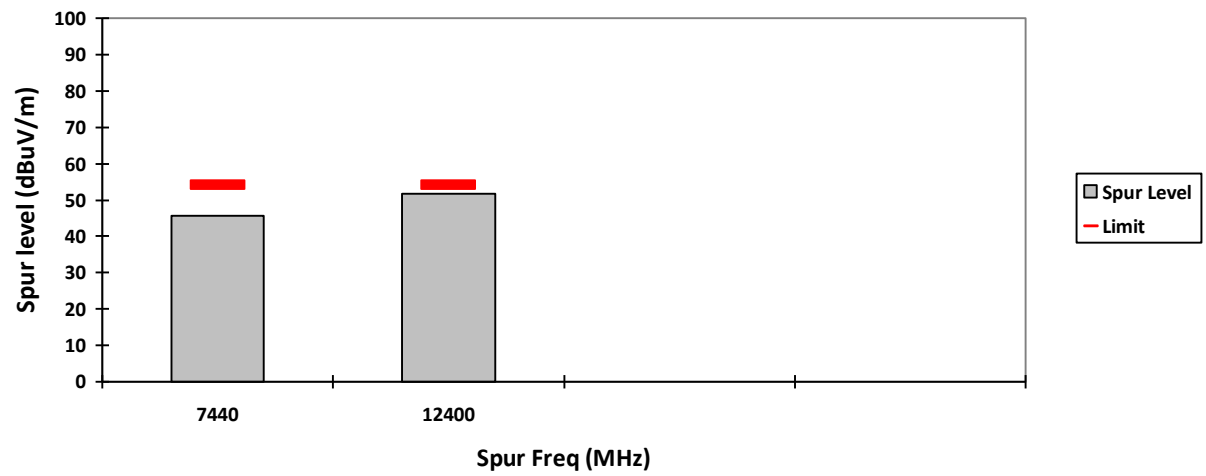

HORIZONTAL, AV

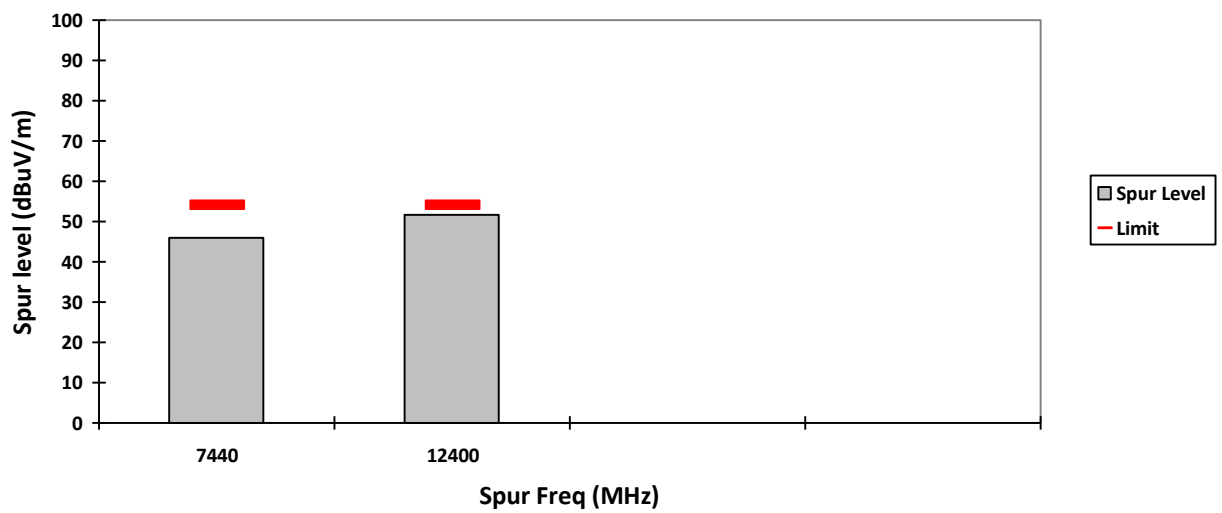


Radiated Emission (Low Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

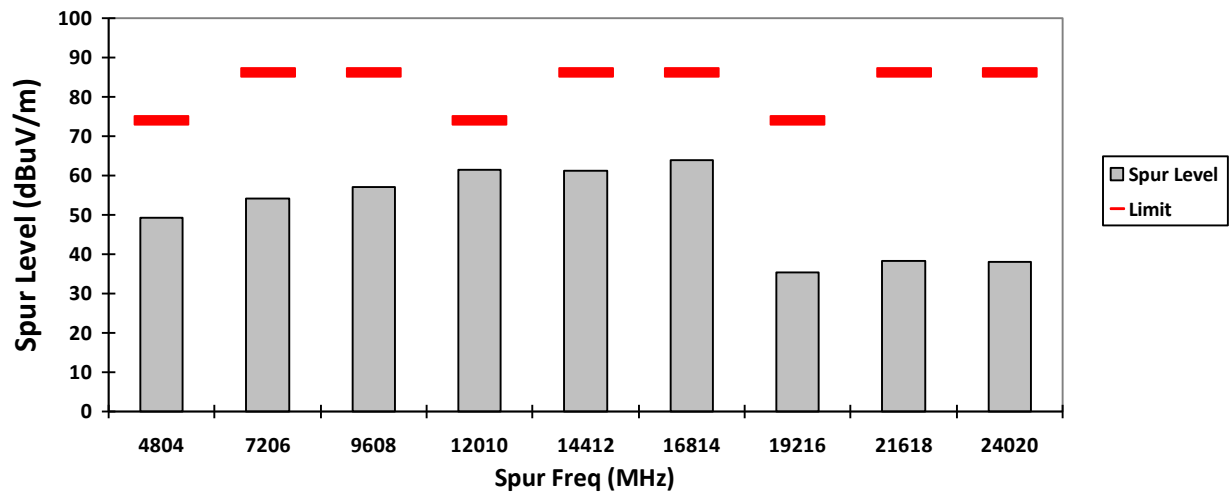


HORIZONTAL, PK

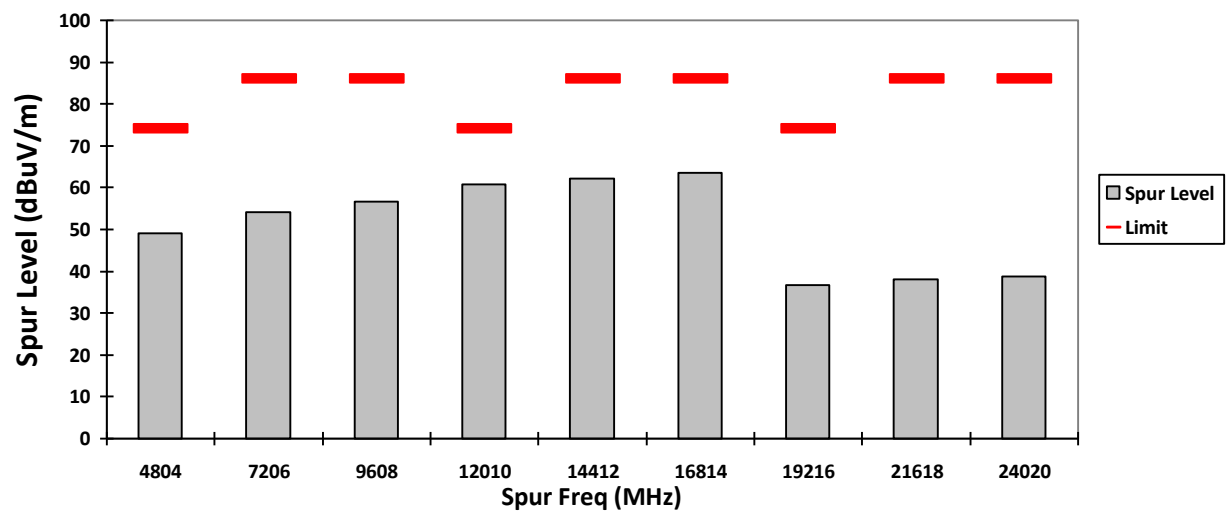

VERTICAL, AV

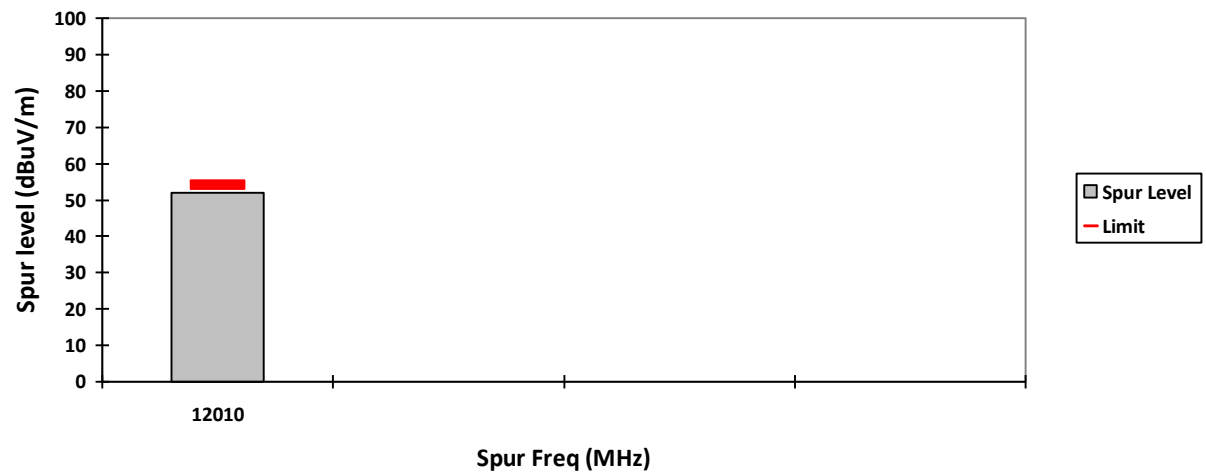

HORIZONTAL, AV

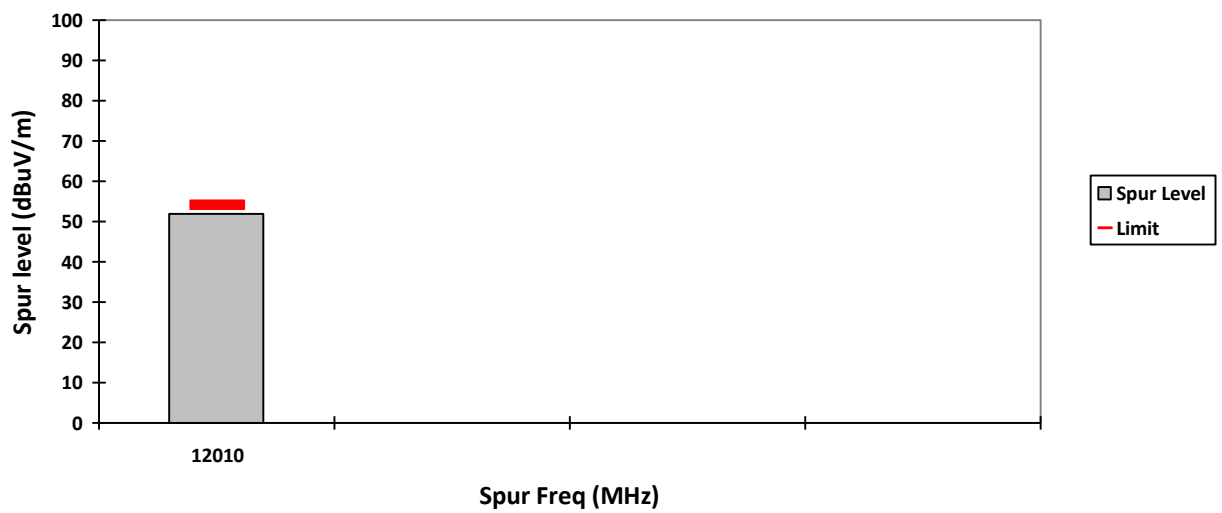


Radiated Emission (Mid Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

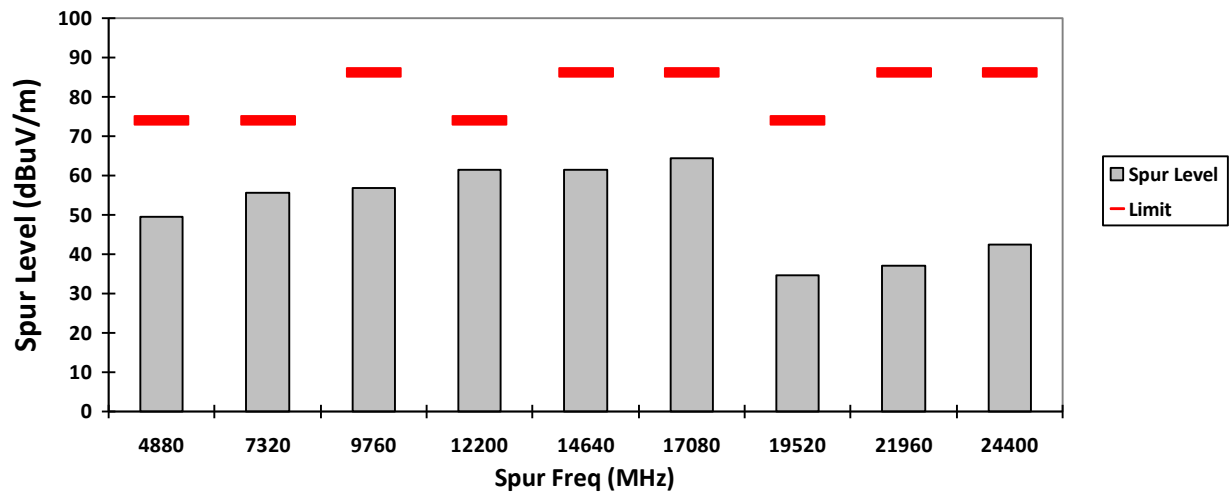


HORIZONTAL, PK

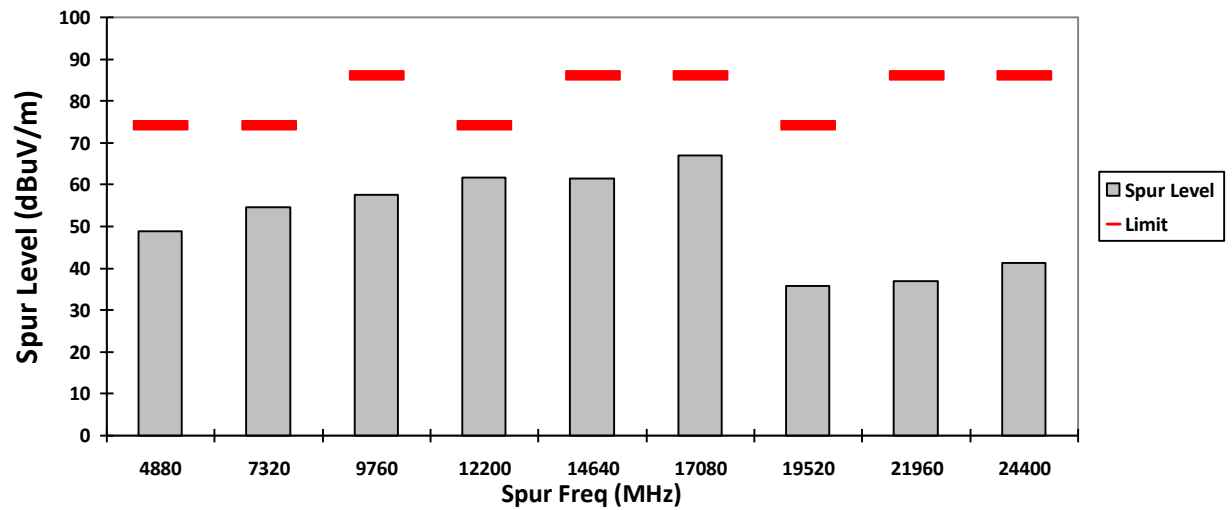

VERTICAL, AV

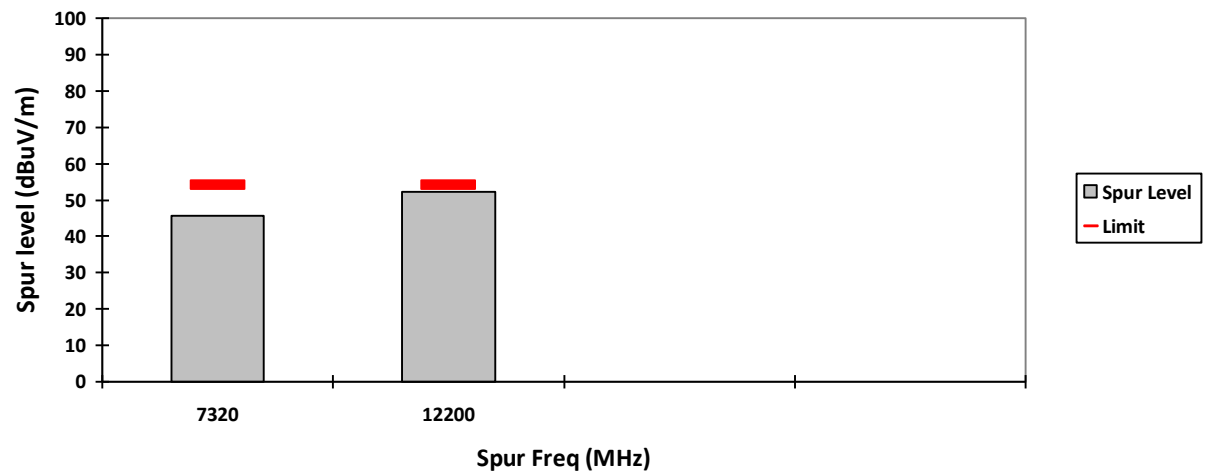

HORIZONTAL, AV

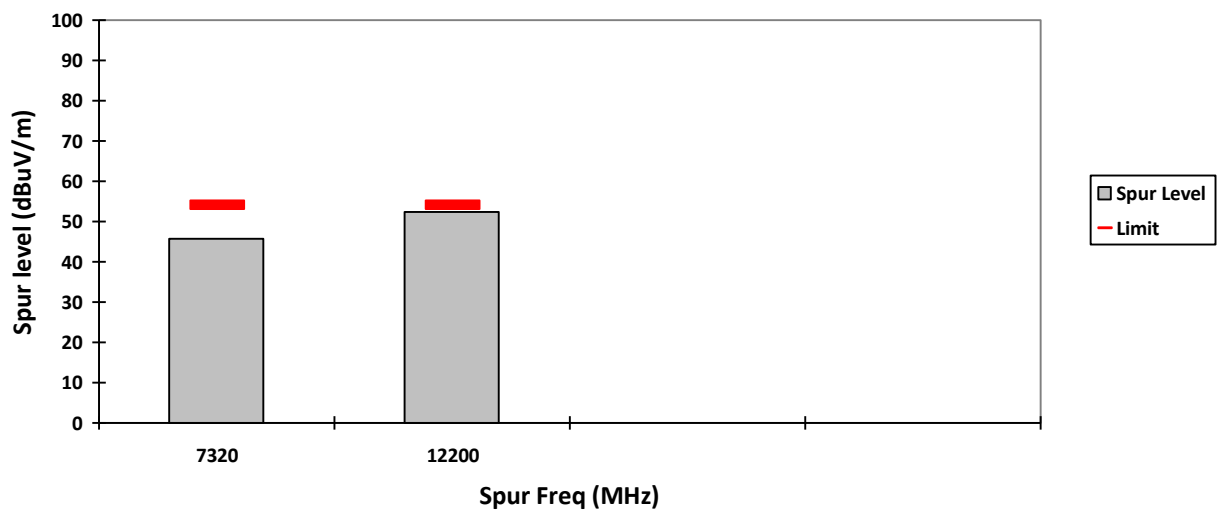


Radiated Emission (High Channel) tabular data


Remarks: Pass Result	Marginal Result	Fail Result
-------------------------	-----------------	-------------

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported.


VERTICAL, PK

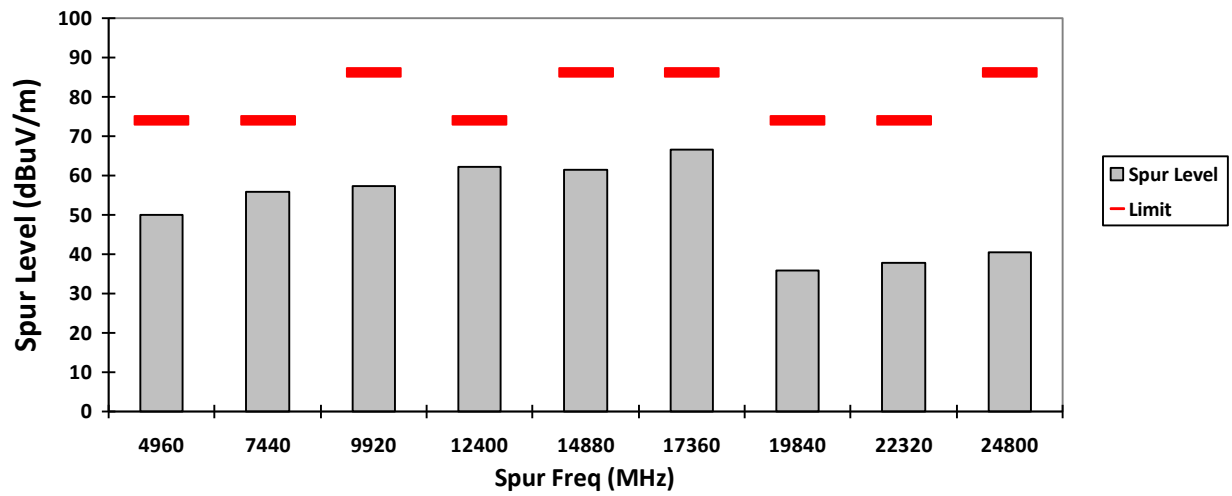


HORIZONTAL, PK

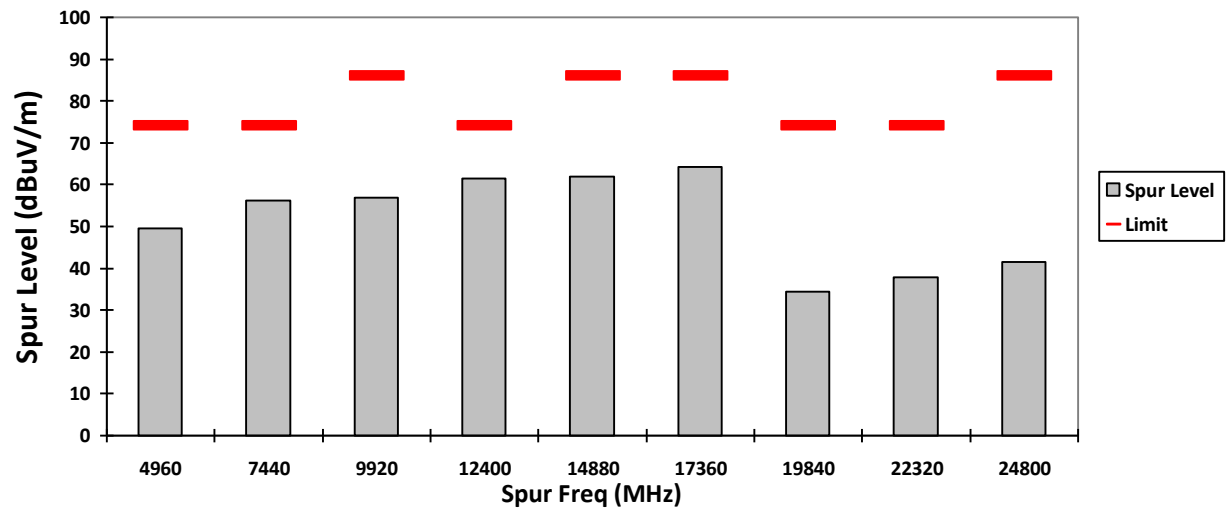

VERTICAL, AV

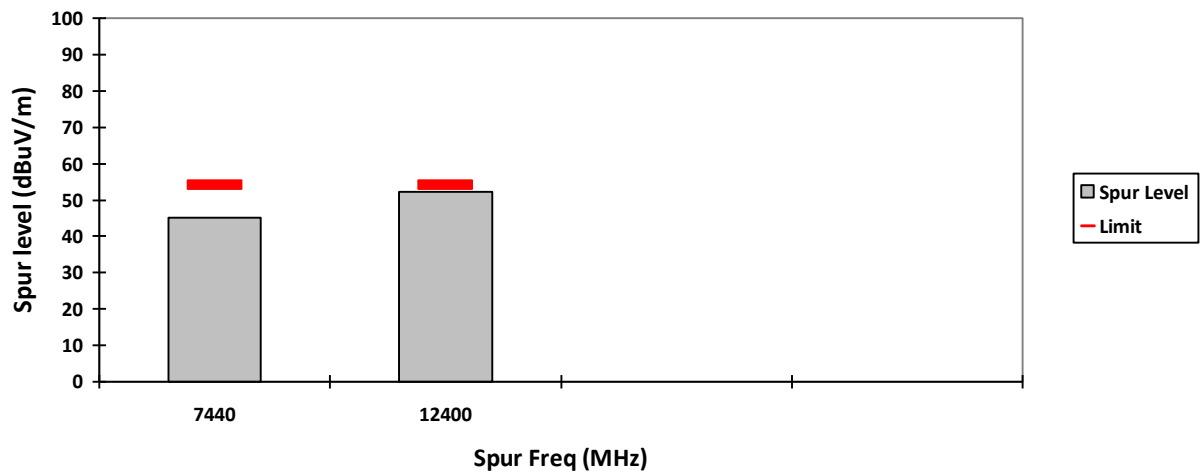


HORIZONTAL, AV

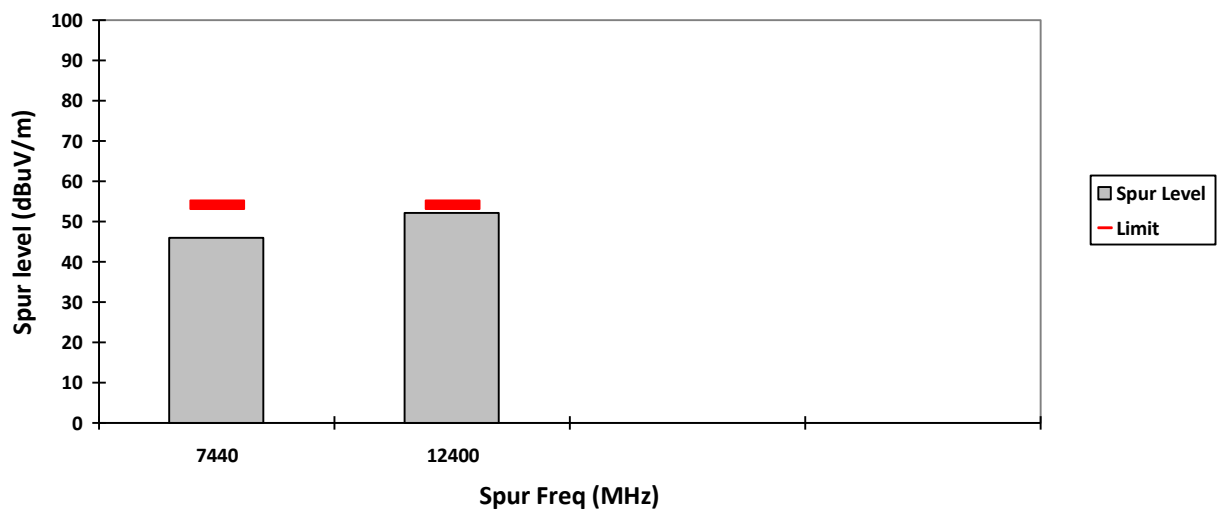

6.7 AC Powerline Conducted Emission

6.7.1 Test Setup

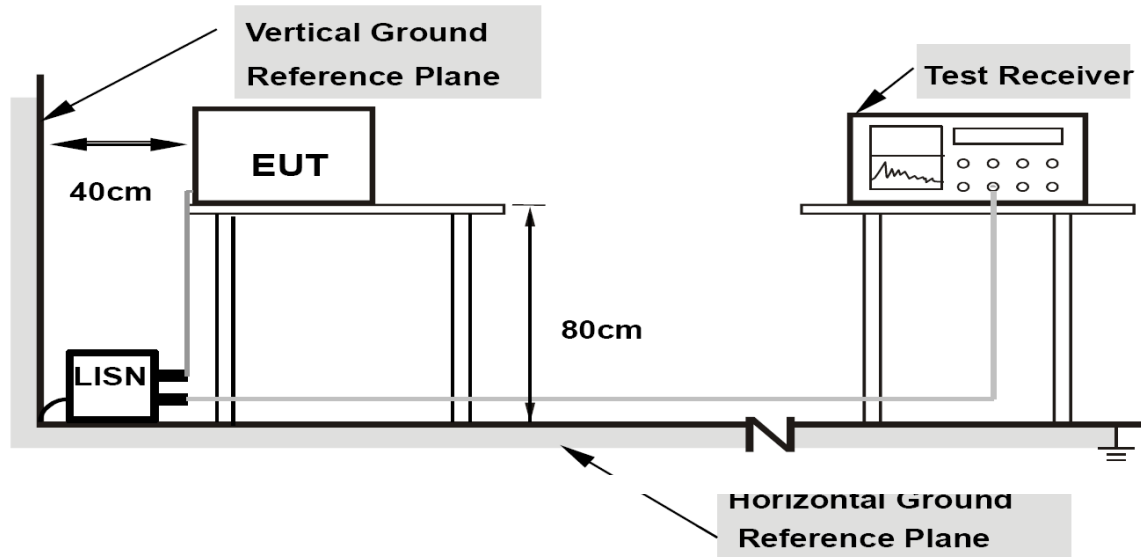

- 1) Tests were conducted for both Receive and Transmit Mode of the EUT.
- 2) The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- 3) Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- 4) The frequency range from 150 kHz to 30MHz was measured.

6.7.2 Test Limits:

For AC Power Line Conducted Test Limit can be Class A or B depends on product classification.

Limits for conducted disturbance at the mains ports
of class A ITE

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	79	66
0,50 to 30	73	60

NOTE The lower limit shall apply at the transition frequency.

Table 1: Limits for Conducted Disturbance at the Mains Ports of Class A ITE.

**Limits for conducted disturbance at the mains ports
of class B ITE**

Frequency range MHz	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50
NOTE 1 The lower limit shall apply at the transition frequencies. NOTE 2 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.		

Table 2: Limits for Conducted Disturbance at the Mains Ports of Class B ITE

6.7.3 Test Result

Not Applicable. Testing is not required, radio shall turn off during charging mode.

END OF TEST REPORT