



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	D-Link Corporation
Applicant Address	No.289, Sinhu 3rd Rd., Neihu District, Taipei City 114, Taiwan, R.O.C.
FCC ID	KA2IR895LA1

Product Name	AC5300 Ultra Wi-Fi Router
Brand Name	D-Link
Model No.	DIR-895L
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	May 15, 2015
Final Test Date	May 21, 2015
Submission Type	Original Equipment

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Note: Using 1.5m table as an alternative was permitted by the FCC per TCBC conference call of Dec. 2, 2014.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	10
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	12
3.9. EUT Operation during Test	13
3.10. Duty Cycle	13
3.11. Test Configurations	14
4. TEST RESULT	18
4.1. AC Power Line Conducted Emissions Measurement.....	18
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	22
4.3. Maximum Conducted Output Power Measurement.....	32
4.4. Power Spectral Density Measurement	35
4.5. Radiated Emissions Measurement	43
4.6. Band Edge Emissions Measurement	65
4.7. Frequency Stability Measurement	74
4.8. Antenna Requirements	78
5. LIST OF MEASURING EQUIPMENTS	79
6. MEASUREMENT UNCERTAINTY.....	81
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B4
APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT	C1 ~ C3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR551992AB	Rev. 01	Initial issue of report	May 26, 2015

1. VERIFICATION OF COMPLIANCE

Product Name : AC5300 Ultra Wi-Fi Router
Brand Name : D-Link
Model No. : DIR-895L
Applicant : D-Link Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 15, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.17 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.23 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.04 dB
4.5	15.407(b)	Radiated Emissions	Complies	3.90 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.01 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	IEEE 802.11a/n/ac: WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM, 1024QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	For non-beamforming mode IEEE 802.11a: 17.16 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 17.88 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 36.40 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 75.20 MHz For beamforming mode IEEE 802.11ac MCS0/Nss1 (VHT20): 18.12 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 37.00 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 76.00 MHz
Maximum Conducted Output Power	For non-beamforming mode IEEE 802.11a: 28.79 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 28.85 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 29.77 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 22.35 dBm For beamforming mode IEEE 802.11ac MCS0/Nss1 (VHT20): 28.05 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 27.96 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 22.35 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Mobile and portable client devices	

Note: The product has beamforming function for 802.11n/ac in 2.4GHz and 5GHz.

Antenna and Band width

Antenna	Four (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS0-11/Nss1-4
802.11ac (VHT40)	4	MCS0-11/Nss1-4
802.11ac (VHT80)	4	MCS0-11/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 in 2.4GHz and supports VHT20, VHT40, VHT80 in 5GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

Power	Brand	Model	Rating
Adapter	APD	DA-60N12	Input:100-240V~1.5A 50-60Hz Output:12V-5A
Others			
Power cable*1, non-shielded 1.3m			

3.3. Table for Filed Antenna

Ant.	Brand Holder	P/N	Antenna Type	Connector	Antenn Gain (dBi)			Cable Loss (dBi)			True Gain (dBi)		
					2.4G	5G B1	5G B4	2.4G	5G B1	5G B4	2.4G	5G B1	5G B4
1	HL TECHNOLOGY GROUP LIMITED	290-20187	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1
2	HL TECHNOLOGY GROUP LIMITED	290-20188	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1
3	HL TECHNOLOGY GROUP LIMITED	290-20188	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1
4	HL TECHNOLOGY GROUP LIMITED	290-20188	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1
5	HL TECHNOLOGY GROUP LIMITED	290-20187	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1
6	HL TECHNOLOGY GROUP LIMITED	290-20188	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1
7	HL TECHNOLOGY GROUP LIMITED	290-20188	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1
8	HL TECHNOLOGY GROUP LIMITED	290-20188	Dipole Antenna	SMA Plug Reverse	1.8	2.8	2.8	0.5	1.1	0.7	1.3	1.7	2.1

Note: The EUT has eight antennas.

<For 2.4GHz Band>

For IEEE 802.11b/g/n/ac mode (4TX/4RX)

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Band 1>


For IEEE 802.11a/n/ac mode (4TX/4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Band 4>

For IEEE 802.11a/n/ac mode (4TX/4RX):

Chain 5, Chain 6, Chain 7 and Chain 8 could transmit/receive simultaneously.

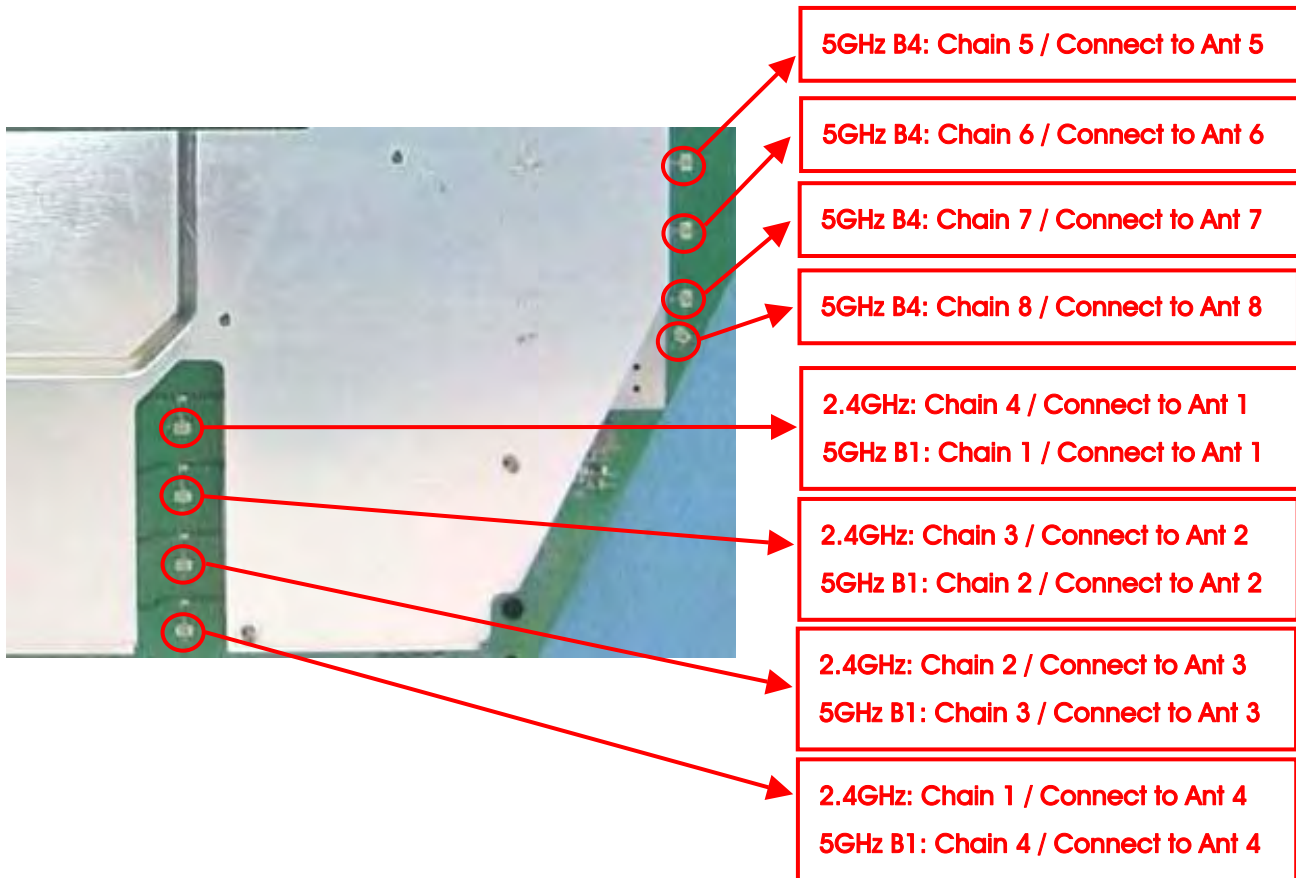

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Chain
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Power Spectral Density	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4

Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Band Edge Emission	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Frequency Stability	20 MHz	Band 1	-	40	1+2+3+4
	40 MHz	Band 1	-	38	1+2+3+4
	80 MHz	Band 1	-	42	1+2+3+4

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac, Beamforming mode and non-beamforming mode has been test and record in this test report.

Note 3: All the specification of test configurations and test modes were based on customer's request

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. Normal Link

For Radiated Emission below 1GHz test:

Mode 1. Normal Link - Place EUT in X axis

Mode 2. Normal Link - Place EUT in Y axis

Mode 2 generated the worst test result, so it was recorded in this report.

For Radiated Emission above 1GHz test:

The EUT was performed at X axis and Y axis position for Radiated emission above 1GHz test, and the worst case was found at X axis. So the measurement will follow this same test configuration.

Mode 1. CTX - Place EUT in X axis

For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to Appendix B) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO02-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Below 1GHz

For Test Site No: 03CH01-CB

Support Unit	Brand	Model	FCC ID
Notebook*5	DELL	E4300	DoC
Flash disk	Silicon Power	I-Series	DoC
Flash disk3.0	Silicon Power	B06	DoC

For Above 1GHz

For Test Site No: 03CH01-CB (For non-beamforming mode)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

For Test Site No: 03CH01-CB (For beamforming mode)

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E4300	DoC
RX Device	Broadcom	Bcm4366	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook*5	DELL	E6430	DoC
Flash disk3.0	Transcend	JetFlash-700	DoC
Flash disk	Transcend	604108 8255	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For non-beamforming mode:

Test Software Version	Mtool 2.0.2.7		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11a	91	91	91
802.11ac MCS0/Nss1 VHT20	90	91	91
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	
	67	95	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	64		

For beamforming mode:

Test Software Version	Mtool 2.0.2.7		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11ac MCS0/Nss1 VHT20	86	88	89
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	
	64	88	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	64		

3.9. EUT Operation during Test

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by RX Device and transmit duty cycle no less 98%

3.10. Duty Cycle

For non-beamforming mode:


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.030	2.070	98.07	0.08	0.01
802.11ac MCS0/Nss1 VHT20	1.924	1.944	98.97	0.04	0.01
802.11ac MCS0/Nss1 VHT40	0.915	0.969	94.43	0.25	1.09
802.11ac MCS0/Nss1 VHT80	0.431	0.483	89.23	0.49	2.32

For beamforming mode:

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	4.640	4.740	97.89	0.09	0.22
802.11ac MCS0/Nss1 VHT40	4.440	4.560	97.37	0.12	0.23
802.11ac MCS0/Nss1 VHT80	5.080	5.200	97.69	0.10	0.20

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

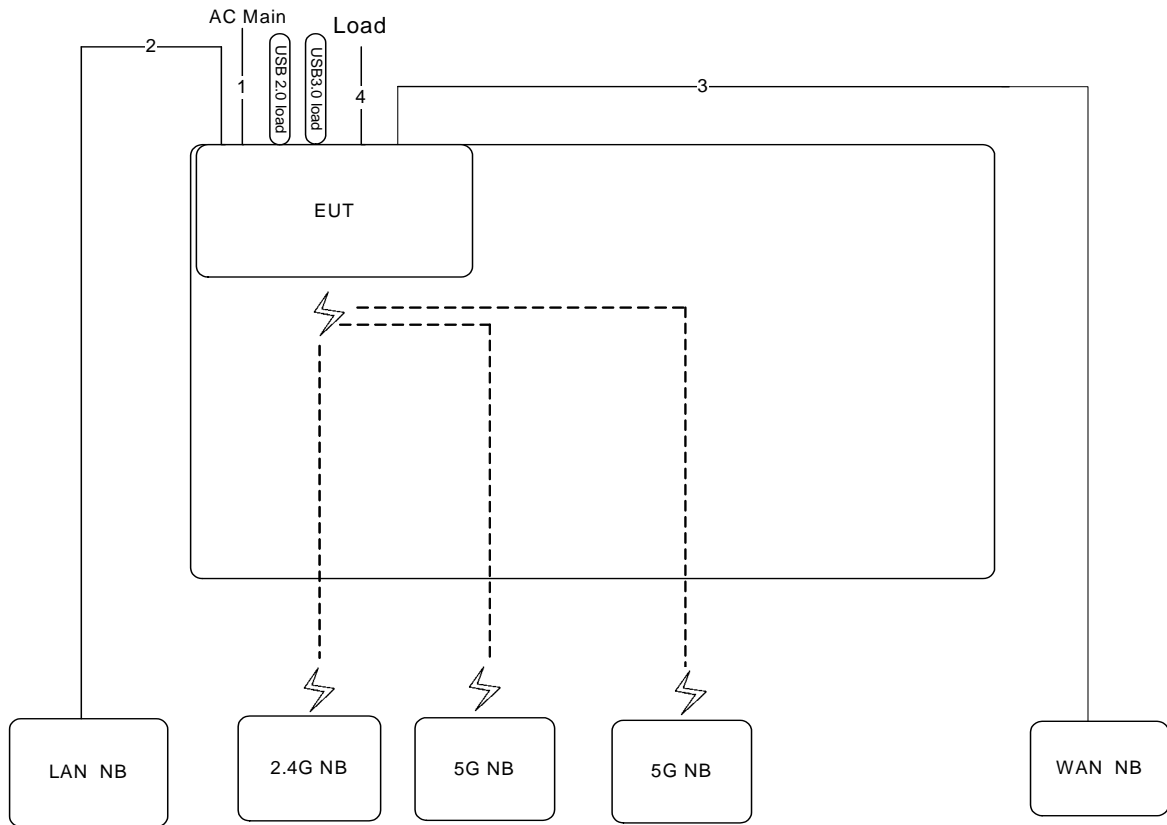

Item	Connection	Shielded	Length	Remark
1	Power cable	No	3.1m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable *3	No	3m	Load

3.11.2. Radiation Emissions Test Configuration


Test Configuration: 30MHz ~1GHz

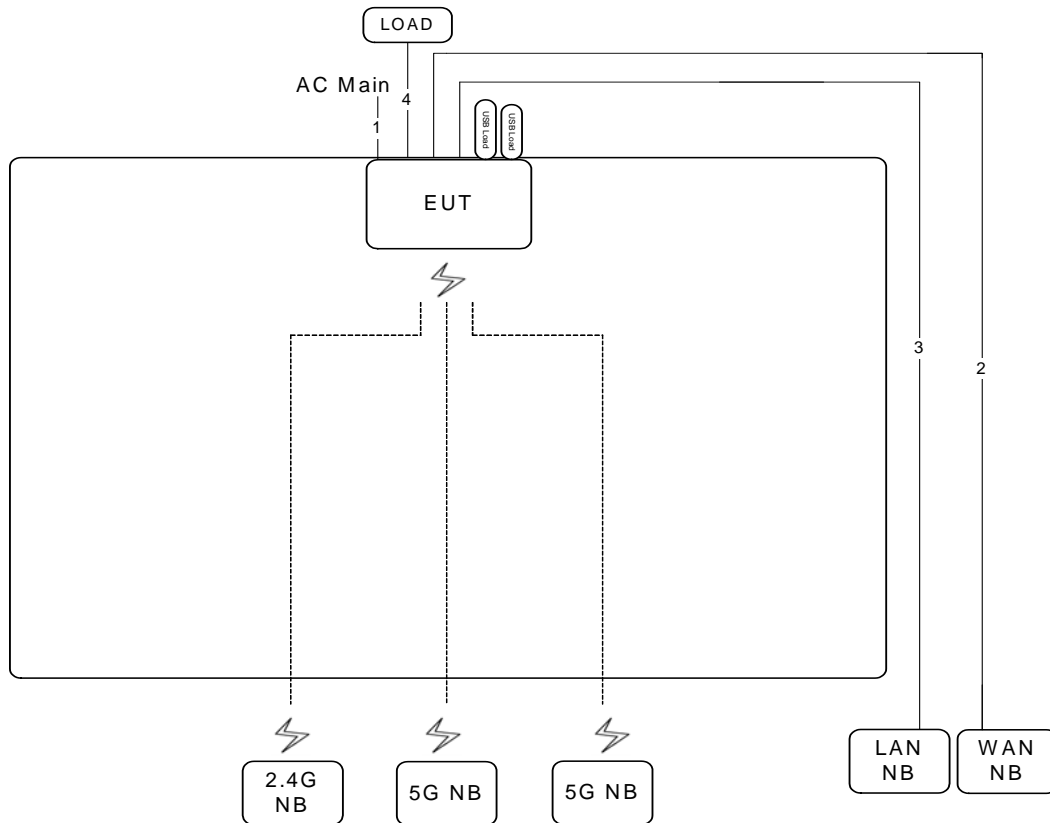

Item	Connection	Shielded	Length	Remark
1	Power cable	No	3.1m	-
2	RJ-45 cable	No	10m	-
3	RJ-45 cable	No	10m	-
4	RJ-45 cable *3	No	3m	Load


Test Configuration: above 1GHz

For non-beamforming mode

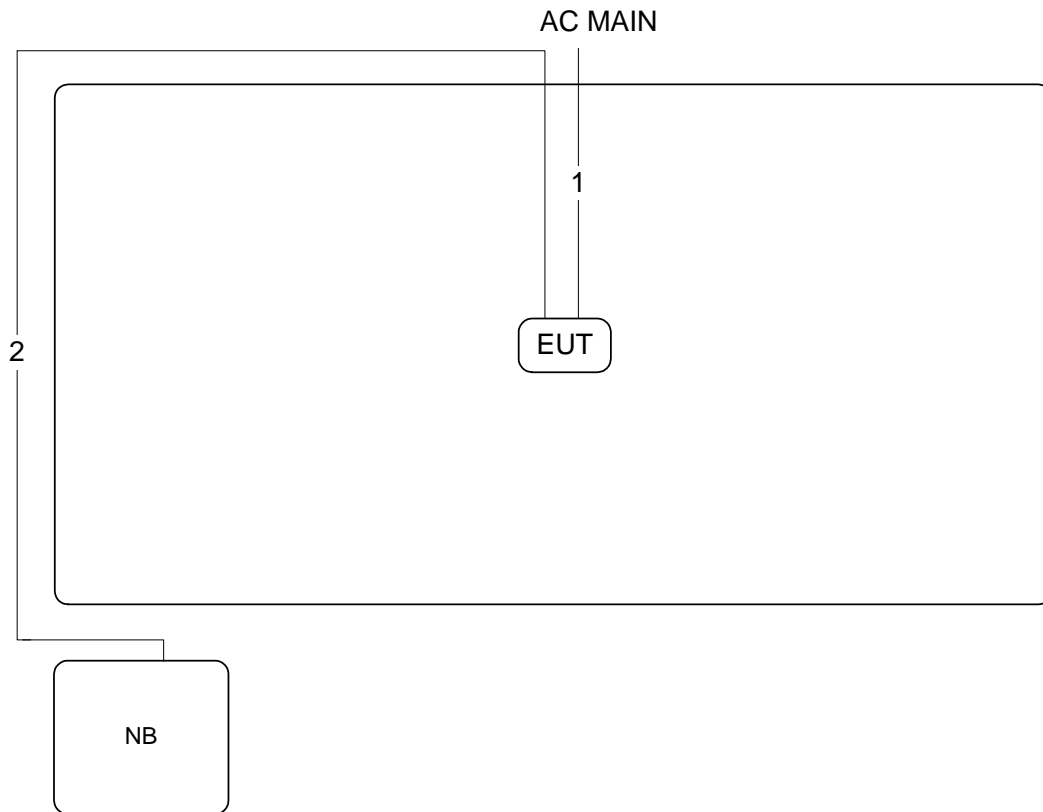

Item	Connection	Shielded	Length
1	Power cable	No	3.1m
2	RJ-45 cable	No	10m

For beamforming mode:

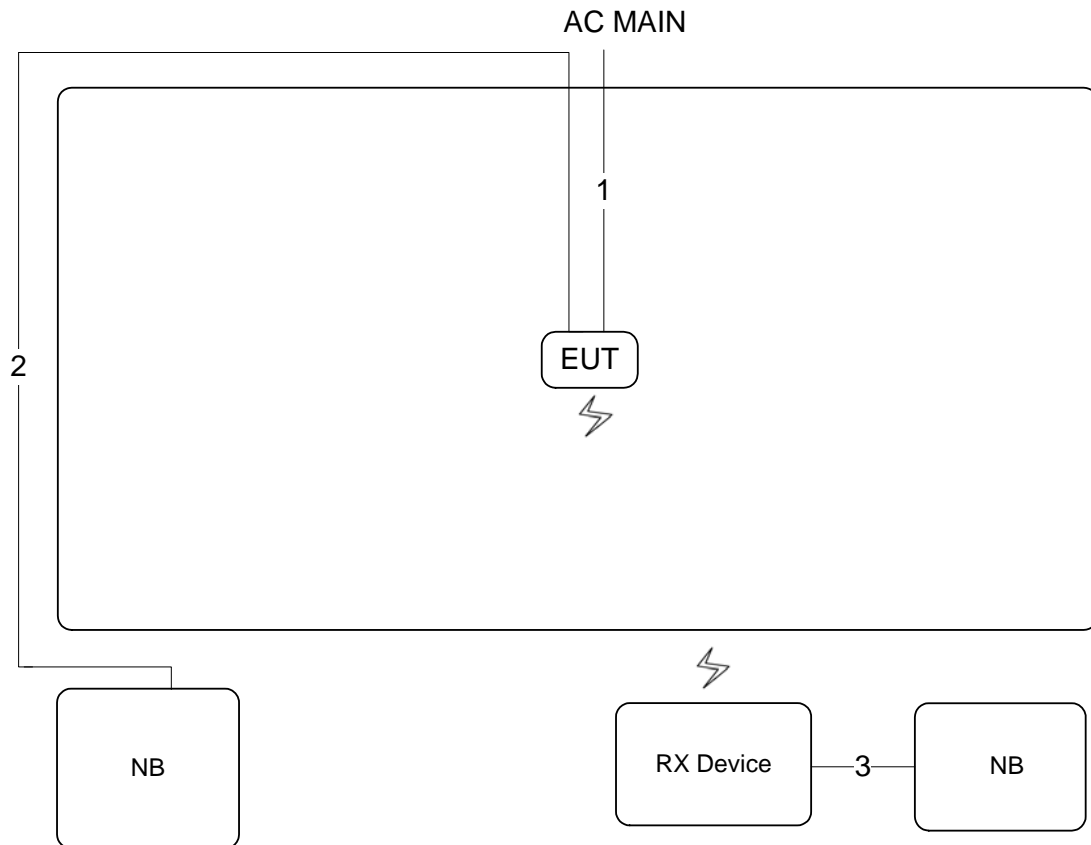

Item	Connection	Shielded	Length
1	Power cable	No	3.1m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

There is no deviation with the original standard.

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	54%
Test Engineer	Da Deng	Phase	Line
Configuration	Normal Link		

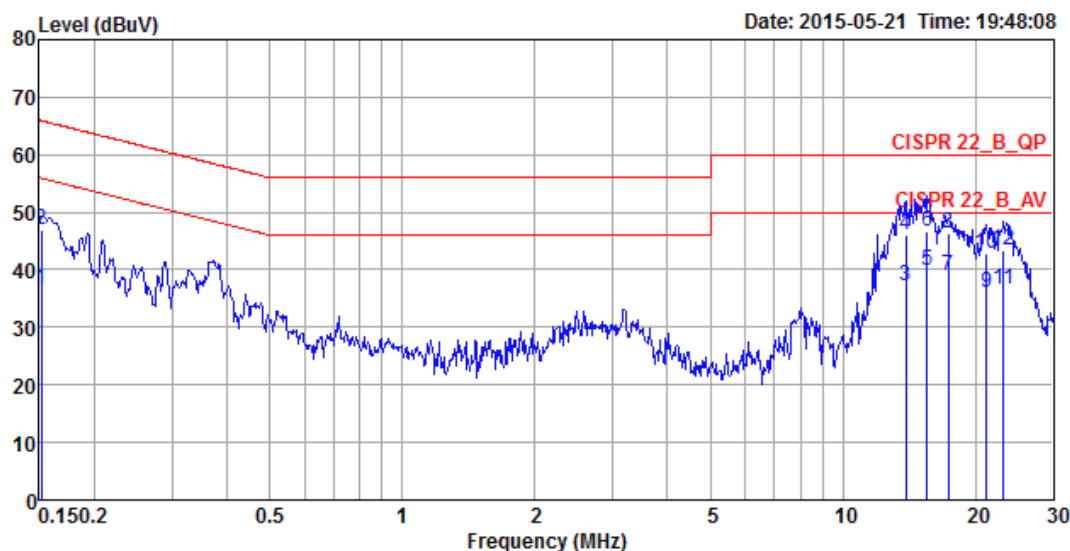

	Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss		
			dB	dBuV	dBuV	dB	dB		
1	0.1516	36.74	-19.17	55.91	26.57	10.00	0.17	LINE	Average
2	0.1516	46.84	-19.07	65.91	36.67	10.00	0.17	LINE	QP
3	13.9146	37.32	-12.68	50.00	26.60	10.30	0.42	LINE	Average
4	13.9146	45.96	-14.04	60.00	35.24	10.30	0.42	LINE	QP
5	15.5523	39.83	-10.17	50.00	29.06	10.33	0.44	LINE	Average
6	15.5523	46.70	-13.30	60.00	35.93	10.33	0.44	LINE	QP
7	17.3826	38.93	-11.07	50.00	28.12	10.36	0.45	LINE	Average
8	17.3826	46.23	-13.77	60.00	35.42	10.36	0.45	LINE	QP
9	21.1472	35.89	-14.11	50.00	24.99	10.41	0.49	LINE	Average
10	21.1472	42.90	-17.10	60.00	32.00	10.41	0.49	LINE	QP
11	23.1404	36.67	-13.33	50.00	25.72	10.44	0.51	LINE	Average
12	23.1404	43.49	-16.51	60.00	32.54	10.44	0.51	LINE	QP

Temperature	22°C	Humidity	54%
Test Engineer	Da Deng	Phase	Neutral
Configuration	Normal Link		

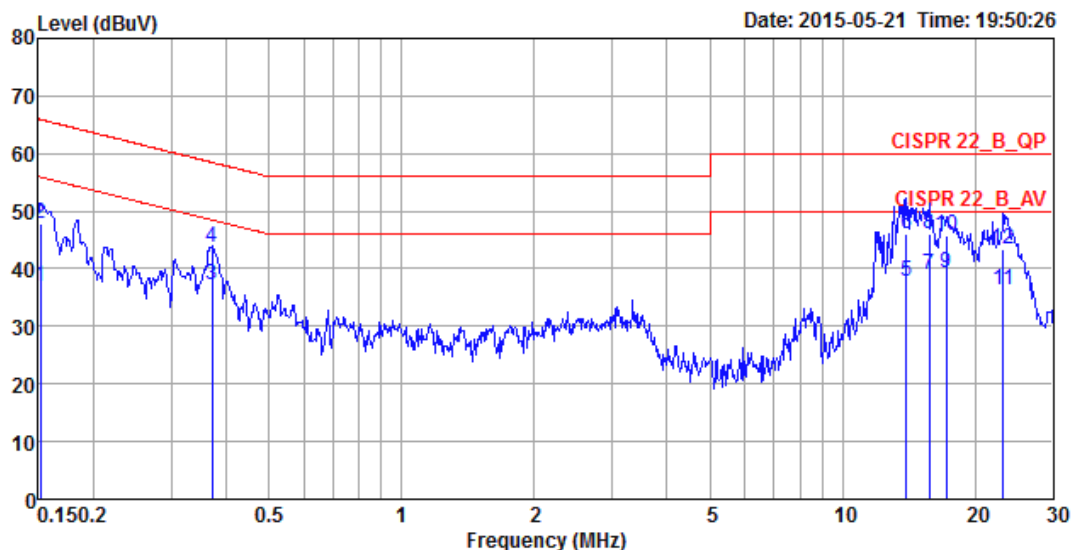

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1516	36.79	-19.12	55.91	26.62	10.00	0.17	NEUTRAL	Average
2	0.1516	47.87	-18.04	65.91	37.70	10.00	0.17	NEUTRAL	QP
3	0.3712	37.12	-11.35	48.47	26.91	10.01	0.20	NEUTRAL	Average
4	0.3712	43.74	-14.73	58.47	33.53	10.01	0.20	NEUTRAL	QP
5	13.9886	37.85	-12.15	50.00	27.13	10.30	0.42	NEUTRAL	Average
6	13.9886	45.96	-14.04	60.00	35.24	10.30	0.42	NEUTRAL	QP
7	15.7179	38.94	-11.06	50.00	28.17	10.33	0.44	NEUTRAL	Average
8	15.7179	46.20	-13.80	60.00	35.43	10.33	0.44	NEUTRAL	QP
9	17.1994	39.26	-10.74	50.00	28.46	10.35	0.45	NEUTRAL	Average
10	17.1994	45.74	-14.26	60.00	34.94	10.35	0.45	NEUTRAL	QP
11	23.1404	36.24	-13.76	50.00	25.29	10.44	0.51	NEUTRAL	Average
12	23.1404	43.51	-16.49	60.00	32.56	10.44	0.51	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	45%
Test Engineer	Magic Lai		

For non-beamforming mode


Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	20.76	16.92
	5200 MHz	20.88	17.16
	5240 MHz	20.52	17.04
802.11ac MCS0/Nss1 VHT20	5180 MHz	20.76	17.76
	5200 MHz	20.88	17.88
	5240 MHz	21.00	17.88
802.11ac MCS0/Nss1 VHT40	5190 MHz	40.60	36.20
	5230 MHz	51.00	36.40
802.11ac MCS0/Nss1 VHT80	5210 MHz	81.20	75.20

For beamforming mode

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.48	18.12
	5200 MHz	21.60	18.12
	5240 MHz	21.84	18.12
802.11ac MCS0/Nss1 VHT40	5190 MHz	41.20	36.80
	5230 MHz	57.00	37.00
802.11ac MCS0/Nss1 VHT80	5210 MHz	81.60	76.00


For non-beamforming mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2
+ Chain 3 + Chain 4 / 5180 MHz

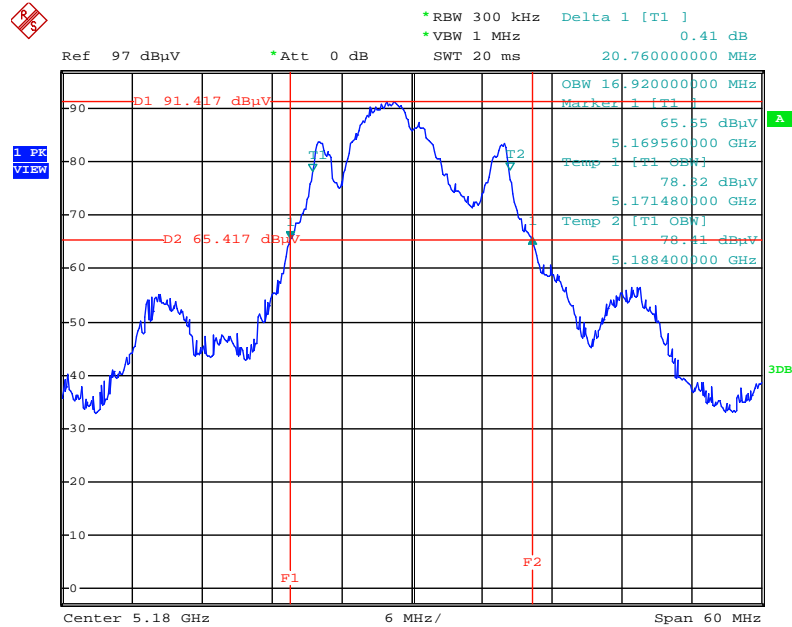


Date: 20.MAY.2015 13:52:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2
+ Chain 3 + Chain 4 / 5200 MHz

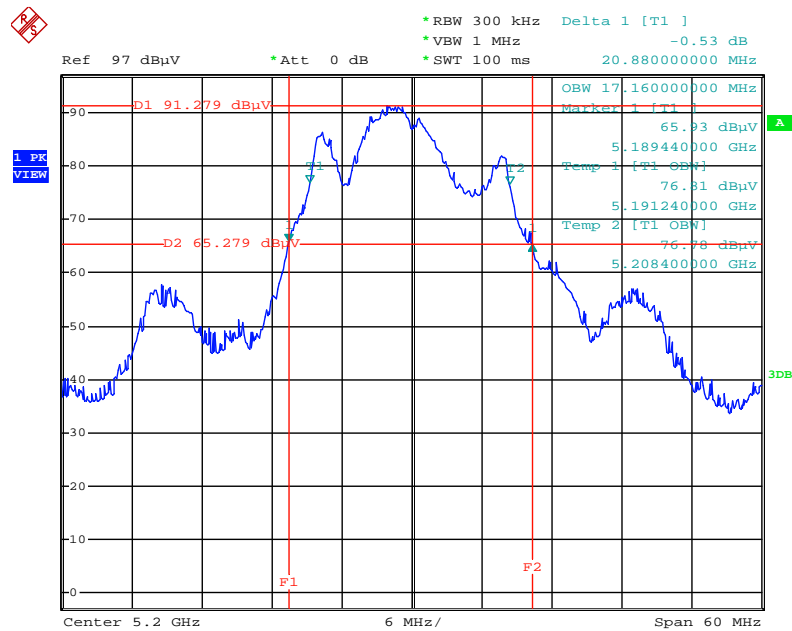


Date: 20.MAY.2015 13:52:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

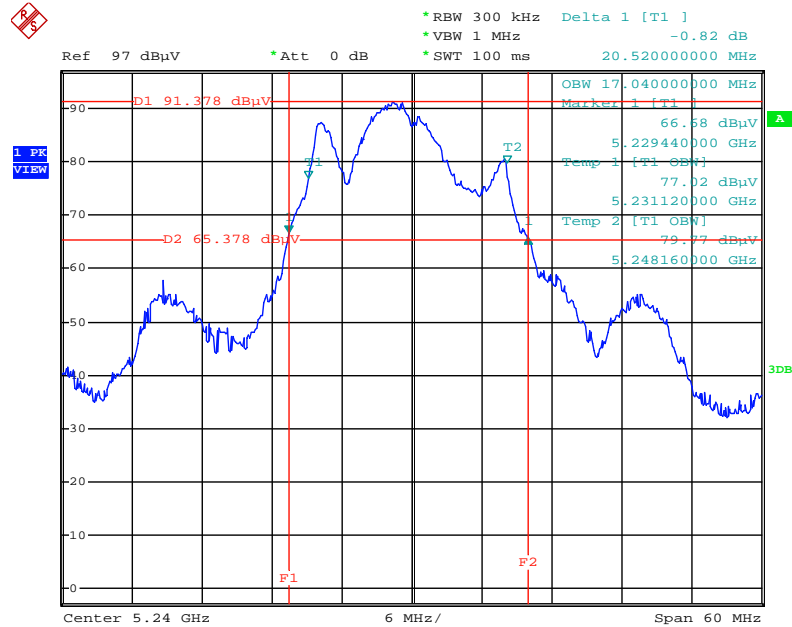


Date: 20.MAY.2015 13:53:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

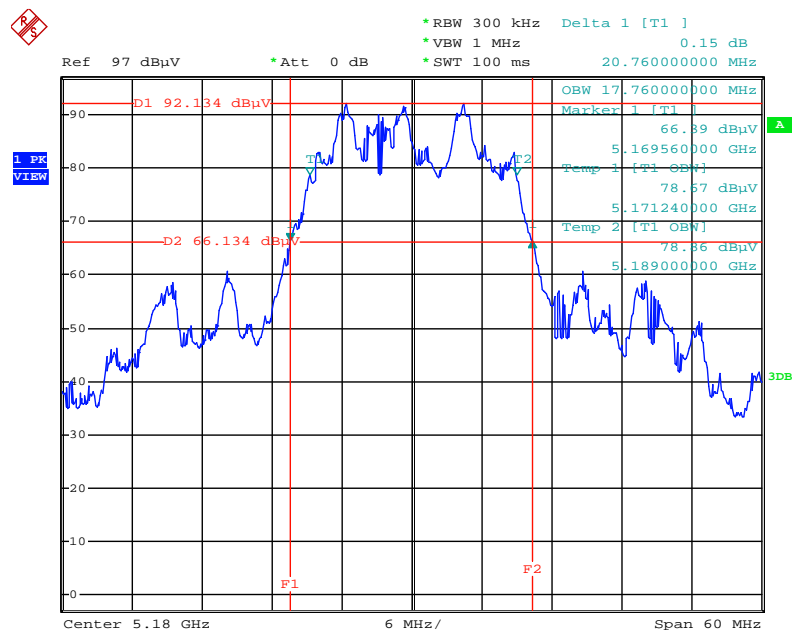


Date: 20.MAY.2015 13:55:10

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

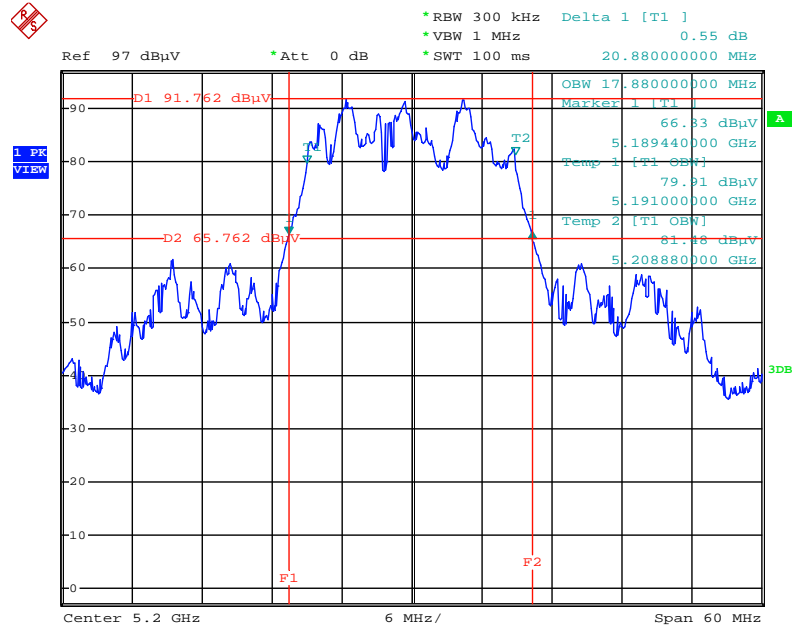


Date: 20.MAY.2015 13:56:02

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

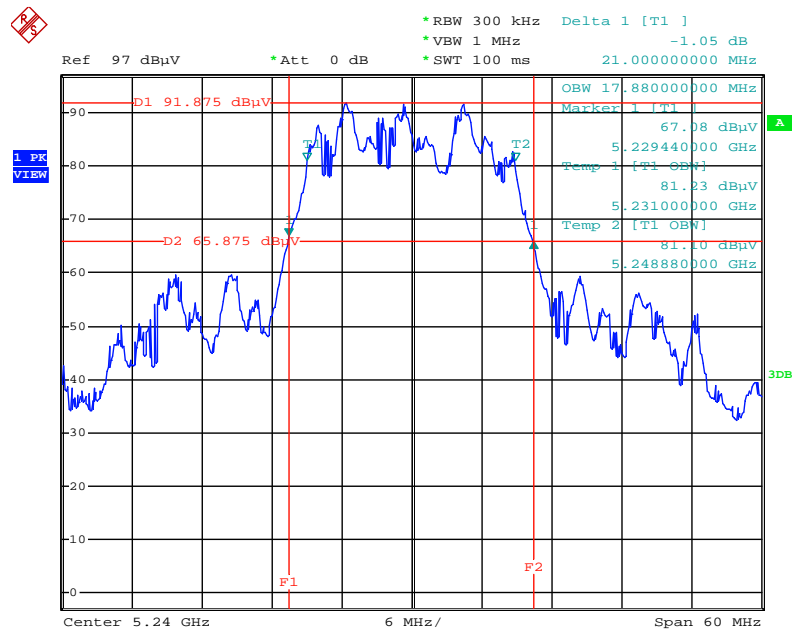


Date: 20.MAY.2015 13:56:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

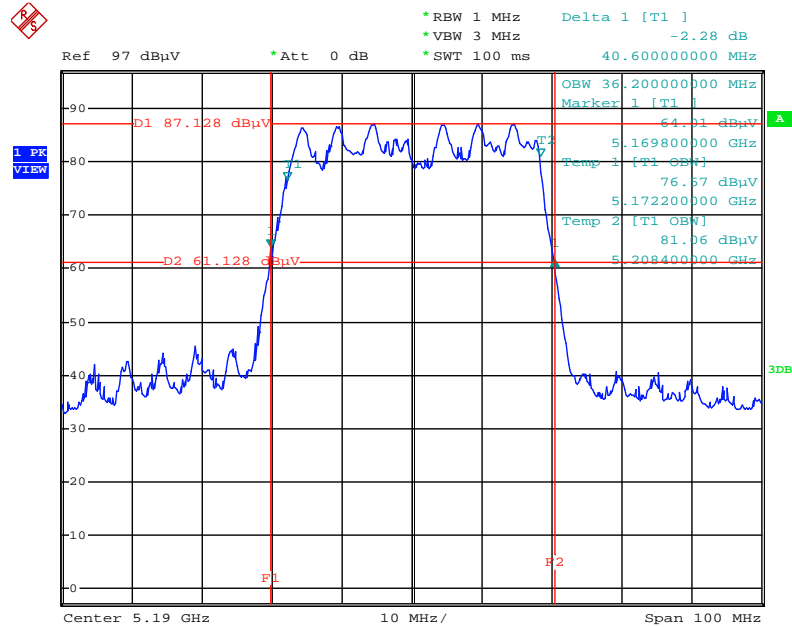


Date: 20.MAY.2015 13:57:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

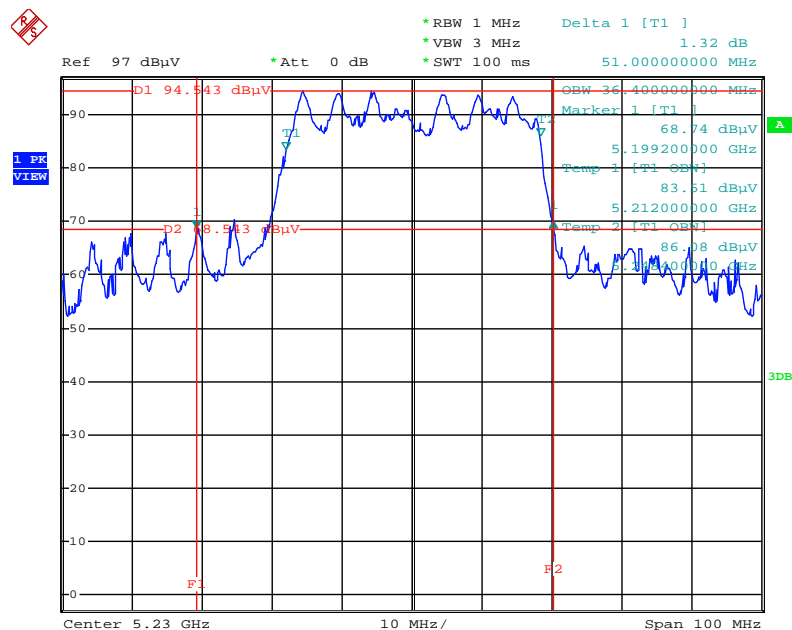

Date: 20.MAY.2015 13:58:00


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

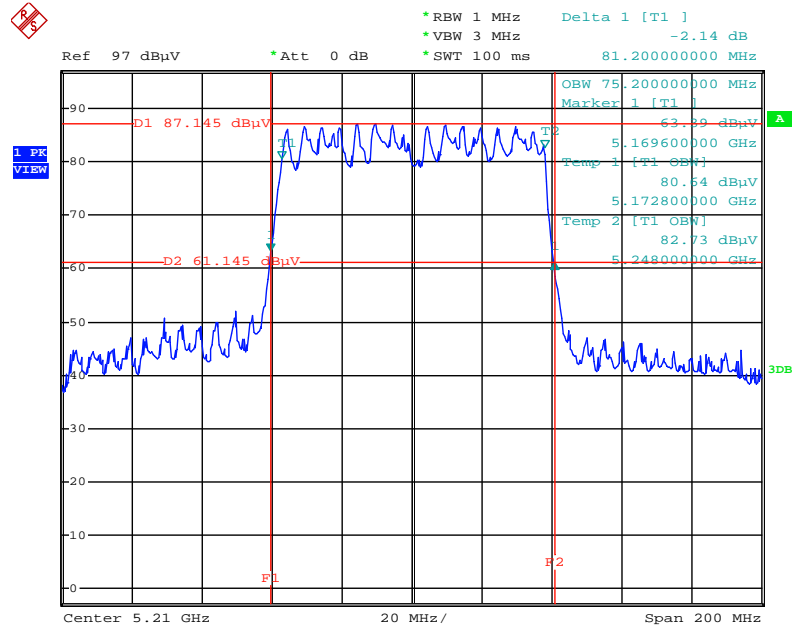

Date: 20.MAY.2015 13:59:13


For beamforming mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

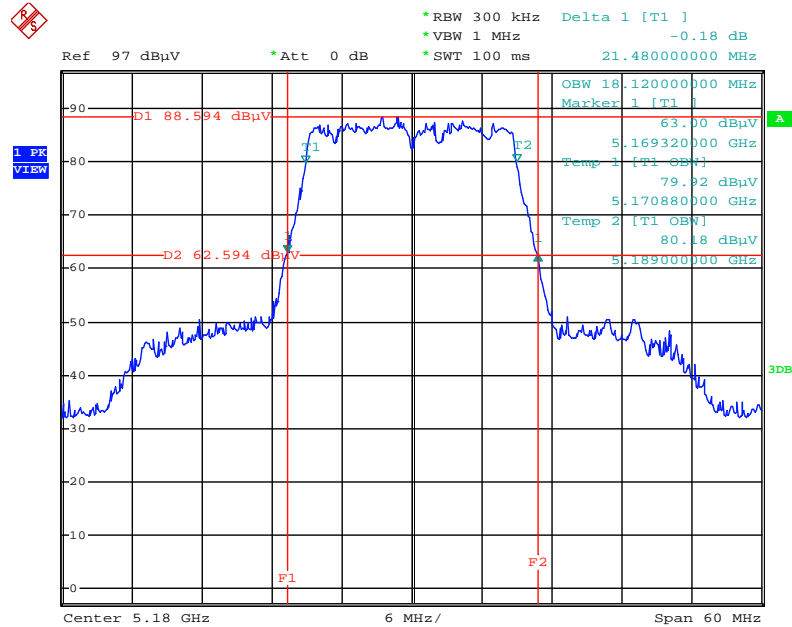


Date: 20.MAY.2015 14:09:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

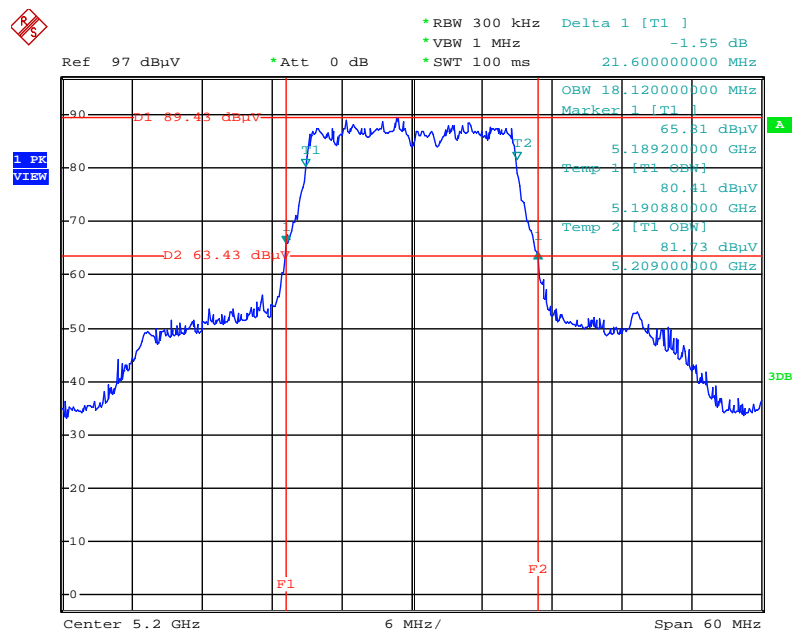


Date: 20.MAY.2015 14:09:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

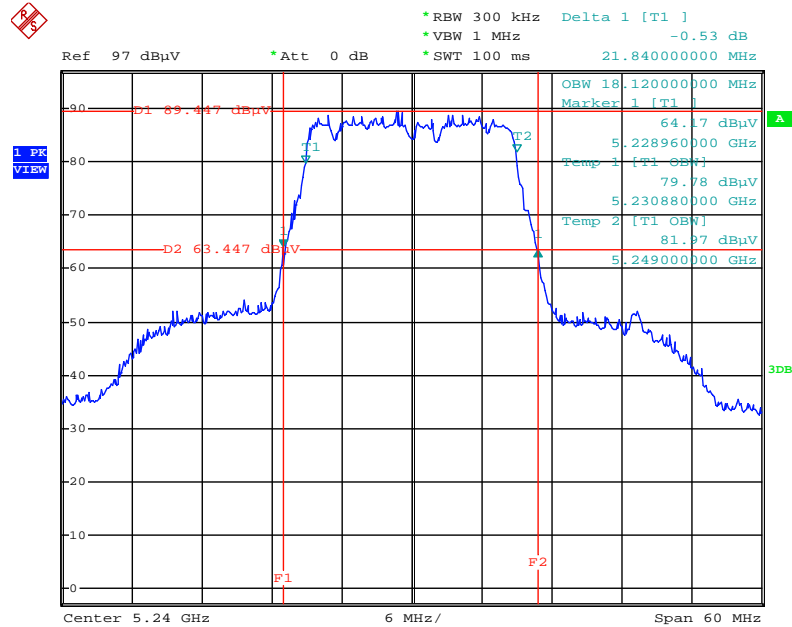


Date: 20.MAY.2015 14:10:26

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

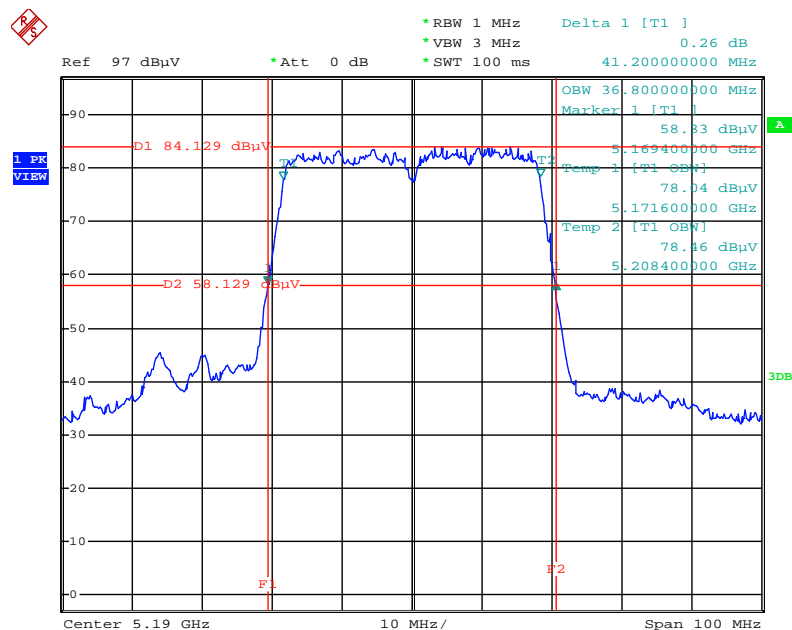


Date: 20.MAY.2015 14:12:04

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

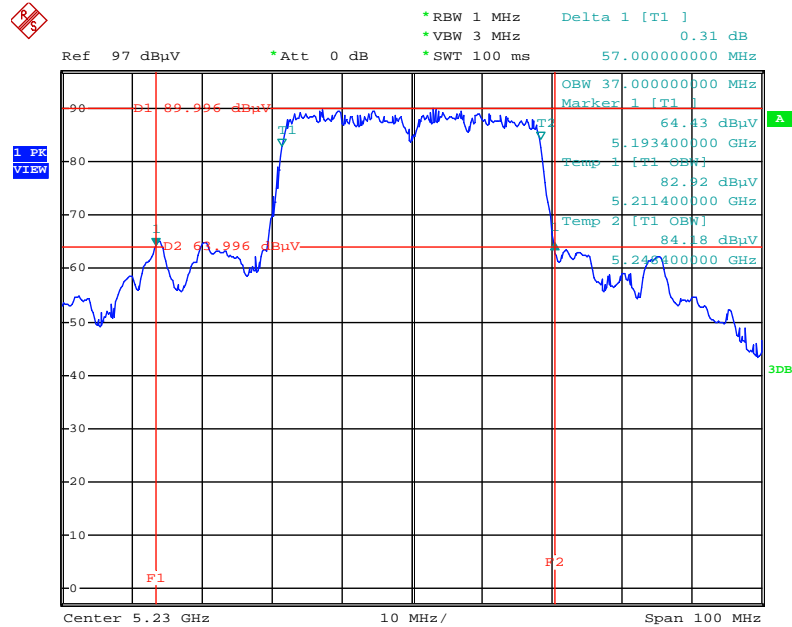

Date: 20.MAY.2015 14:12:34

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

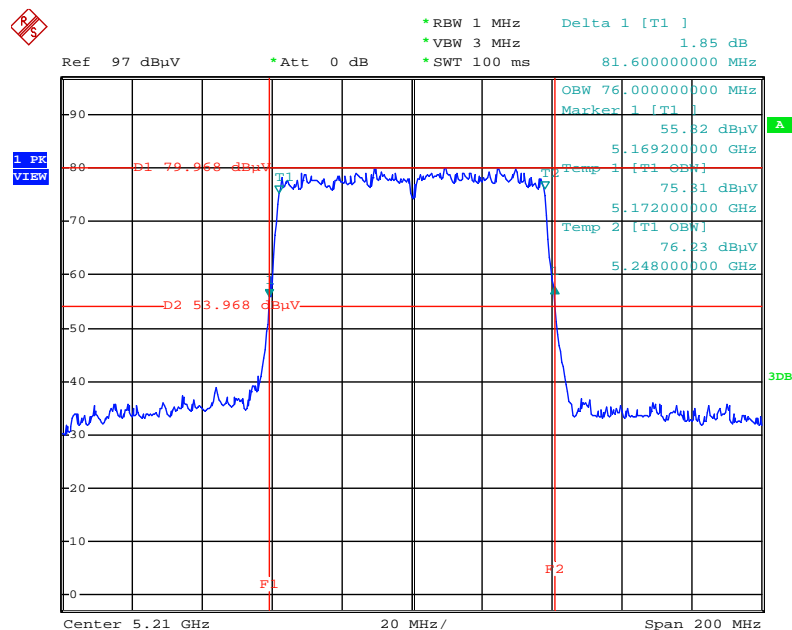

Date: 20.MAY.2015 14:13:41

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/>	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems,add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	45%
Test Engineer	Magic Lai	Test Date	May 20, 2015

For non-beamforming mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5180 MHz	22.54	22.71	23.00	22.83	28.79	30.00	Complies
	5200 MHz	22.61	22.68	22.90	22.65	28.73	30.00	Complies
	5240 MHz	22.46	22.60	22.59	22.22	28.49	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	22.51	22.64	23.13	23.01	28.85	30.00	Complies
	5200 MHz	22.45	22.62	22.86	22.34	28.59	30.00	Complies
	5240 MHz	22.48	22.58	22.66	22.32	28.53	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	17.00	17.04	17.02	16.80	22.99	30.00	Complies
	5230 MHz	23.86	23.85	23.79	23.50	29.77	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	16.21	16.36	16.43	16.32	22.35	30.00	Complies

For beamforming mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.20	21.50	21.96	21.63	27.60	28.28	Complies
	5200 MHz	21.86	21.96	22.40	21.75	28.02	28.28	Complies
	5240 MHz	21.93	22.19	22.13	21.84	28.05	28.28	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	16.16	16.41	16.36	16.30	22.33	28.28	Complies
	5230 MHz	21.97	22.11	22.10	21.55	27.96	28.28	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	16.21	16.36	16.43	16.32	22.35	28.28	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.72\text{dBi} > 6\text{dBi}$, so the limit $30 - (7.72 - 6) = 28.28\text{dBm}$

4.4. Power Spectral Density Measurement

4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

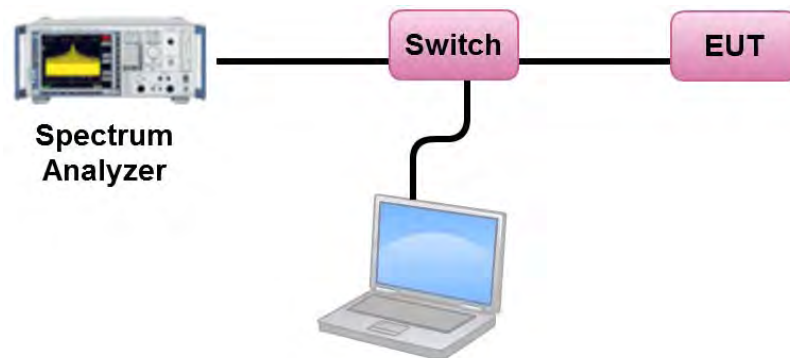

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Magic Lai	Test Date	May 20, 2015

For non-beamforming mode

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5180 MHz	15.24	15.28	Complies
	5200 MHz	15.23	15.28	Complies
	5240 MHz	15.21	15.28	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	15.00	15.28	Complies
	5200 MHz	15.10	15.28	Complies
	5240 MHz	14.98	15.28	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	6.18	15.28	Complies
	5230 MHz	13.23	15.28	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	2.58	15.28	Complies

Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.72 \text{dBi} > 6 \text{dBi}$, so the limit $17 - (7.72 - 6) = 15.28 \text{dBm/kHz}$

For beamforming mode

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5180 MHz	13.71	15.28	Complies
	5200 MHz	14.39	15.28	Complies
	5240 MHz	14.73	15.28	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	5.39	15.28	Complies
	5230 MHz	11.37	15.28	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	2.58	15.28	Complies


Note: $DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.72 \text{dBi} > 6 \text{dBi}$, so the limit $17 - (7.72 - 6) = 15.28 \text{dBm/kHz}$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

For non-beamforming mode


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

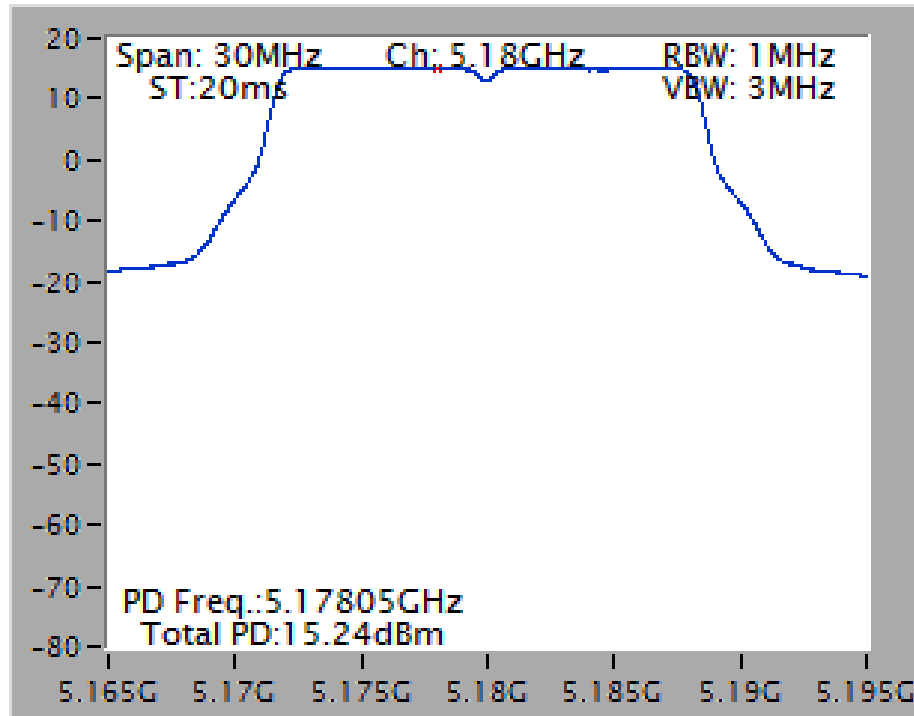


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

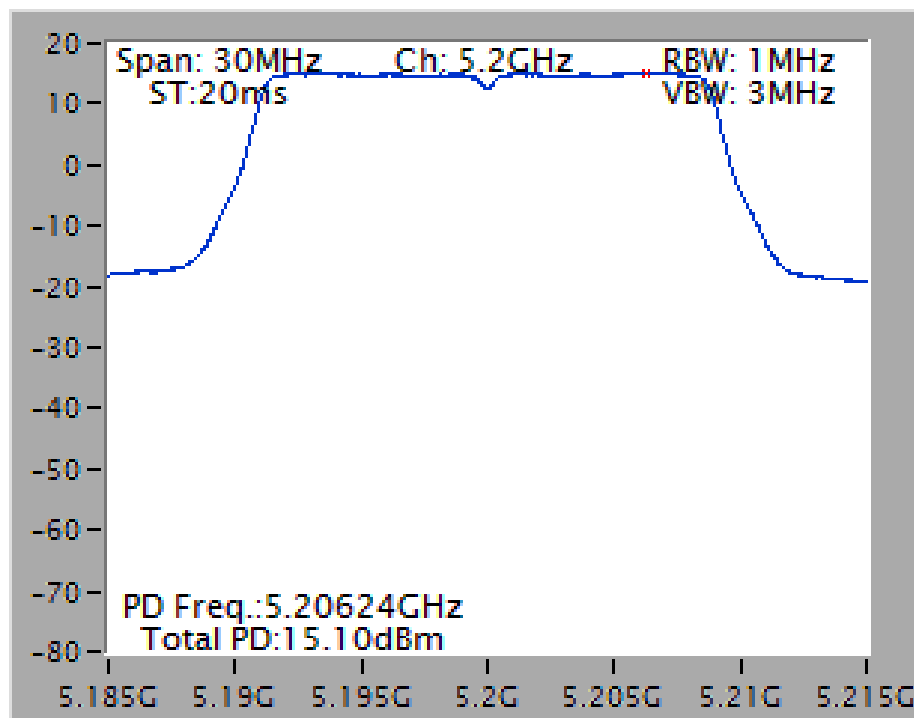

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

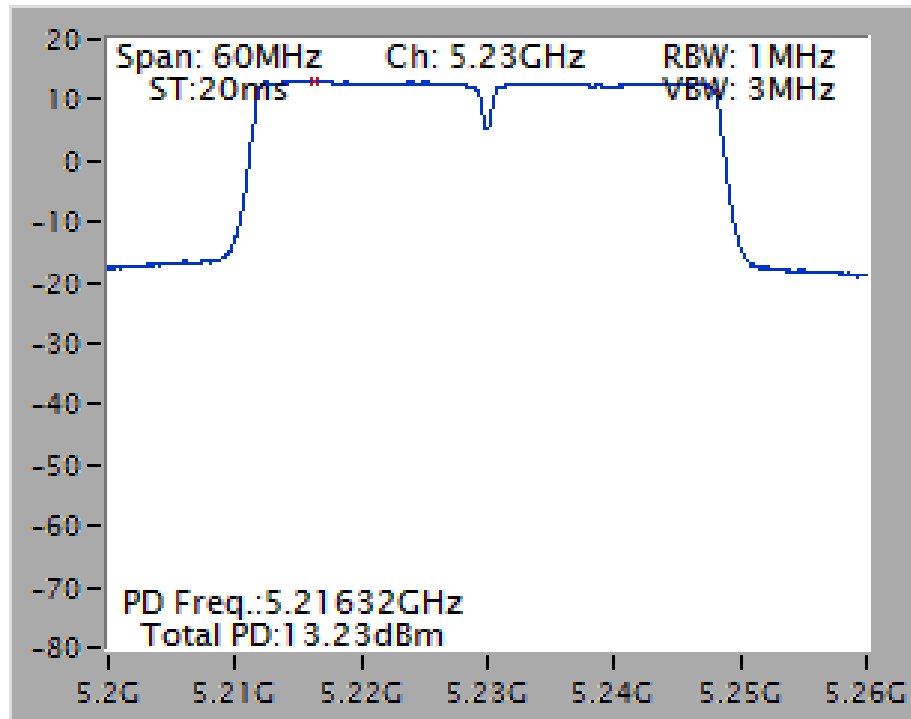


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

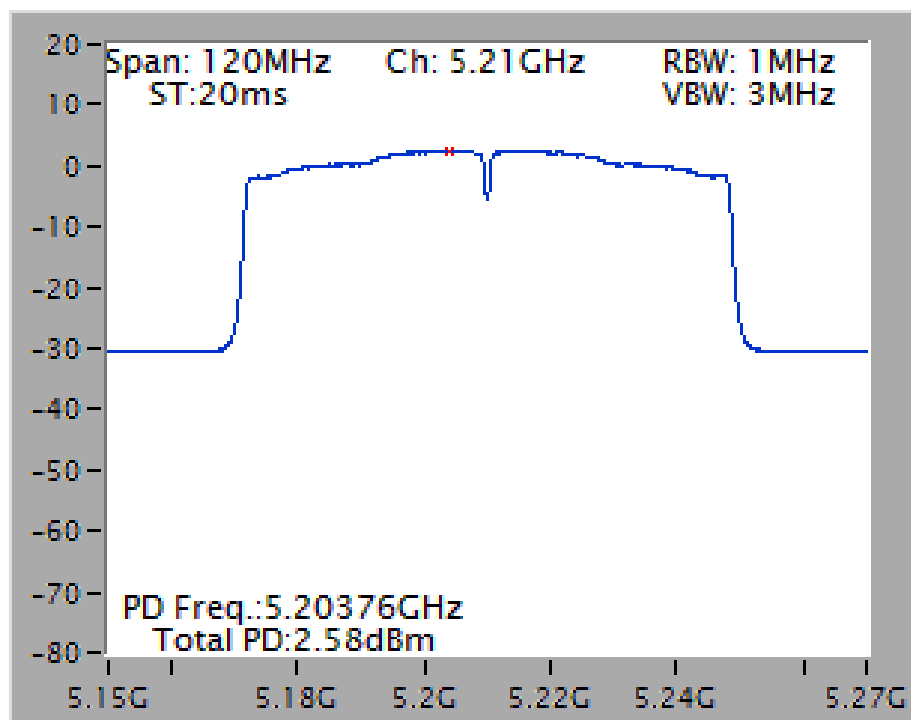


For beamforming mode


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

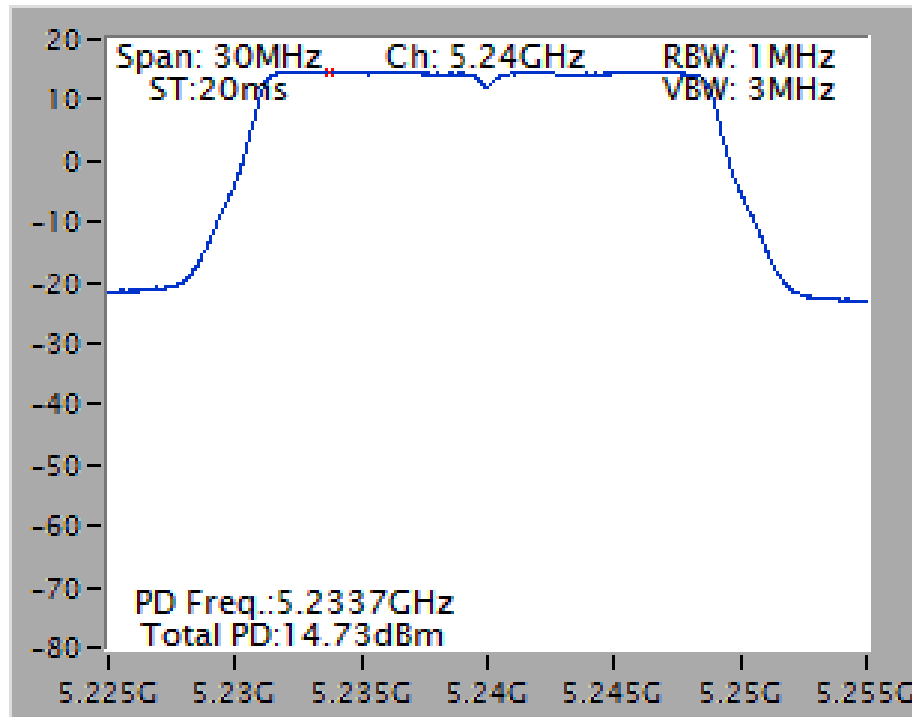

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

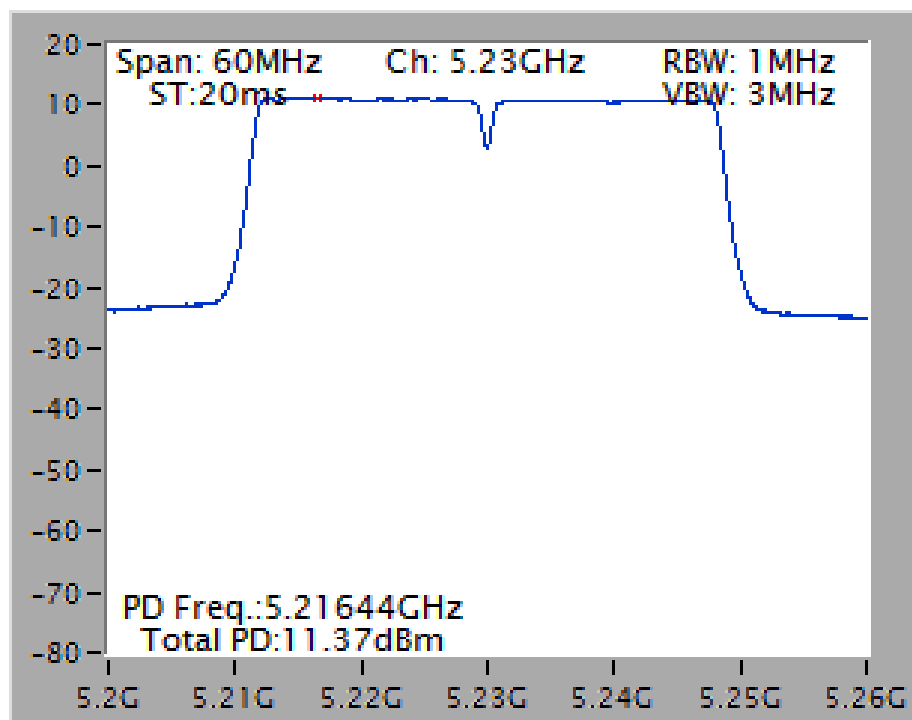

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

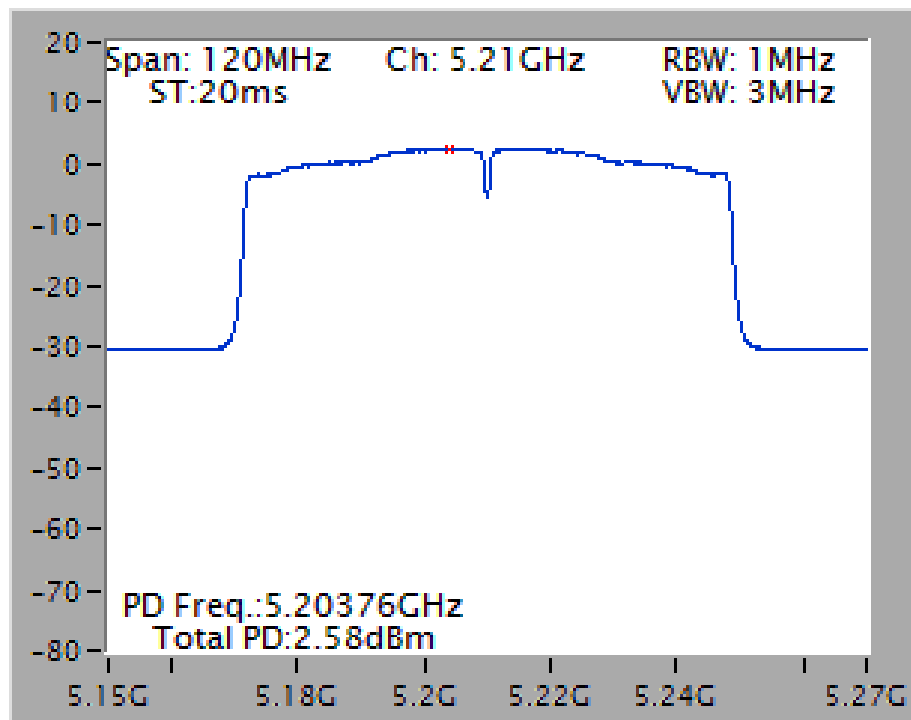

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

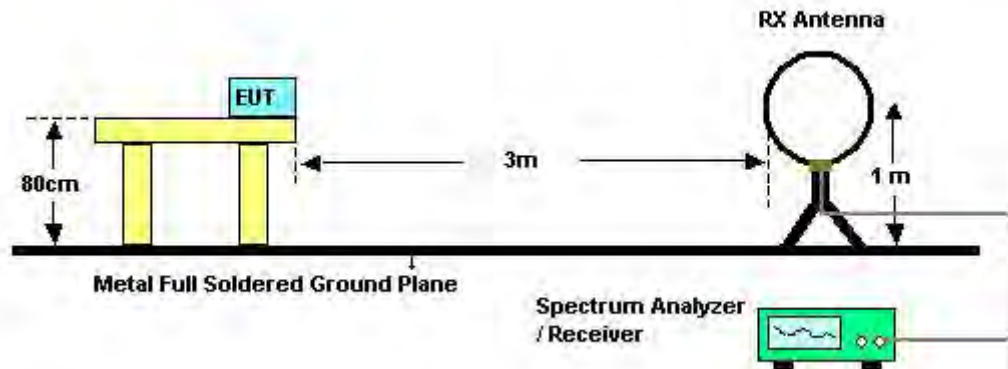

For Radiated Emissions: 30MHz~1GHz

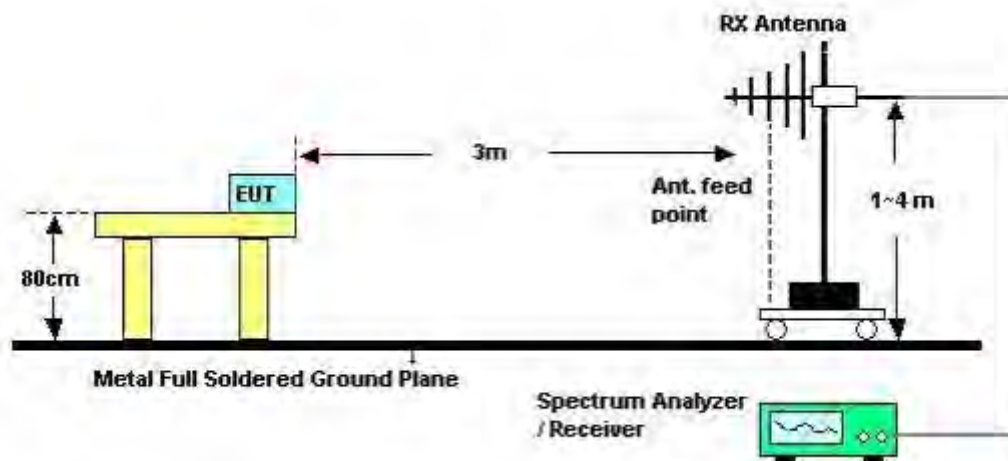

For Radiated Emissions: Above 1GHz

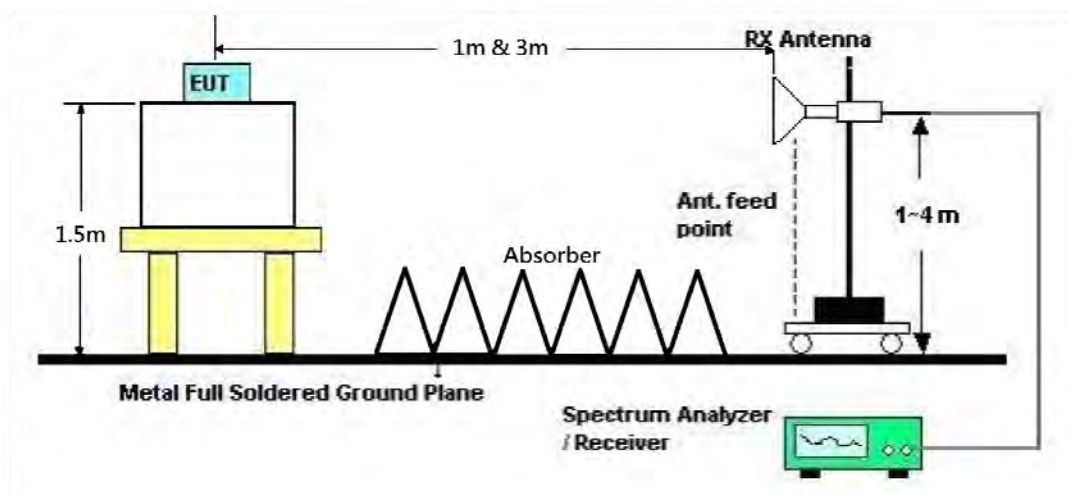

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	Normal Link
Test Date	May 20, 2015		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	Normal Link

Horizontal

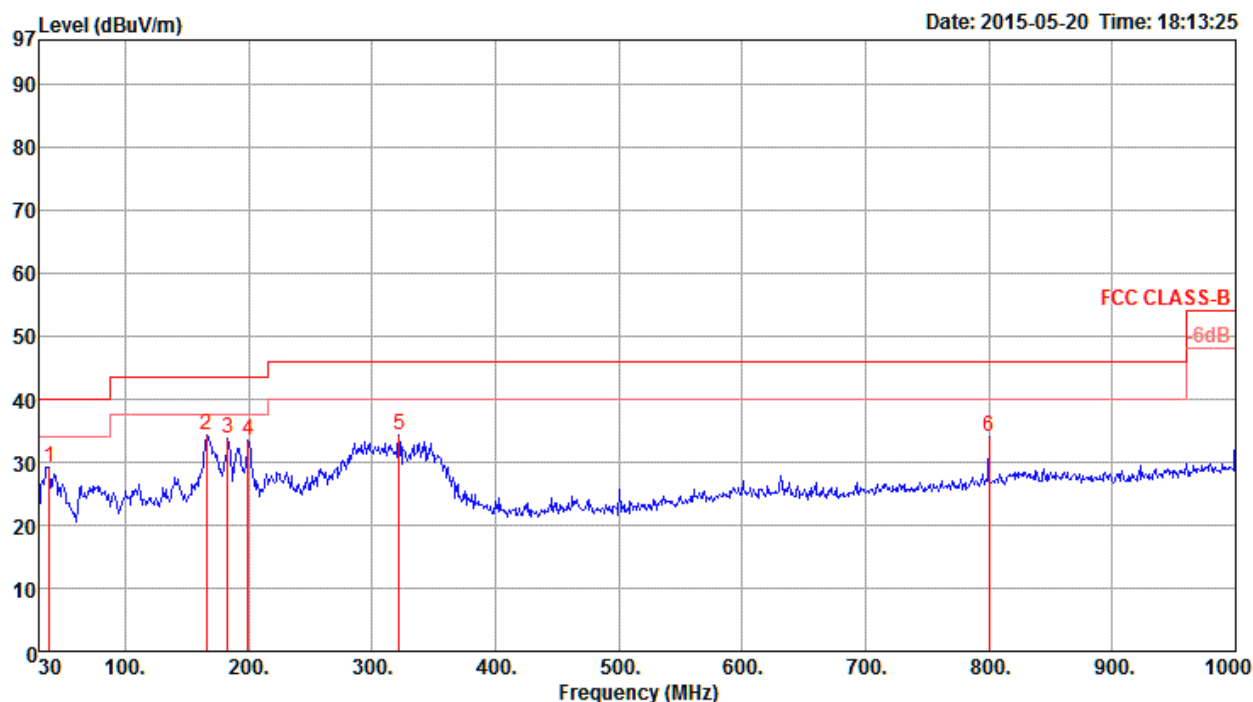

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	38.73	29.30	40.00	-10.70	42.30	0.59	14.40	27.99	0	400	Peak	HORIZONTAL
2	165.80	34.33	43.50	-9.17	50.15	1.07	10.52	27.41	0	400	Peak	HORIZONTAL
3	183.26	33.78	43.50	-9.72	49.93	1.15	10.07	27.37	0	400	Peak	HORIZONTAL
4	199.75	33.42	43.50	-10.08	49.10	1.17	10.40	27.25	0	400	Peak	HORIZONTAL
5	321.97	34.31	46.00	-11.69	45.12	1.46	14.65	26.92	0	400	Peak	HORIZONTAL
6	800.18	34.03	46.00	-11.97	37.43	2.29	21.20	26.89	0	400	Peak	HORIZONTAL

Vertical

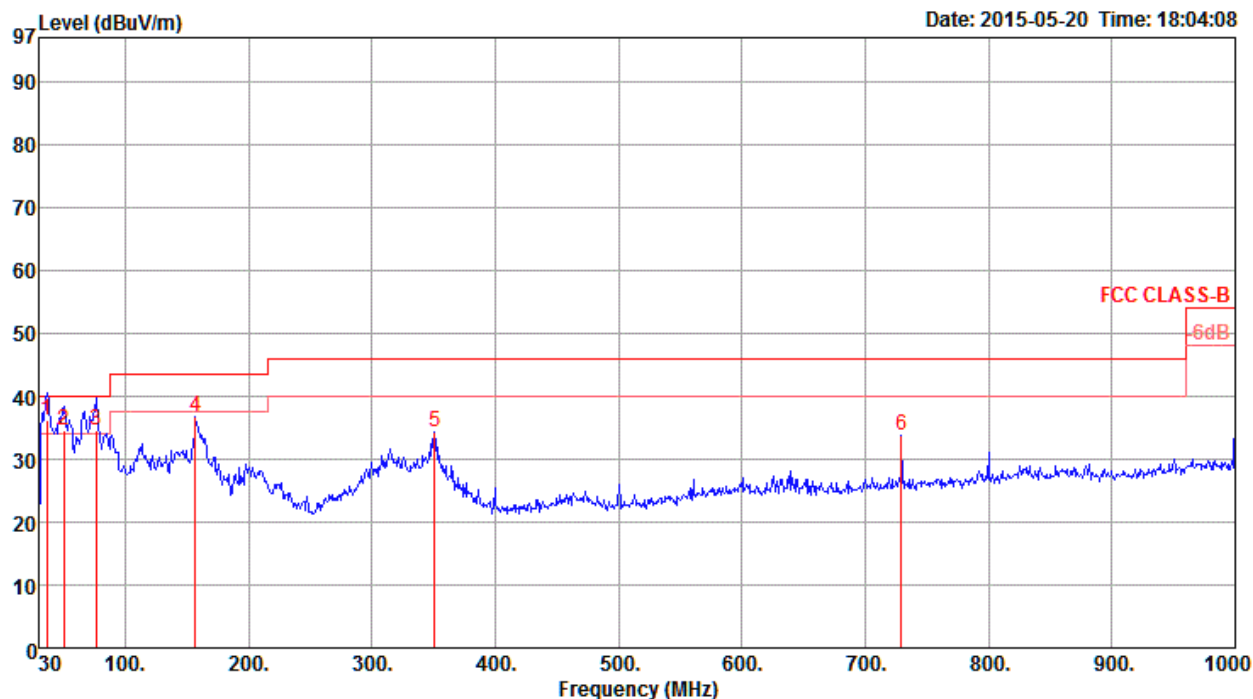

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	36.79	36.10	40.00	-3.90	47.90	0.60	15.60	28.00	349	110 QP	VERTICAL
2	50.26	34.71	40.00	-5.29	53.20	0.63	8.80	27.92	219	100 QP	VERTICAL
3	76.56	34.49	40.00	-5.51	54.33	0.76	7.31	27.91	213	104 QP	VERTICAL
4	157.07	36.73	43.50	-6.77	52.26	1.06	10.85	27.44	0	400 Peak	VERTICAL
5	351.07	34.43	46.00	-11.57	44.37	1.53	15.62	27.09	0	400 Peak	VERTICAL
6	729.37	33.77	46.00	-12.23	38.39	2.17	20.31	27.10	0	400 Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~40GHz)

For non-beamforming mode

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15538.32	60.80	74.00	-13.20	43.47	12.58	38.45	33.70	84	150	Peak	HORIZONTAL
2	15538.96	47.88	54.00	-6.12	30.55	12.58	38.45	33.70	84	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15534.24	47.83	54.00	-6.17	30.50	12.58	38.45	33.70	106	150	Average	VERTICAL
2	15547.20	60.29	74.00	-13.71	42.98	12.58	38.43	33.70	106	150	Peak	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	15592.20	53.35	74.00	-20.65	36.14	12.58	38.38	33.75	319	151	Peak	HORIZONTAL
2	15596.64	65.81	74.00	-8.19	48.62	12.58	38.36	33.75	319	151	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm		
1	10392.64	48.14	54.00	-5.86	32.77	10.14	38.98	33.75	176	148	Average	VERTICAL
2	10394.32	62.05	74.00	-11.95	46.68	10.14	38.98	33.75	176	148	Peak	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15711.44	47.75	54.00	-6.25	30.85	12.57	38.21	33.88	262	150 Average	HORIZONTAL
2	15724.32	60.89	74.00	-13.11	44.01	12.57	38.19	33.88	262	150 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15709.52	61.42	74.00	-12.58	44.52	12.57	38.21	33.88	155	171 Peak	VERTICAL
2	15722.32	48.56	54.00	-5.44	31.68	12.57	38.19	33.88	155	171 Average	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15521.28	60.07	74.00	-13.93	42.69	12.58	38.48	33.68	127	150 Peak	HORIZONTAL
2	15528.16	47.08	54.00	-6.92	29.75	12.58	38.45	33.70	127	150 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15531.20	47.94	54.00	-6.06	30.61	12.58	38.45	33.70	35	150 Average	VERTICAL
2	15535.76	60.81	74.00	-13.19	43.48	12.58	38.45	33.70	35	150 Peak	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15595.60	61.54	74.00	-12.46	44.35	12.58	38.36	33.75	250	150	Peak	HORIZONTAL
2	15601.36	48.22	54.00	-5.78	31.06	12.58	38.36	33.78	250	150	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15598.74	61.85	74.00	-12.15	44.66	12.58	38.36	33.75	297	150	Peak	VERTICAL
2	15604.18	48.53	54.00	-5.47	31.37	12.58	38.36	33.78	297	150	Average	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15722.60	47.42	54.00	-6.58	30.54	12.57	38.19	33.88	31	150	Average	HORIZONTAL
2	15724.00	60.85	74.00	-13.15	43.97	12.57	38.19	33.88	31	150	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15720.00	47.57	54.00	-6.43	30.69	12.57	38.19	33.88	127	150	Average	VERTICAL
2	15720.14	60.15	74.00	-13.85	43.27	12.57	38.19	33.88	127	150	Peak	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15561.44	62.47	74.00	-11.53	45.22	12.58	38.40	33.73	245	100	Peak	HORIZONTAL
2	15565.08	48.57	54.00	-5.43	31.32	12.58	38.40	33.73	245	100	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15560.28	61.40	74.00	-12.60	44.12	12.58	38.43	33.73	196	100	Peak	VERTICAL
2	15574.44	48.54	54.00	-5.46	31.31	12.58	38.40	33.75	196	100	Average	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15689.44	47.41	54.00	-6.59	30.45	12.58	38.23	33.85	161	101	Average	HORIZONTAL
2	15696.60	61.32	74.00	-12.68	44.38	12.58	38.21	33.85	161	101	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15682.88	47.51	54.00	-6.49	30.55	12.58	38.23	33.85	131	100	Average	VERTICAL
2	15691.16	60.66	74.00	-13.34	43.70	12.58	38.23	33.85	131	100	Peak	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 20, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15622.00	48.86	54.00	-5.14	31.73	12.58	38.33	33.78	327	100	Average	HORIZONTAL
2	15625.92	61.78	74.00	-12.22	44.67	12.58	38.33	33.80	327	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15622.04	48.96	54.00	-5.04	31.83	12.58	38.33	33.78	279	100	Average	VERTICAL
2	15626.12	62.56	74.00	-11.44	45.45	12.58	38.33	33.80	279	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For beamforming mode

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15538.16	61.95	74.00	-12.05	44.62	12.58	38.45	33.70	250	100 Peak	HORIZONTAL
2	15539.56	48.45	54.00	-5.55	31.12	12.58	38.45	33.70	250	100 Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15535.80	61.53	74.00	-12.47	44.20	12.58	38.45	33.70	136	100 Peak	VERTICAL
2	15538.82	48.32	54.00	-5.68	30.99	12.58	38.45	33.70	136	100 Average	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15595.80	47.87	54.00	-6.13	30.68	12.58	38.36	33.75	227	100 Average	HORIZONTAL
2	15603.76	61.44	74.00	-12.56	44.28	12.58	38.36	33.78	227	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	deg	cm	
1	15598.30	61.13	74.00	-12.87	43.94	12.58	38.36	33.75	324	100 Peak	VERTICAL
2	15600.02	47.85	54.00	-6.15	30.69	12.58	38.36	33.78	324	100 Average	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15716.42	46.92	54.00	-7.08	30.04	12.57	38.19	33.88	157	100 Average	HORIZONTAL
2	15718.28	60.79	74.00	-13.21	43.91	12.57	38.19	33.88	157	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15715.54	60.29	74.00	-13.71	43.41	12.57	38.19	33.88	64	100 Peak	VERTICAL
2	15718.94	47.37	54.00	-6.63	30.49	12.57	38.19	33.88	64	100 Average	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15570.18	48.14	54.00	-5.86	30.89	12.58	38.40	33.73	231	100 Average	HORIZONTAL
2	15570.84	61.09	74.00	-12.91	43.84	12.58	38.40	33.73	231	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15565.00	48.32	54.00	-5.68	31.07	12.58	38.40	33.73	115	100 Average	VERTICAL
2	15568.66	61.18	74.00	-12.82	43.93	12.58	38.40	33.73	115	100 Peak	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15685.34	47.17	54.00	-6.83	30.21	12.58	38.23	33.85	176	100 Average	HORIZONTAL
2	15694.66	60.65	74.00	-13.35	43.69	12.58	38.23	33.85	176	100 Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	15685.54	47.37	54.00	-6.63	30.41	12.58	38.23	33.85	285	100 Average	VERTICAL
2	15690.00	60.82	74.00	-13.18	43.86	12.58	38.23	33.85	285	100 Peak	VERTICAL

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 20, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15630.04	48.64	54.00	-5.36	31.55	12.58	38.31	33.80	81	100	Average	HORIZONTAL
2	15630.36	61.70	74.00	-12.30	44.61	12.58	38.31	33.80	81	100	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	15627.98	47.57	54.00	-6.43	30.46	12.58	38.33	33.80	220	100	Average	VERTICAL
2	15631.04	60.99	74.00	-13.01	43.90	12.58	38.31	33.80	220	100	Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

- The test procedure is the same as section 4.5.3.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming mode

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5132.40	67.00	74.00	-7.00	59.79	6.17	34.09	33.05	271	199 Peak	HORIZONTAL
2	5133.60	53.83	54.00	-0.17	46.62	6.17	34.09	33.05	271	199 Average	HORIZONTAL
3	5173.20	110.81			103.49	6.24	34.13	33.05	271	199 Average	HORIZONTAL
4	5174.00	121.21			113.86	6.24	34.16	33.05	271	199 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5113.00	53.93	54.00	-0.07	46.78	6.14	34.06	33.05	270	198 Average	HORIZONTAL
2	5114.20	67.95	74.00	-6.05	60.80	6.14	34.06	33.05	270	198 Peak	HORIZONTAL
3	5194.00	113.23			105.86	6.24	34.18	33.05	270	198 Average	HORIZONTAL
4	5194.60	123.98			116.61	6.24	34.18	33.05	270	198 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5143.40	63.21	74.00	-10.79	55.98	6.17	34.11	33.05	276	203 Peak	HORIZONTAL
2	5145.20	50.33	54.00	-3.67	43.06	6.21	34.11	33.05	276	203 Average	HORIZONTAL
3	5234.00	113.59			106.11	6.30	34.23	33.05	276	203 Average	HORIZONTAL
4	5234.60	124.00			116.52	6.30	34.23	33.05	276	203 Peak	HORIZONTAL
5	5355.80	47.48	54.00	-6.52	39.68	6.47	34.39	33.06	276	203 Average	HORIZONTAL
6	5378.60	60.80	74.00	-13.20	52.92	6.50	34.44	33.06	276	203 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableLoss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5146.00	53.91	54.00	-0.09	46.64	6.21	34.11	33.05	270	172	Average	HORIZONTAL
2	5146.40	68.16	74.00	-5.84	60.89	6.21	34.11	33.05	270	172	Peak	HORIZONTAL
3	5185.60	120.85			113.50	6.24	34.16	33.05	270	172	Peak	HORIZONTAL
4	5186.00	109.83			102.48	6.24	34.16	33.05	270	172	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5116.00	66.03	74.00	-7.97	58.88	6.14	34.06	33.05	271	170	Peak	HORIZONTAL
2	5126.00	53.86	54.00	-0.14	46.65	6.17	34.09	33.05	271	170	Average	HORIZONTAL
3	5195.60	123.42			116.02	6.27	34.18	33.05	271	170	Peak	HORIZONTAL
4	5196.00	112.59			105.19	6.27	34.18	33.05	271	170	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5145.20	62.43	74.00	-11.57	55.16	6.21	34.11	33.05	268	174	Peak	HORIZONTAL
2	5150.00	50.59	54.00	-3.41	43.32	6.21	34.11	33.05	268	174	Average	HORIZONTAL
3	5236.40	112.02			104.54	6.30	34.23	33.05	268	174	Average	HORIZONTAL
4	5241.20	123.06			115.58	6.30	34.23	33.05	268	174	Peak	HORIZONTAL
5	5350.40	47.49	54.00	-6.51	39.69	6.47	34.39	33.06	268	174	Average	HORIZONTAL
6	5380.40	60.43	74.00	-13.57	52.55	6.50	34.44	33.06	268	174	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5146.00	53.66	54.00	-0.34	46.39	6.21	34.11	33.05	271	174 Average	HORIZONTAL
2	5146.80	65.54	74.00	-8.46	58.27	6.21	34.11	33.05	271	174 Peak	HORIZONTAL
3	5196.00	103.97			96.57	6.27	34.18	33.05	271	174 Average	HORIZONTAL
4	5196.40	114.14			106.74	6.27	34.18	33.05	271	174 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5146.00	53.89	54.00	-0.11	46.62	6.21	34.11	33.05	273	177 Average	HORIZONTAL
2	5150.00	65.98	74.00	-8.02	58.71	6.21	34.11	33.05	273	177 Peak	HORIZONTAL
3	5225.80	110.31			102.83	6.30	34.23	33.05	273	177 Average	HORIZONTAL
4	5236.60	120.12			112.64	6.30	34.23	33.05	273	177 Peak	HORIZONTAL
5	5350.00	48.30	54.00	-5.70	40.50	6.47	34.39	33.06	273	177 Average	HORIZONTAL
6	5360.80	59.79	74.00	-14.21	51.97	6.47	34.41	33.06	273	177 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 20, 2015		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5149.00	53.84	54.00	-0.16	46.57	6.21	34.11	33.05	284	175 Average	HORIZONTAL
2	5149.00	65.56	74.00	-8.44	58.29	6.21	34.11	33.05	284	175 Peak	HORIZONTAL
3	5204.00	109.56			102.16	6.27	34.18	33.05	284	175 Peak	HORIZONTAL
4	5214.00	100.80			93.38	6.27	34.20	33.05	284	175 Average	HORIZONTAL
5	5411.00	49.85	54.00	-4.15	41.92	6.53	34.46	33.06	284	175 Average	HORIZONTAL
6	5454.00	61.36	74.00	-12.64	53.29	6.60	34.53	33.06	284	175 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

For beamforming mode

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5103.20	65.65	74.00	-8.35	58.52	6.14	34.04	33.05	268	176	Peak	HORIZONTAL
2	5148.00	53.75	54.00	-0.25	46.48	6.21	34.11	33.05	268	176	Average	HORIZONTAL
3	5172.00	111.17			103.85	6.24	34.13	33.05	268	176	Average	HORIZONTAL
4	5176.00	121.05			113.70	6.24	34.16	33.05	268	176	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5116.40	53.69	54.00	-0.31	46.54	6.14	34.06	33.05	263	174	Average	HORIZONTAL
2	5117.20	66.54	74.00	-7.46	59.39	6.14	34.06	33.05	263	174	Peak	HORIZONTAL
3	5197.20	111.95			104.55	6.27	34.18	33.05	263	174	Average	HORIZONTAL
4	5197.20	121.82			114.42	6.27	34.18	33.05	263	174	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	5126.60	63.39	74.00	-10.61	56.18	6.17	34.09	33.05	266	169	Peak	HORIZONTAL
2	5150.00	52.23	54.00	-1.77	44.96	6.21	34.11	33.05	266	169	Average	HORIZONTAL
3	5233.40	113.90			106.42	6.30	34.23	33.05	266	169	Average	HORIZONTAL
4	5238.80	123.81			116.33	6.30	34.23	33.05	266	169	Peak	HORIZONTAL
5	5352.20	48.06	54.00	-5.94	40.26	6.47	34.39	33.06	266	169	Average	HORIZONTAL
6	5354.60	60.68	74.00	-13.32	52.88	6.47	34.39	33.06	266	169	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 17, 2015		

Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5145.20	67.15	74.00	-6.85	59.88	6.21	34.11	33.05	267	176 Peak	HORIZONTAL
2	5148.80	53.93	54.00	-0.07	46.66	6.21	34.11	33.05	267	176 Average	HORIZONTAL
3	5172.80	112.72			105.40	6.24	34.13	33.05	267	176 Peak	HORIZONTAL
4	5175.60	103.02			95.67	6.24	34.16	33.05	267	176 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5146.60	53.99	54.00	-0.01	46.72	6.21	34.11	33.05	264	173 Average	HORIZONTAL
2	5150.00	66.70	74.00	-7.30	59.43	6.21	34.11	33.05	264	173 Peak	HORIZONTAL
3	5235.40	120.14			112.66	6.30	34.23	33.05	264	173 Peak	HORIZONTAL
4	5237.20	110.20			102.72	6.30	34.23	33.05	264	173 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	60%
Test Engineer	Akina Chiu	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	May 20, 2015		

Channel 42

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	5147.00	66.19	74.00	-7.81	58.92	6.21	34.11	33.05	291	151 Peak	HORIZONTAL
2	5150.00	53.90	54.00	-0.10	46.63	6.21	34.11	33.05	291	151 Average	HORIZONTAL
3	5173.00	111.65			104.33	6.24	34.13	33.05	291	151 Peak	HORIZONTAL
4	5241.00	100.83			93.35	6.30	34.23	33.05	291	151 Average	HORIZONTAL
5	5443.00	62.08	74.00	-11.92	54.07	6.56	34.51	33.06	291	151 Peak	HORIZONTAL
6	5449.00	49.26	54.00	-4.74	41.23	6.56	34.53	33.06	291	151 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f)/f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.7.4. Test Setup Layout

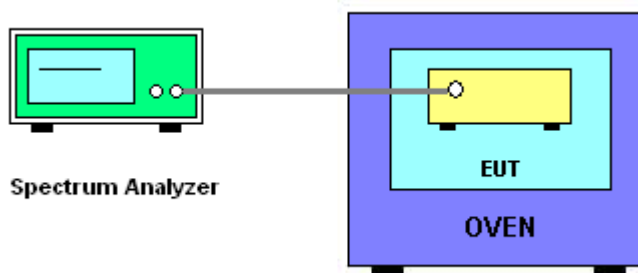

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	45%
Test Engineer	Magic Lai	Test Date	May 20, 2015

Mode: 20 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200 MHz
126.50	5199.9956
110.00	5199.9956
93.50	5199.9965
Max. Deviation (MHz)	0.0044
Max. Deviation (ppm)	0.85

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200 MHz
0	5199.9986
10	5199.9956
20	5199.9956
30	5199.9965
40	5199.9946
Max. Deviation (MHz)	0.0054
Max. Deviation (ppm)	1.04

Mode: 40 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5190 MHz
126.50	5189.9956
110.00	5189.9955
93.50	5189.9966
Max. Deviation (MHz)	0.00454
Max. Deviation (ppm)	0.87

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5190 MHz
0	5189.9956
10	5189.9956
20	5189.9956
30	5189.9946
40	5189.9956
Max. Deviation (MHz)	0.00540
Max. Deviation (ppm)	1.04

Mode: 80 MHz

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5210 MHz
126.50	5209.9956
110.00	5209.9956
93.50	5209.9945
Max. Deviation (MHz)	0.00550
Max. Deviation (ppm)	1.06

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5210 MHz
0	5209.9946
10	5209.9946
20	5209.9956
30	5209.9960
40	5209.9976
Max. Deviation (MHz)	0.00540
Max. Deviation (ppm)	1.04

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 17, 2014	Conduction (CO02-CB)
MXE EMI Receiver	Agilent	N9038A	MY52260140	9kHz ~ 30MHz	Jan. 13, 2015	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz ~ 30MHz	Dec. 01, 2014	Conduction (CO02-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO02-CB)
Pulse Limiter	Schwarzbeck	VTSD 9561F	9561-F073	9kHz ~ 30MHz	Sep. 26, 2014	Conduction (CO02-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Jan. 21, 2015	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m ~ 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Thermometer	HTC-1	HTC-1	TP-1	-50°C~70°C	Mar. 11, 2015	Radiation (03CH01-CB)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz ~ 30 MHz	Jul. 28, 2014	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)
Thermometer	HTC-1	HTC-1	TP-8	-50°C~70°C	Mar. 05, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%