

# Testing Report

Customer Name: Hangzhou BroadLink Technology Co.,Ltd


Product Name: RF module

Sample Model: BL3394-P

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std149-1979*

Issue Date: 2023.8.22

|                 |                  |
|-----------------|------------------|
| Engineer: Zkm's | Date: 2023.08.21 |
| Auditor: Eason  | Date: 2023.08.22 |
| Approver: Jaron | Date: 2023.08.22 |



## Version

| Version No. | Date      | Description                   | Formulate | Approval |
|-------------|-----------|-------------------------------|-----------|----------|
| A0          | 2023.8.22 | For the first time, formulate | Zkris     | Eason    |
|             |           |                               |           |          |
|             |           |                               |           |          |

## Contents


|                                                       |    |
|-------------------------------------------------------|----|
| 1.General Information .....                           | 3  |
| 1.1 General information of testing institutions ..... | 3  |
| 1.2 Testing principle .....                           | 3  |
| 1.3 Test equipment .....                              | 4  |
| 1.4 Test environment .....                            | 4  |
| 1.5 Statement .....                                   | 4  |
| 2.Sample Information .....                            | 5  |
| 2.1 Client information .....                          | 5  |
| 2.2 Description of EUT(S) .....                       | 5  |
| 2.3 EUT appearance .....                              | 6  |
| 2.4 EUT setup photo of free space OTA testing .....   | 6  |
| 3. Test Results .....                                 | 7  |
| 3.1 Test standard .....                               | 7  |
| 3.2 Test uncertainty .....                            | 7  |
| 3.3 Test data .....                                   | 8  |
| 3.3.1 VSWR parameters .....                           | 8  |
| 3.3.2 VSWR data .....                                 | 8  |
| 3.3.3 Typical free space efficiency and gain .....    | 8  |
| 3.3.4 Typical free space radiation pattern .....      | 9  |
| (The following is blank) .....                        | 10 |

## 1.General Information

## 1.1 General information of testing institutions

|                  |                                                                                                                                                               |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Name</b>      | Shenzhen RFI-LAB Communication Technology Co., Ltd.                                                                                                           |
| <b>Address</b>   | 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ                                                                                                           |
| <b>Tel</b>       | 13682621346                                                                                                                                                   |
| <b>E-mail</b>    | rfi-lab@tech-now.com                                                                                                                                          |
| <b>Equipment</b> | All the equipment used in the report is fixed in Zone B, West Side of 1/F, Building 1, Tingwei Industrial Park, No.6 Liufang Road, Bao 'an District, Shenzhen |

## 1.2 Testing principle

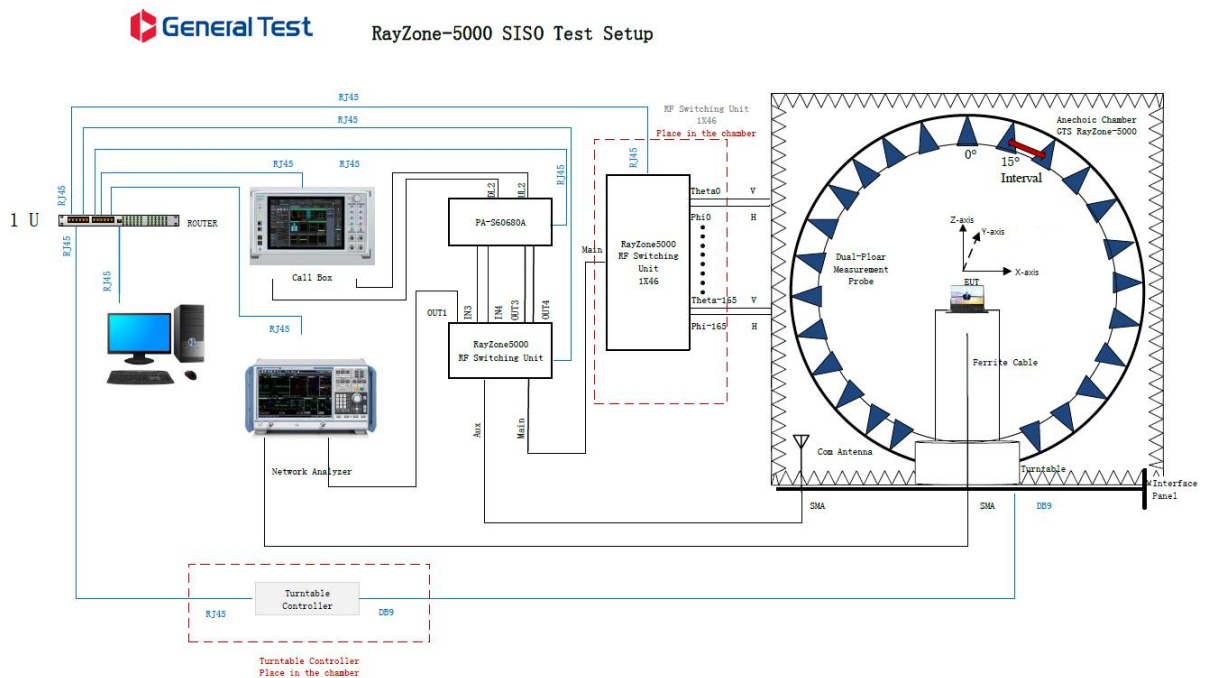

### 1.3 Test equipment

| Equipment        | Model No.    | Serial No.     | Manufacturer | Calibration date | Next calibration date |
|------------------|--------------|----------------|--------------|------------------|-----------------------|
| OTA Test System  | RayZone-5000 | RFI-LAB-RF-D00 | GTS          | 2023.3.14        | 2025.3.13             |
| Network Analyzer | E5071C       | RFI-LAB-RF-D01 | KEYSIGHT     | 2023.5.11        | 2024.5.10             |
| Network Analyzer | E5071C       | RFI-LAB-RF-C02 | KEYSIGHT     | 2023.5.11        | 2024.5.10             |

### 1.4 Test environment

|             |           |
|-------------|-----------|
| Temperature | 23.9°C    |
| Humidity    | 57%RH     |
| Pressure    | 100.19kPa |

### 1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

## 2.Sample Information


### 2.1 Client information

|              |                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------|
| Name         | Hangzhou BroadLink Technology Co.,Ltd                                                                  |
| Address      | Building C, Artificial Intelligence Industrial Park, No. 57, Jianger Road, Binjiang District, Hangzhou |
| Contacts     | Mengjiao.yan                                                                                           |
| Tel          | 18058715209                                                                                            |
| E-mail       | Mengjiao.yan@broadlink.com.cn                                                                          |
| Manufacturer | /                                                                                                      |

### 2.2 Description of EUT(S)


|                 |                                                  |
|-----------------|--------------------------------------------------|
| Product Name    | RF module                                        |
| Sample Model    | BL3394-P                                         |
| Antenna Size    | /                                                |
| Serial No.      | /                                                |
| Antenna Type    | PCB Antenna                                      |
| Test Item       | VSWR;Antenna gain; Efficiency; Radiation pattern |
| Frequency Range | 2400-2500MHz                                     |
| Received Date   | 2023.08.20                                       |
| Test Date       | 2023.08.21                                       |
| Remark          | /                                                |

## 2.3 EUT appearance

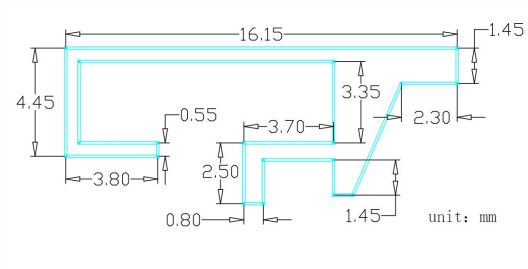


## 2.4 EUT setup photo of free space OTA testing

Planform

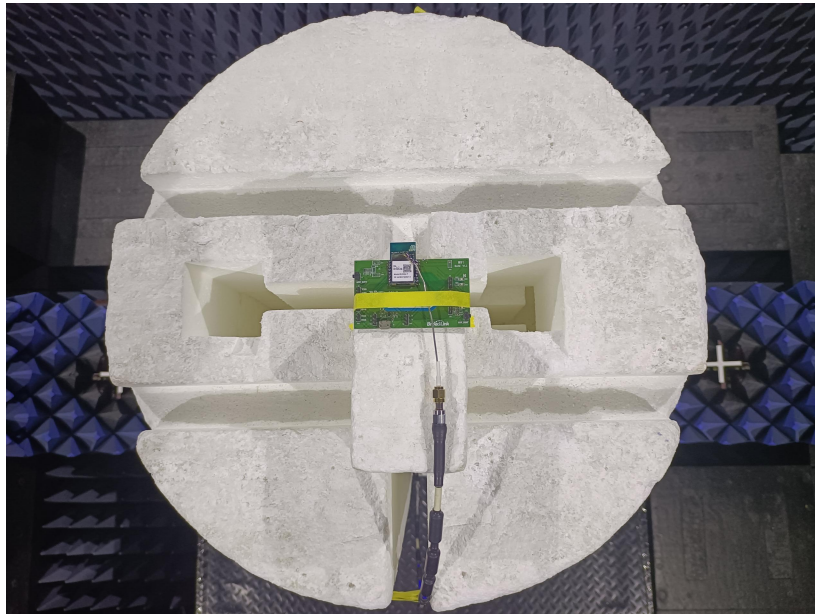

Front view

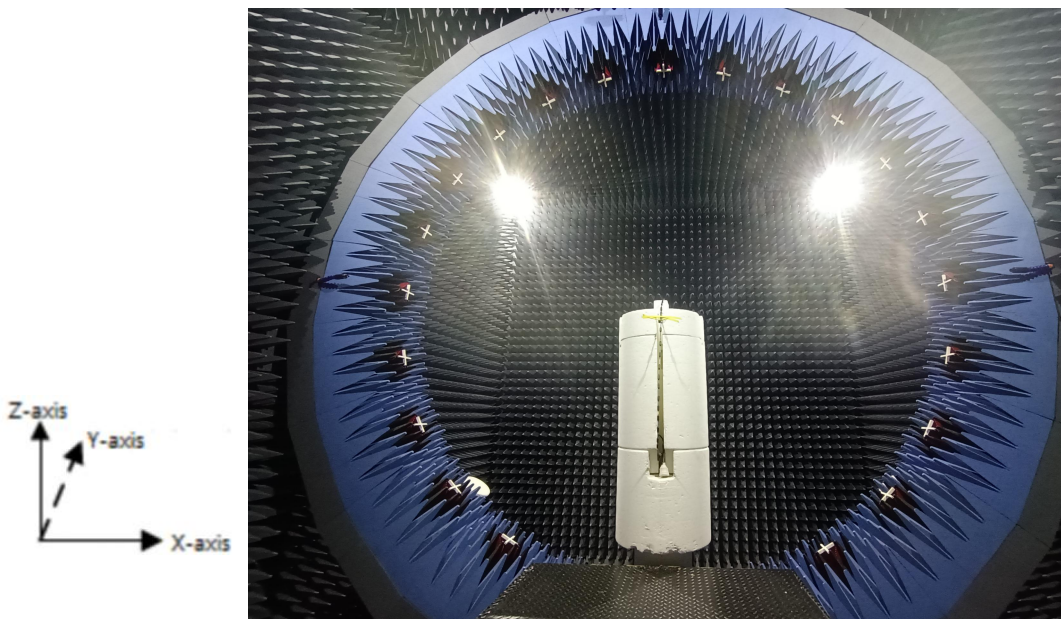

## 3. Test Results

### 3.1 Test standard

| Name                         | Parameter            | Method                                                               | Standard no.           |
|------------------------------|----------------------|----------------------------------------------------------------------|------------------------|
| Mobile communication antenna | Antenna gain         | Generic specification for antennas used in the mobile communications | GB/T 9410-2008         |
|                              | Radiation pattern    |                                                                      |                        |
|                              | VSWR                 |                                                                      |                        |
| Antenna                      | Radiation efficiency | IEEE Standard Test Procedures for Antennas                           | ANSI/IEEE Std 149-1979 |
|                              | Gain and directivity |                                                                      |                        |


### 3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of  $K=2$  and the 95% confidence level to express the extended uncertainty.

| Item                 | Uncertainty         |
|----------------------|---------------------|
| VSWR                 | $\pm 0.3$           |
| Antenna gain         | $\pm 0.72\text{dB}$ |
| Radiation efficiency | $\pm 0.72\text{dB}$ |

## 3.3 Test data

### 3.3.1 VSWR parameters

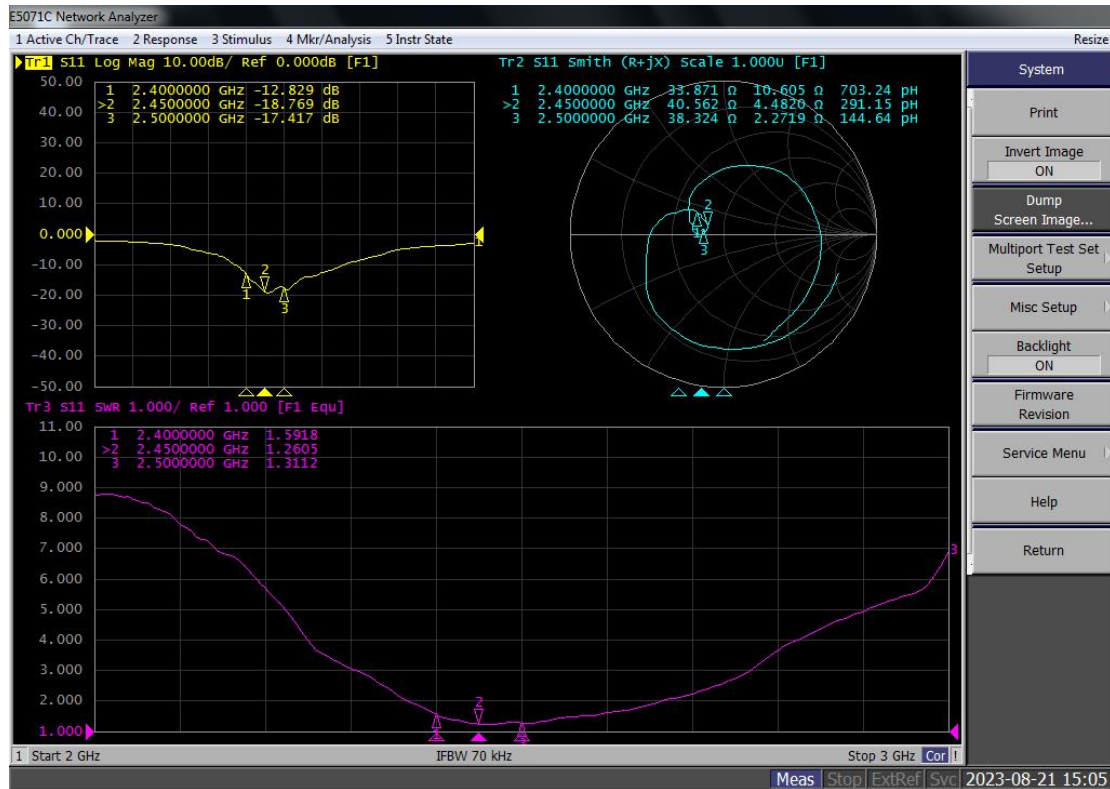

### 3.3.2 VSWR data


| Frequency/MHz | 2400 | 2450 | 2500 |
|---------------|------|------|------|
| VSWR          | 1.59 | 1.26 | 1.31 |

### 3.3.3 Typical free space efficiency and gain


| Frequency/MHz | 2400  | 2410  | 2420  | 2430  | 2440  | 2450  | 2460  | 2470  | 2480  | 2490  | 2500  |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Peak Gain/dBi | 2.97  | 3.06  | 3.21  | 3.34  | 3.47  | 3.53  | 3.46  | 3.28  | 3.11  | 3.10  | 3.06  |
| Efficiency/%  | 54.24 | 55.48 | 56.57 | 56.90 | 57.57 | 58.26 | 59.17 | 59.59 | 58.16 | 57.26 | 56.64 |

### 3.3.4 Typical free space radiation pattern


(1) X-Z Plane(unit:dBi):

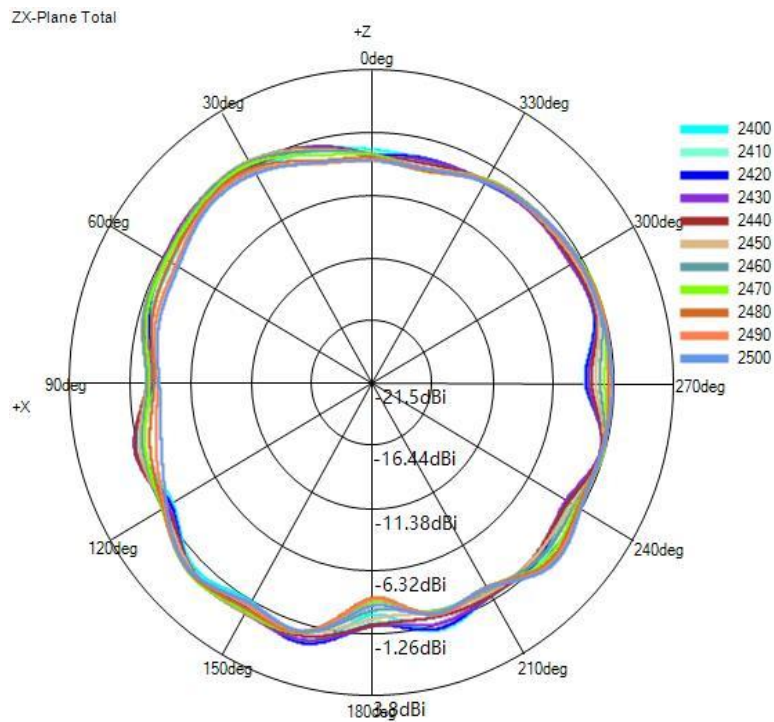


(2) Y-Z Plane(unit:dBi):

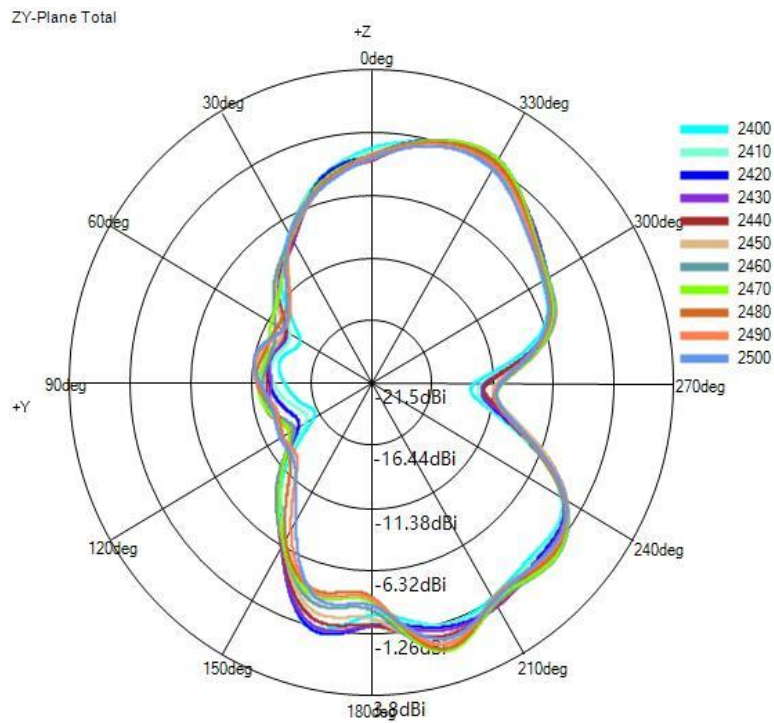

(3) X-Y Plane(unit:dBi):

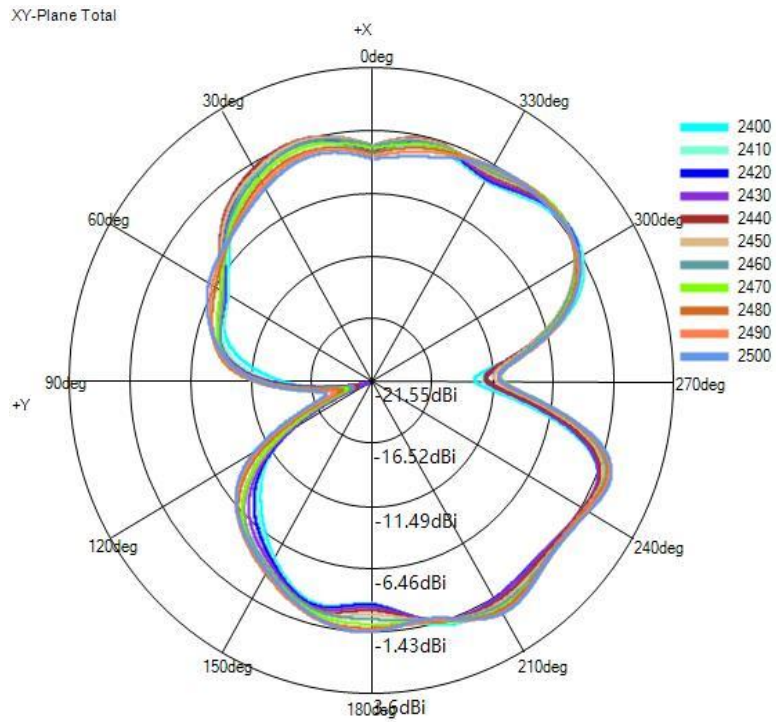

(4) Typical Free Space 3D Radiation Pattern at 2.45GHz(unit:dBi):

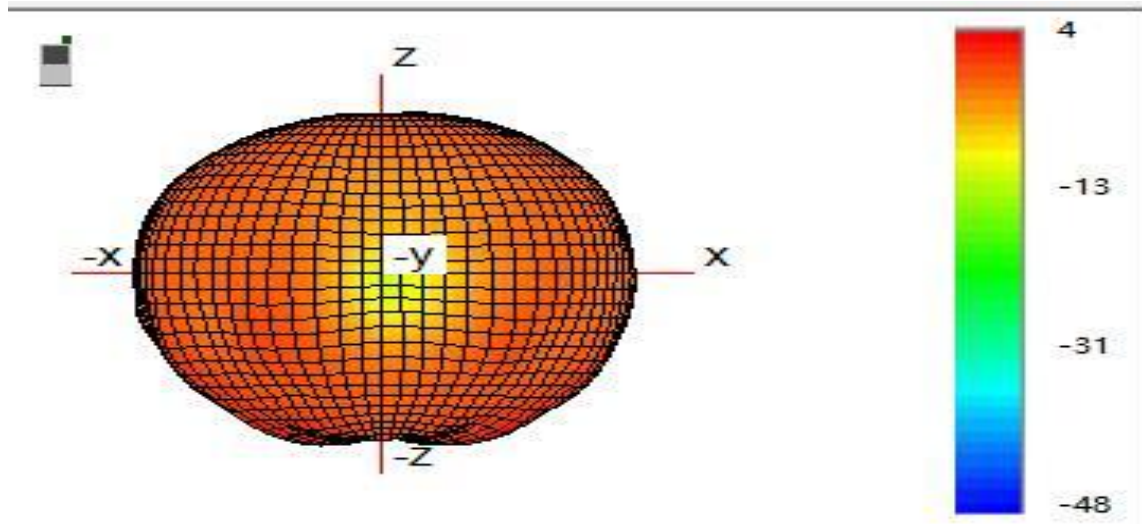

End

(The following is blank)