

TEST REPORT

Applicant	Belkin International, Inc.
Address	12045 East Waterfront Drive, Playa Vista, CA 90094 USA

Manufacturer or Supplier	Belkin International, Inc.
Address	12045 East Waterfront Drive, Playa Vista, CA 90094 USA
Product	BOOST↑CHARGE™ Wireless Charging Stand 10W
Additional Product	Wireless Charging Stand 10W
Brand Name	belkin, playa
Model	WIB001V2
Additional Model & Model Difference	PW0005V2, see items 3.1
Date of tests	Feb. 09, 2021 ~ Mar. 16, 2021

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

☒ **FCC Part 15, Subpart C**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager/ EMC Department
	 Date: Mar. 26, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
2 MEASUREMENT UNCERTAINTY	4
3 GENERAL INFORMATION.....	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 DESCRIPTION OF TEST MODES.....	6
3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	6
3.4 DESCRIPTION OF SUPPORT UNITS	7
3.5 CONFIGURATION OF SYSTEM UNDER TEST	8
3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	8
4 EMISSION TEST.....	9
4.1 CONDUCTED EMISSION MEASUREMENT	9
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	9
4.1.2 TEST INSTRUMENTS.....	9
4.1.3 TEST PROCEDURE.....	10
4.1.4 DEVIATION FROM TEST STANDARD	10
4.1.5 TEST SETUP.....	11
4.1.6 EUT OPERATING CONDITIONS	11
4.1.7 TEST RESULTS	12
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
4.2.2 TEST INSTRUMENTS.....	17
4.2.3 TEST PROCEDURE.....	18
4.2.4 DEVIATION FROM TEST STANDARD	19
4.2.5 TEST SETUP.....	19
4.2.6 EUT OPERATING CONDITIONS	19
4.2.7 TEST RESULTS	20
4.3. 20DB BANDWIDTH MEASUREMENT	36
4.3.1 LIMITS OF 20DB BANDWIDTH MEASUREMENT	36
4.3.2 TEST INSTRUMENTS.....	36
4.3.3 TEST PROCEDURE.....	36
4.3.4 DEVIATION FROM TEST STANDARD	36
4.3.5 TEST SETUP.....	37
4.3.6 EUT OPERATING CONDITION	37
4.3.7 TEST RESULTS	38
5 PHOTOGRAPHS OF THE TEST CONFIGURATION	40
6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	41



Test Report No.: RF2102WDG0030

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2102WDG0030	Original release	Mar. 26, 2021

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	No antenna connector is used.
§15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
§15.209	Radiated Emission	PASS	Meet the requirement of limit.
§15.215 (c)	20dB Bandwidth	PASS	Meet the requirement of limit.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	3.05dB
Radiated emissions	9KHz ~ 30MHz	2.16dB
	30MHz ~ 1GMHz	3.82dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	BOOST↑CHARGE™ Wireless Charging Stand 10W
ADDITIONAL PRODUCT	Wireless Charging Stand 10W
MODEL NO.	WIB001V2
ADDITIONAL MODEL	PW0005V2
SAMPLE STATUS	Engineering sample
FCC ID	K7SWIB001V2
POWER SUPPLY	Input: 5.0VDC 2.0A, Output:5.0VDC 5.0W; Input: 9.0VDC 2.0A, Output:9VDC 10.0W; Input: 12.0VDC 1.5A, Output:12VDC 10.0W
MODULATION TYPE	FSK
OPERATING FREQUENCY RANGE	111KHz ~ 145KHz
ANTENNA TYPE	Coil Antenna
FIELD STRENGTH	83.85dBuV/m
MAXIMUM POWER OUTPUT FROM THE CHARGING COIL	Max Power is 10W
CABLE SUPPLIED	USB- A to Micro USB cable: Shielded, detachable 1.3m

NOTES:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2102WDG0030-1) for detailed product photo.
4. Additional model PW0005V2 is identical with test model WIB001V2 except the product name and model no. for trading purpose.
5. The EUT can be powered by adapter as list as attach: (only worst case adapter 1 was shown in test report.)

ADAPTER 1	
BRAND:	N/A
MODEL:	DSA-18QFB FUS A
INPUT:	AC 100-240V, 50/60HZ, 0.8A
OUTPUT:	DC 3.6-6V 2A, 6-9V 2A, 9-12V 1.5A
DC LINE:	N/A
ADAPTER 2	
BRAND:	belkin
MODEL:	A138A-120150U-US5
INPUT:	AC 100-240V, 50/60HZ, 0.5A
OUTPUT:	DC 5.0V 2.0A, 9V 2A, 12V 1.5A
DC LINE:	N/A

3.2 DESCRIPTION OF TEST MODES

The following test frequencies are provided to this EUT:

Operating Frequency Range(KHz)	Tested Frequency(KHz)	Mode
111-145	142.403	Standby
111-145	139.752	Receiver load operating

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE	APPLICABLE TO			DESCRIPTION
	RE<1G	PLC	20BW	
A	√	√	√	Standby
B	√	√	√	Receiver load operating

Where **RE<1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

20BW: 20dB Bandwidth

Note:

1. The EUT is designed to be positioned on the **X-plane** only.

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Operating Frequency Range(KHz)	Tested Frequency(KHz)	Modulation Type
A	111-145	142.403	FSK
B	111-145	139.752	FSK

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Operating Frequency Range(KHz)	Tested Frequency(KHz)	Modulation Type
A	111-145	142.403	FSK
B	111-145	139.752	FSK

20dB Bandwidth TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Operating Frequency Range(KHz)	Tested Frequency(KHz)	Modulation Type
A	111-145	142.403	FSK
B	111-145	139.752	FSK

TEST CONDITION:

Applicable to	Environmental conditions	Input Power(Adapter)	Tested by
RE<1G	20 °C, 57% RH	120Vac, 60Hz	Ray
PLC	25 °C, 60% RH	120Vac, 60Hz	MingBai
20BW	24 °C, 64% RH	120Vac, 60Hz	Daniel


3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Receiver load	N/A	N/A	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

3.5 CONFIGURATION OF SYSTEM UNDER TEST

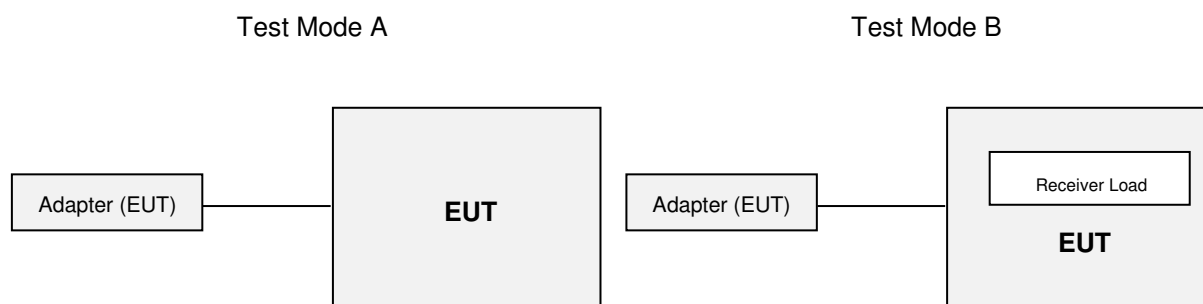

3.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.207/15.209)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:** (1) The lower limit shall apply at the transition frequencies.
 (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 17,21
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 17,21
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 17,21
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Sep. 23,21
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTES:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in shielding room 553.

4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.


NOTES:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

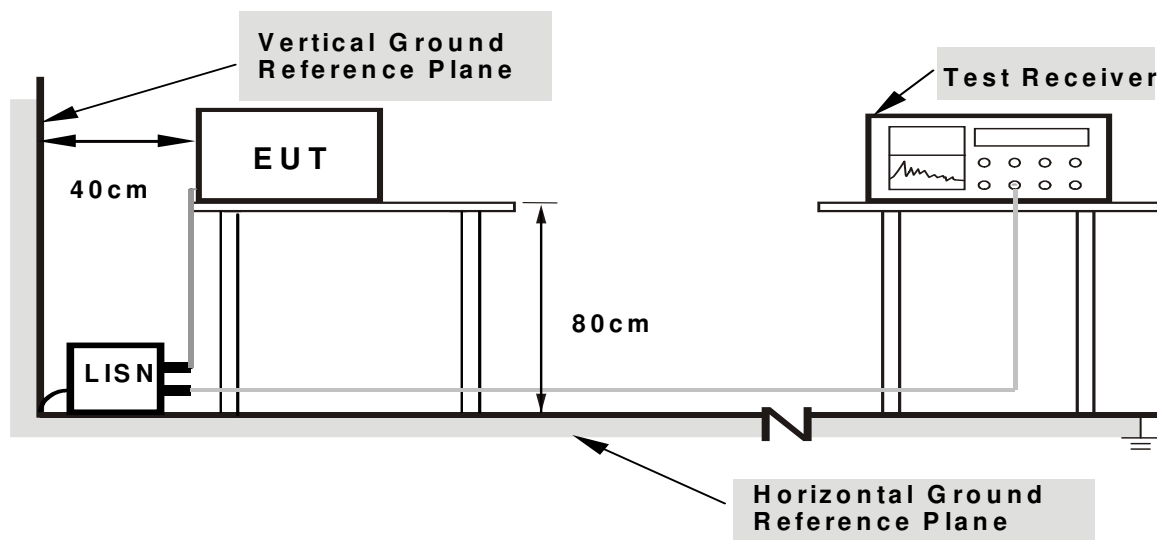

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

4.1.6 EUT OPERATING CONDITIONS


- a. Turn on the EUT.
- b. The EUT tested in charging mode and standby mode respectively.

4.1.7 TEST RESULTS

TEST MODE	A	PHASE	Line(L)
TEST VOLTAGE	AC 120V/60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH	TESTED BY: Ming Bai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.43350	9.83	20.30	5.76	30.13	15.59	57.19	47.19	-27.06	-31.60
2	0.72375	9.79	20.25	4.65	30.04	14.44	56.00	46.00	-25.96	-31.56
3	1.01400	9.81	20.38	-0.53	30.19	9.28	56.00	46.00	-25.81	-36.72
4	1.88475	9.85	19.30	3.62	29.15	13.47	56.00	46.00	-26.85	-32.53
5	2.46525	9.85	17.76	2.70	27.61	12.55	56.00	46.00	-28.39	-33.45
6	4.20675	9.85	13.95	1.52	23.80	11.37	56.00	46.00	-32.20	-34.63


REMARKS: The emission levels of other frequencies were very low against the limit.

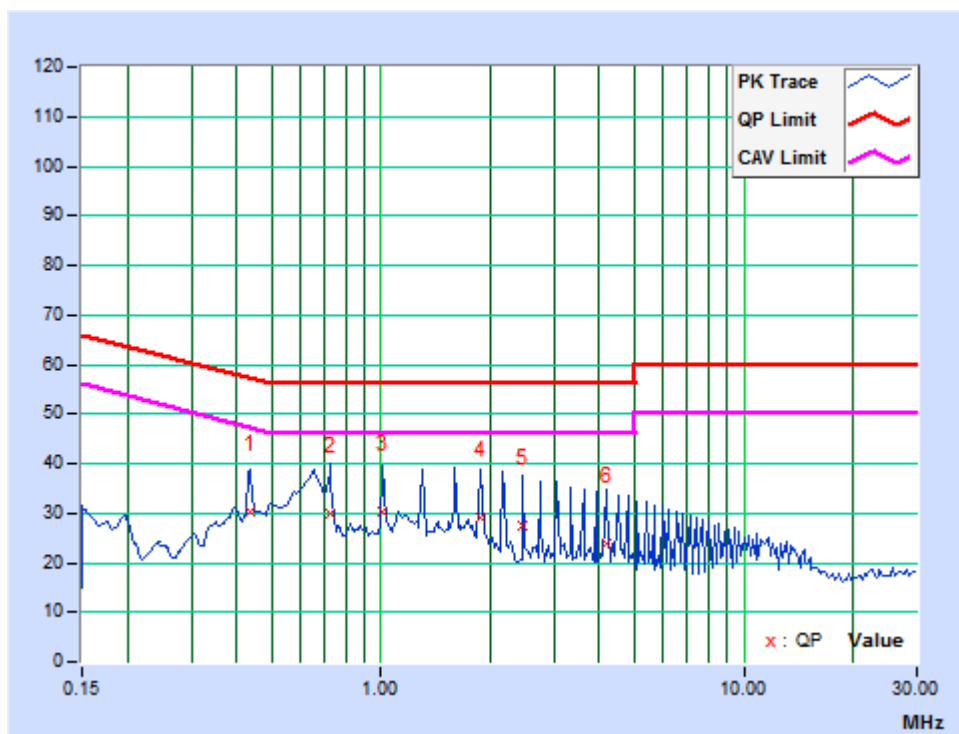

TEST MODE	A	PHASE	Neutral (N)
TEST VOLTAGE	AC 120V/60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH	TESTED BY: Ming Bai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.43350	9.83	14.68	0.36	24.51	10.19	57.19	47.19	-32.68	-37.00
2	0.72375	9.82	15.21	-0.10	25.03	9.72	56.00	46.00	-30.97	-36.28
3	1.59450	9.85	15.46	0.40	25.31	10.25	56.00	46.00	-30.69	-35.75
4	2.17500	9.85	14.02	-0.25	23.87	9.60	56.00	46.00	-32.13	-36.40
5	4.49887	9.88	11.65	-2.59	21.53	7.29	56.00	46.00	-34.47	-38.71
6	7.98225	9.98	6.61	-1.51	16.59	8.47	60.00	50.00	-43.41	-41.53


REMARKS: The emission levels of other frequencies were very low against the limit.

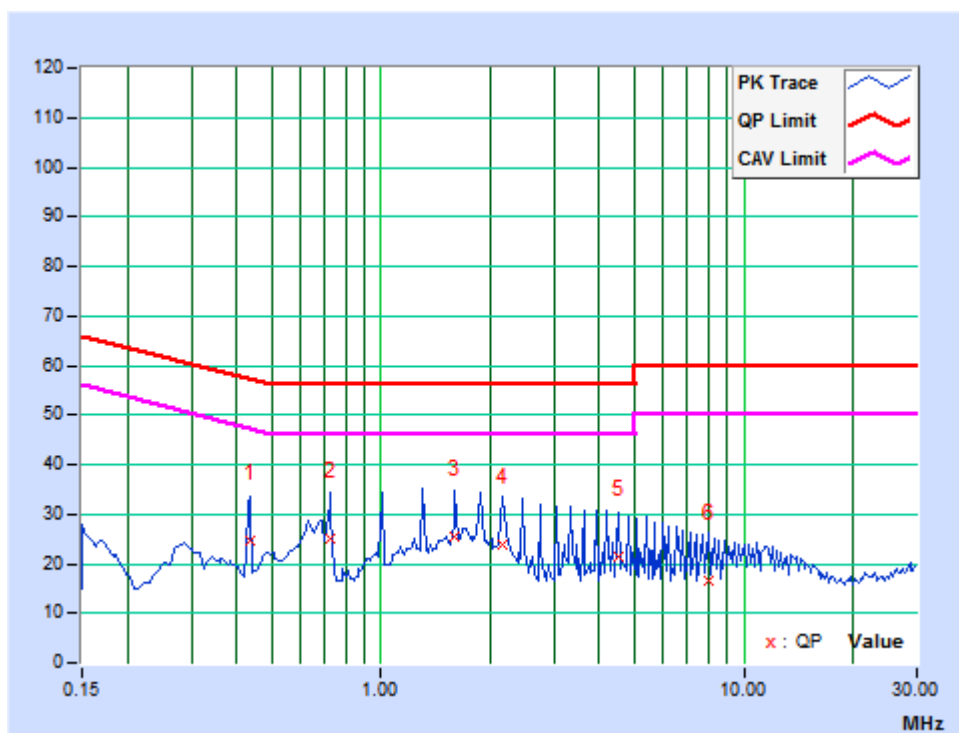

TEST MODE	B	PHASE	Line(L)
TEST VOLTAGE	AC 120V/60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH	TESTED BY: Ming Bai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19300	9.71	31.81	15.84	41.52	25.55	63.91	53.91	-22.39	-28.36
2	0.70125	9.82	29.58	23.86	39.40	33.68	56.00	46.00	-16.60	-12.32
3	1.11525	9.83	28.11	23.31	37.94	33.14	56.00	46.00	-18.06	-12.86
4	2.23350	9.85	26.81	22.47	36.66	32.32	56.00	46.00	-19.34	-13.68
5	3.07275	9.87	28.08	24.58	37.95	34.45	56.00	46.00	-18.05	-11.55
6	7.68525	9.97	24.27	22.62	34.24	32.59	60.00	50.00	-25.76	-17.41


REMARKS: The emission levels of other frequencies were very low against the limit.

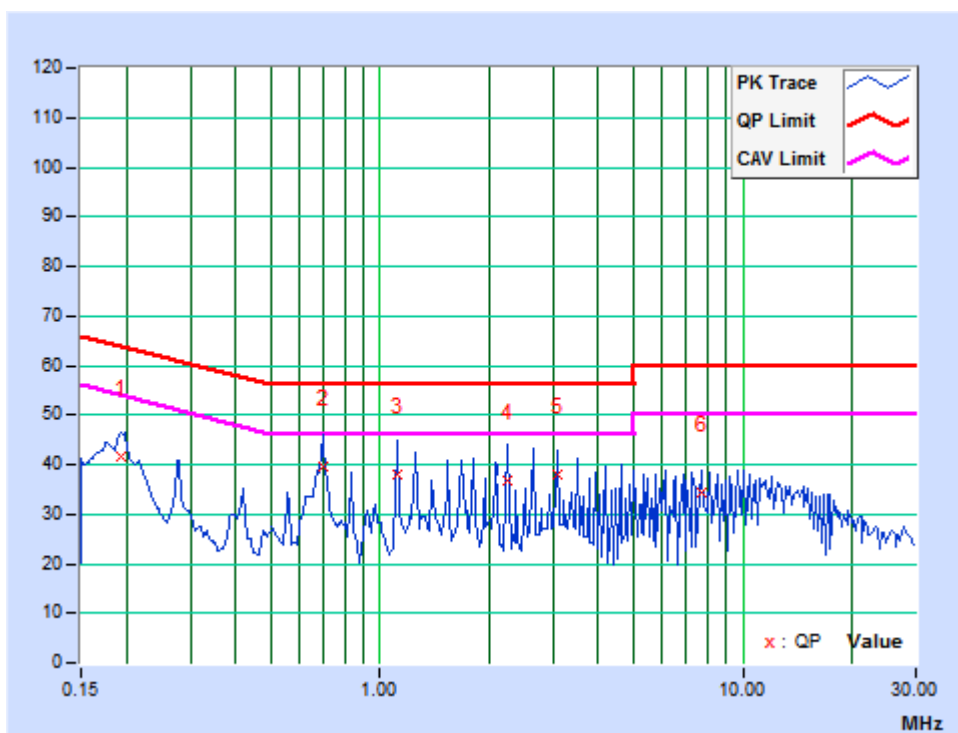

TEST MODE	B	PHASE	Neutral (N)
TEST VOLTAGE	AC 120V/60Hz	6dB BANDWIDTH	9 kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 60% RH	TESTED BY: Ming Bai	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.27600	9.76	27.61	22.01	37.37	31.77	60.94	50.94	-23.56	-19.16
2	0.69675	9.78	34.13	28.06	43.91	37.84	56.00	46.00	-12.09	-8.16
3	1.11525	9.81	32.68	27.12	42.49	36.93	56.00	46.00	-13.51	-9.07
4	1.67550	9.83	30.34	24.35	40.17	34.18	56.00	46.00	-15.83	-11.82
5	3.07275	9.86	31.74	27.03	41.60	36.89	56.00	46.00	-14.40	-9.11
6	3.90975	9.85	27.95	23.64	37.80	33.49	56.00	46.00	-18.20	-12.51

REMARKS: The emission levels of other frequencies were very low against the limit.

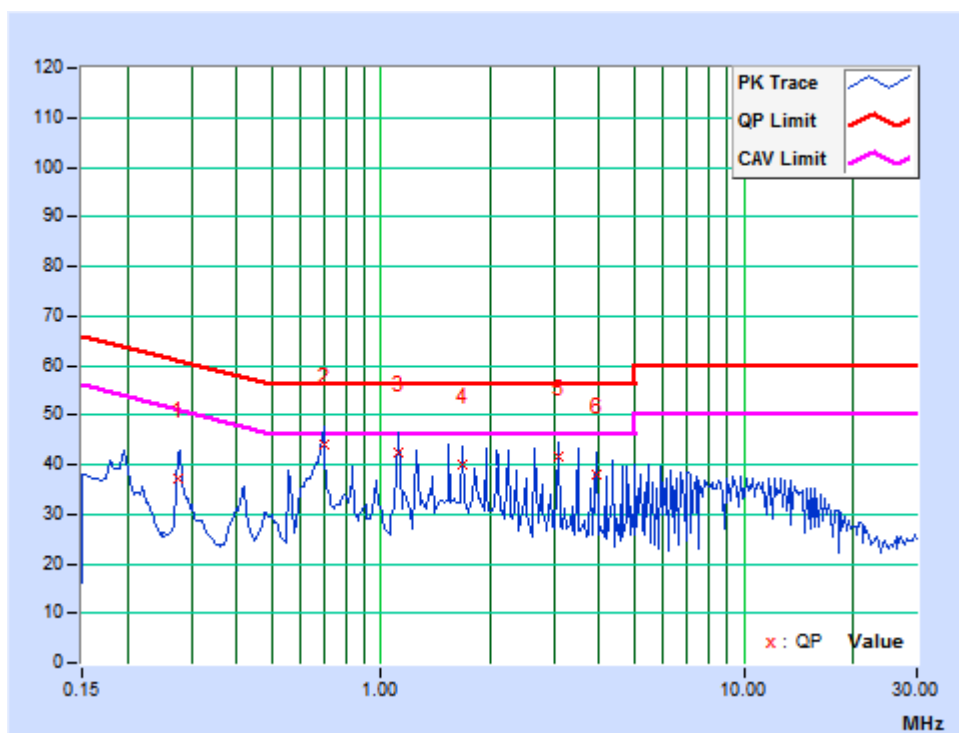

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart C, Section 15.209

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. The measured field strength was extrapolated to distance 30 meters, using the formula that the limit of field strength varies as the inverse distance square (40dB per decade of distance)

4.2.2 TEST INSTRUMENTS

FREQUENCY 9KHz-30MHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101564	Mar. 17,21
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	1519B-045	May 27,21
Amplifier	Burgeon	BPA-530	100210	Mar. 14,22
Test Software	ADT	ADT_Radiated_V8.7.07	N/A	N/A

- NOTES:** 1. The test was performed in 10m Chamber.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 3. The FCC Site Registration No. is 749762.

FREQUENCY 30MHz-1GHz

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 17,21
Bilog Antenna	Teseq	CBL 6111D	30643	Jun. 22,21
Amplifier	Burgeon	BPA-530	100220	Mar. 14,22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 20,21
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A

- NOTES:** 1. The test was performed in 966 Chamber
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 3. The FCC Site Registration No. is 749762.

4.2.3 TEST PROCEDURE

< Below 30MHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

<30MHz~1GHz >

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTES:


1. The resolution bandwidth of test receiver/spectrum analyzer is 200Hz for Quasi-peak detection (QP) at fundamental frequency 9K-150KHz;
2. The resolution bandwidth of test receiver/spectrum analyzer is 9KHz for Quasi-peak detection (QP) at fundamental frequency 150K-30MHz;
3. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at radiated spurious emission frequency 30MHz-1GHz.
4. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
5. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
6. Margin value = Emission level – Limit value.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

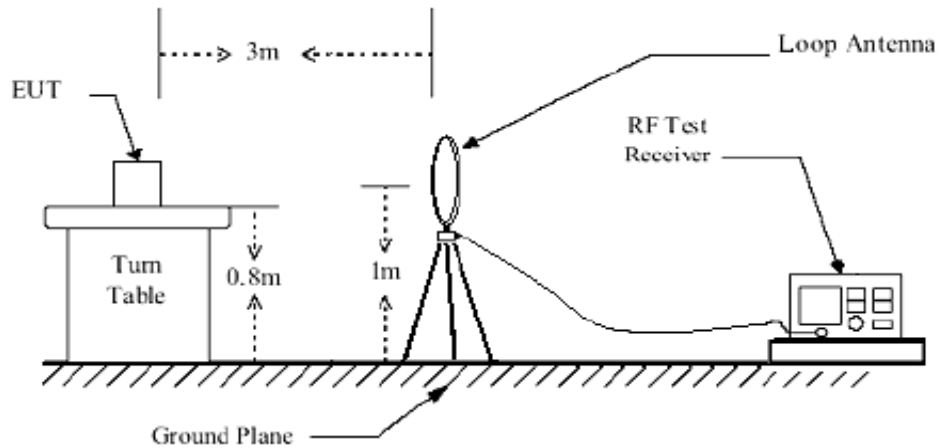

Below 1GHz test setup

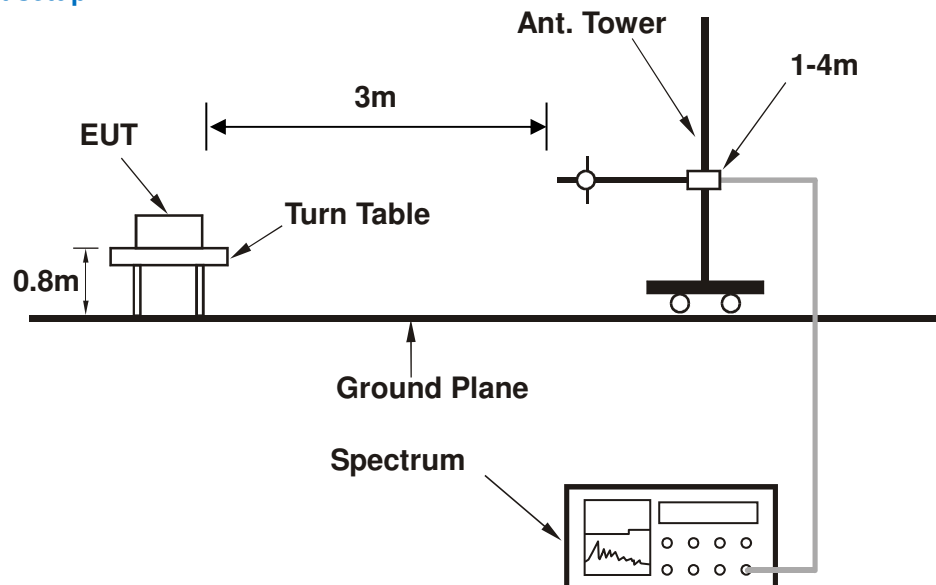

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS


- Turn on the EUT.
- The EUT tested in charging mode and standby mode respectively.

4.2.7 TEST RESULTS

Standby Mode


Test Mode	A	Frequency Range	9 kHz ~ 150 kHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01020 AV	-10.05	44.57	34.52	127.39	-92.87	100	305
2	0.01790 AV	-10.52	41.73	31.21	122.54	-91.33	100	146
3	0.06420 AV	-11.60	33.20	21.60	111.45	-89.85	100	184
4	0.09610 AV	-11.76	42.48	30.72	107.94	-77.22	100	356
5	0.10360 QP	-11.79	47.42	35.63	107.29	-71.66	100	181
6	*0.14240 AV	-11.86	89.33	77.47	104.53	-27.06	100	187

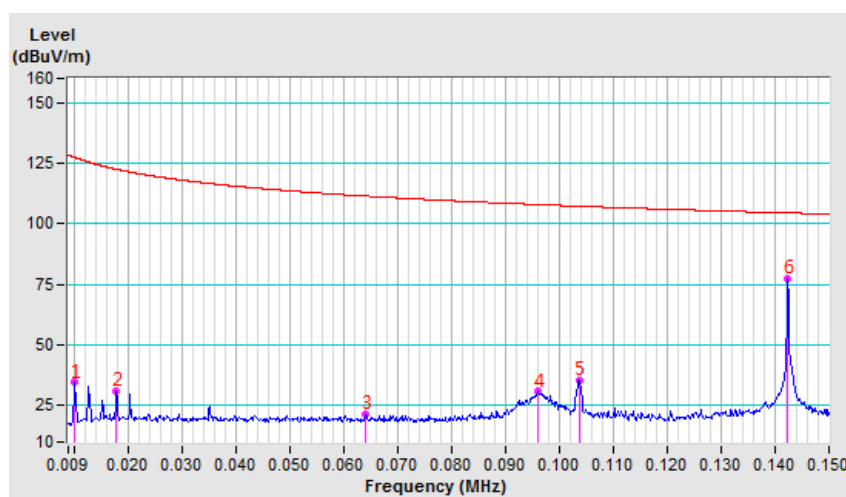


Test Mode	A	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.42610 AV	-12.05	69.53	57.48	95.01	-37.53	100	183
2	2.70530 QP	-12.03	38.35	26.32	69.54	-43.22	100	183
3	10.88610 QP	-11.75	29.56	17.81	69.54	-51.73	100	144
4	15.35340 QP	-11.54	29.55	18.01	69.54	-51.53	100	67
5	17.43250 QP	-11.55	28.99	17.44	69.54	-52.10	100	277
6	23.44610 QP	-11.56	28.36	16.80	69.54	-52.74	100	35

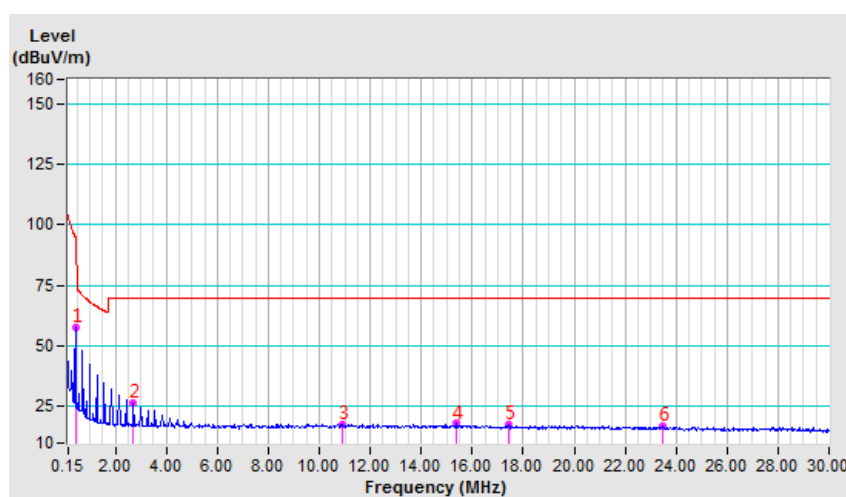


Test Mode	A	Frequency Range	9 kHz ~ 150 kHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01280 AV	-10.21	42.62	32.41	125.47	-93.06	100	78
2	0.05830 AV	-11.58	32.35	20.77	112.29	-91.52	100	360
3	0.08230 AV	-11.68	34.02	22.34	109.30	-86.96	100	189
4	0.09570 QP	-11.76	41.20	29.44	107.98	-78.54	100	189
5	0.11400 AV	-11.80	35.70	23.90	106.47	-82.57	100	189
6	0.13500 AV	-11.85	37.18	25.33	105.00	-79.67	100	189
7	*0.14240 AV	-11.86	89.35	77.49	104.53	-27.04	100	183

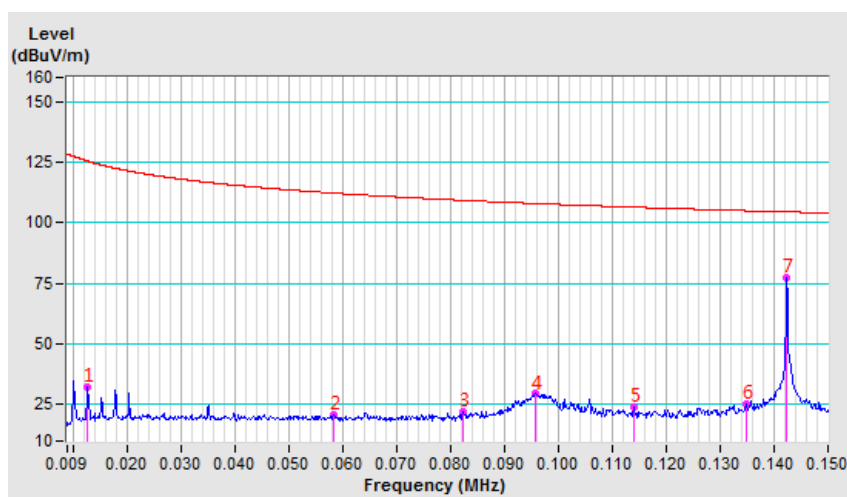


Test Mode	A	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.42610 AV	-12.05	69.50	57.45	95.01	-37.56	100	186
2	3.84410 QP	-11.95	33.21	21.26	69.54	-48.28	100	193
3	7.71290 QP	-11.89	29.75	17.86	69.54	-51.68	100	360
4	15.90860 QP	-11.54	29.13	17.59	69.54	-51.95	100	360
5	19.67440 QP	-11.39	28.58	17.19	69.54	-52.35	100	47
6	23.85950 QP	-11.56	28.13	16.57	69.54	-52.97	100	287

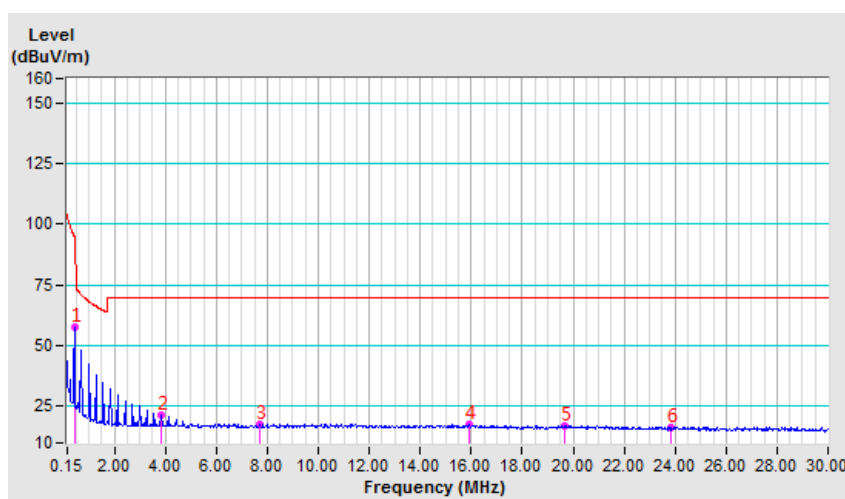


Test Mode	A	Frequency Range	9 kHz ~ 150 kHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01020 AV	-10.05	44.74	34.69	127.40	-92.71	100	282
2	0.01790 AV	-10.51	41.46	30.95	122.54	-91.59	100	276
3	0.03510 AV	-11.34	35.68	24.34	116.69	-92.35	100	94
4	0.06420 AV	-11.60	33.27	21.67	111.46	-89.79	100	194
5	0.09720 QP	-11.77	42.27	30.50	107.85	-77.35	100	139
6	0.10400 QP	-11.79	42.10	30.31	107.26	-76.95	100	78
7	*0.14240 AV	-11.86	89.38	77.52	104.53	-27.01	100	186

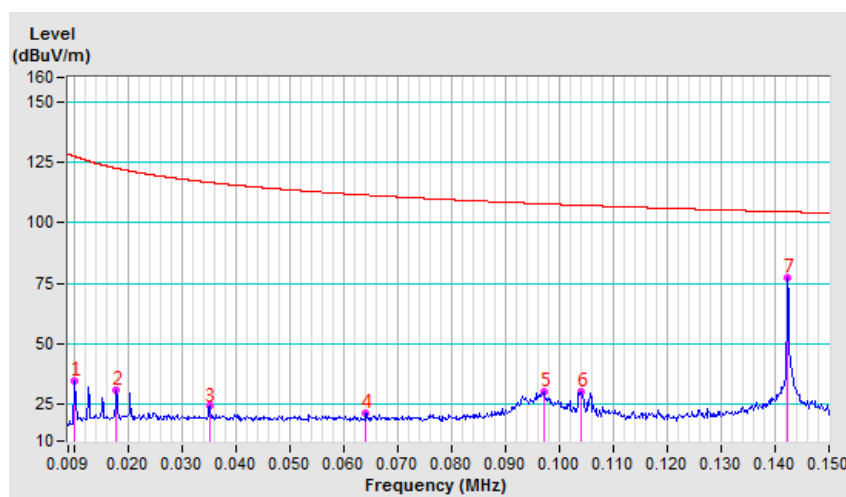

Test Mode	A	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.42610 AV	-12.05	69.49	57.44	95.01	-37.57	100	182
2	2.70530 QP	-12.03	37.84	25.81	69.54	-43.73	100	168
3	9.06220 QP	-11.81	29.51	17.70	69.54	-51.84	100	306
4	11.52940 QP	-11.75	29.57	17.82	69.54	-51.72	100	187
5	16.44150 QP	-11.55	29.00	17.45	69.54	-52.09	100	228
6	20.90570 QP	-11.47	28.70	17.23	69.54	-52.31	100	126

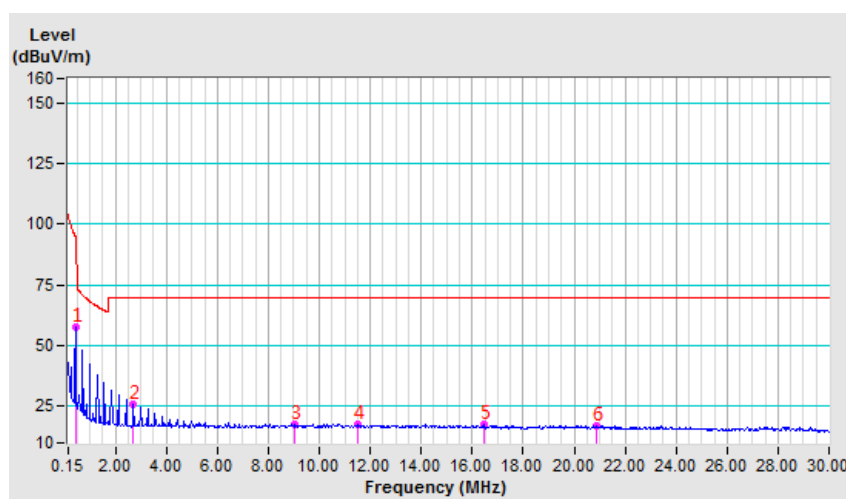

Test Mode	A	Frequency Range	30MHz ~ 1000MHz
Test Voltage	AC 120V/60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30.00	-12.14	29.41	17.27	40.00	-22.73	200	309
2	85.96	-21.38	46.90	25.52	40.00	-14.48	200	208
3	155.91	-17.31	44.32	27.01	43.50	-16.49	200	176
4	277.16	-15.44	47.07	31.63	46.00	-14.37	200	192
5	291.15	-14.75	48.40	33.65	46.00	-12.35	200	249
6	306.70	-14.05	45.58	31.53	46.00	-14.47	200	233


REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

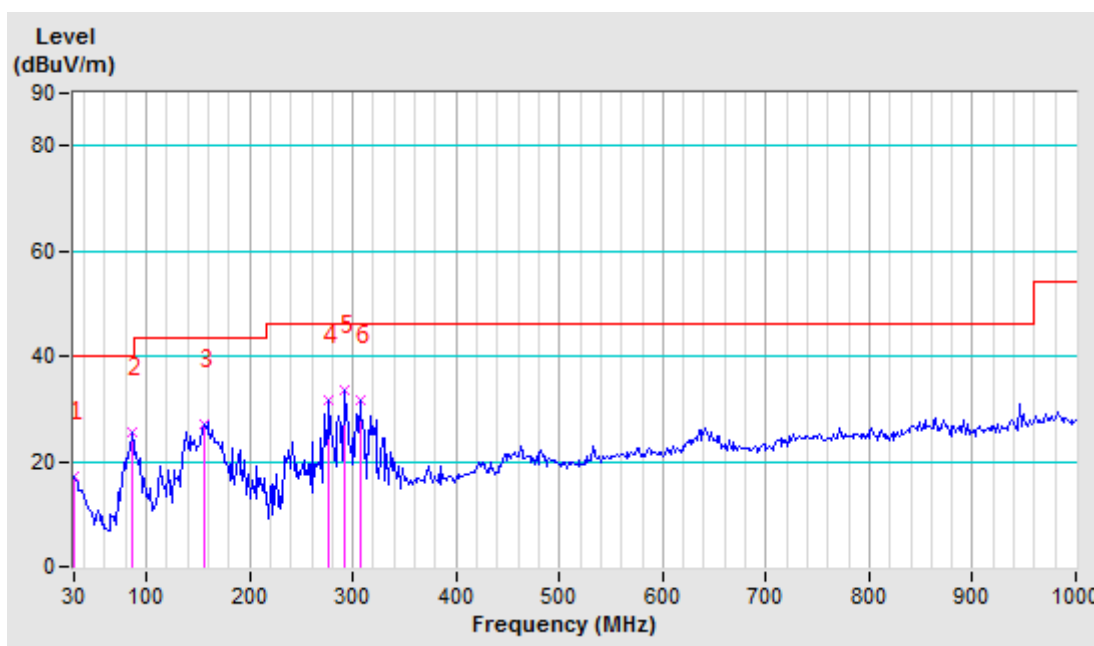

Test Mode	A	Frequency Range	30MHz ~ 1000MHz
Test Voltage	AC 120V/60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	34.66	-13.93	34.21	20.28	40.00	-19.72	100	1
2	53.32	-22.34	41.94	19.60	40.00	-20.40	100	39
3	84.41	-21.60	46.08	24.48	40.00	-15.52	100	54
4	141.92	-18.34	47.40	29.06	43.50	-14.44	100	80
5	155.91	-17.31	44.20	26.89	43.50	-16.61	100	0
6	278.72	-15.41	42.67	27.26	46.00	-18.74	100	0

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

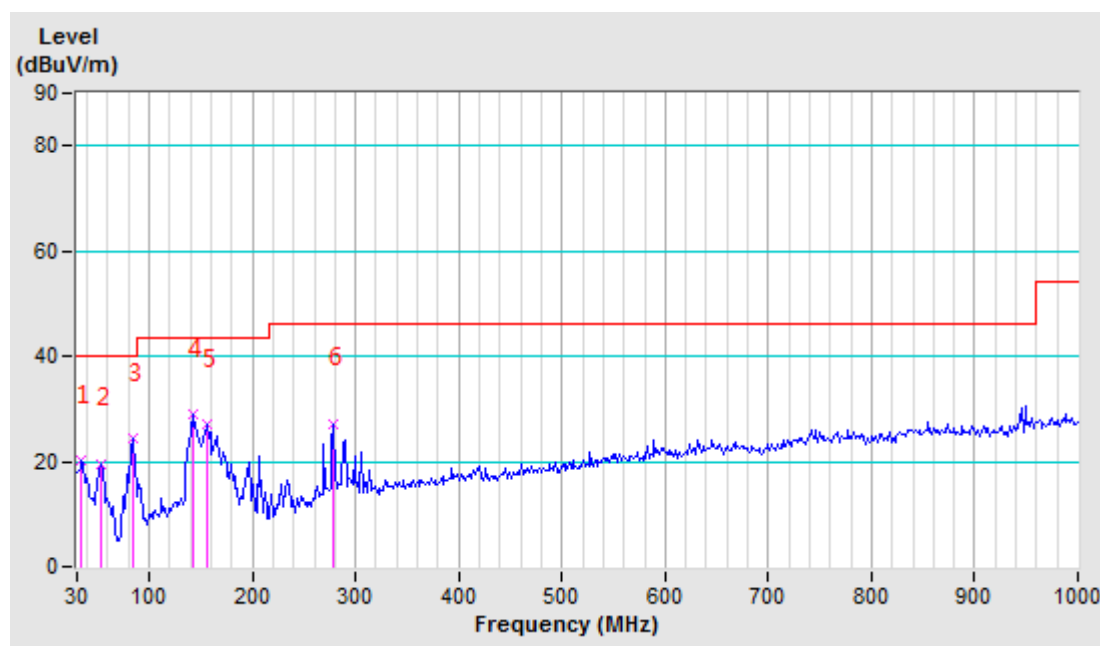




BUREAU
VERITAS

Test Report No.: RF2102WDG0030

Charging Mode


Test Mode	B	Frequency Range	9 kHz ~ 150 kHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01020 AV	-10.05	70.47	60.42	127.40	-66.98	100	12
2	0.01280 AV	-10.21	65.49	55.28	125.46	-70.18	100	108
3	0.04140 AV	-11.43	61.58	50.15	115.27	-65.12	100	165
4	0.05650 AV	-11.57	57.60	46.03	112.56	-66.53	100	179
5	0.07950 AV	-11.67	49.74	38.07	109.59	-71.52	100	184
6	0.09790 QP	-11.77	59.97	48.20	107.79	-59.59	100	181
7	*0.13890 AV	-11.86	95.64	83.78	104.75	-20.97	100	360

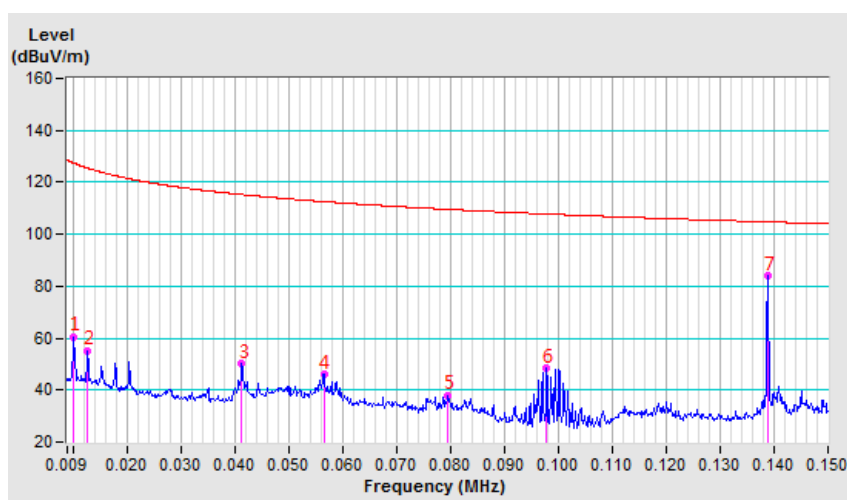


Test Mode	B	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.41570 AV	-12.07	72.35	60.28	95.23	-34.95	100	360
2	4.02620 QP	-11.94	33.29	21.35	69.54	-48.19	100	347
3	13.33390 QP	-11.62	32.35	20.73	69.54	-48.81	100	266
4	15.55490 QP	-11.55	32.57	21.02	69.54	-48.52	100	262
5	20.54300 QP	-11.42	31.16	19.74	69.54	-49.80	100	268
6	25.99390 QP	-11.90	30.97	19.07	69.54	-50.47	100	275

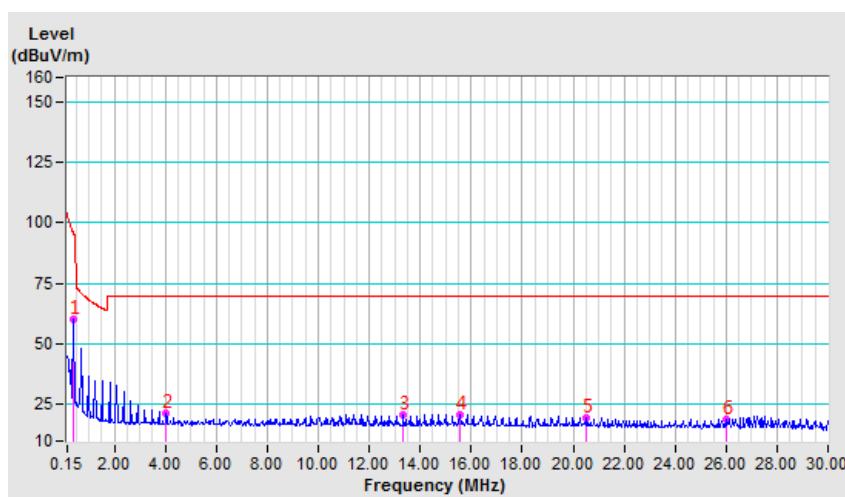


Test Mode	B	Frequency Range	9 kHz ~ 150 kHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01020 AV	-10.05	70.93	60.88	127.40	-66.52	100	51
2	0.02050 AV	-10.67	61.32	50.65	121.39	-70.74	100	268
3	0.04120 AV	-11.43	62.65	51.22	115.31	-64.09	100	175
4	0.05680 AV	-11.57	57.31	45.74	112.51	-66.77	100	180
5	0.07860 AV	-11.67	47.82	36.15	109.69	-73.54	100	202
6	0.09800 QP	-11.77	60.02	48.25	107.78	-59.53	100	187
7	*0.13800 AV	-11.86	95.71	83.85	104.80	-20.95	100	360

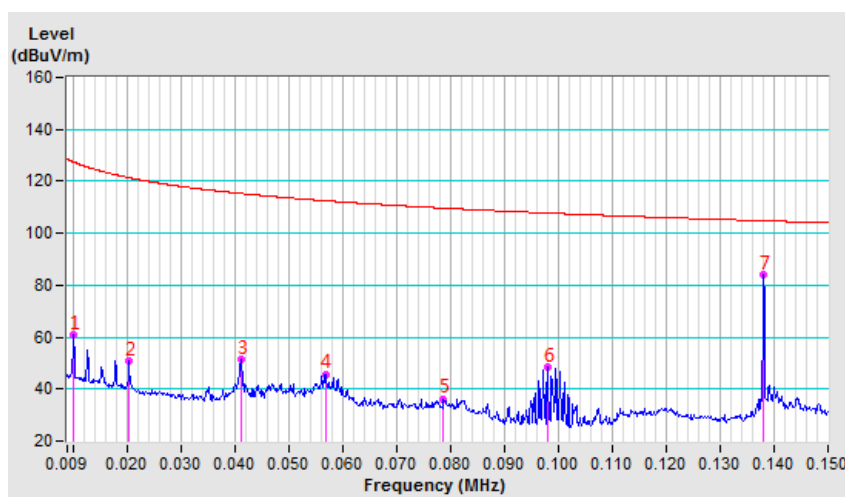


Test Mode	B	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA PERPENDICULAR AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.41270 AV	-12.07	72.39	60.32	95.29	-34.97	100	358
2	1.52760 QP	-12.04	46.78	34.74	64.84	-30.10	100	360
3	11.38910 QP	-11.75	33.38	21.63	69.54	-47.91	100	245
4	14.44440 QP	-11.54	32.35	20.81	69.54	-48.73	100	256
5	17.22210 QP	-11.55	31.10	19.55	69.54	-49.99	100	273
6	20.97140 QP	-11.48	29.60	18.12	69.54	-51.42	100	117

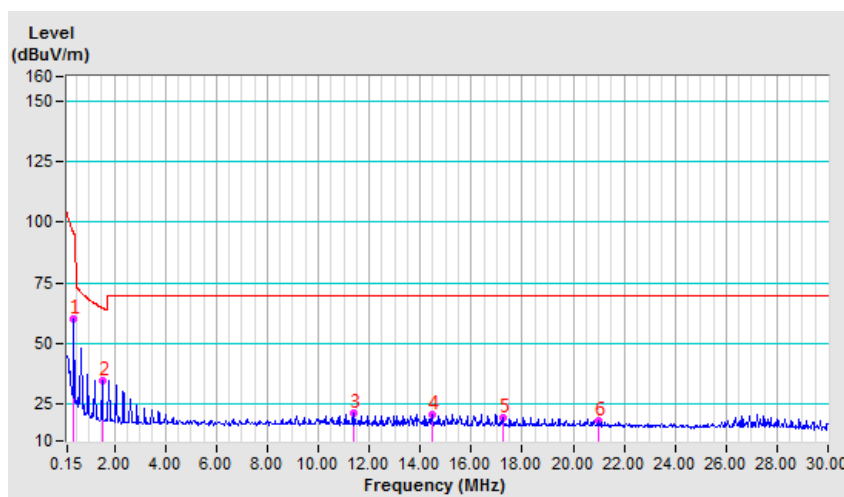


Test Mode	B	Frequency Range	9 kHz ~ 150 kHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.01020 AV	-10.05	70.65	60.60	127.40	-66.80	100	20
2	0.01280 AV	-10.21	65.34	55.13	125.46	-70.33	100	80
3	0.04120 AV	-11.43	61.68	50.25	115.31	-65.06	100	176
4	0.06160 AV	-11.59	49.39	37.80	111.81	-74.01	100	181
5	0.09790 QP	-11.77	60.10	48.33	107.79	-59.46	100	170
6	0.12000 AV	-11.82	46.95	35.13	106.02	-70.89	100	190
7	*0.13890 AV	-11.86	95.59	83.73	104.75	-21.02	100	2

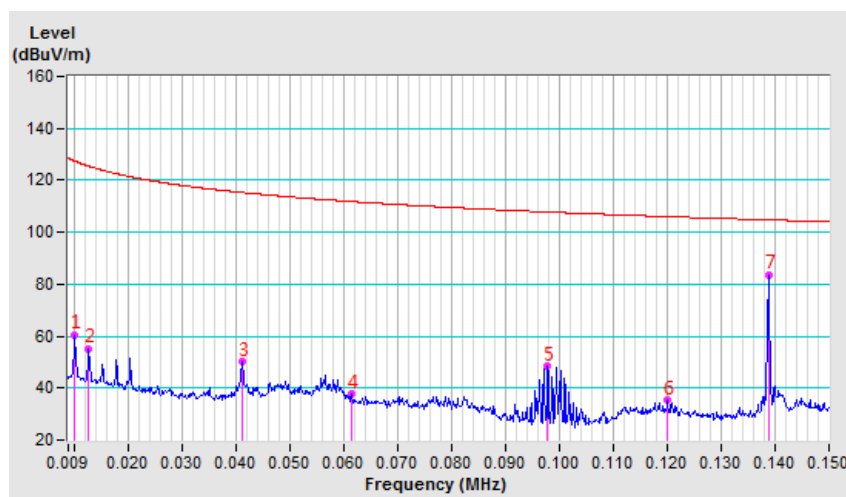

Test Mode	B	Frequency Range	150 kHz ~ 30 MHz
Test Voltage	AC 120V/60Hz	Detector Function	QP&AV
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray


ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m								
No	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	0.41570 AV	-12.07	72.27	60.20	95.23	-35.03	100	0
2	1.52760 QP	-12.04	47.11	35.07	64.84	-29.77	100	4
3	4.02620 QP	-11.94	32.68	20.74	69.54	-48.80	100	206
4	11.38910 QP	-11.75	32.73	20.98	69.54	-48.56	100	271
5	14.16680 QP	-11.54	32.58	21.04	69.54	-48.50	100	286
6	15.83250 QP	-11.54	32.12	20.58	69.54	-48.96	100	267

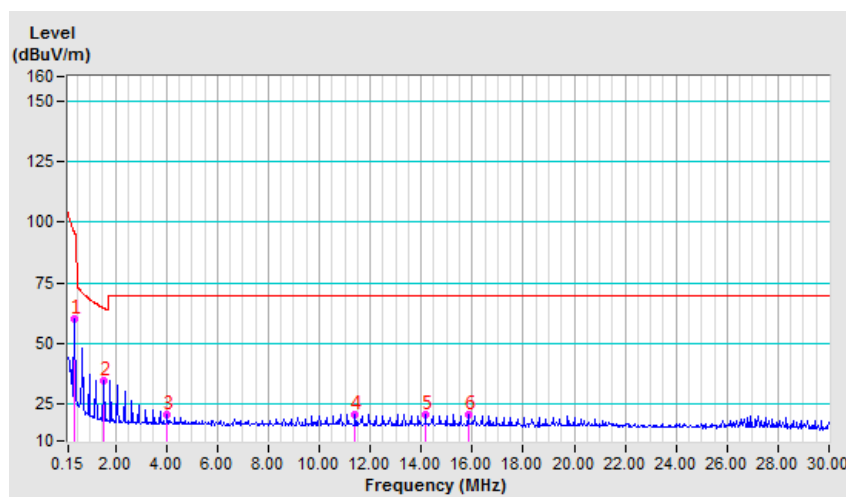

Test Mode	B	Frequency Range	30MHz ~ 1000MHz
Test Voltage	AC 120V/60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	81.30	-21.98	47.54	25.56	40.00	-14.44	200	40
2	141.92	-18.34	48.97	30.63	43.50	-12.87	200	101
3	163.69	-17.39	47.61	30.22	43.50	-13.28	200	58
4	292.71	-14.66	40.02	25.36	46.00	-20.64	200	82
5	398.41	-11.63	37.15	25.52	46.00	-20.48	200	16
6	640.91	-5.80	32.68	26.88	46.00	-19.12	200	0


REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

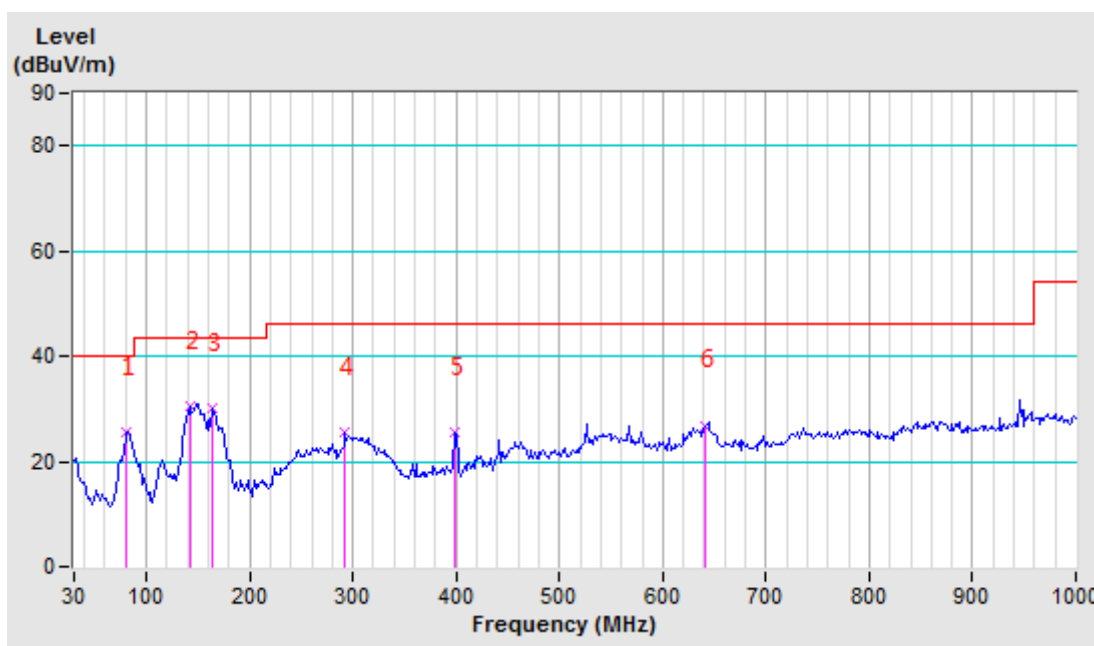

Test Mode	B	Frequency Range	30MHz ~ 1000MHz
Test Voltage	AC 120V/60Hz	Detector Function	Quasi-Peak (QP)
Environmental Conditions	20deg. C, 57% RH	Tested By	Ray

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	36.22	-14.52	45.27	30.75	40.00	-9.25	100	304
2	51.76	-21.77	46.58	24.81	40.00	-15.19	100	322
3	81.30	-21.98	44.03	22.05	40.00	-17.95	100	340
4	141.92	-18.34	50.18	31.84	43.50	-11.66	100	282
5	398.41	-11.63	41.12	29.49	46.00	-16.51	100	356
6	777.71	-3.54	30.34	26.80	46.00	-19.20	100	0

REMARKS: 1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 30-1000MHz.
4. Only emissions significantly above equipment noise floor are reported.

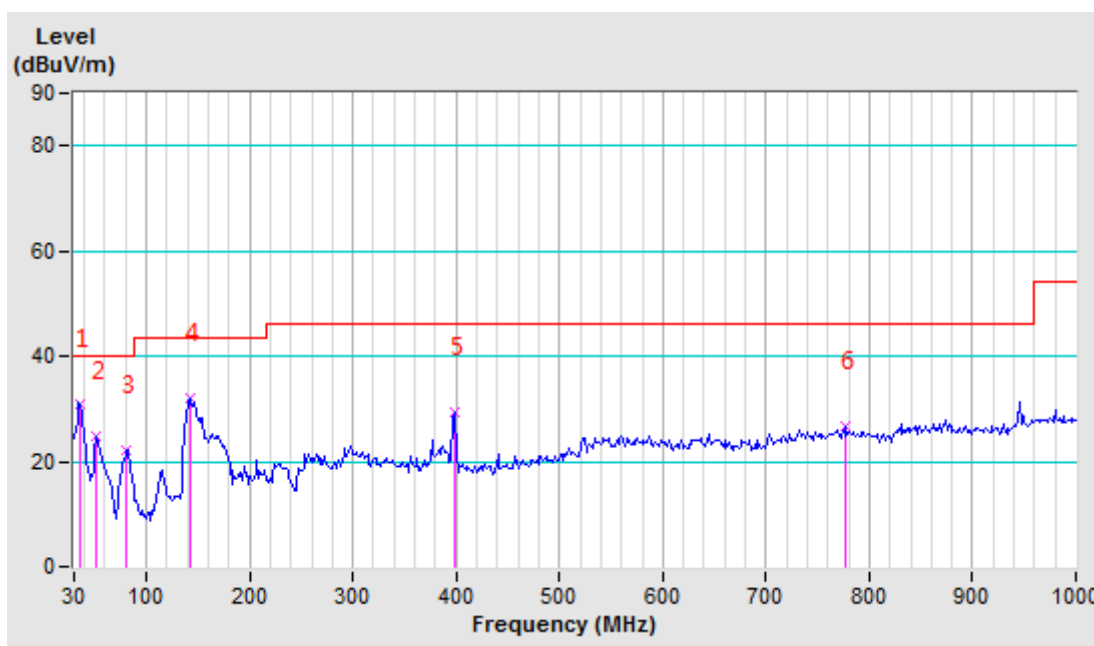

4.3. 20dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 20dB BANDWIDTH MEASUREMENT

The field strength of any emissions appearing between the band edges and out of band shall be attenuated at least 20 dB below the level of the unmodulated carrier or to the general limits in Section 15.209.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Mar. 17,21
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	1519B-045	May 29,21
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.


4.3.3 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

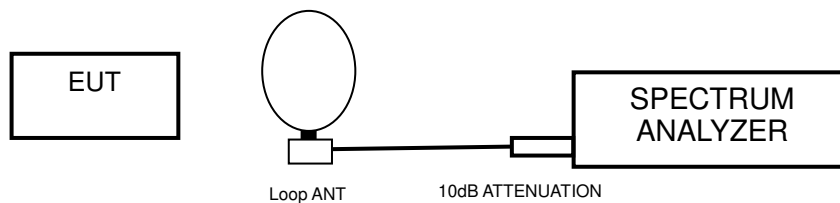


4.3.6 EUT OPERATING CONDITION

- a. Turn on the EUT.
- b. The EUT tested in charging mode and standby mode respectively.

4.3.7 TEST RESULTS


Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
A	142.403	746.700

Test Plot:

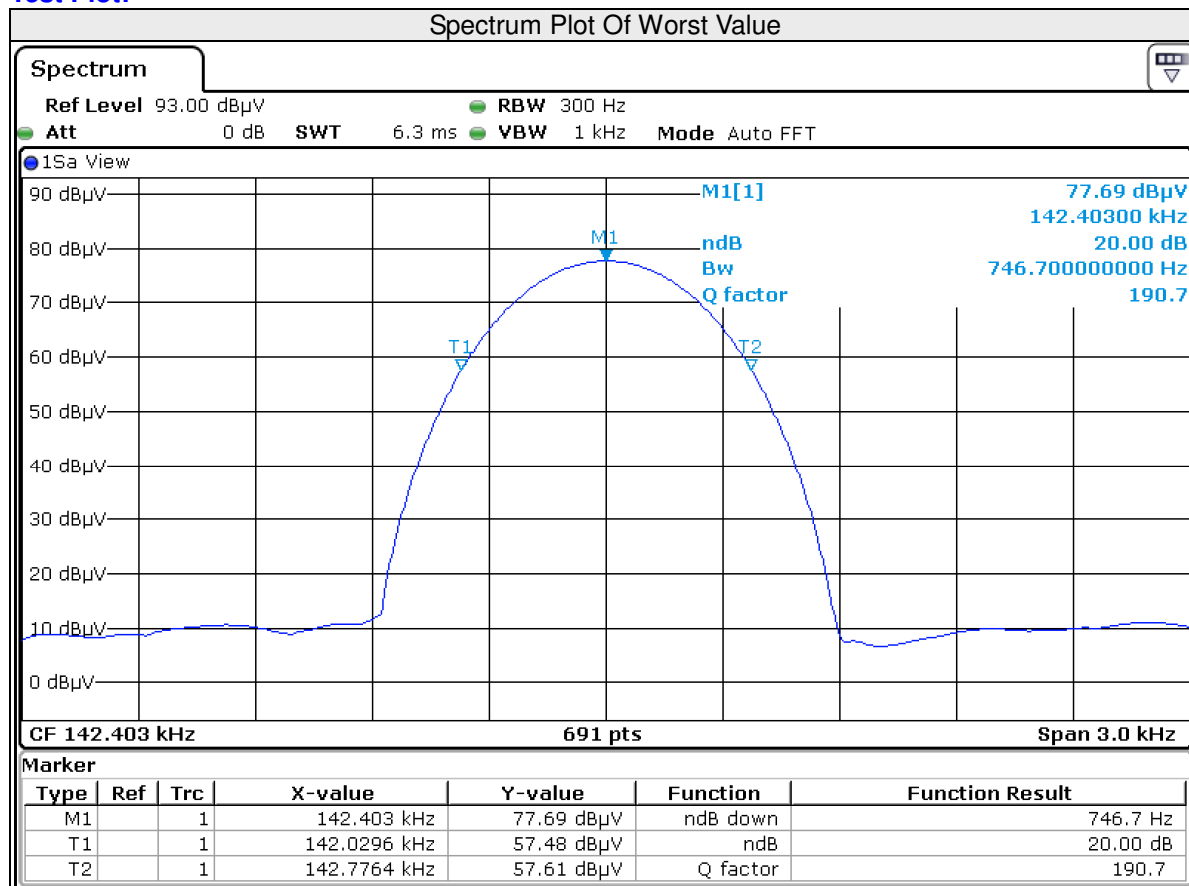

Test Mode	Frequency (kHz)	20dB Bandwidth (Hz)
B	139.752	742.400

Test Plot:

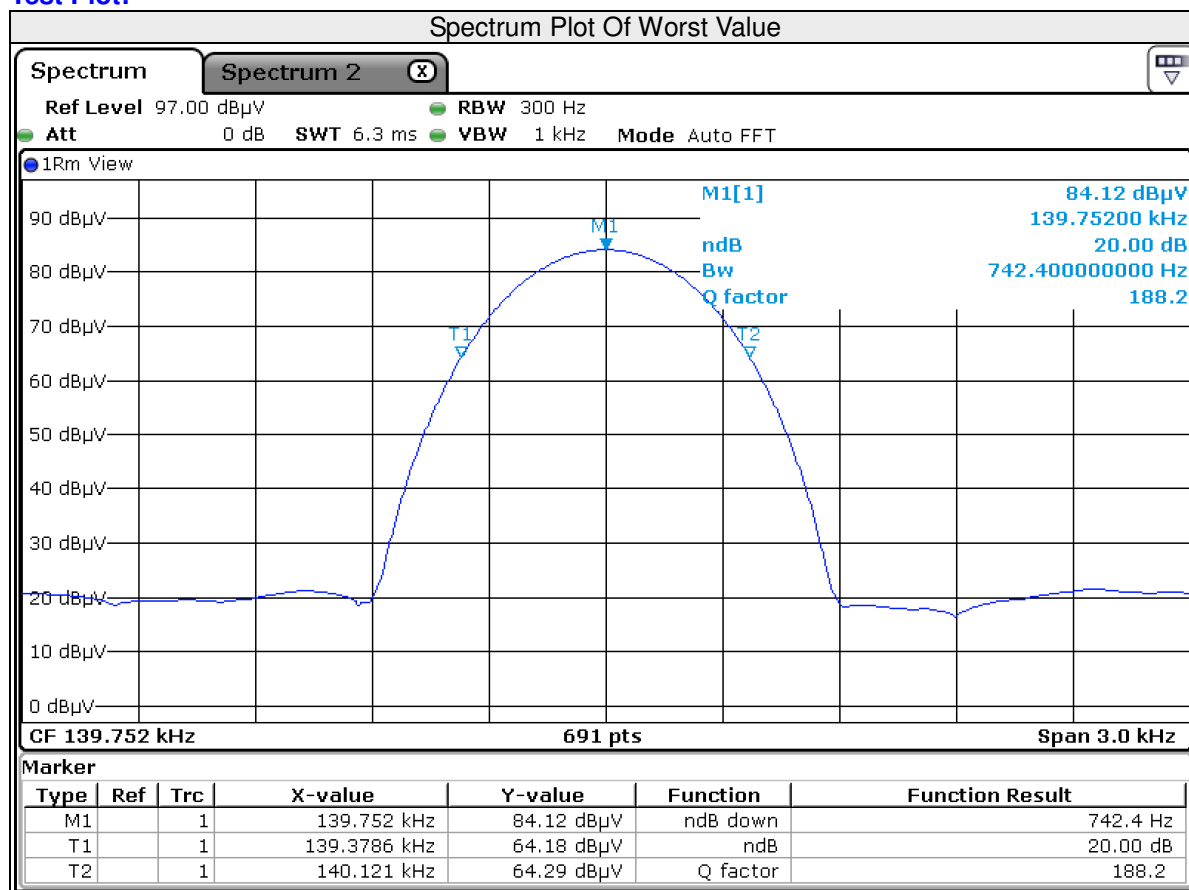



Test Report No.: RF2102WDG0030

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---