

CA_41C QPSK 20MHz+5MHz




CA 41C QPSK 20MHz+10MHz




CA 41C 16QAM 20MHz+5MHz



CA 41C 16QAM 20MHz+10MHz



CA_41C 64QAM 20MHz+5MHz




CA_41C 64QAM 20MHz+10MHz





Eurofins TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R


CA_41C QPSK 20MHz+15MHz Elegipt Spanson Reciper Occapitable Center Freq 2.593000000 GHz Center Freq 2.593000000 GHz Argination Process of Press of Press









CA_41C 16QAM 20MHz+20MHz




CA_41C 64QAM 20MHz+15MHz




CA_41C 64QAM 20MHz+20MHz





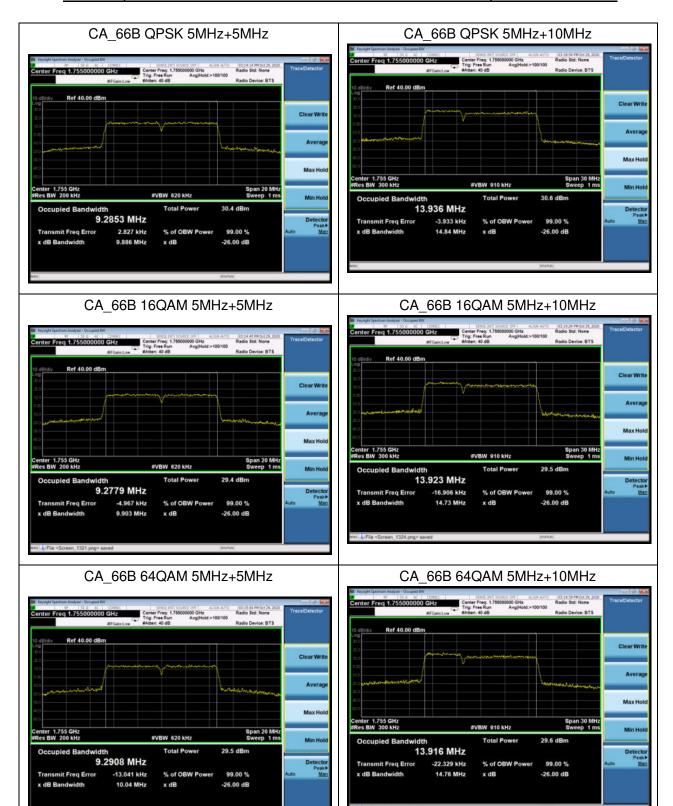

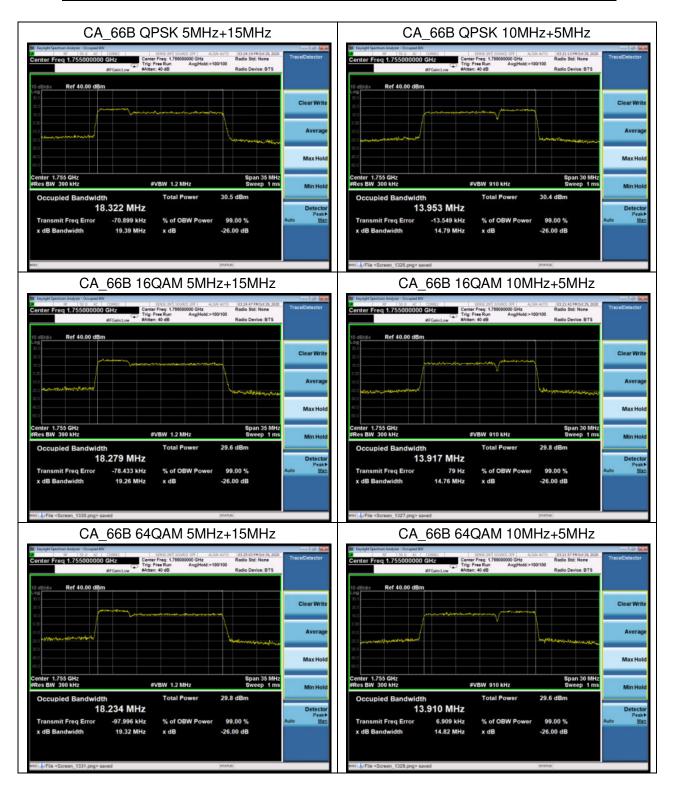



18,900 MHz

38.583 kHz

20.81 MHz

% of OBW Power

-26.00 dB

x dB

18.243 MHz


74.861 kHz


19.28 MHz

% of OBW Po

-26.00 dB

x dB

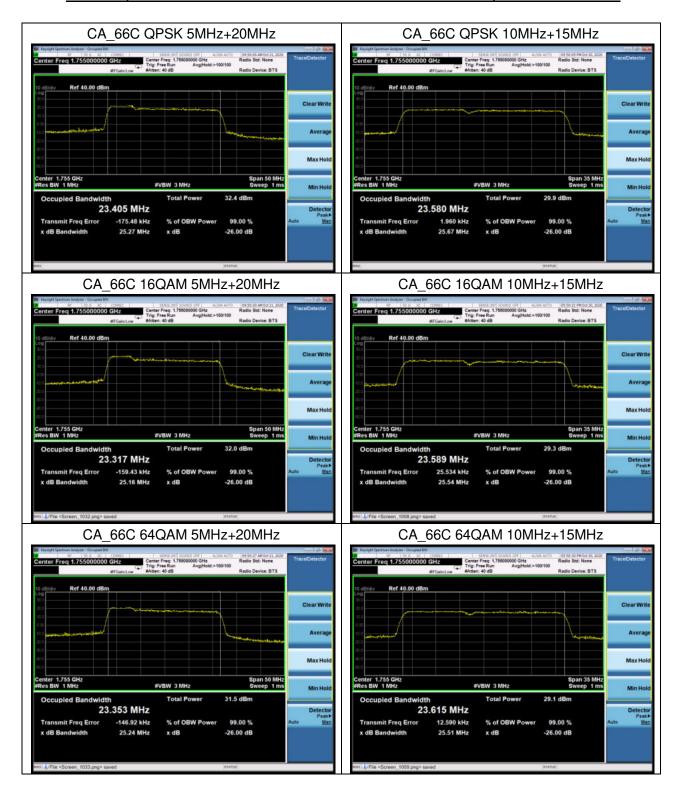

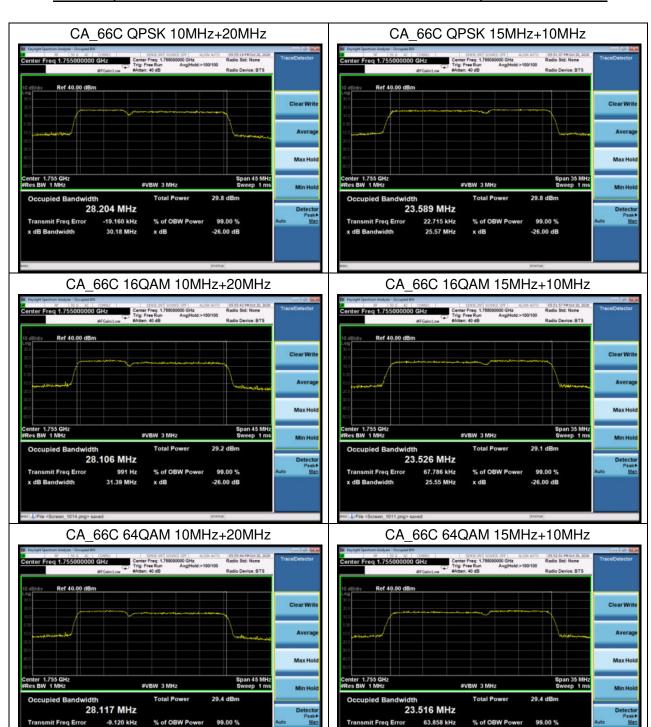

31.47 MHz

x dB


-26.00 dB


25.58 MHz

x dB


-26.00 dB



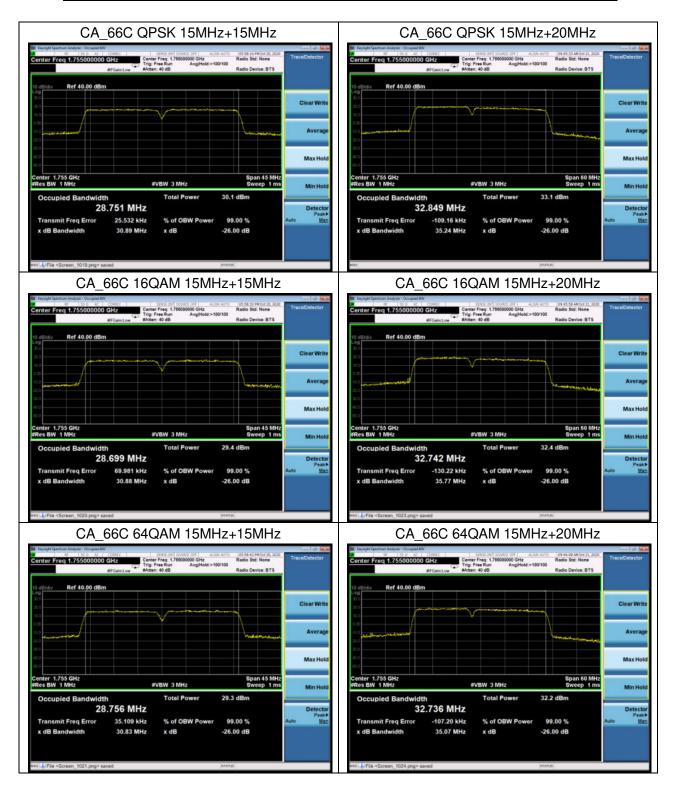

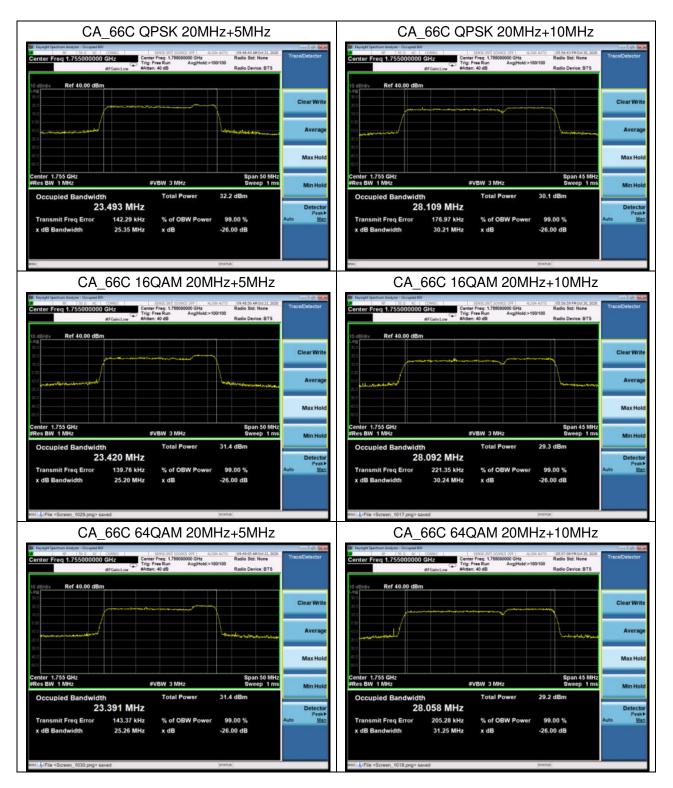




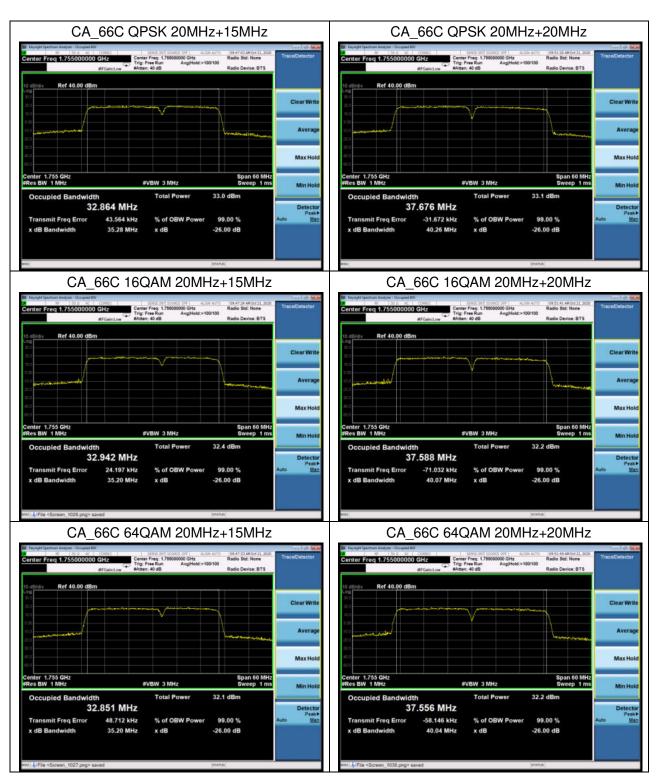

eurofins

Report No.: R2410A1542-R4


CA-4C-12A QPSK 20MHz+20MHz+20MHz CH20050




CA-4C-12A QPSK 20MHz+20MHz+20MHz CH20102



CA-4C-12A 16QAM 20MHz+20MHz+20MHz CH20050




CA-4C-12A 16QAM 20MHz+20MHz+20MHz CH20102



CA-4C-12A 64QAM 20MHz+20MHz+20MHz CH20050



CA-4C-12A 64QAM 20MHz+20MHz+20MHz CH20102



Eurofins TA Technology (Shanghai) Co., Ltd.


TA-MB-05-003R

Page 158 of 406



Report No.: R2410A1542-R4


CA-7C-4A QPSK 20MHz+20MHz+20MHz CH20850



CA-7C-4A QPSK 20MHz+20MHz+20MHz CH21152




CA-7C-4A 16QAM 20MHz+20MHz+20MHz CH20850



CA-7C-4A 16QAM 20MHz+20MHz+20MHz CH21152



CA-7C-4A 64QAM 20MHz+20MHz+20MHz CH20850



CA-7C-4A 64QAM 20MHz+20MHz+20MHz CH21152



Eurofins TA Technology (Shanghai) Co., Ltd.


TA-MB-05-003R

Page 159 of 406

eurofins

Report No.: R2410A1542-R4


CA-7C-5A QPSK 20MHz+20MHz+20MHz CH20850




CA-7C-5A QPSK 20MHz+20MHz+20MHz CH21152




CA-7C-5A 16QAM 20MHz+20MHz+20MHz CH20850



CA-7C-5A 16QAM 20MHz+20MHz+20MHz CH21152



CA-7C-5A 64QAM 20MHz+20MHz+20MHz CH20850



CA-7C-5A 64QAM 20MHz+20MHz+20MHz CH21152




Eurofins TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R

Page 160 of 406




CA-41A 41C QPSK 5MHz+20MHz+20MHz



CA-41A 41C QPSK 10MHz+20MHz+20MHz




CA-41A_41C 16QAM 5MHz+20MHz+20MHz




CA-41A_41C 16QAM 10MHz+20MHz+20MHz



CA-41A_41C 64QAM 5MHz+20MHz+20MHz




CA-41A_41C 64QAM 10MHz+20MHz+20MHz



Eurofins TA Technology (Shanghai) Co., Ltd. TA-MB-05-003R




CA-41A 41C QPSK 15MHz+20MHz+20MHz



CA-41A 41C QPSK 20MHz+20MHz+20MHz




CA-41A_41C 16QAM 15MHz+20MHz+20MHz




CA-41A_41C 16QAM 20MHz+20MHz+20MHz



CA-41A_41C 64QAM 15MHz+20MHz+20MHz



CA-41A_41C 64QAM 20MHz+20MHz+20MHz




Eurofins TA Technology (Shanghai) Co., Ltd. TA-MB-05-003R



Report No.: R2410A1542-R4


CA-41D QPSK 10MHz+15MHz+20MHz CH 40477




CA-41D QPSK 10MHz+15MHz+20MHz CH 40474




CA-41D 16QAM 10MHz+15MHz+20MHz CH 40477




CA-41D 16QAM 10MHz+15MHz+20MHz CH 40474



CA-41D 64QAM 10MHz+15MHz+20MHz CH 40477



CA-41D 64QAM 10MHz+15MHz+20MHz CH 40474



Eurofins TA Technology (Shanghai) Co., Ltd.


TA-MB-05-003R

Page 163 of 406


CA-41D QPSK 10MHz+20MHz+20MHz




CA-41D QPSK 15MHz+15MHz+20MHz




CA-41D 16QAM 10MHz+20MHz+20MHz




CA-41D 16QAM 15MHz+15MHz+20MHz



CA-41D 64QAM 10MHz+20MHz+20MHz




CA-41D 64QAM 15MHz+15MHz+20MHz




Eurofins TA Technology (Shanghai) Co., Ltd. TA-MB-05-003R




CA-41D QPSK 15MHz+20MHz+20MHz



CA-41D QPSK 20MHz+20MHz+20MHz




CA-41D 16QAM 15MHz+20MHz+20MHz



CA-41D 16QAM 20MHz+20MHz+20MHz



CA-41D 64QAM 15MHz+20MHz+20MHz



CA-41D 64QAM 20MHz+20MHz+20MHz





5.3 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 D01 v03r01 Section 6.0

The EUT was connected to spectrum analyzer and system simulator via a power divider.

The band edges of low and high channels for the highest RF powers were measured.

For LTE Band 41 Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.

RBW is set to 51 kHz, VBW is set to 160 kHz for WCDMA Band IV.

RBW is set to 15 kHz, VBW is set to 43 kHz for LTE Band 4/66 (1.4MHz).

RBW is set to 30 kHz, VBW is set to 91kHz for LTE Band 4/66 (3MHz).

RBW is set to 51 kHz, VBW is set to 150 kHz for LTE Band 4/66/(5MHz).

RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 4/66 (10MHz).

RBW is set to 150 kHz, VBW is set to 470 kHz for LTE Band 4/66 (15MHz).

RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 4/66 (20MHz)

RBW is set to 1MHz (0.00Hz~ 2.5MHz) for LTE Band 7/38/41.

RBW is set to 100kHz (2.5MHz~ 3.5MHz) for LTE Band 7/38/41.

RBW is set to 1MHz (3.5MHz~15MHz) for LTE Band 7/38/41.

RBW is set to 30 kHz, VBW is set to 100kHz for LTE Band 12/71(1.4MHz/3MHz/5MHz/10MHz).

RBW is set to 6.8kHz for LTE Band 13 (763MHz~775MHz).

RBW is set to 100 kHz for LTE Band 13 (775MHz~777MHz).

RBW is set to 100 kHz for LTE Band 13 (787MHz~793MHz).

RBW is set to 6.8 kHz for LTE Band 13 (793MHz~805MHz).

RBW is set to 1MHz (0.00Hz~ 15MHz) for CA-7C/ CA-38C/ CA-41C.

RBW is set to 620kHz (15MHz~ 16MHz) for CA-7C/ CA-38C/ CA-41C.

RBW is set to 1MHz (16MHz~60MHz) for CA-7C/ CA-38C/ CA-41C.

RBW is set to 120 kHz, VBW is set to 360 kHz for CA-66B(5M+5M).

RBW is set to 220 kHz, VBW is set to 680 kHz for CA-66B(10M+10M)

RBW is set to 300 kHz, VBW is set to 910 kHz for CA-66C(10M+15M).

RBW is set to 430 kHz, VBW is set to 1.3MHz for CA-66C(20M+20M).

RBW is set to 820 kHz, VBW is set to 2.4MHz for CA-4C-12A.

RBW is set to 1MHz (0.00Hz~ 20MHz) for CA-7C-4A/ CA-7C-5A/ CA-41A-41C/CA-41D.

RBW is set to 820kHz (20MHz~ 21MHz) for CA-7C-4A/ CA-7C-5A/ CA-41A-41C/CA-41D.

RBW is set to 1MHz (21MHz~80MHz) for CA-7C-4A/ CA-7C-5A/ CA-41A-41C/CA-41D.

on spectrum analyzer.




Set spectrum analyzer with RMS detector.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

Checked that all the results comply with the emission limit line.

Test Setup

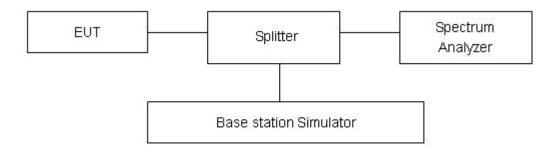

Limits

Rule Part 27.53(i) By a factor of not less than 43 + 10 log (P) dB on all frequencies between 2305 and 2320 MHz.

Rule Part 27.53(h) specifies that "for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least 43 + 10 log₁₀ (P) dB"

Rule Part 27.53(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Rule Part 27.53(m) (4)/ specifies that "for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



Example:

The limit line is derived from 43 + 10log (P) dB below the transmitter power P(Watts)

- = P(W) [43 + 10log(P)] (dB)
- = [30 + 10log(P)](dBm) [43 + 10log(P)](dB) = -13dBm.

Rule Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Rule Part 27.53 (c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB;
- (3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth

Measurement Uncertainty


of at least 30 kHz may be employed:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96, U=0.684dB.





Test Result

All the test traces in the plots shows the test results clearly.










LTE Band 4 QPSK 1.4MHz CH-High, 1 RB



LTE Band 4 QPSK 1.4MHz CH-Low, 100%RB




LTE Band 4 QPSK 1.4MHz CH-High, 100%RB



LTE Band 4 QPSK 3MHz CH-Low, 1 RB




LTE Band 4 QPSK 3MHz CH-High, 1 RB




Eurofins TA Technology (Shanghai) Co., Ltd. TA-M


LTE Band 4 QPSK 3MHz CH-Low, 100%RB




LTE Band 4 QPSK 3MHz CH-High, 100%RB




LTE Band 4 QPSK 5MHz CH-Low, 1 RB



LTE Band 4 QPSK 5MHz CH-High, 1 RB



LTE Band 4 QPSK 5MHz CH-Low, 100%RB



LTE Band 4 QPSK 5MHz CH-High, 100%RB



Eurofins TA Technology (Shanghai) Co., Ltd.

TA-MB-05-003R

Page 171 of 406