

Appendix C - Highest Measurement Plots

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/26

01 WLAN 2.4 GHz_802.11b_Ch6_Side 1_0 mm_ANT Main

DUT: E1600WK

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.006

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.775$ S/m; $\epsilon_r = 39.602$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.28, 7.28, 7.28) @ 2437 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.603 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.14 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 0.600 W/kg

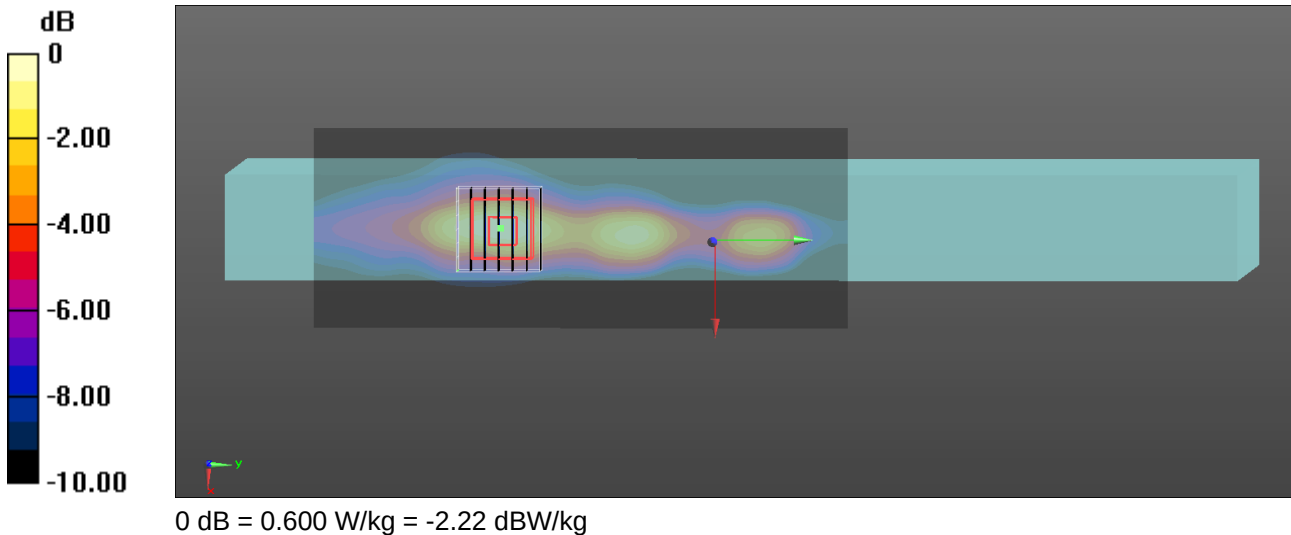

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/26

02 WLAN 2.4 GHz 802.11b_Ch1_Side 1_0 mm_ANT Aux

DUT: E1600WK

Communication System: UID 0, IEEE 802.11b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.006

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.746$ S/m; $\epsilon_r = 39.677$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.28, 7.28, 7.28) @ 2412 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.25 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.49 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.320 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 1.21 W/kg

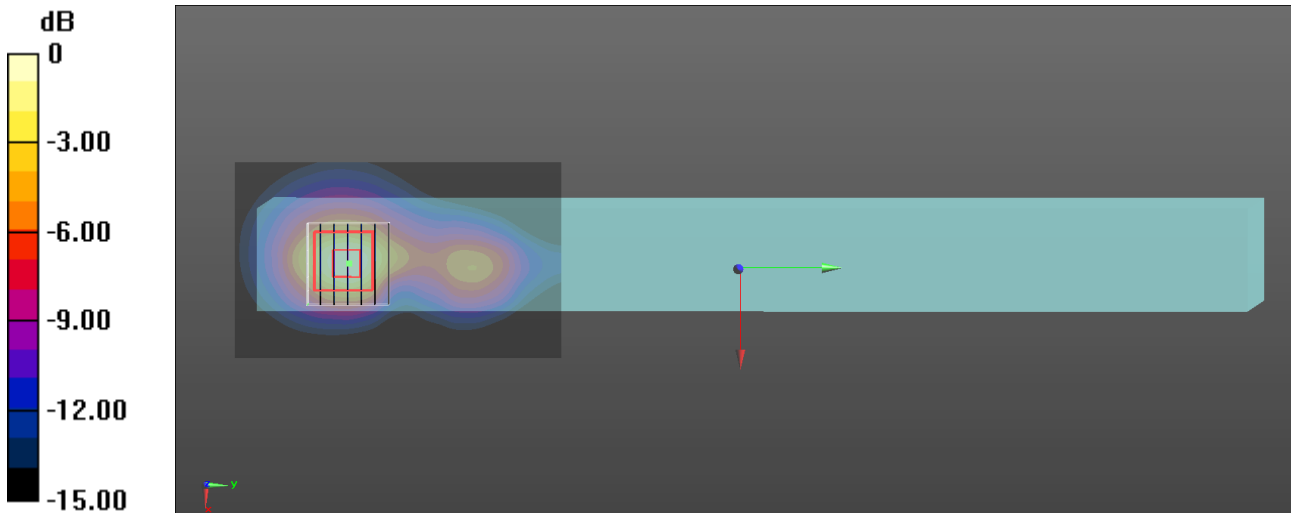

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/26

03 Bluetooth_GFSK_Ch0_Side 1_0 mm_ANT Aux

DUT: E1600WK

Communication System: UID 0, Bluetooth 3.0 (0); Frequency: 2402 MHz; Duty Cycle: 1:1.301

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.735$ S/m; $\epsilon_r = 39.717$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(7.28, 7.28, 7.28) @ 2402 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.147 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.495 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 0.146 W/kg

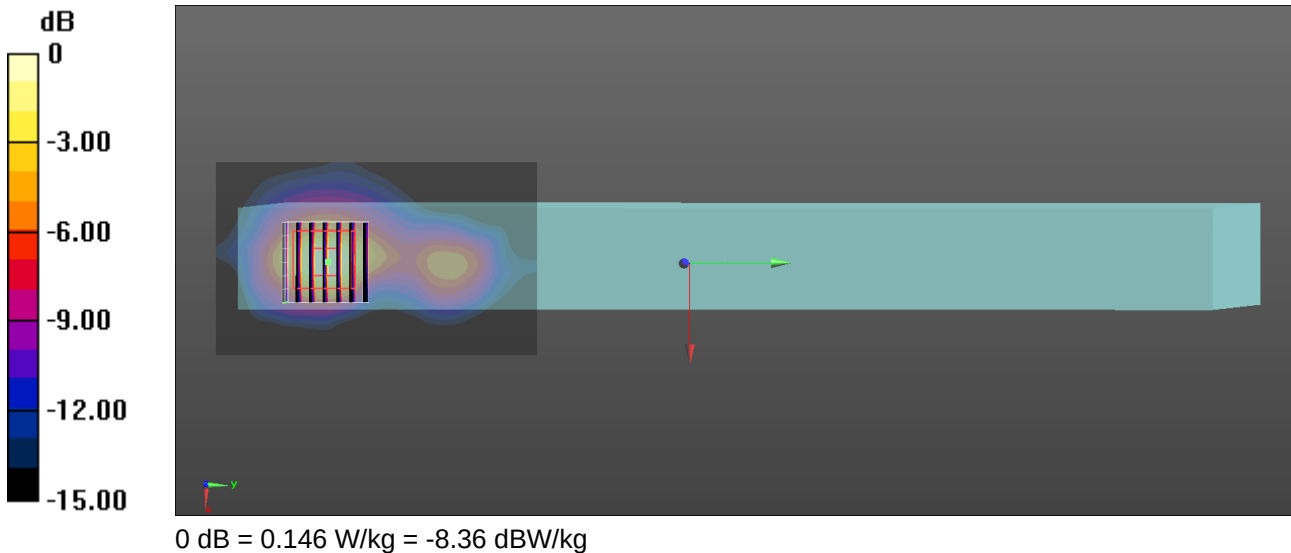

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/27

04_WLAN 5 GHz_802.11ac VHT160_Ch50_Side 1_0 mm_ANT Main

DUT: E1600WK

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT160 (0); Frequency: 5250 MHz;Duty Cycle: 1:1.074

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.723$ S/m; $\epsilon_r = 36.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(5.04, 5.04, 5.04) @ 5250 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.40 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.17 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.39 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 1.40 W/kg

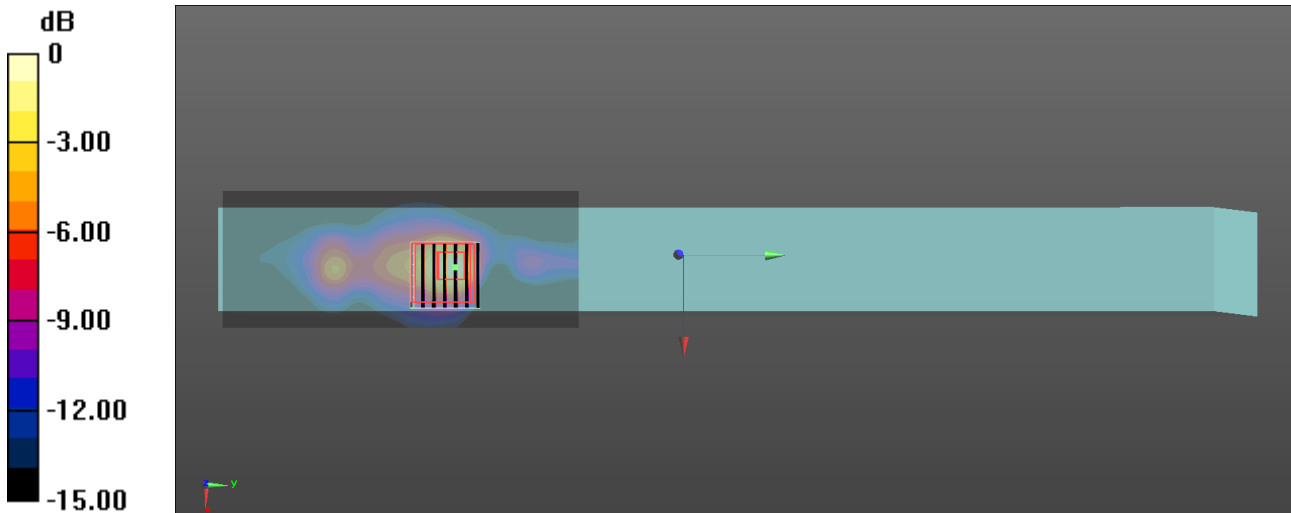

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/27

05_WLAN 5 GHz_802.11ac VHT160_Ch50_Side 1_0 mm_ANT Aux

DUT: E1600WK

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT160 (0); Frequency: 5250 MHz;Duty Cycle: 1:1.074

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.723$ S/m; $\epsilon_r = 36.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(5.04, 5.04, 5.04) @ 5250 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.88 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.34 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 1.90 W/kg

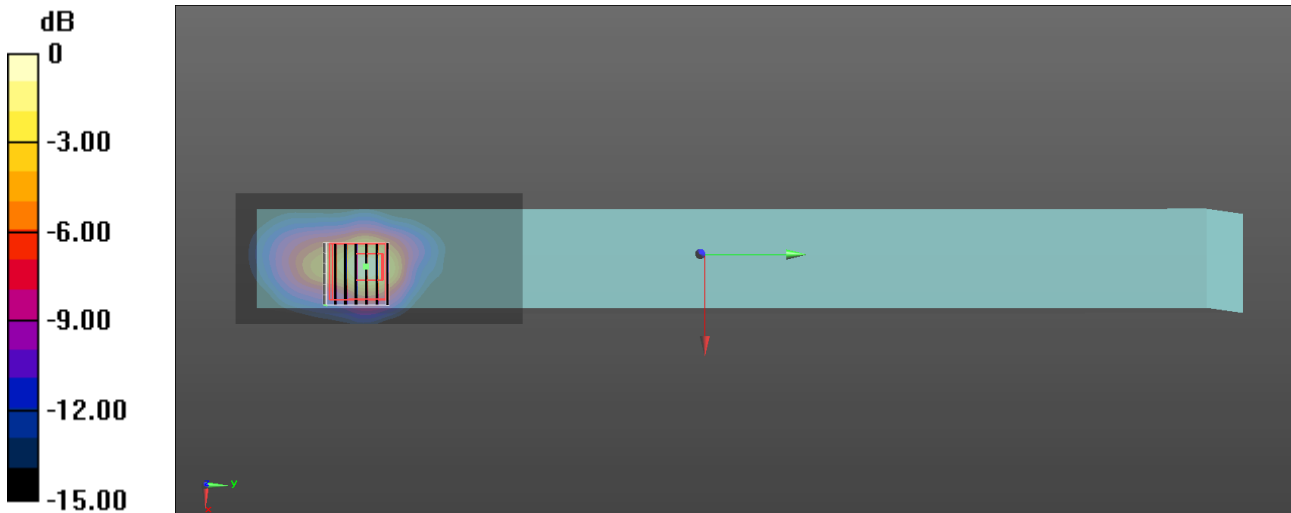

0 dB = 1.90 W/kg = 2.79 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/27

06_WLAN 5 GHz_802.11ac VHT80_Ch138_Side 1_0 mm_ANT Main

DUT: E1600WK

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5690 MHz;Duty Cycle: 1:1.042

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.174$ S/m; $\epsilon_r = 35.666$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.64, 4.64, 4.64) @ 5690 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.18 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 1.30 W/kg

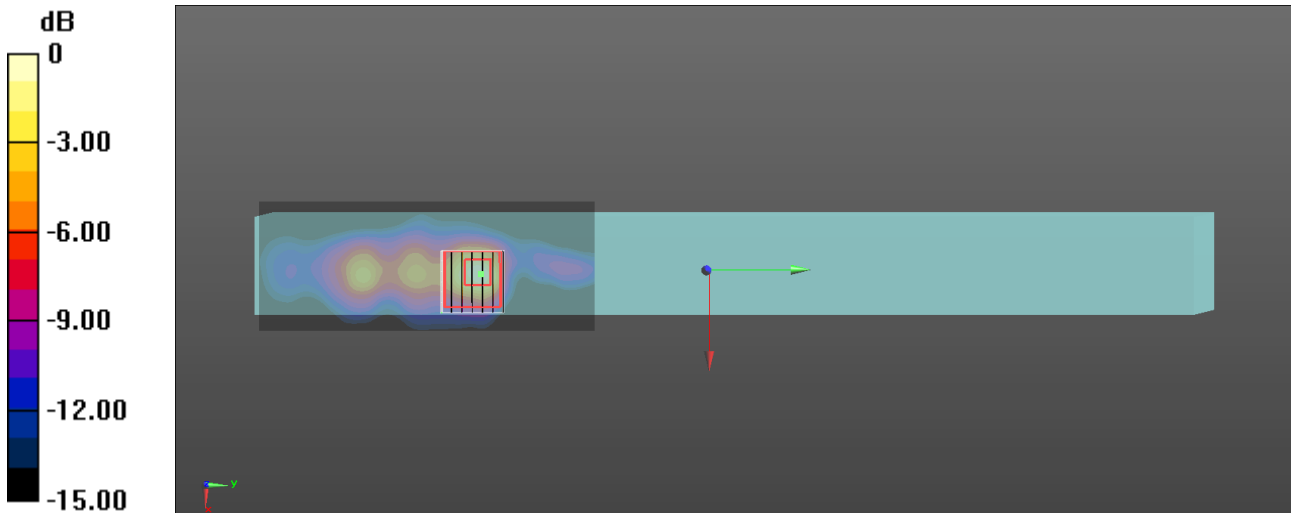

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/27

07_WLAN 5 GHz_802.11ac VHT80_Ch138_Side 1_0 mm_ANT Aux

DUT: E1600WK

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5690 MHz;Duty Cycle: 1:1.042

Medium parameters used: $f = 5690$ MHz; $\sigma = 5.174$ S/m; $\epsilon_r = 35.666$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.64, 4.64, 4.64) @ 5690 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.15 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 1.03 W/kg

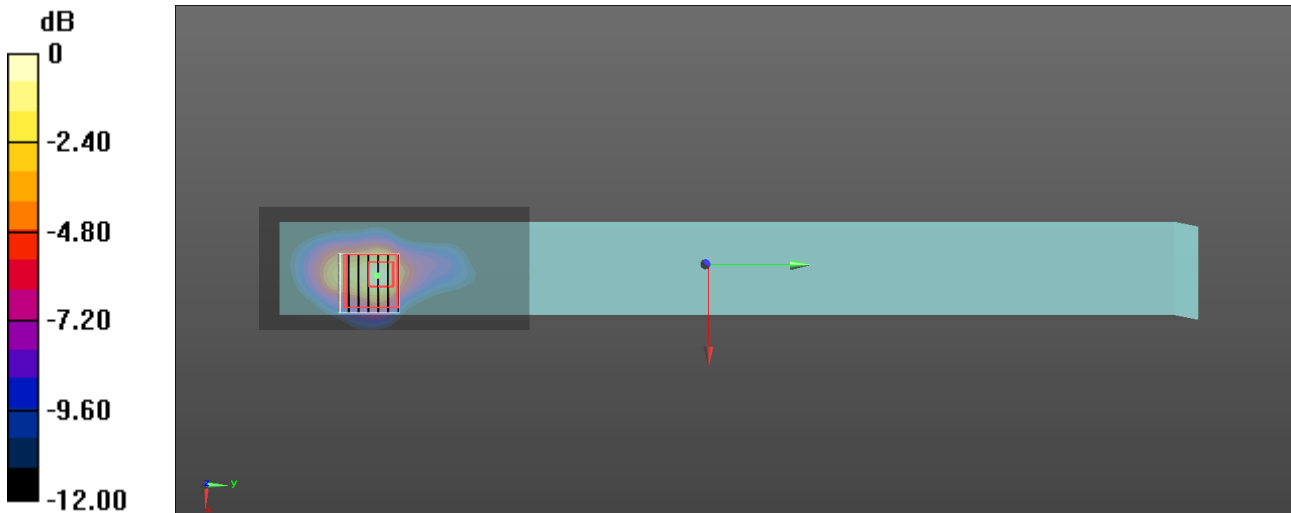

0 dB = 1.03 W/kg = 0.13 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/27

08_WLAN 5 GHz_802.11n HT40_Ch159_Side 1_0 mm_ANT Main

DUT: E1600WK

Communication System: UID 0, IEEE 802.11n(5GHz)HT40 (0); Frequency: 5795 MHz;Duty Cycle: 1:1.021

Medium parameters used: $f = 5795$ MHz; $\sigma = 5.275$ S/m; $\epsilon_r = 35.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.64, 4.64, 4.64) @ 5795 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.845 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 0.567 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 1.48 W/kg

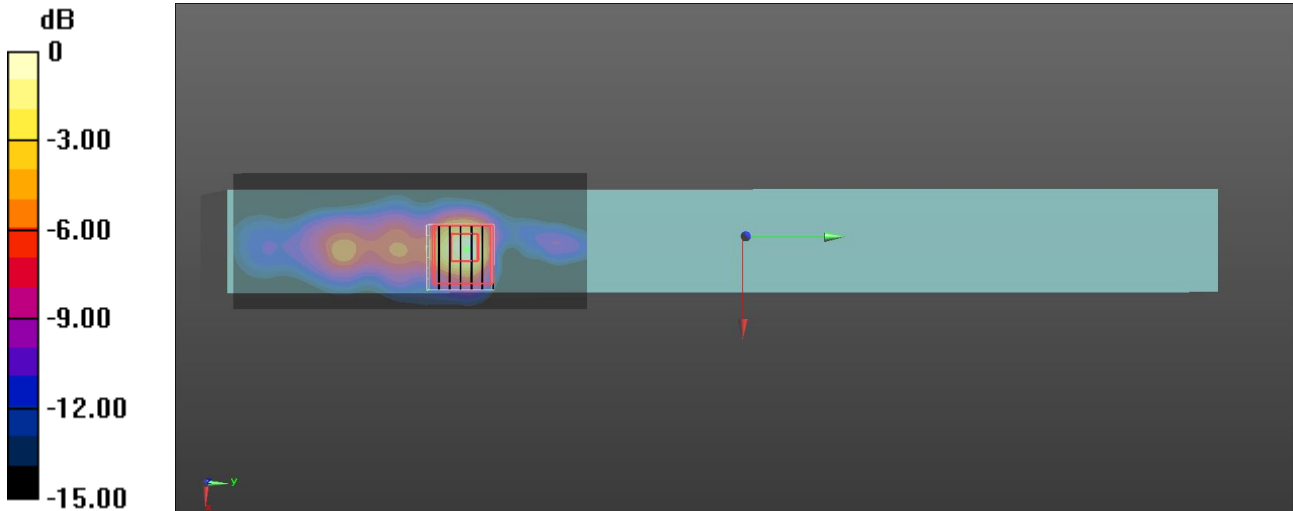

0 dB = 1.48 W/kg = 1.70 dBW/kg

Test Laboratory: A Test Lab Techno Corp.

Date: 2022/1/27

09_WLAN 5 GHz_802.11ac VHT80_Ch155_Side 1_0 mm_ANT Aux

DUT: E1600WK

Communication System: UID 0, IEEE 802.11ac(5GHz)VHT80 (0); Frequency: 5775 MHz;Duty Cycle: 1:1.042

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.252$ S/m; $\epsilon_r = 35.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5.2 Configuration:

- Area Scan setting - Find Secondary Maximum Within:2.0dB and with a peak SAR value greater than 0.5 W/Kg
- Probe: EX3DV4 - SN3977; ConvF(4.64, 4.64, 4.64) @ 5775 MHz; Calibrated: 2021/7/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn779; Calibrated: 2021/7/30
- Phantom: ELI V4.0; Type: QD OVA 001 BB; Serial: 1036
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.56 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 1.15 W/kg

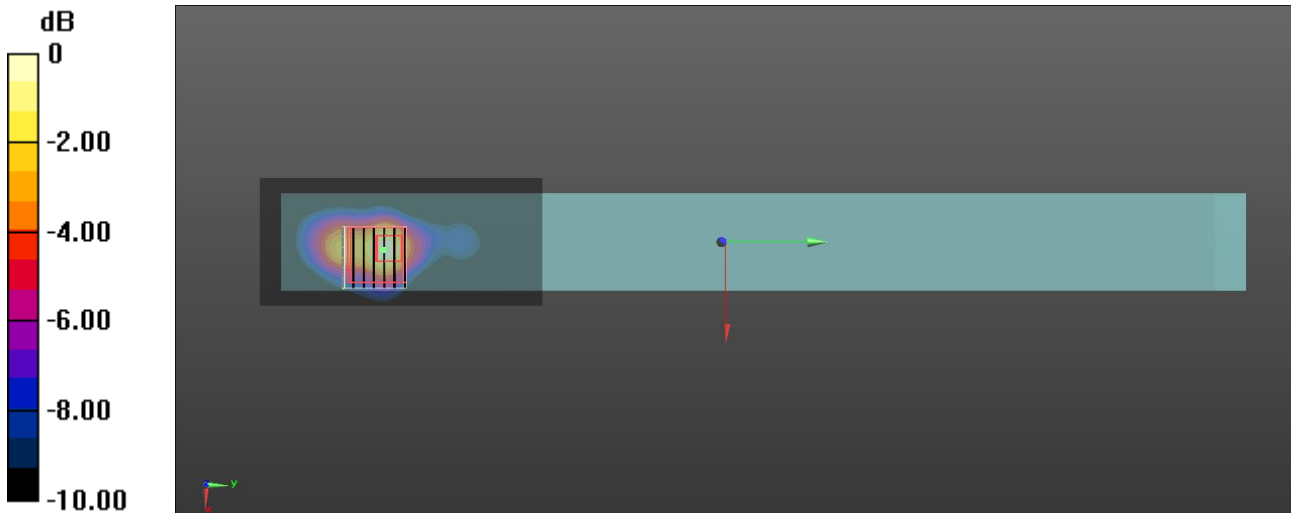

0 dB = 1.15 W/kg = 0.61 dBW/kg